

APPENDIX 7

LIQUEFACTION

APPENDIX 7.1
LIQUEFACTION SUMMARY

1 SEISMIC DESIGN PARAMETERS

The earthquake peak ground acceleration (PGA) and magnitude (M_w) for the study area has been determined based on the values provided in Table A1 of MBIE Module 1.

Based on this table, the following PGAs for various annual exceedance probabilities (AEP) within the Auckland region are summarised in Table 7.1 below for Importance Level 2 structures and a 50-year design life given the expected future land use. This importance level is consistent with developments of a similar nature in the surrounding Takanini area.

Table 7.1. Summary of Design Peak Ground Acceleration (PGA)

Design Case	AEP	PGA
Serviceability Limit State (SLS)	1:25	0.05
Ultimate Limit State (ULS)	1:500	0.19

2 COMPUTER LIQUEFACTION ANALYSIS

A seismic liquefaction assessment was carried out using GeoLogismiki CLiq version 1.7 software in terms of earthquake peak ground acceleration (PGA) and magnitude (M_w) by applying the Boulanger and Idriss (2014) CPT-based method in accordance with MBIE Module 3, which evaluates a soils potential to liquefy based on the soil behaviour type index (I_c) and liquefaction triggering factor (i.e. the factor of safety).

The following assumptions have been made in our analysis:

- A calculation has been completed for both SLS and ULS seismic scenarios as outlined in the NZ Building Code and related documents.
- A conservative groundwater depth of 1.0m was applied for all CPTs.
- Clay-like cyclic softening was applied for selected CPT traces where the CPTs / nearby boreholes indicate Undifferentiated Holocene Alluvium. The materials in the remaining traces comprise cohesive soils, which are generally stiff to hard and medium to high plasticity and are not considered to be susceptible to liquefaction.
- Lateral spread was not assessed given the relatively flat nature of the site, especially in areas where boreholes indicate Undifferentiated Holocene Alluvium. Lateral spread of the proposed stormwater channel has been discussed in the slope stability section of this report (Section 5).

A summary of the assumptions against each CPT trace are indicated in Table 7.2 below and a full summary of the calculated CLiq settlements are given in Tables 7.3 and 7.4. Full CLiq records are presented in Appendix 7.2 and these results are discussed in Section 7.4 of this report.

Table 7.2. Computer Liquefaction Analysis Assumptions

Test ID	Cyclic Softening Assessed (Y/N)
ZONE 1 - TAURANGA GROUP	
CPT02	Y
CPT03	Y
CPT03A	Y
CPT04A	Y
CPT06	Y
CPT11	Y
CPT13A	Y
CPT14	Y
CPT15	Y
CPT18	Y
CPT19A	Y
CPT21A	Y
CPT22	Y
CPT403	Y
CPT407	Y
CPT410	Y
CPT413	Y
CPT414	Y
CPT415A	Y
ZONE 2 - PUKETOKA FORMATION / EAST COAST BAYS FORMATION	
CPT01	N
CPT05	N
CPT07	N
CPT08	N
CPT09	N
CPT09A	N
CPT10	N
CPT12	N
CPT16	N
CPT17	N
CPT20	N
CPT401	N
CPT402	N
CPT404	N
CPT405	N
CPT406	N
CPT408	N
CPT409	N
CPT411	N
CPT412	N

Table 7.3. SLS Liquefaction Analysis Summary Table

Test ID	Thickness of Non-Liquefiable Crust (m)	Potential Vertical Settlement within Liquefiable Layers (mm)	LSN
ZONE 1 - TAURANGA GROUP			
CPT02		No Liquefaction Calculated	0
CPT03		No Liquefaction Calculated	0
CPT03A		No Liquefaction Calculated	0
CPT04A	2.7	0	0
CPT06	3.0	0	0
CPT11		No Liquefaction Calculated	0
CPT13A	3.5	0	0
CPT14	7.0	0	0
CPT15	2.3	0	0
CPT18	3.2	0	0
CPT19A	3.3	0	0
CPT21A	2.2	0	0
CPT22		No Liquefaction Calculated	0
CPT403		No Liquefaction Calculated	0
CPT407		No Liquefaction Calculated	0
CPT410		No Liquefaction Calculated	0
CPT413		No Liquefaction Calculated	0
CPT414	9.6	0	0
CPT415A		No Liquefaction Calculated	0
ZONE 2 - PUKETOKA FORMATION / EAST COAST BAYS FORMATION			
CPT01		No Liquefaction Calculated	0
CPT05		No Liquefaction Calculated	0
CPT07		No Liquefaction Calculated	0
CPT08		No Liquefaction Calculated	0
CPT09		No Liquefaction Calculated	0
CPT09A		No Liquefaction Calculated	0
CPT10		No Liquefaction Calculated	0
CPT12		No Liquefaction Calculated	0
CPT16		No Liquefaction Calculated	0
CPT17		No Liquefaction Calculated	0
CPT20		No Liquefaction Calculated	0
CPT401		No Liquefaction Calculated	0
CPT402		No Liquefaction Calculated	0
CPT404		No Liquefaction Calculated	0
CPT405		No Liquefaction Calculated	0
CPT406		No Liquefaction Calculated	0
CPT408		No Liquefaction Calculated	0
CPT409		No Liquefaction Calculated	0
CPT411		No Liquefaction Calculated	0
CPT412		No Liquefaction Calculated	0

Table 7.4. ULS Liquefaction Analysis Summary Table


Test ID	Thickness of Non-Liquefiable Crust (m)	Potential Vertical Settlement within Liquefiable Layers (mm)	LSN
ZONE 1 - TAURANGA GROUP			
CPT02	1.3	5	0.553
CPT03	6.3	10	1.952
CPT03A	1.9	20	4.566
CPT04A	1.7	0	0
CPT06	2.0	5	0.590
CPT11	3.3	5	0.274
CPT13A	2.8	5	0.473
CPT14	3.1	5	0.407
CPT15	2.2	10	0.790
CPT18	2.2	0	0
CPT19A	1.9	5	0.284
CPT21A	2.1	15	1.498
CPT22	5.0	85	13.166
CPT403	3.4	105	14.739
CPT407	5.6	35	3.843
CPT410	2.6	10	1.767
CPT413	5.1	0	0
CPT414	3.0	5	0.317
CPT415A	2.6	5	0.261
ZONE 2 - PUKETOKA FORMATION / EAST COAST BAYS FORMATION			
CPT01	2.6	10	1.590
CPT05	3.8	70	13.870
CPT07	4.5	60	9.726
CPT08	5.3	15	2.400
CPT09	5.2	25	4.072
CPT09A	1.3	40	11.993
CPT10	1.7	25	9.806
CPT12	2.0	45	8.713
CPT16	5.3	60	8.788
CPT17	1.8	45	12.216
CPT20	2.1	65	10.959
CPT401	5.4	50	7.191
CPT402	3.3	85	14.546
CPT404	5.1	85	11.953
CPT405	3.1	85	12.867
CPT406	4.6	55	8.450
CPT408	5.4	50	7.273
CPT409	3.9	85	14.266
CPT411	3.7	60	8.291
CPT412	1.4	30	4.422

APPENDIX 7.2
SLS LIQUEFACTION ANALYSIS RESULTS

Project title :

Location :


Overall vertical settlements report

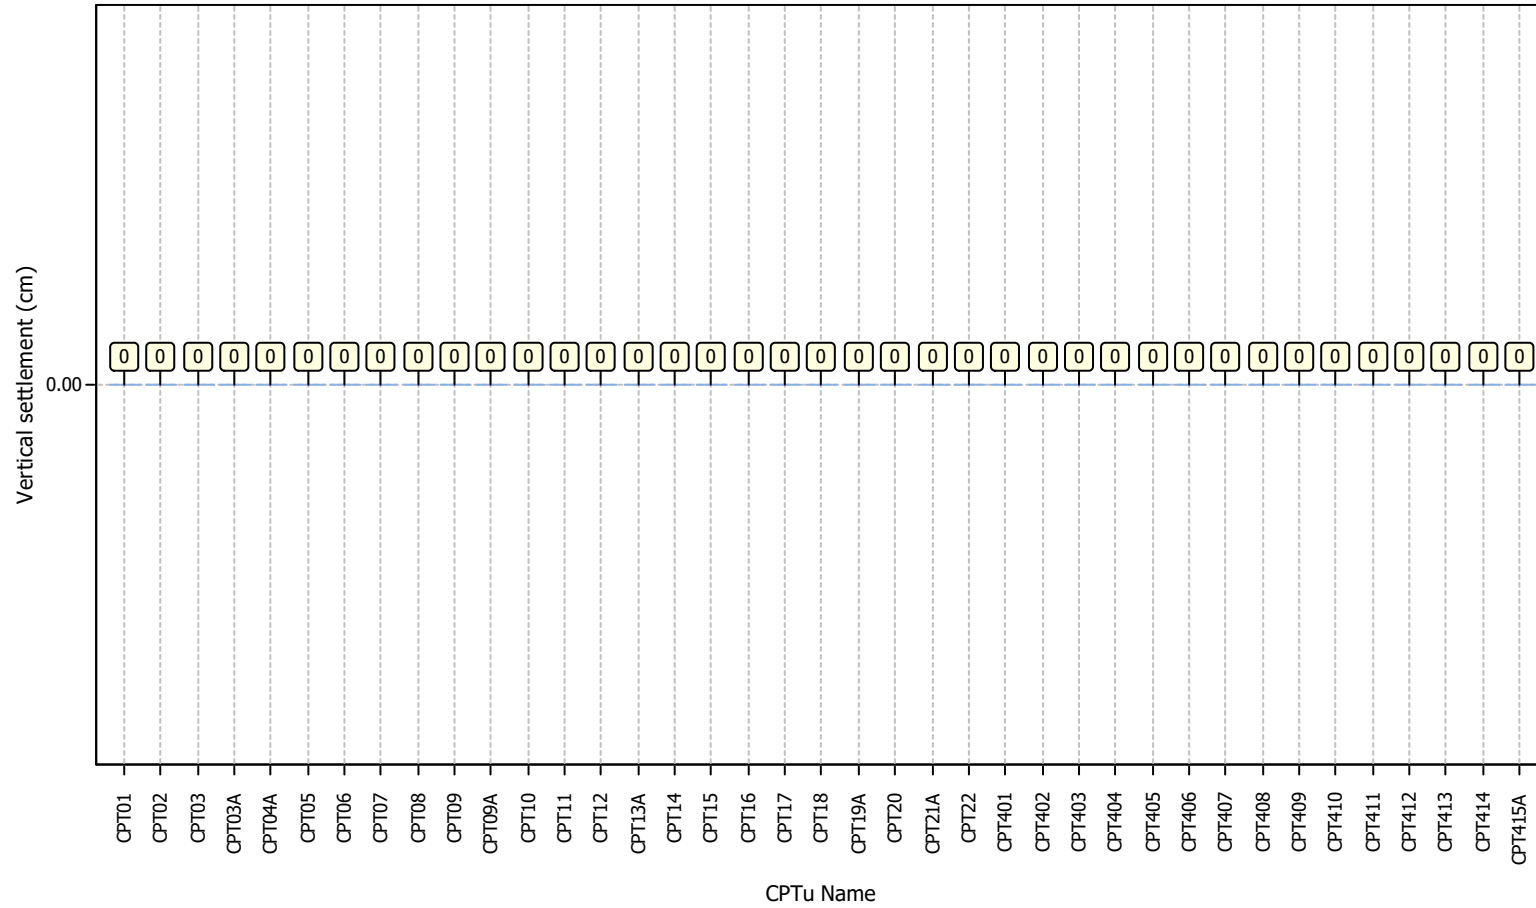

Project title :

Location :

Overall Liquefaction Severity Number report

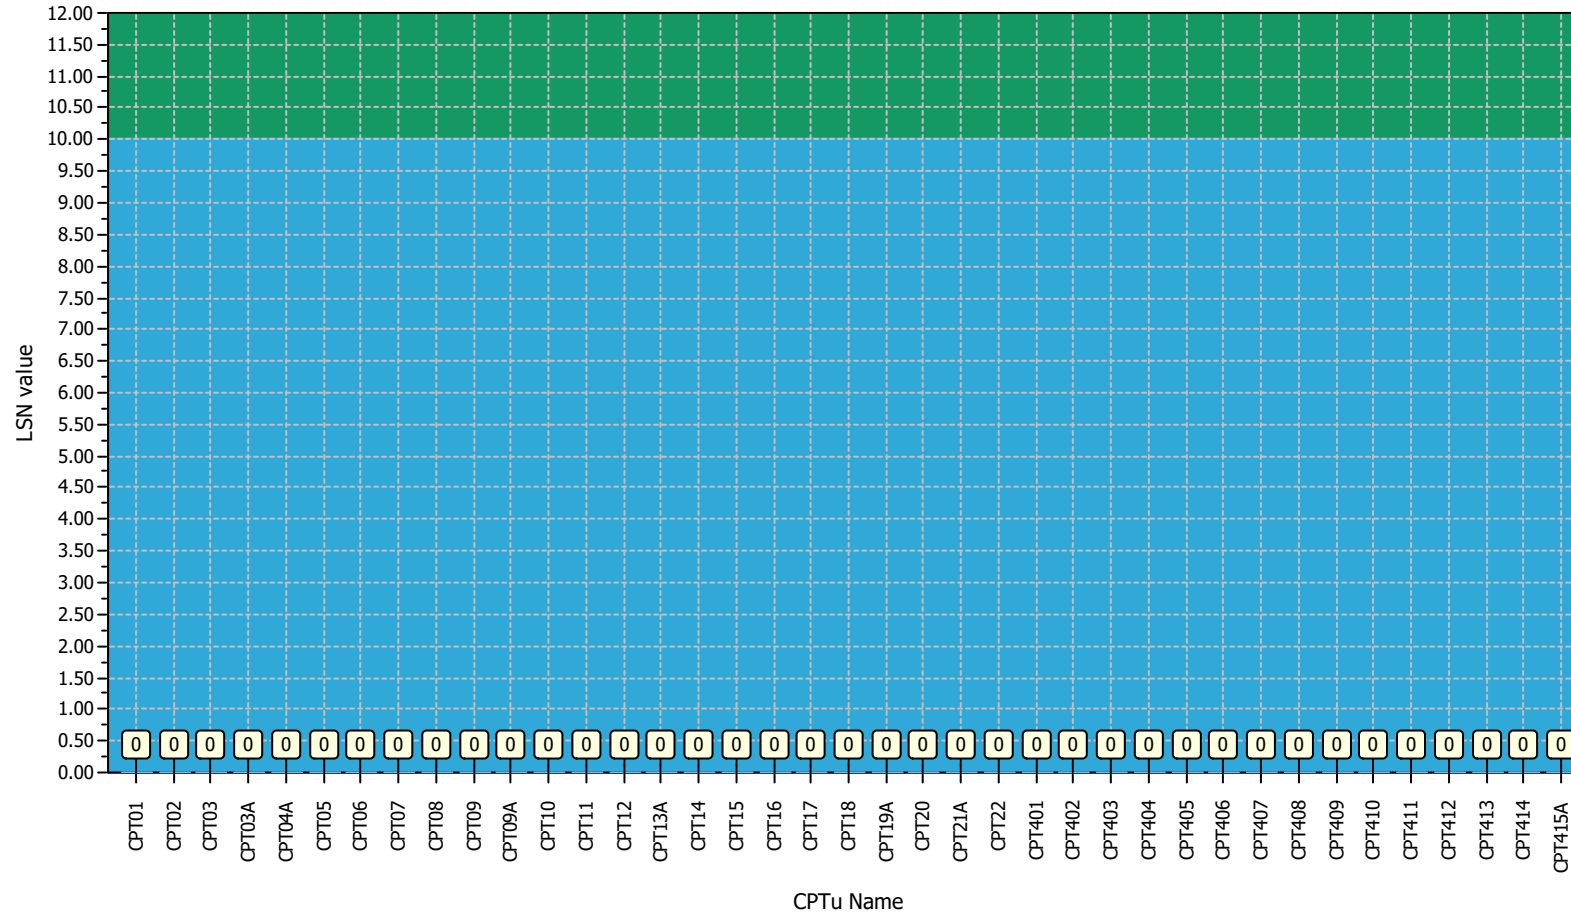

LSN color scheme

- Severe damage
- Major expression of liquefaction
- Moderate to severe exp. of liquefaction
- Moderate expression of liquefaction
- Minor expression of liquefaction
- Little to no expression of liquefaction

Basic statistics

- Total CPT number: 39
- 100% little liquefaction
- 0% minor liquefaction
- 0% moderate liquefaction
- 0% moderate to major liquefaction
- 0% major liquefaction
- 0% severe liquefaction

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT01

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

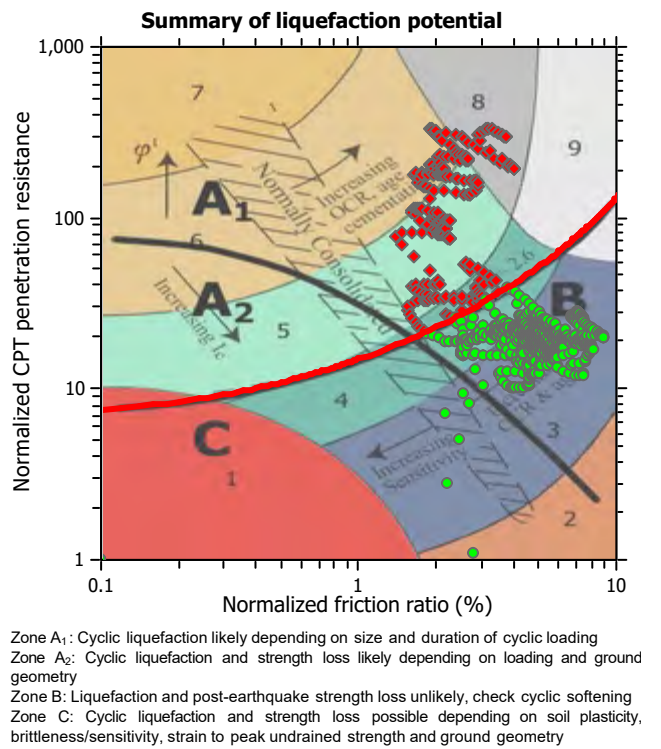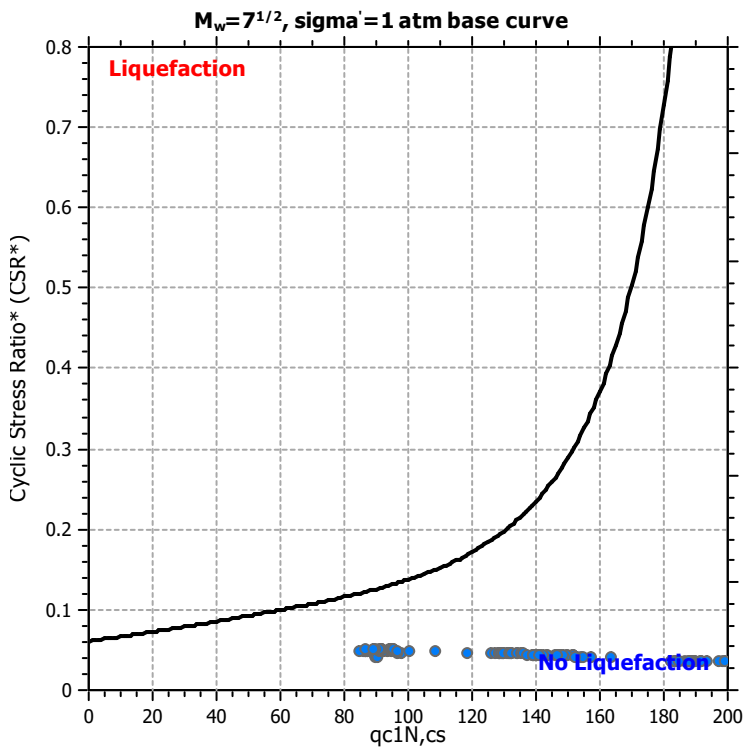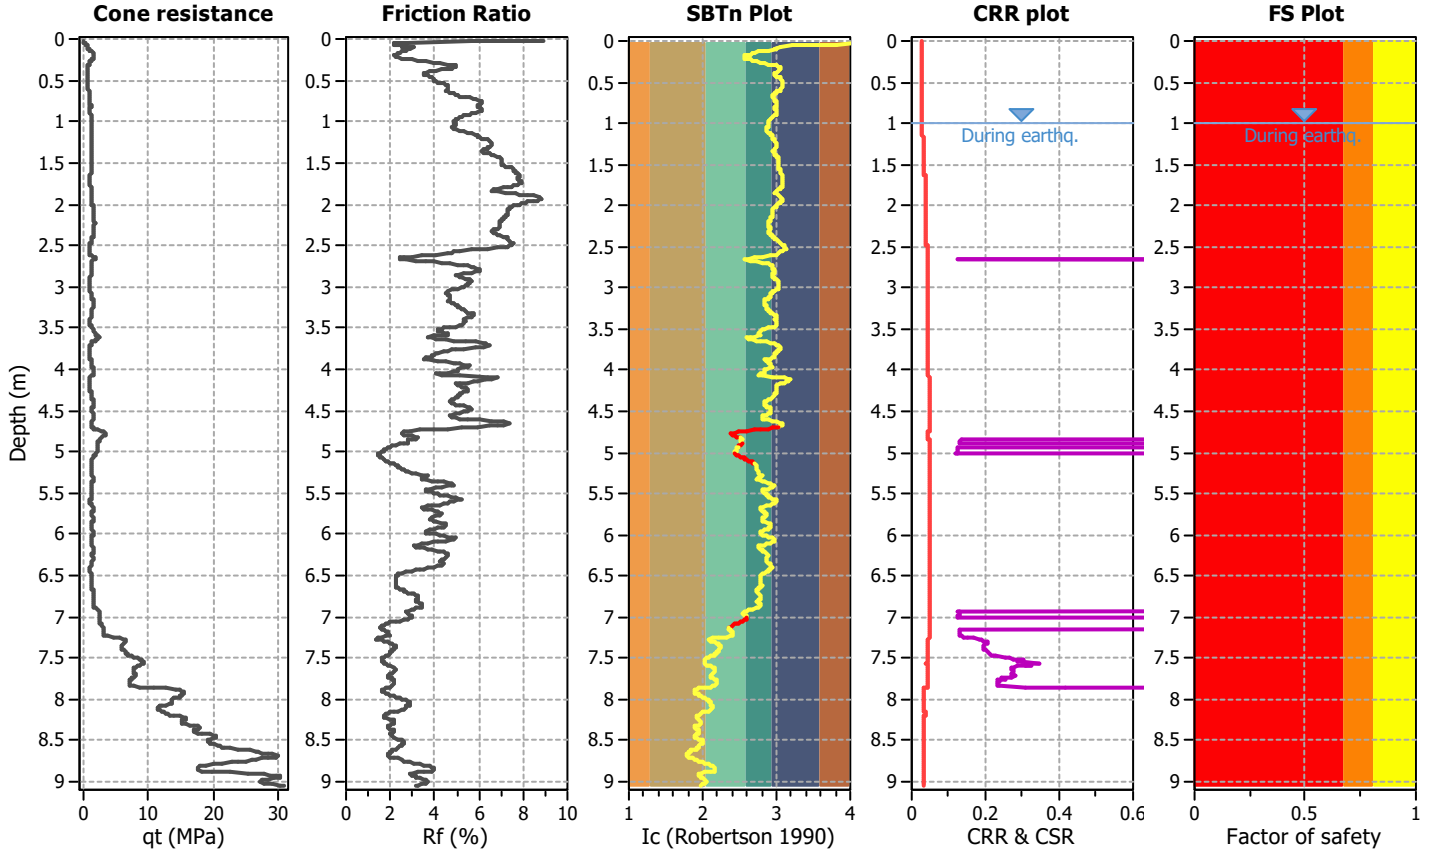

CPT basic interpretation plots

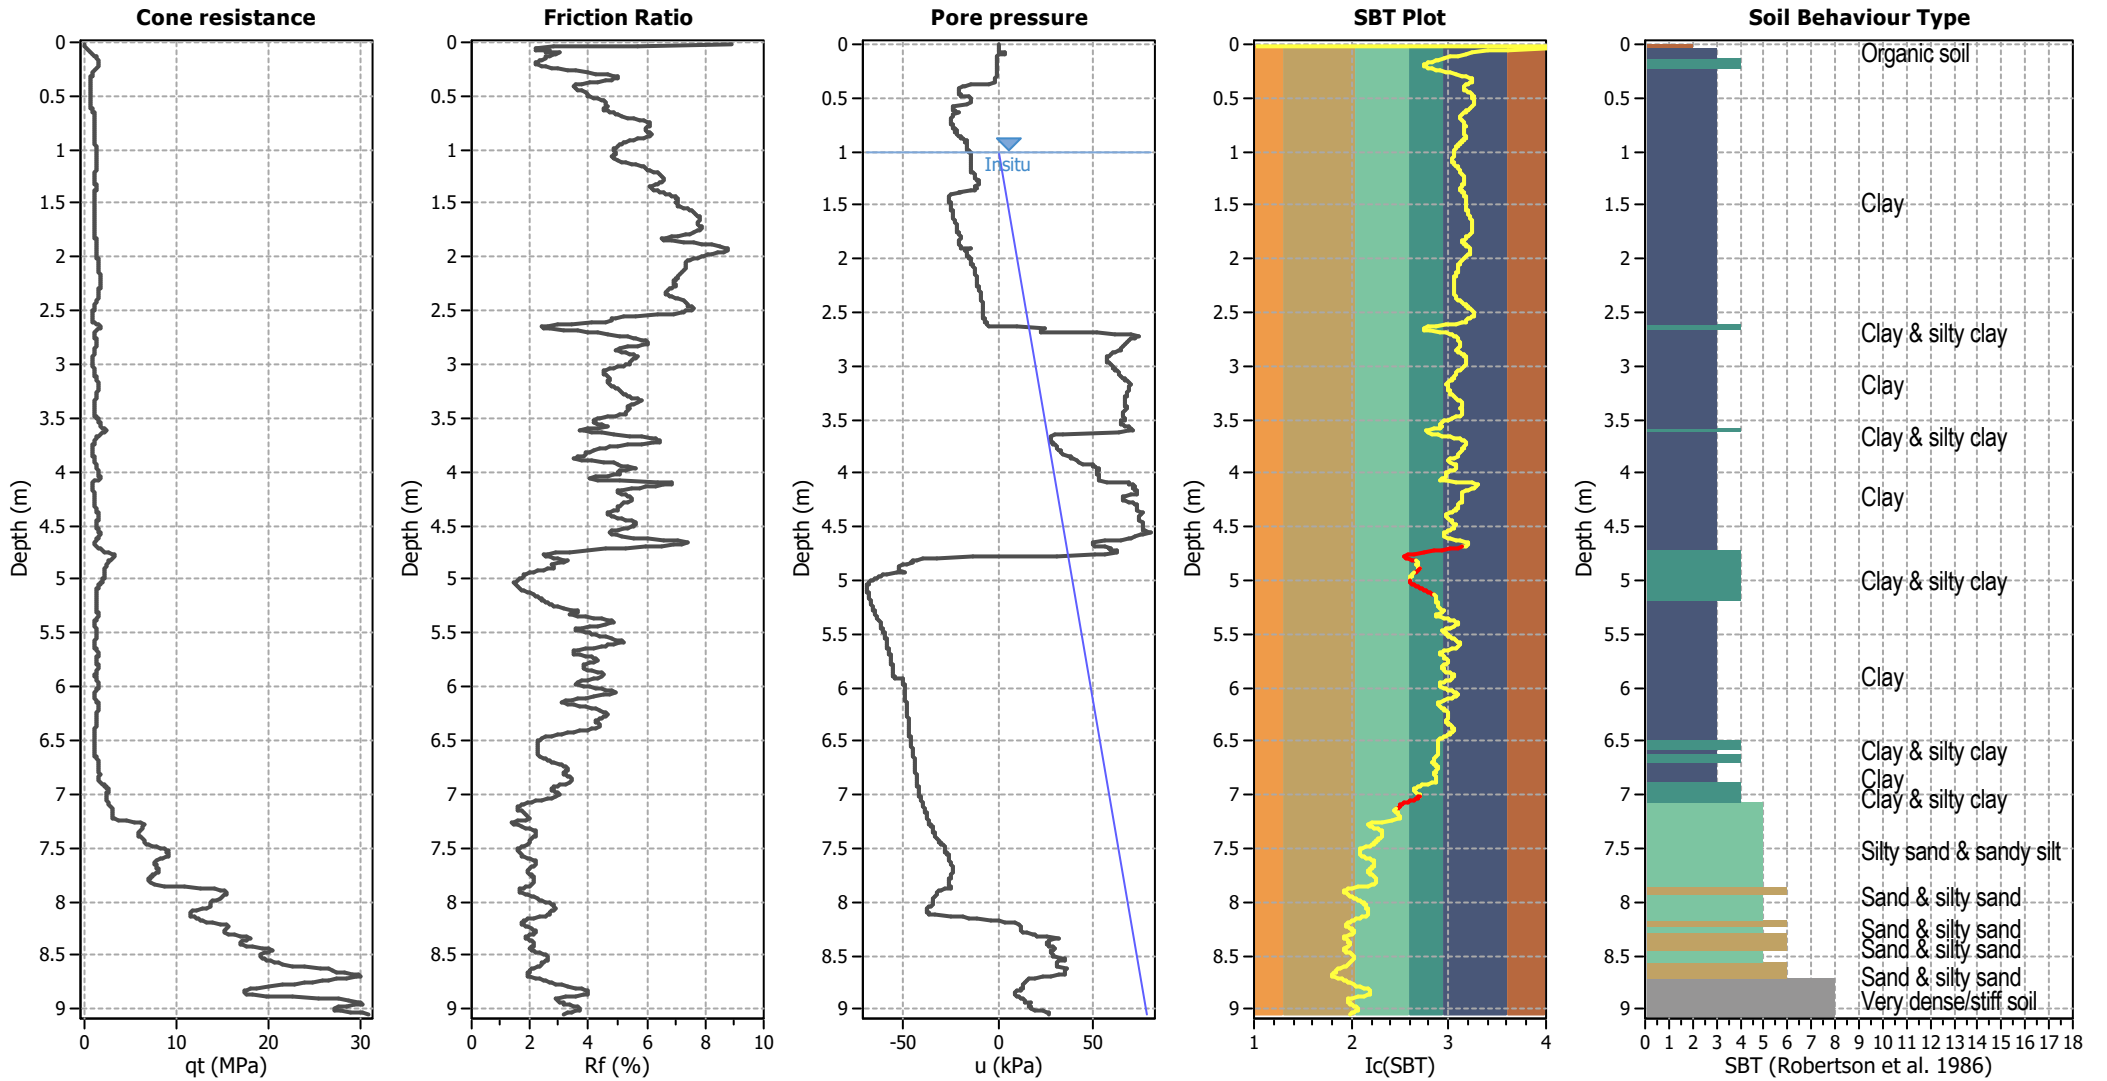


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

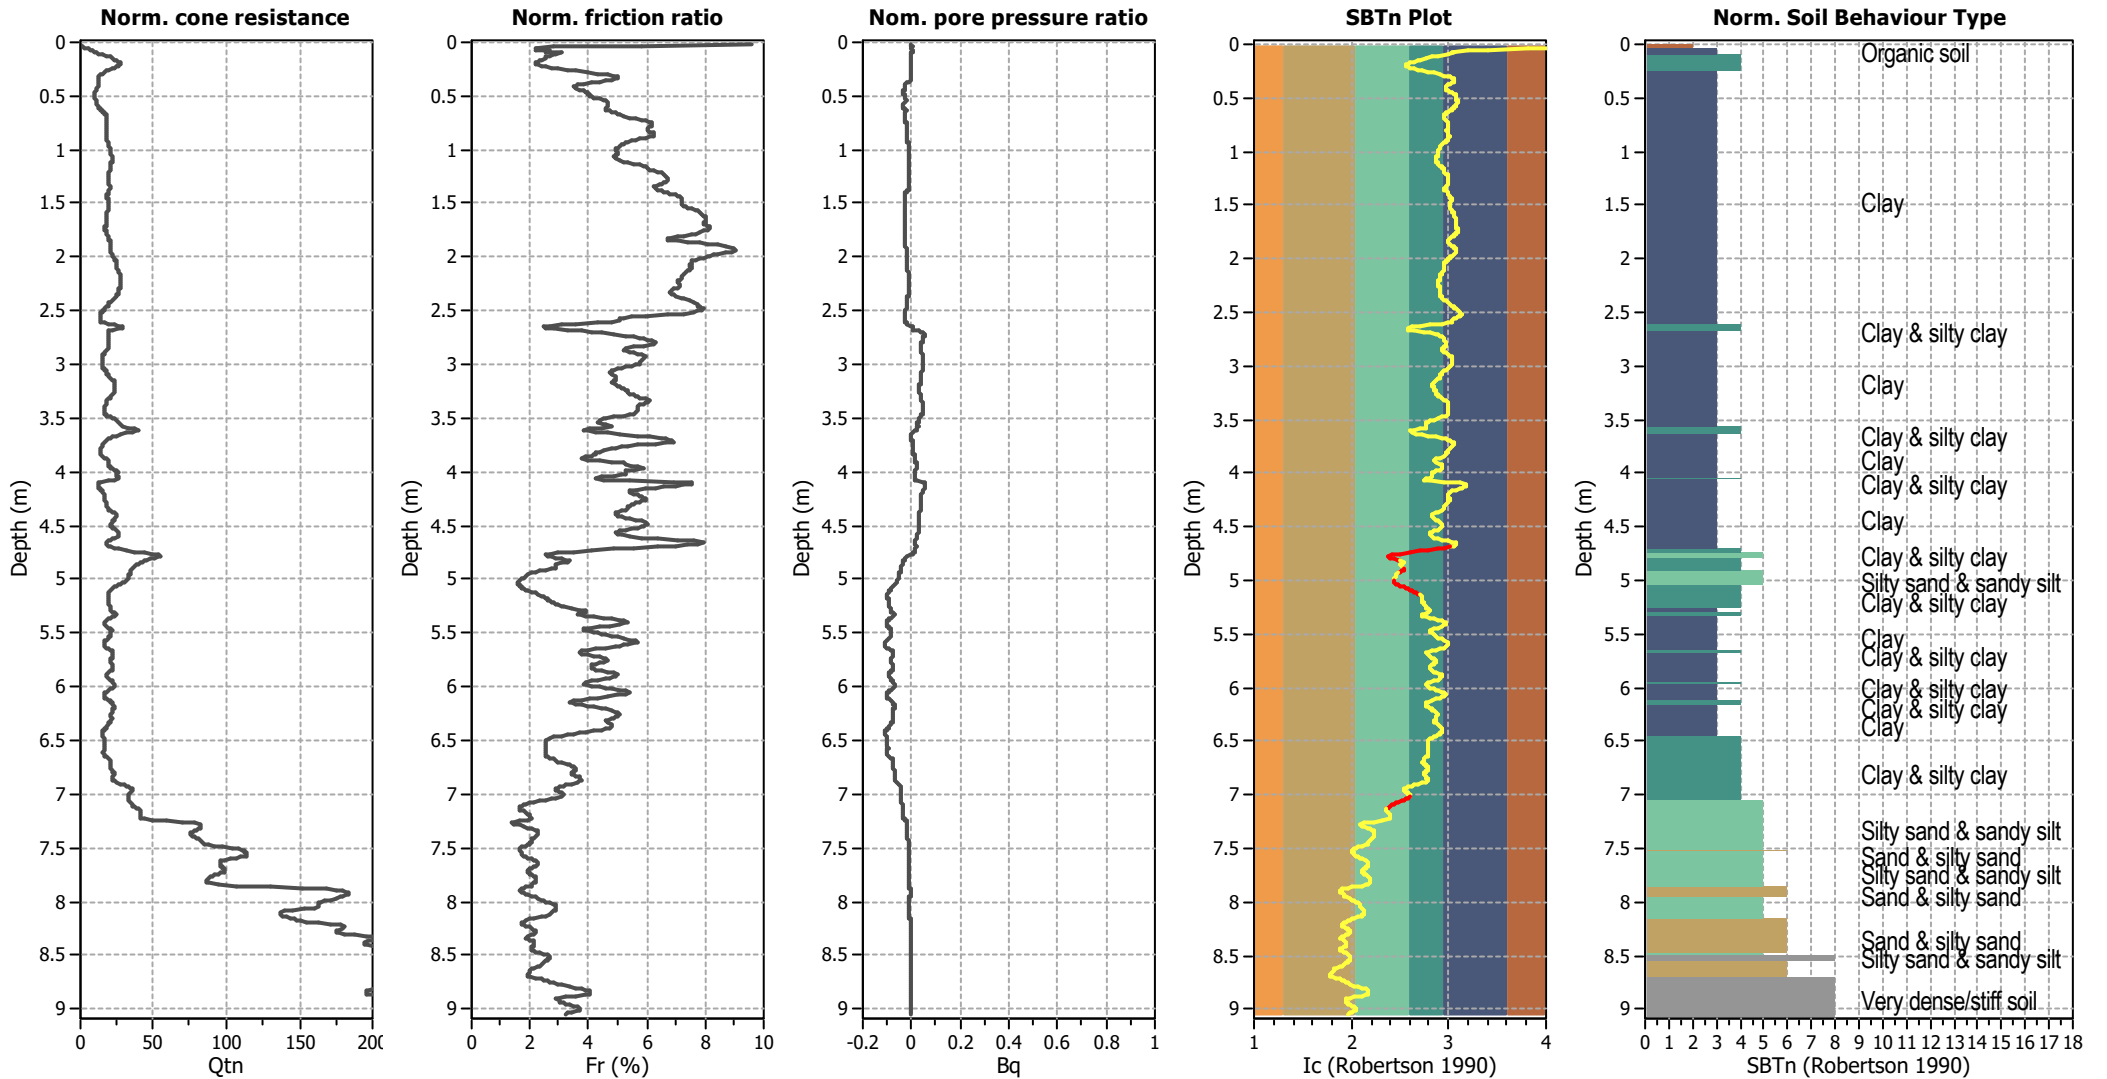


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

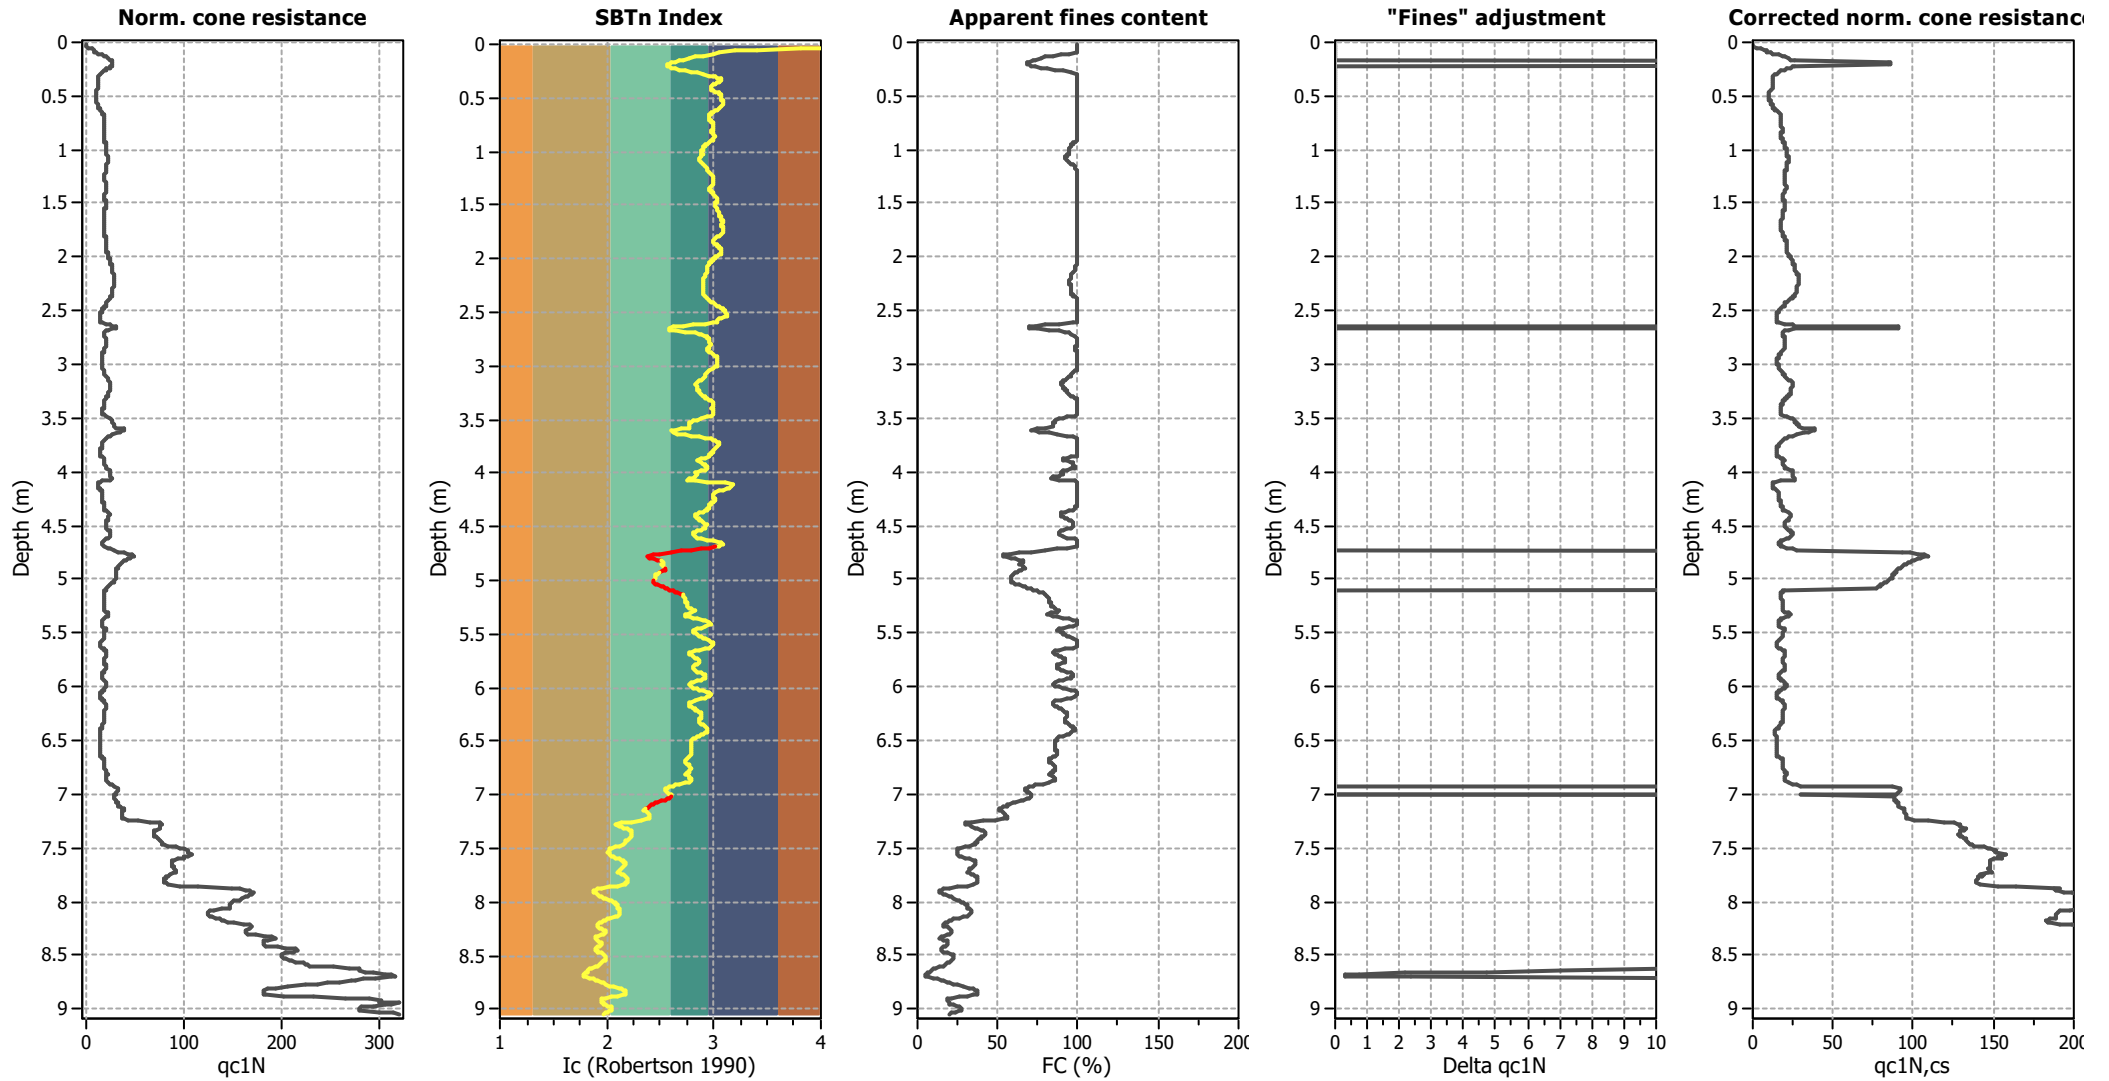

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

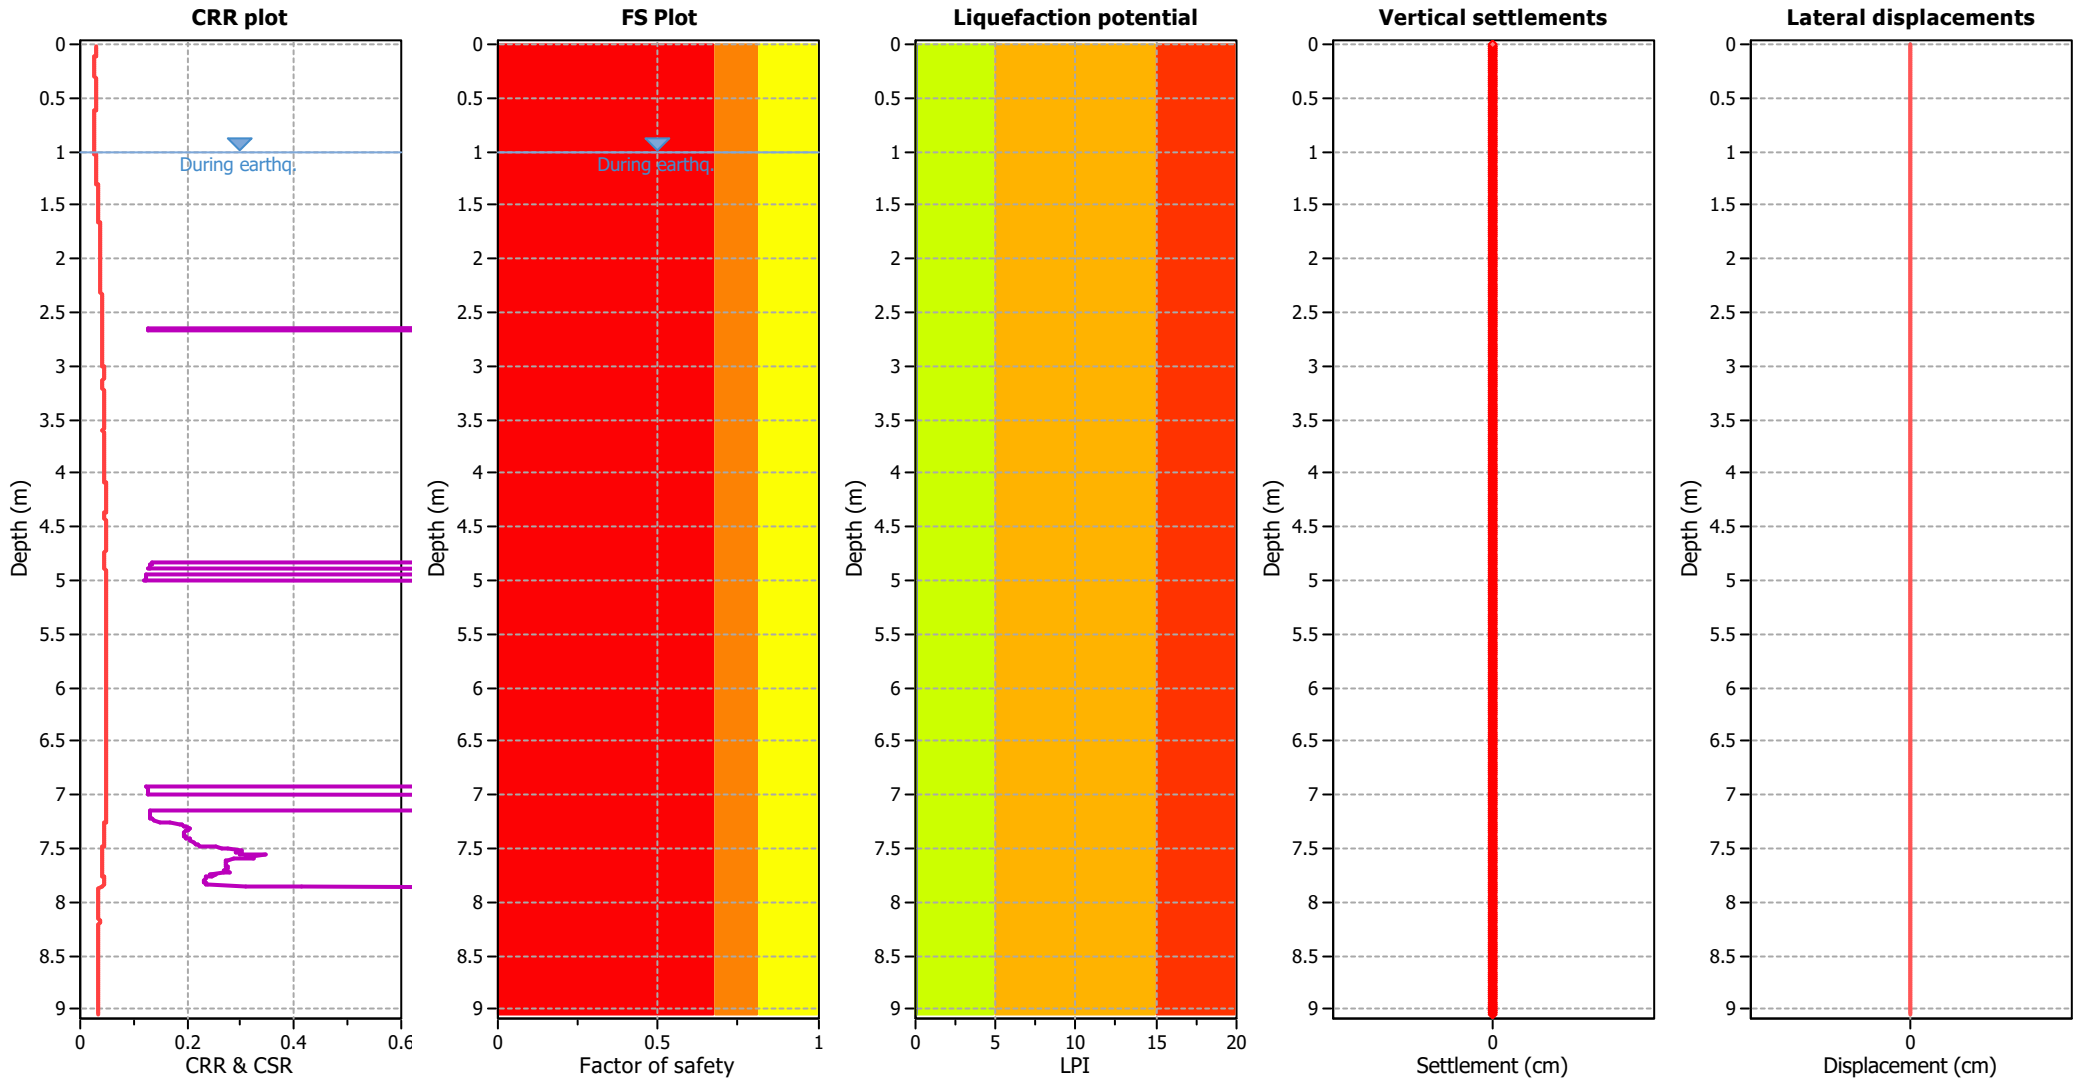

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

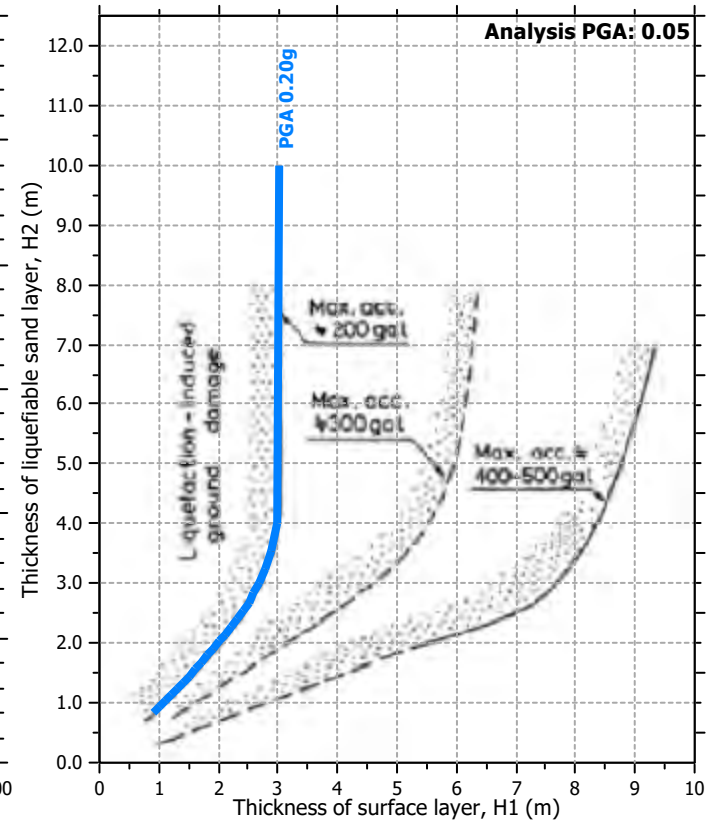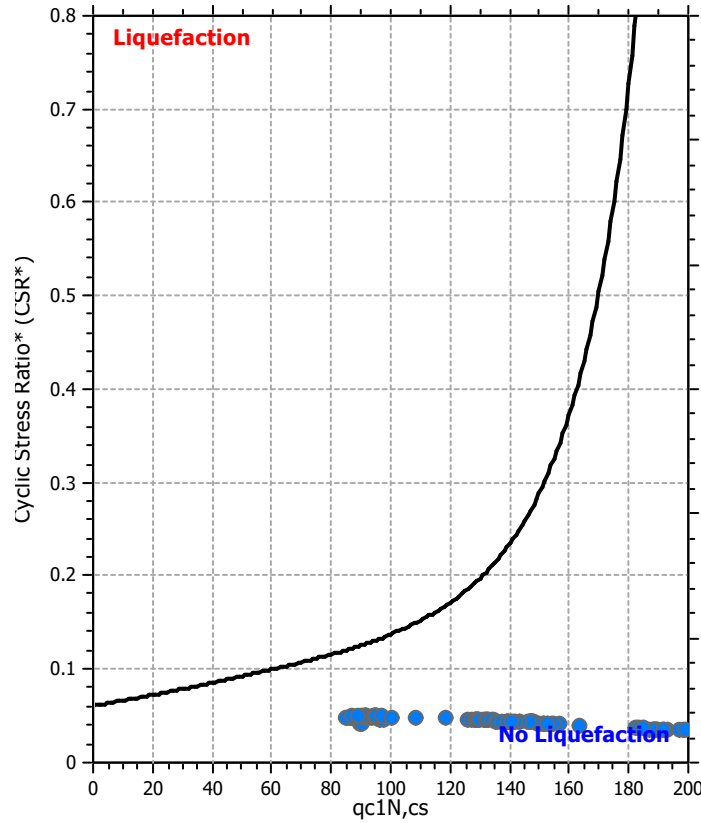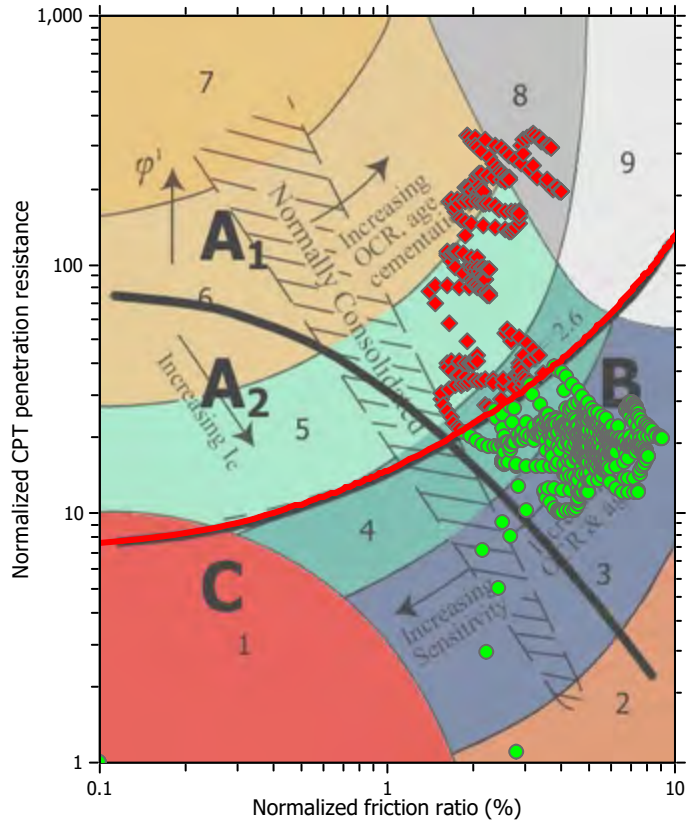

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

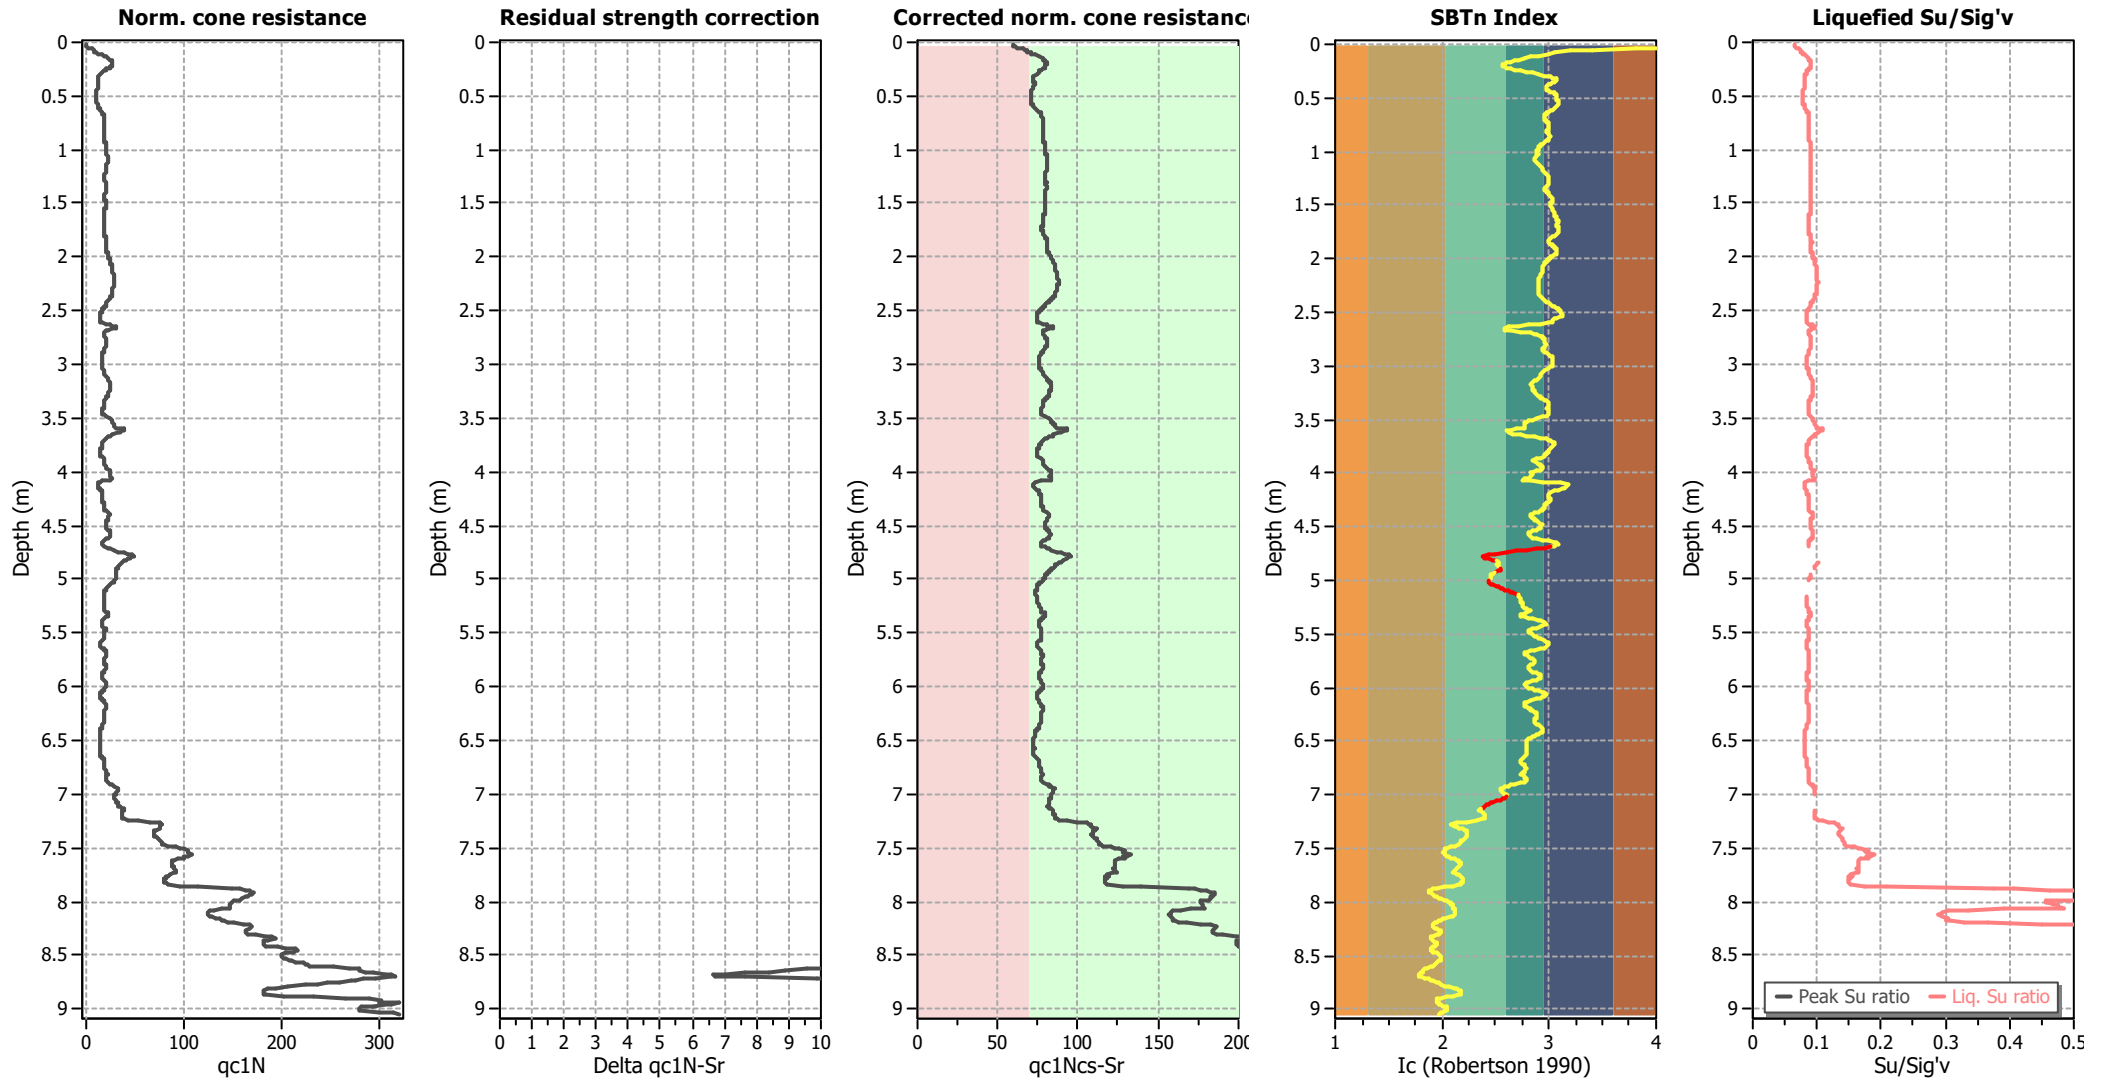

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

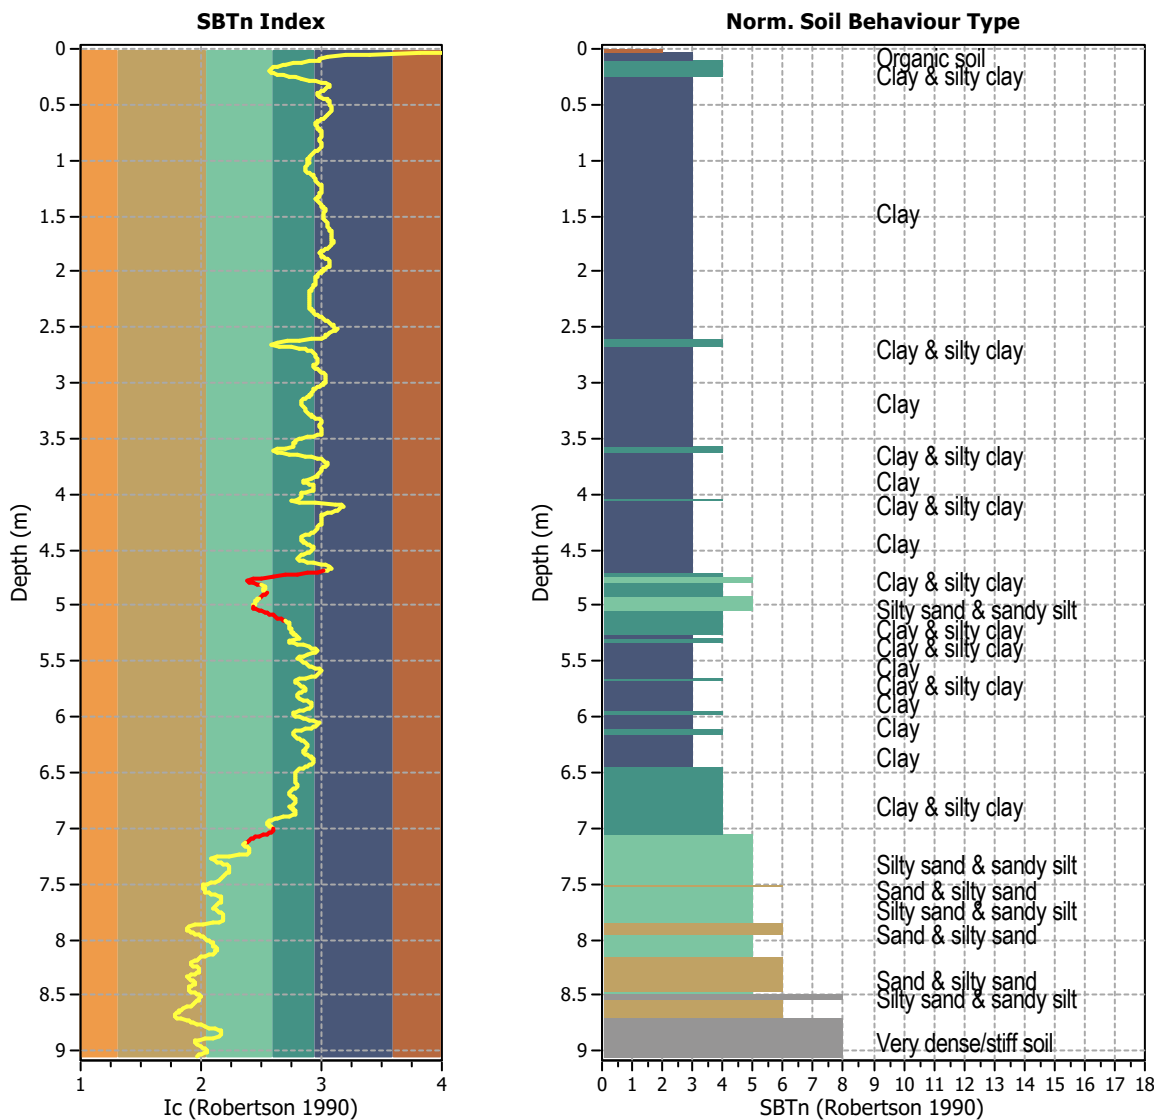

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	906
I_c maximum check value:	3.00	Total points excluded:	46
I_c change ratio value:	0.0100	Exclusion percentage:	5.08%
Minimum number of points in layer:	4	Number of layers detected:	5


Estimation of post-earthquake settlements

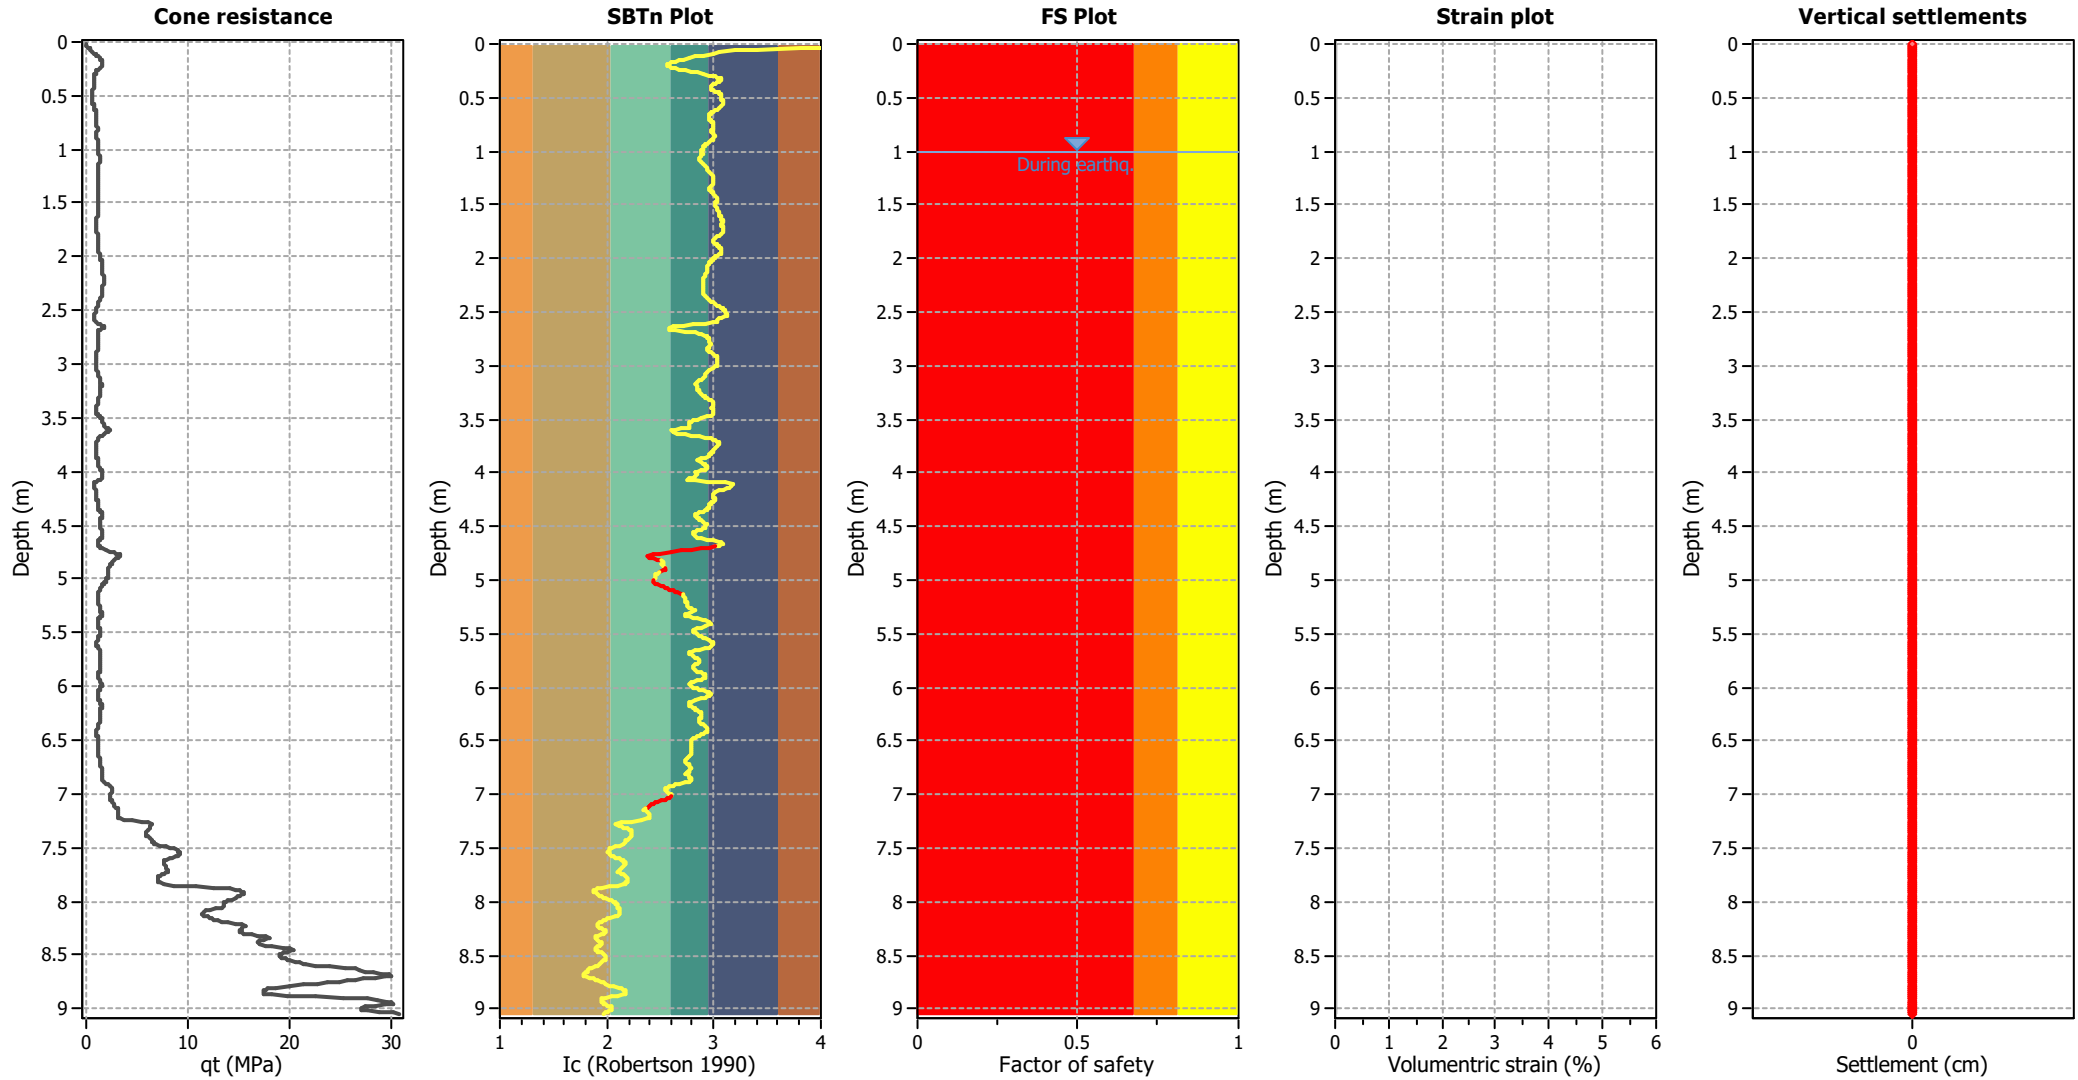

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

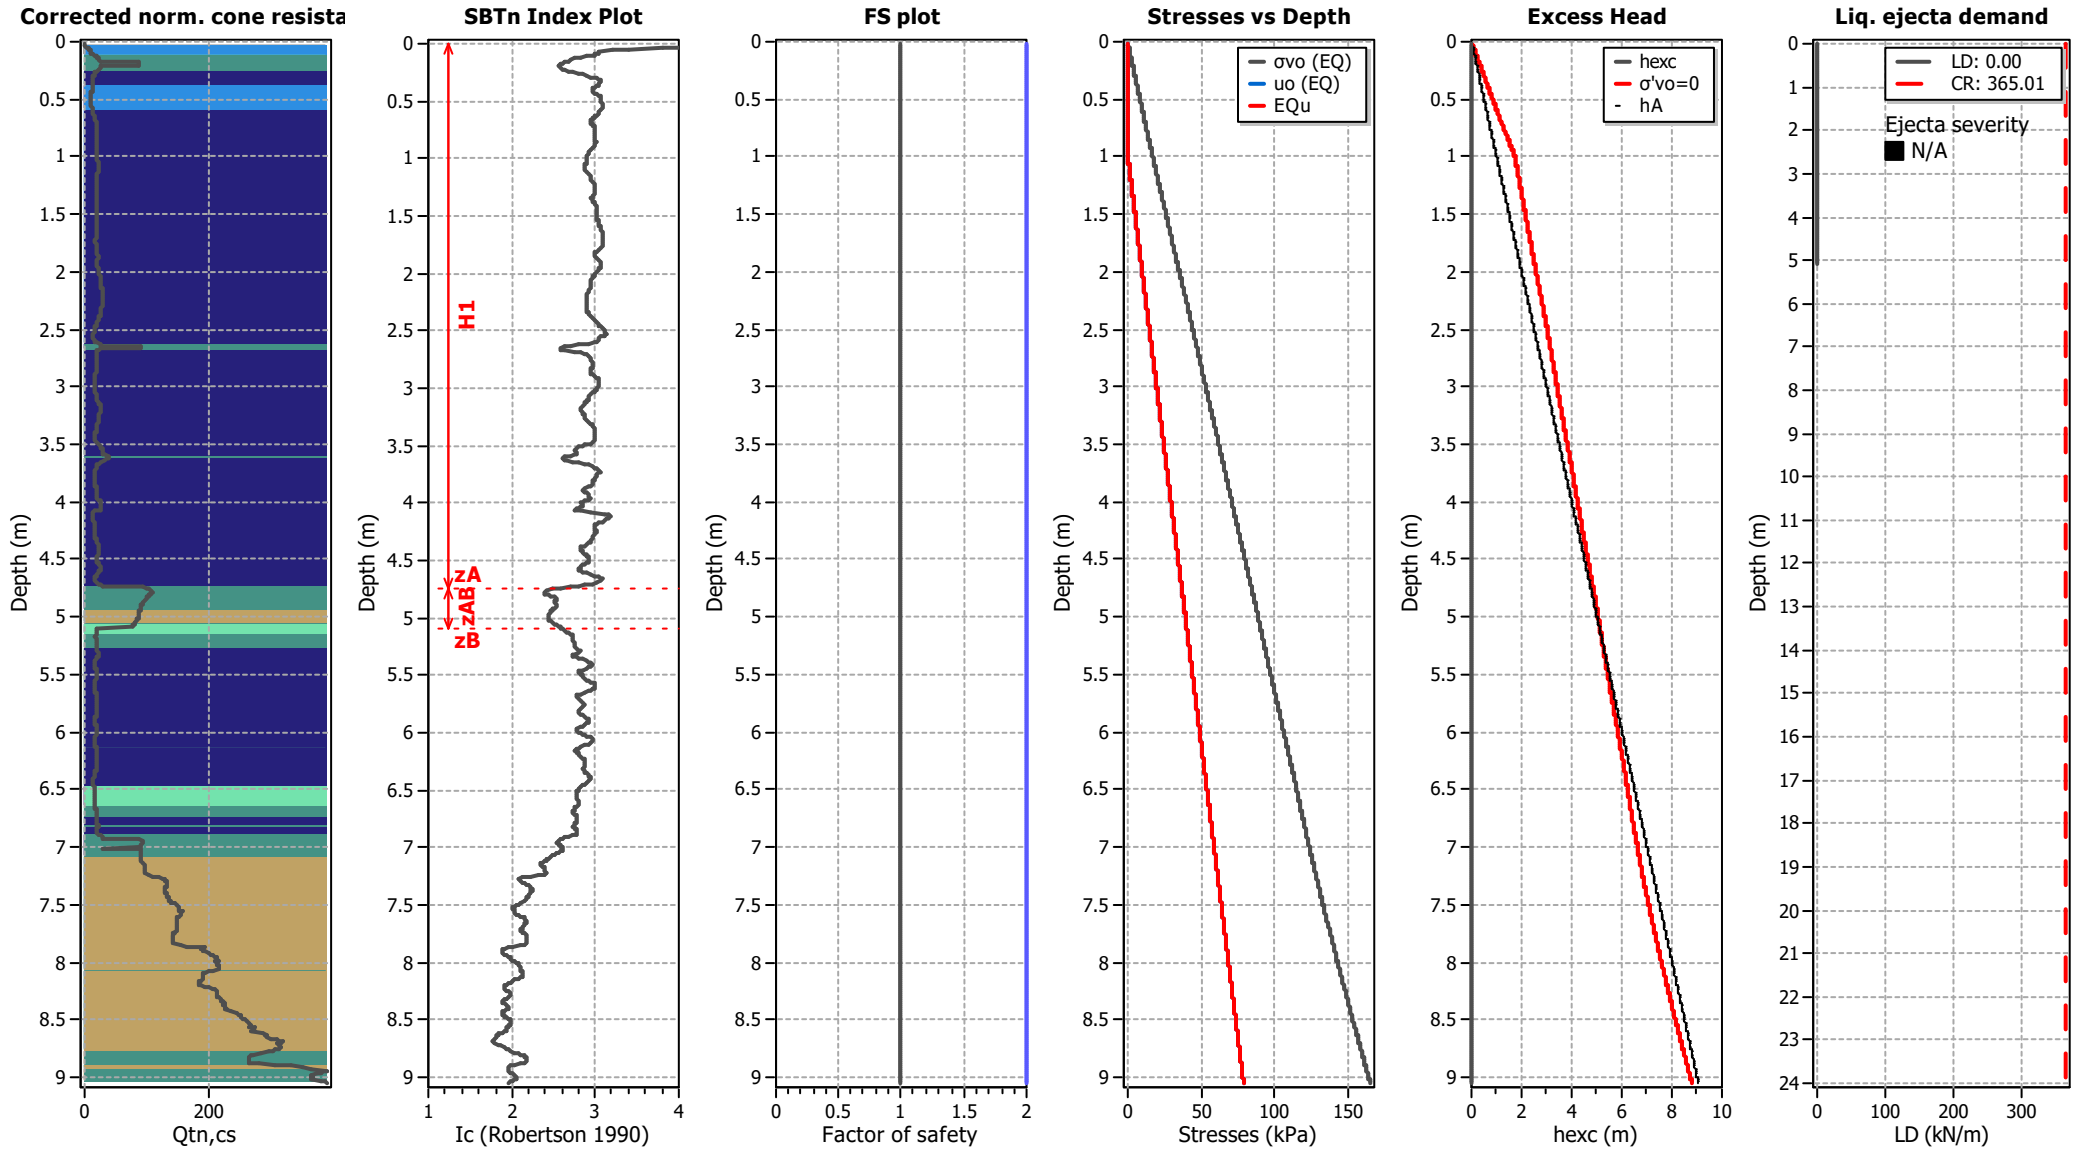

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT02

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

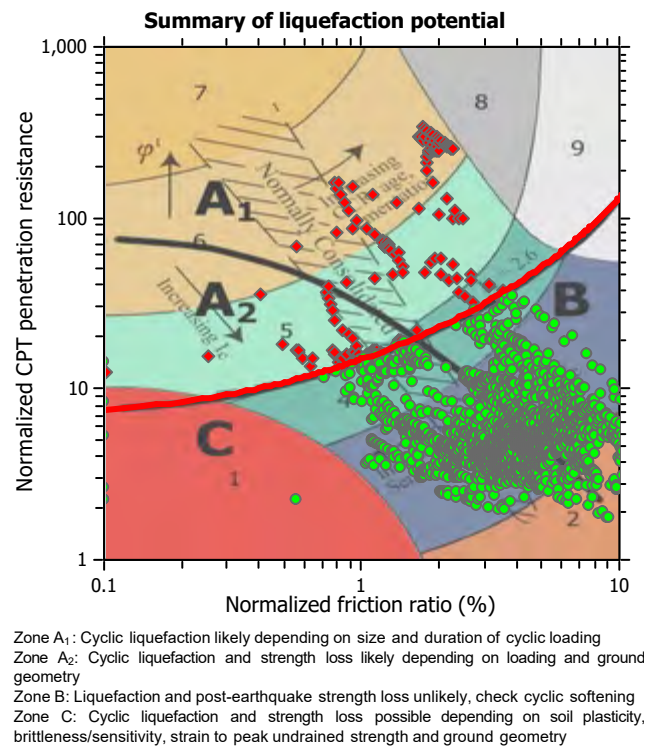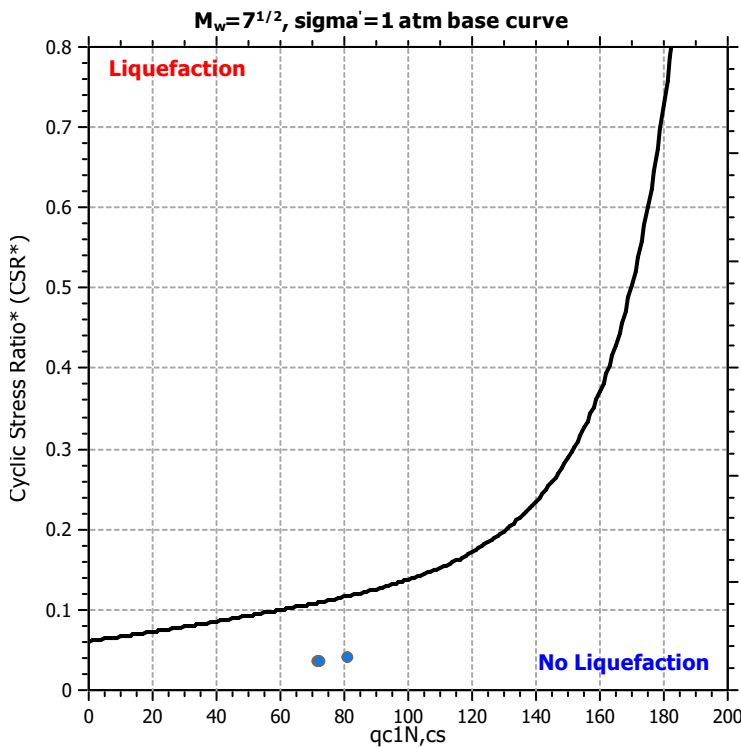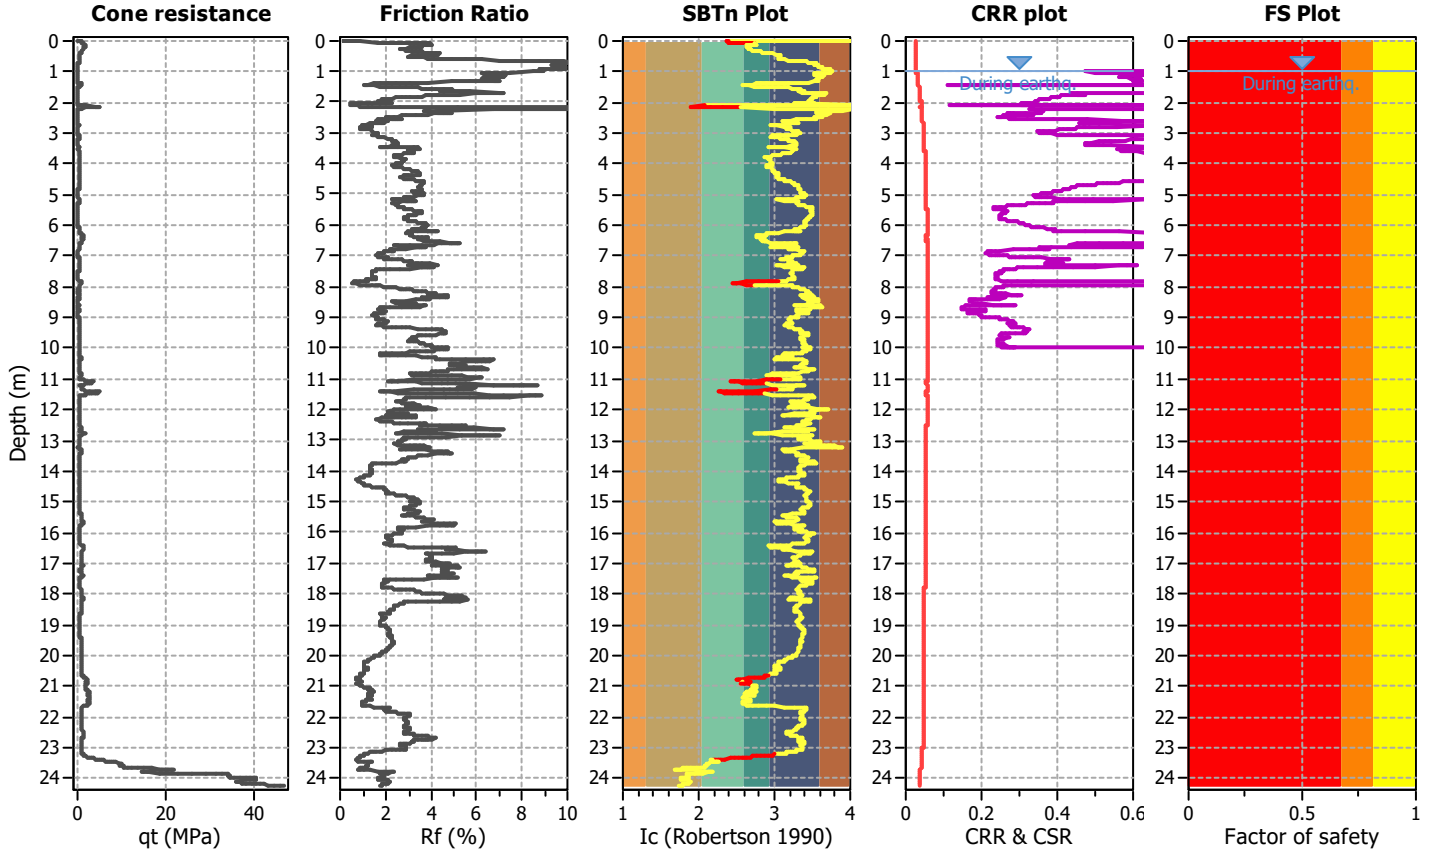

CPT basic interpretation plots

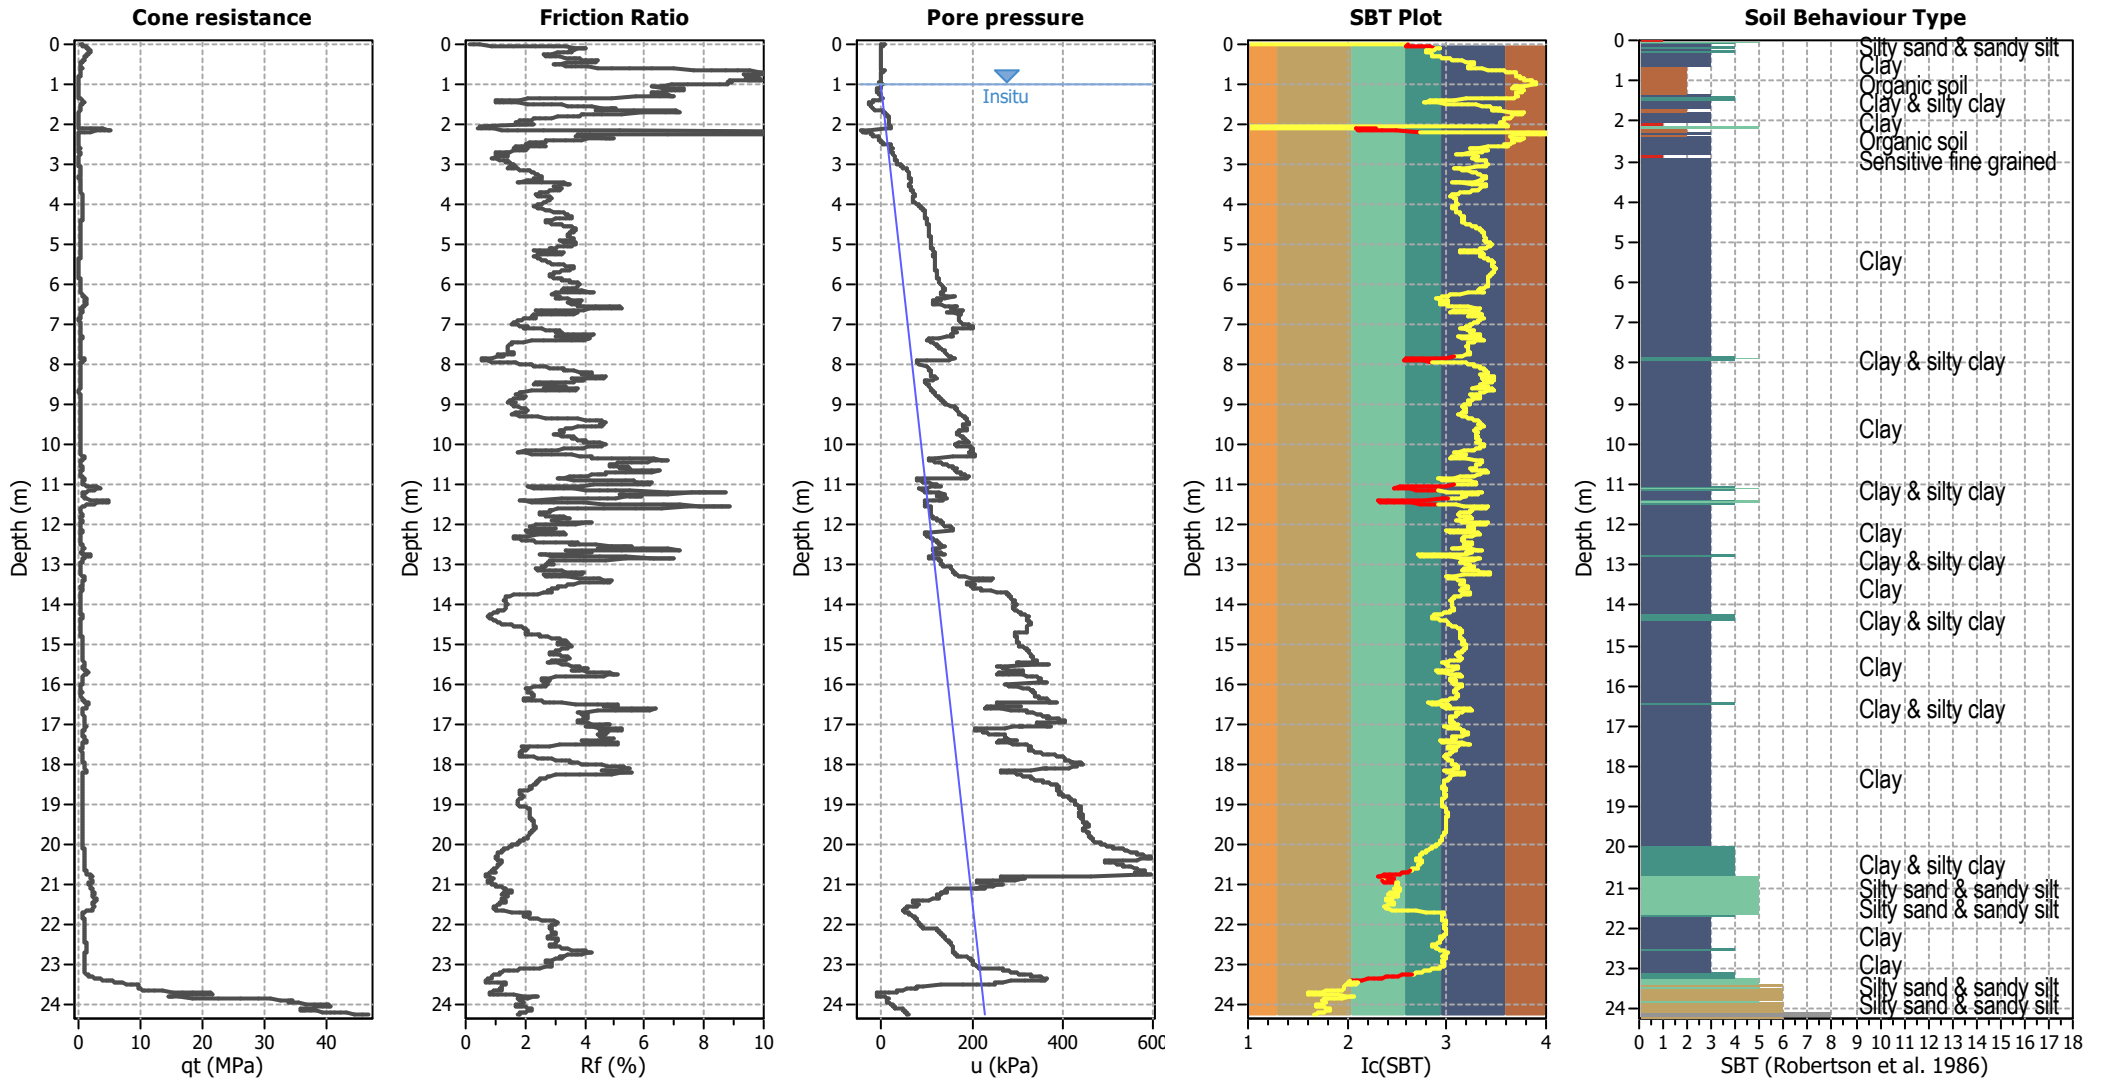


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

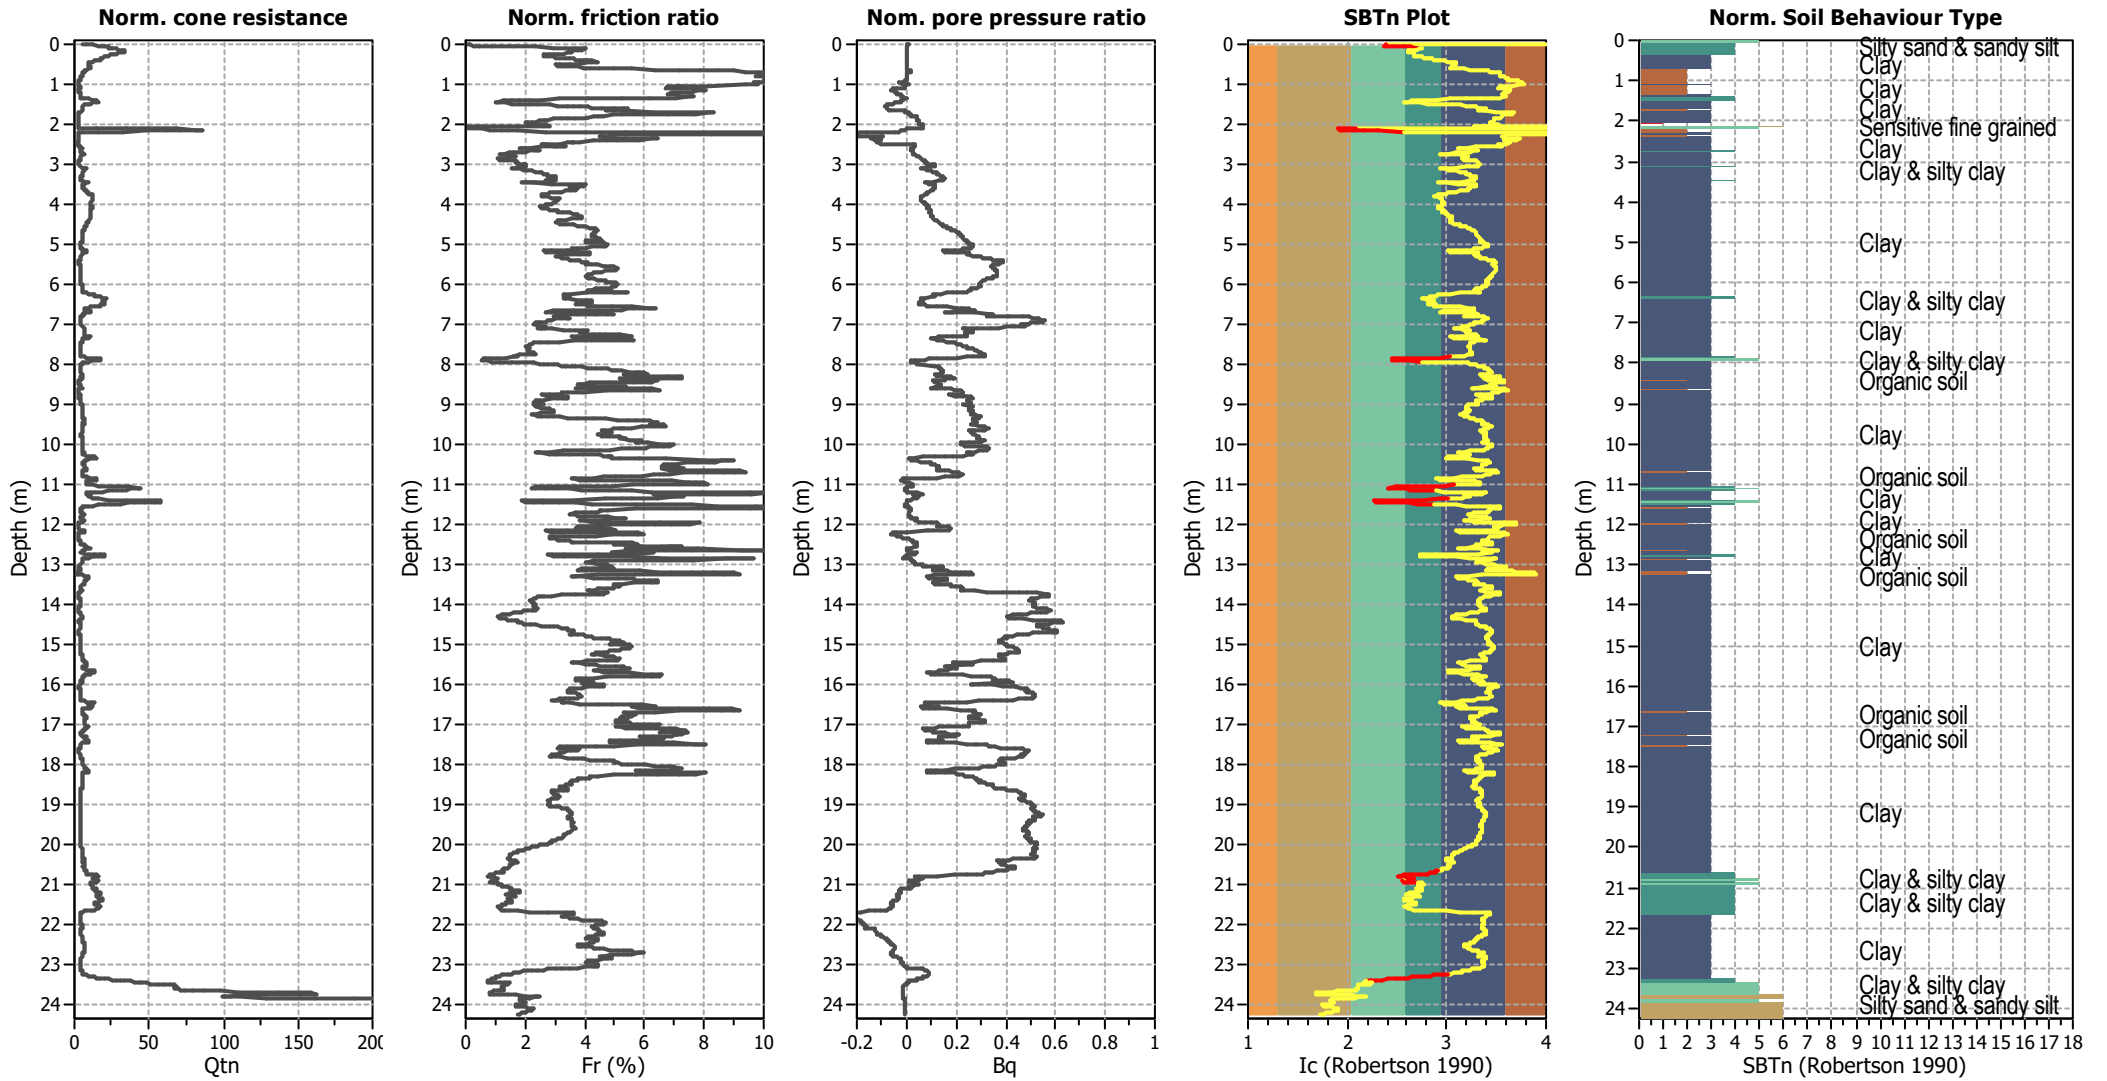


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

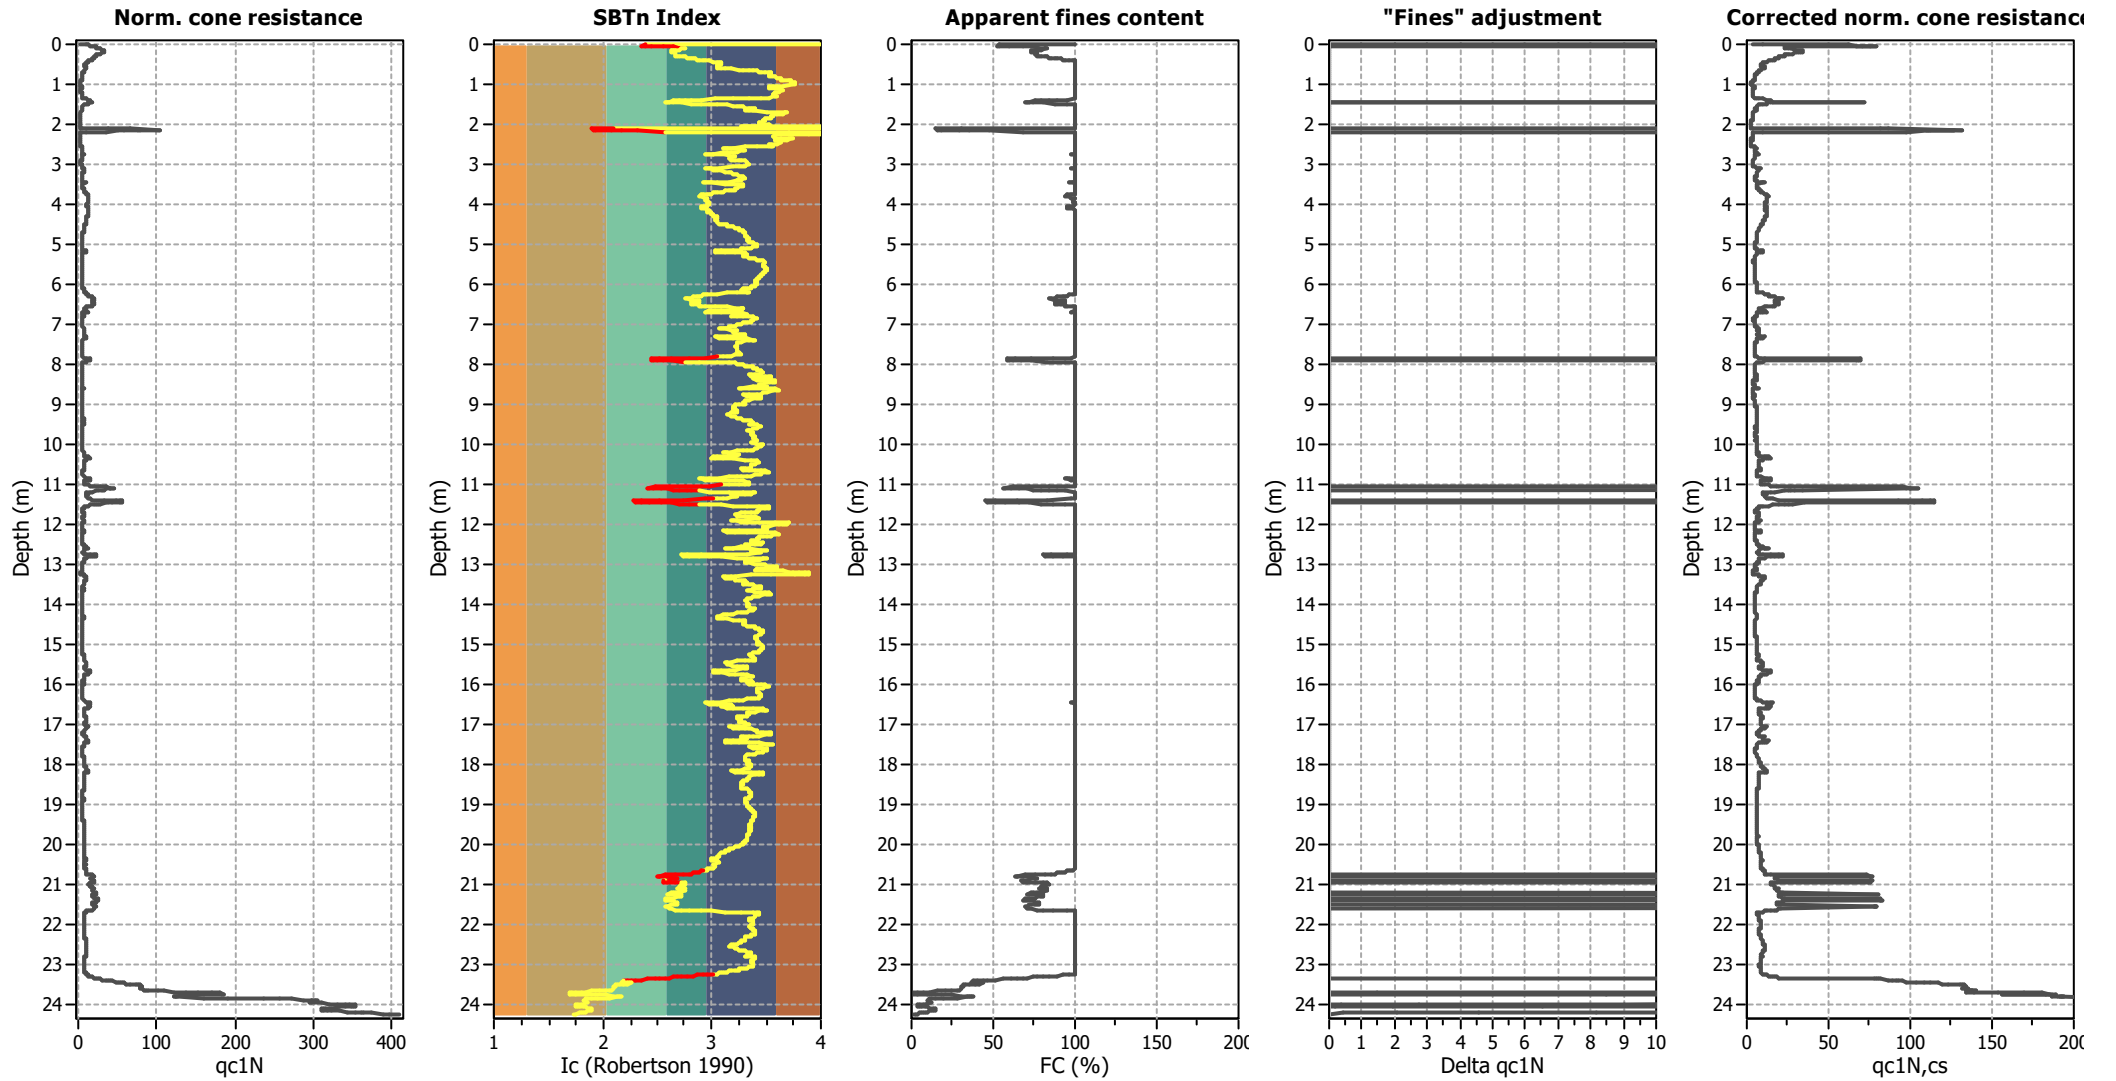

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

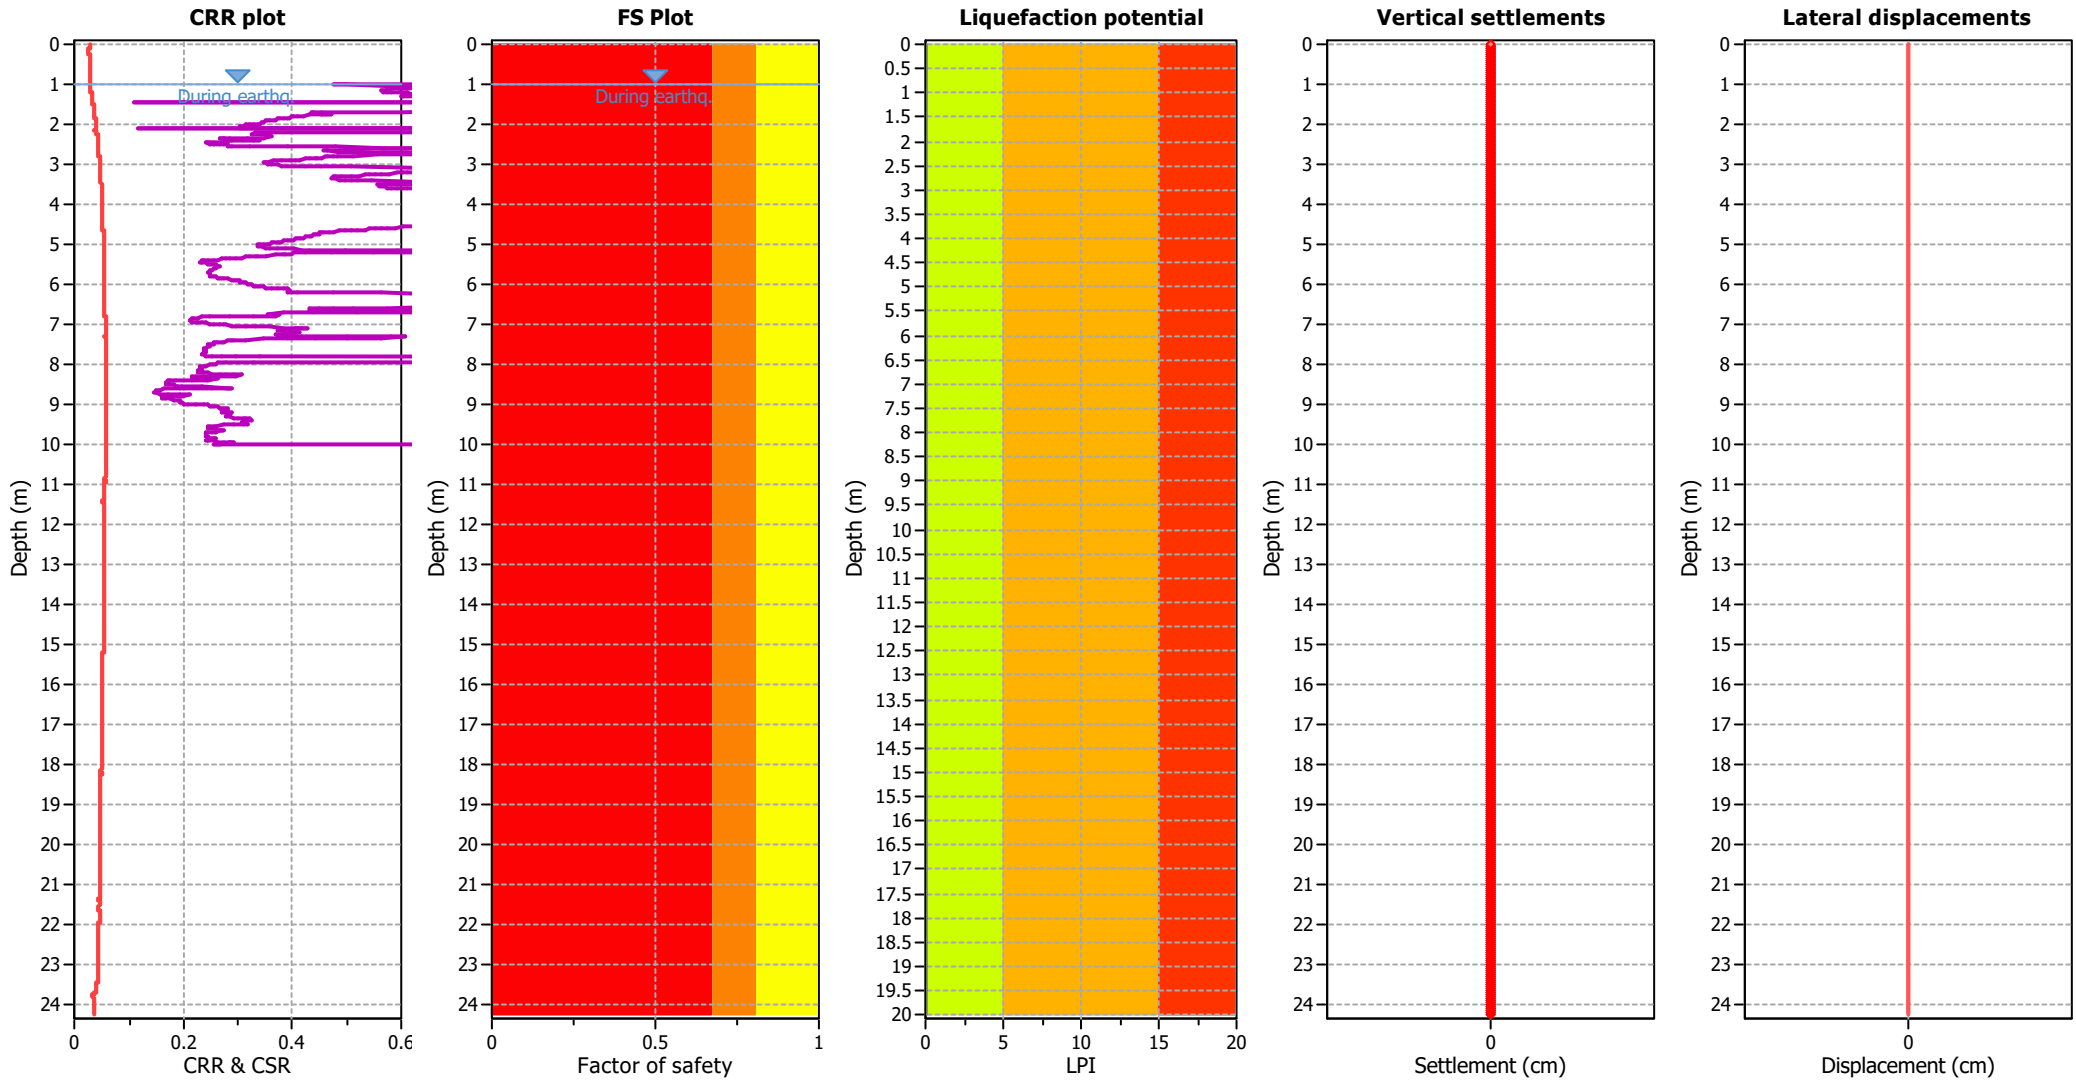

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

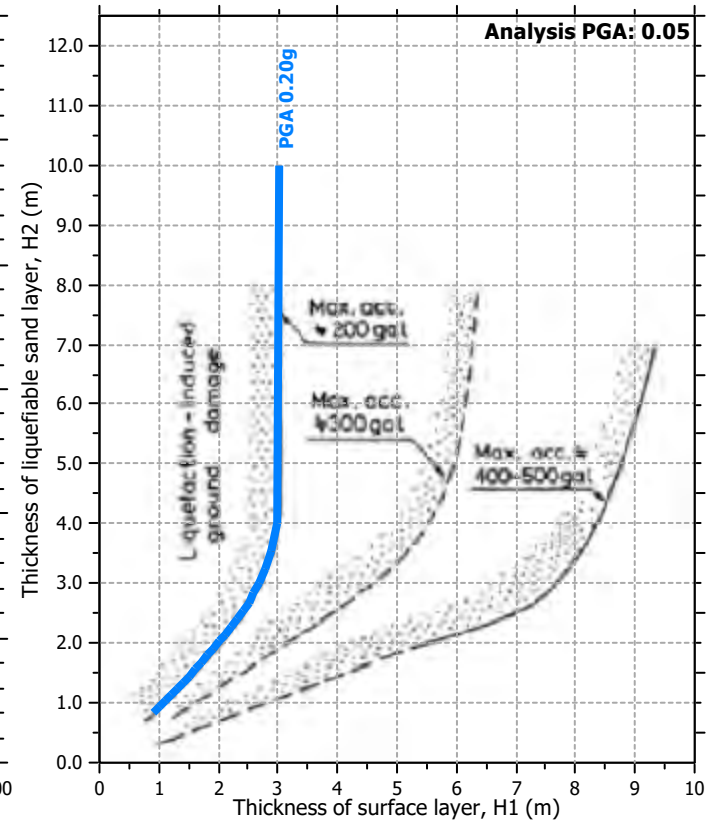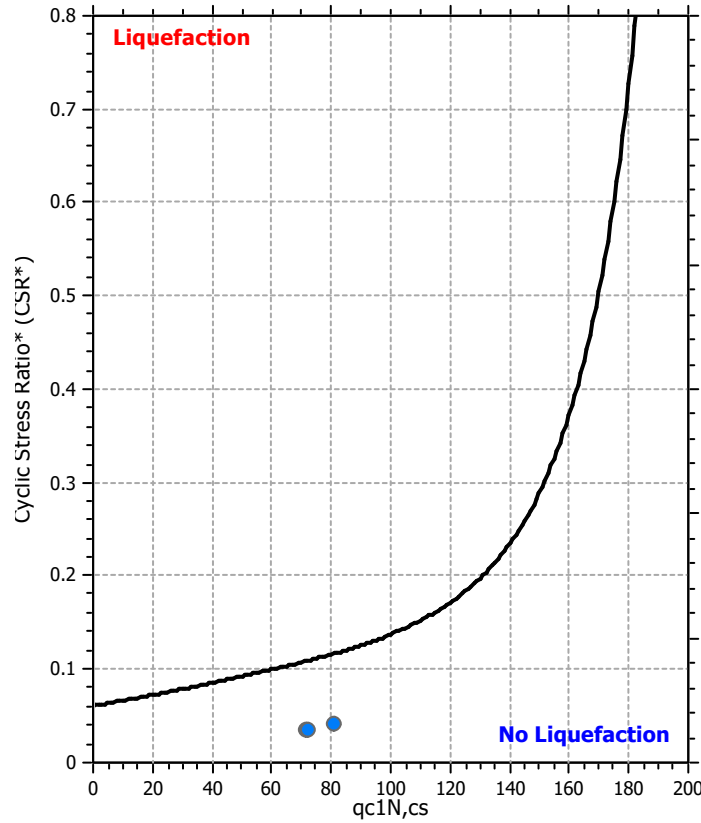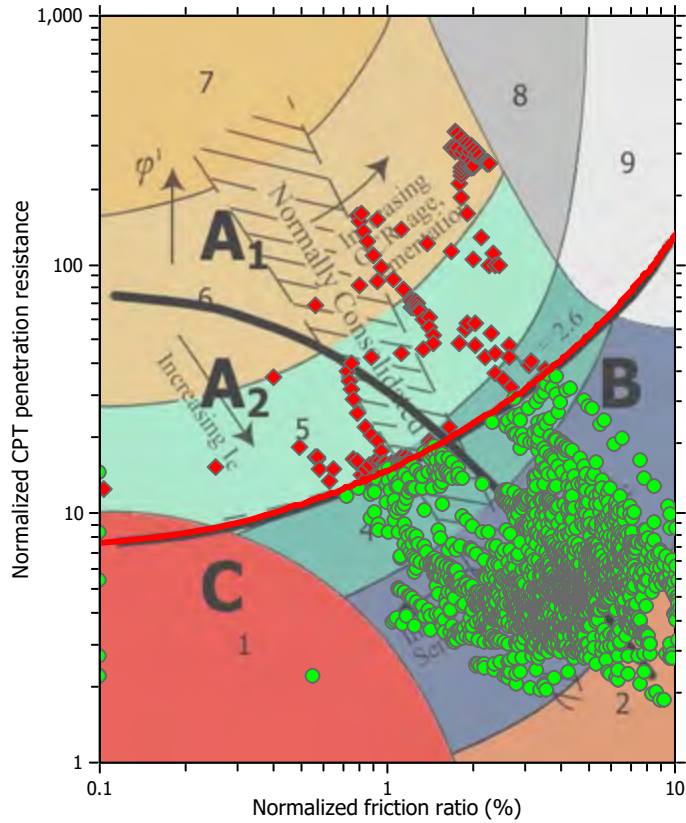

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

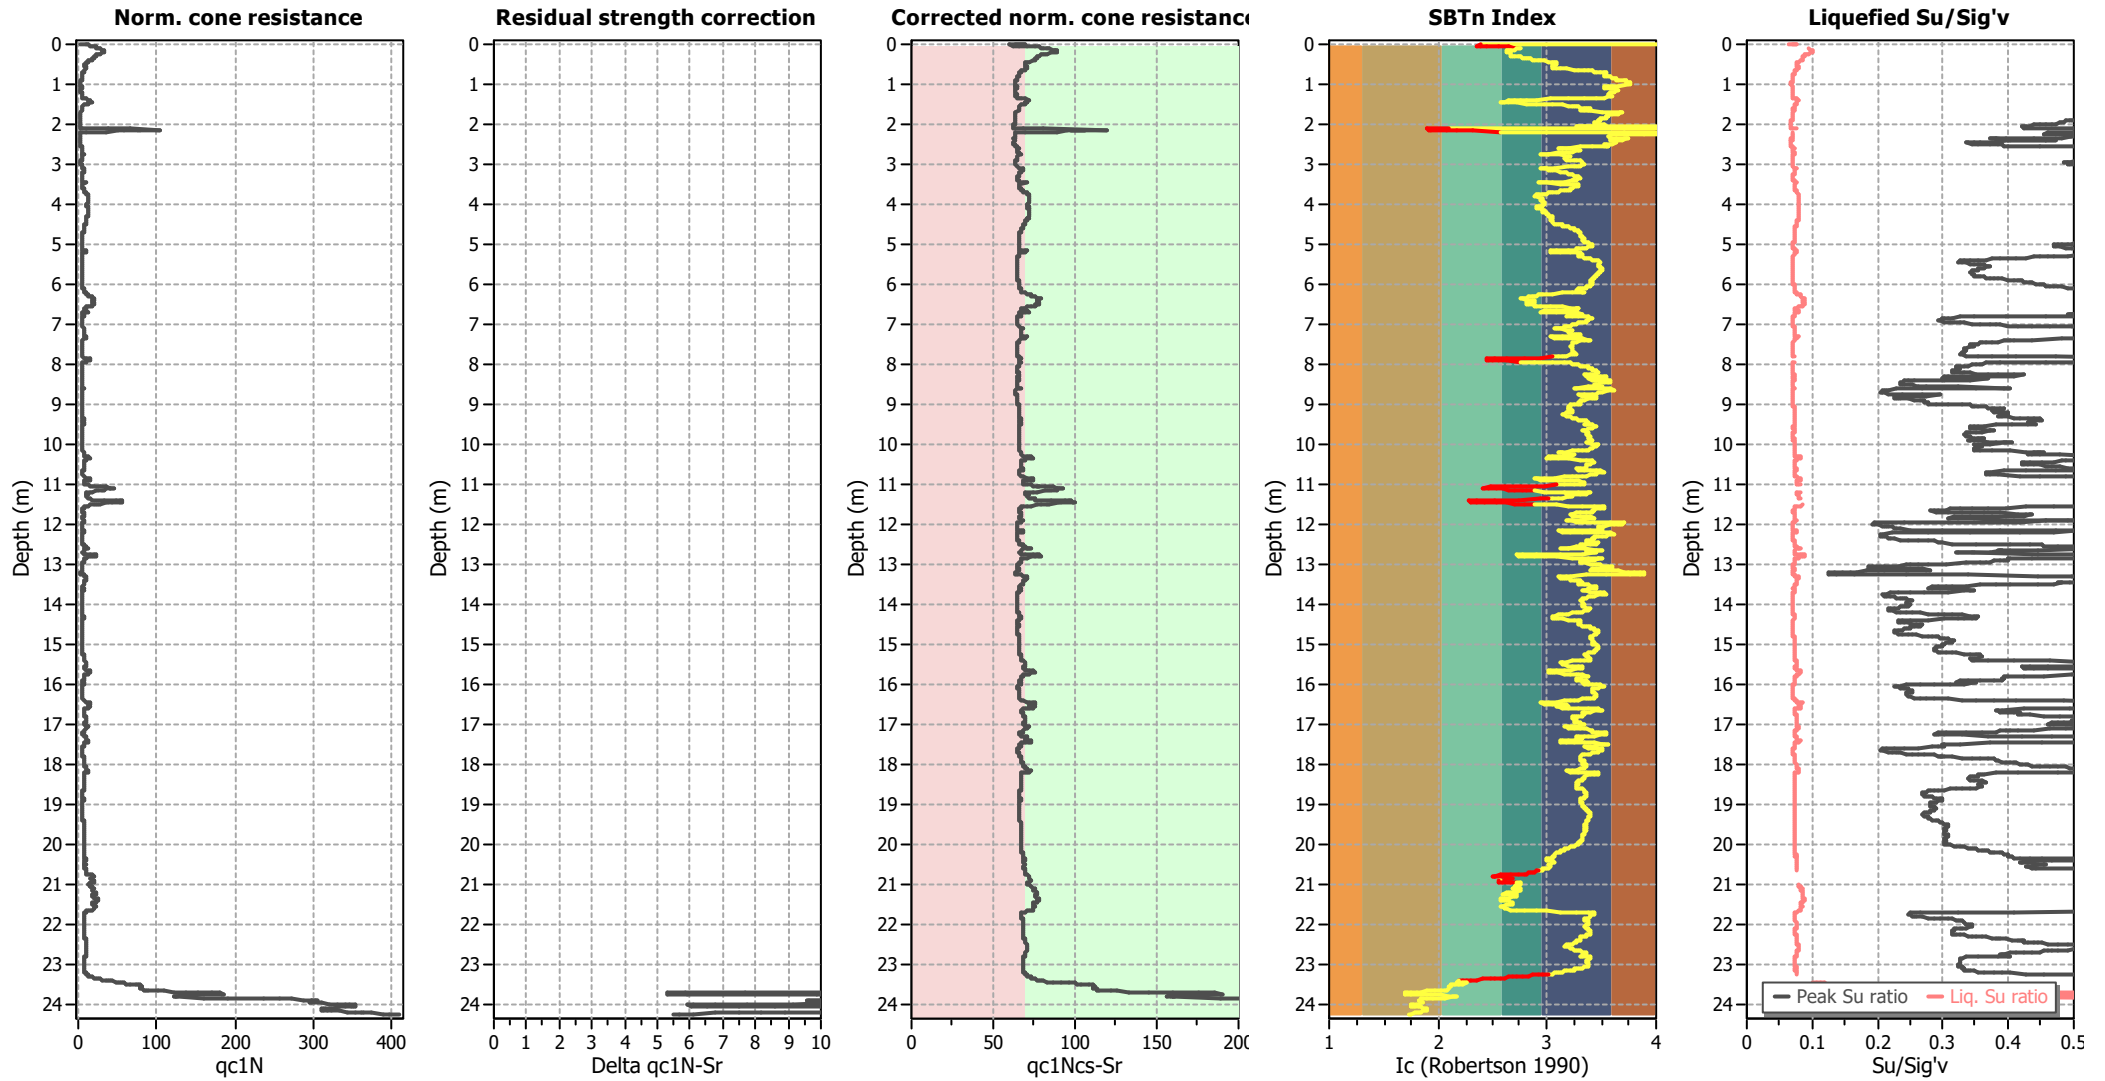

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

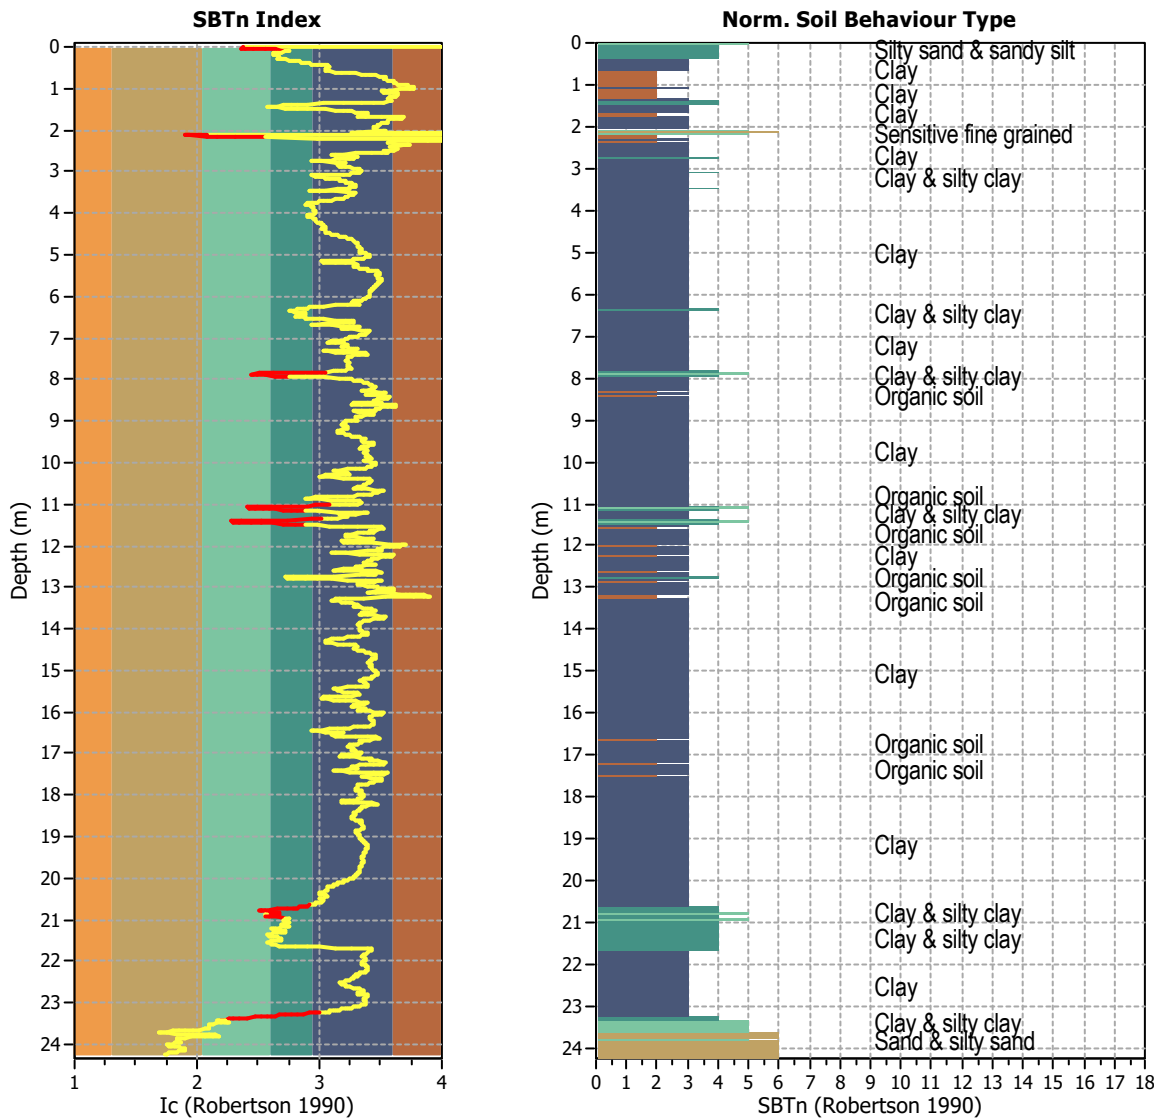


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2425
 Total points excluded: 111
 Exclusion percentage: 4.58%
 Number of layers detected: 13


Estimation of post-earthquake settlements

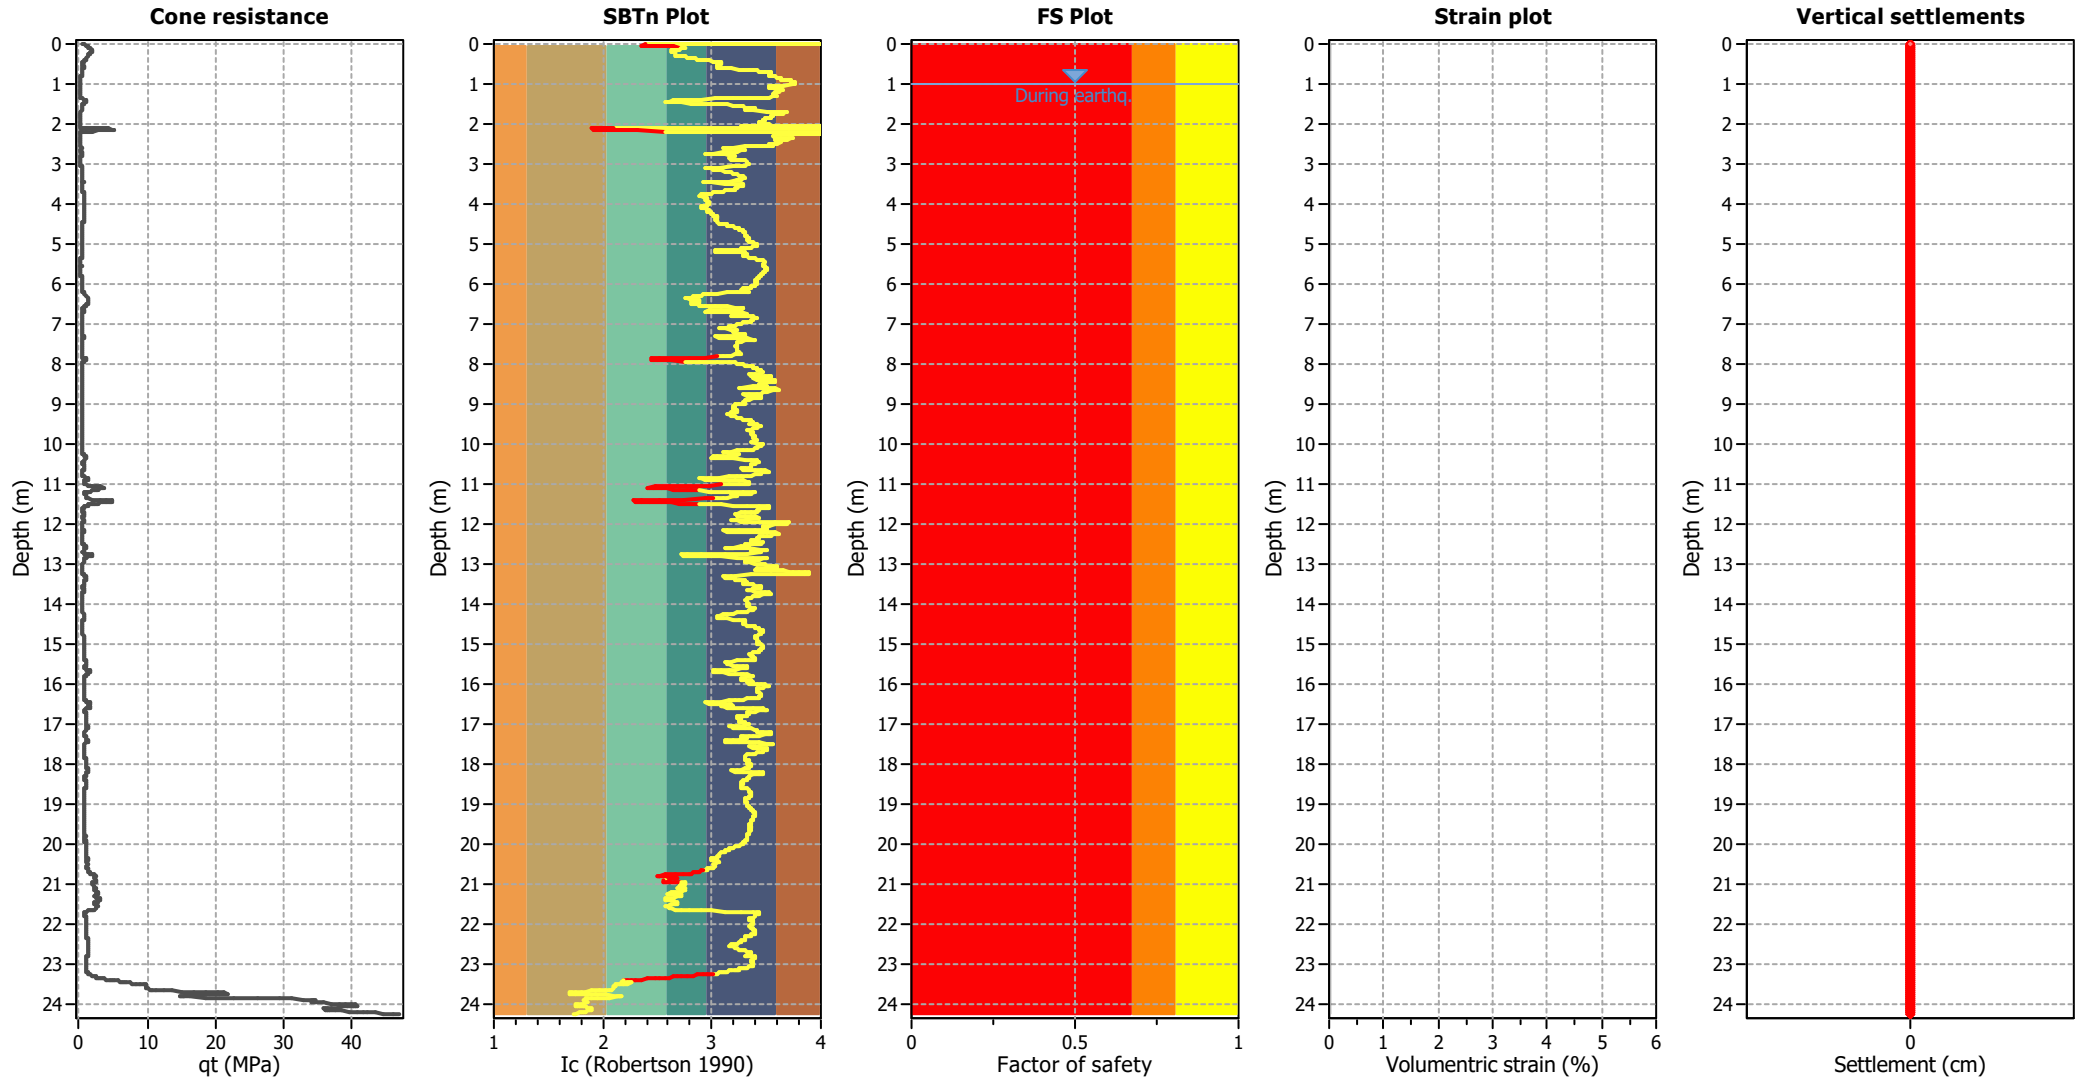

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

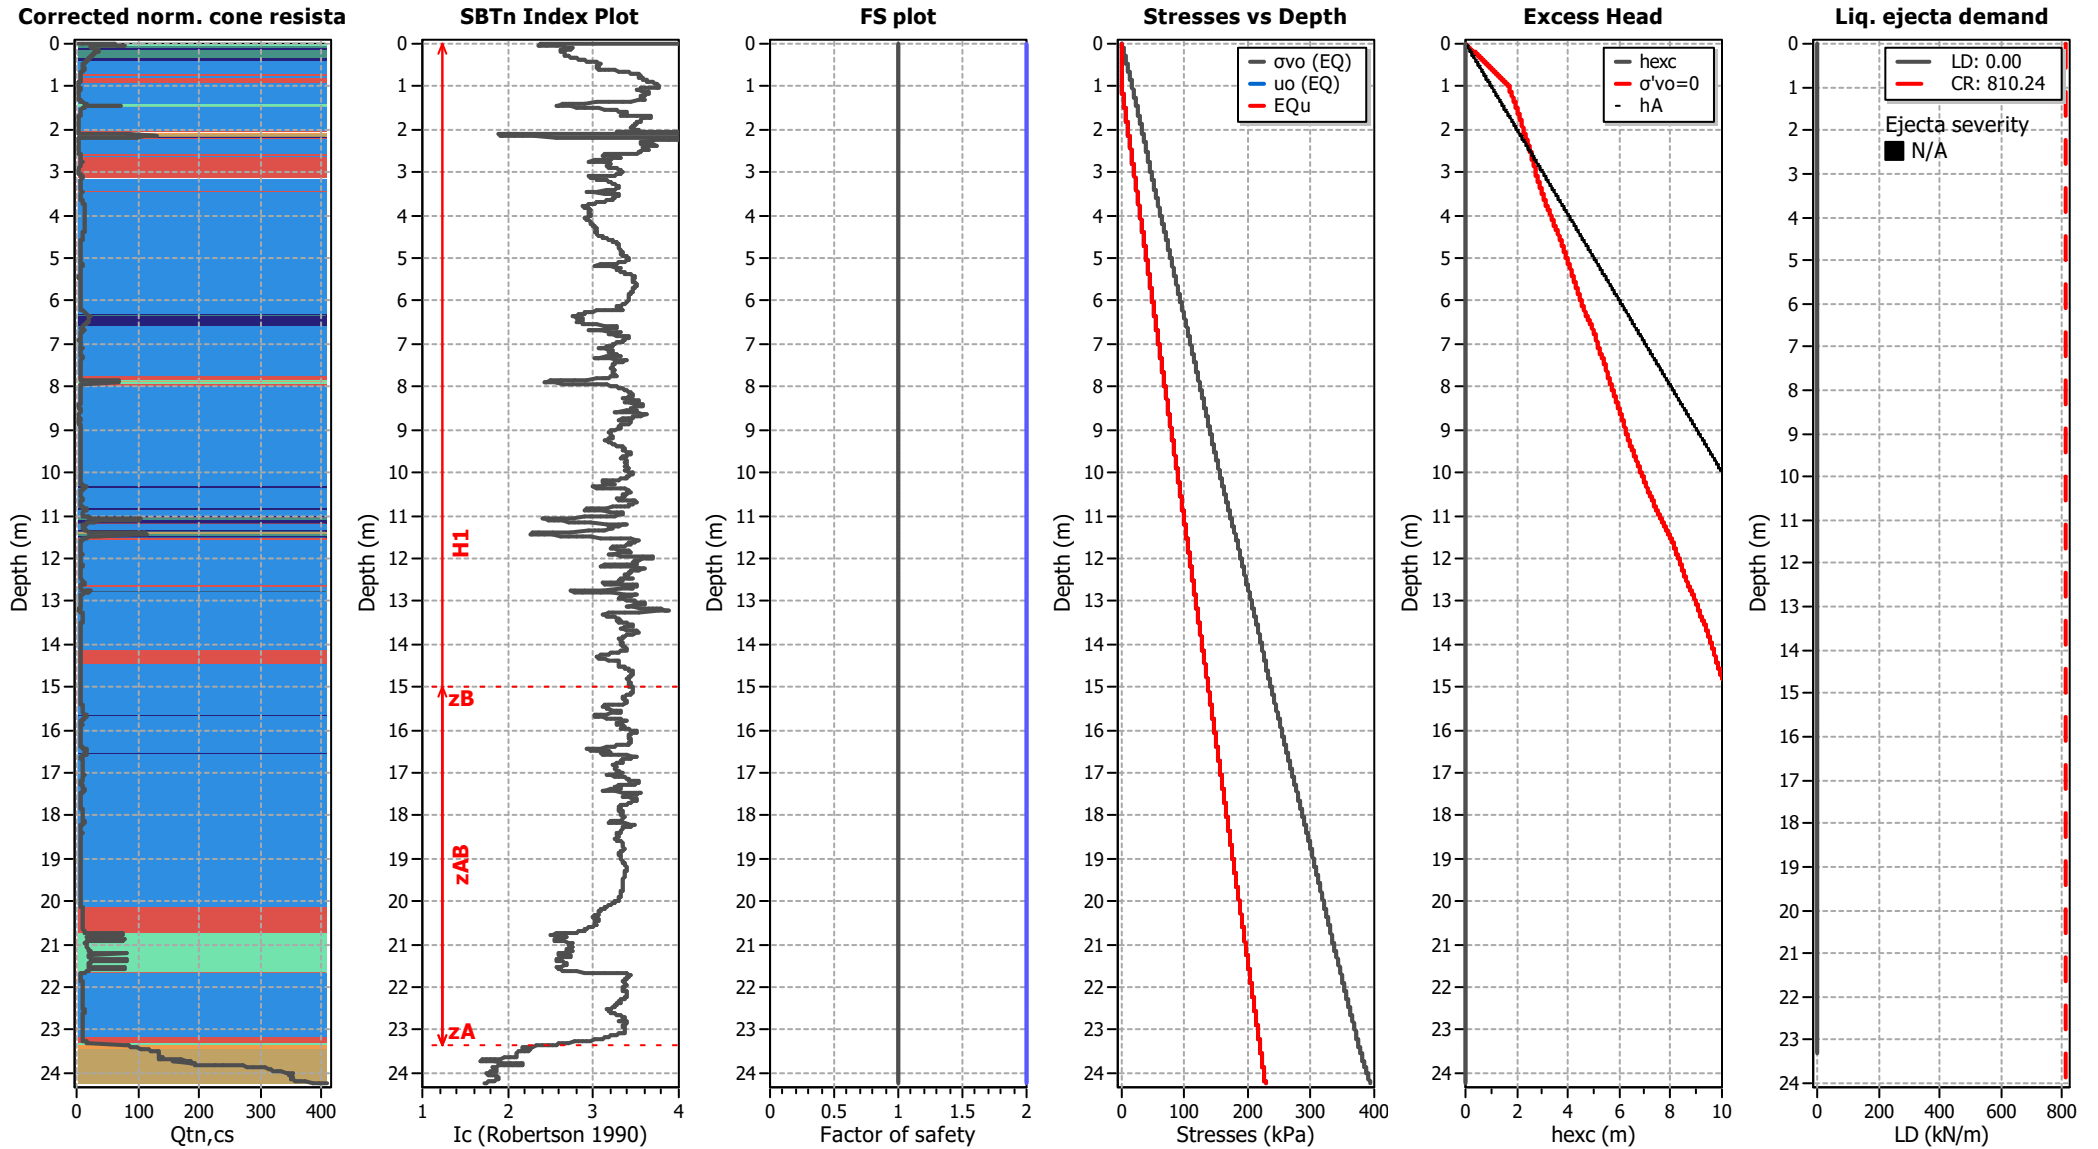

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT03

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

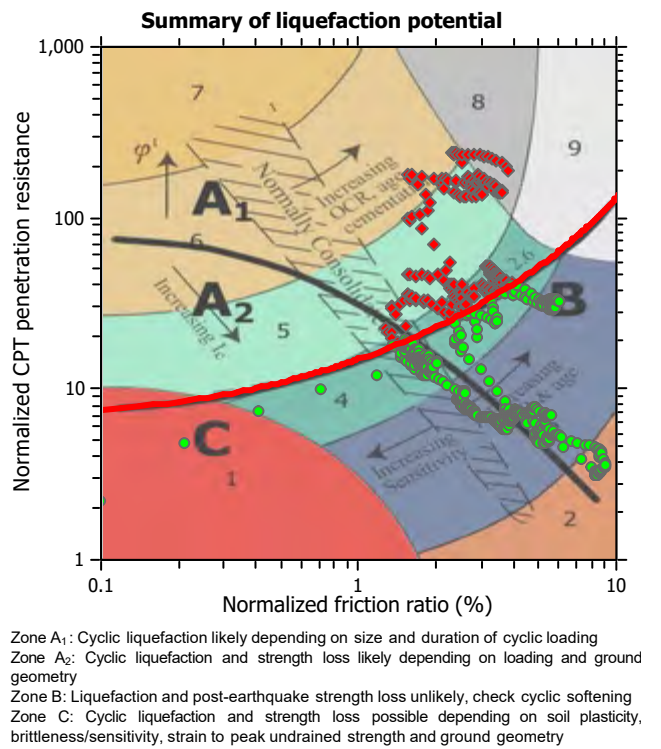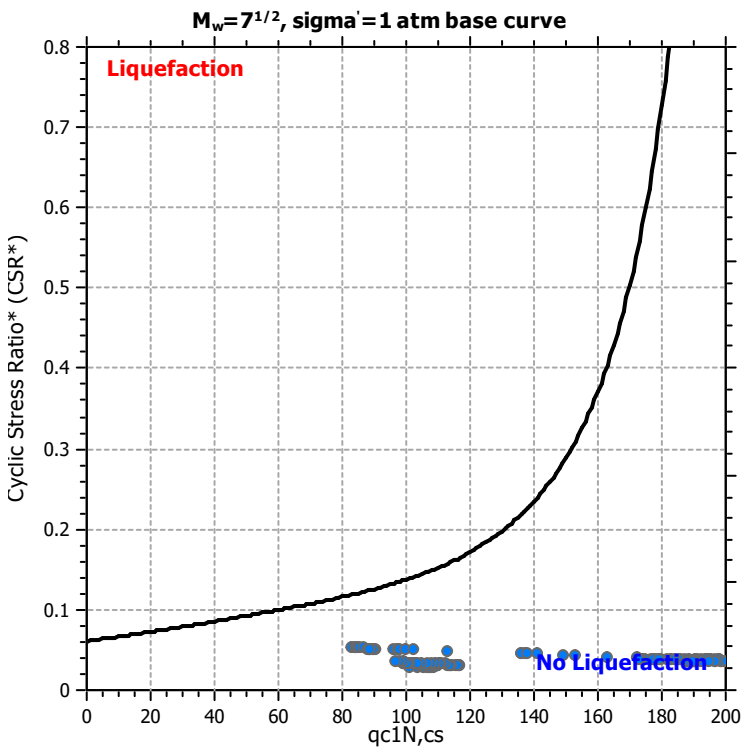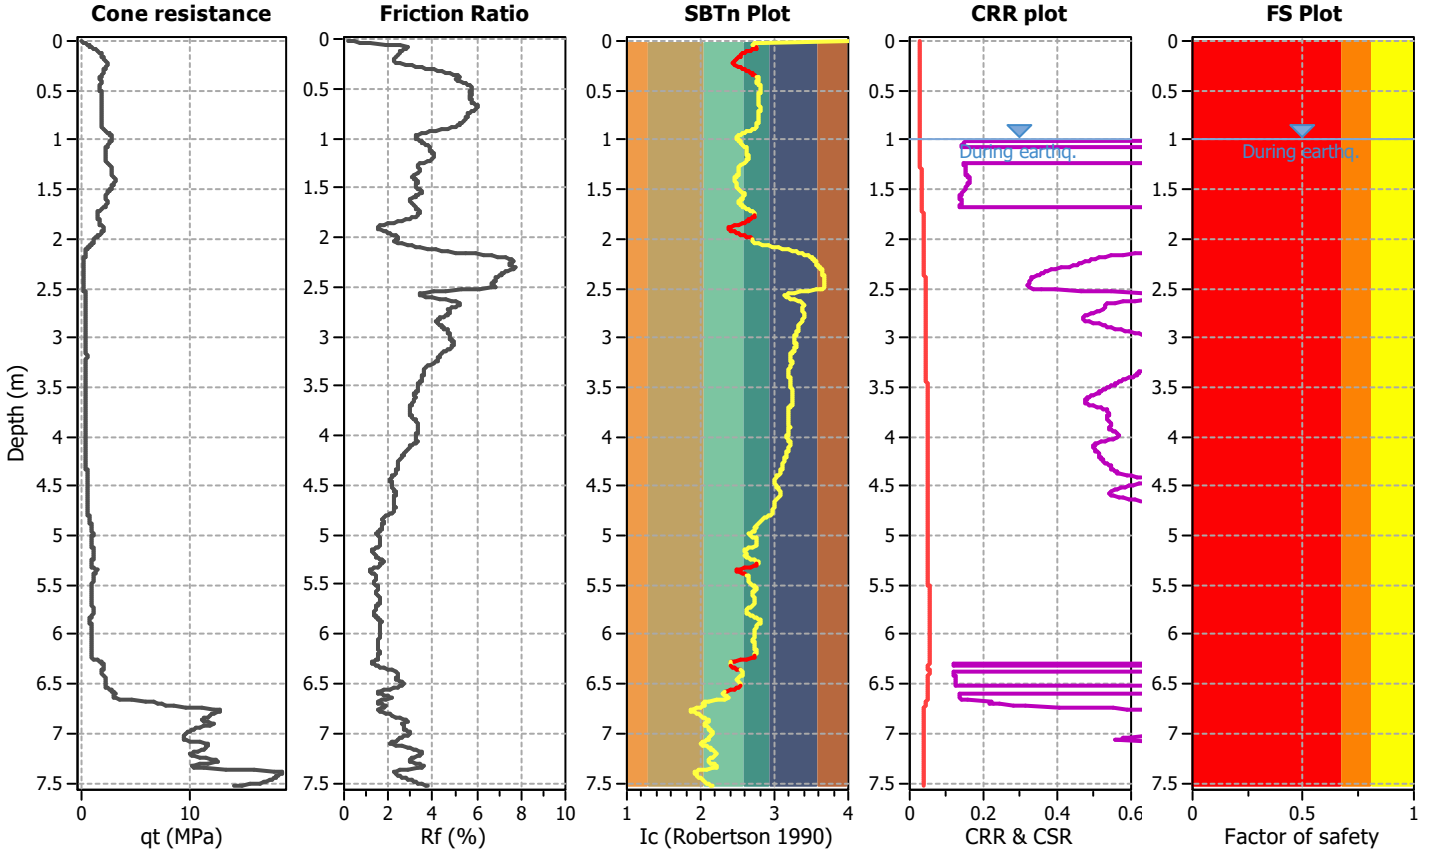

CPT basic interpretation plots

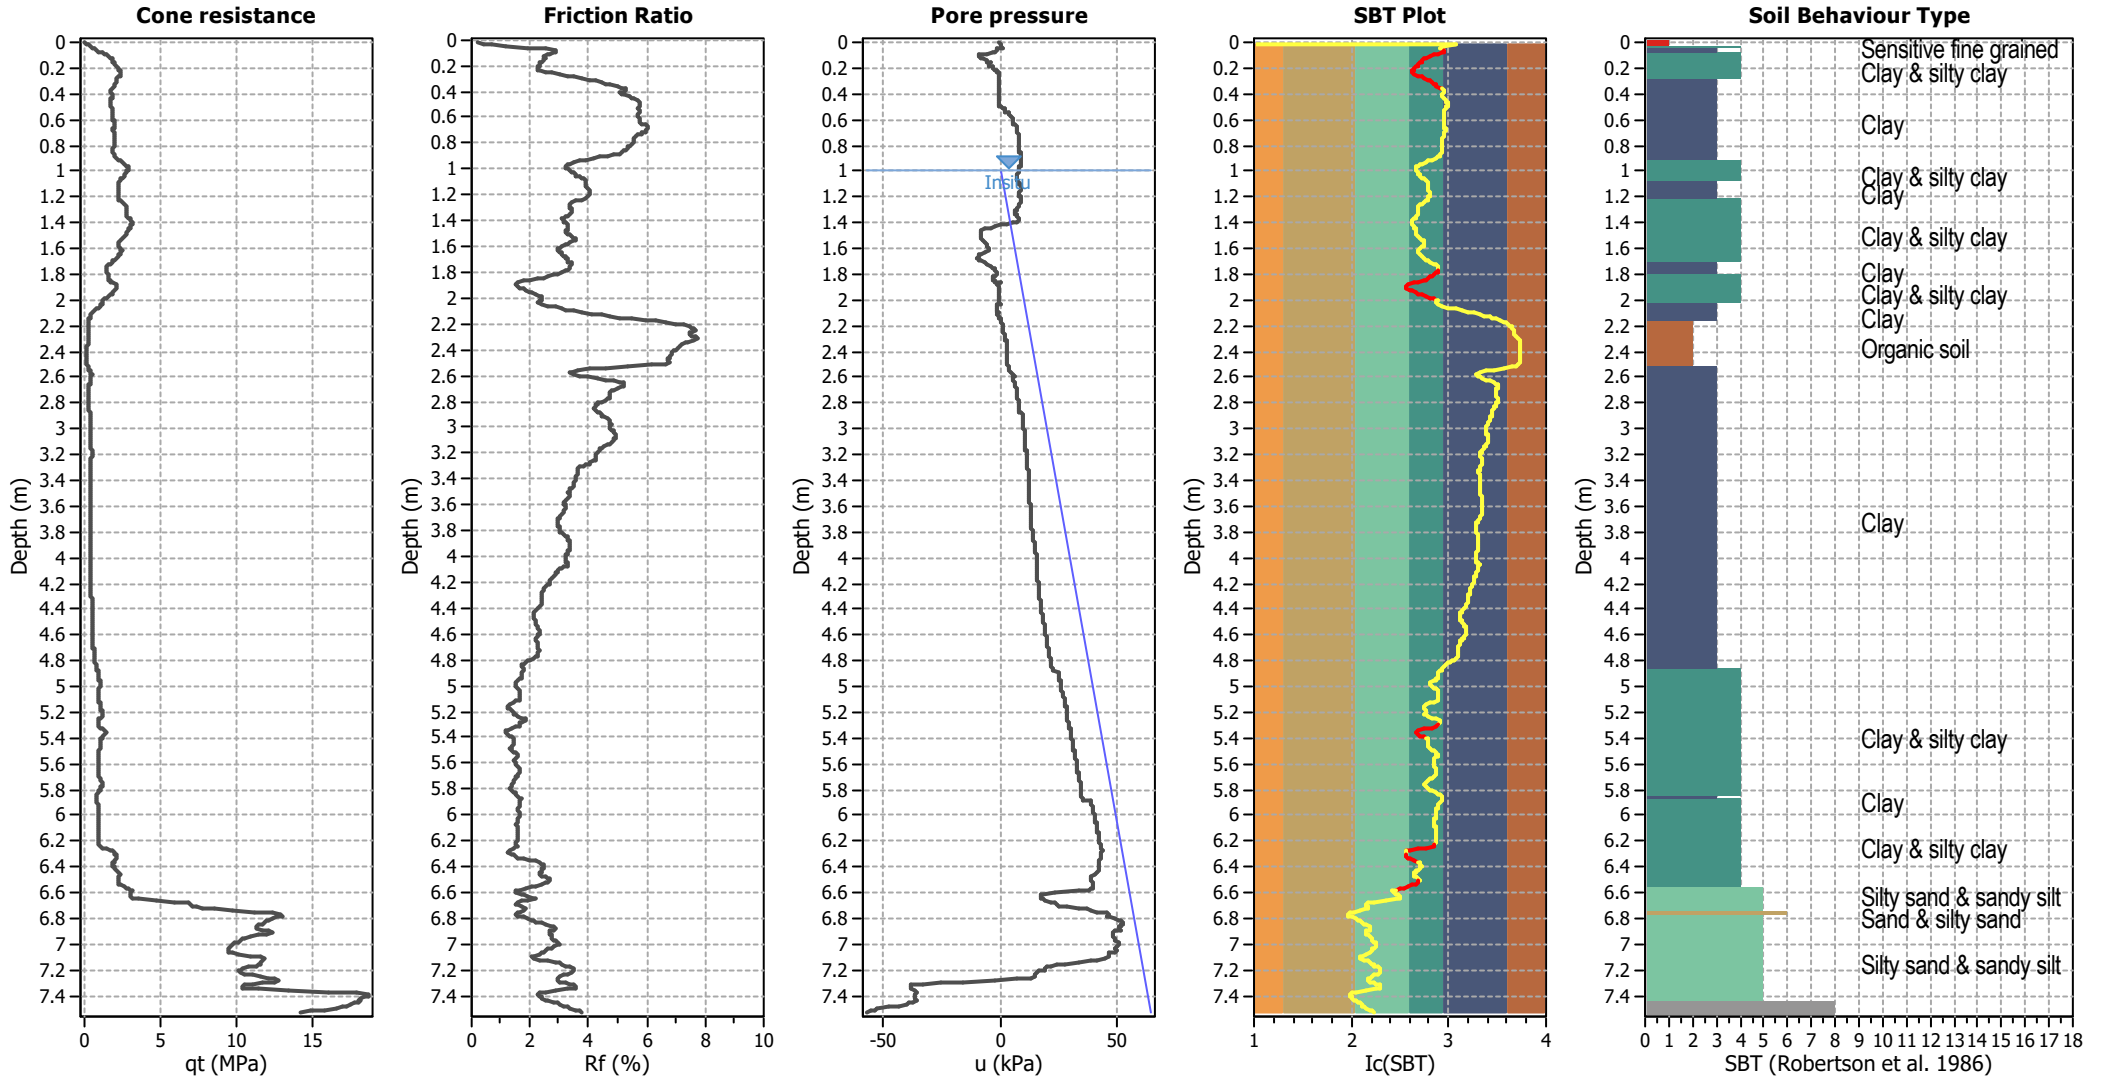


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

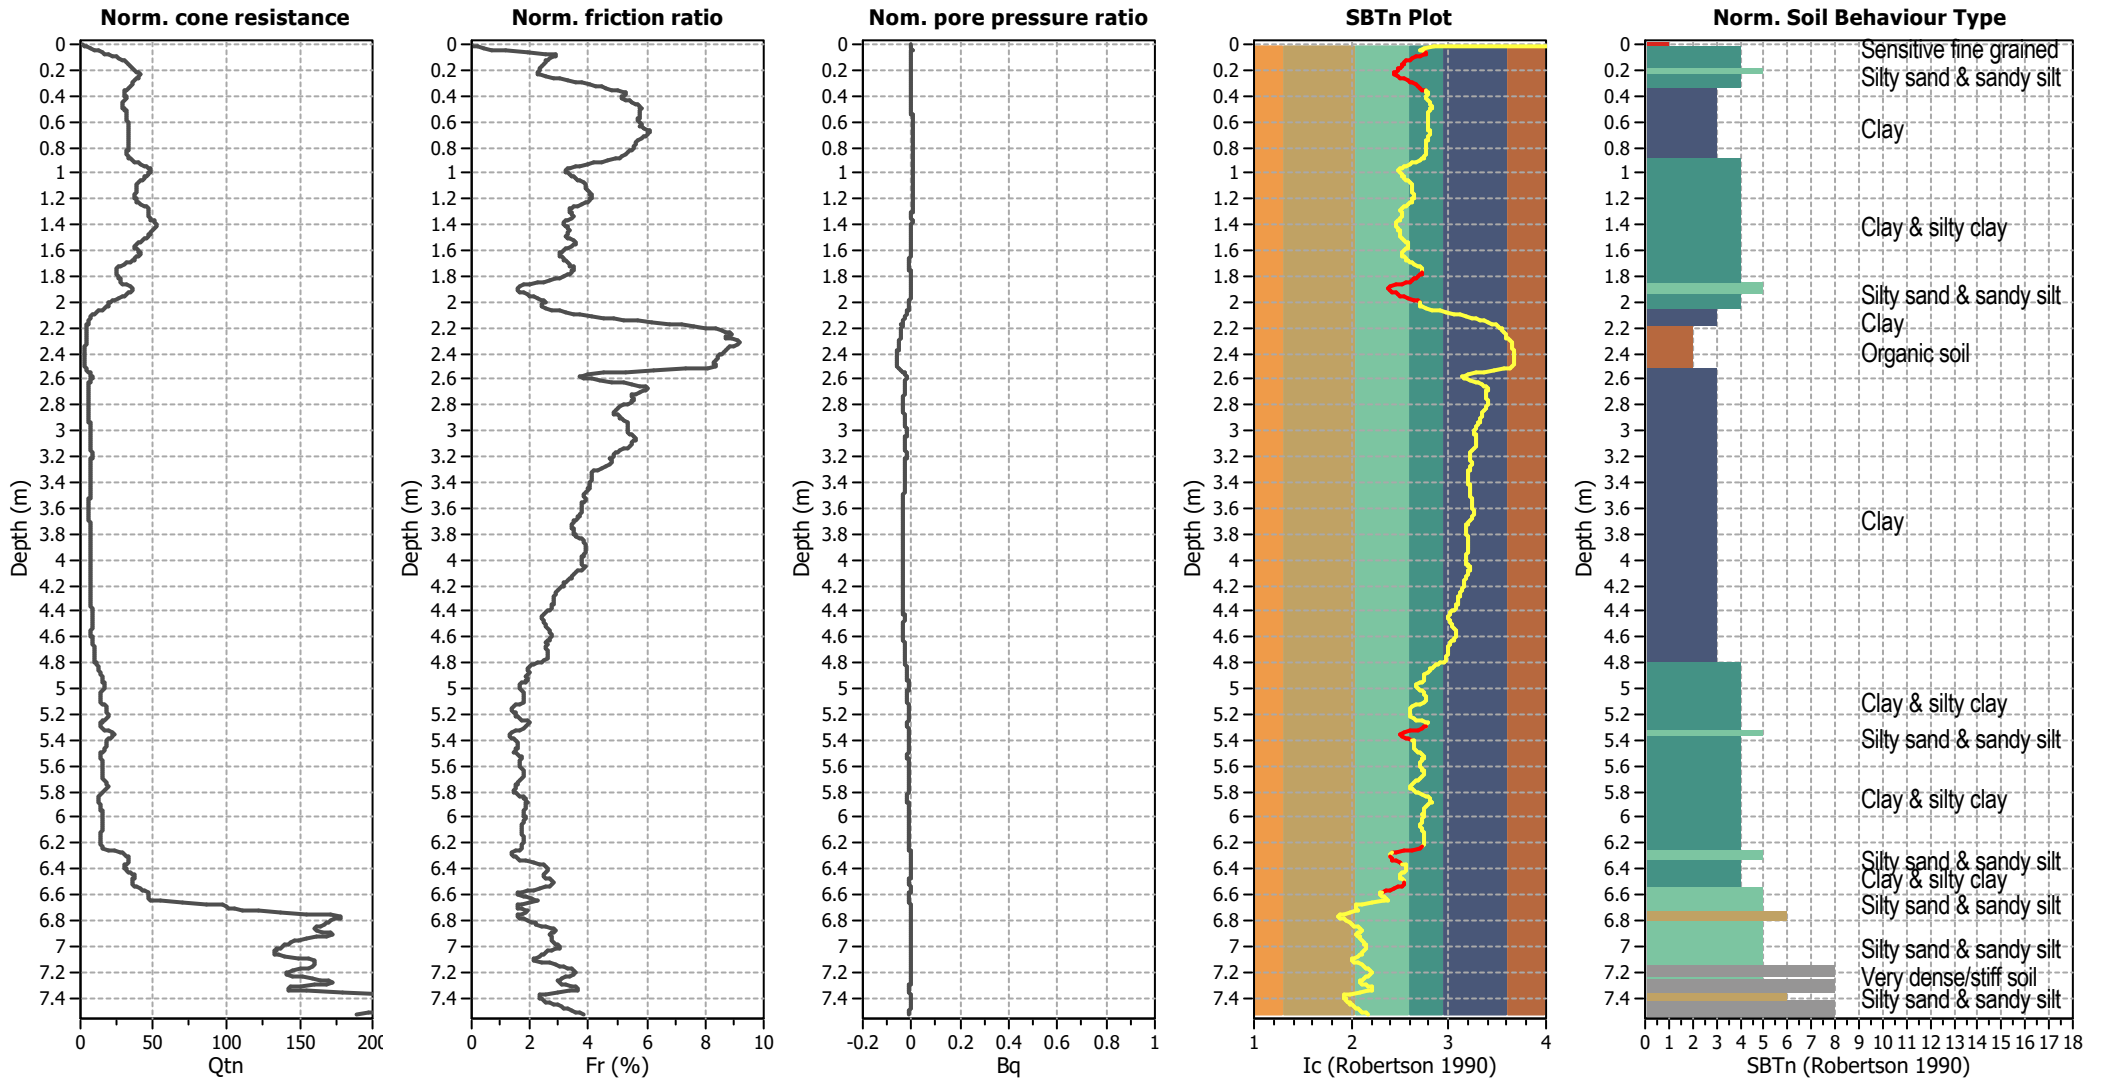


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

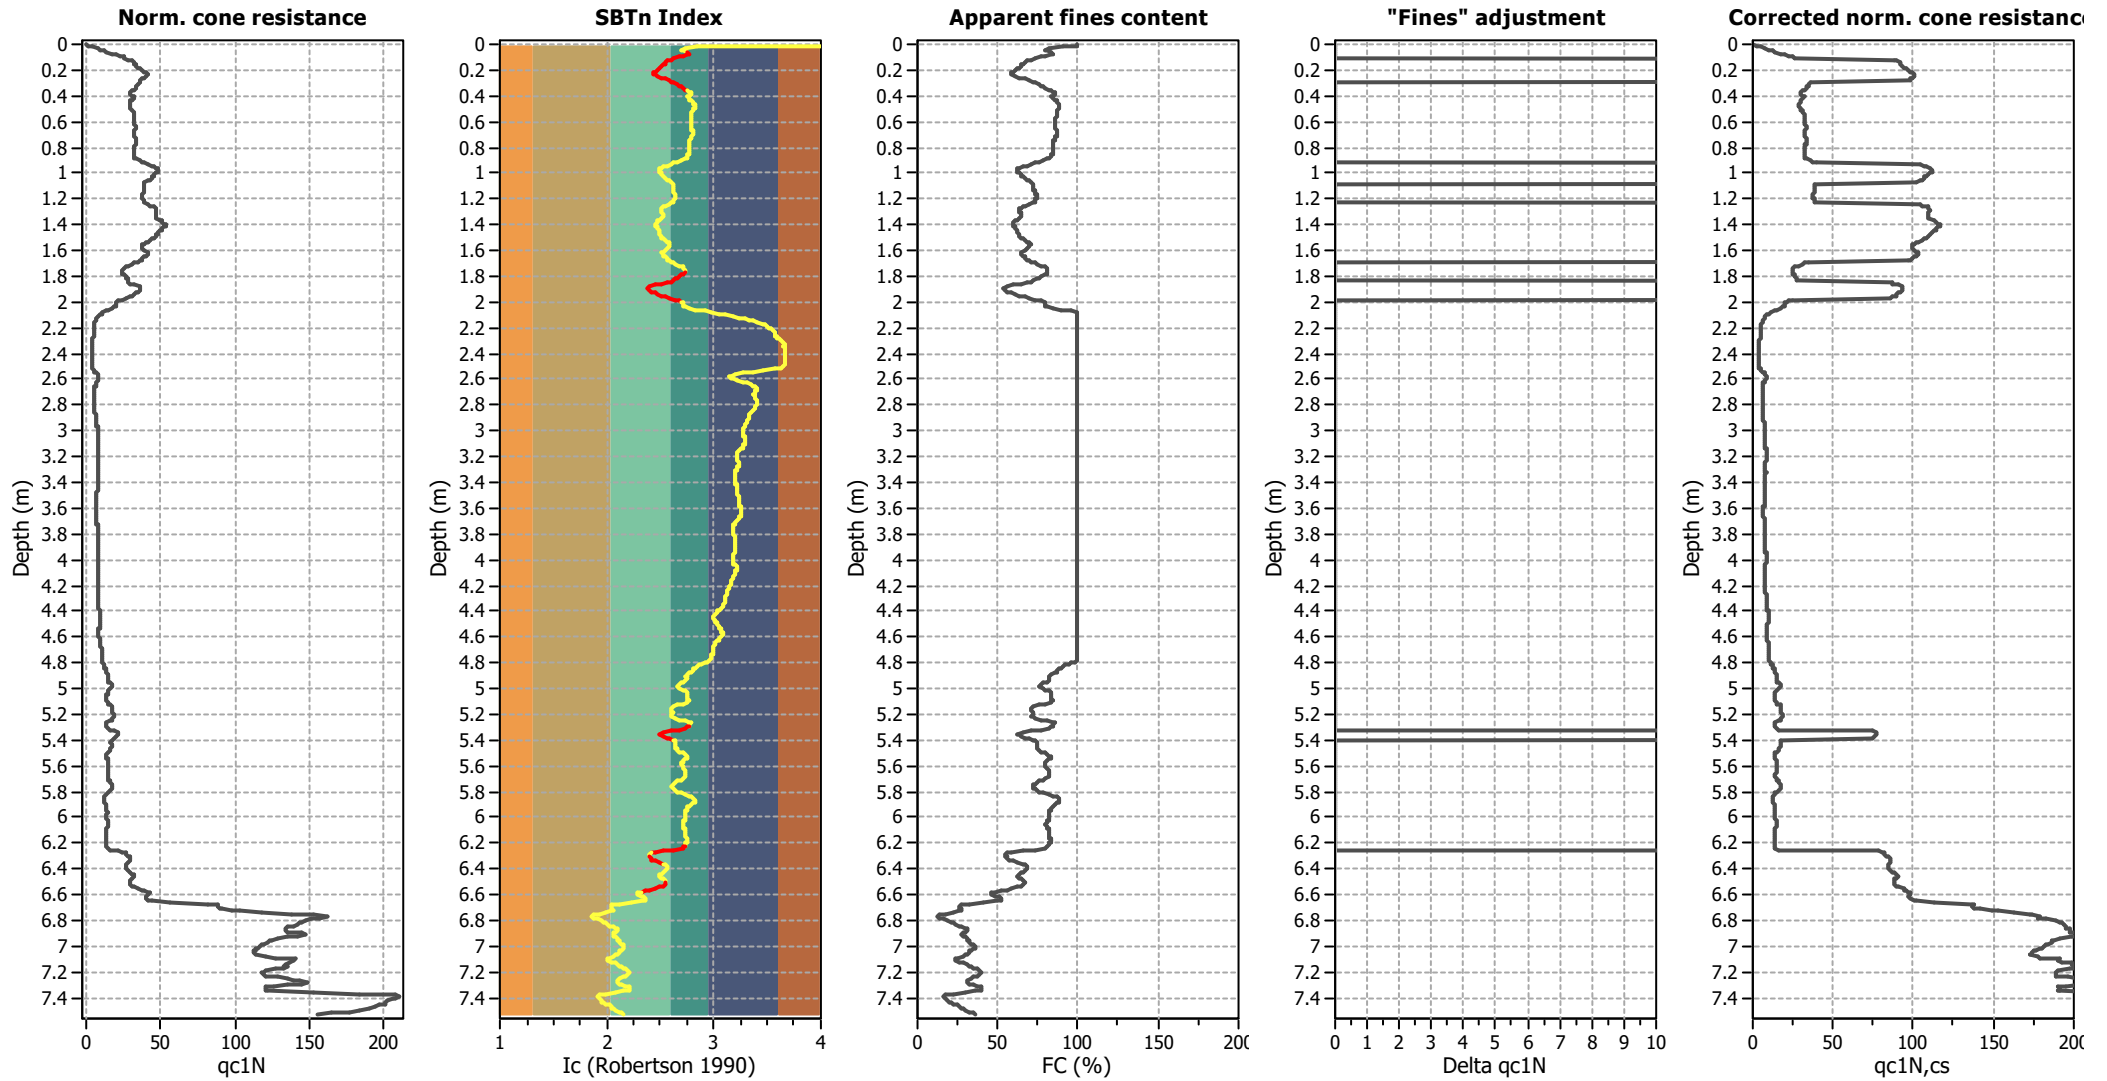

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

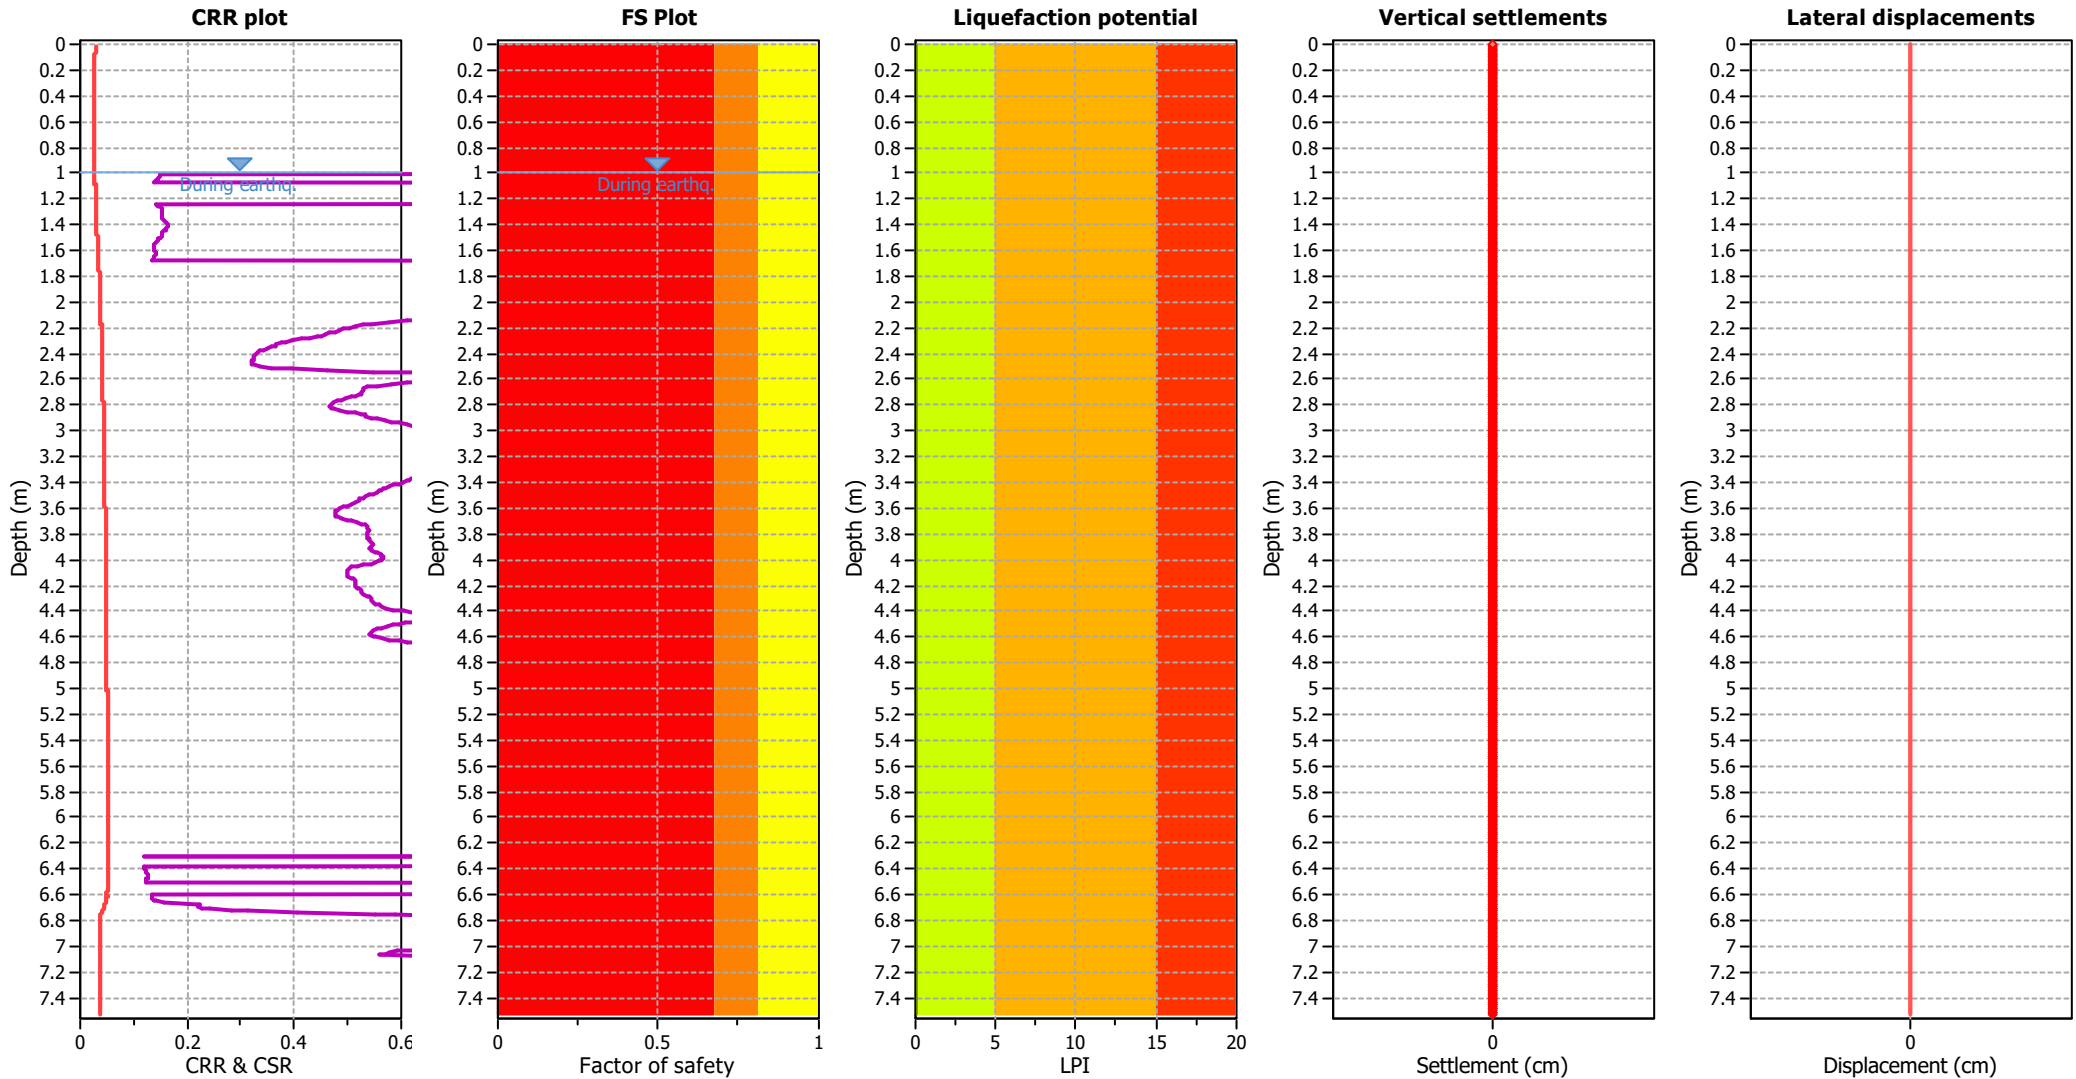

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

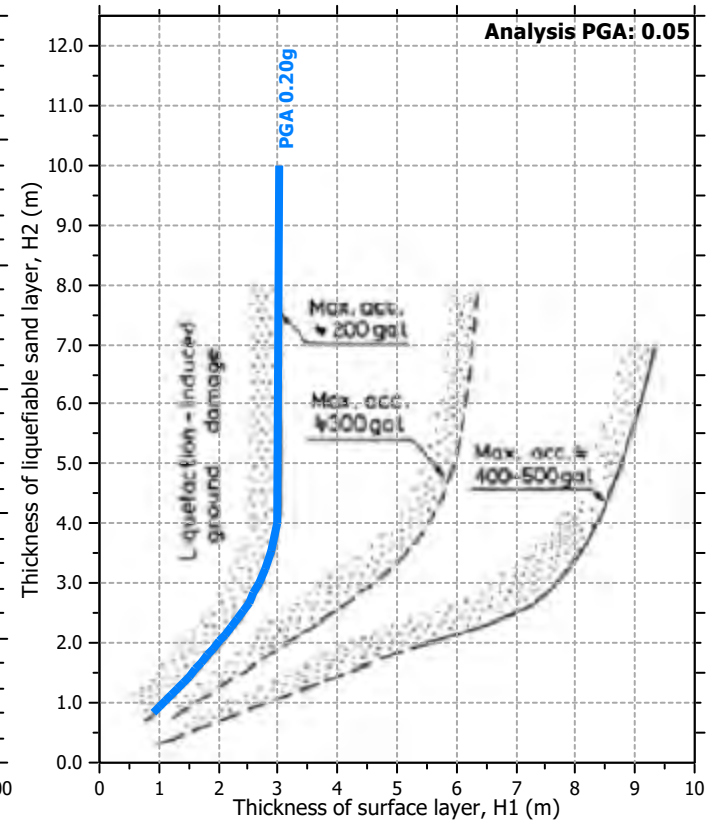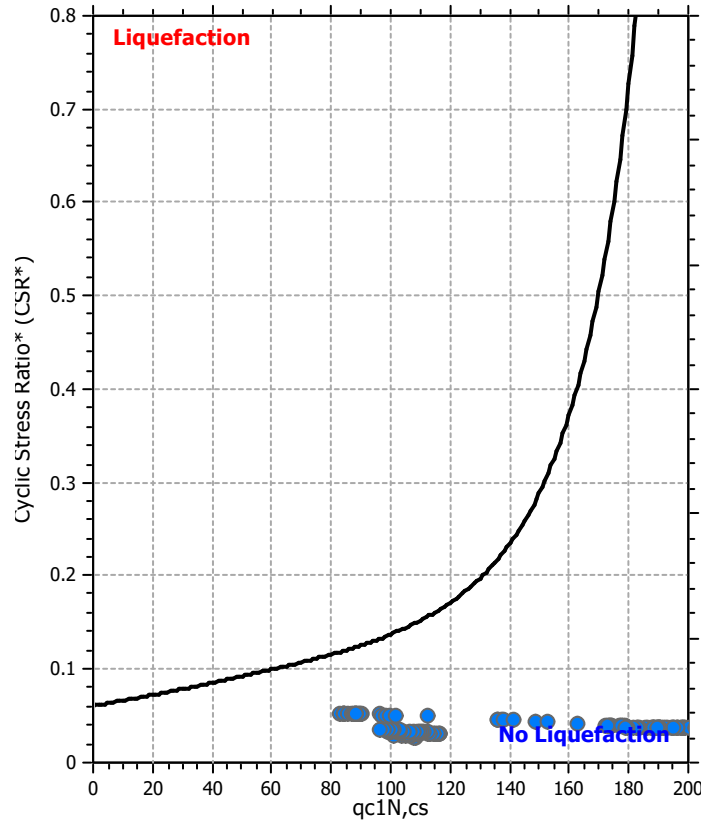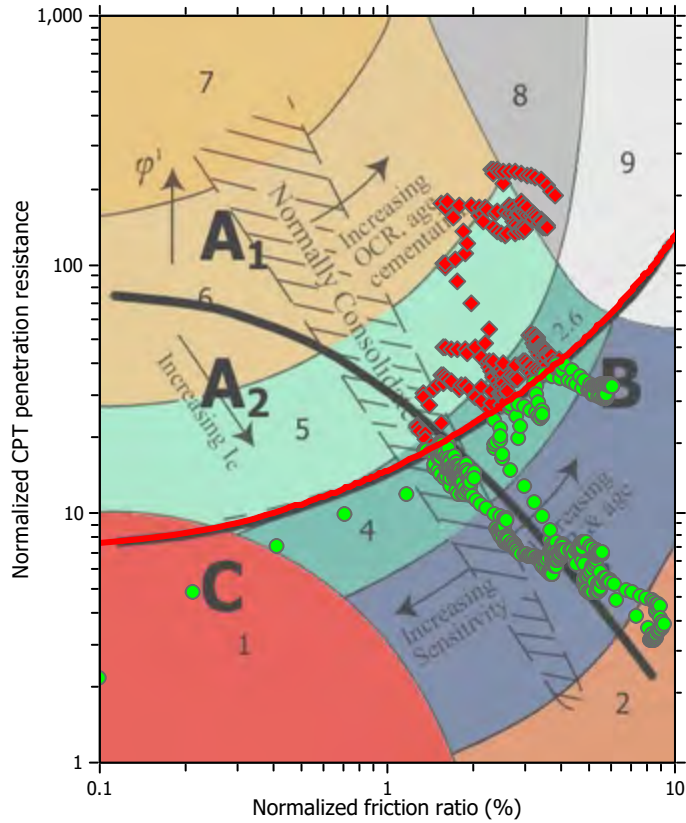

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

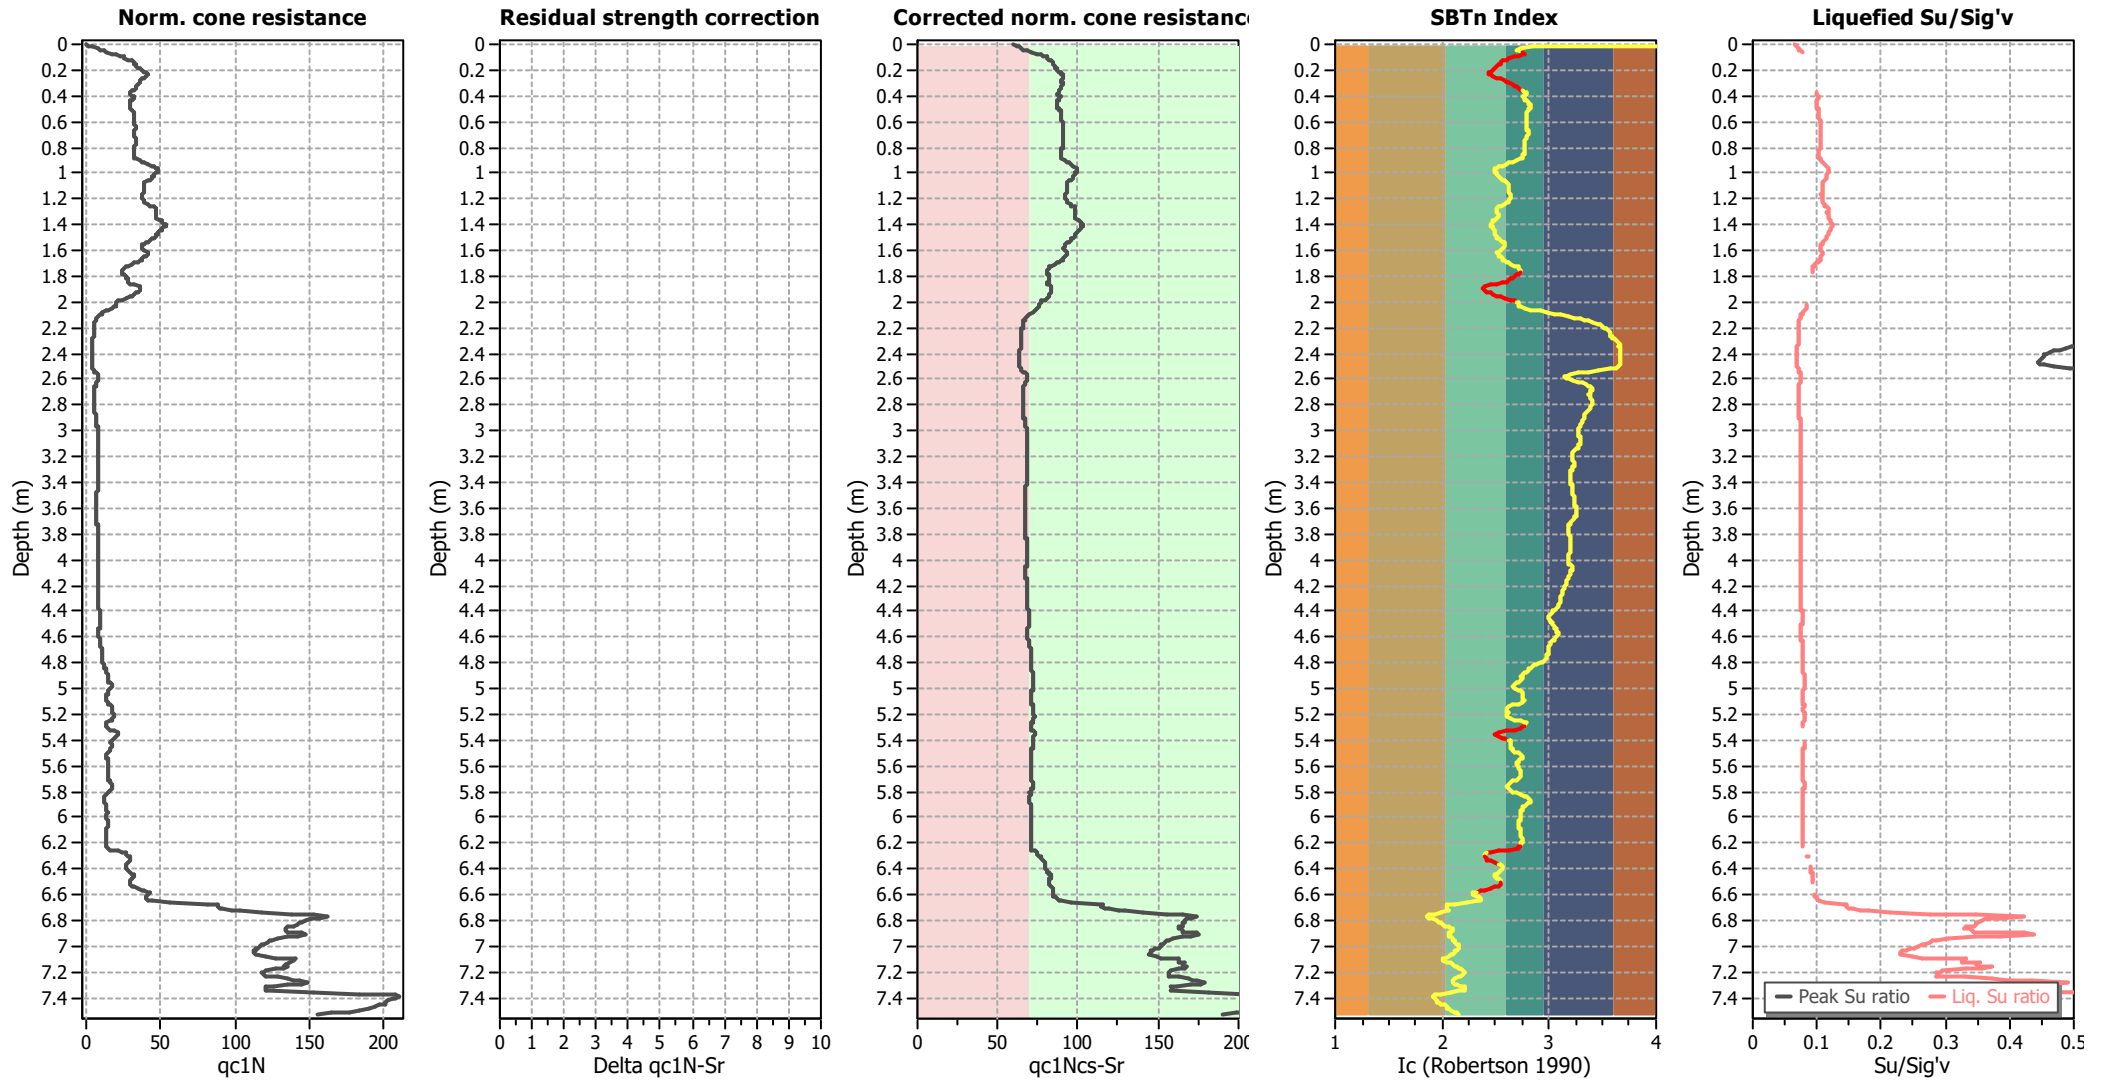

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

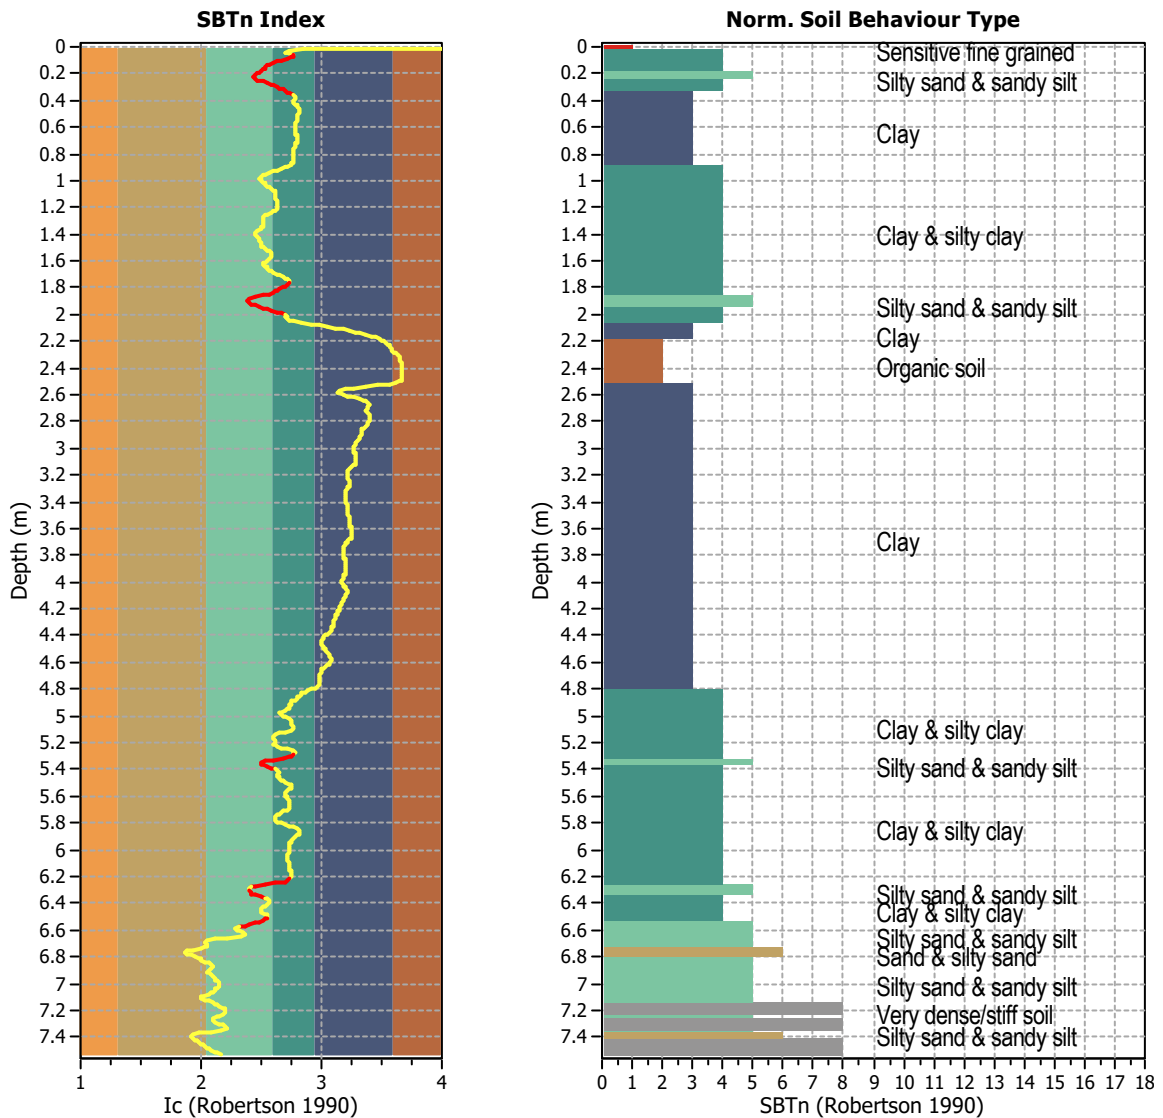


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 754
 Total points excluded: 88
 Exclusion percentage: 11.67%
 Number of layers detected: 9


Estimation of post-earthquake settlements

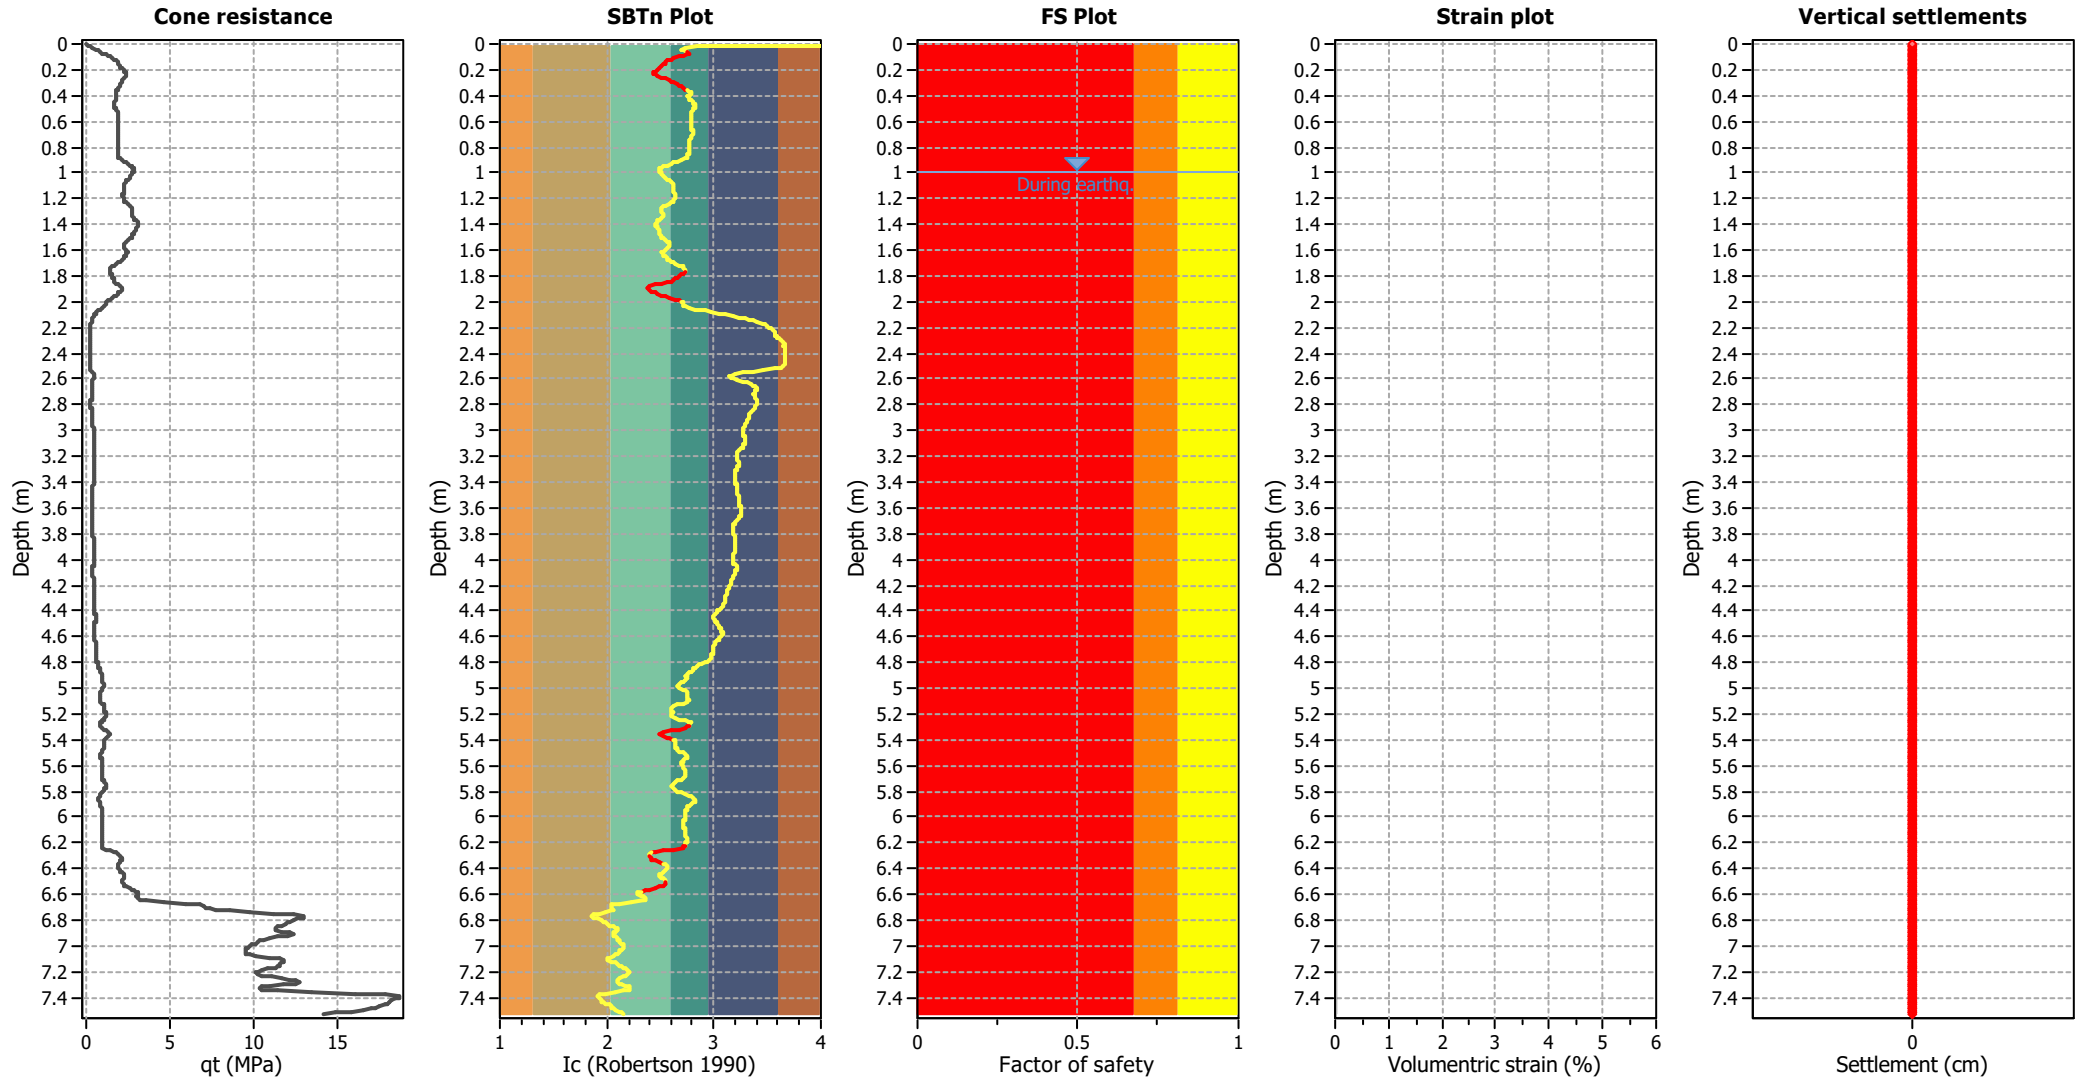

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

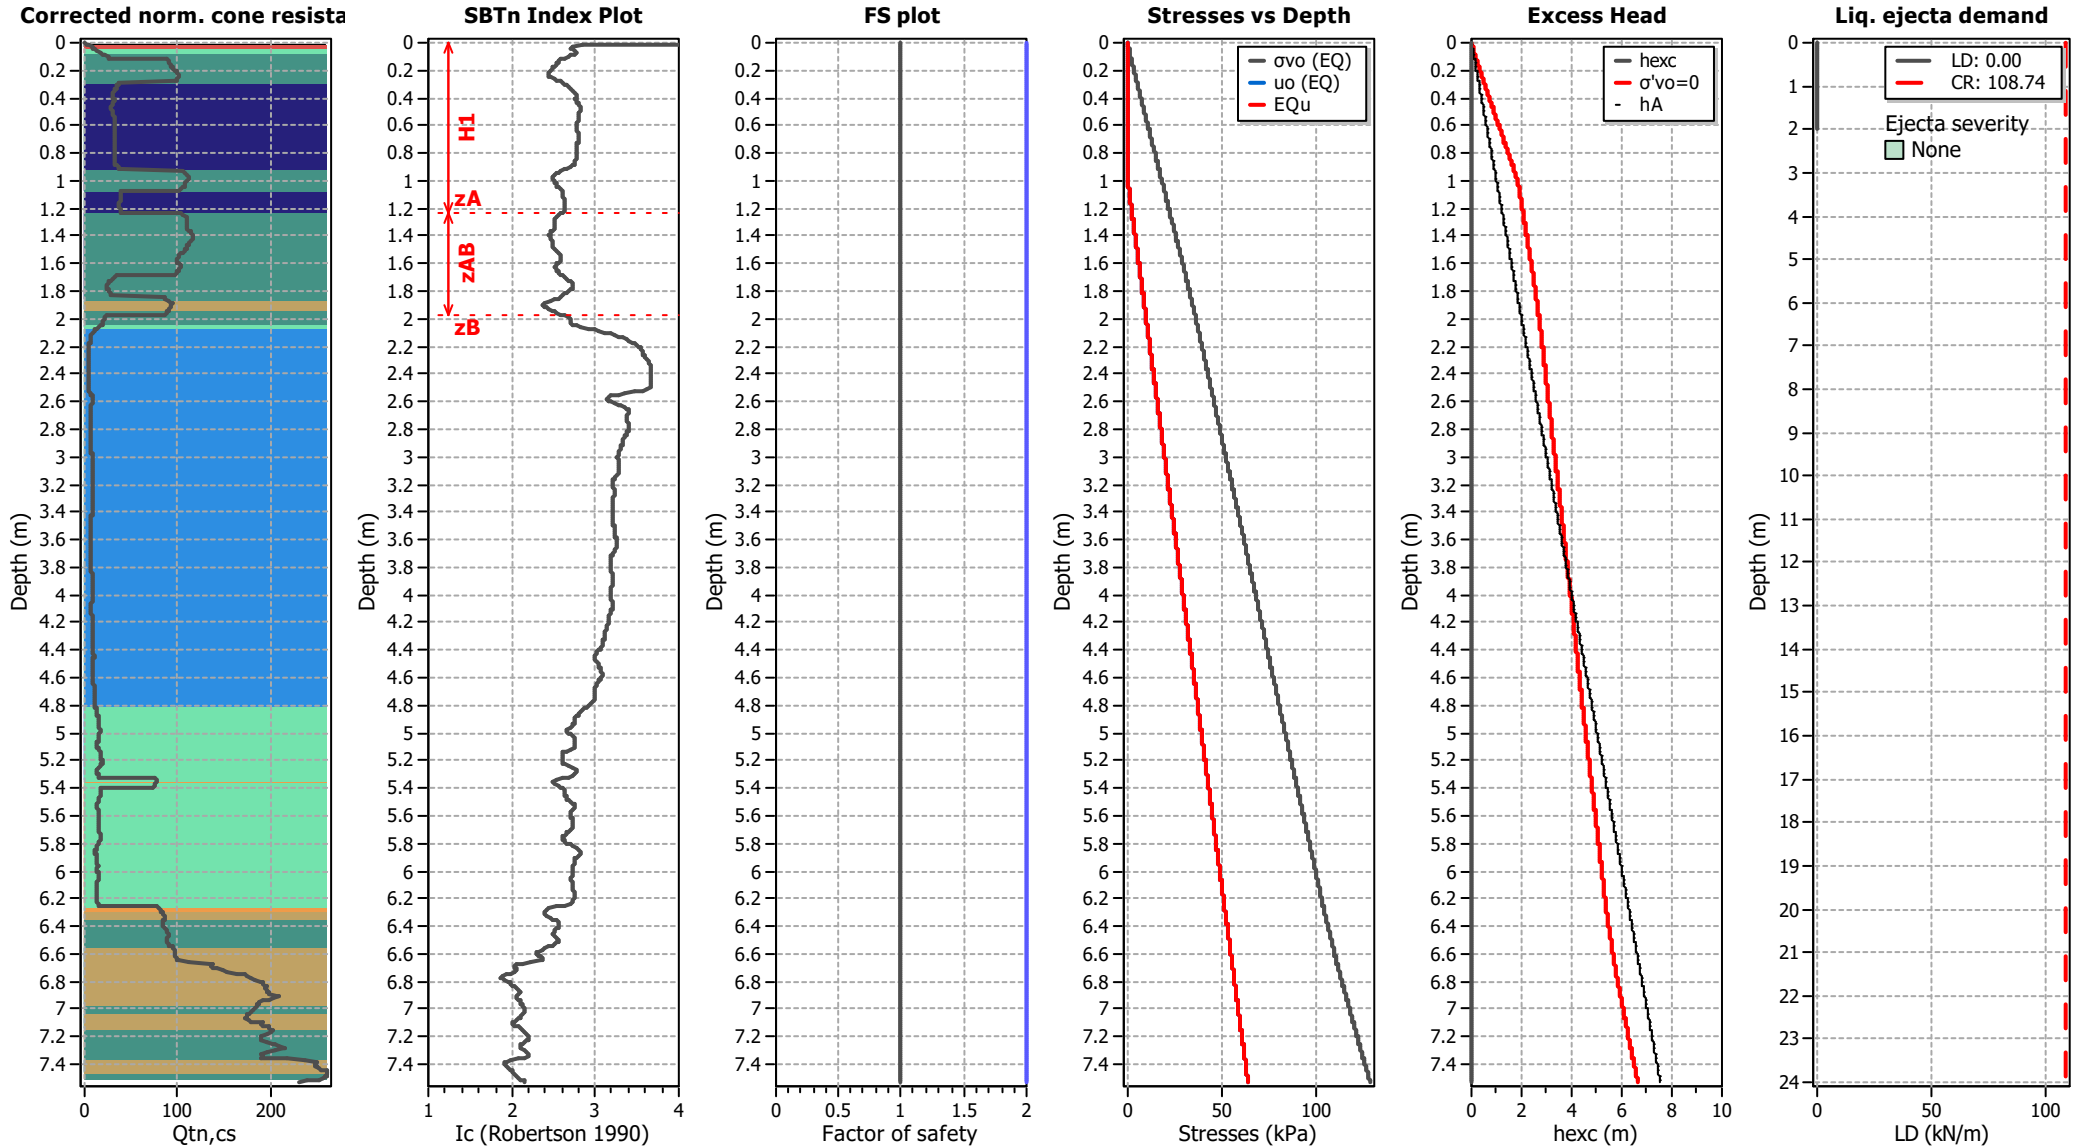

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT03A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

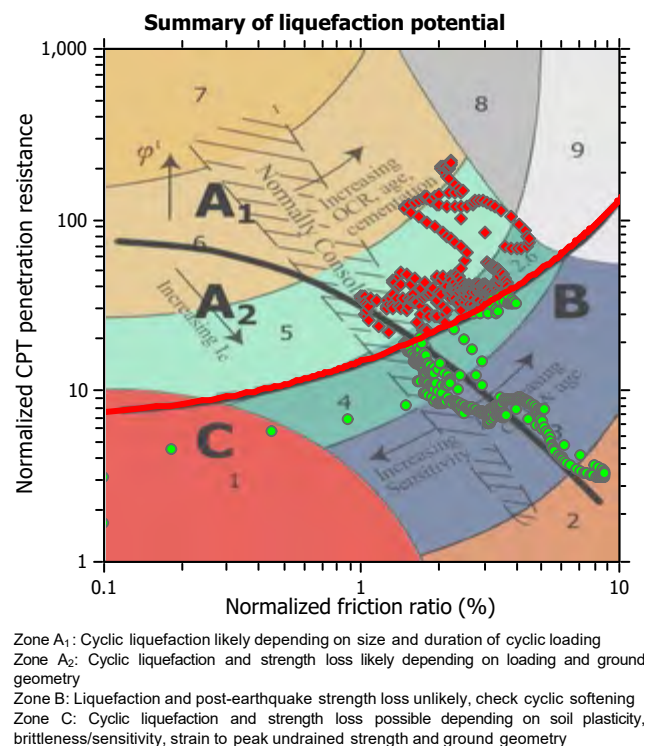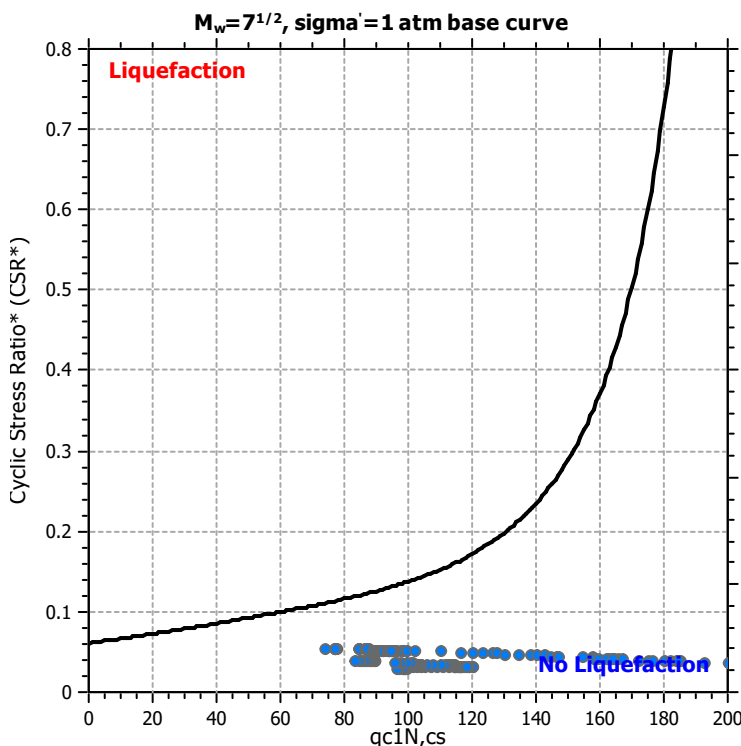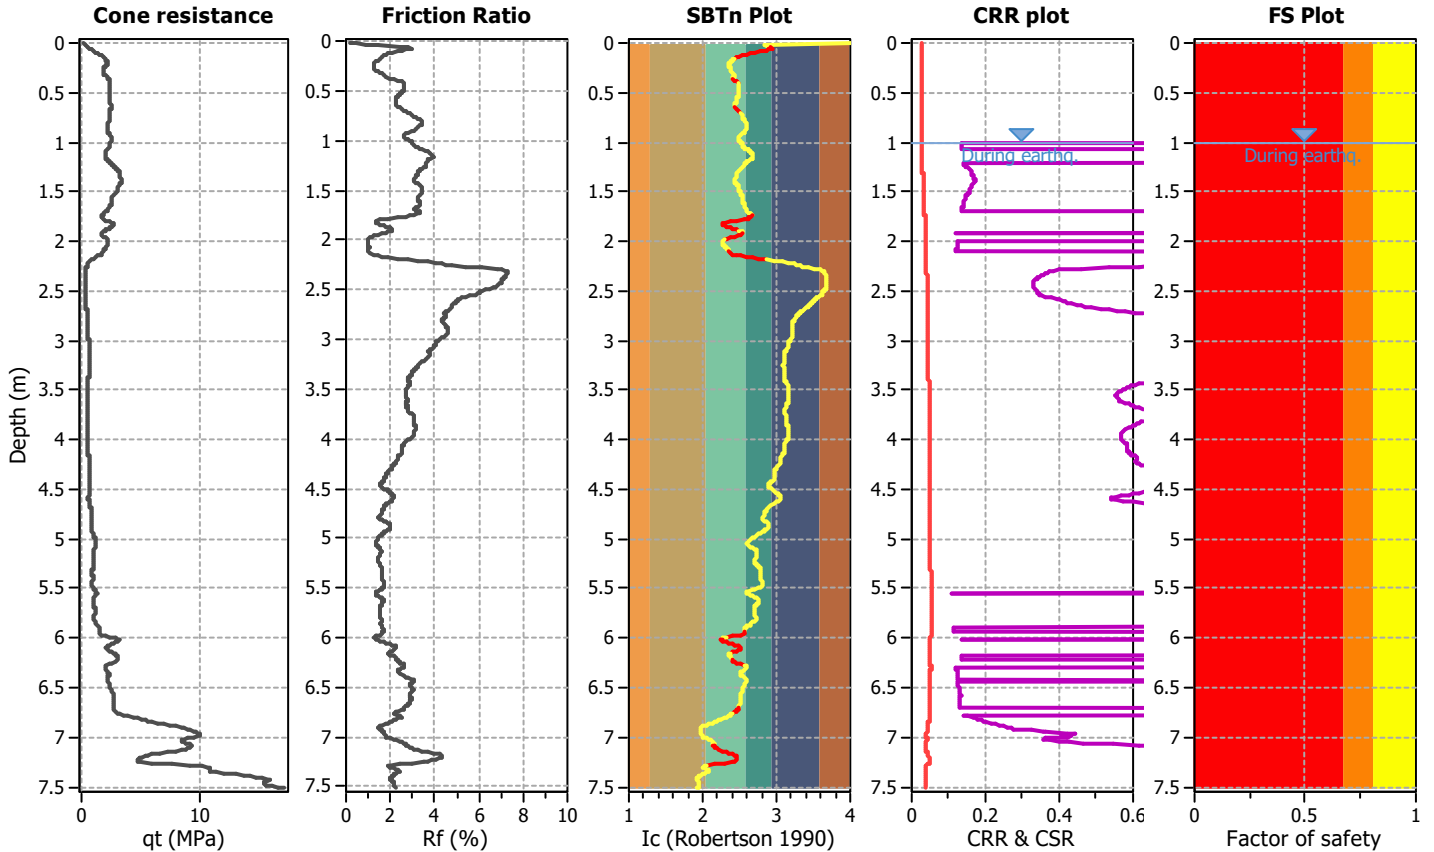

CPT basic interpretation plots

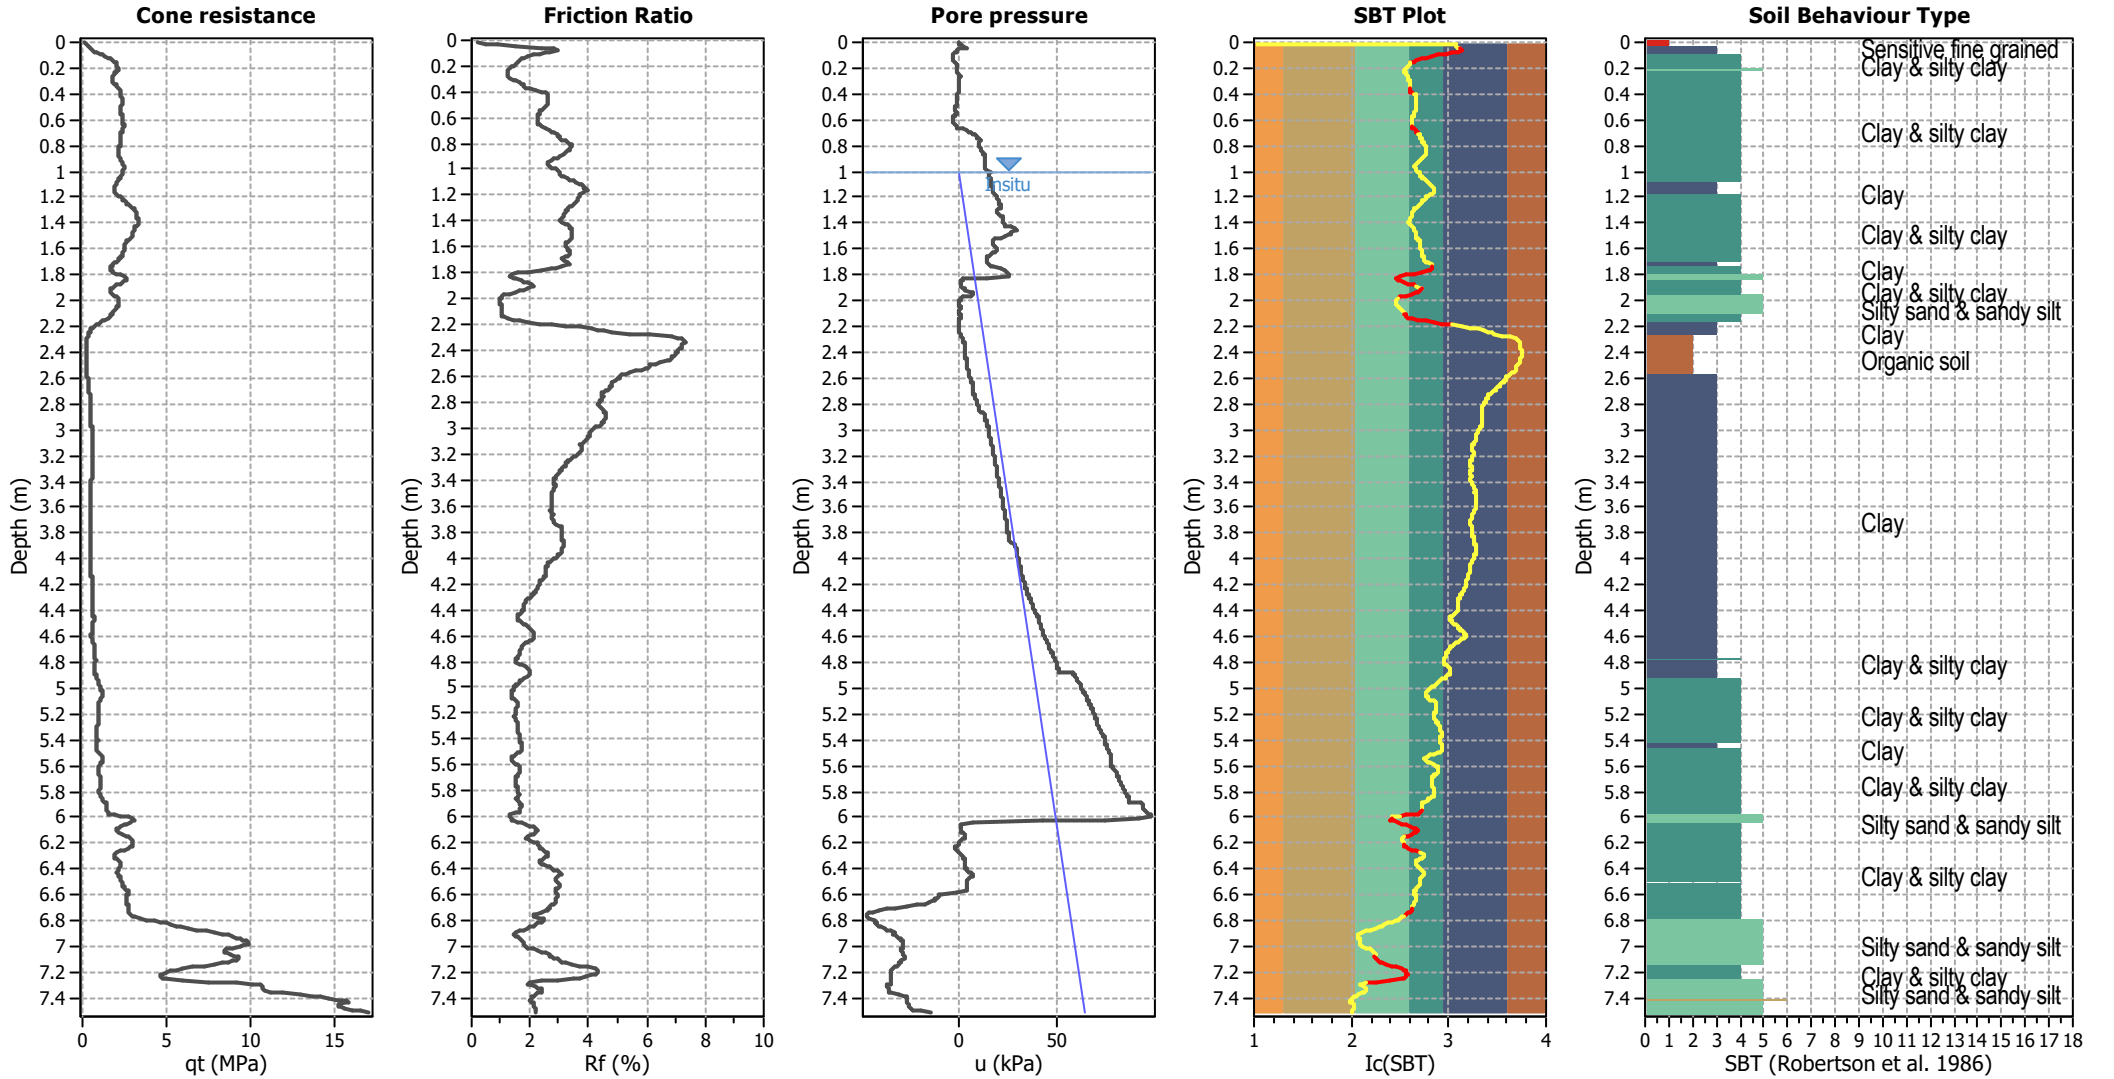


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

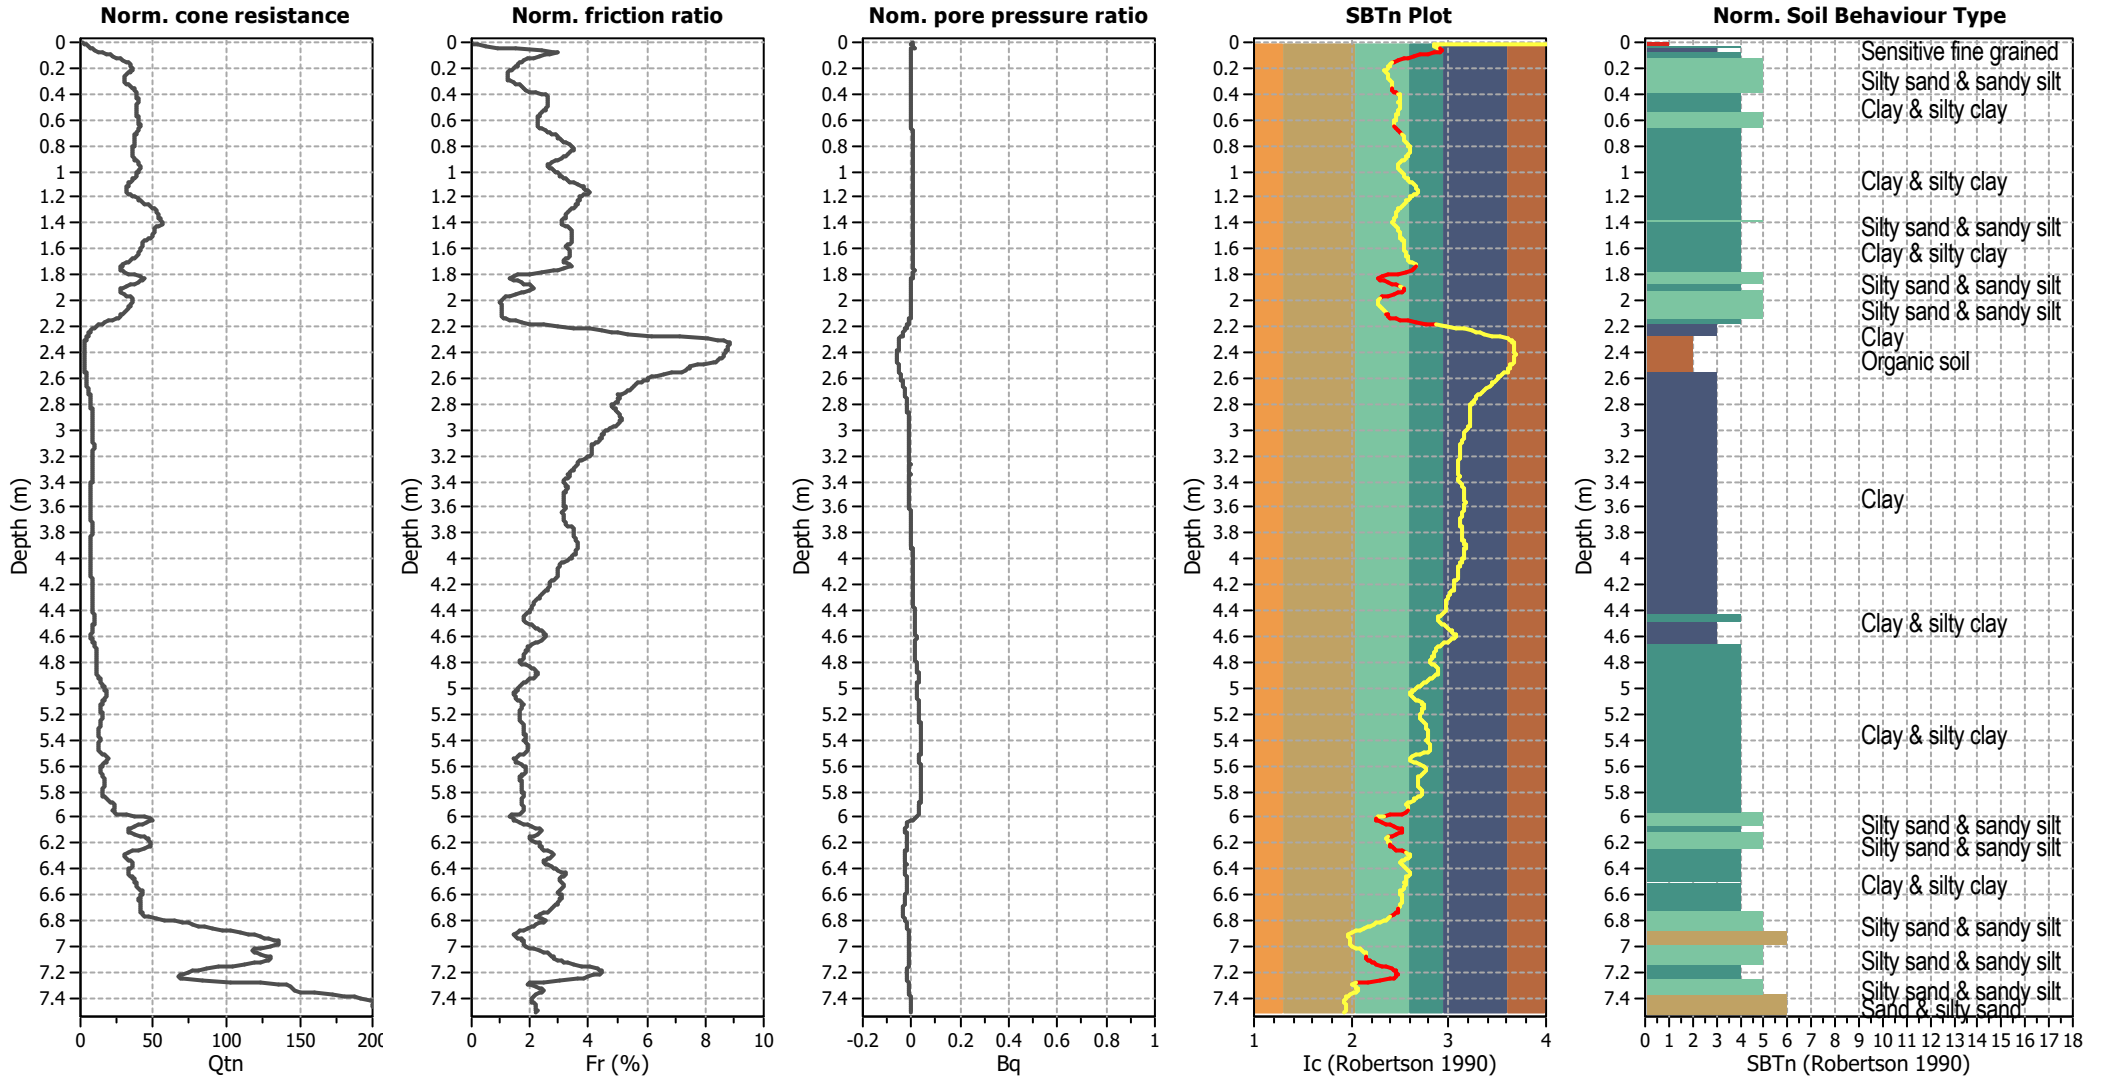


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

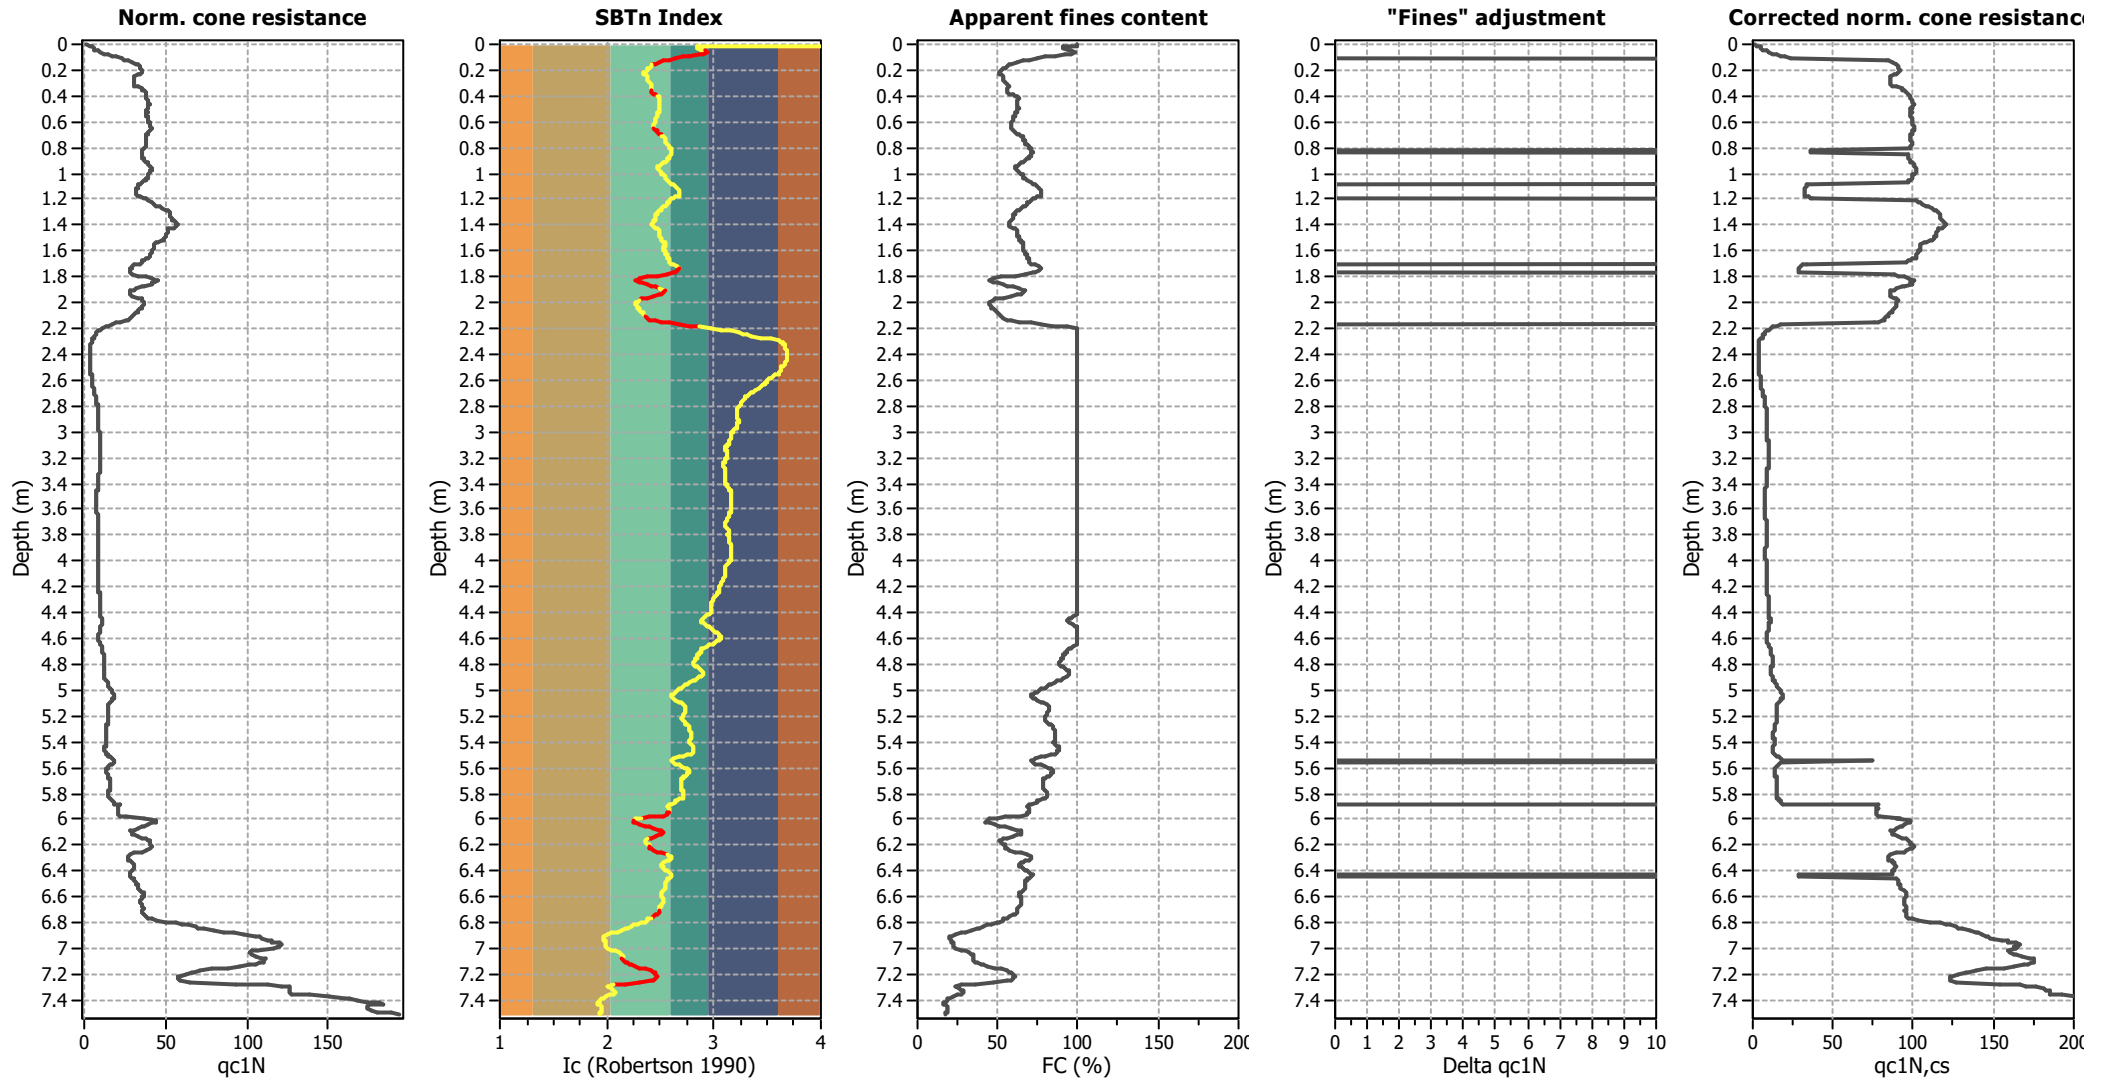

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

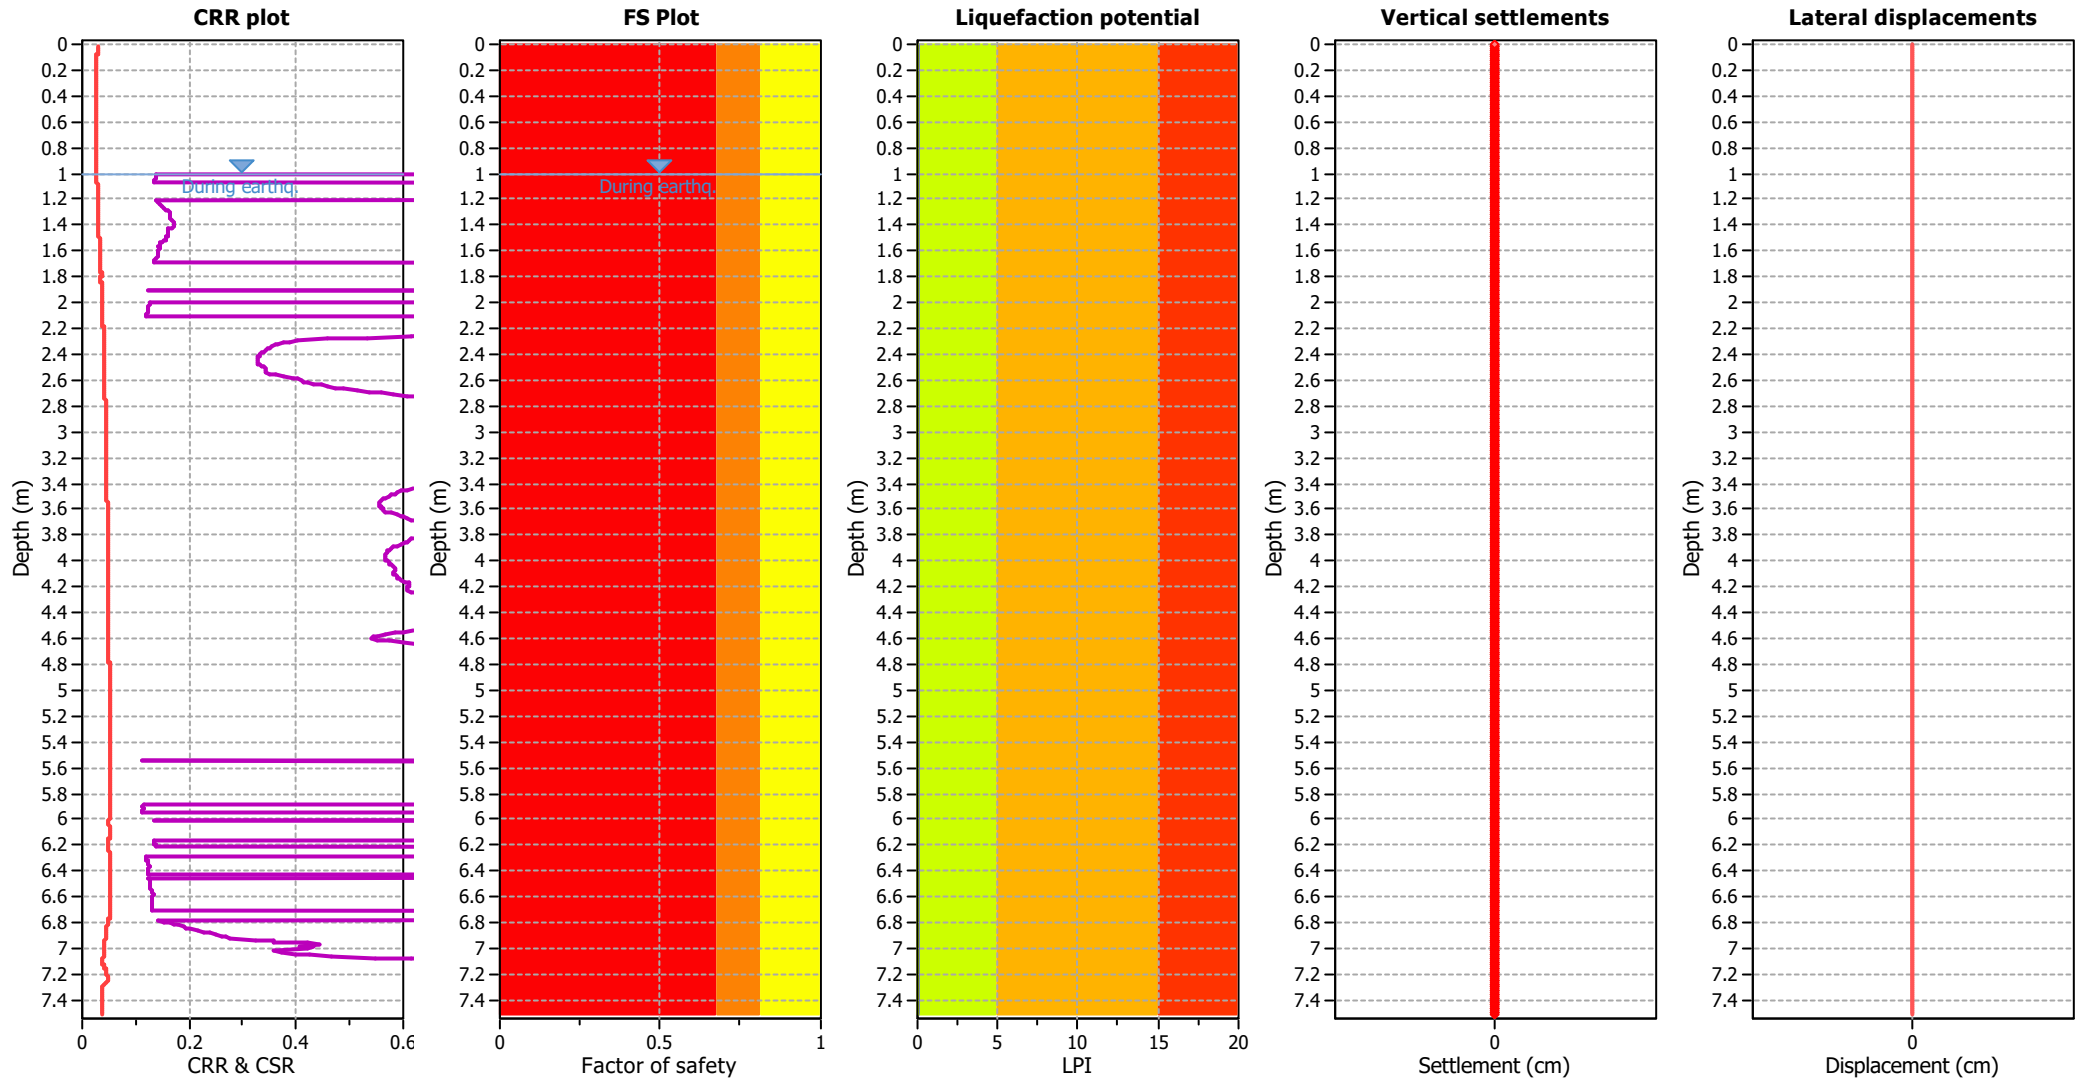

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

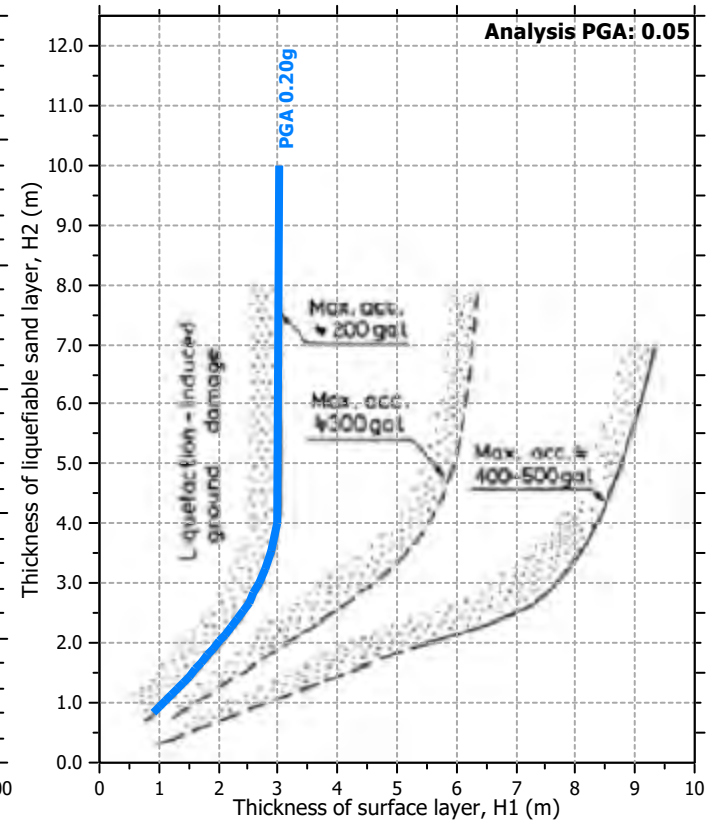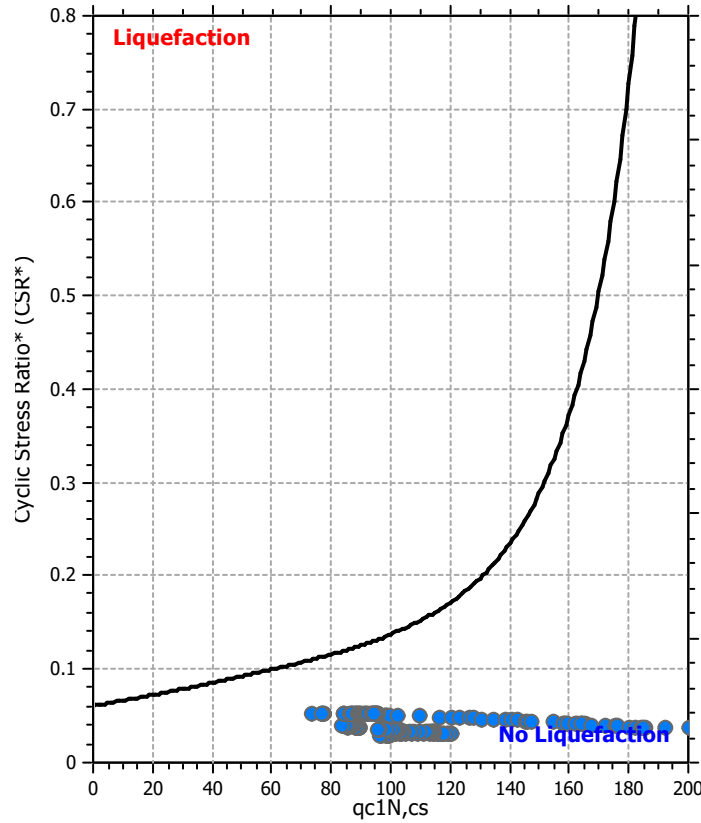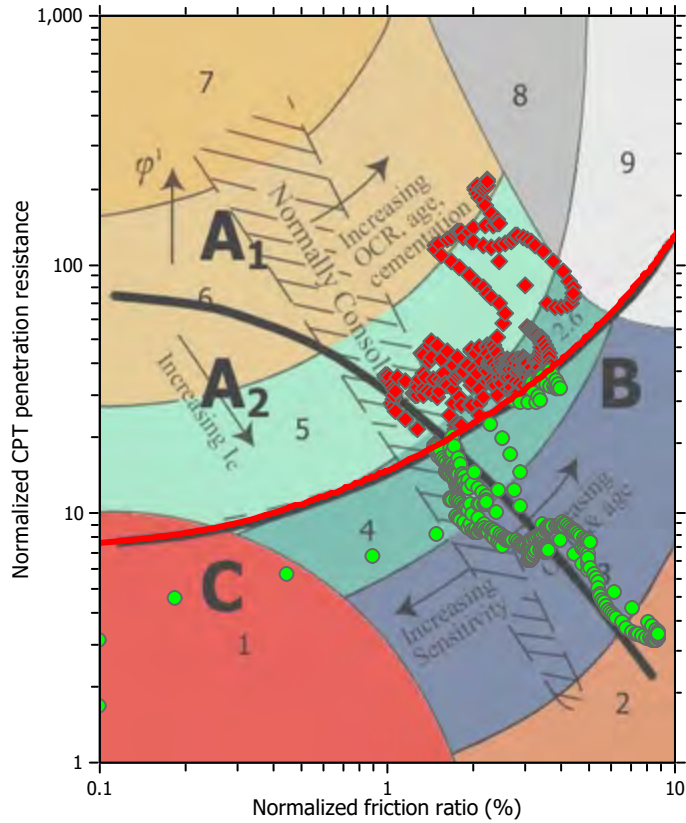

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

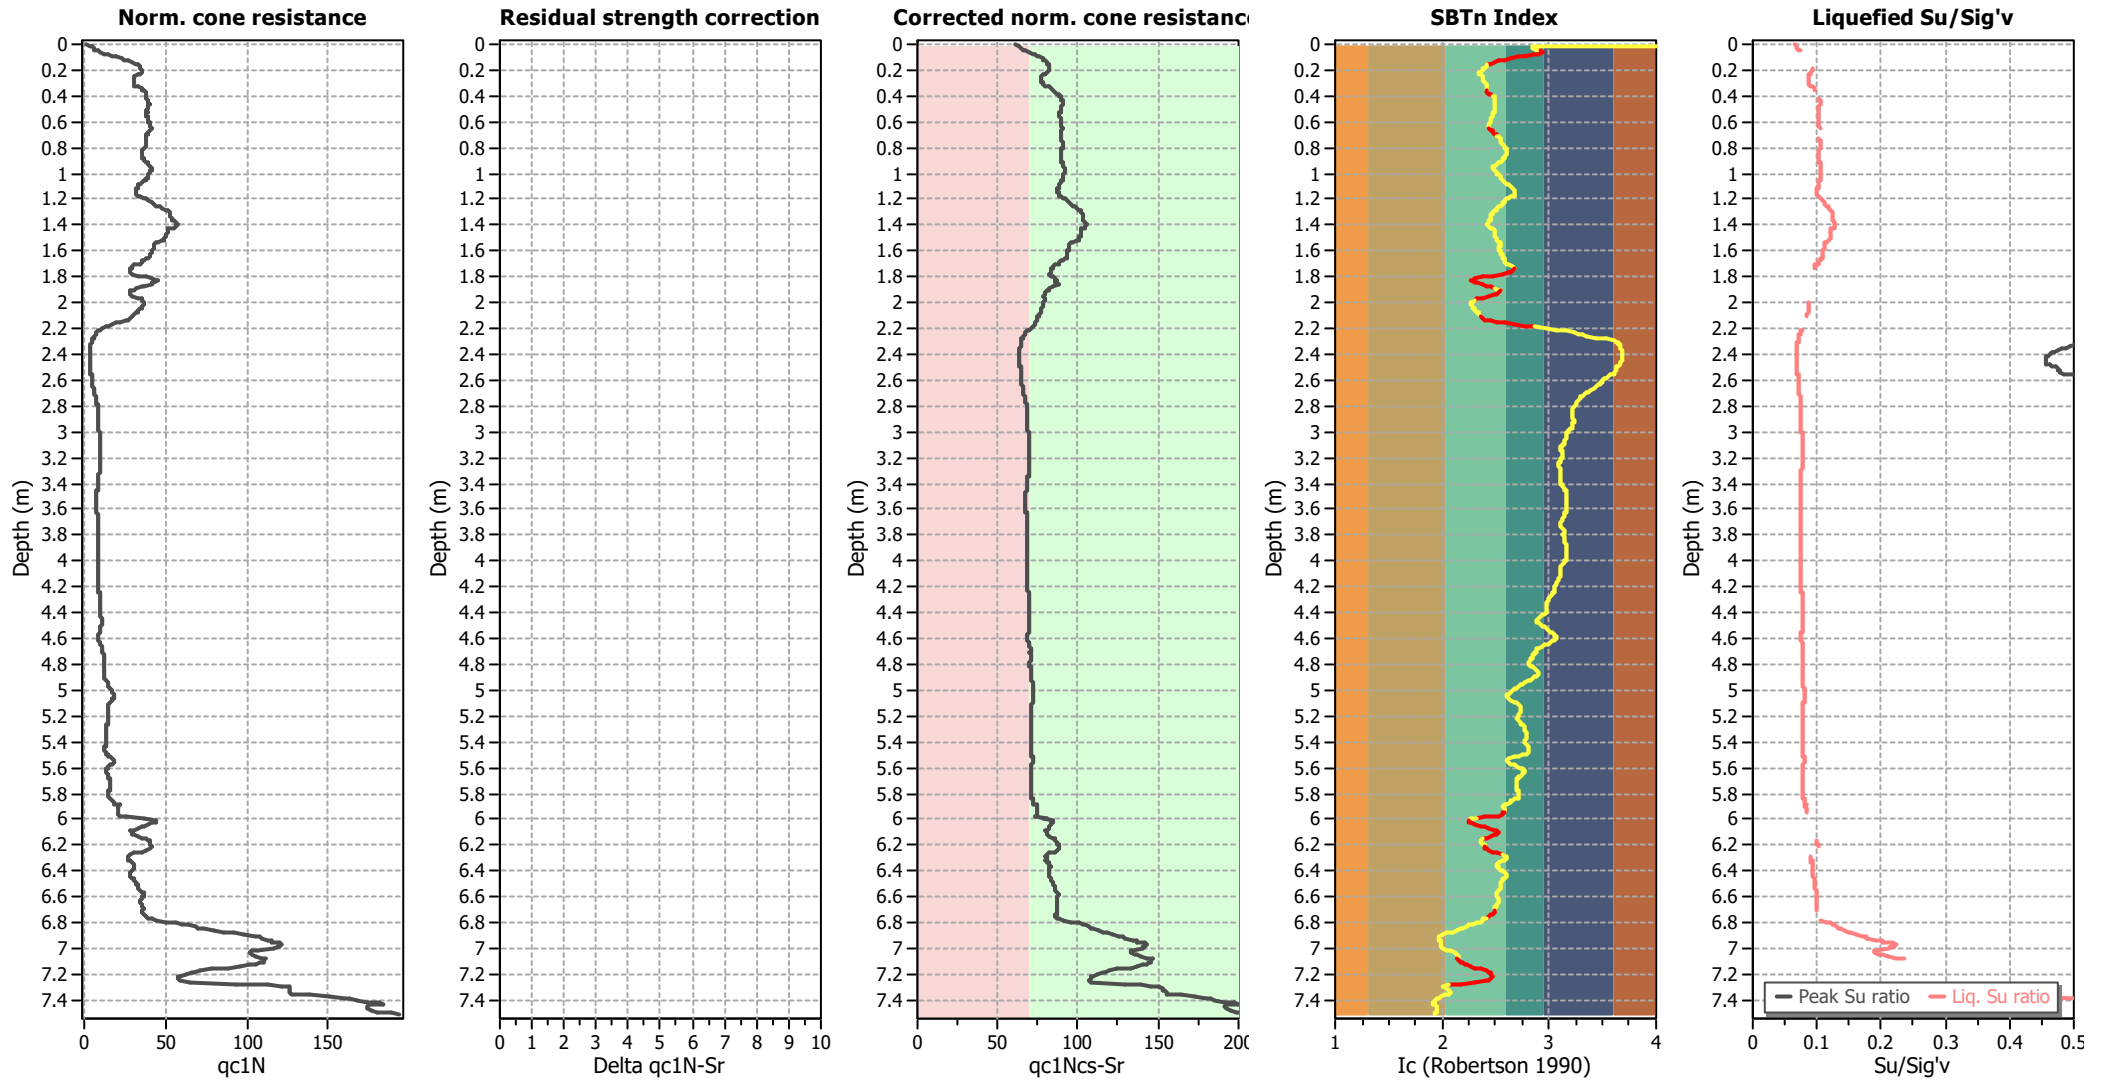

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

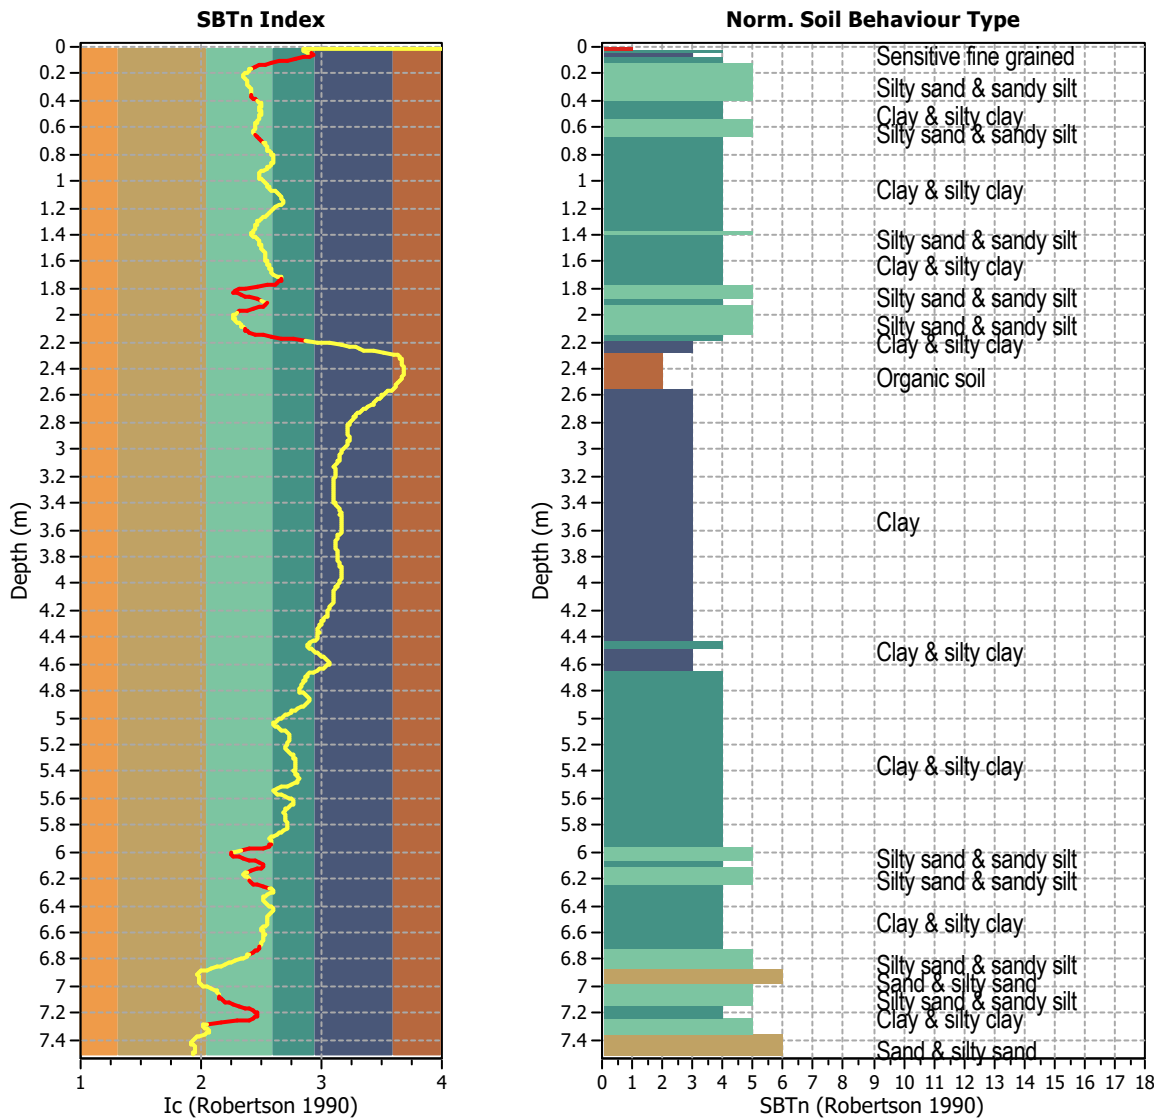


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 752
 Total points excluded: 114
 Exclusion percentage: 15.16%
 Number of layers detected: 14


Estimation of post-earthquake settlements

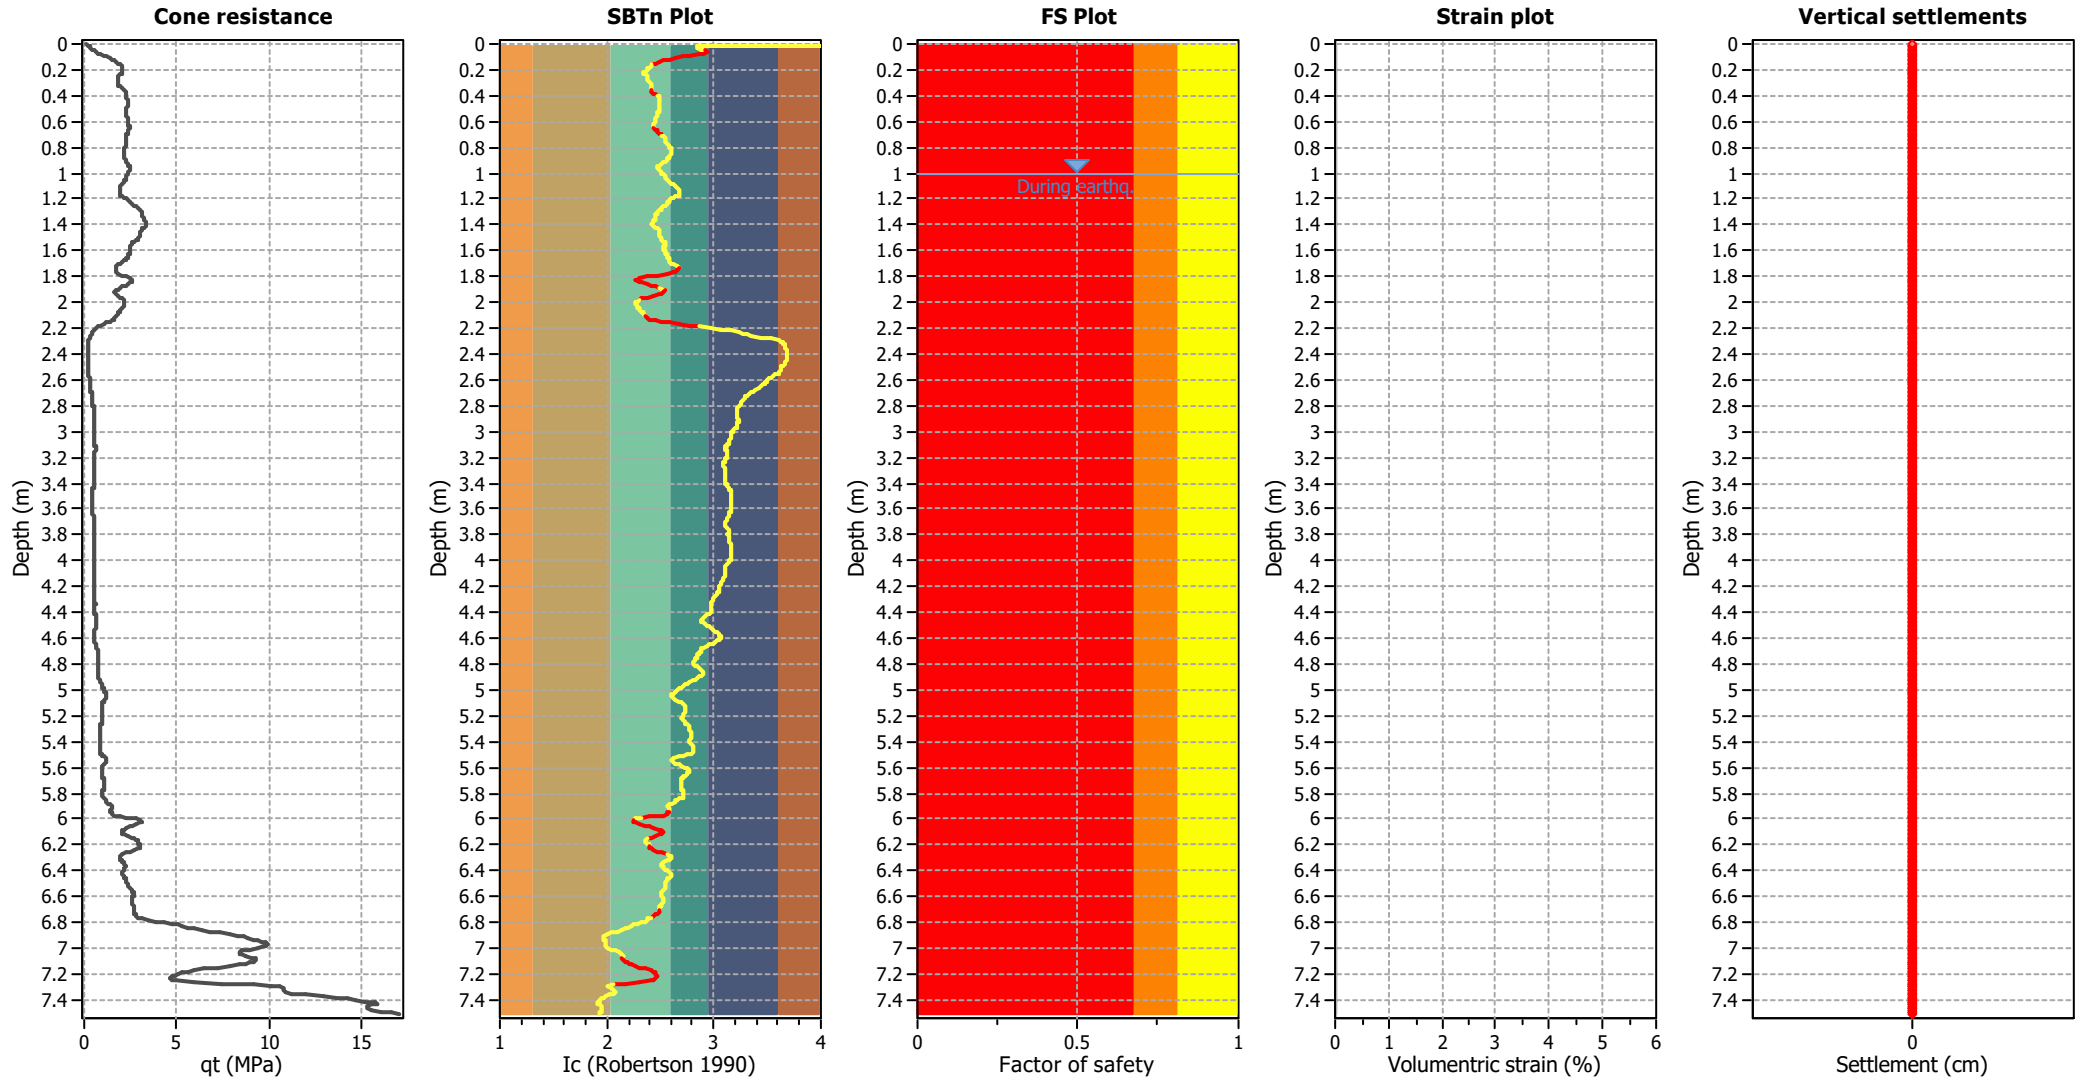

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

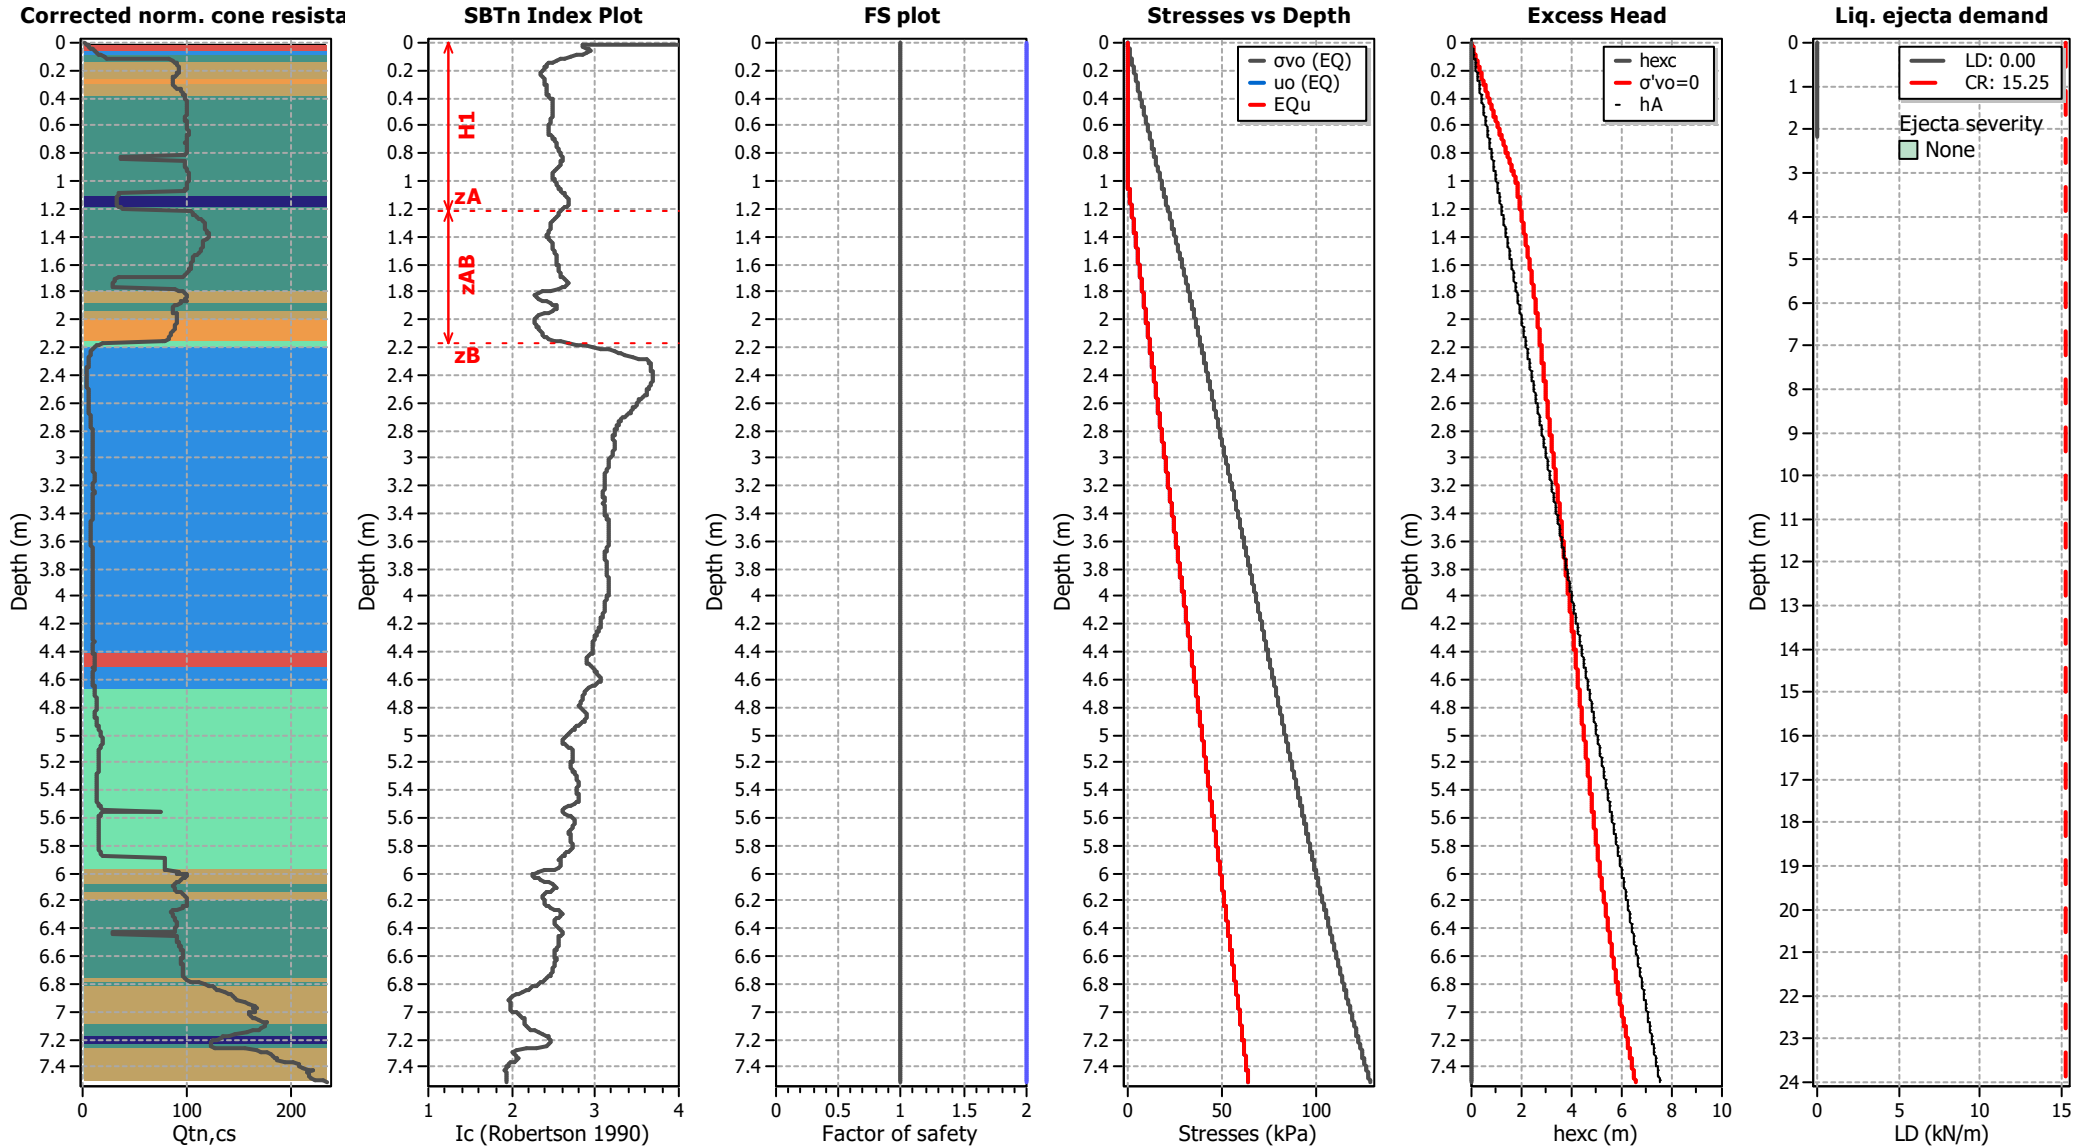

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT04A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

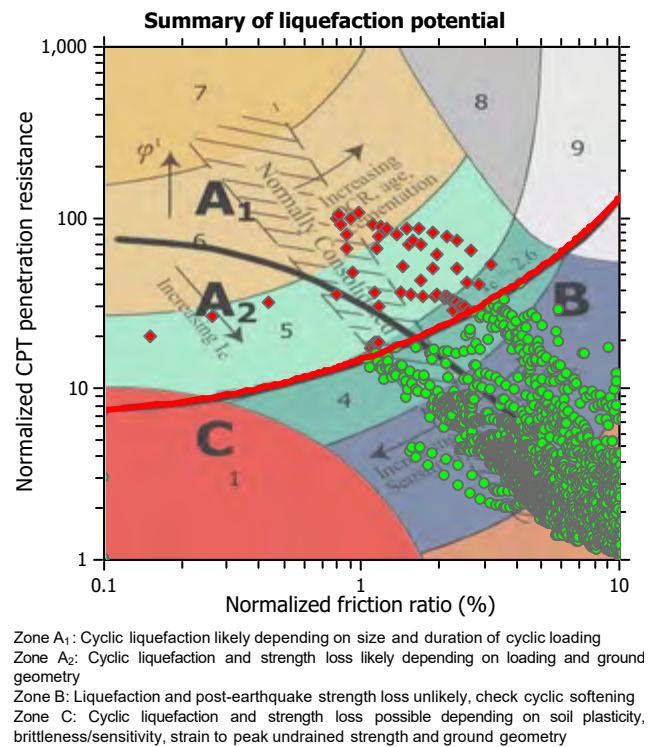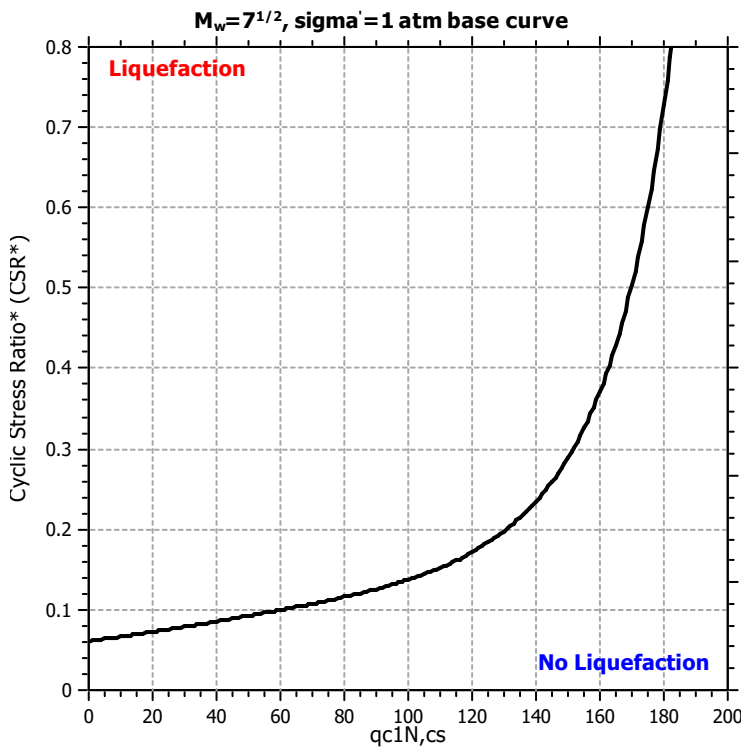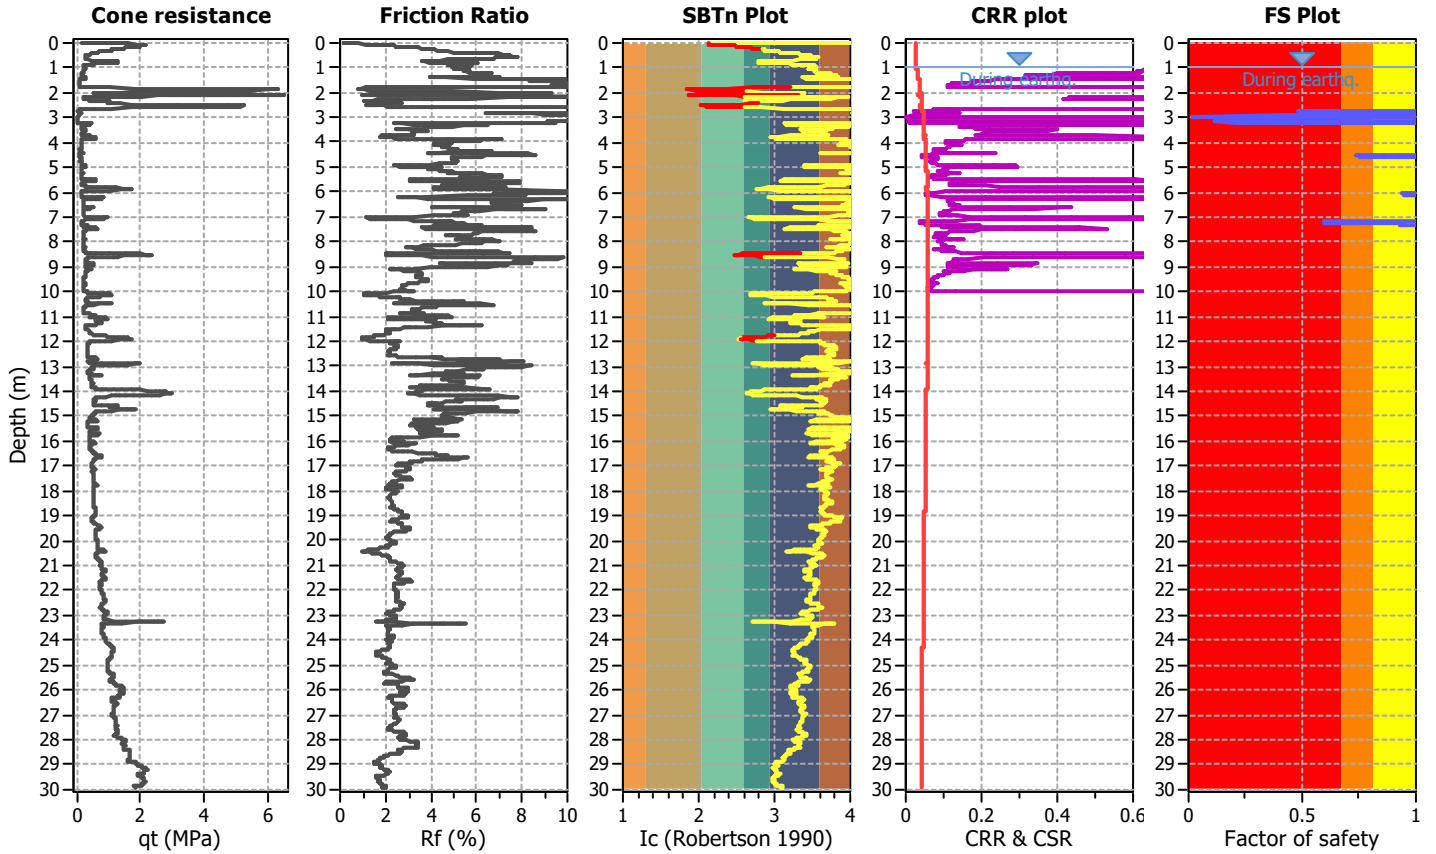

CPT basic interpretation plots

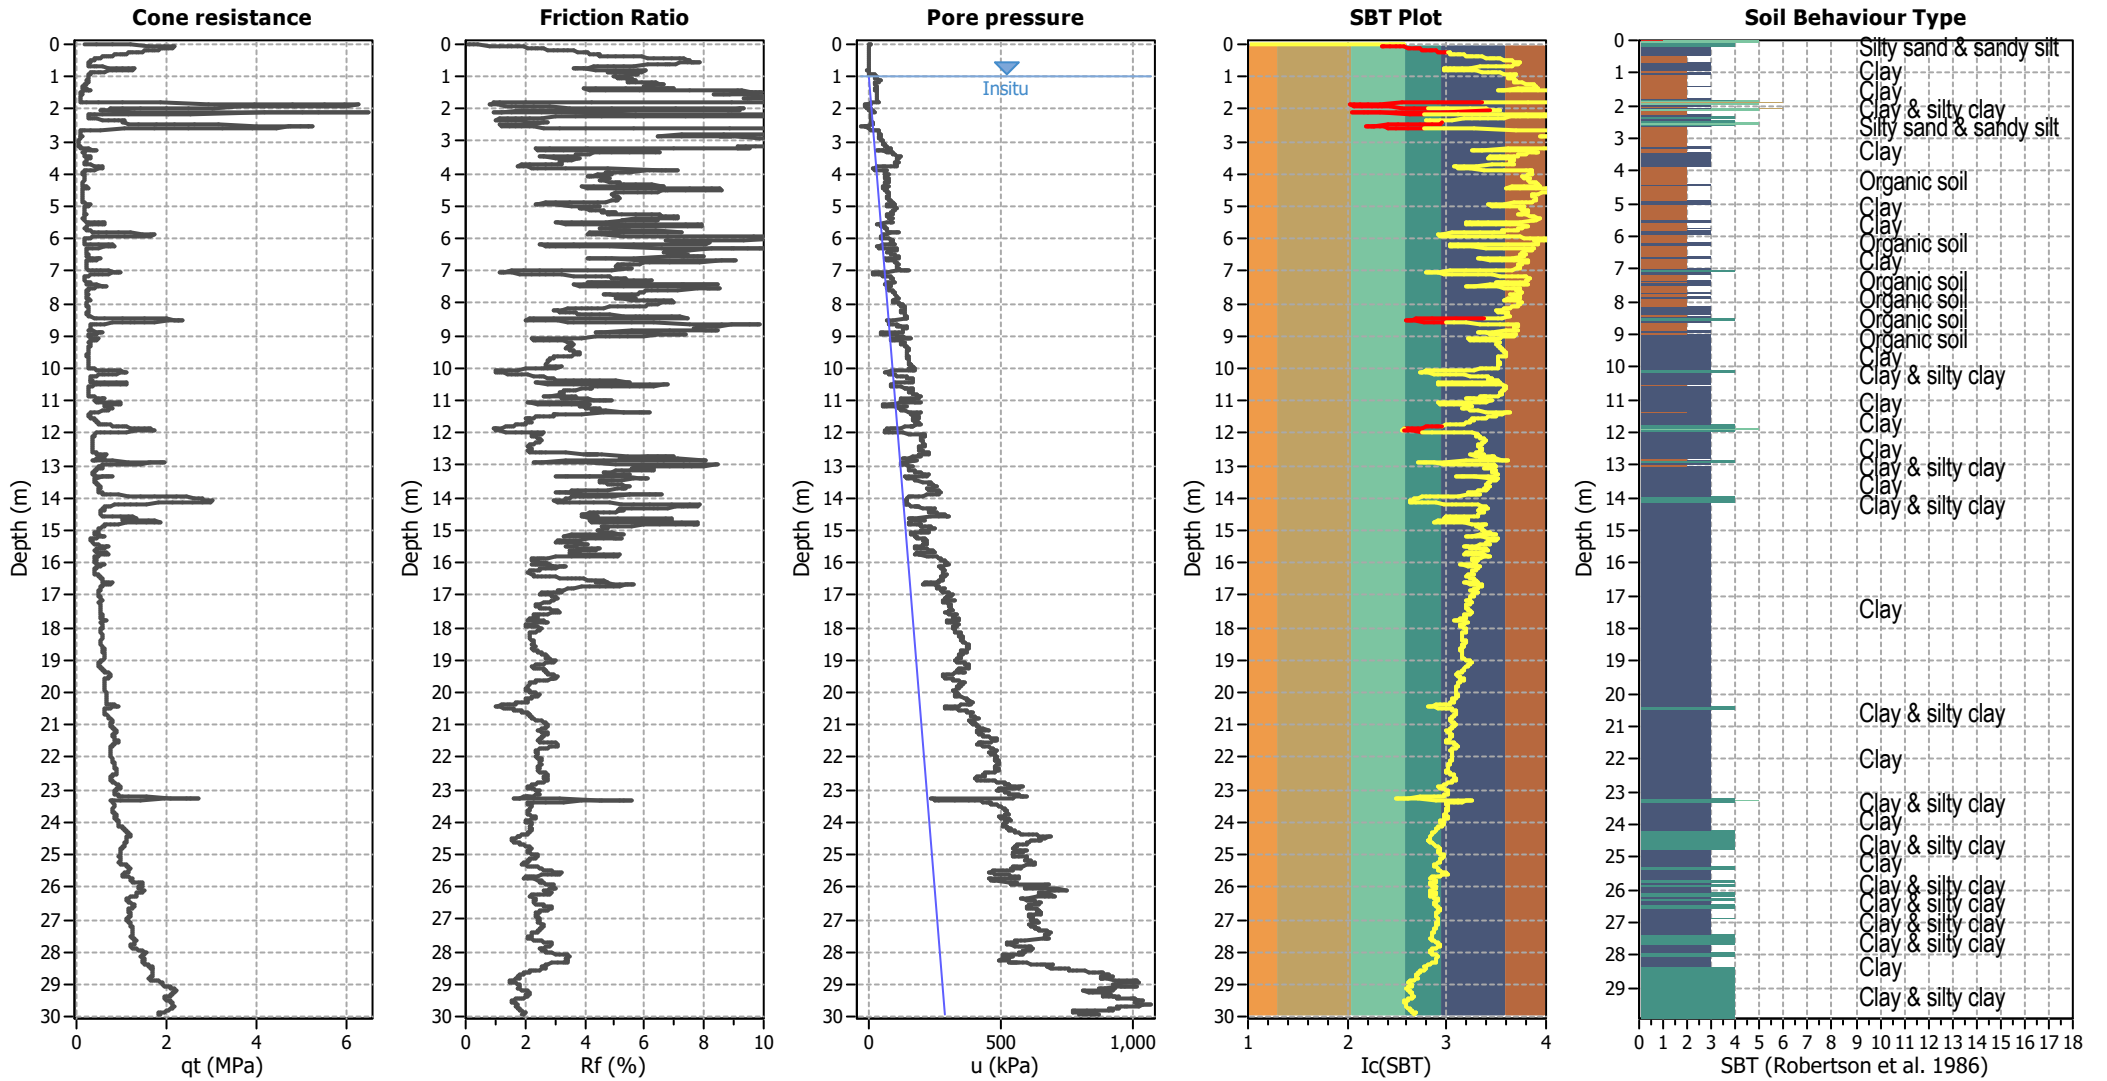


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

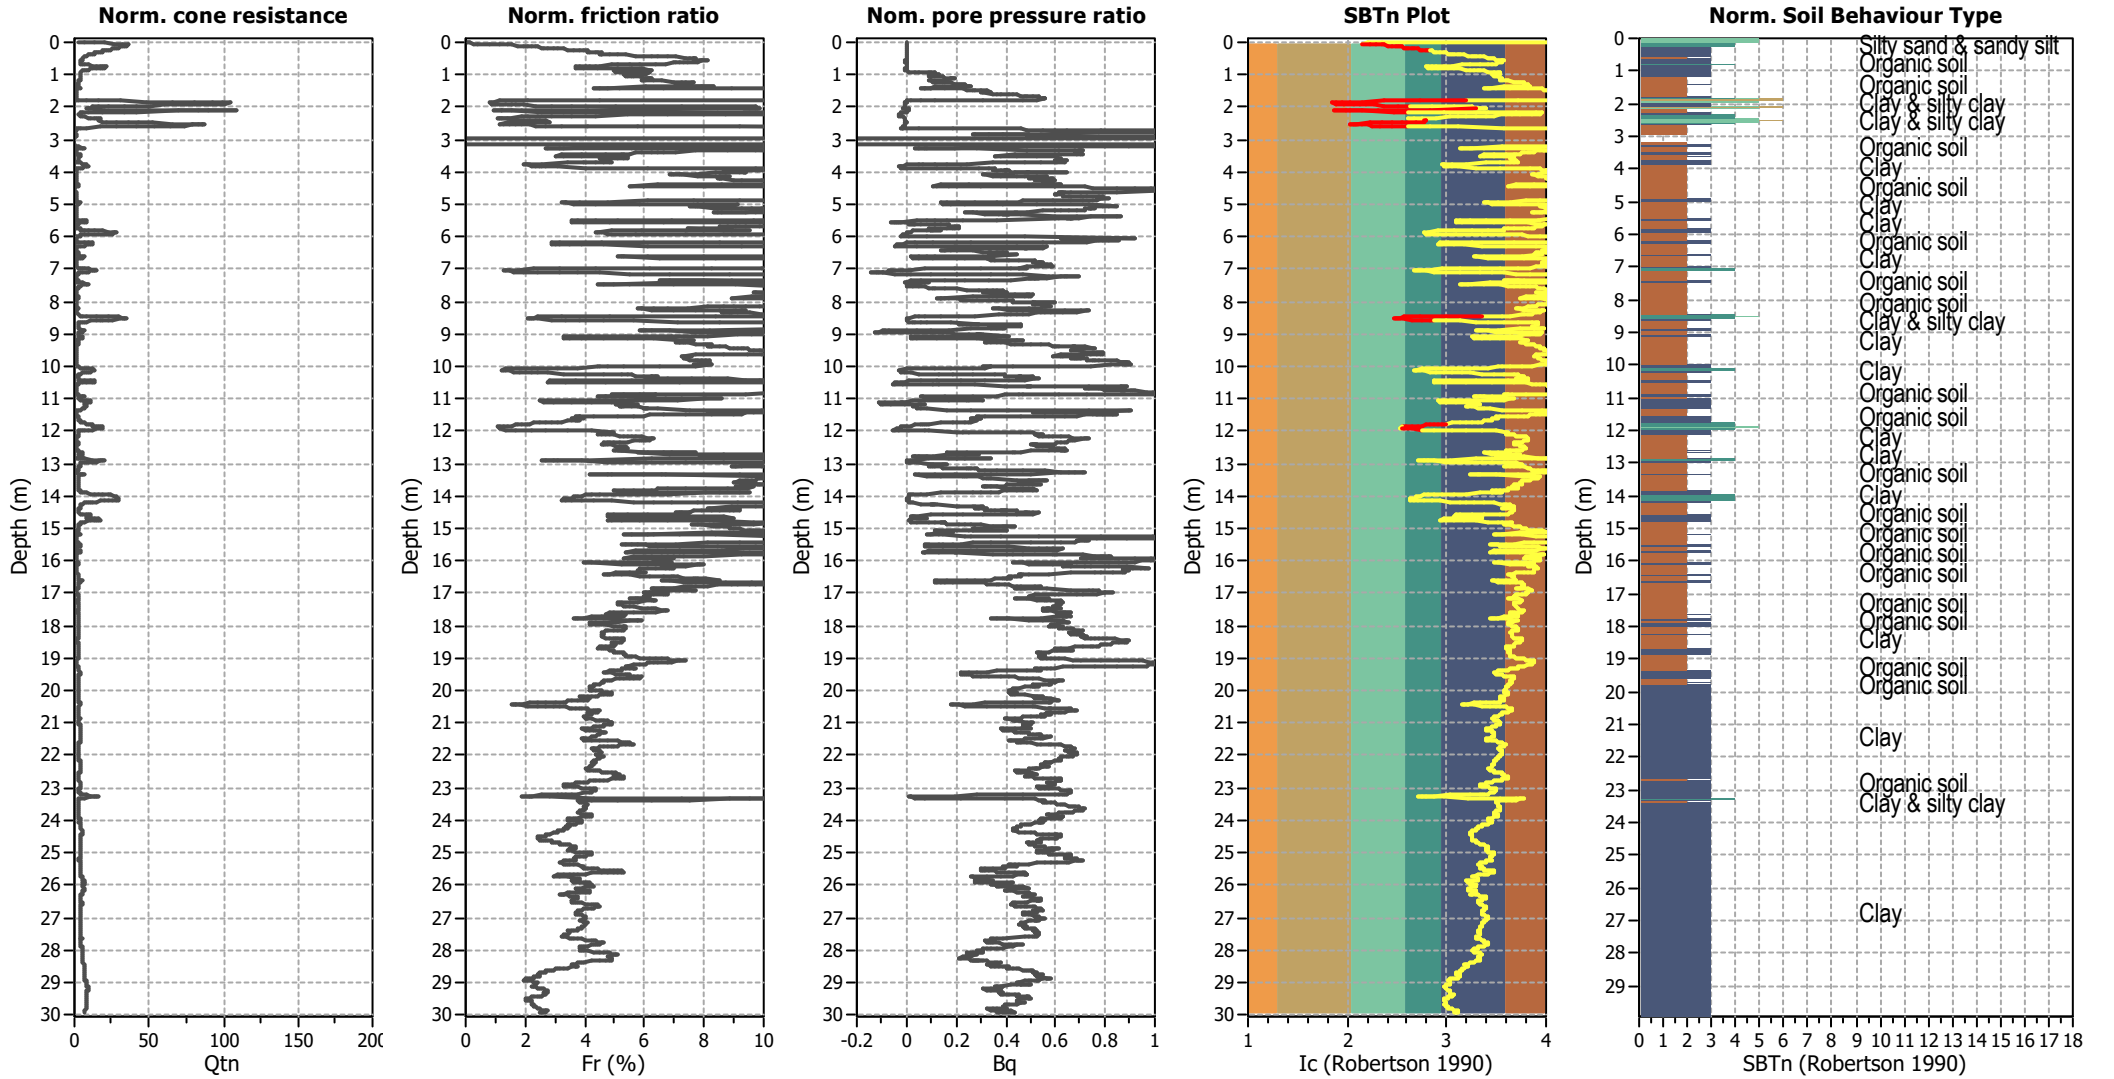


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

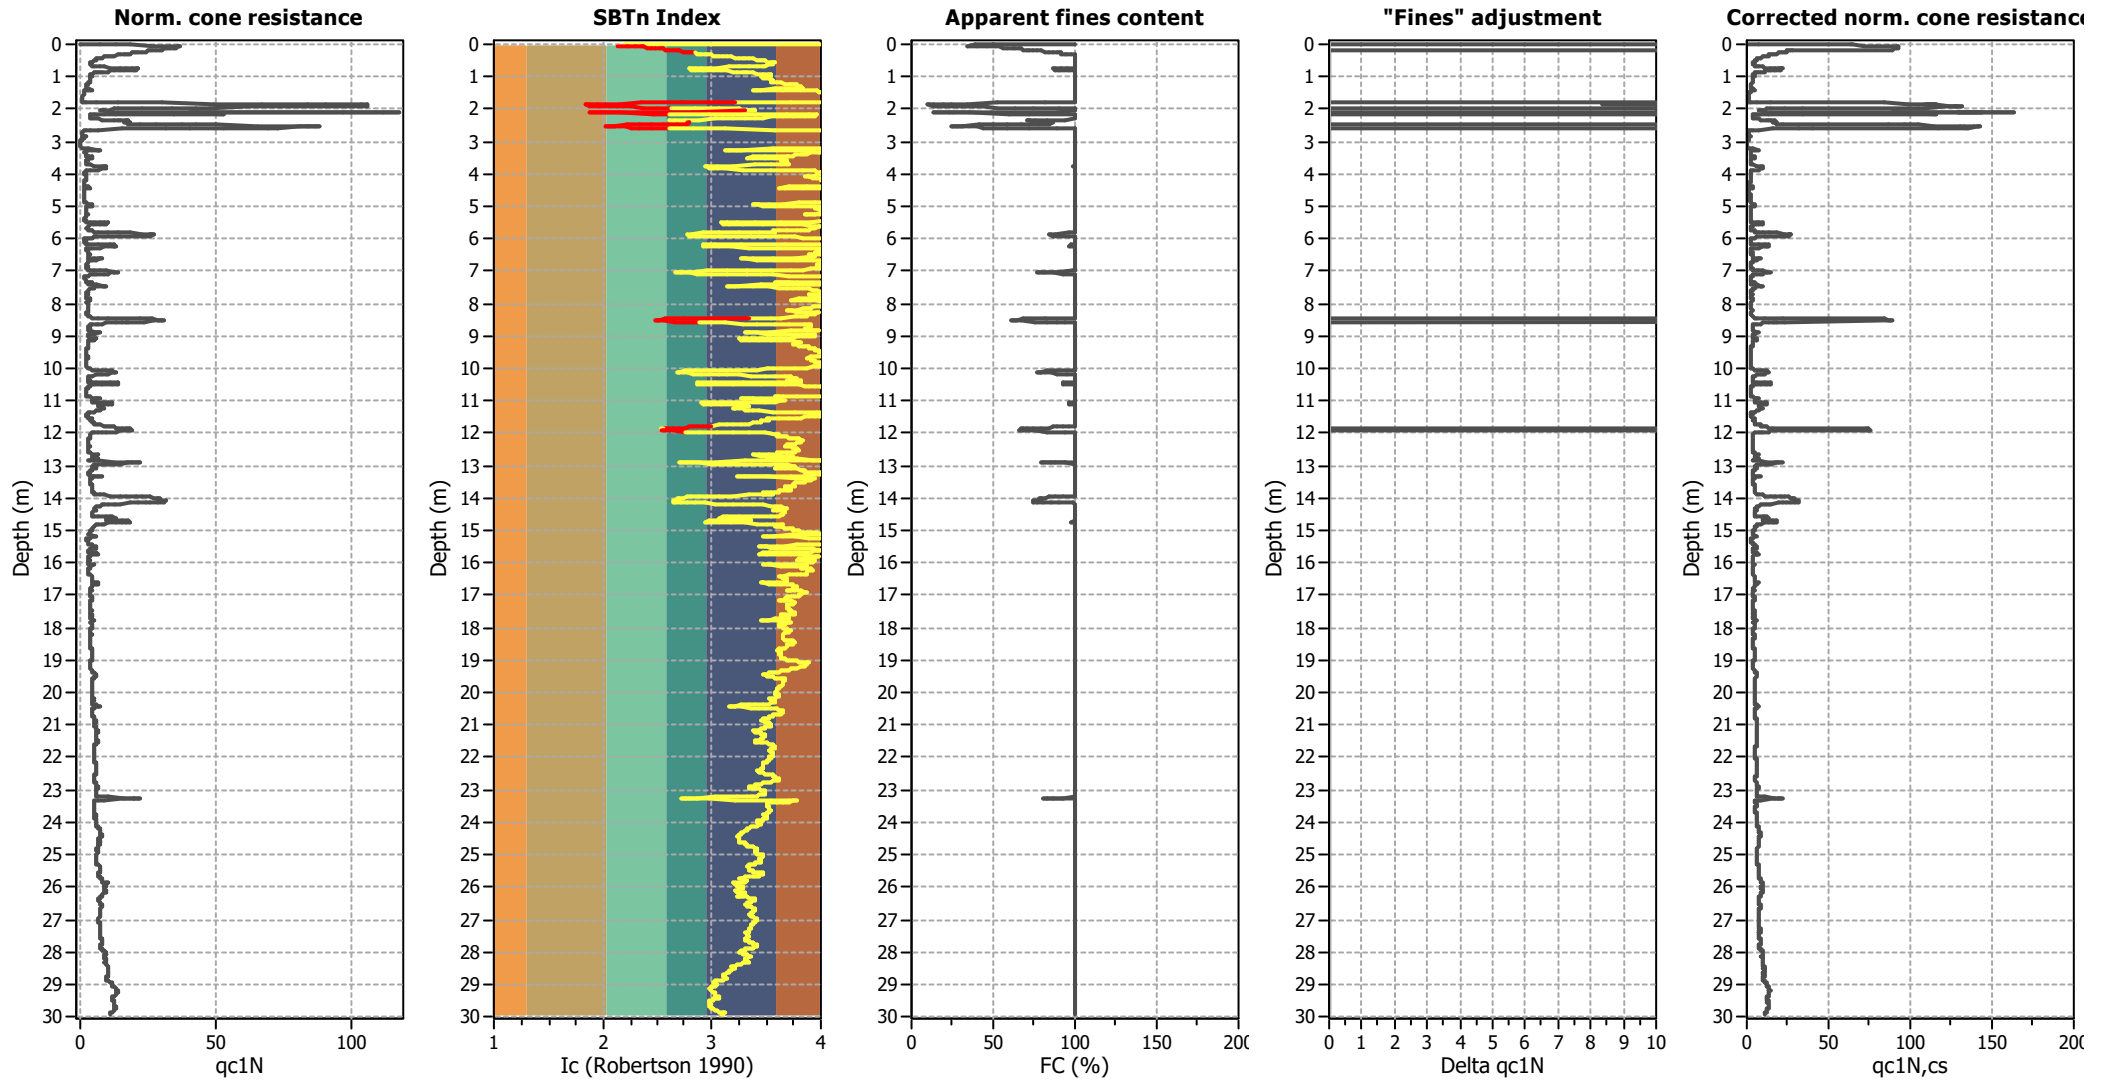

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

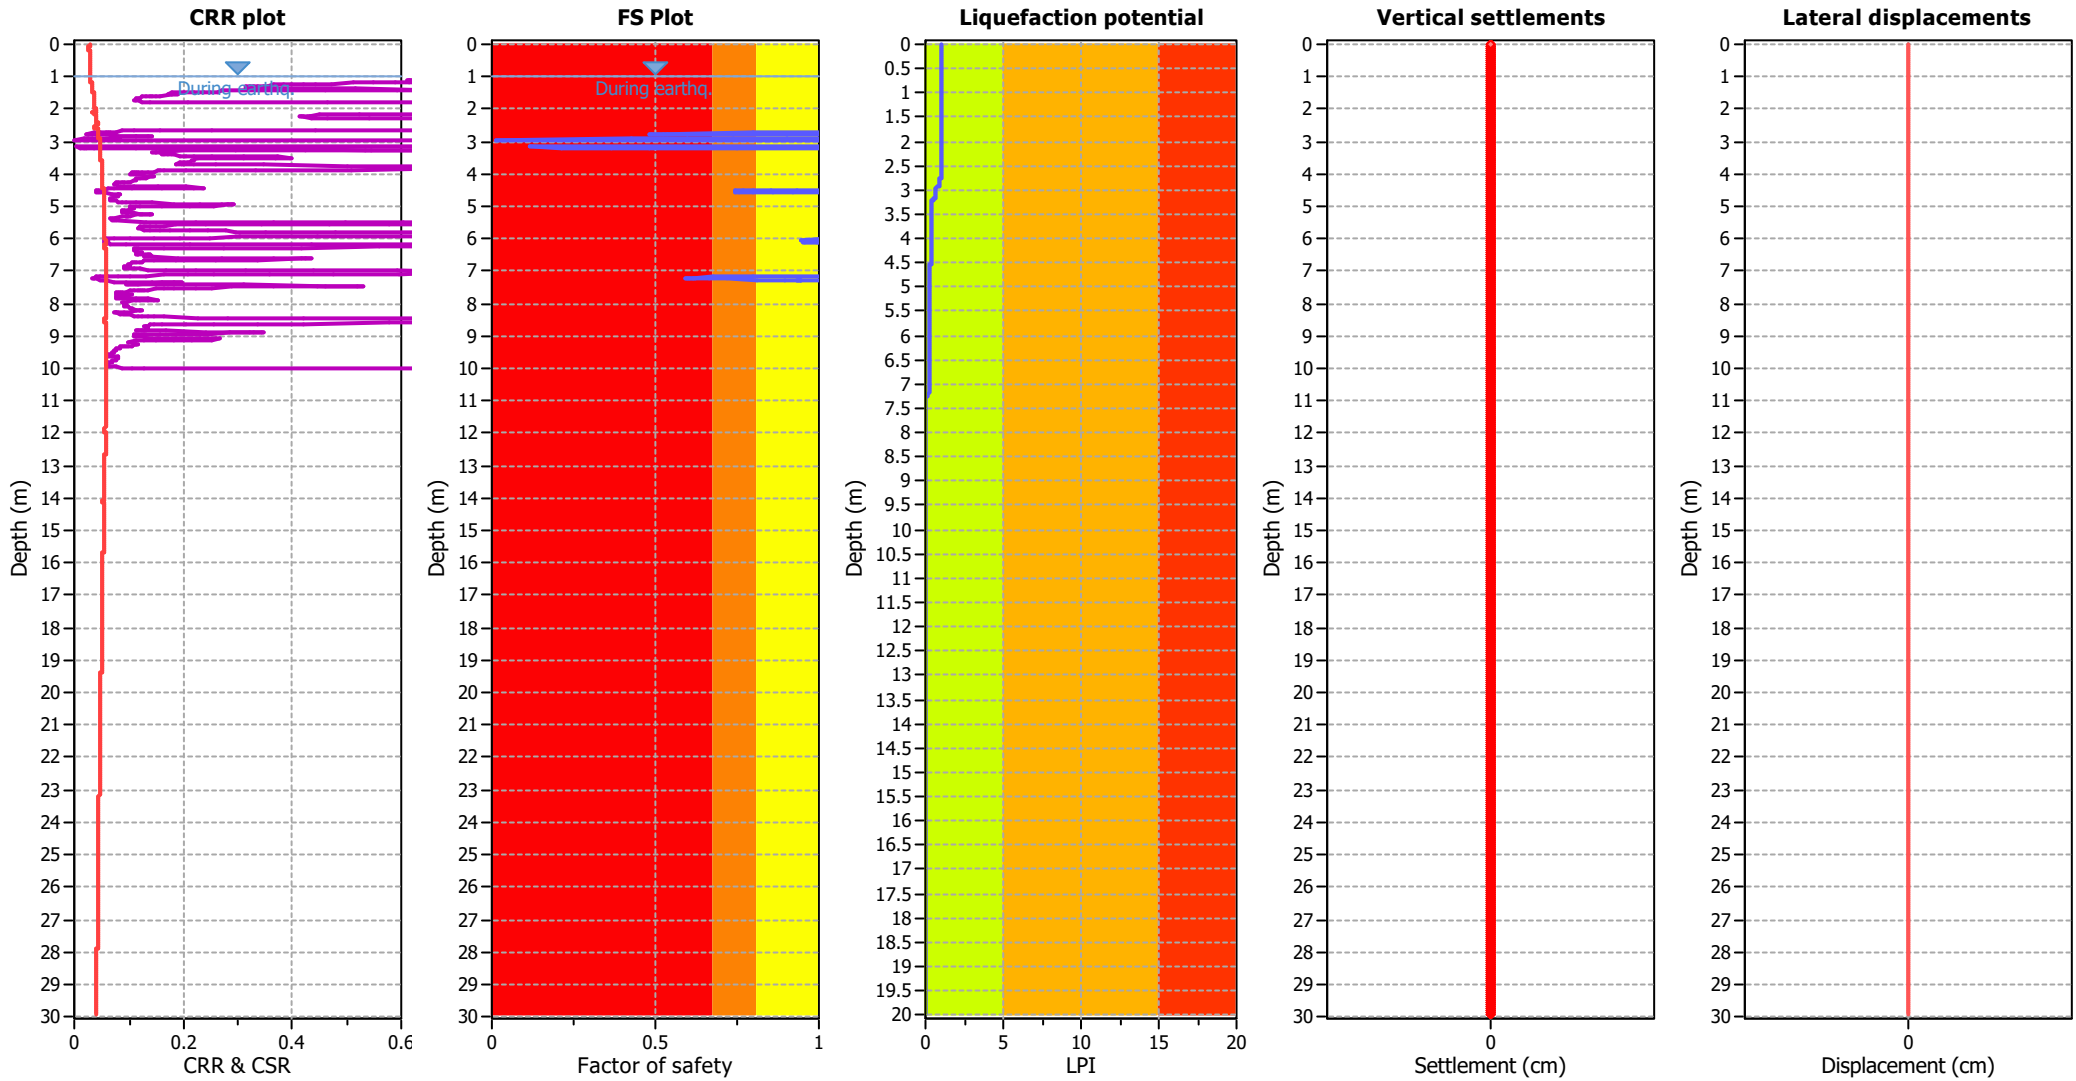

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

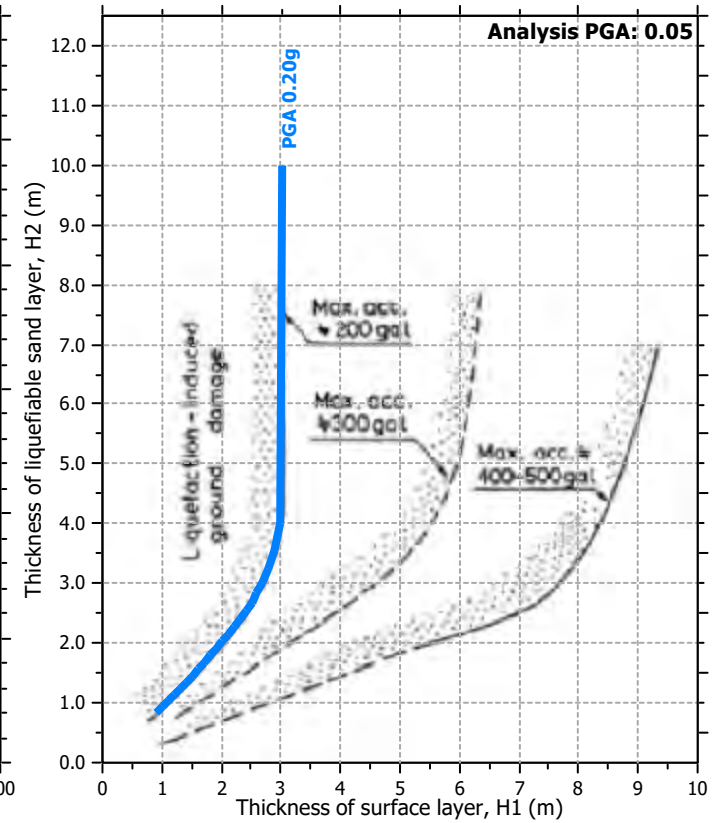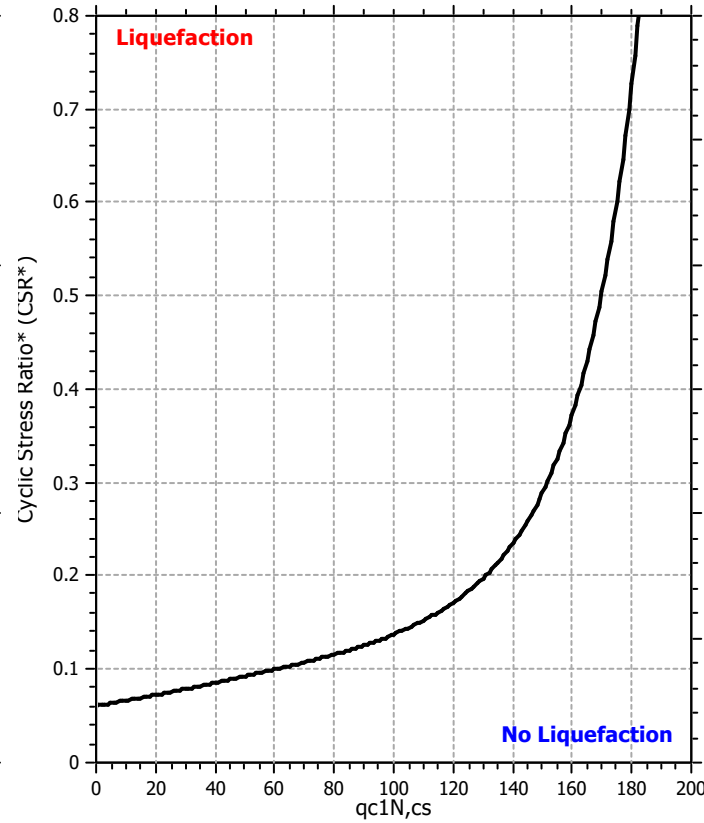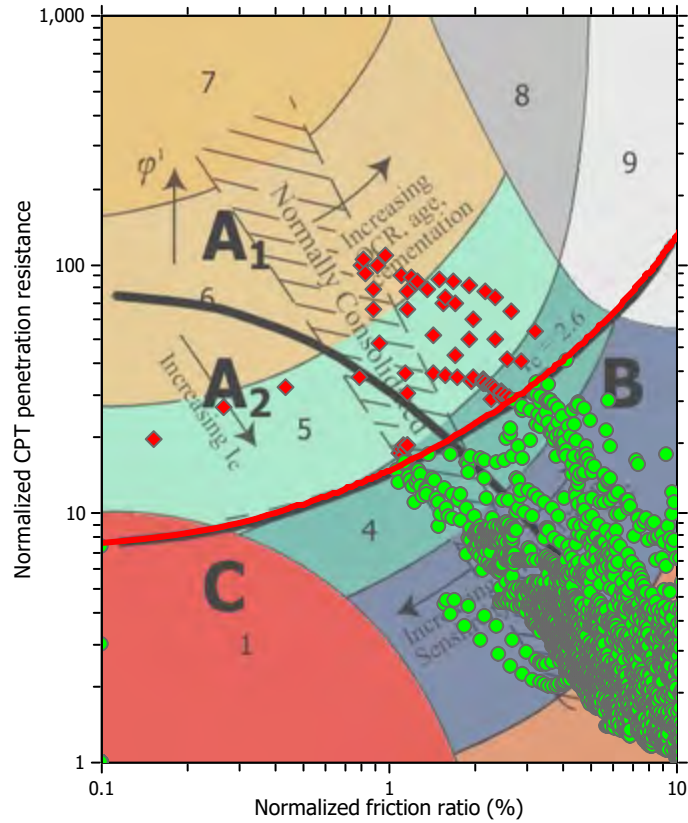

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

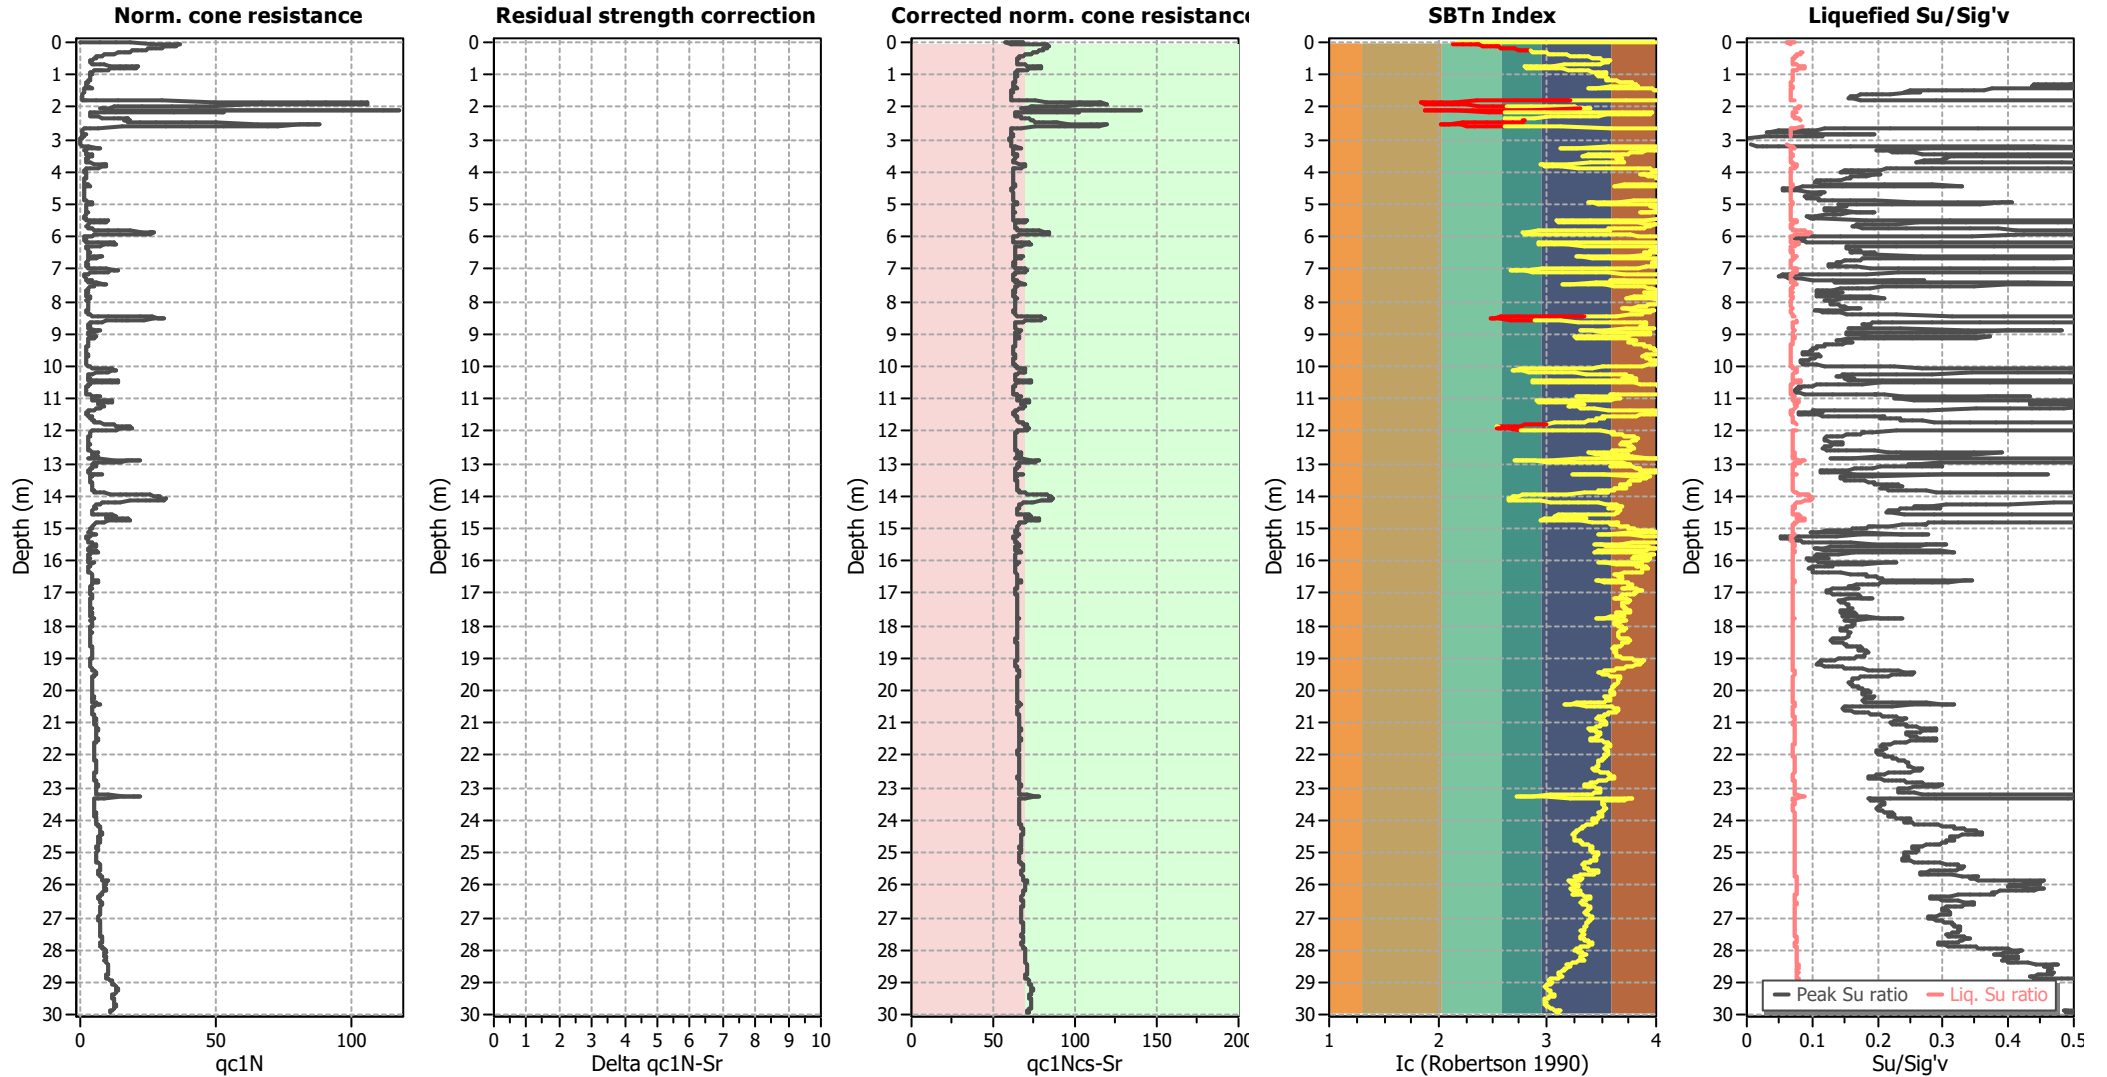

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

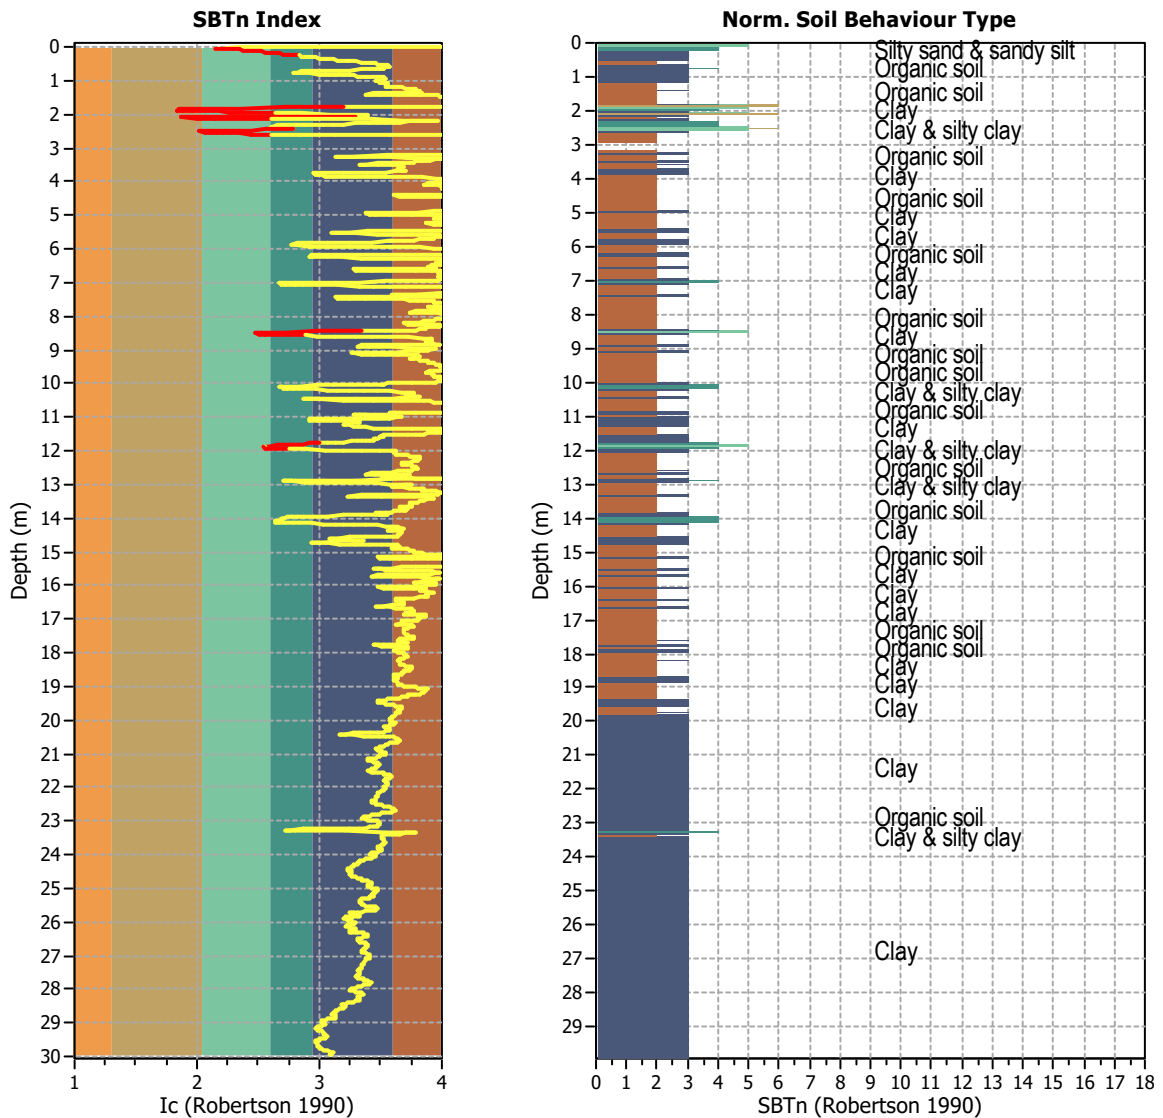


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2994
 Total points excluded: 103
 Exclusion percentage: 3.44%
 Number of layers detected: 11

Estimation of post-earthquake settlements

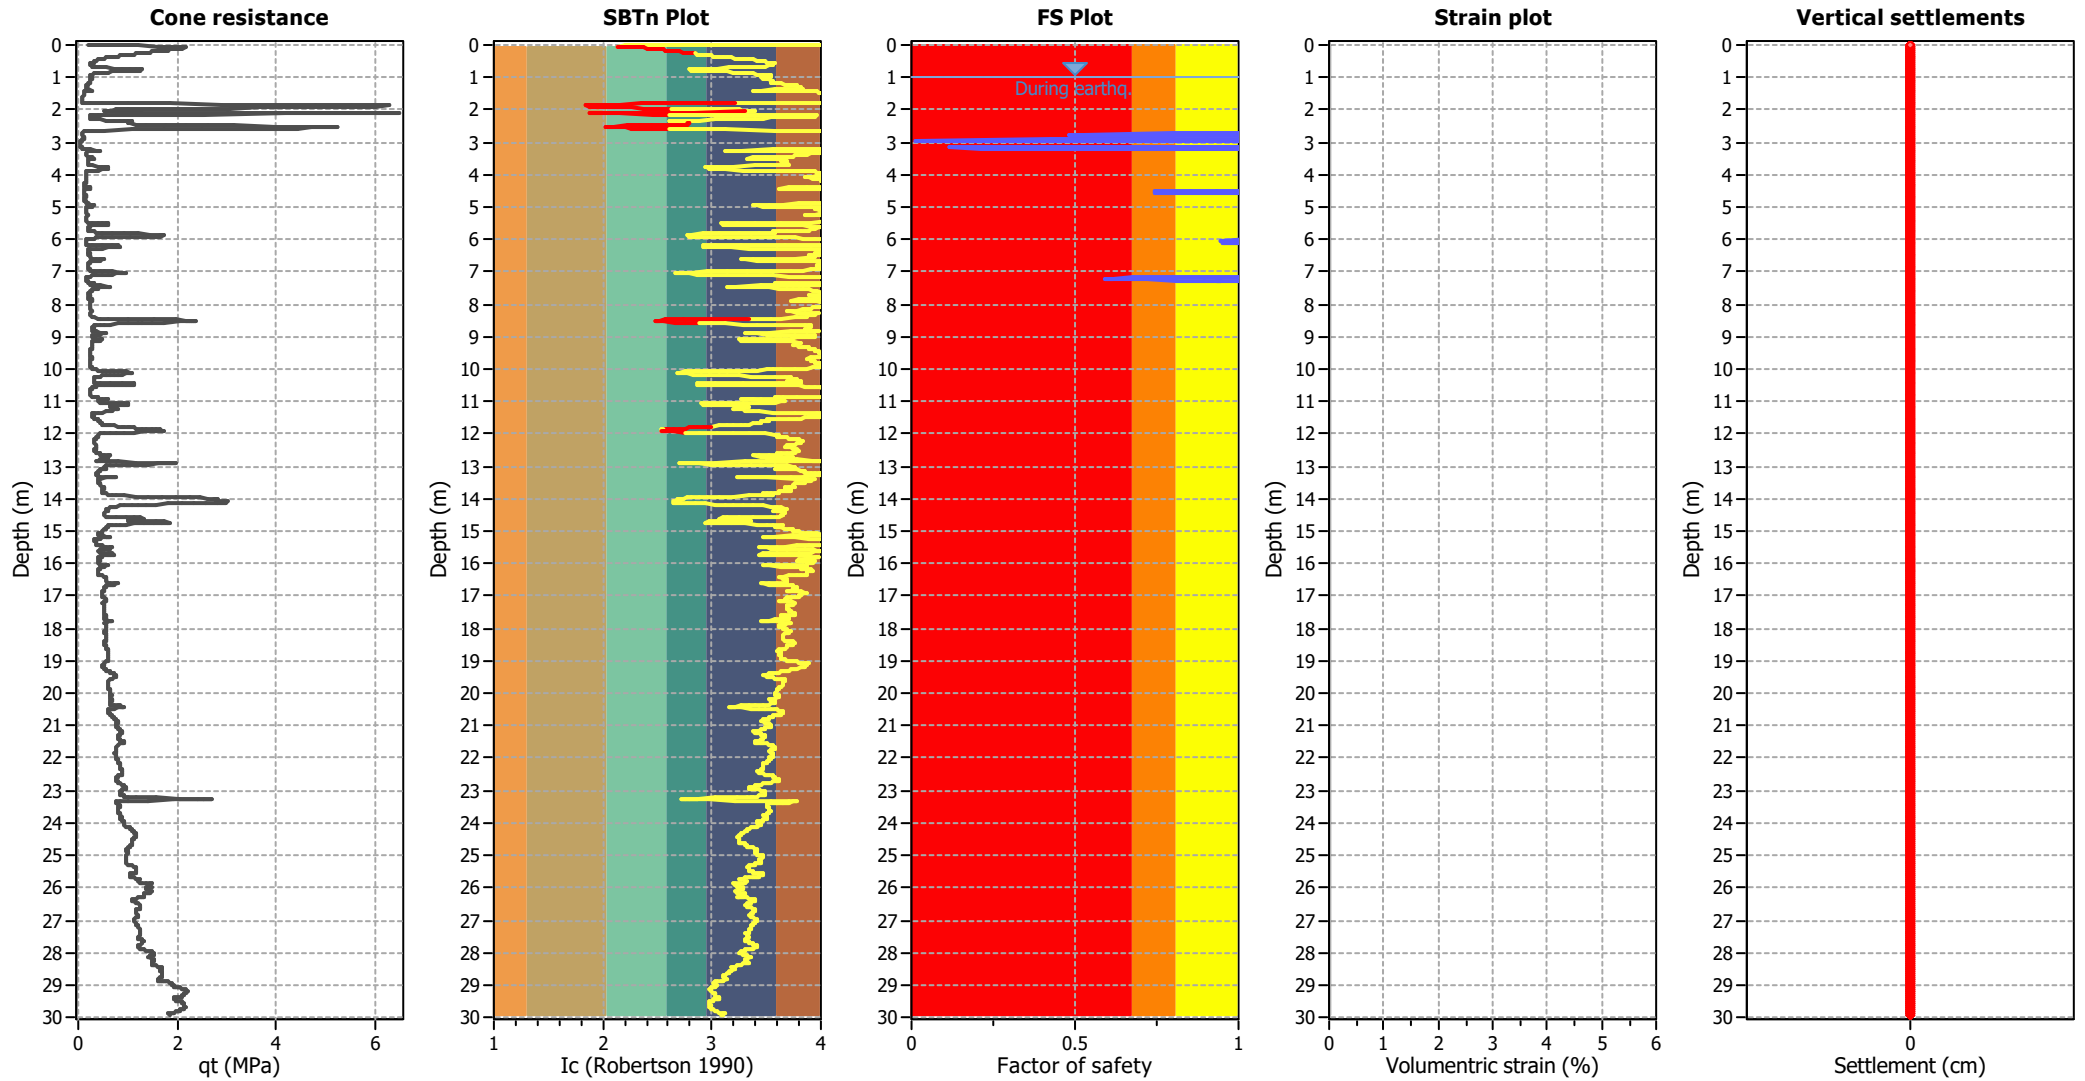


Abbreviations


- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation


Corrected norm. cone resista

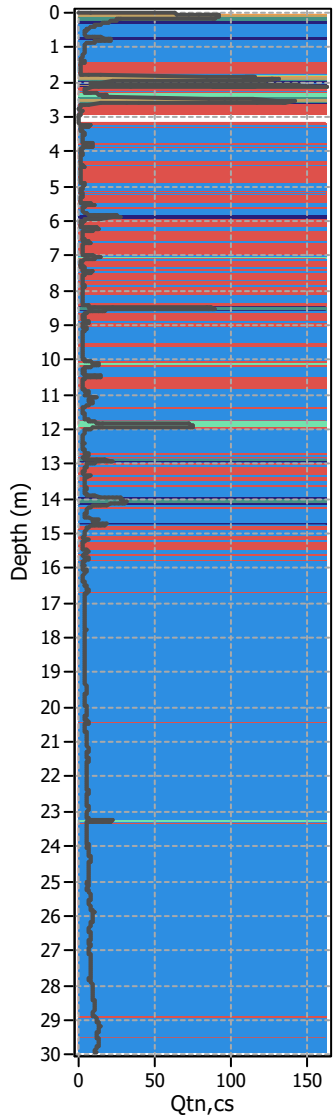


SBTn Index Plot

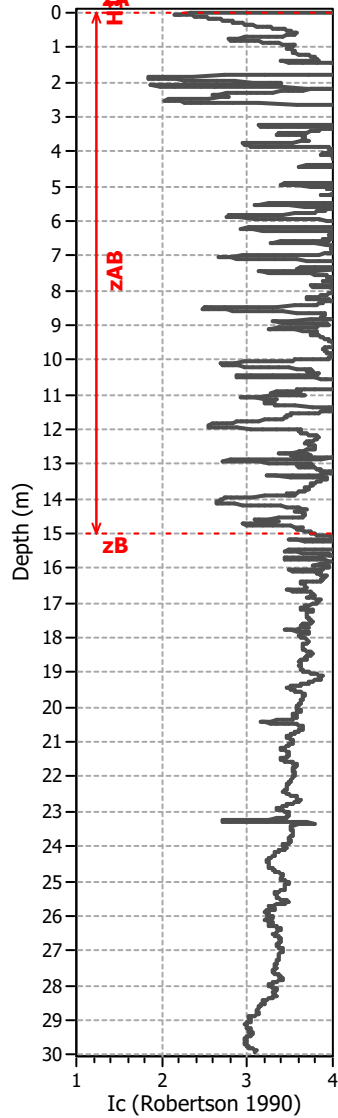


FS plot

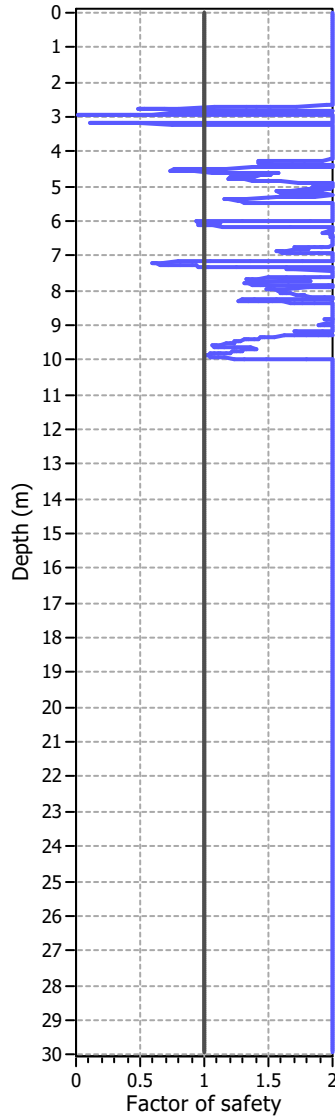


Stresses vs Depth

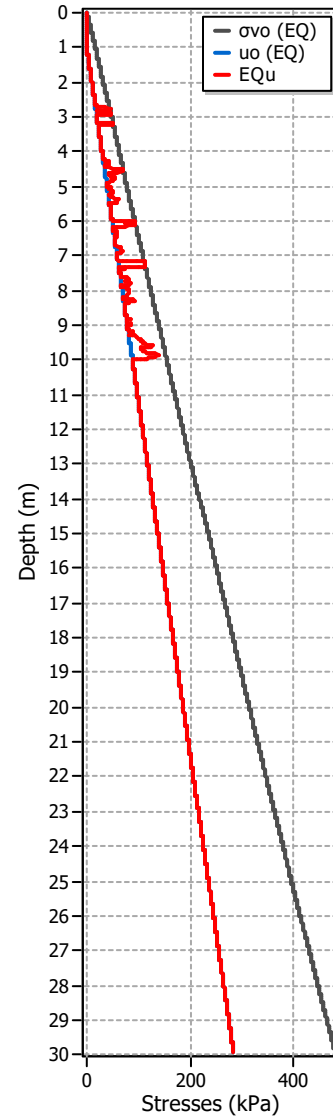

Excess Head

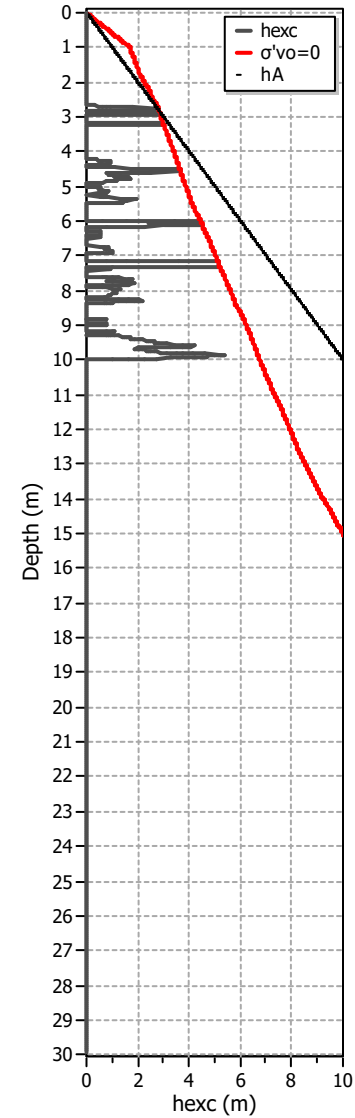

Liq. ejecta demand

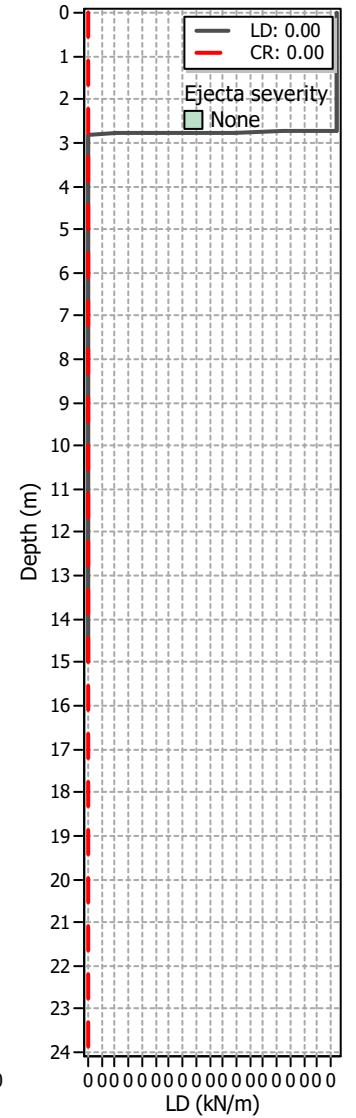

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT05

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

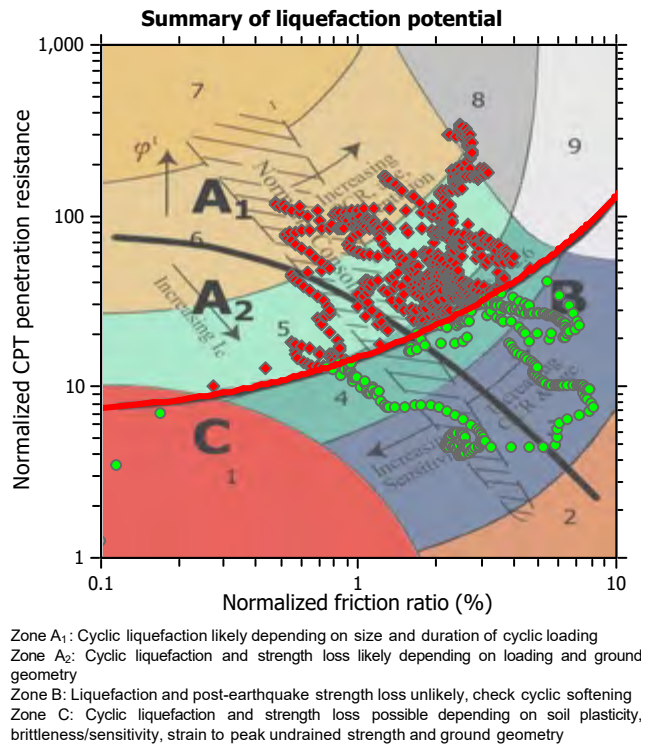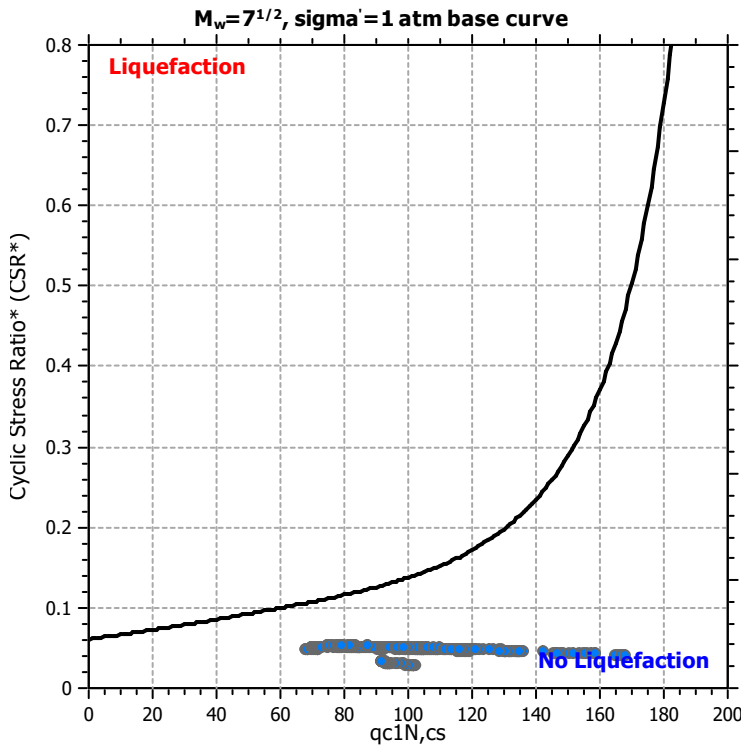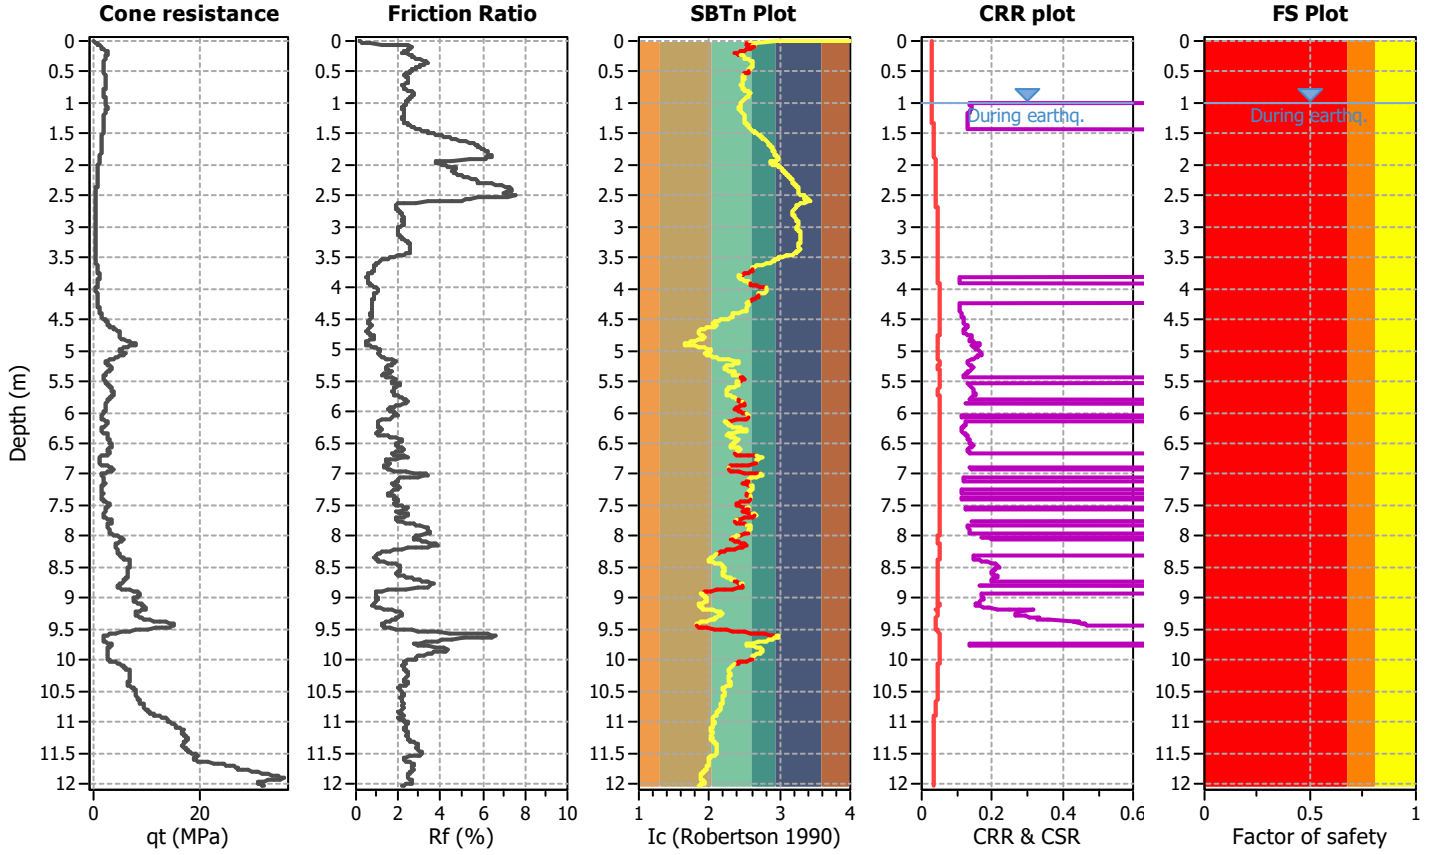

CPT basic interpretation plots

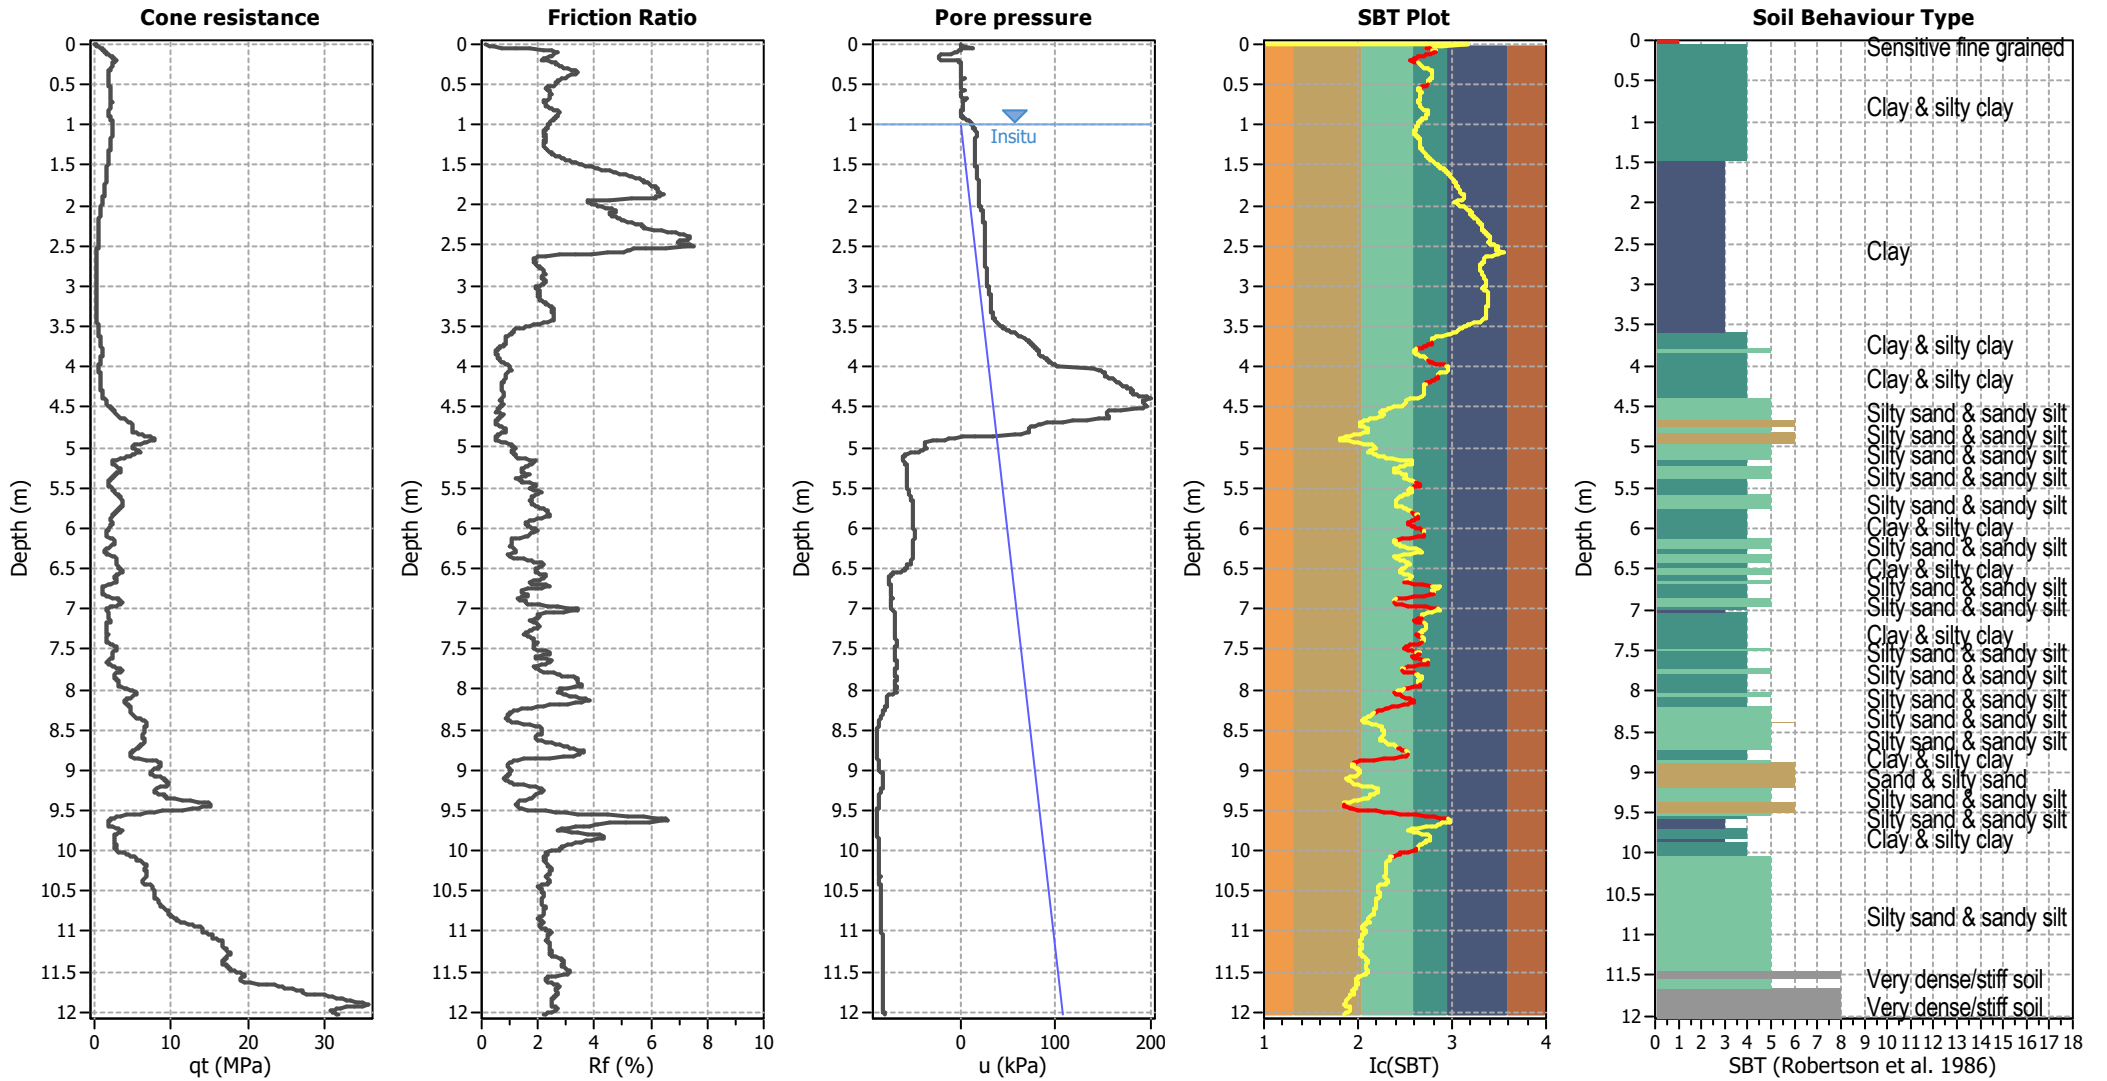


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

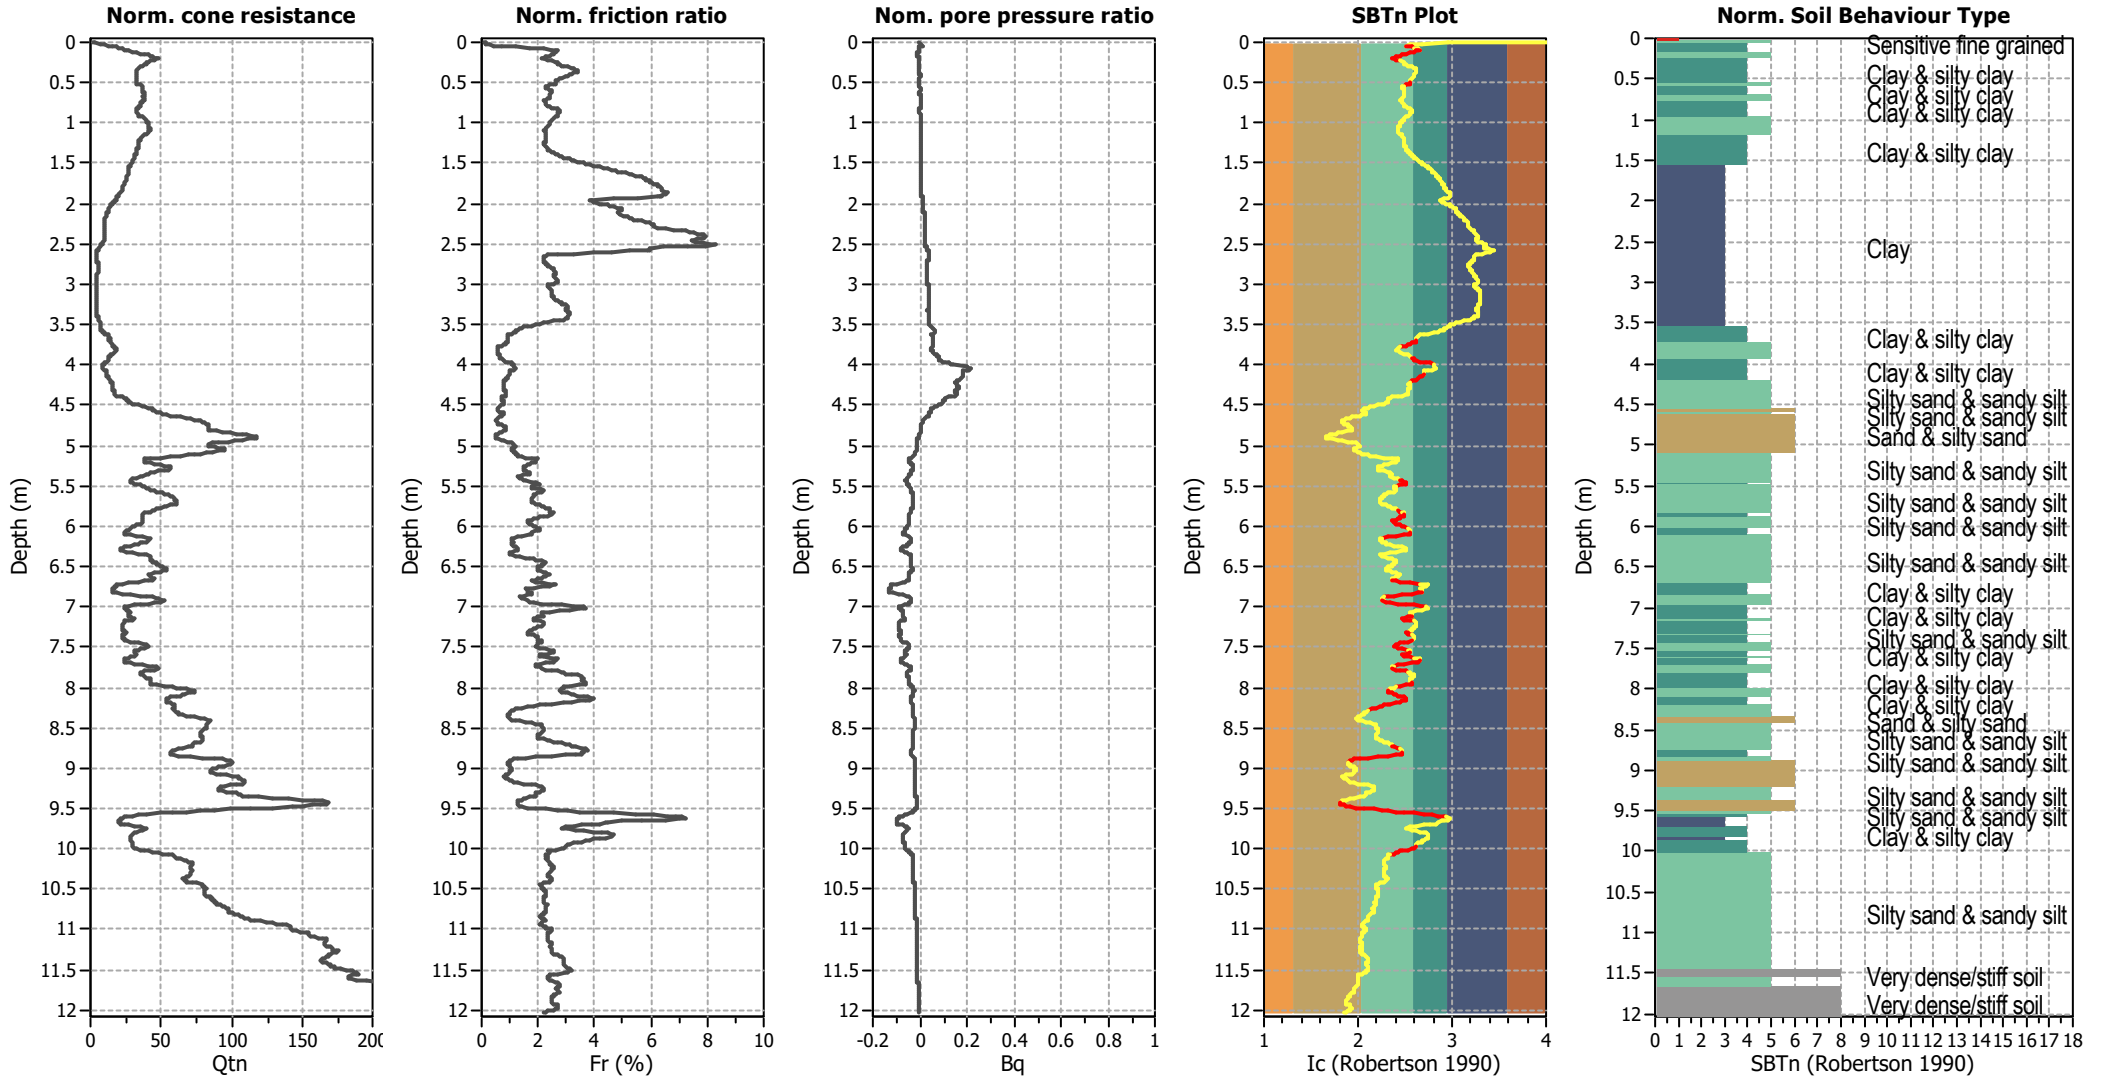


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

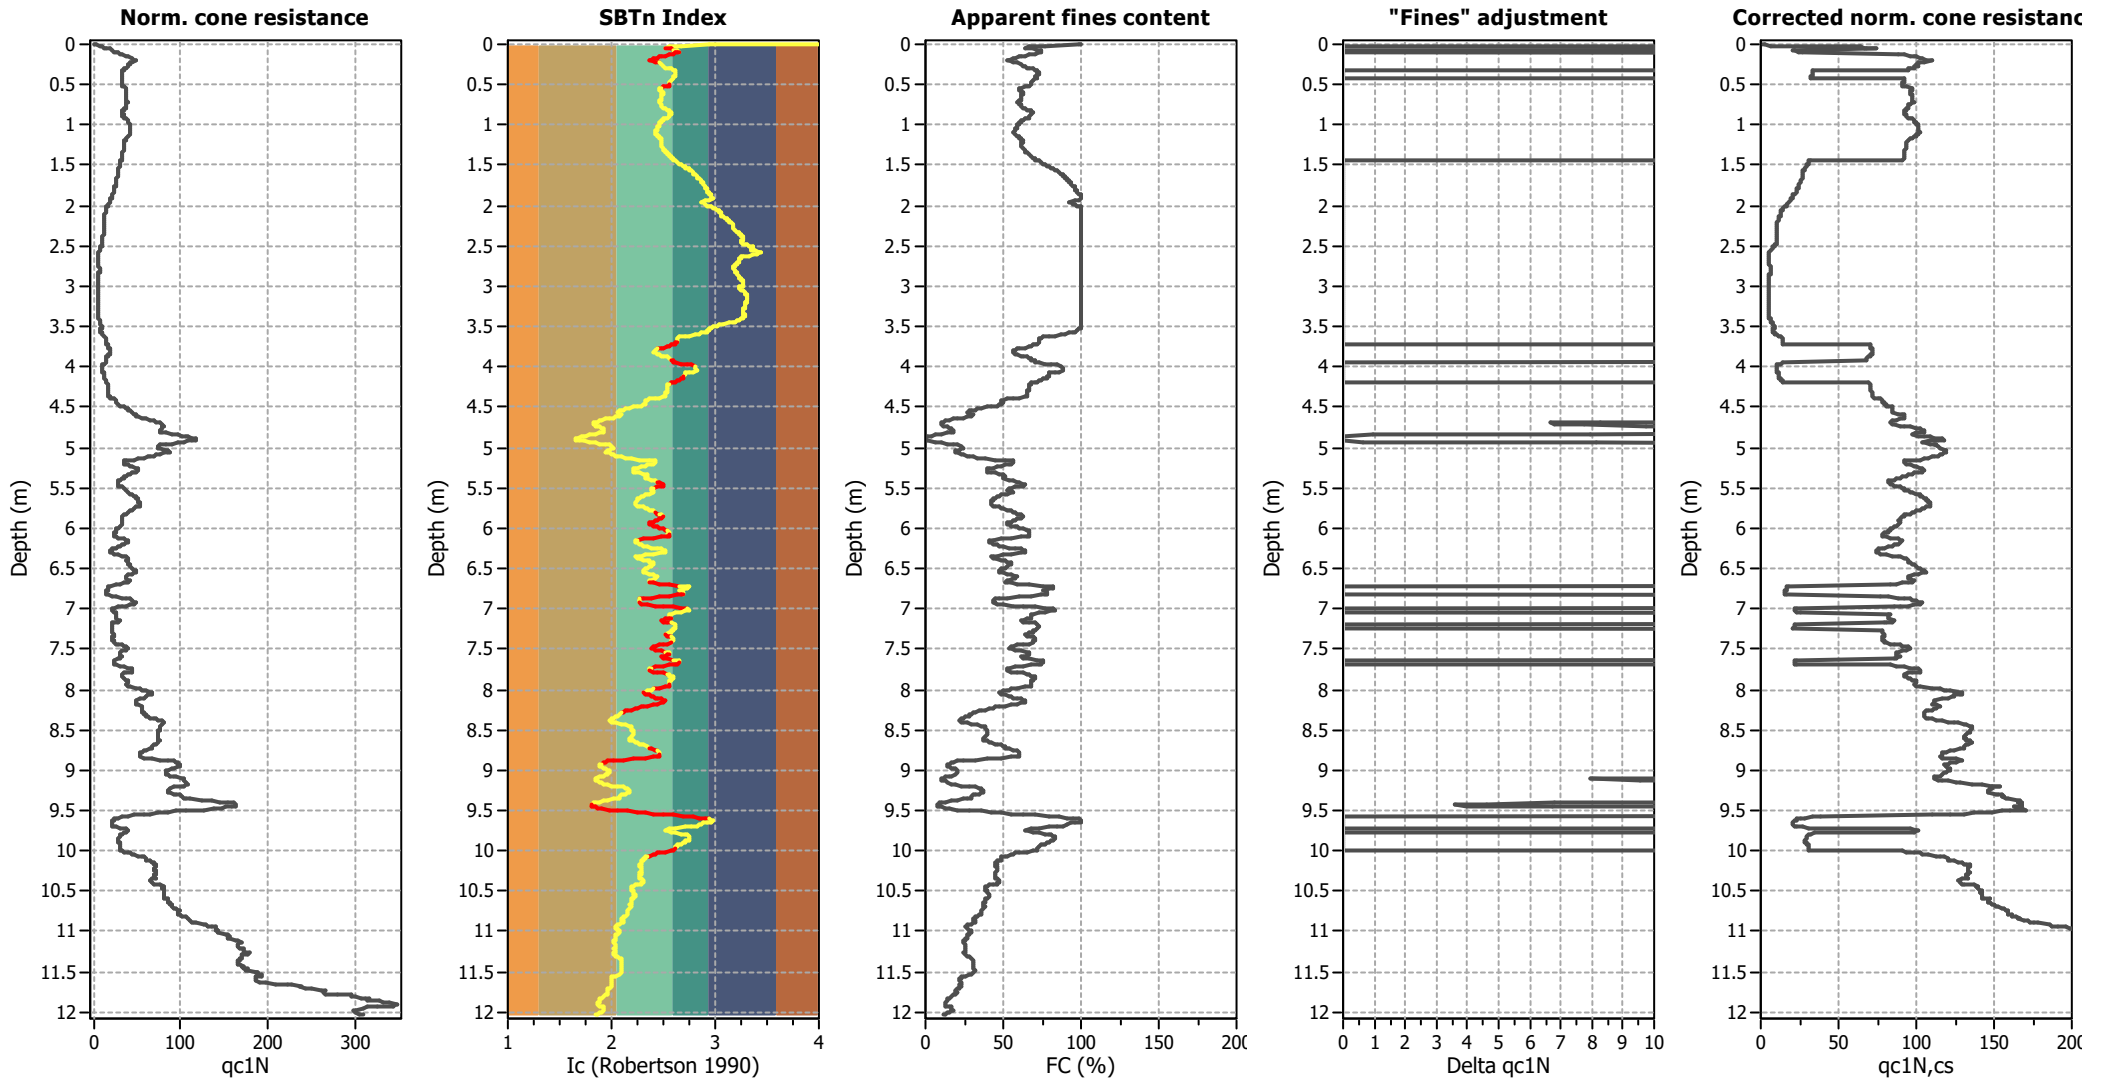

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

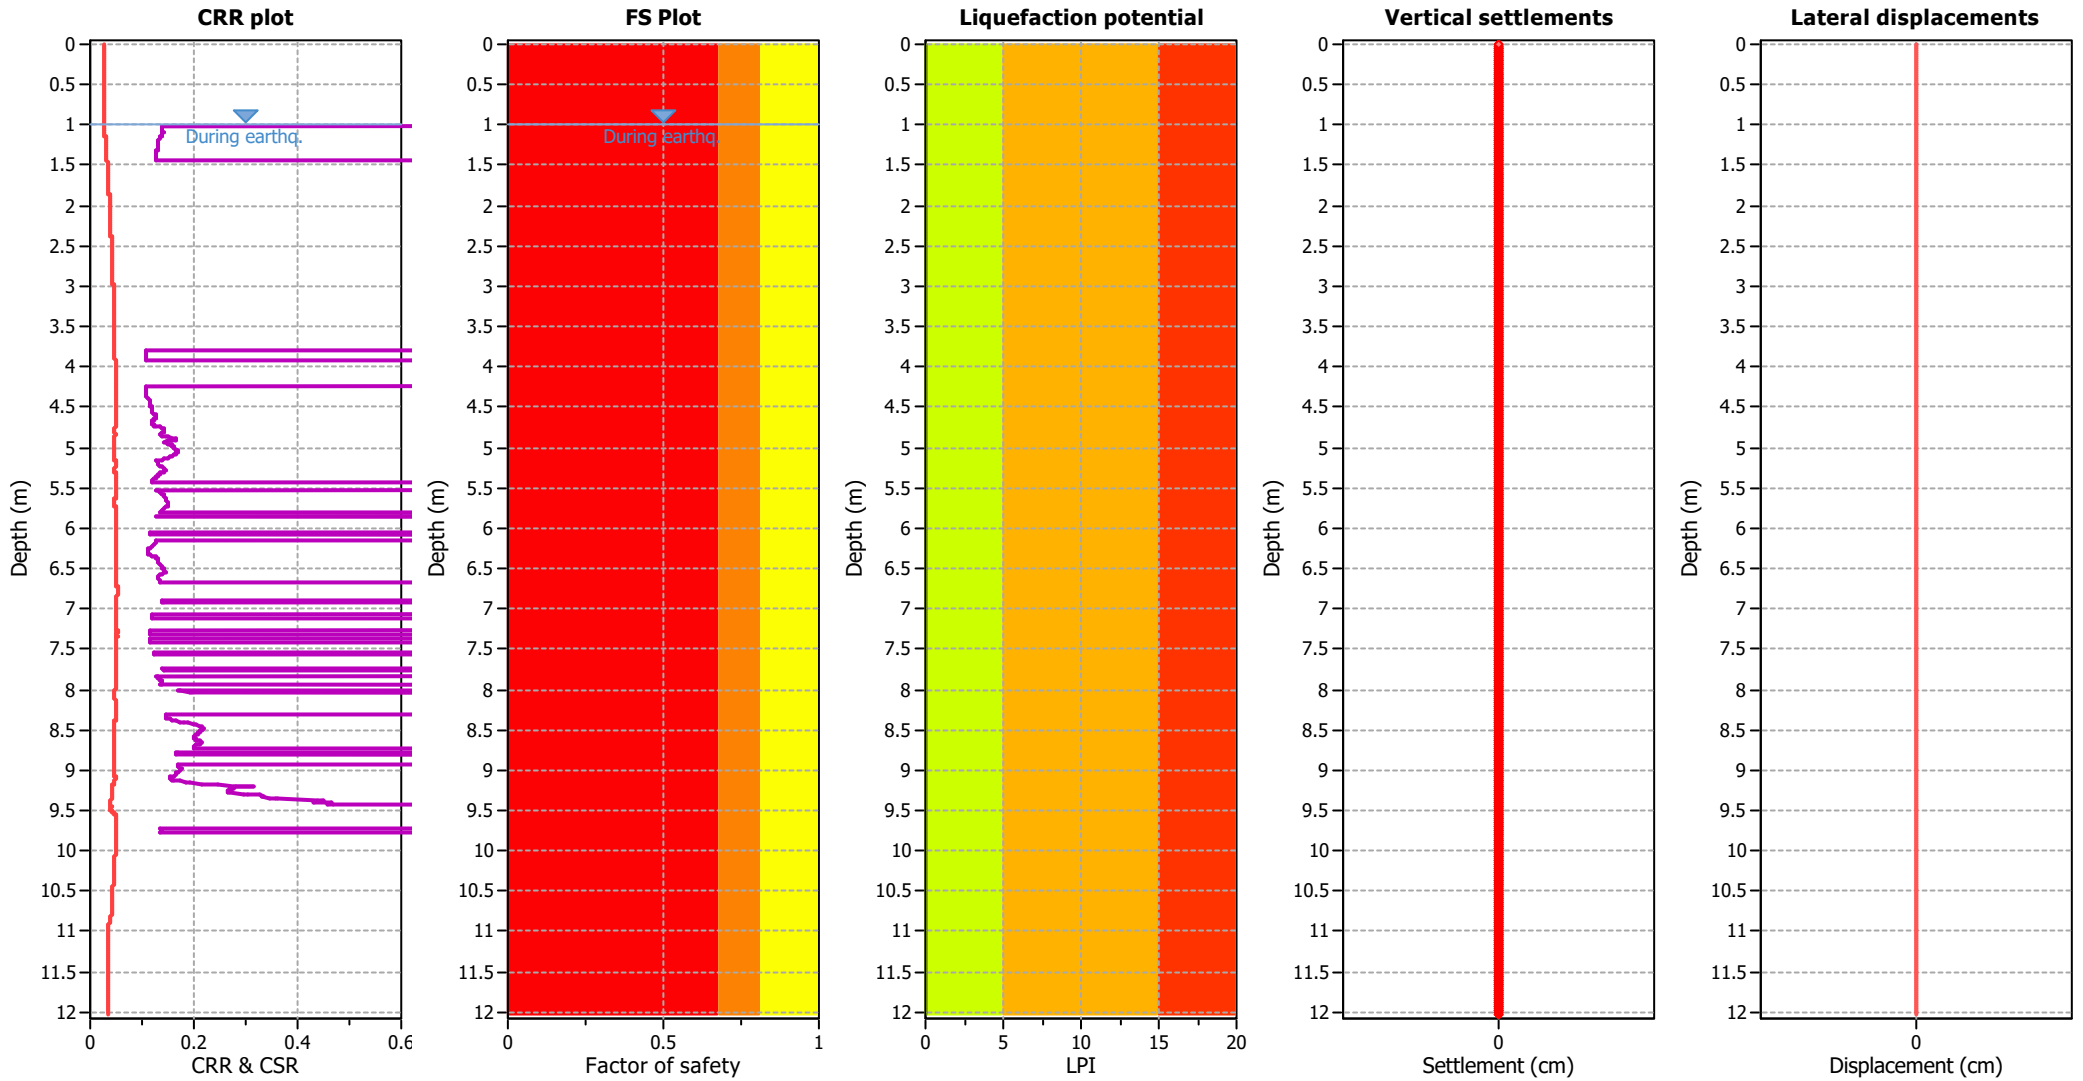

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

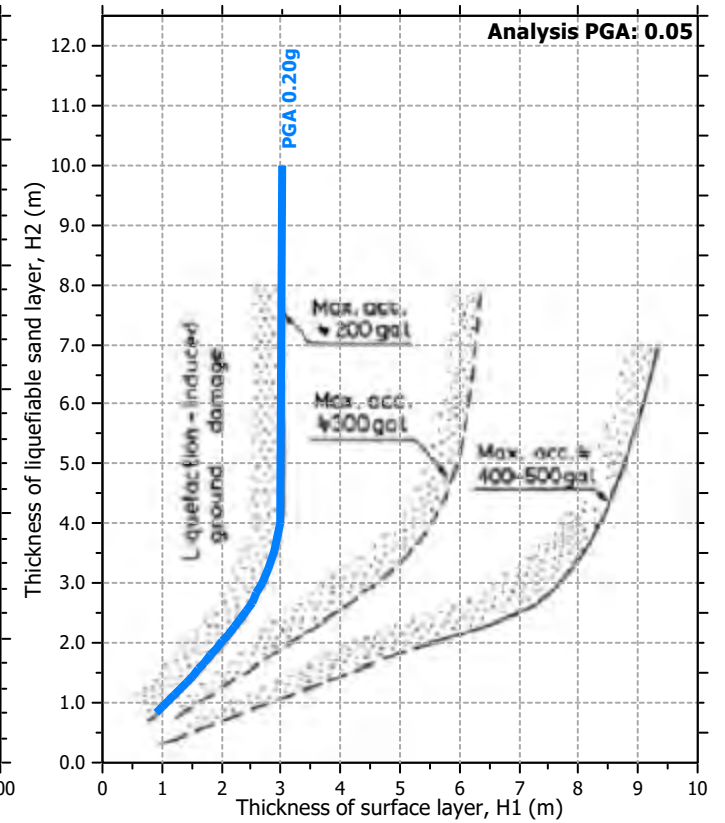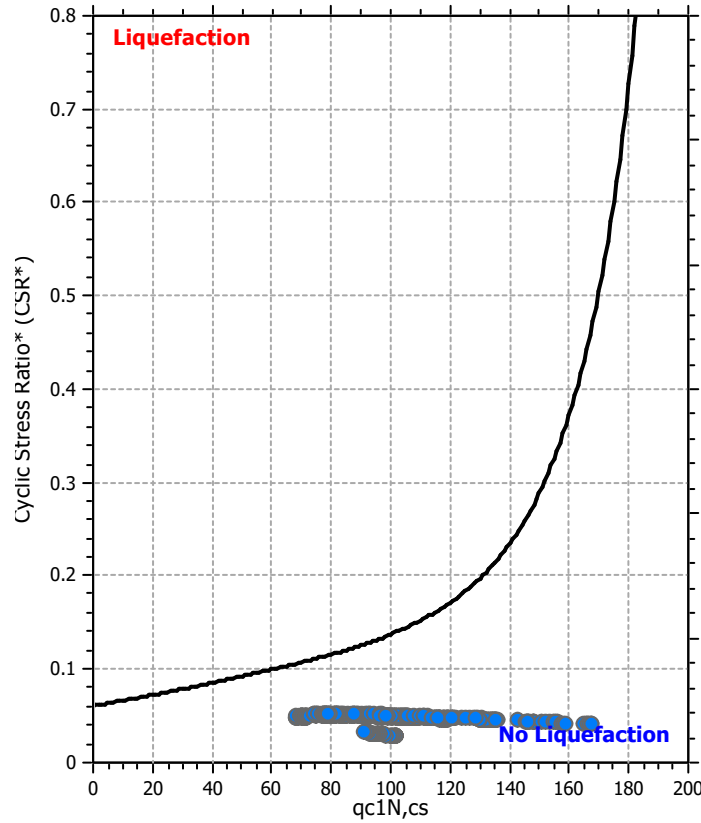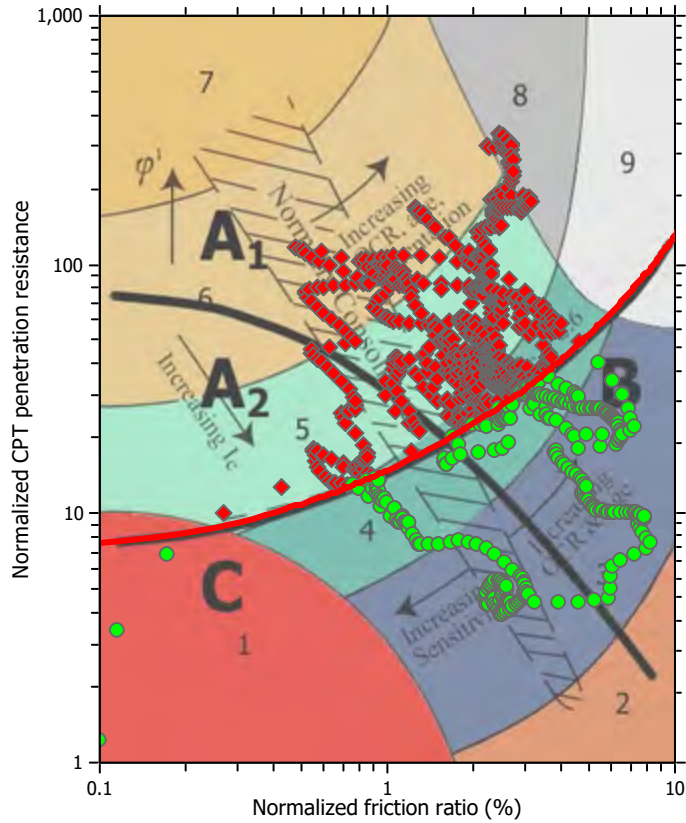

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

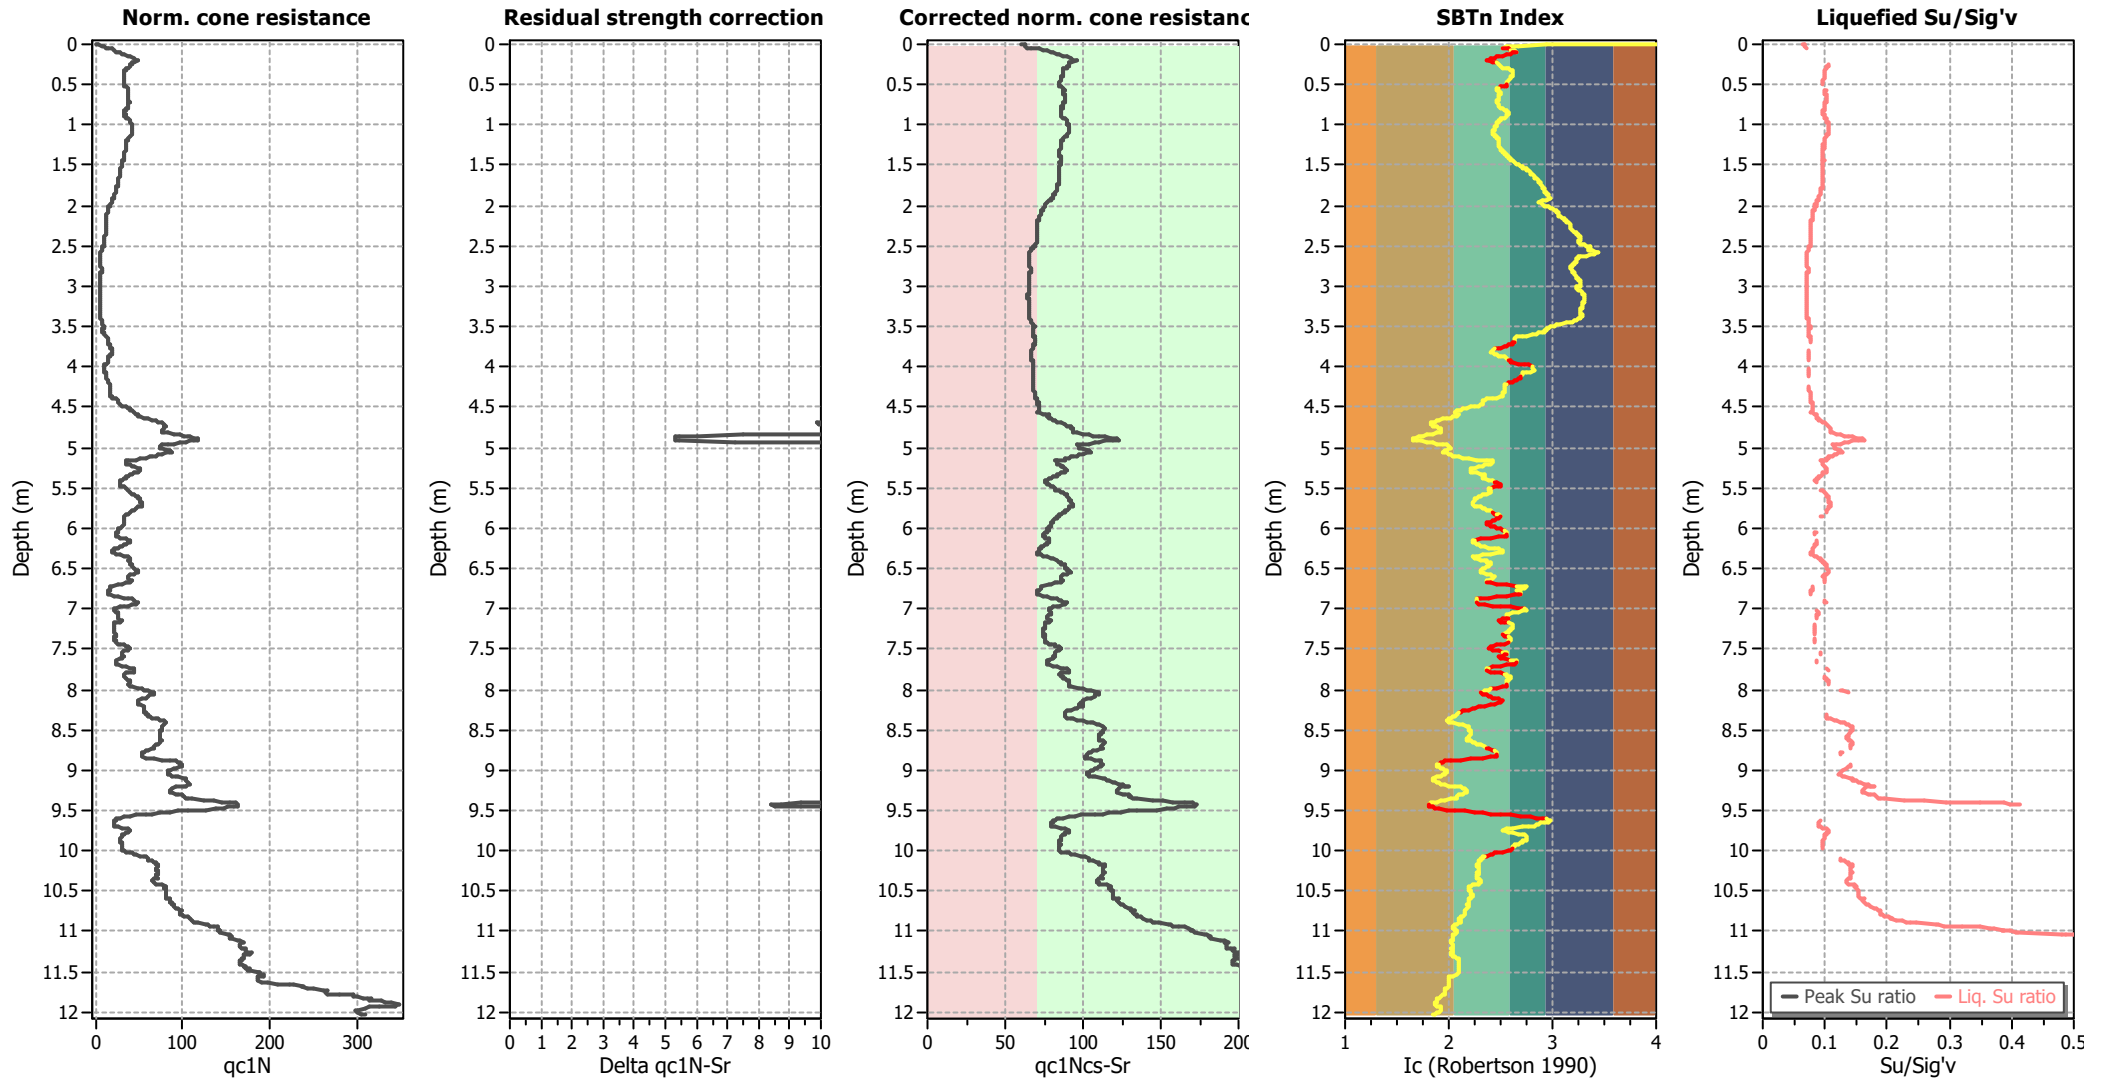

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

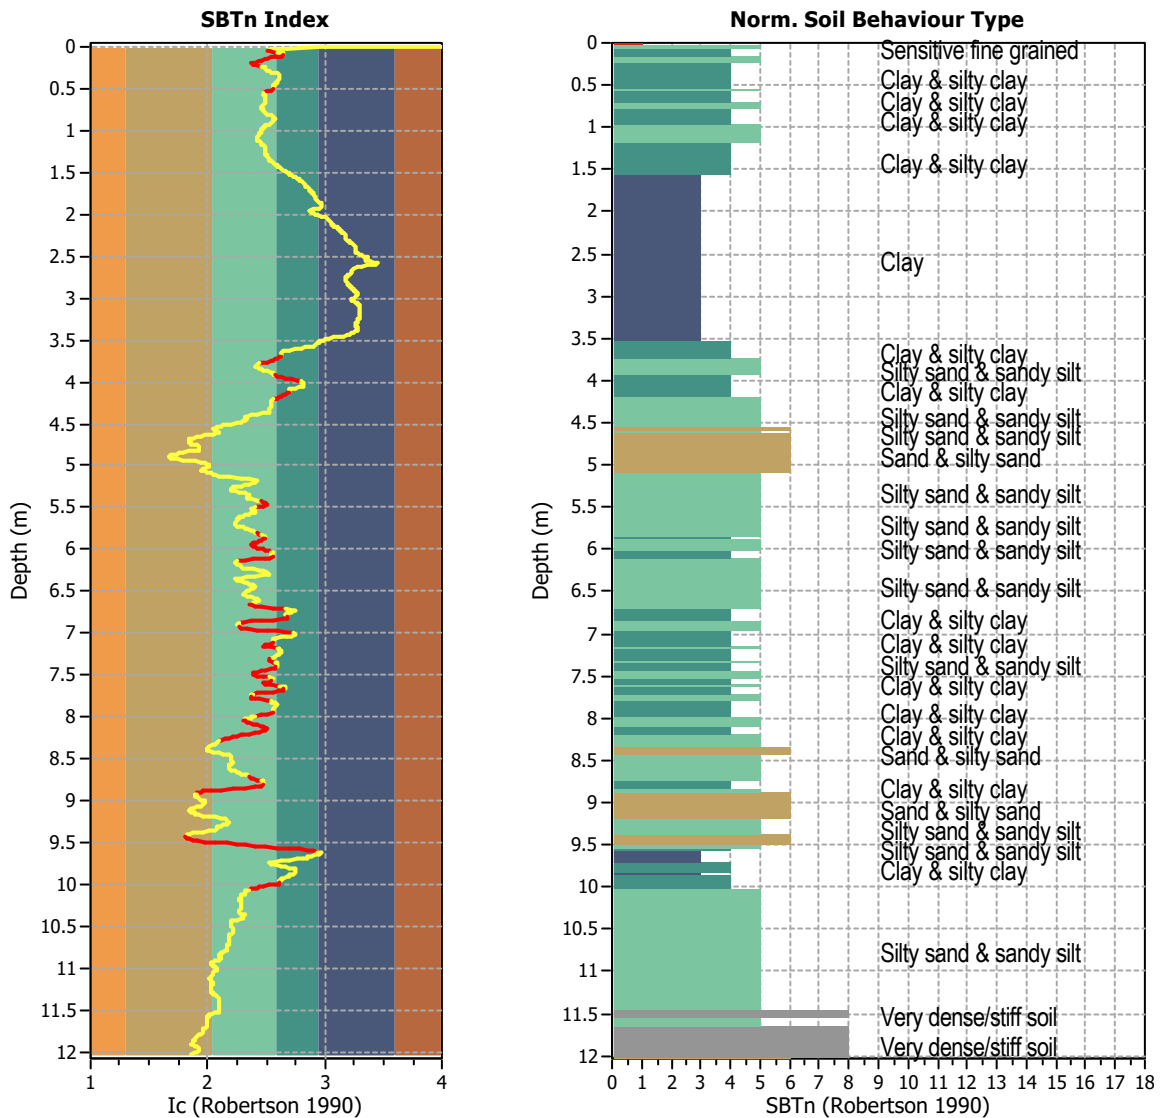


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1204
 Total points excluded: 240
 Exclusion percentage: 19.93%
 Number of layers detected: 32


Estimation of post-earthquake settlements

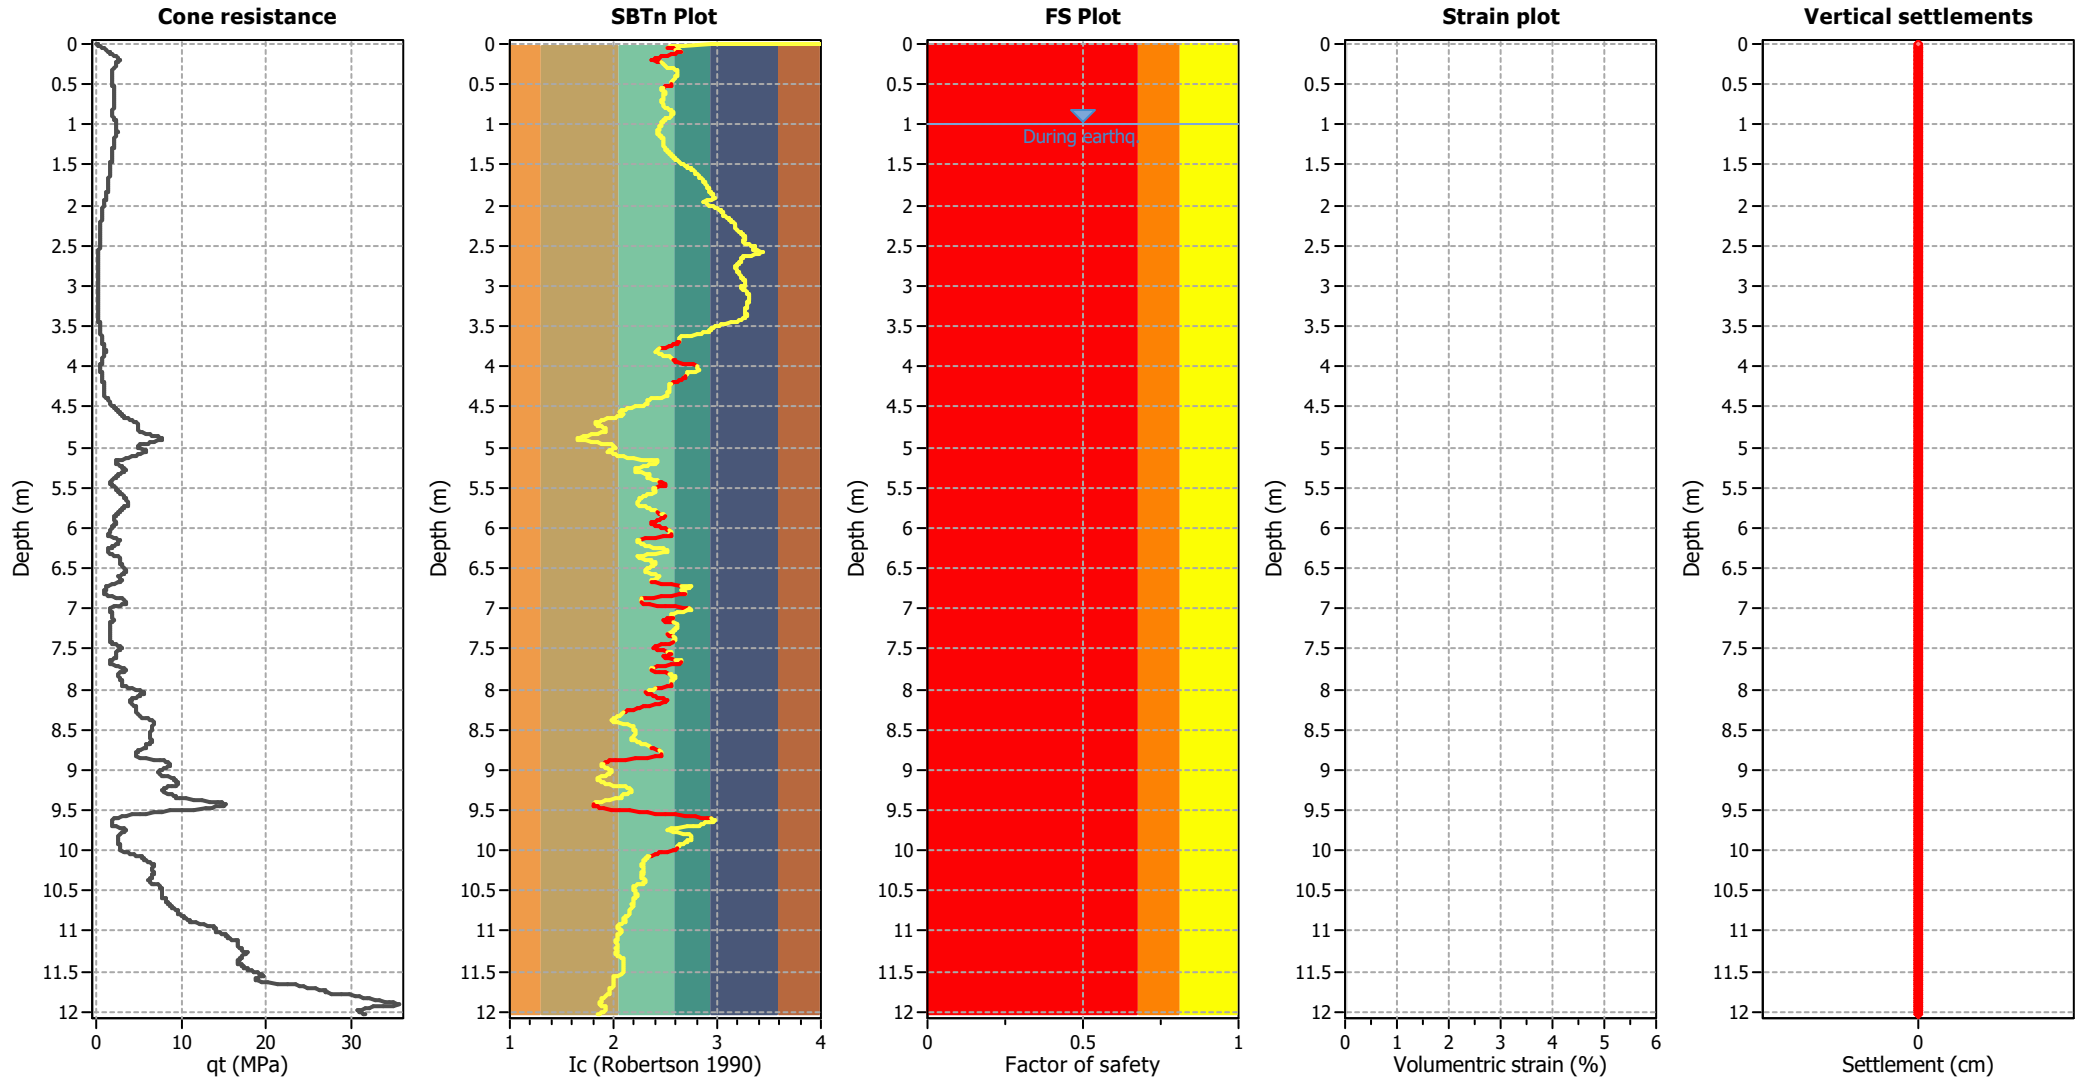

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

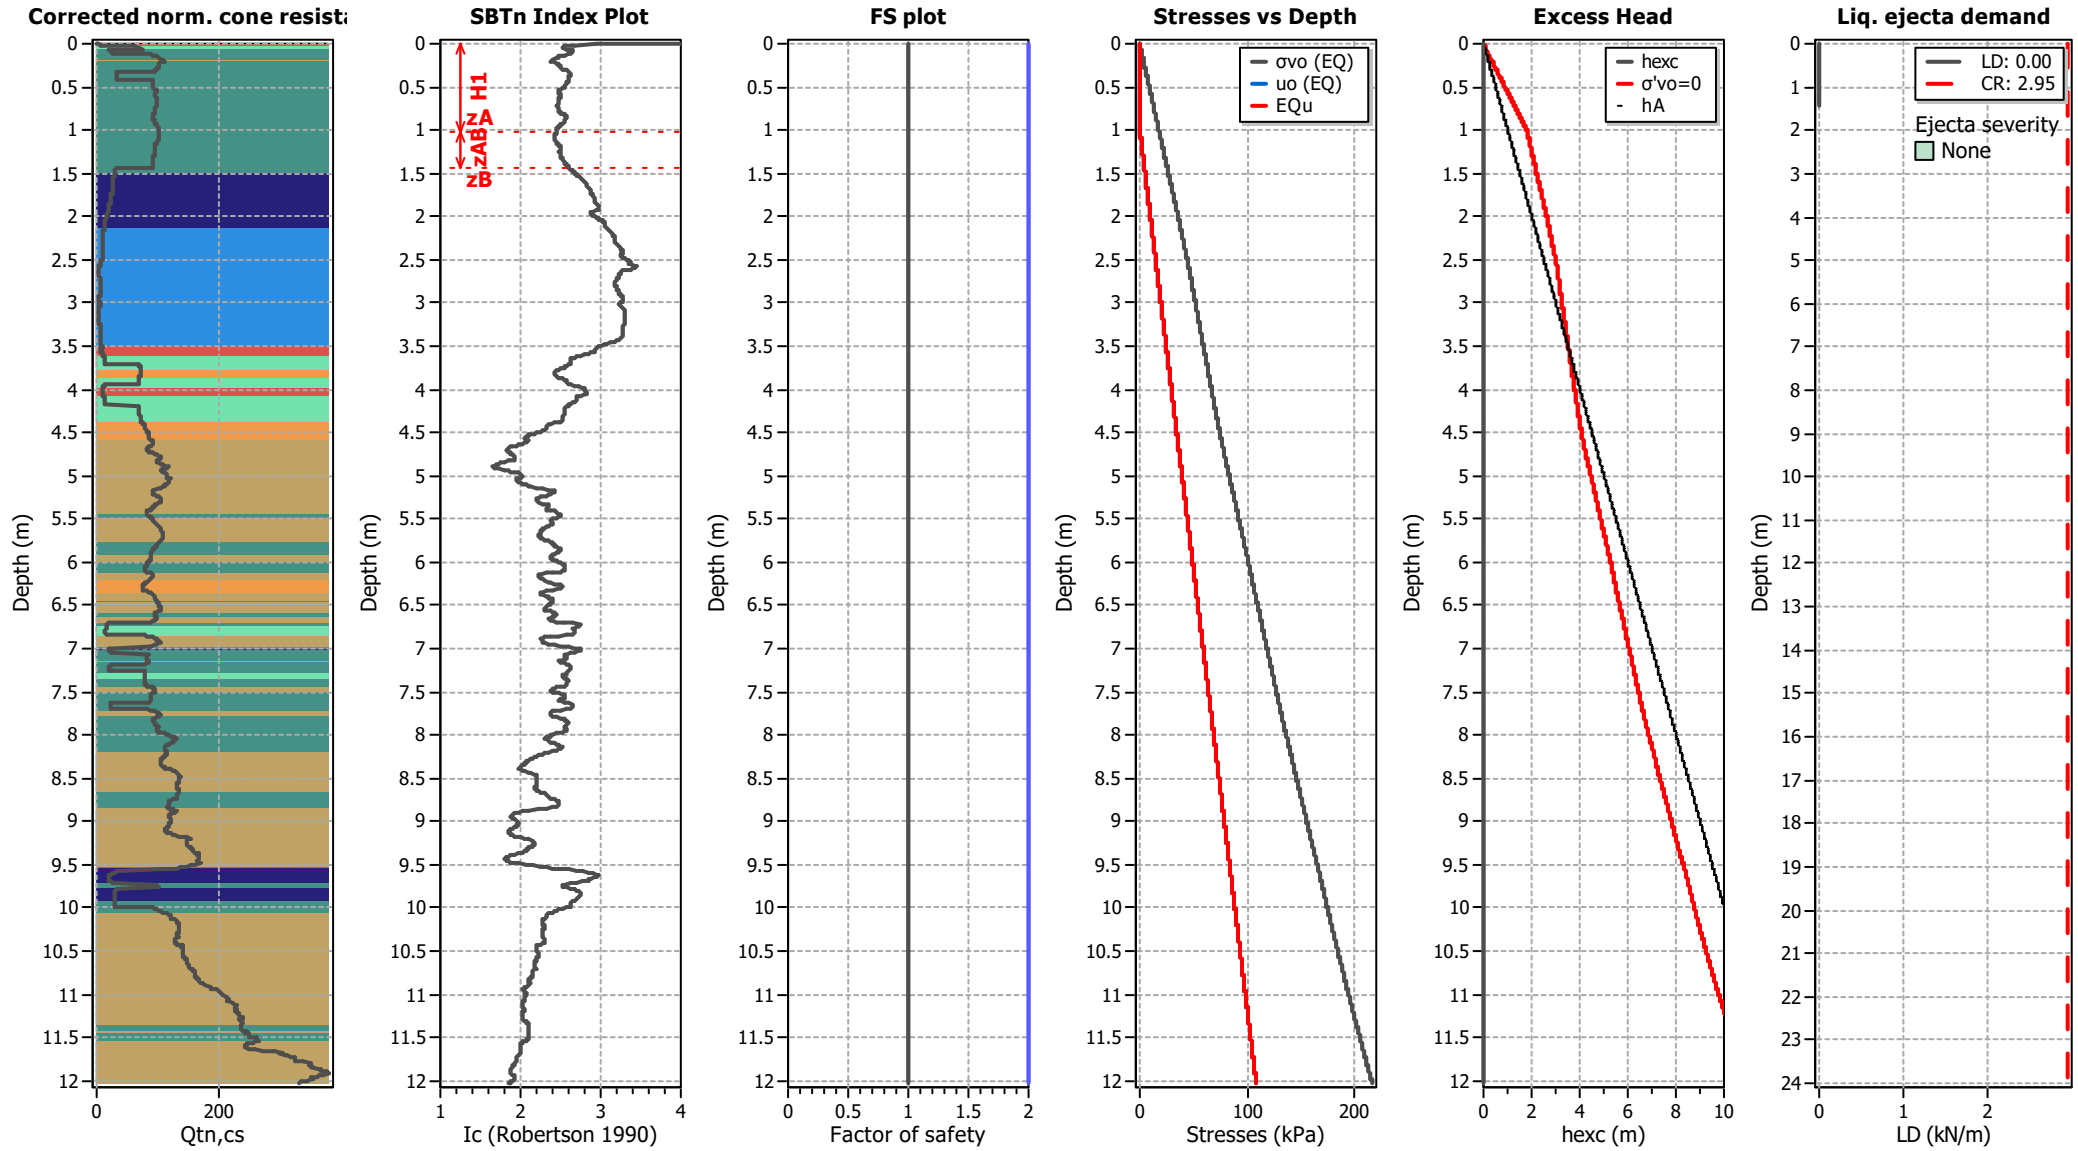

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT06

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

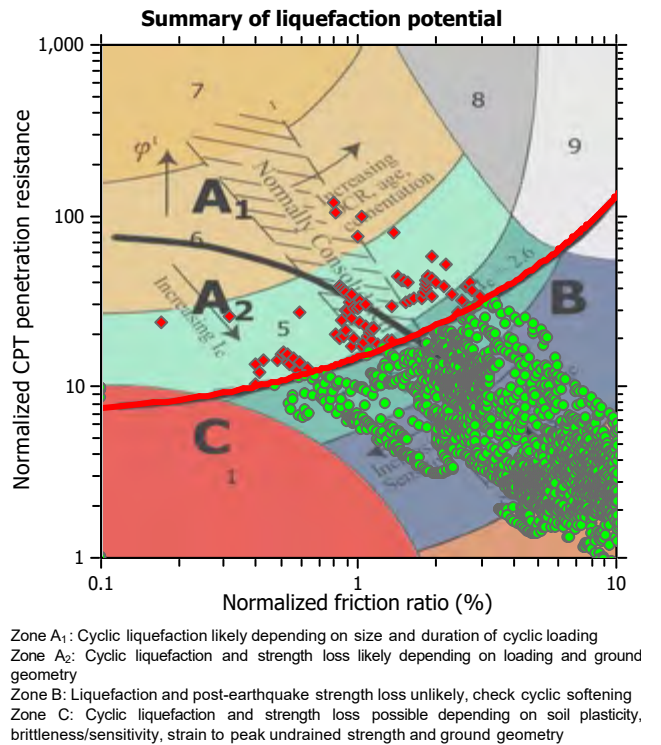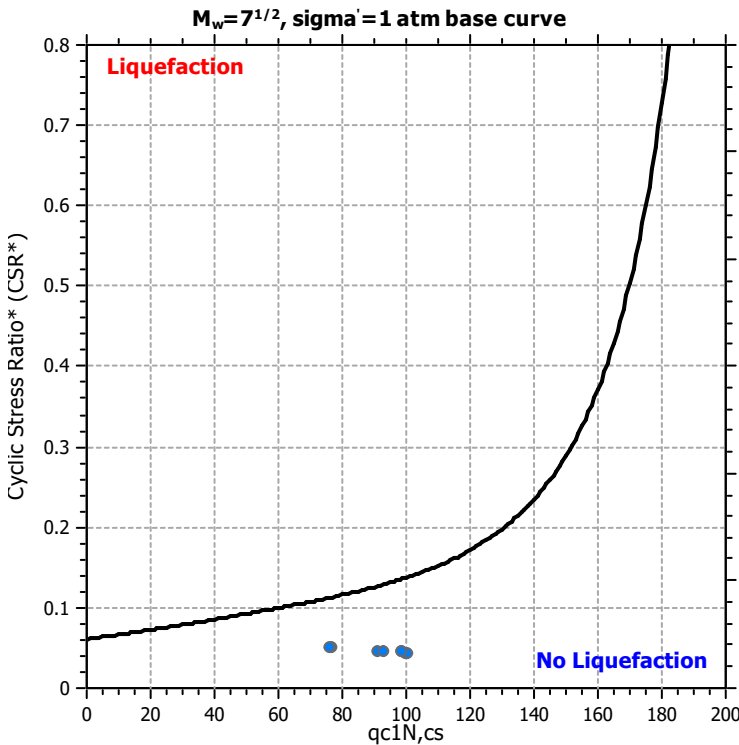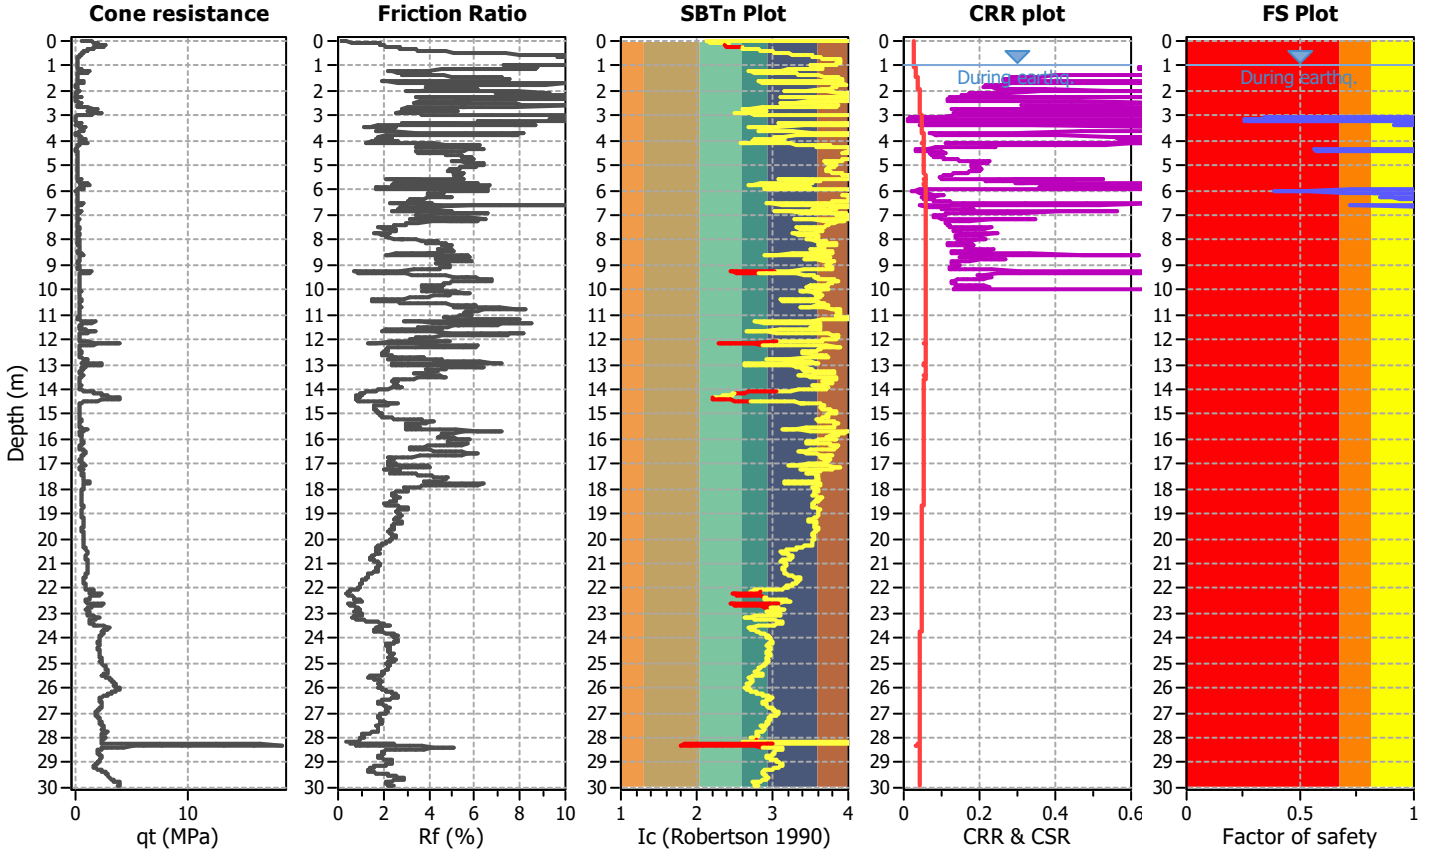

CPT basic interpretation plots

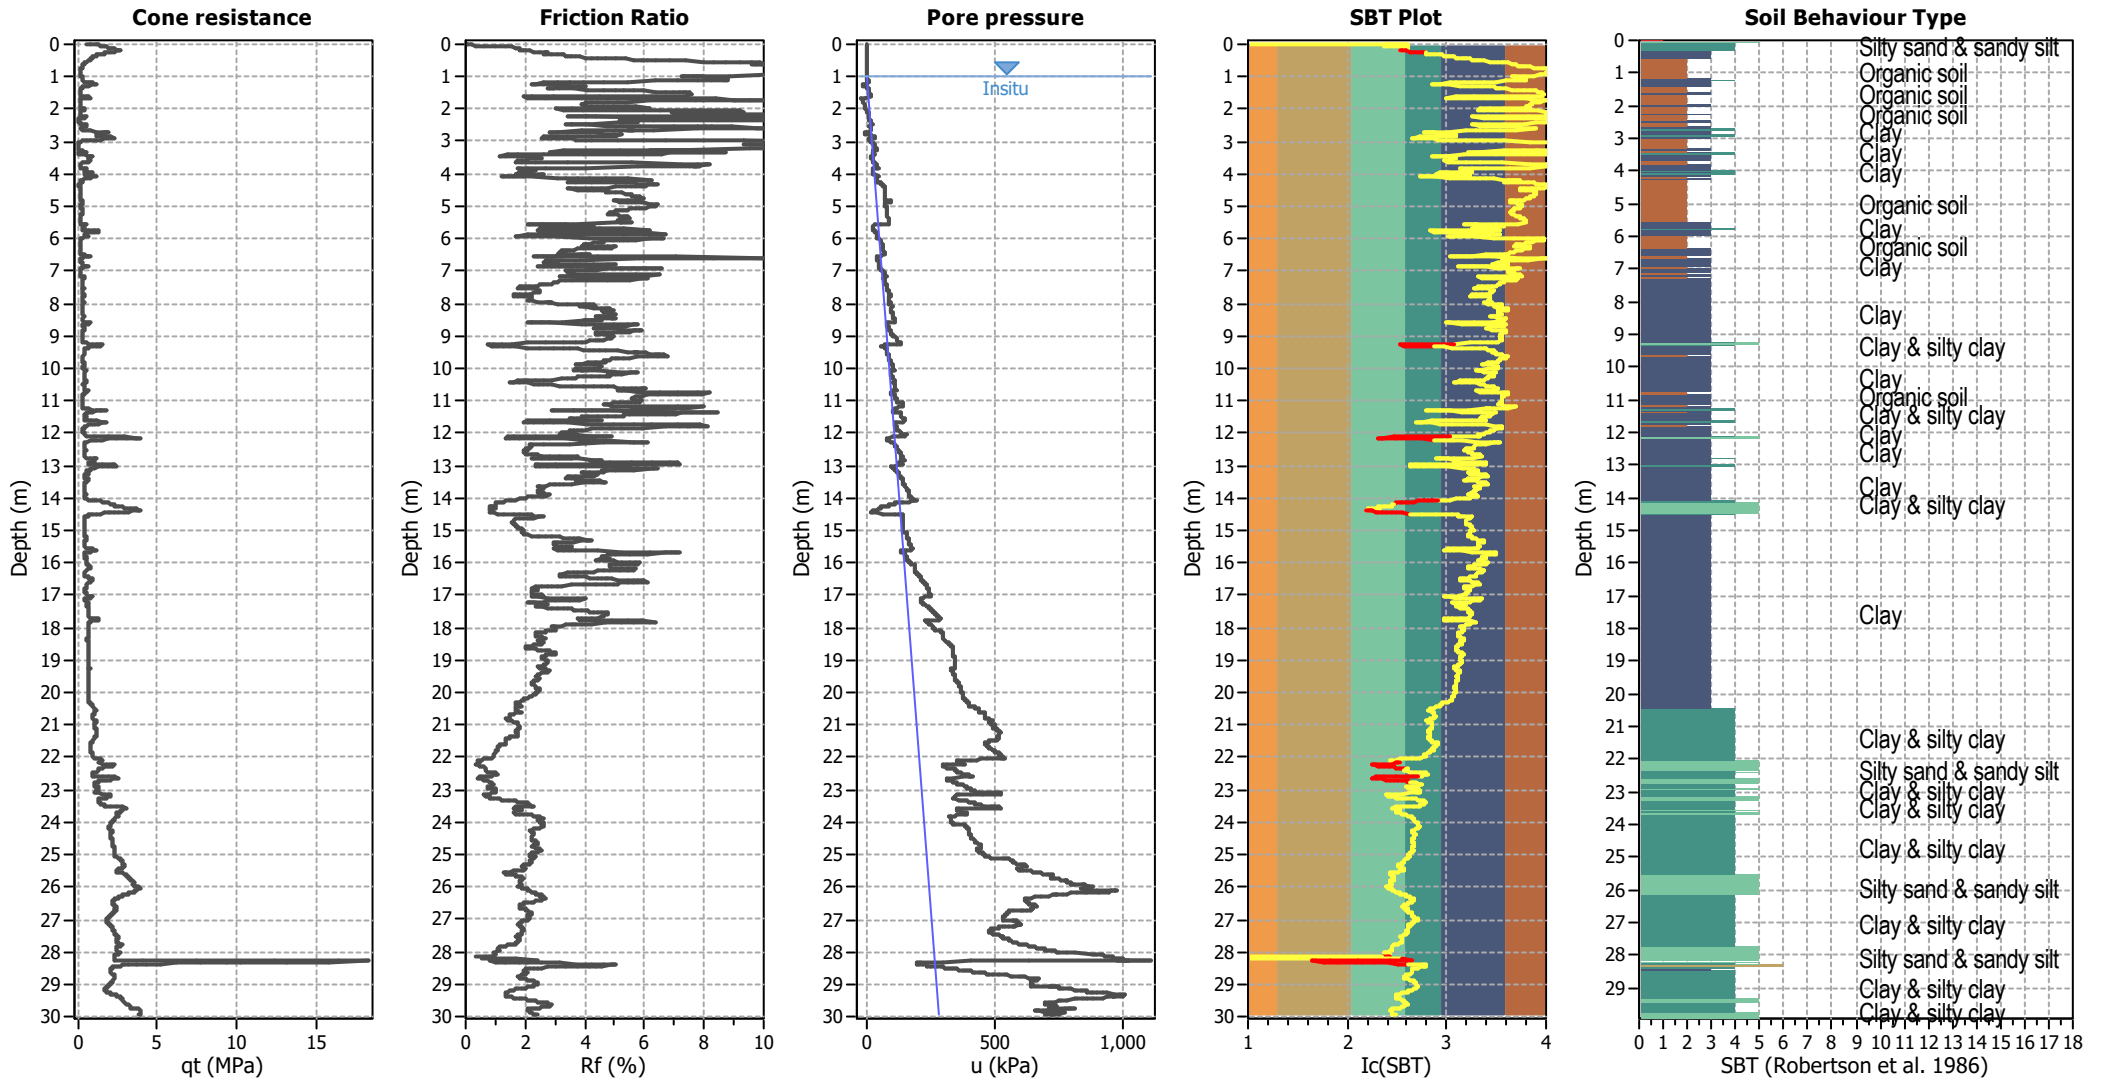


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

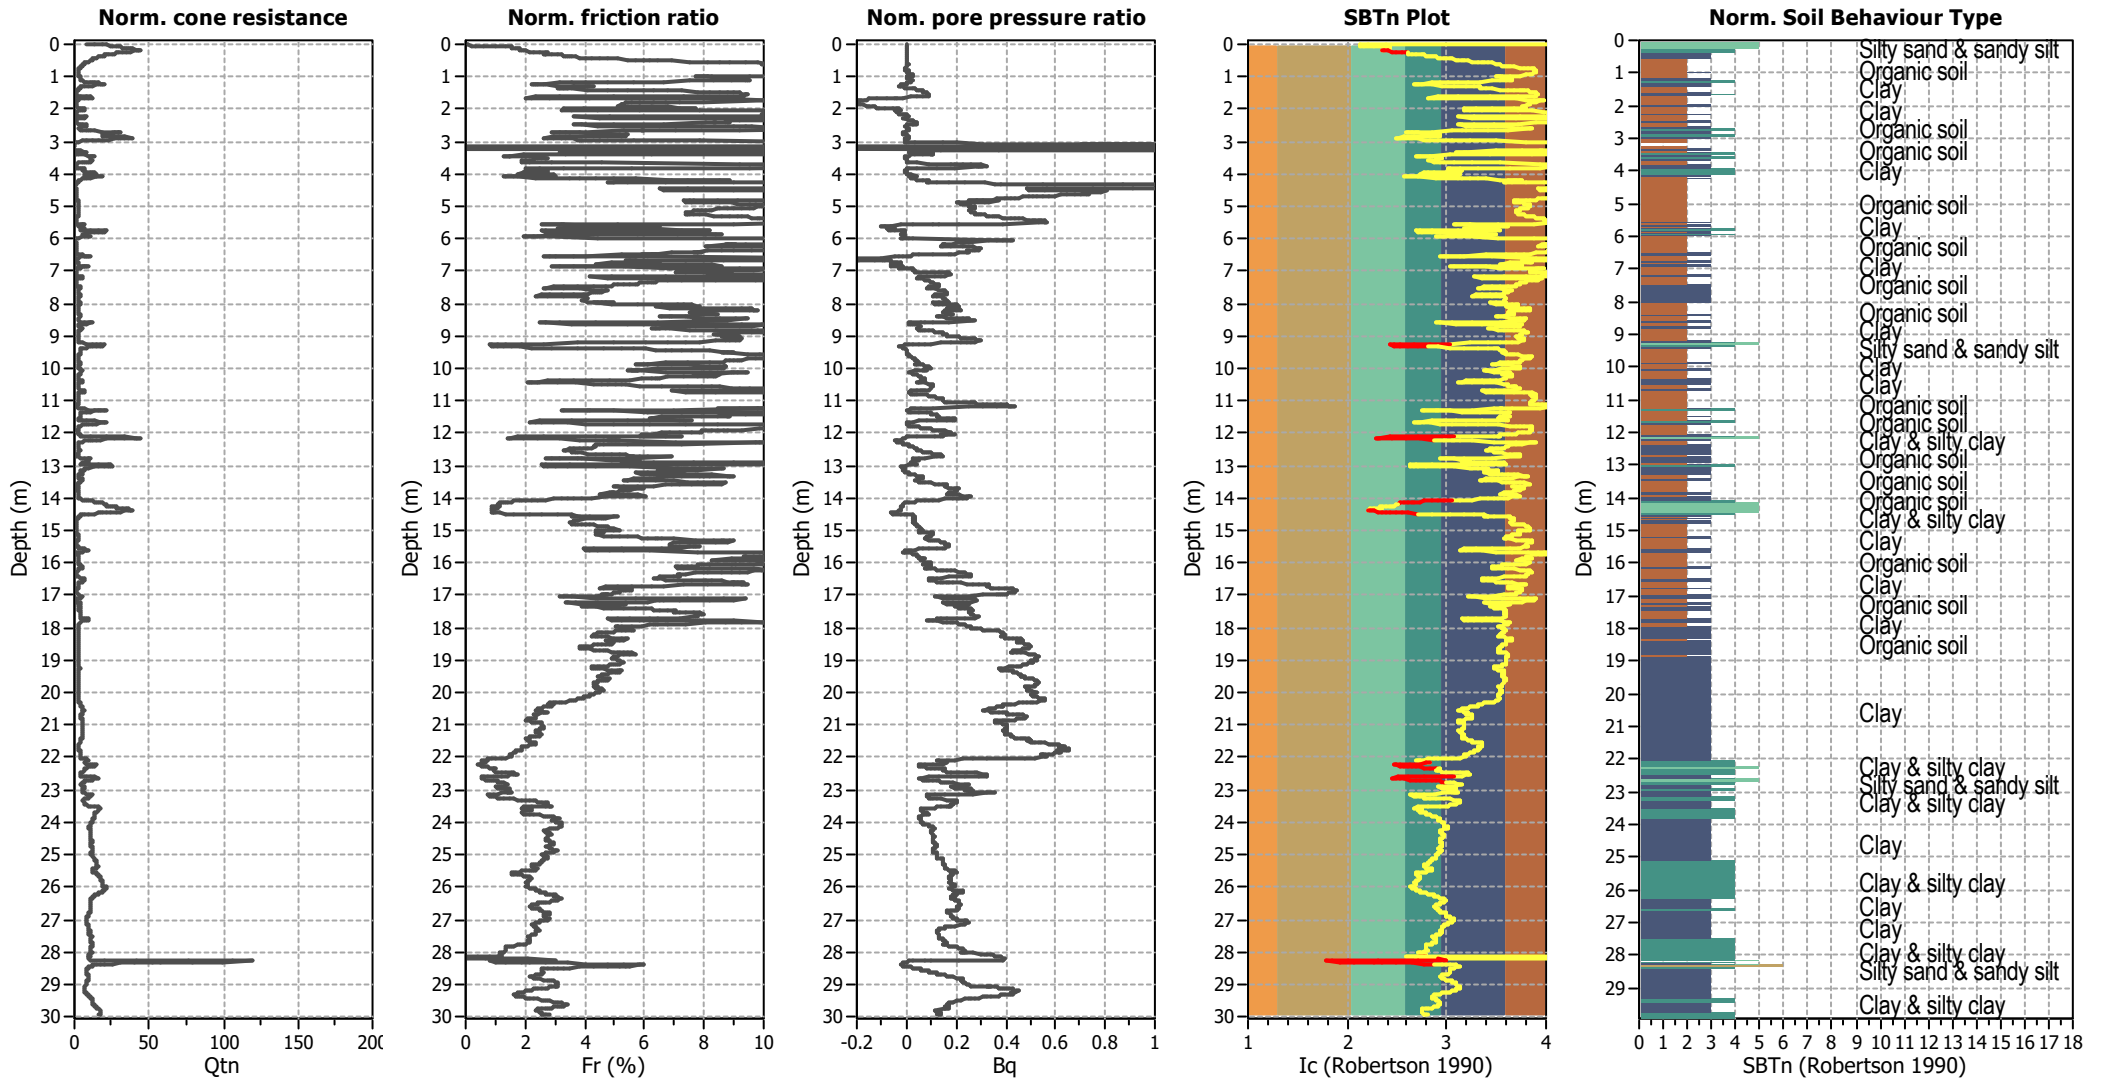


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

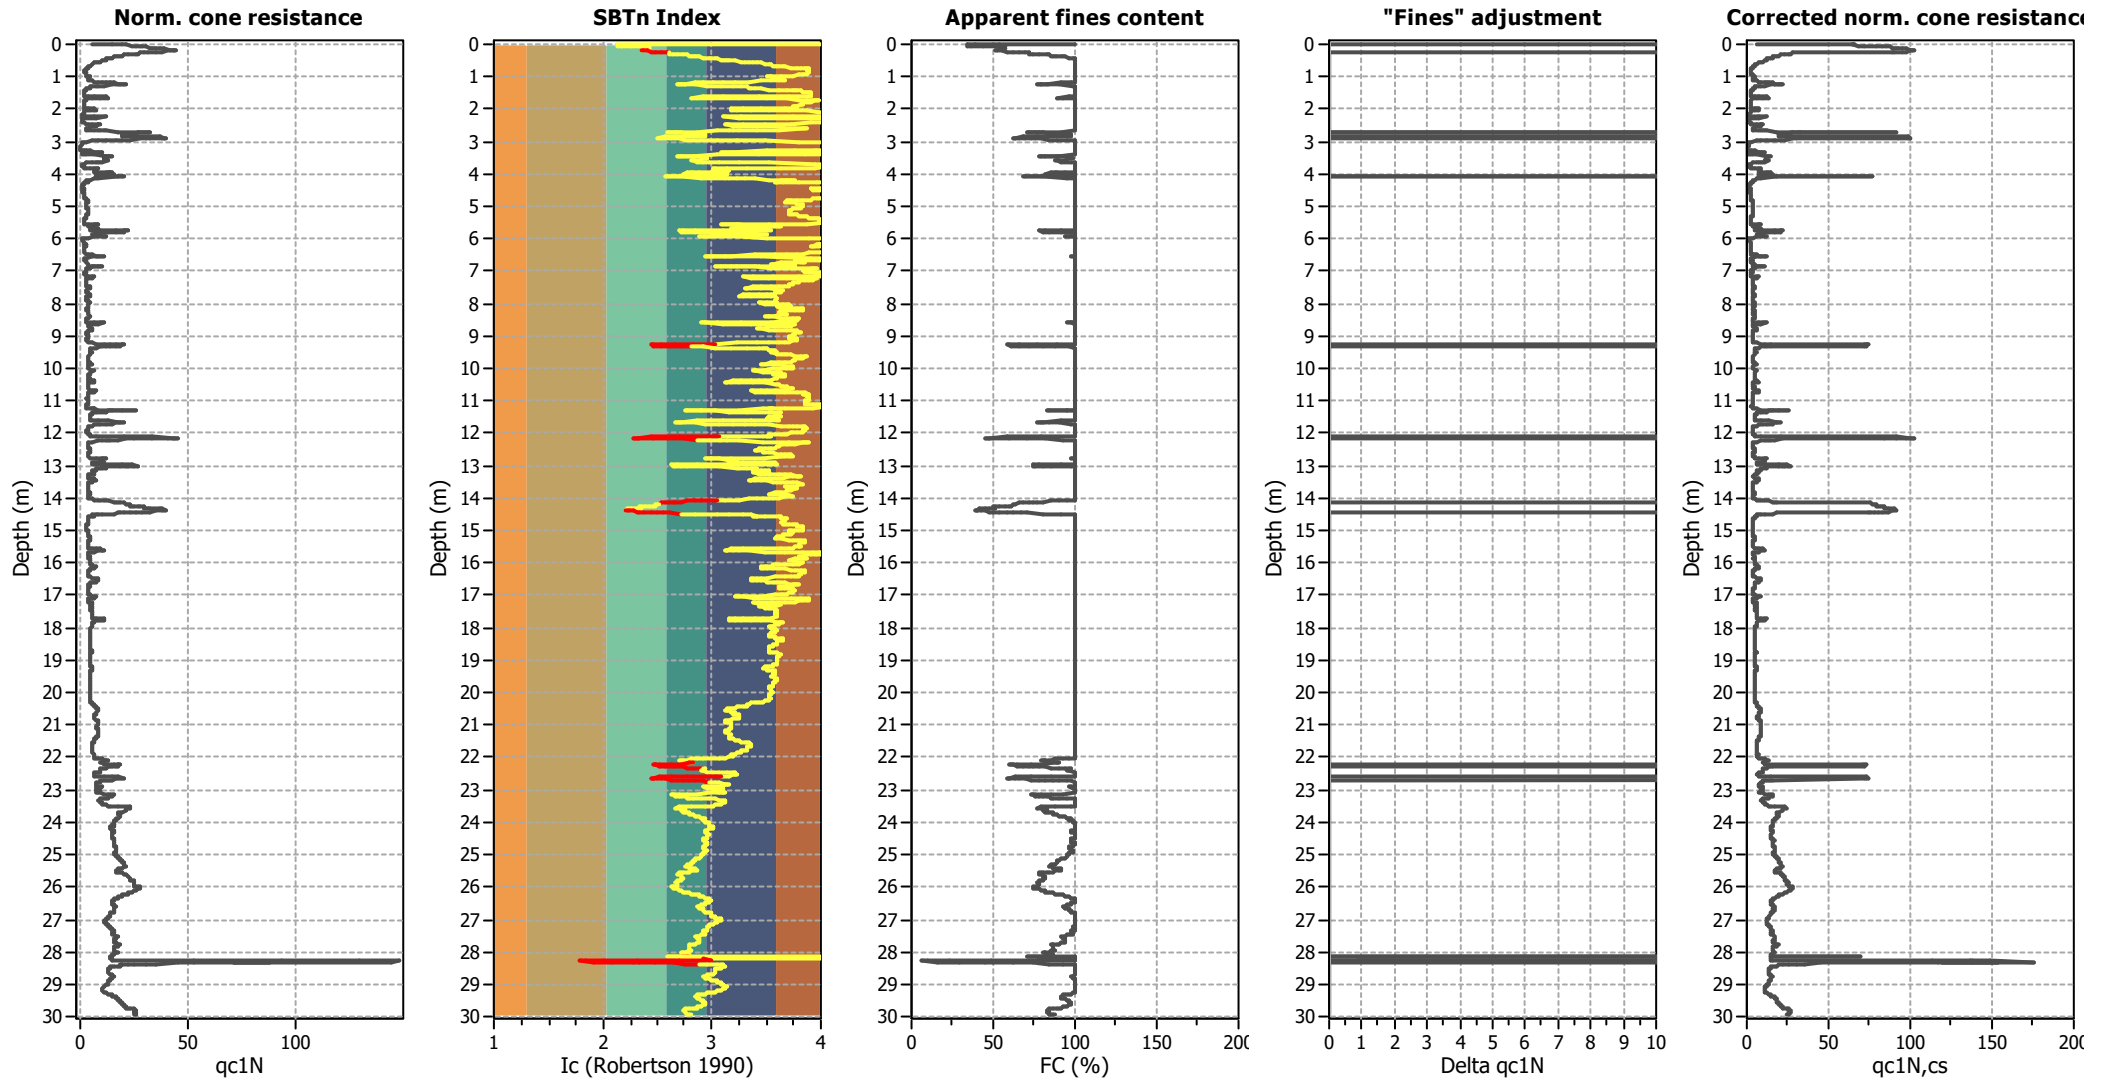

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

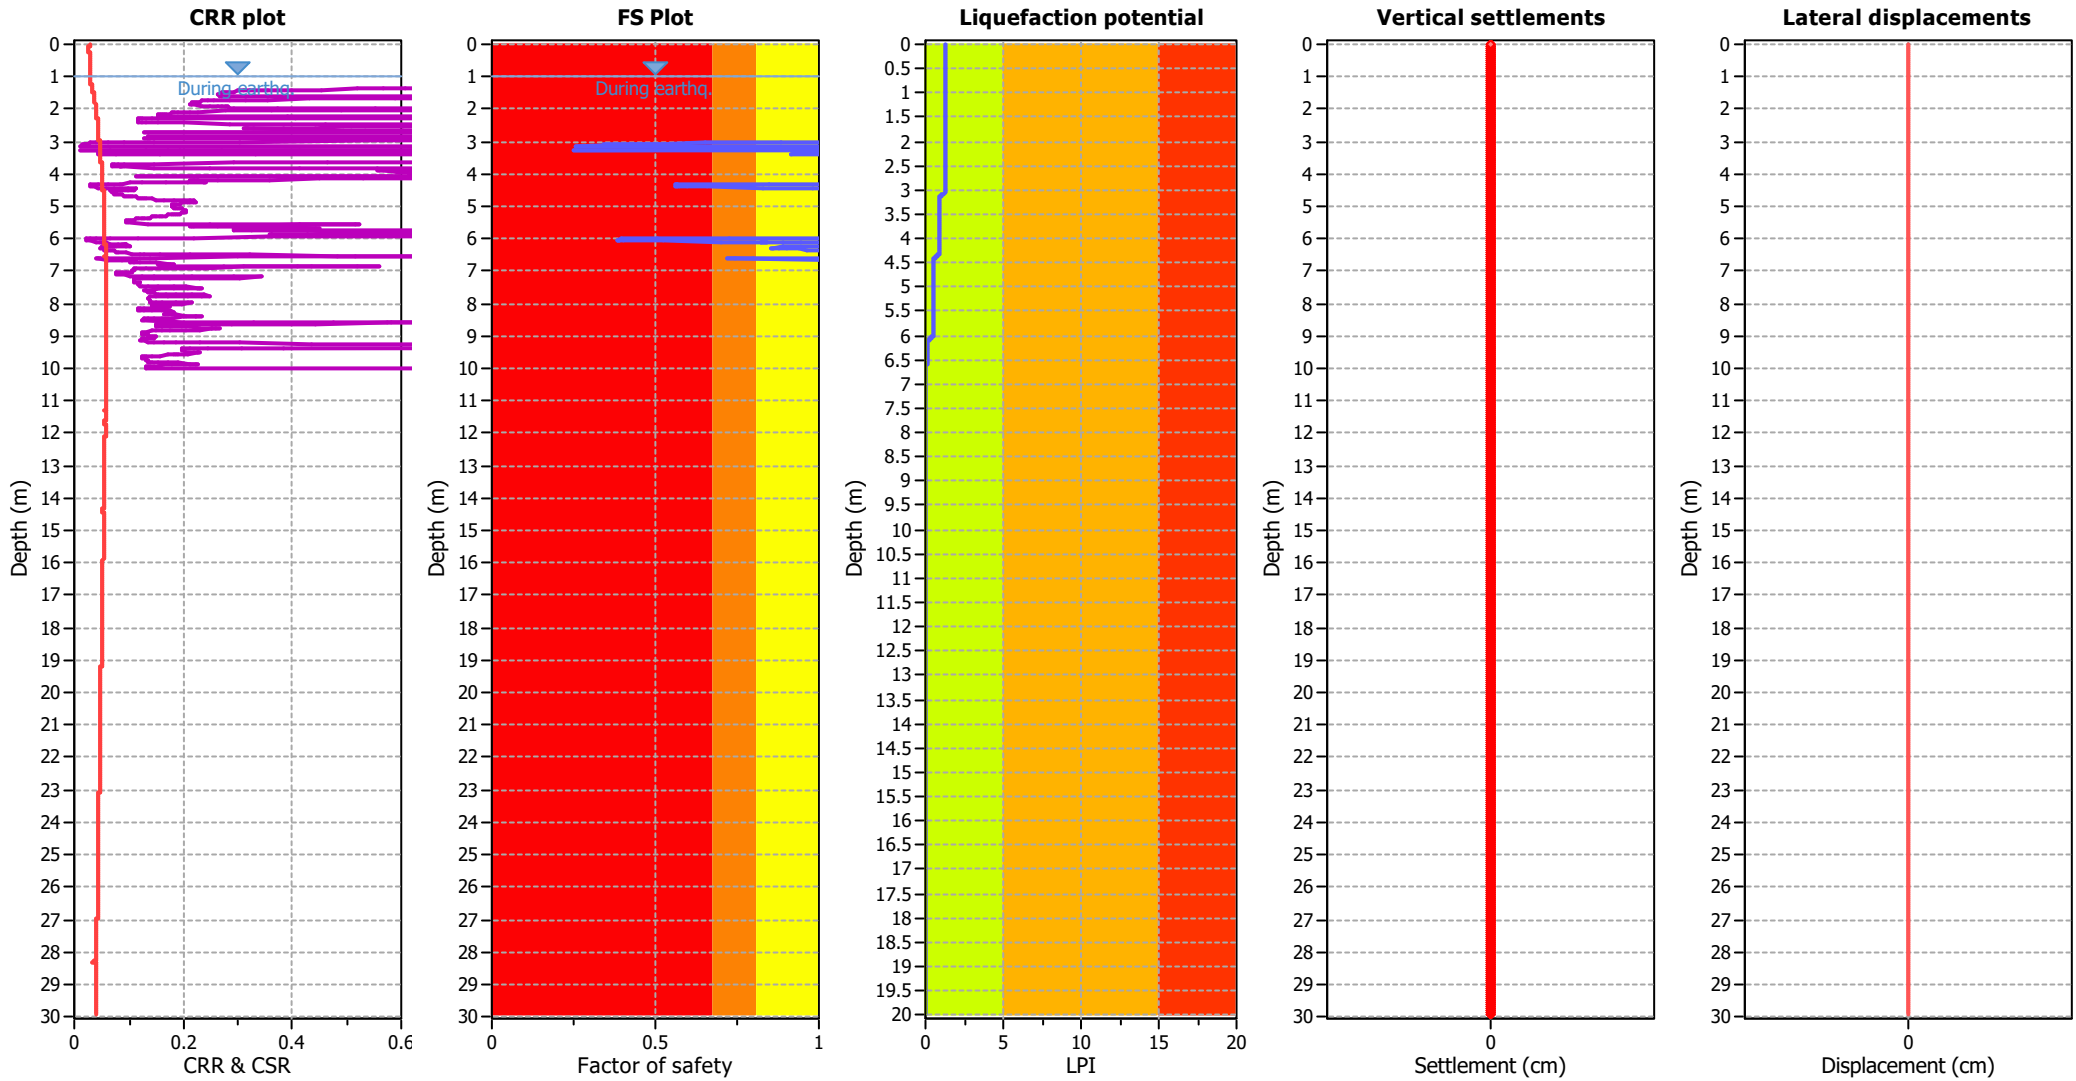

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

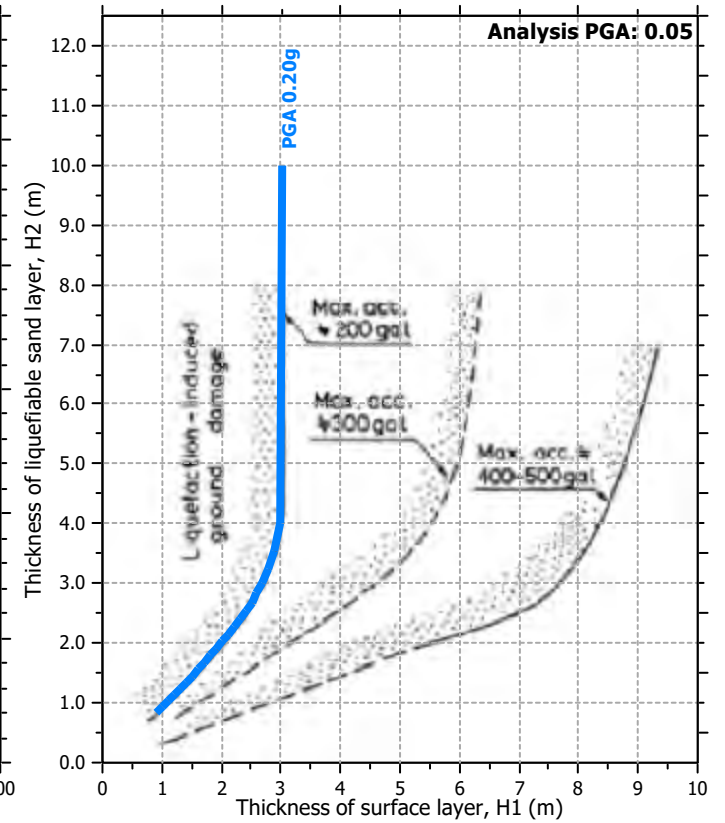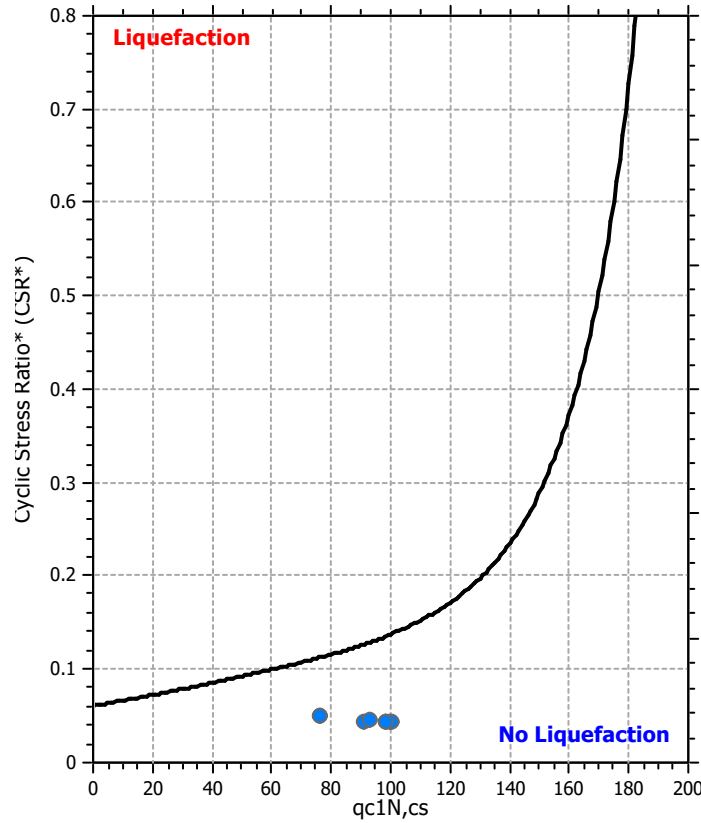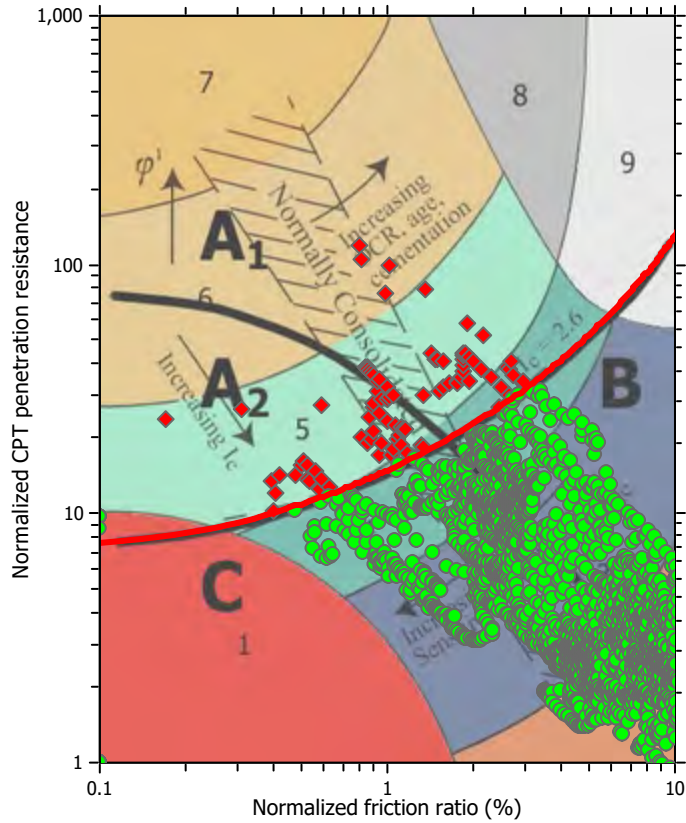

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

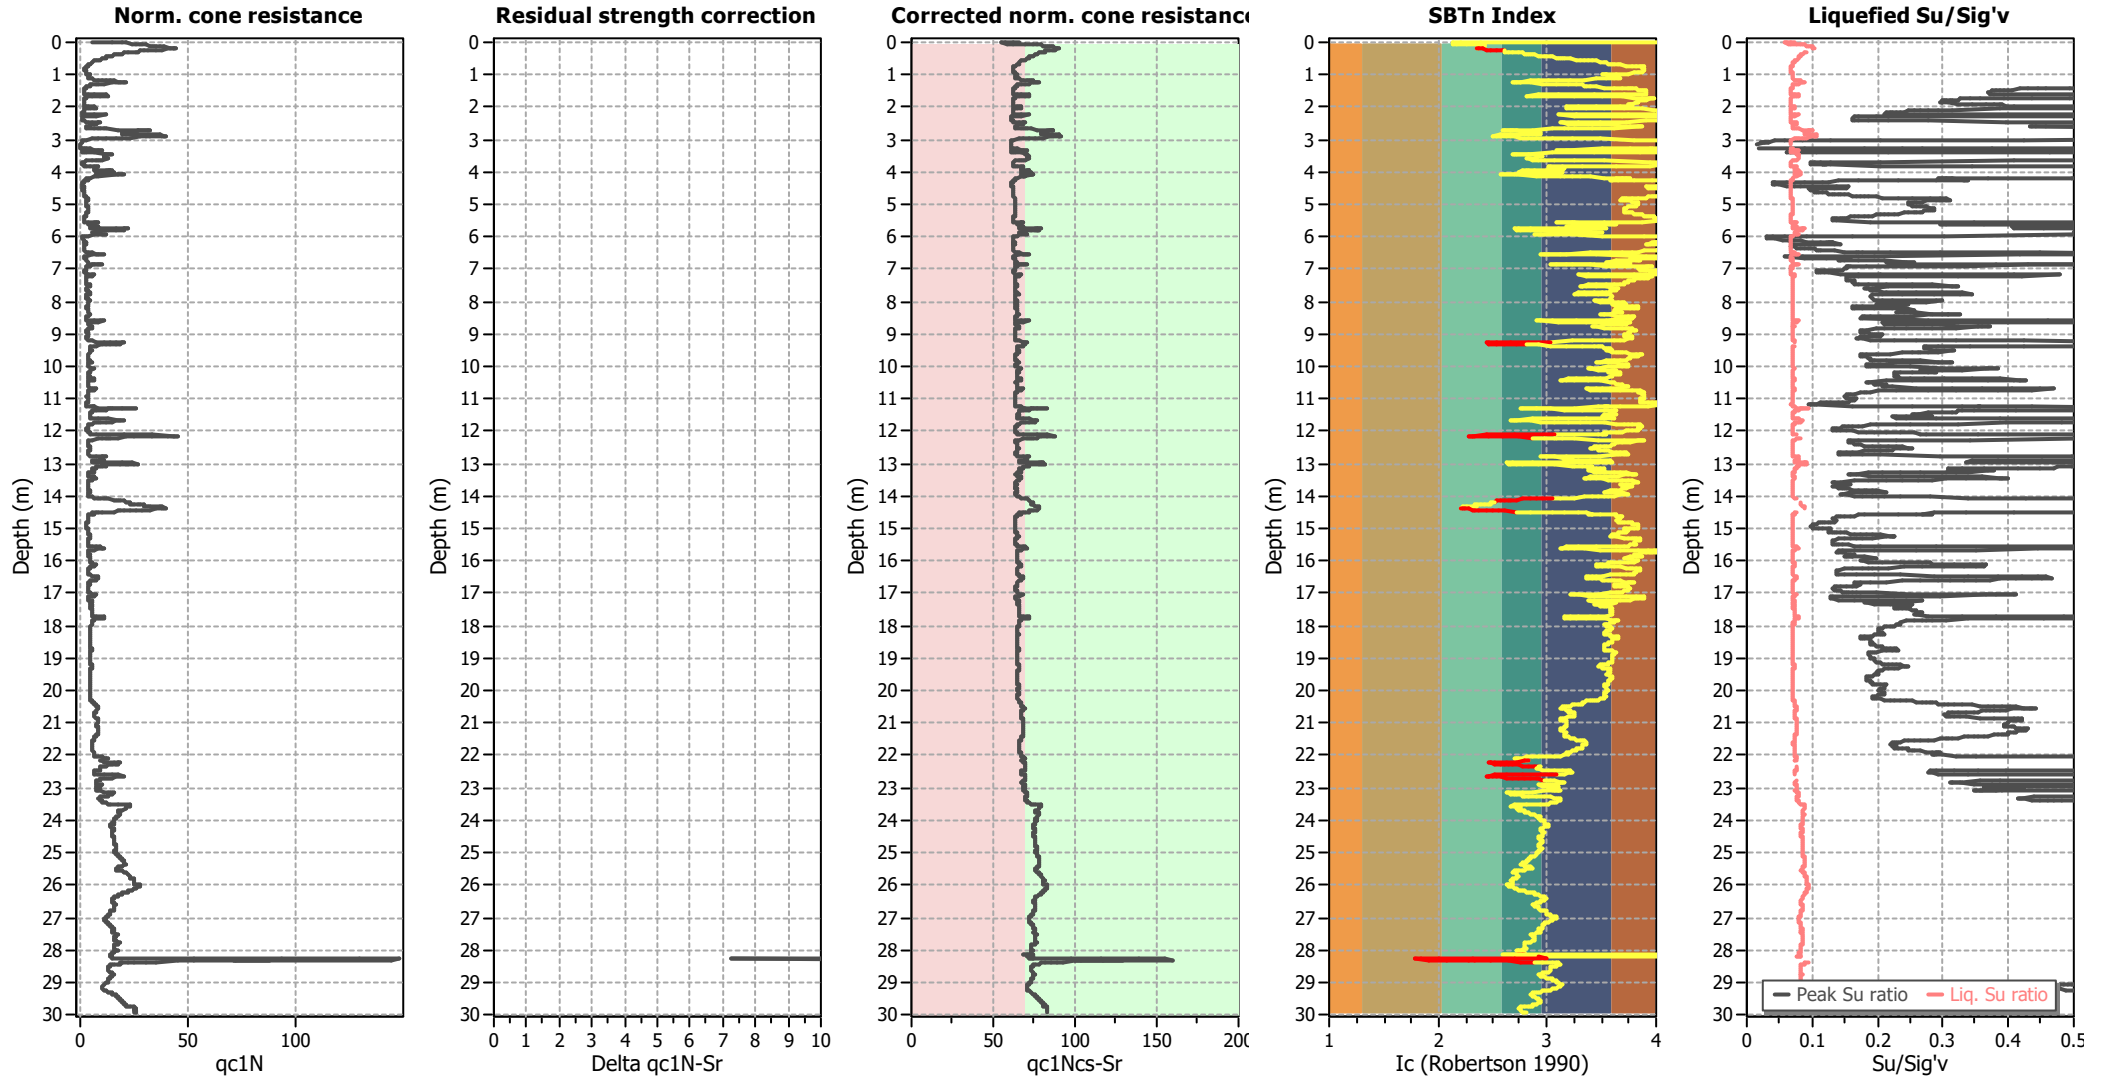

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

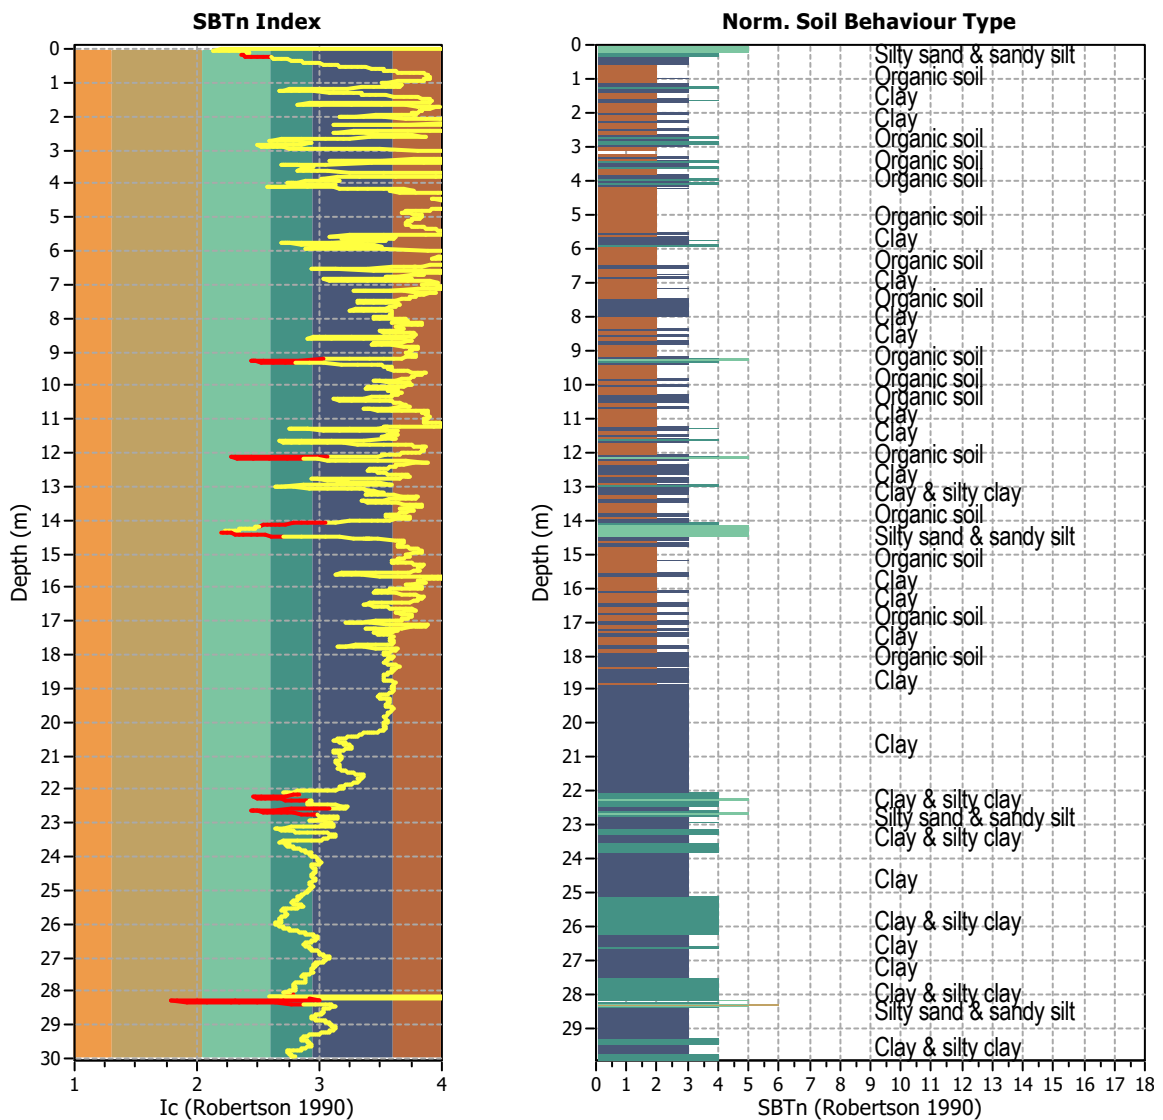


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2994
 Total points excluded: 118
 Exclusion percentage: 3.94%
 Number of layers detected: 14


Estimation of post-earthquake settlements

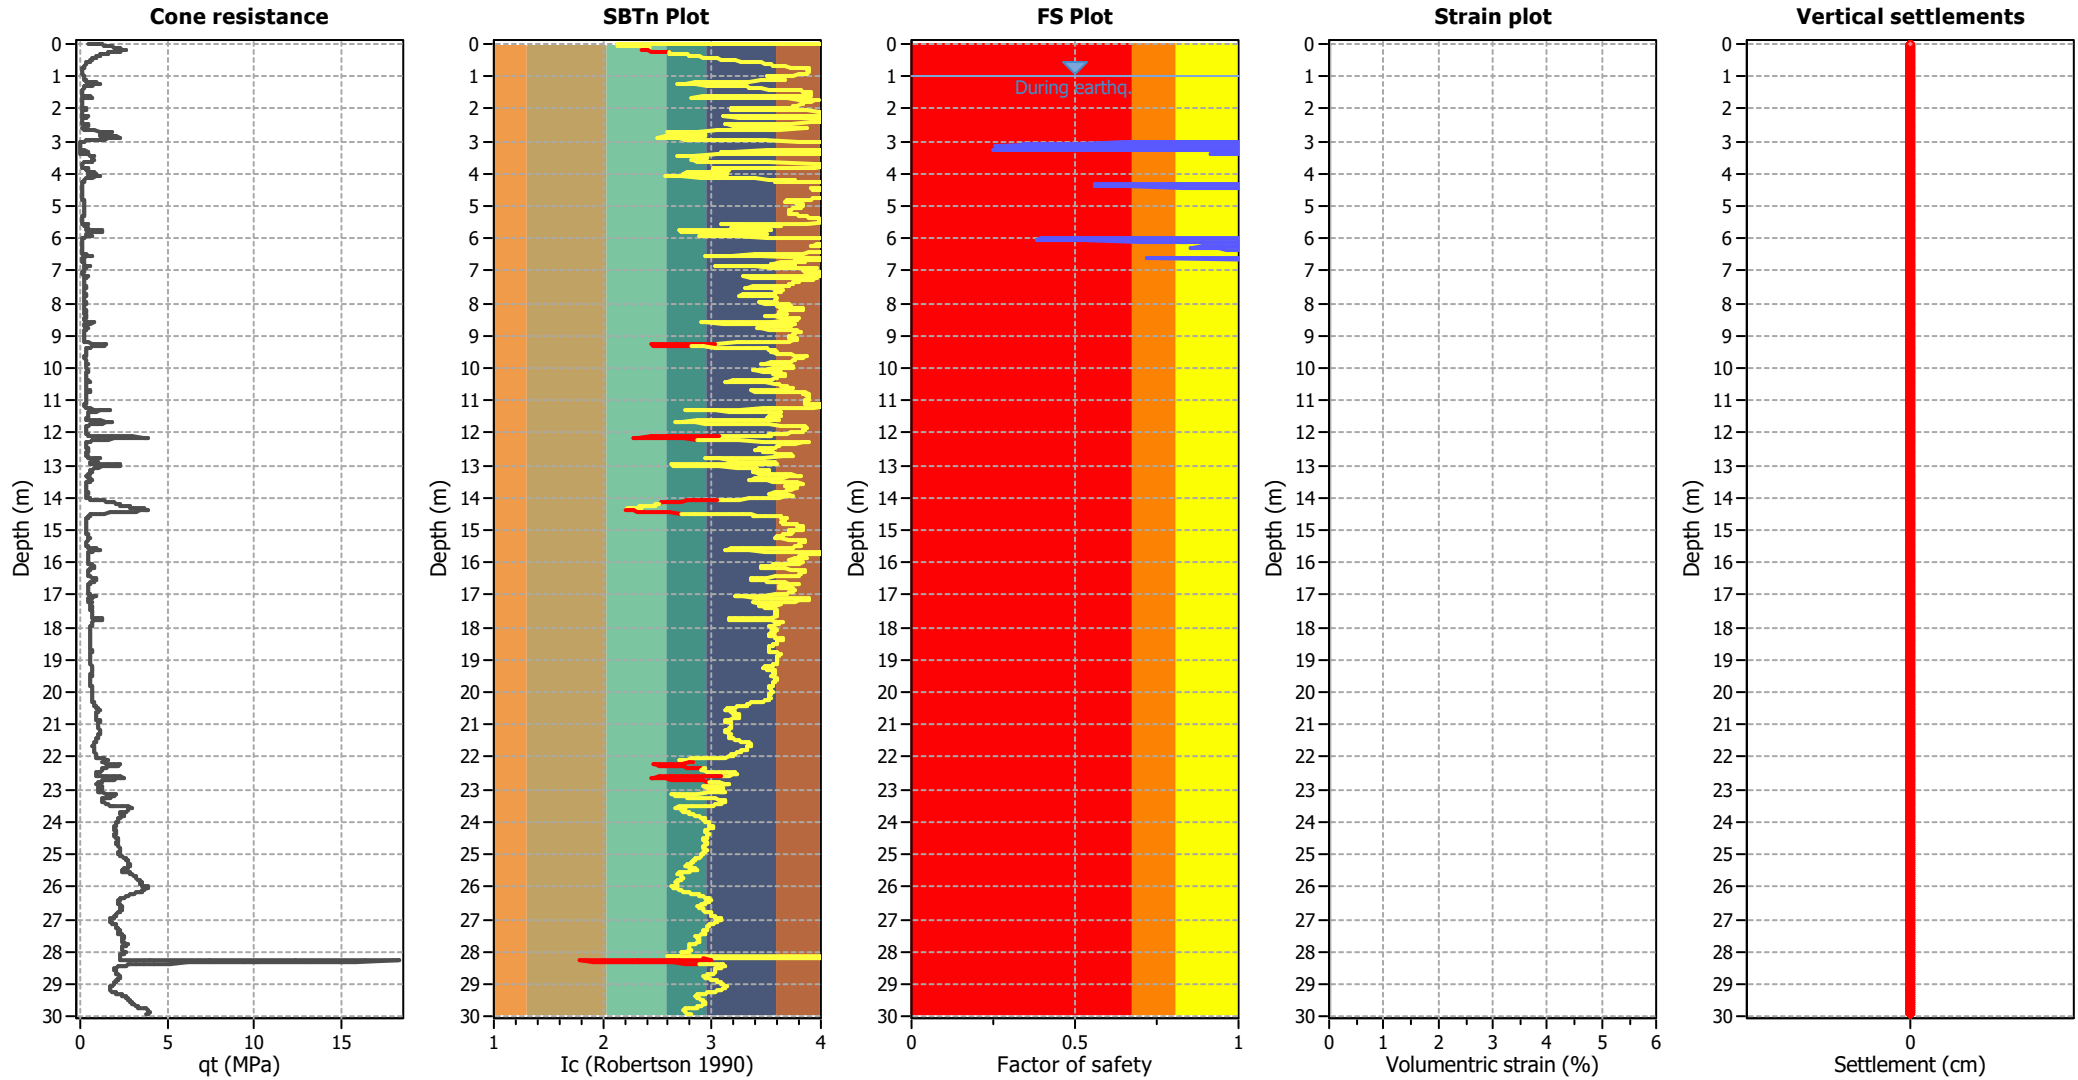

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

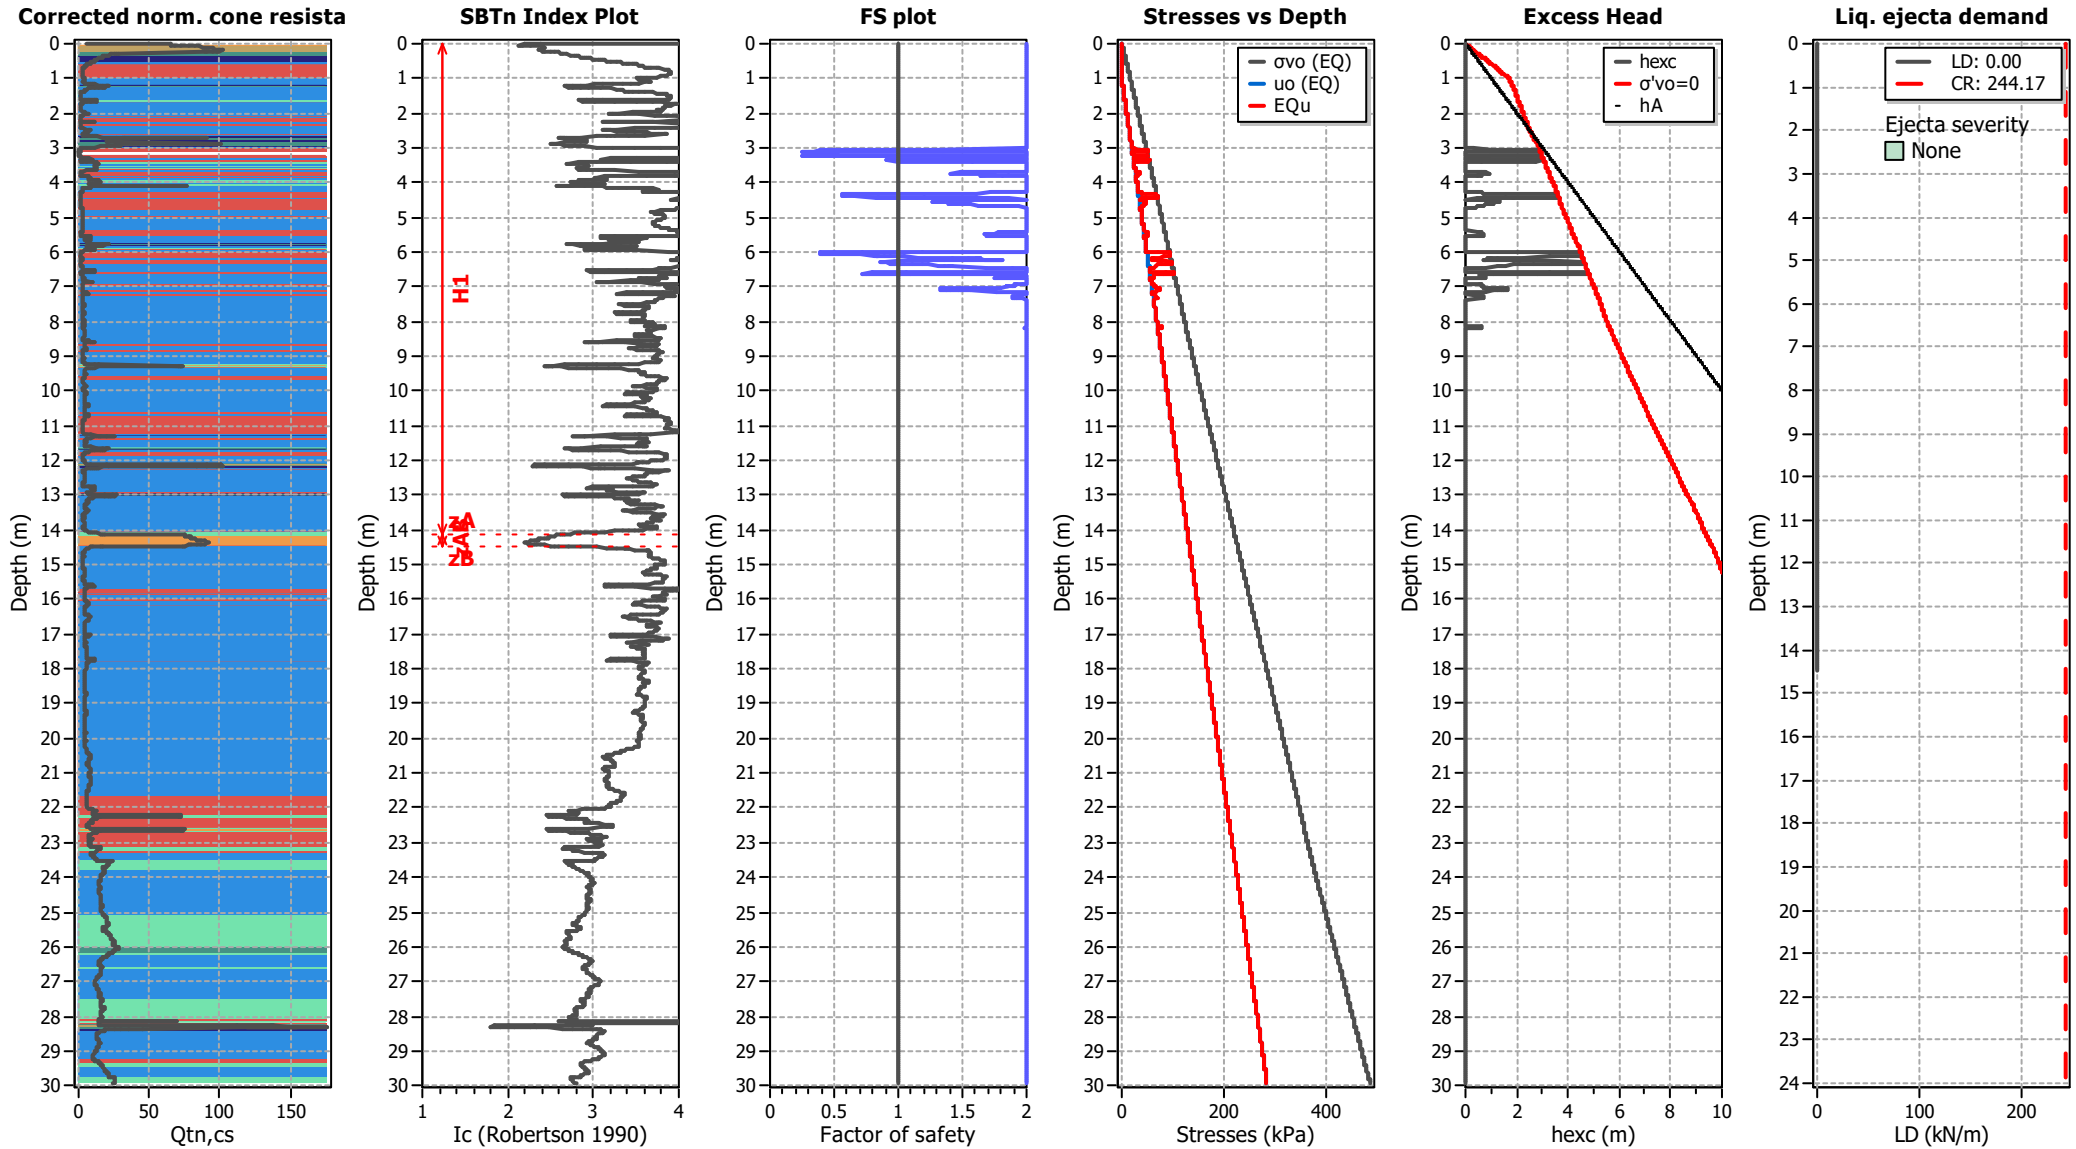

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT07

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

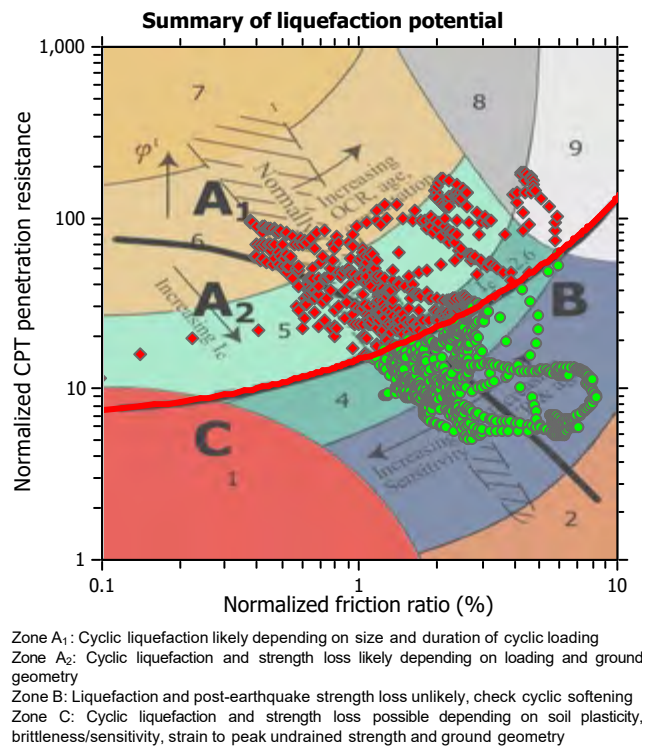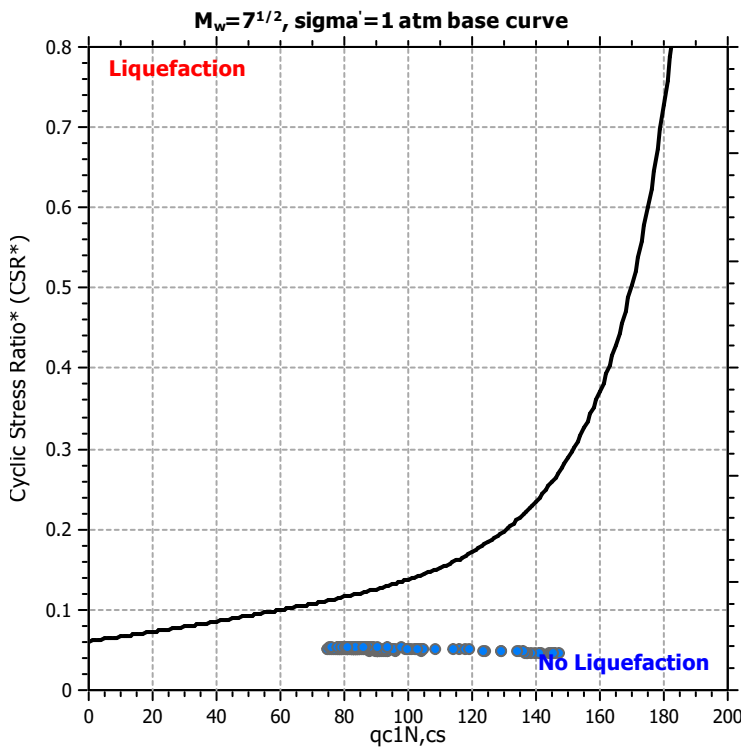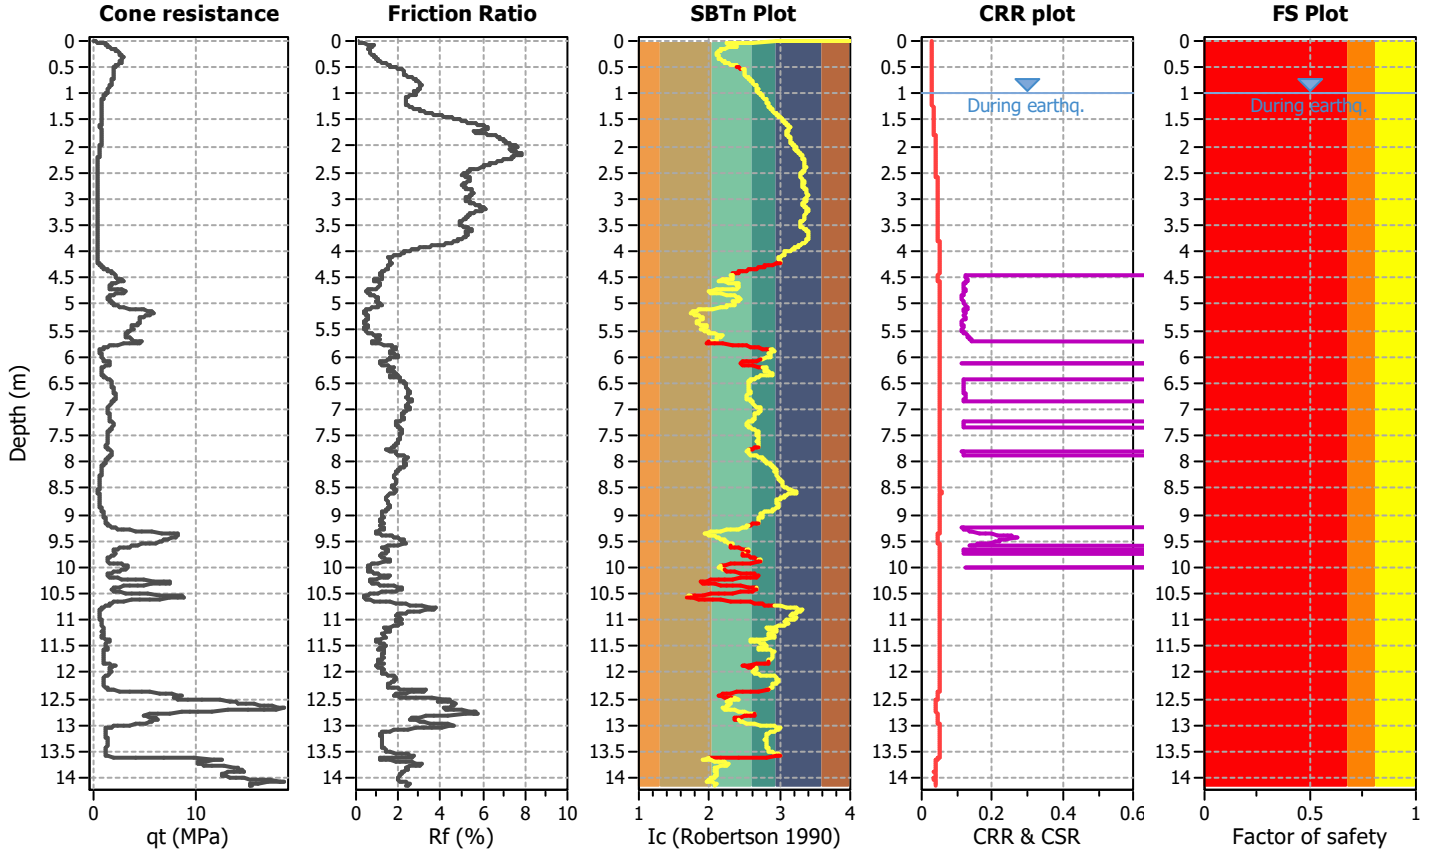

CPT basic interpretation plots

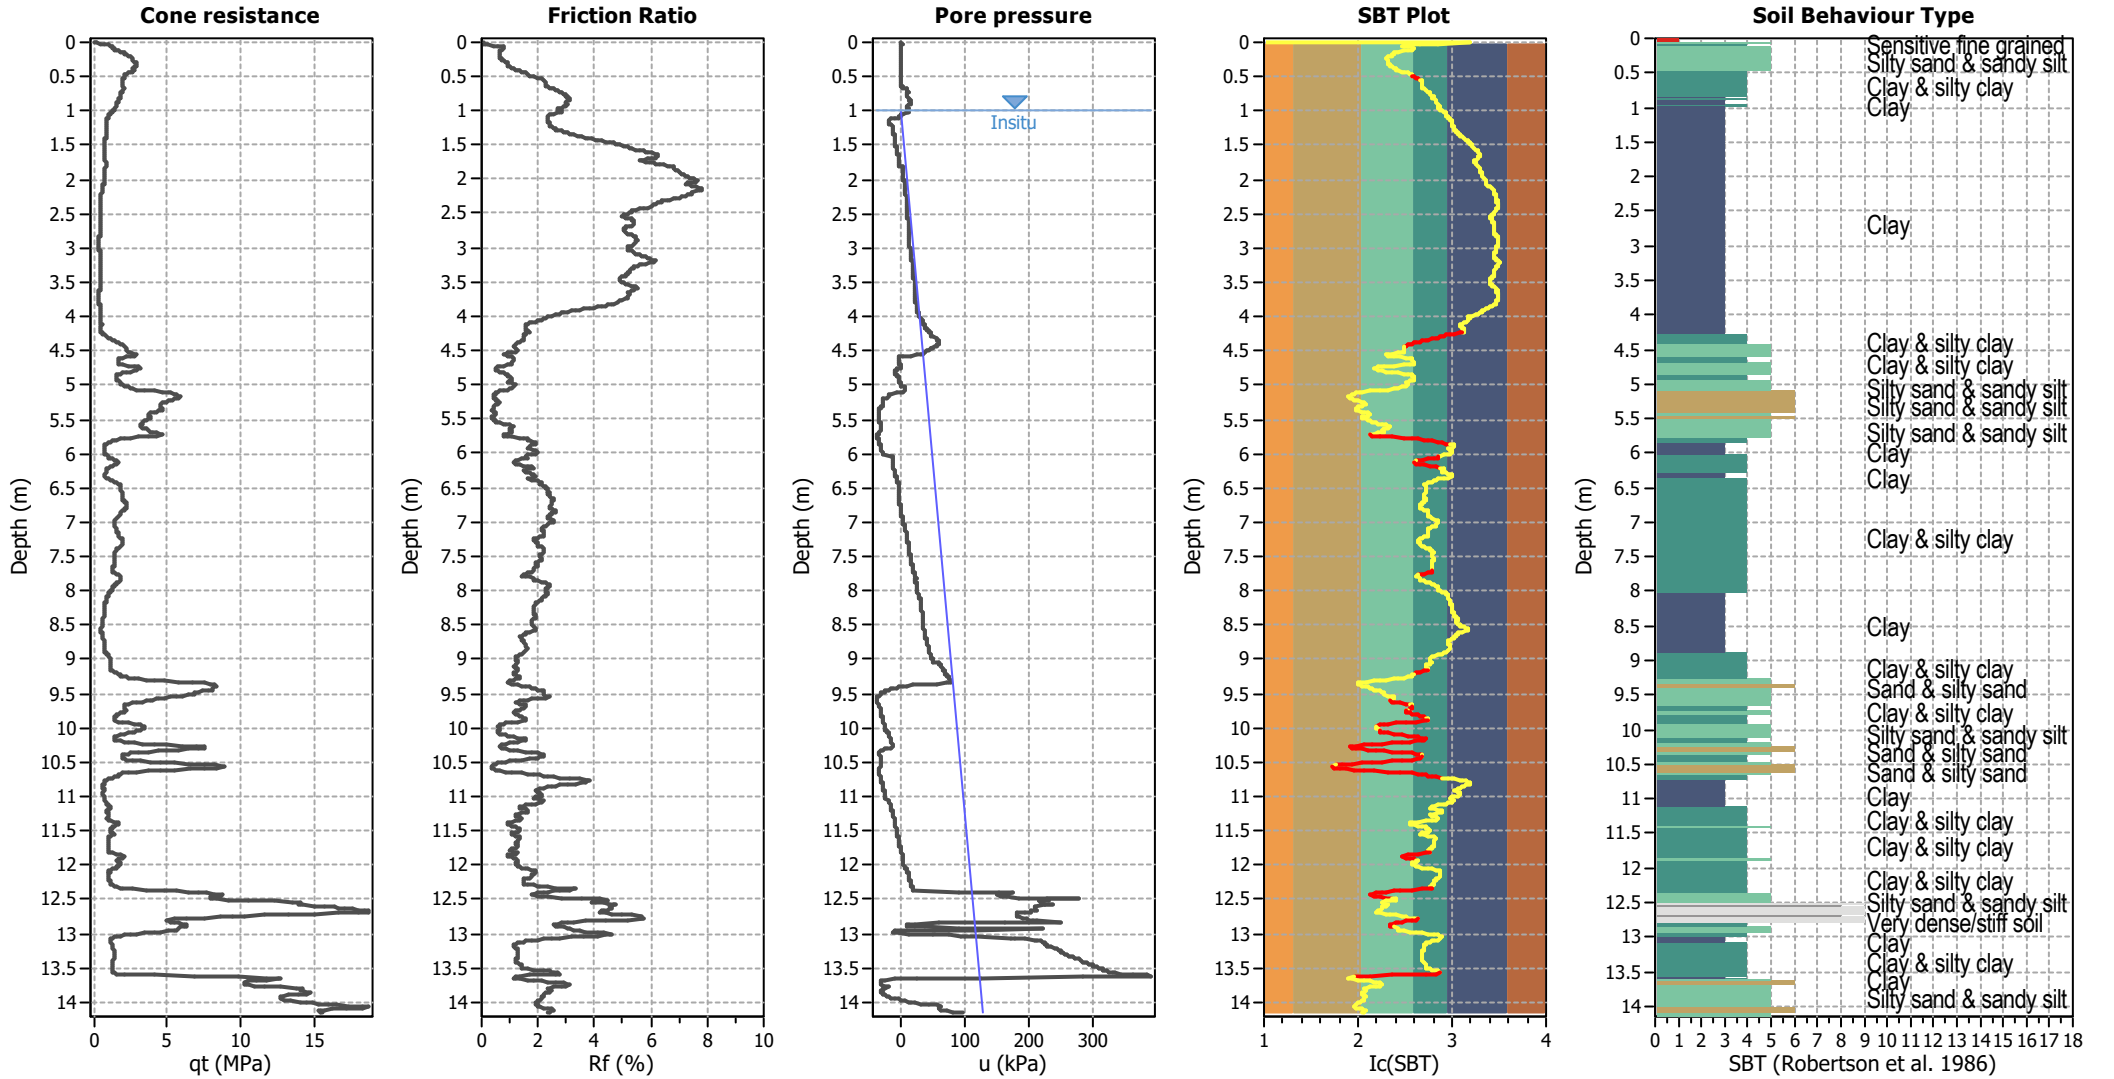


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_p applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

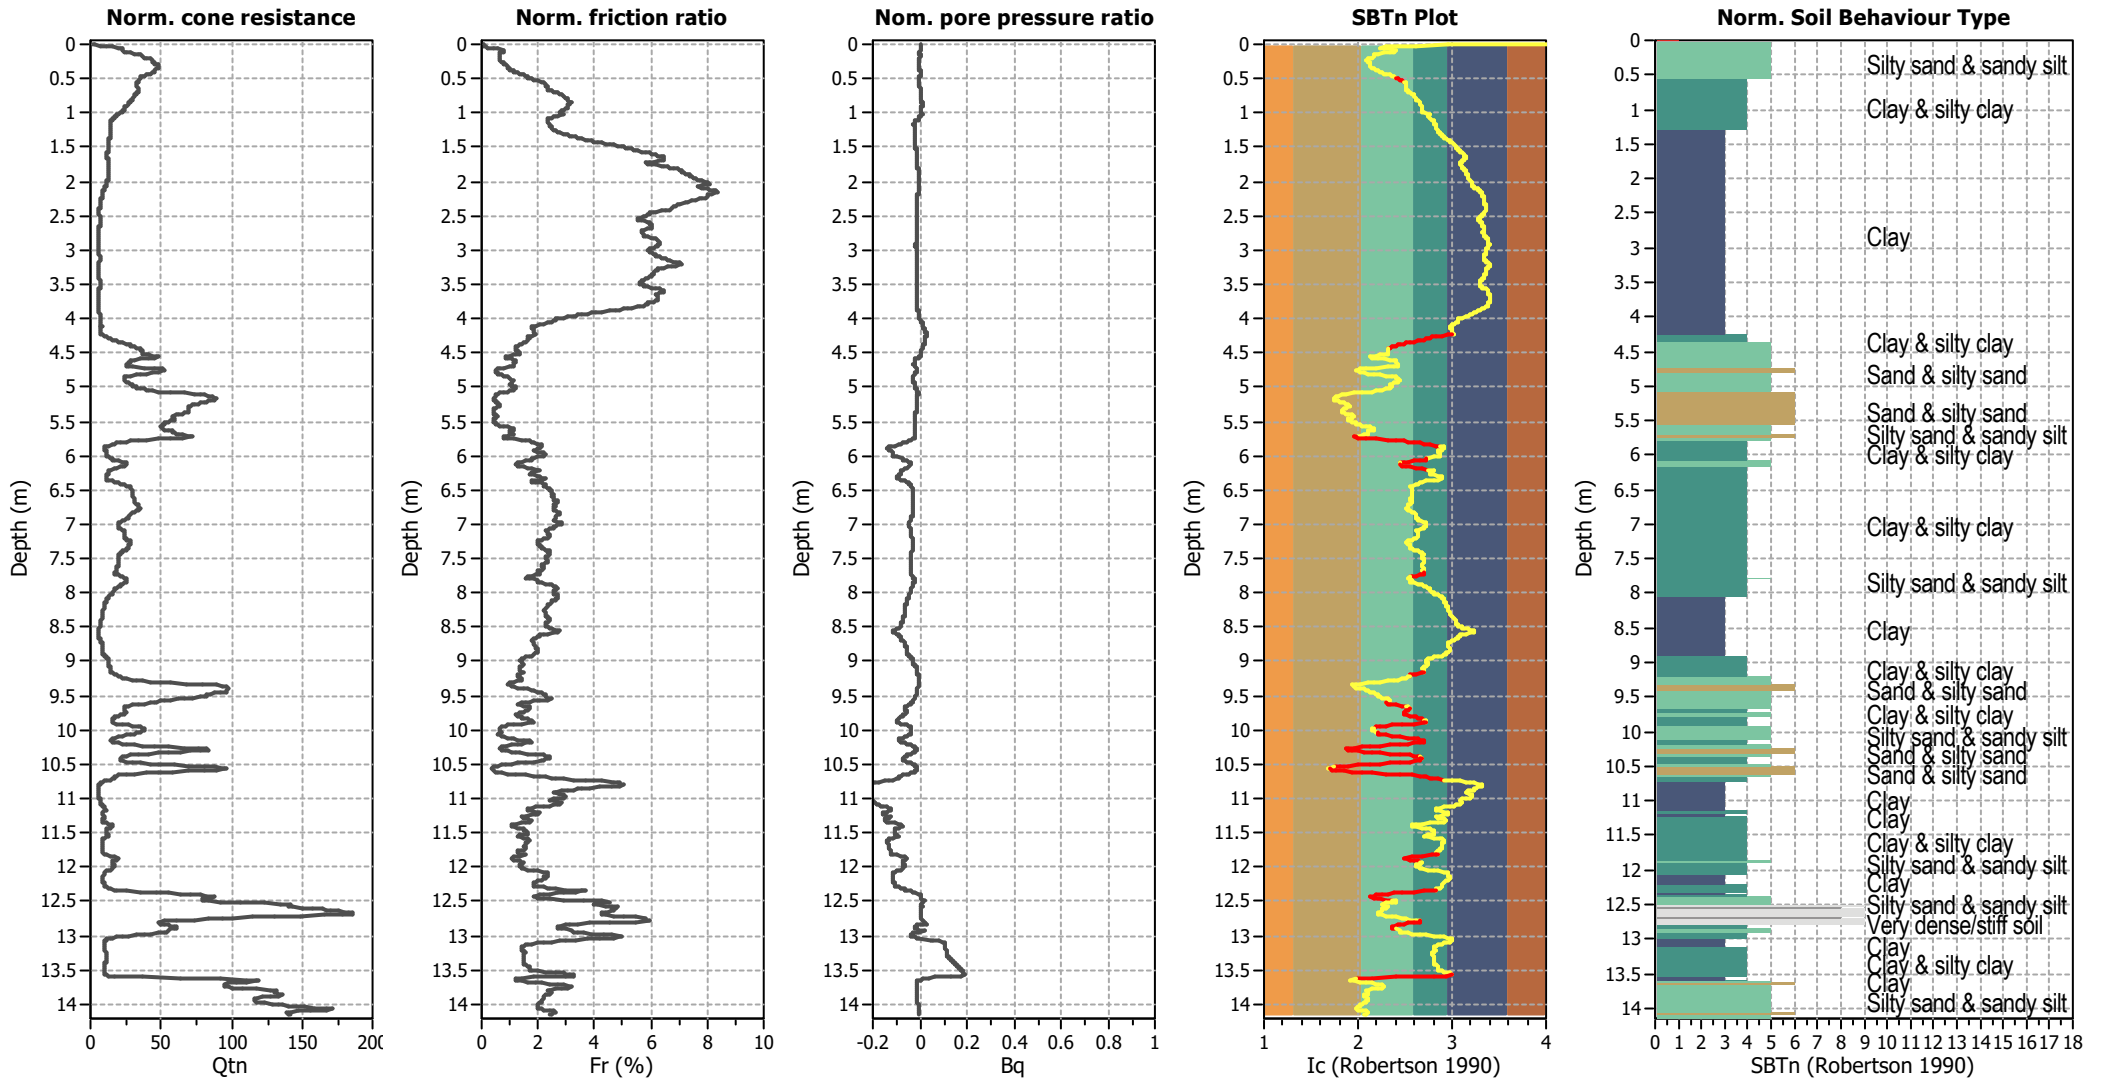


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

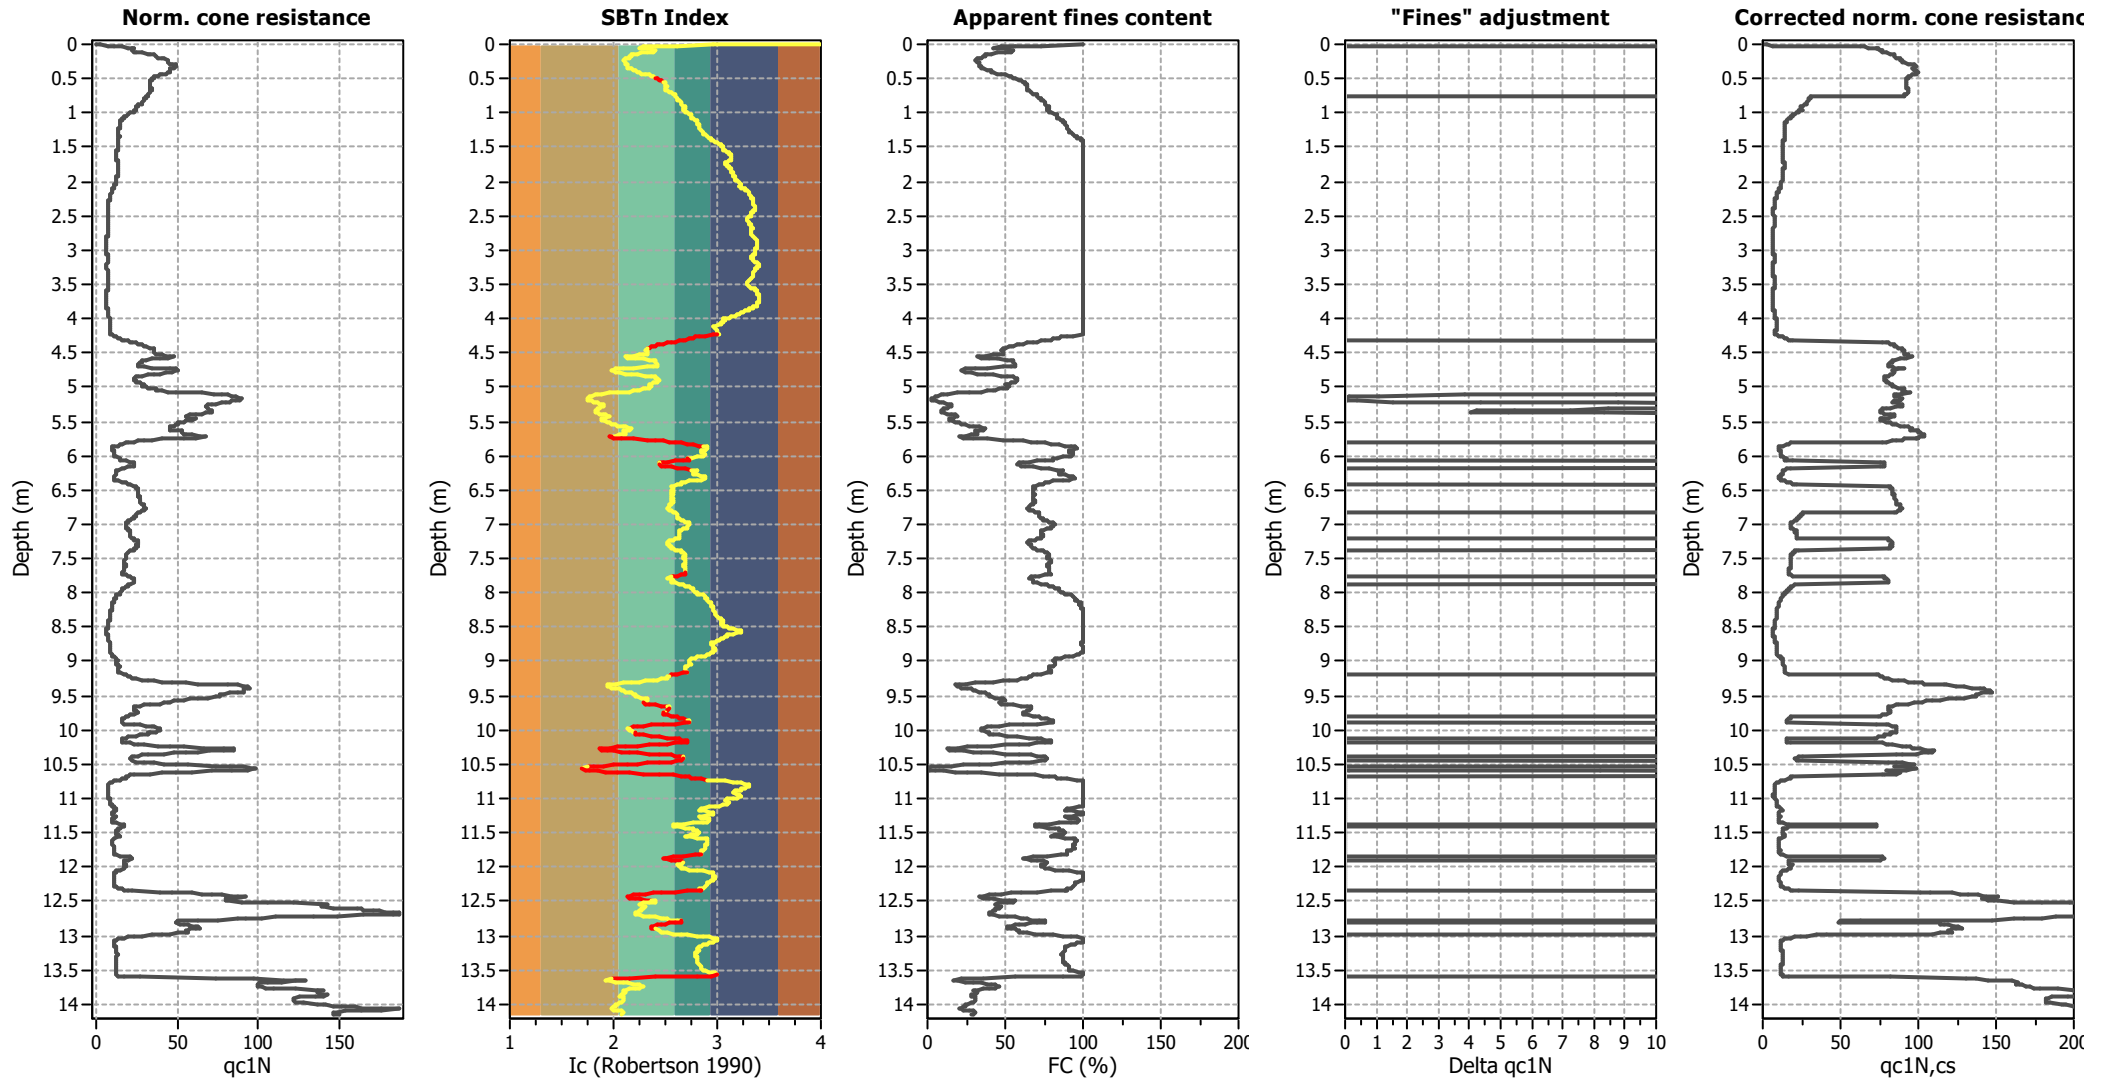

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

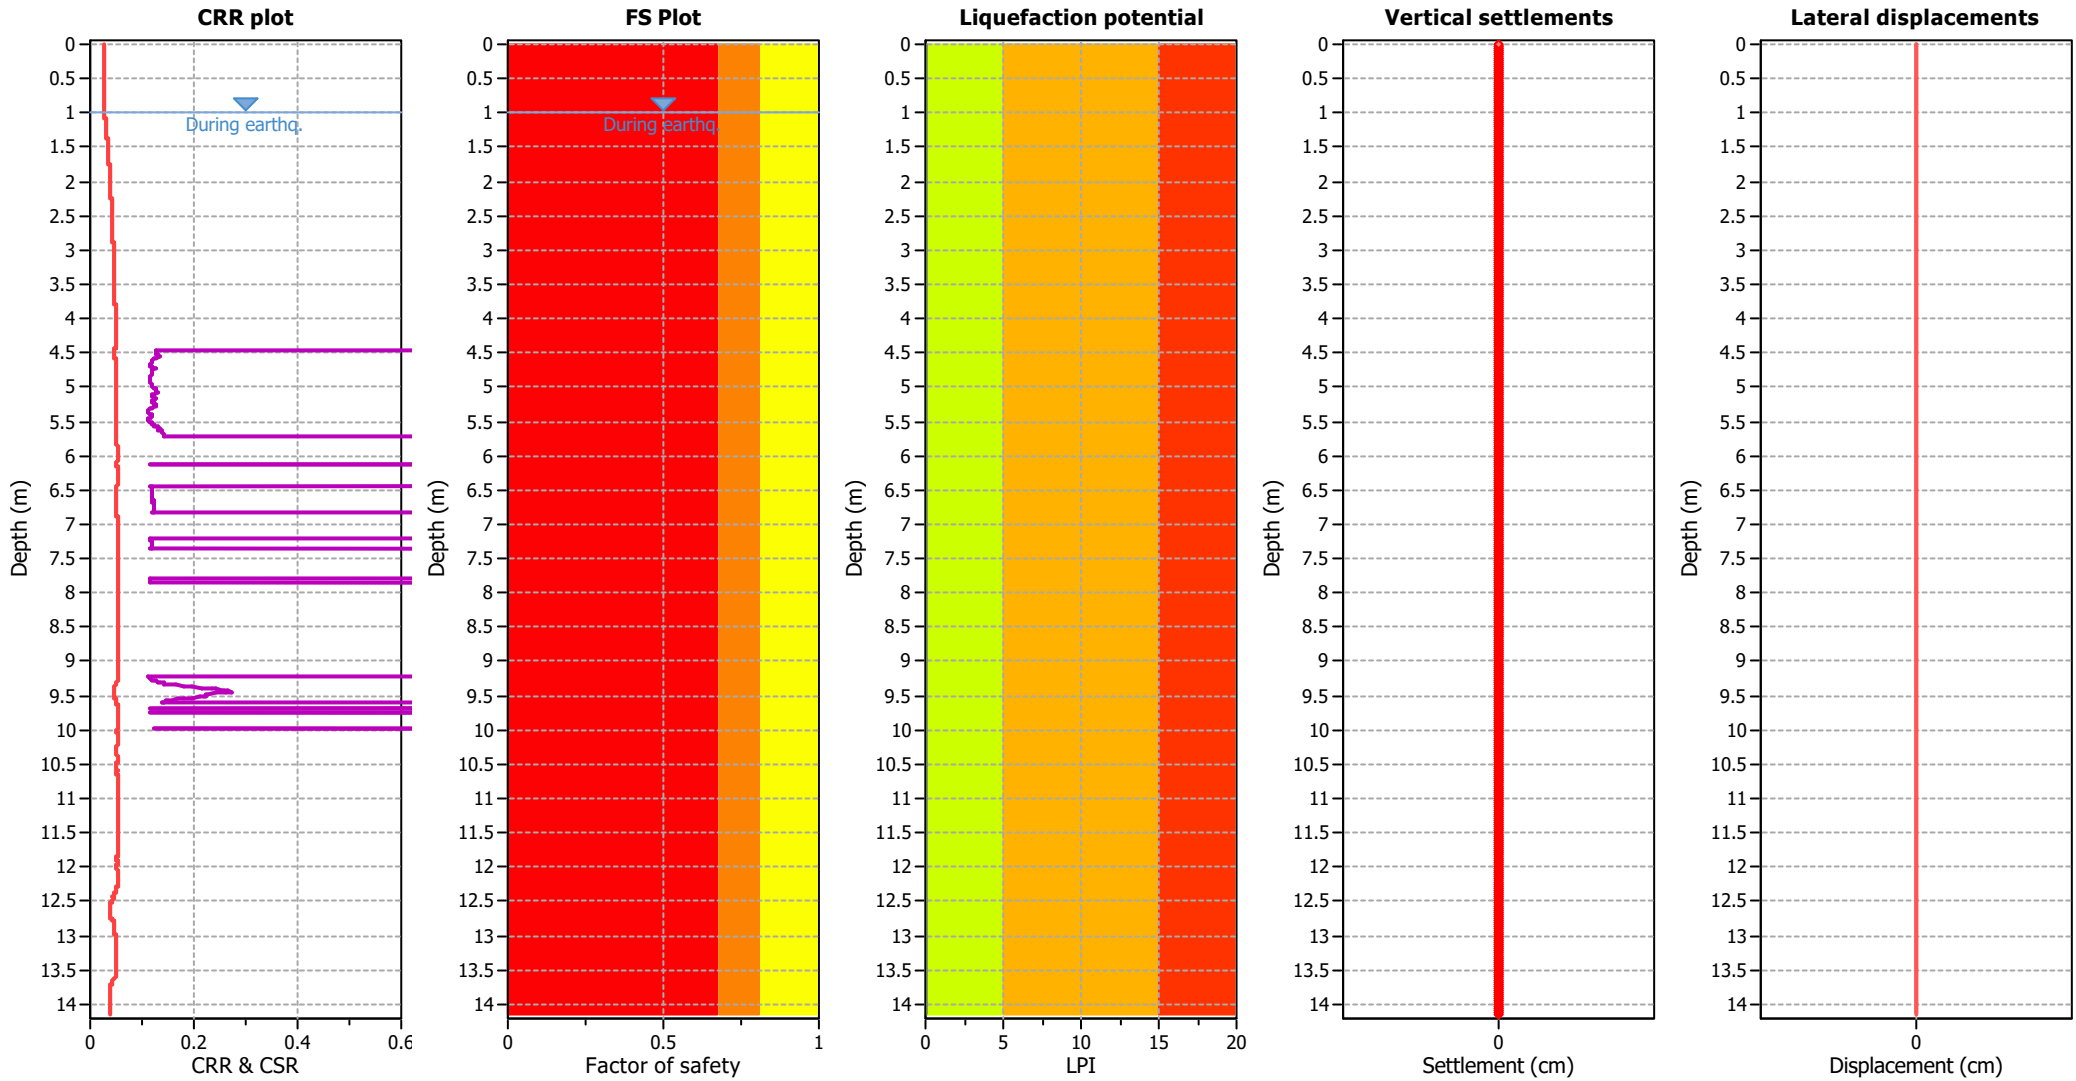

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

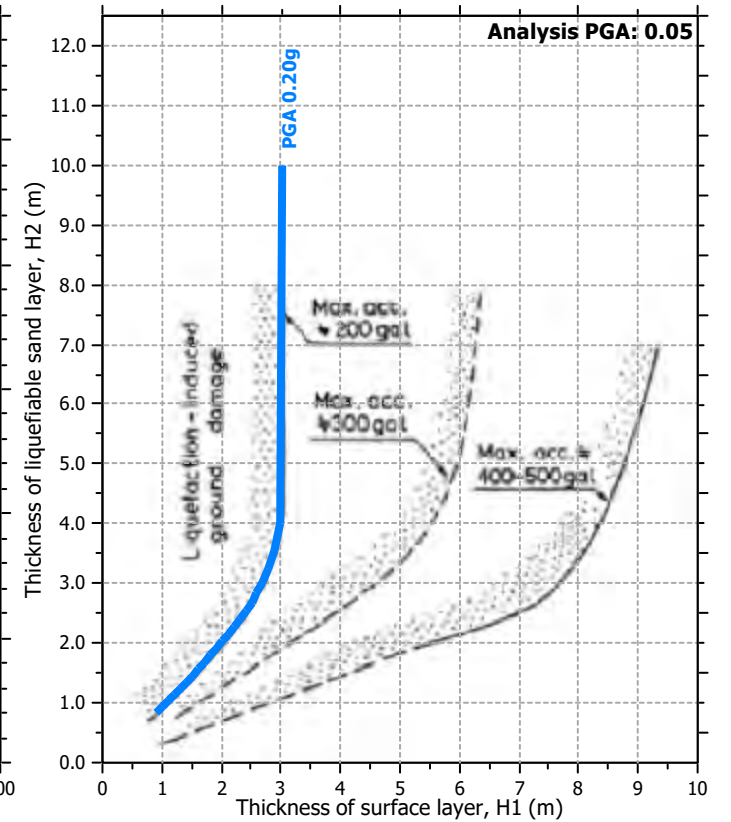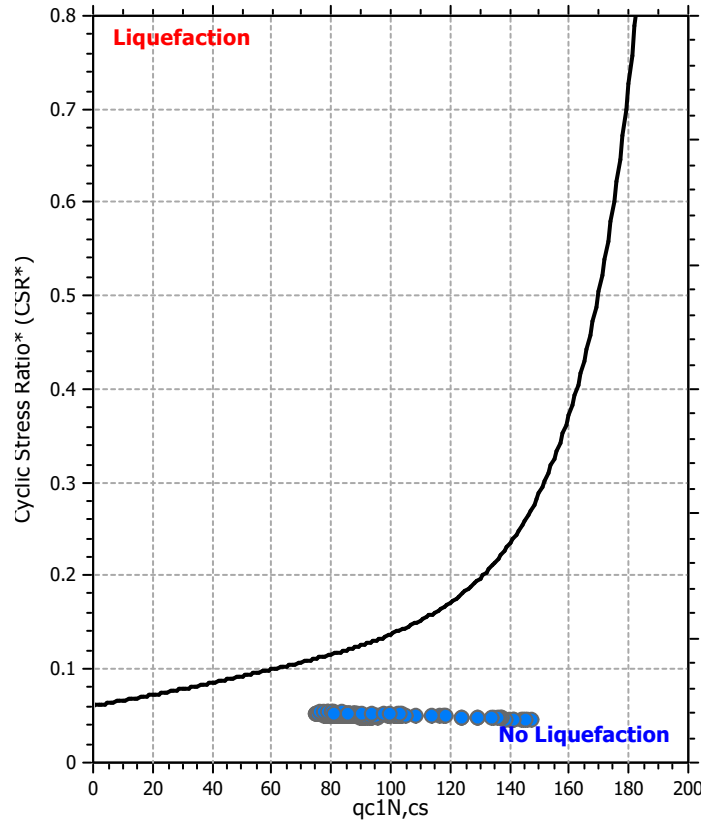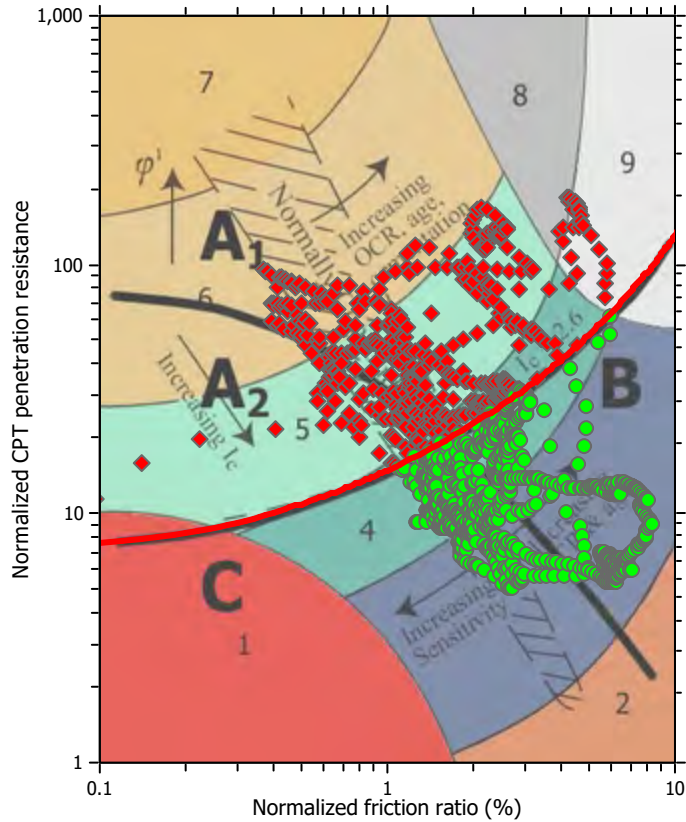

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

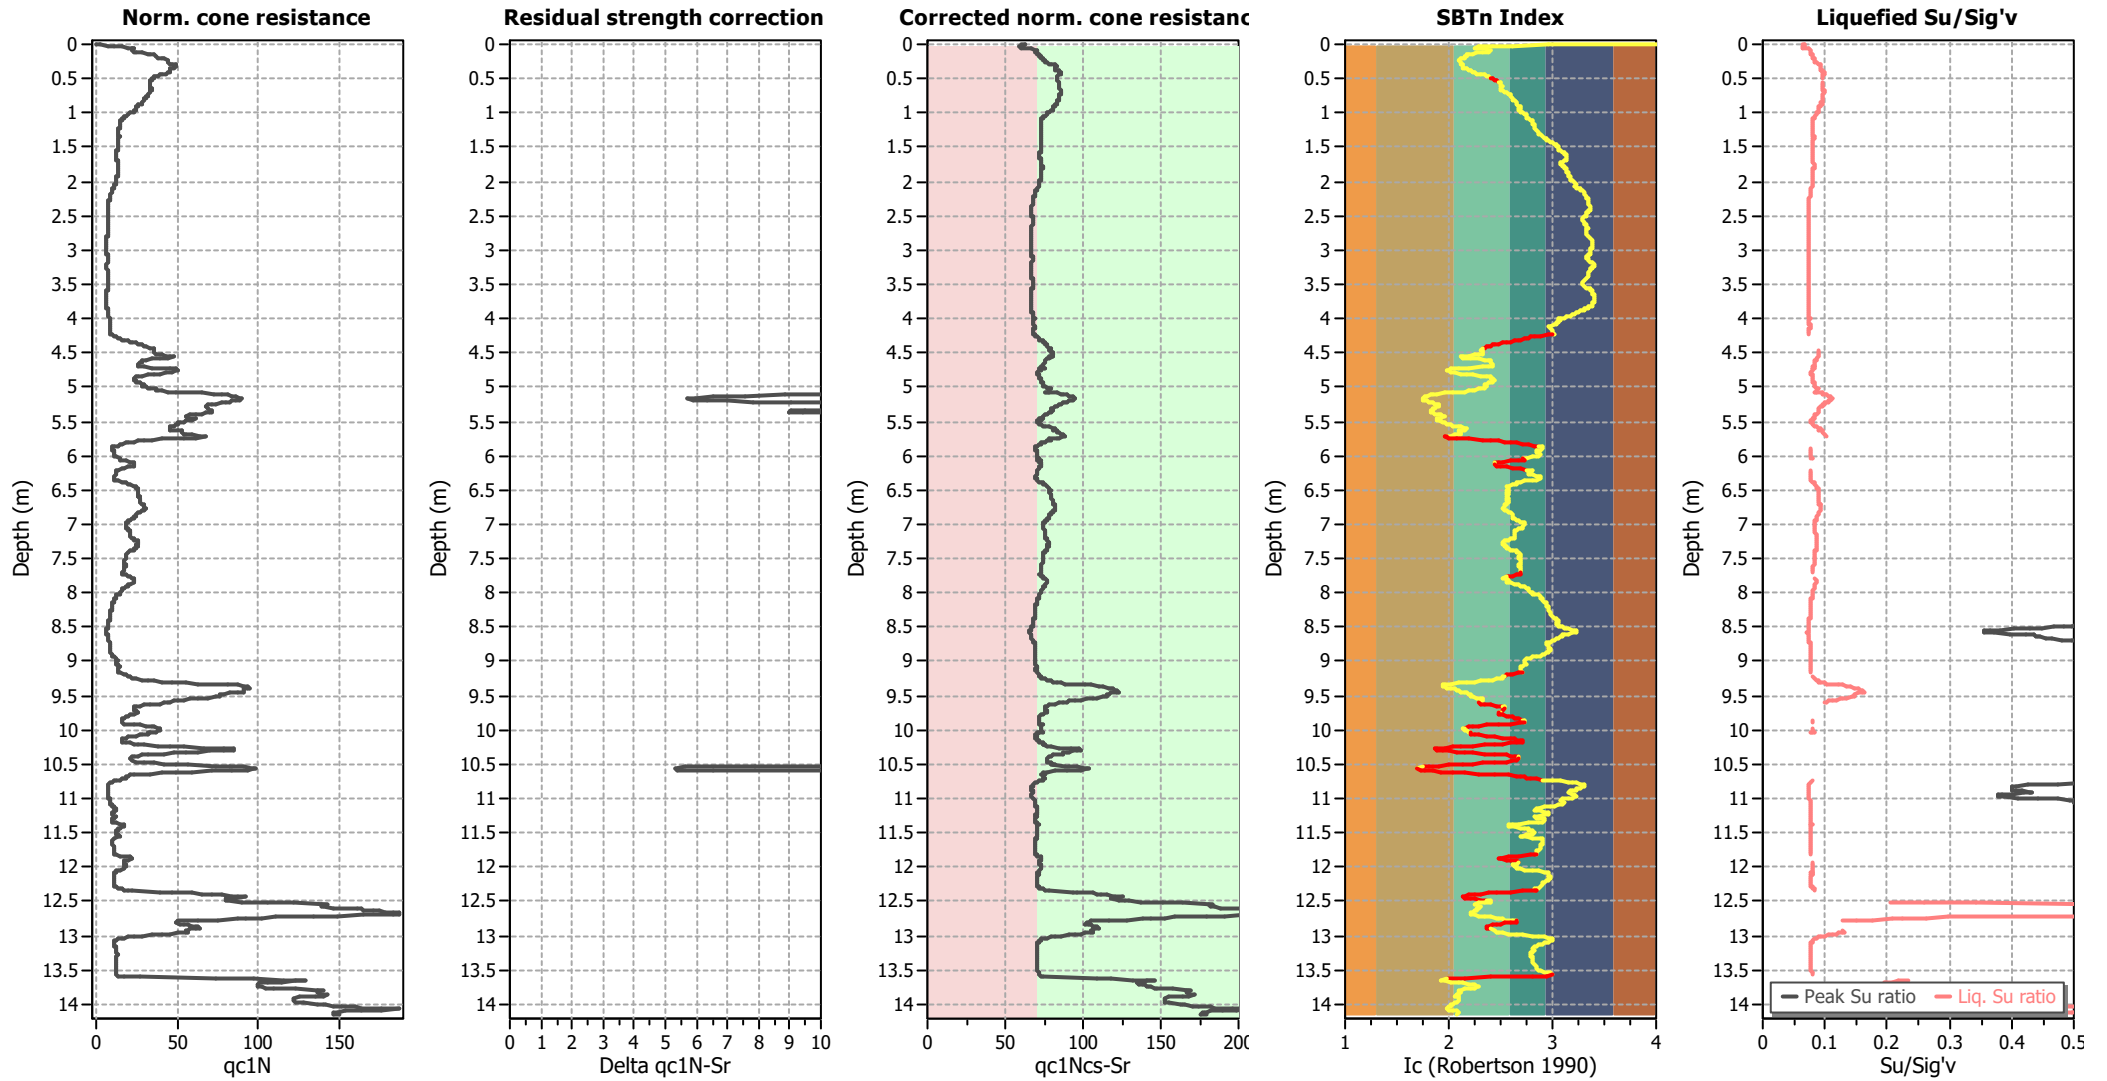

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

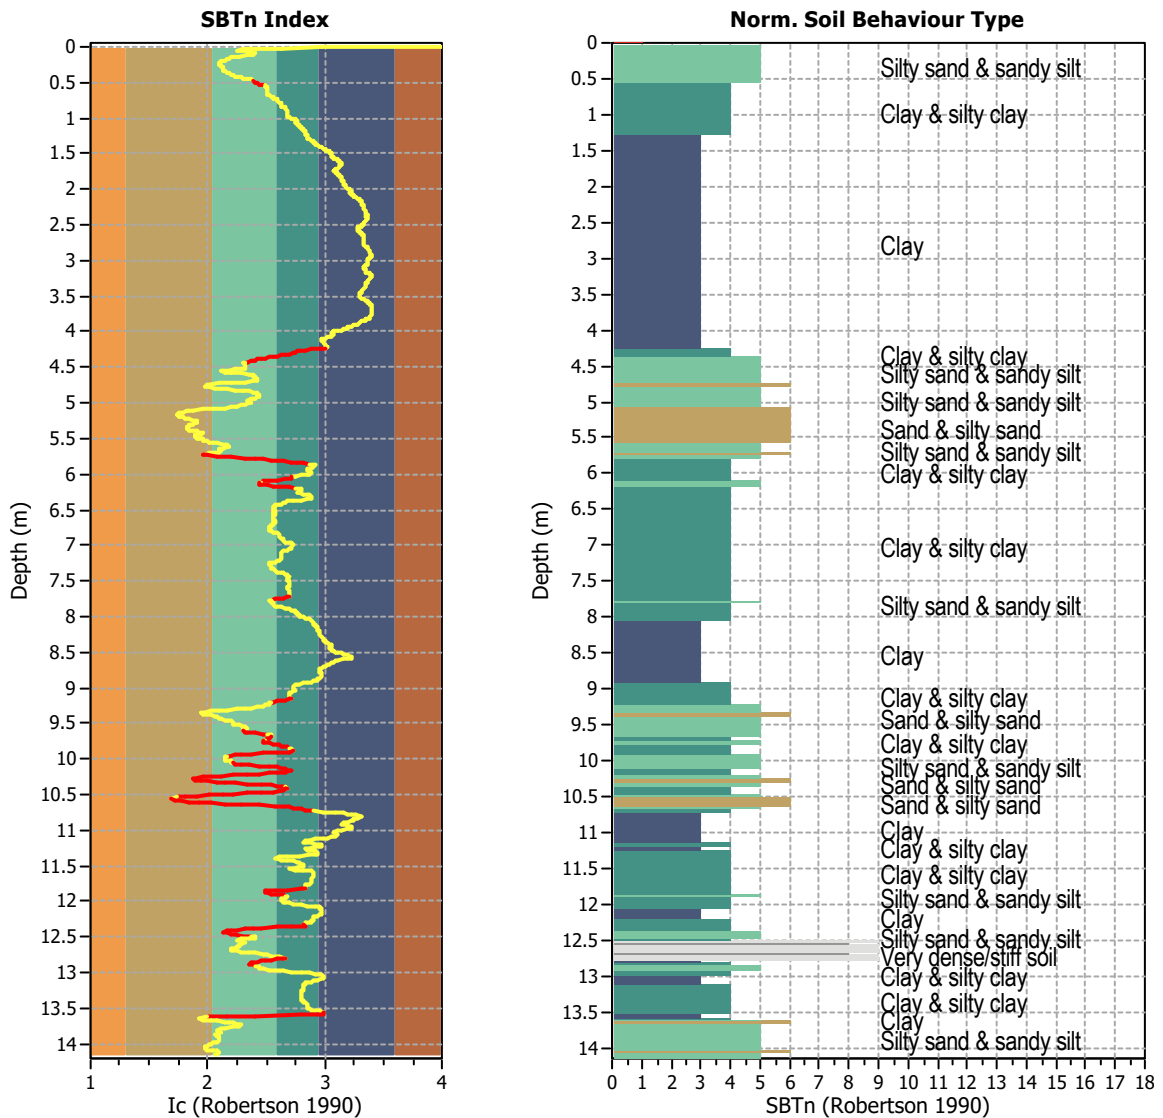


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1416
 Total points excluded: 222
 Exclusion percentage: 15.68%
 Number of layers detected: 23


Estimation of post-earthquake settlements

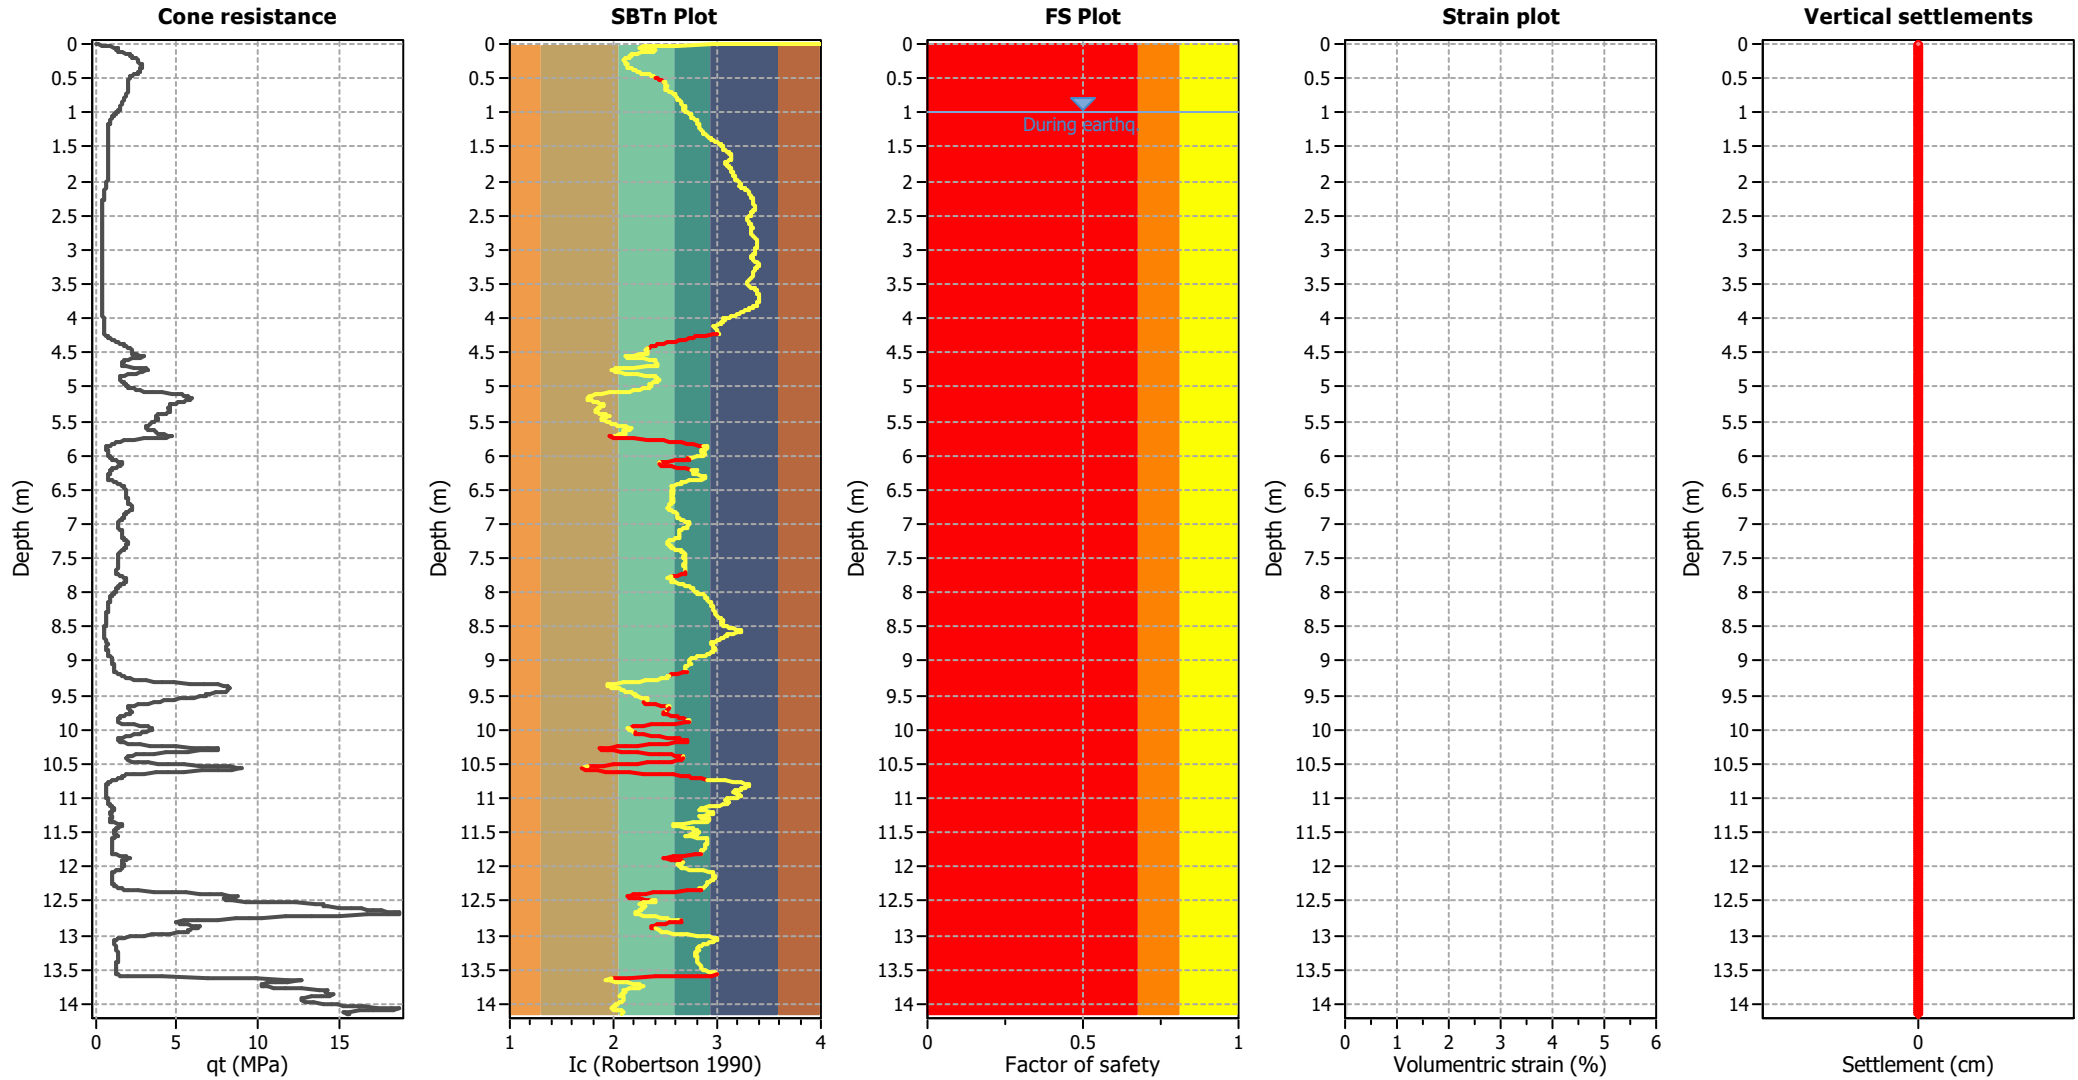

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

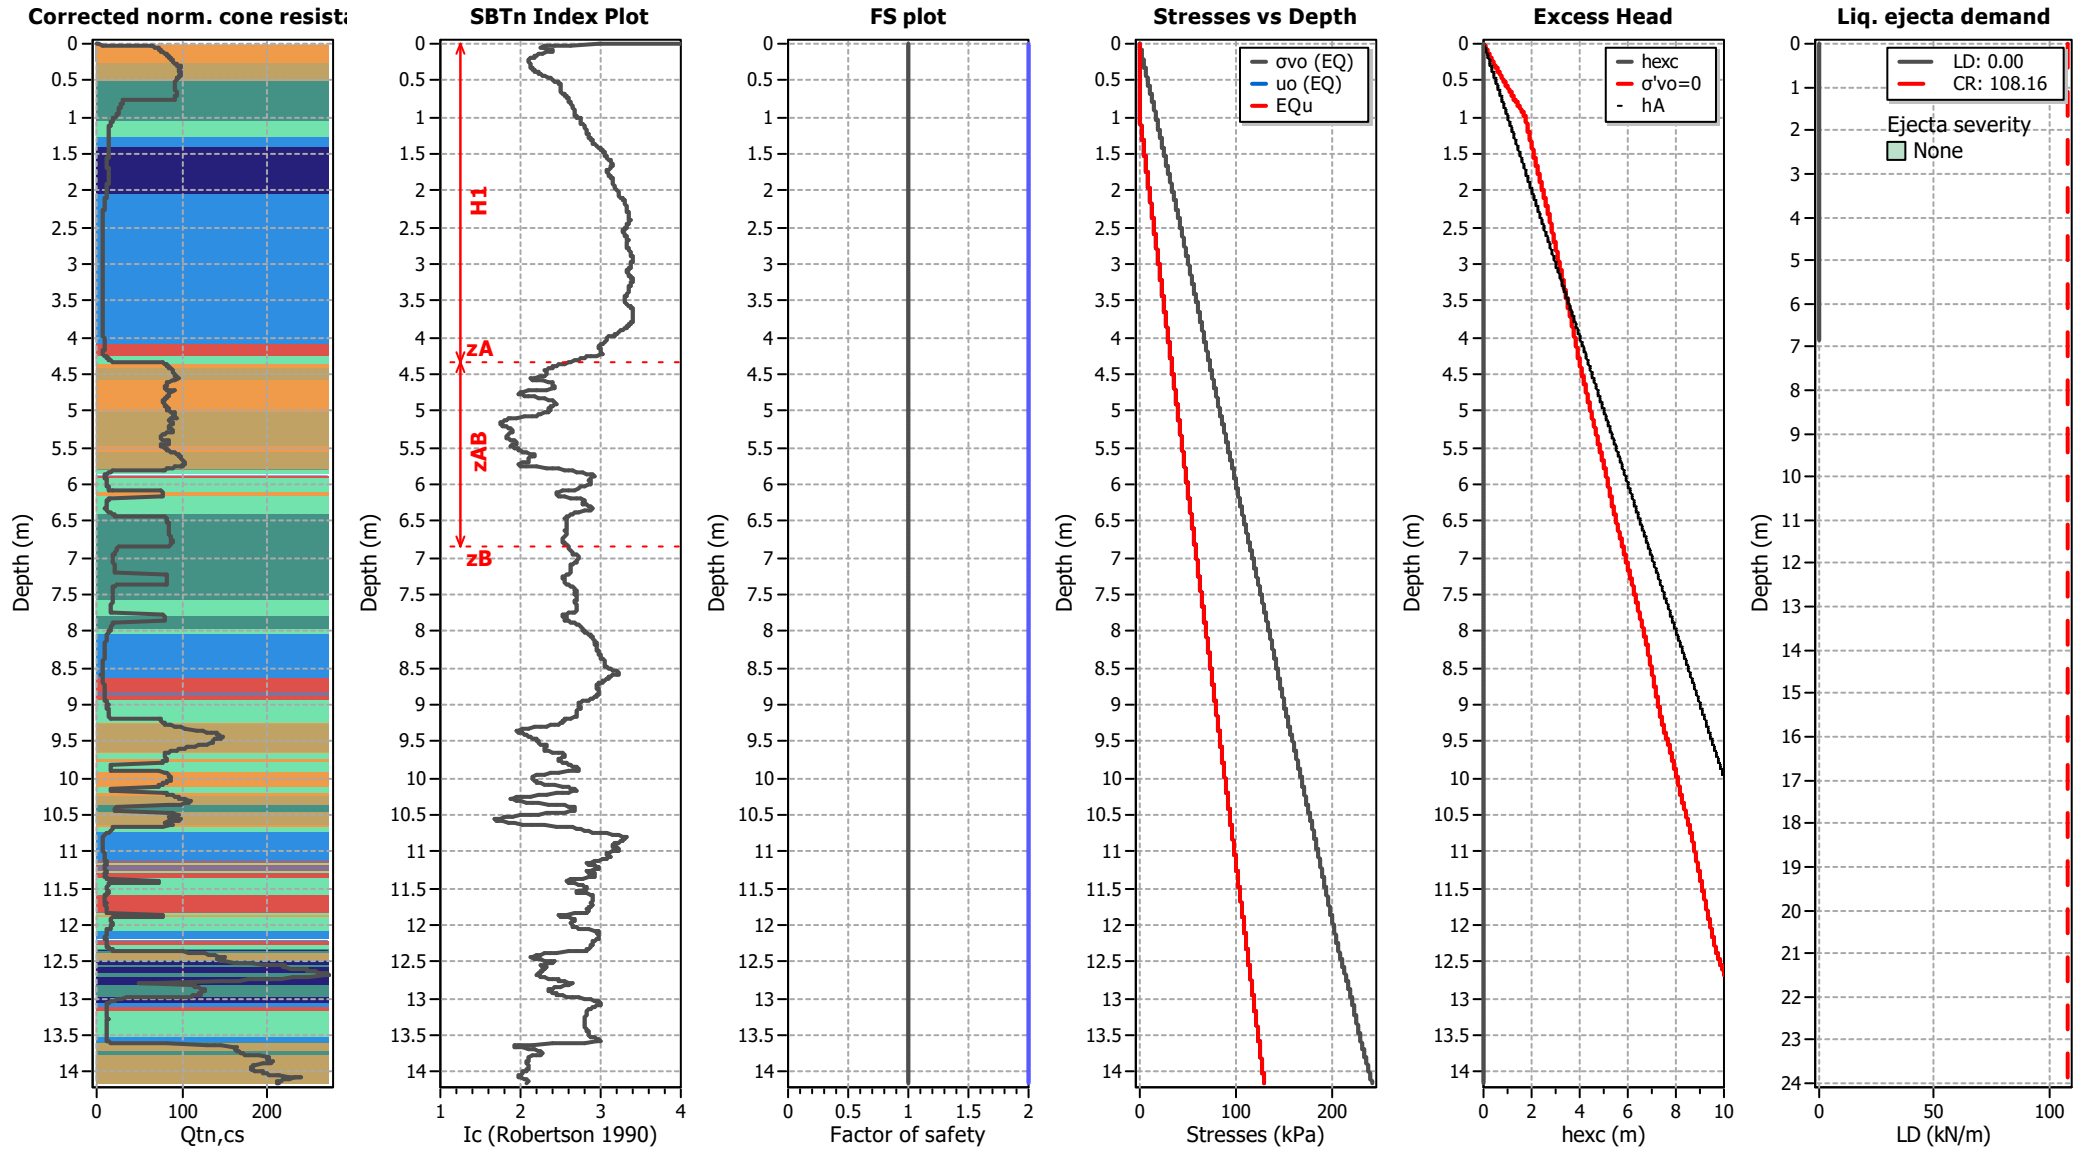

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT08

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	IC cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

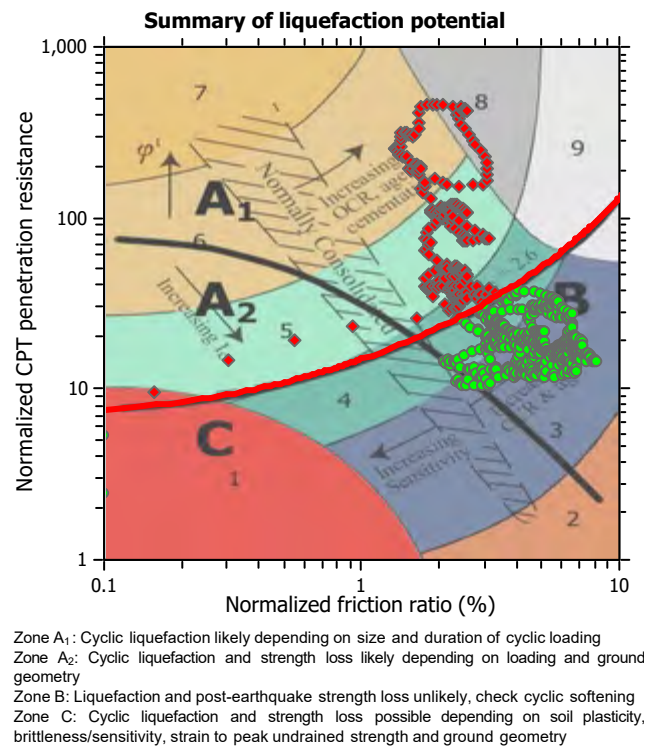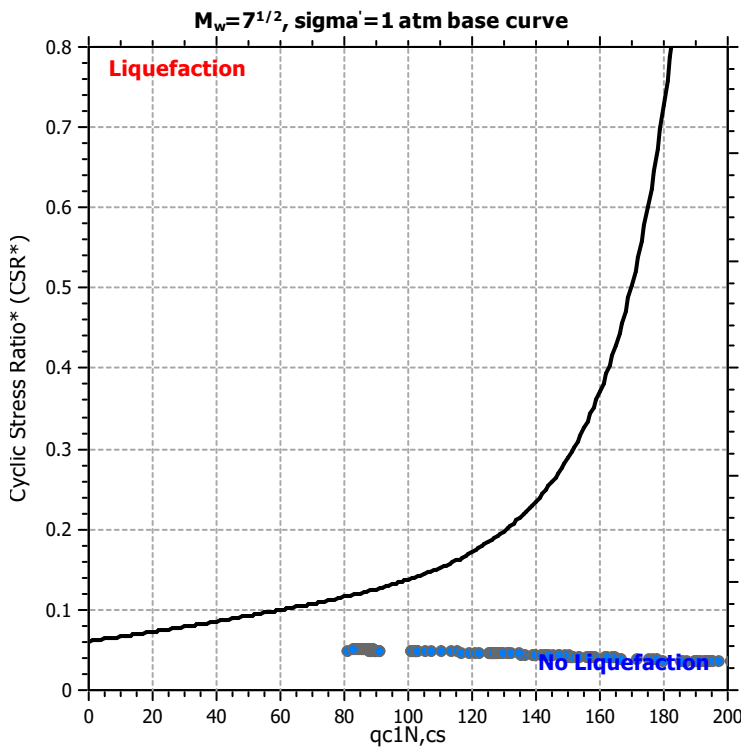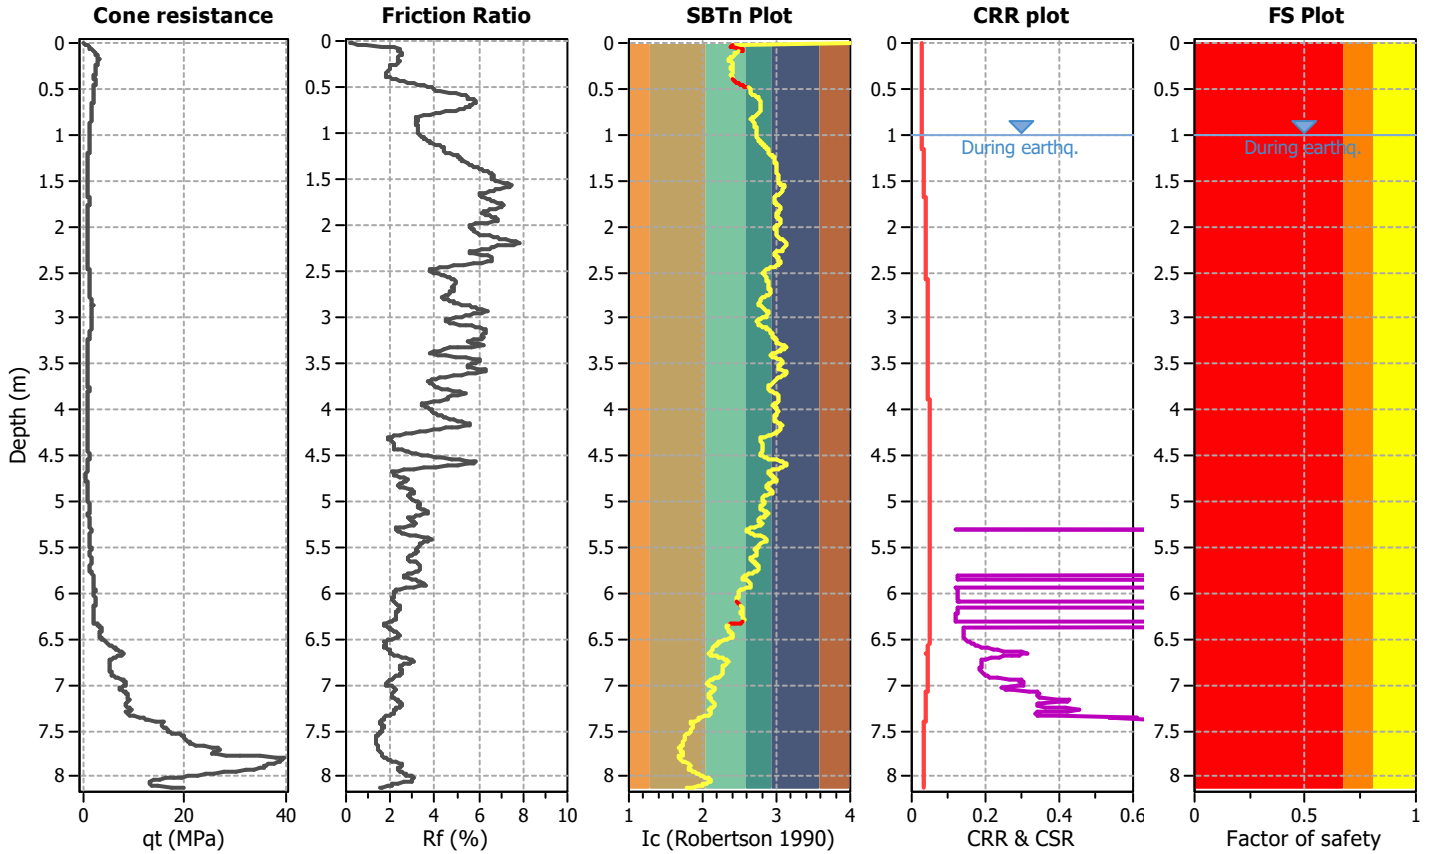

CPT basic interpretation plots

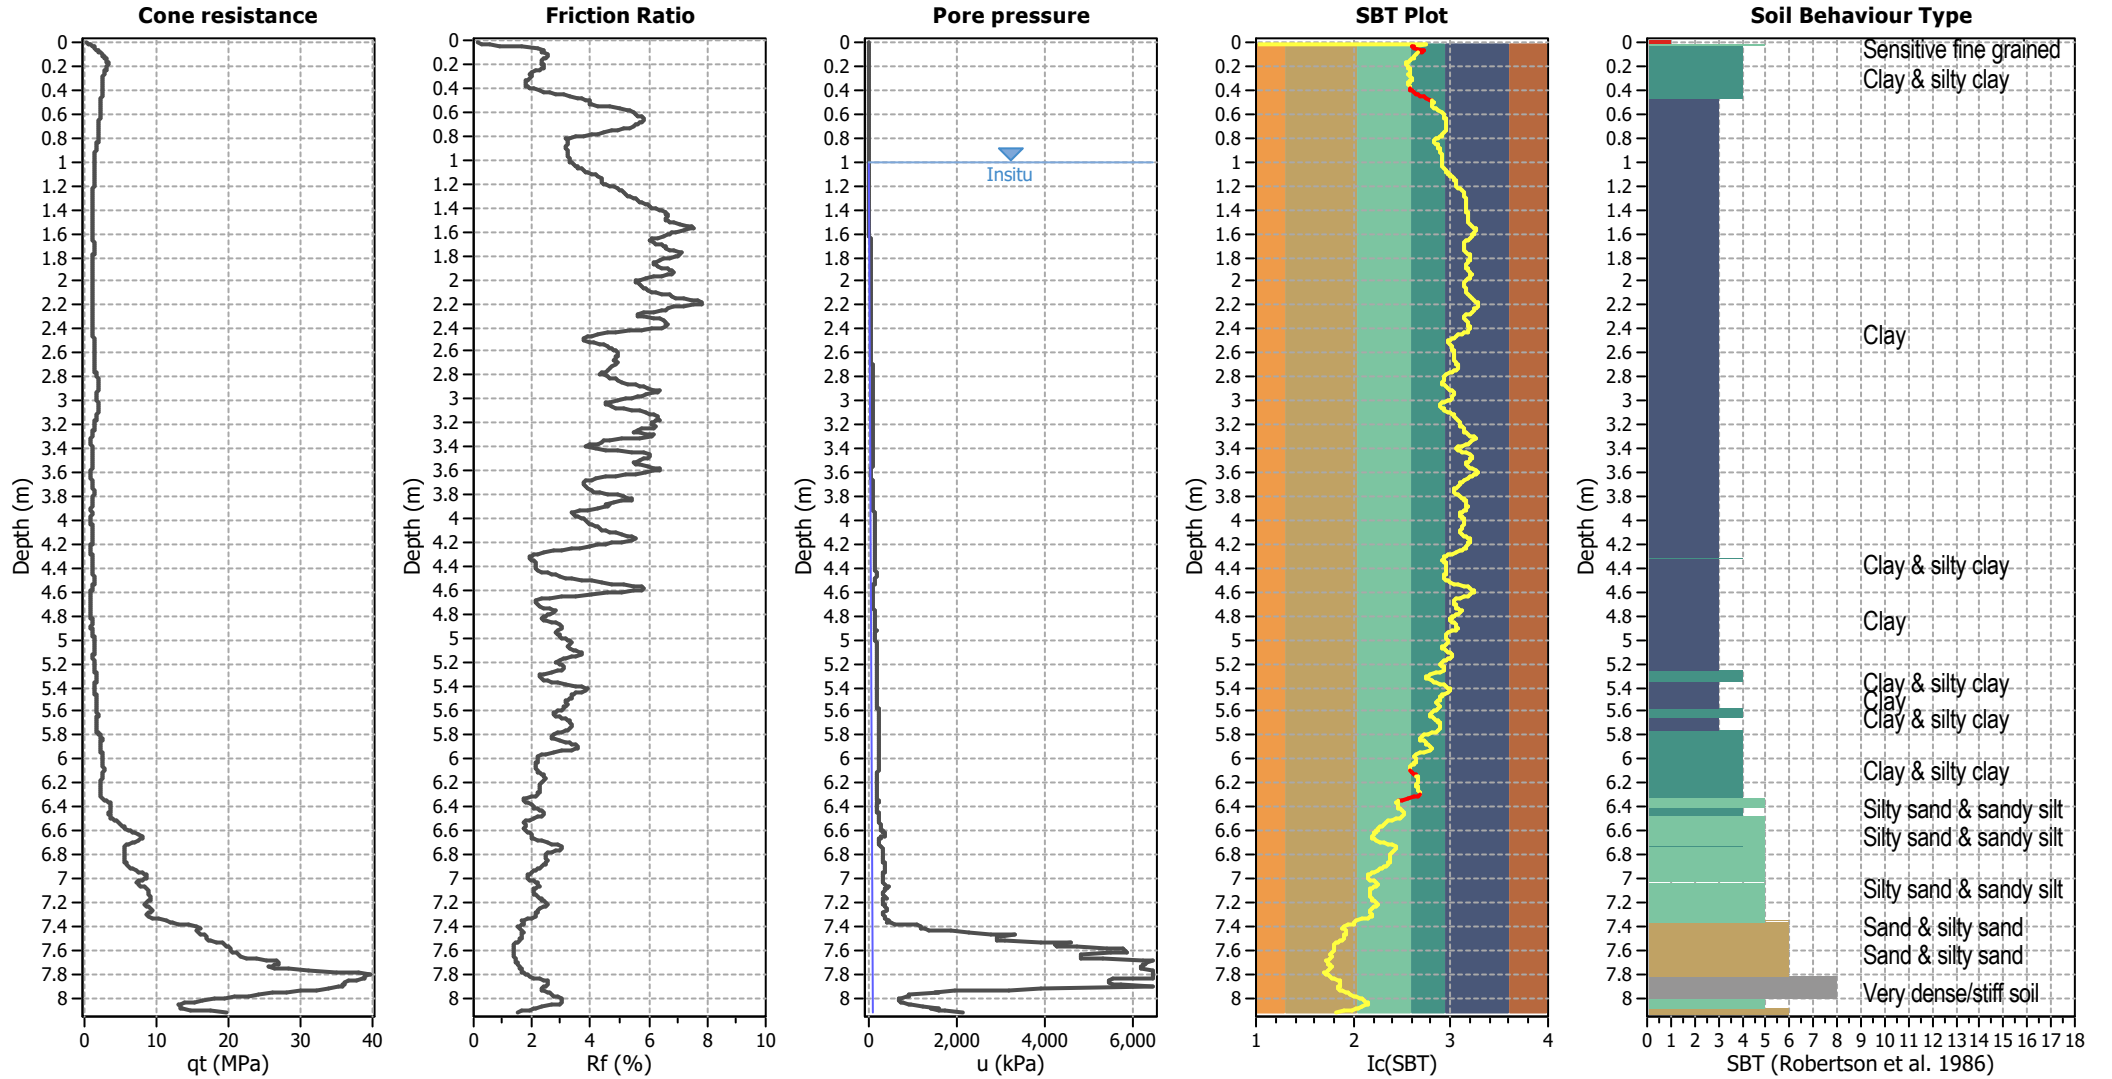


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

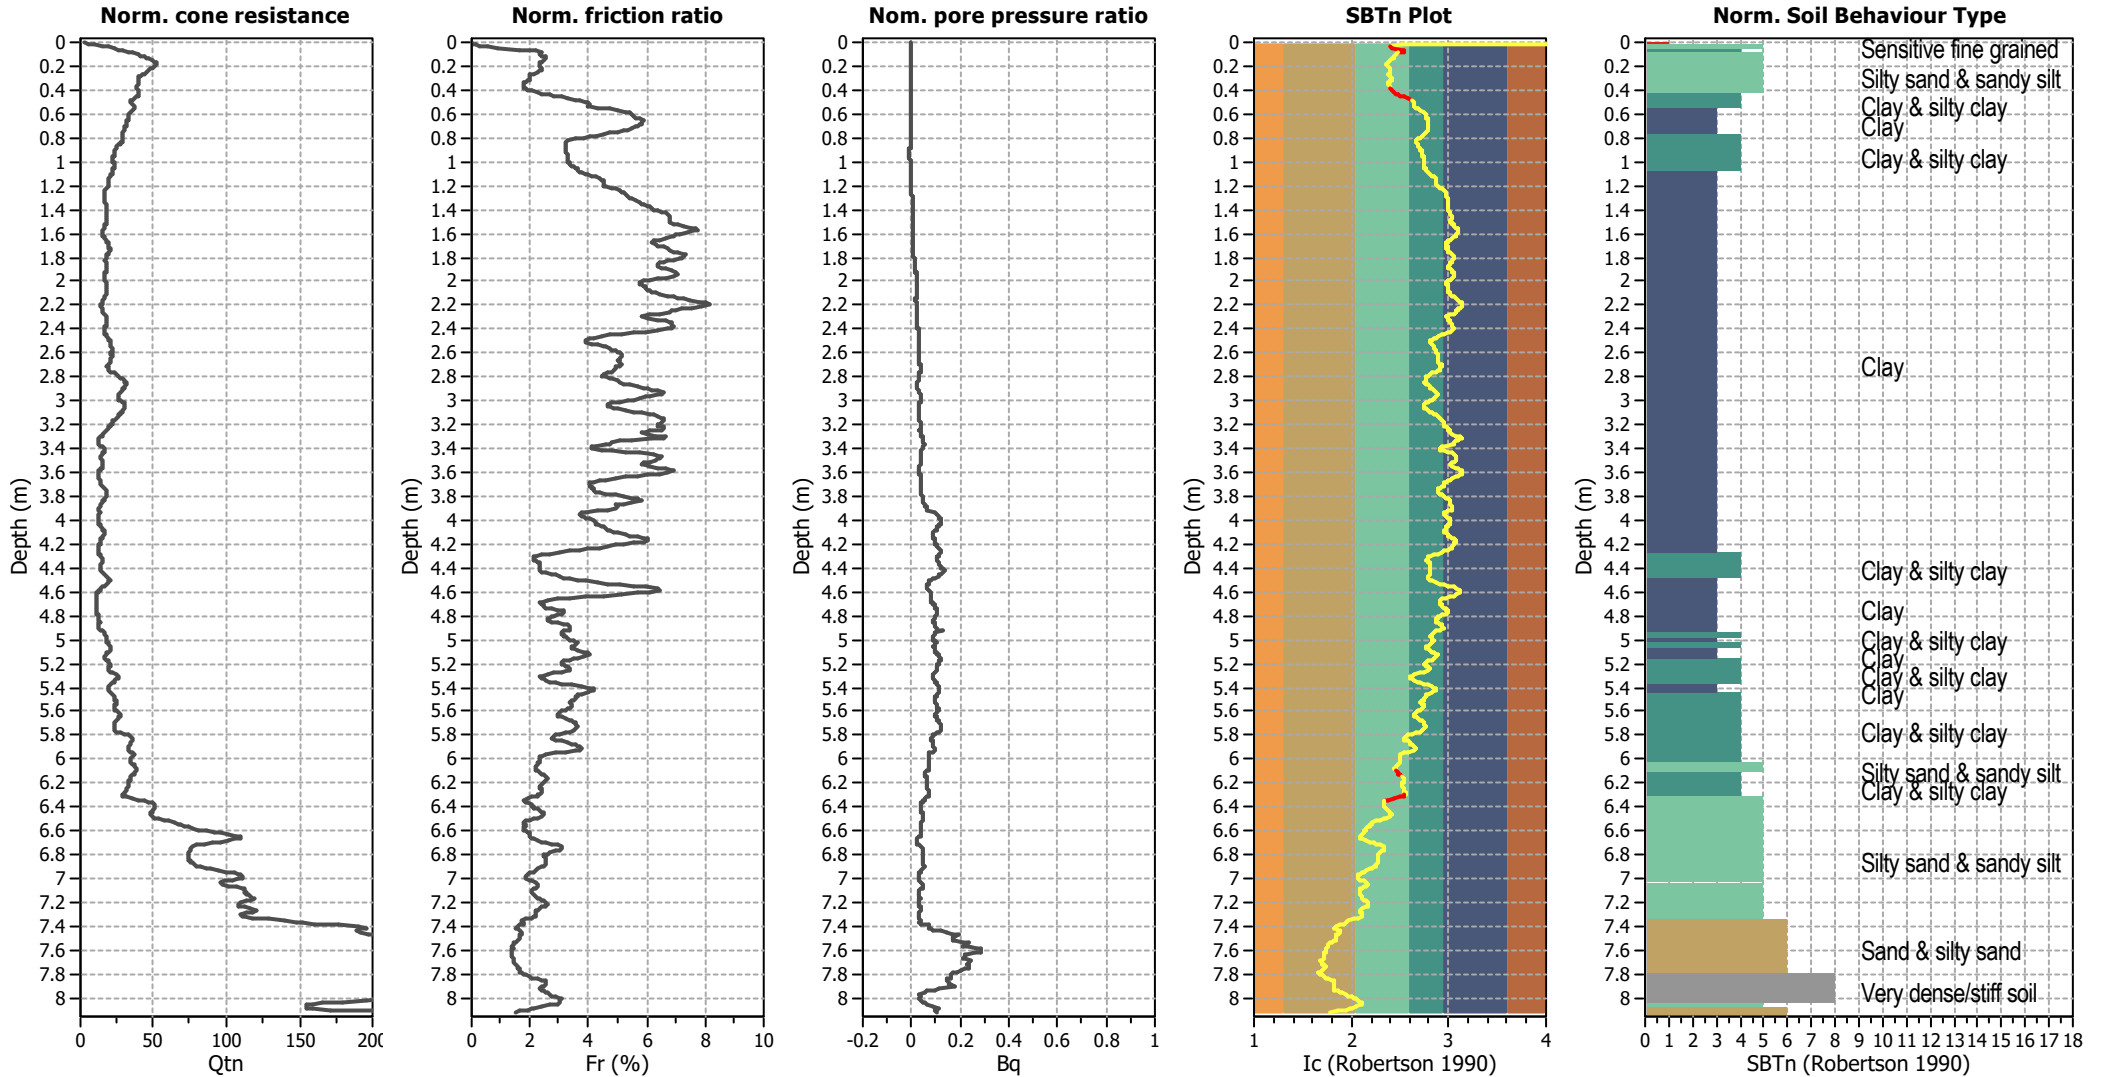


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

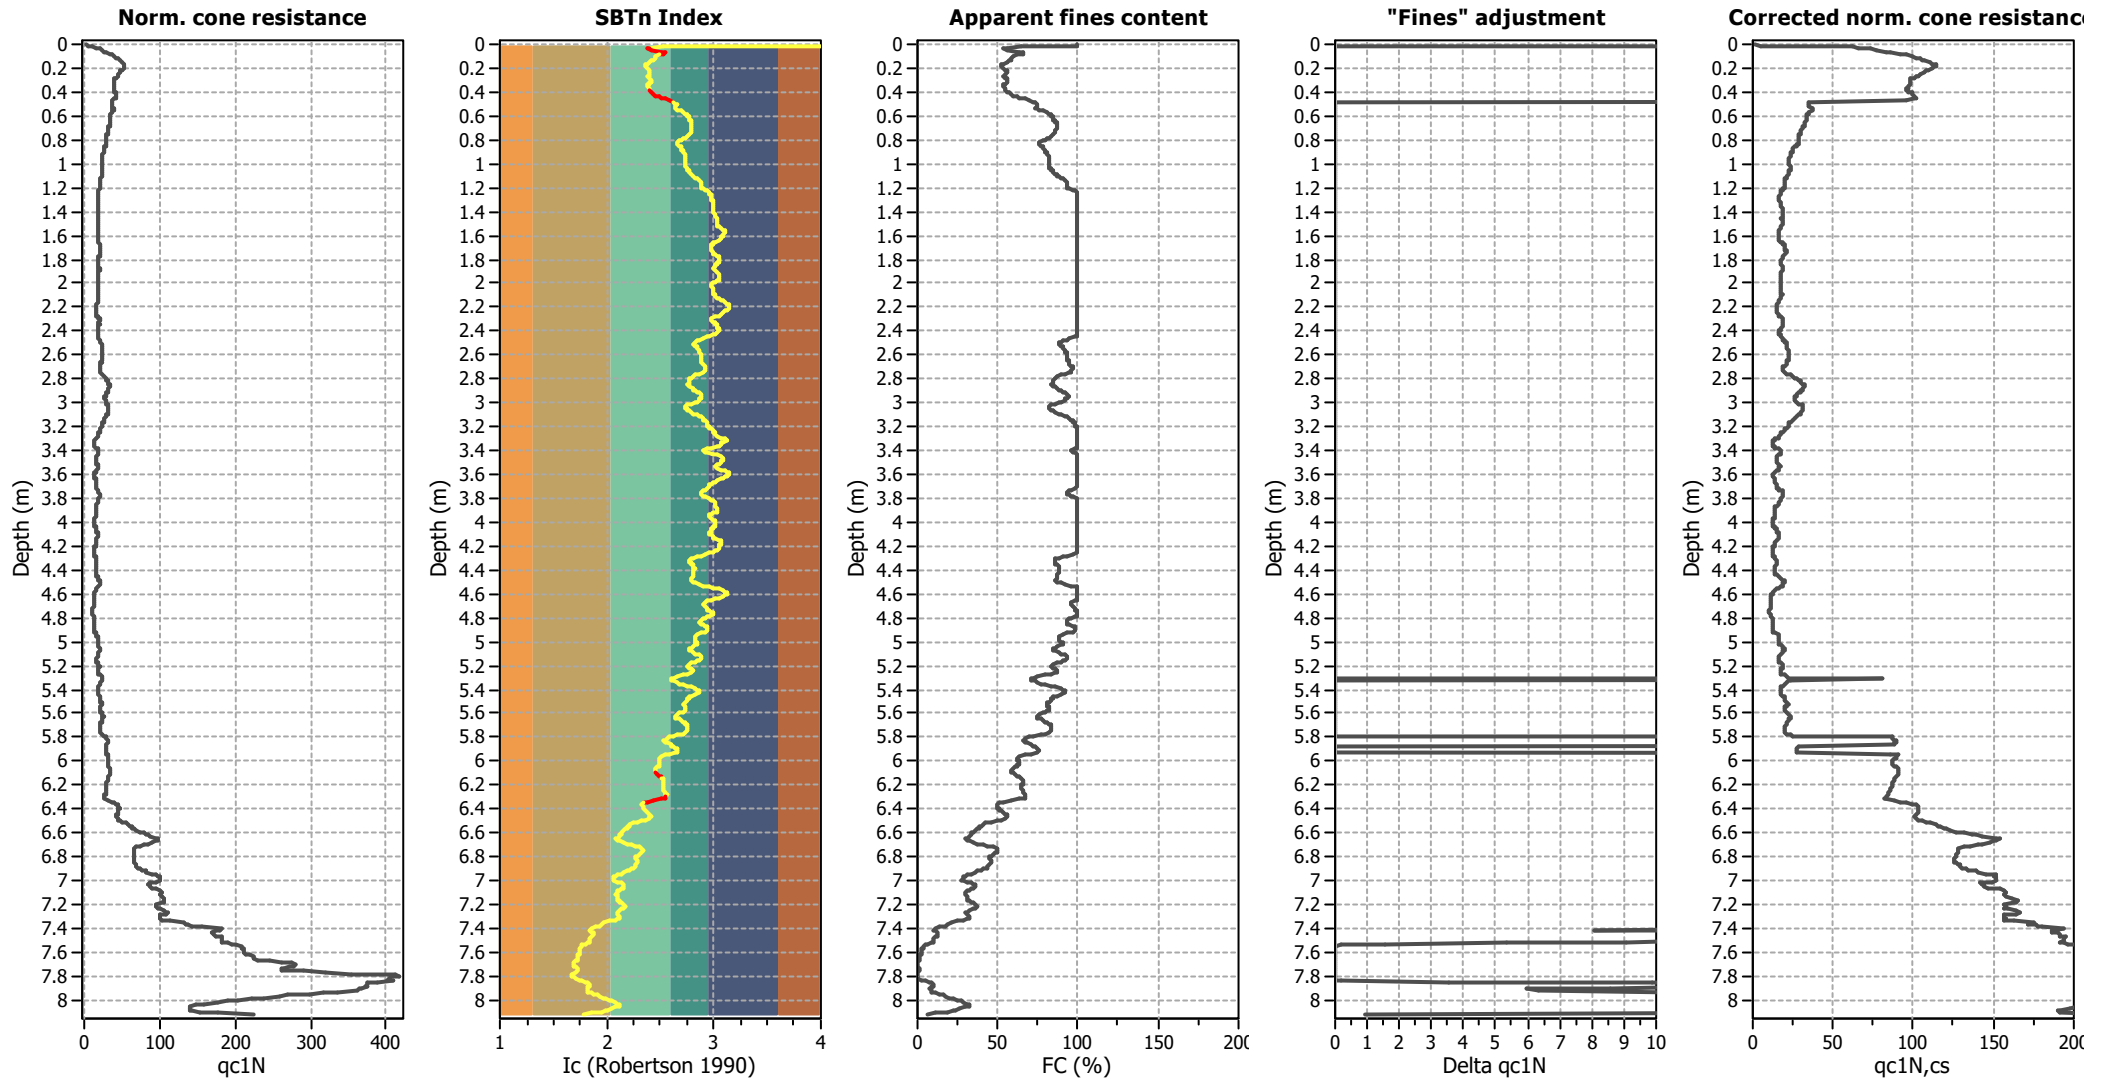

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

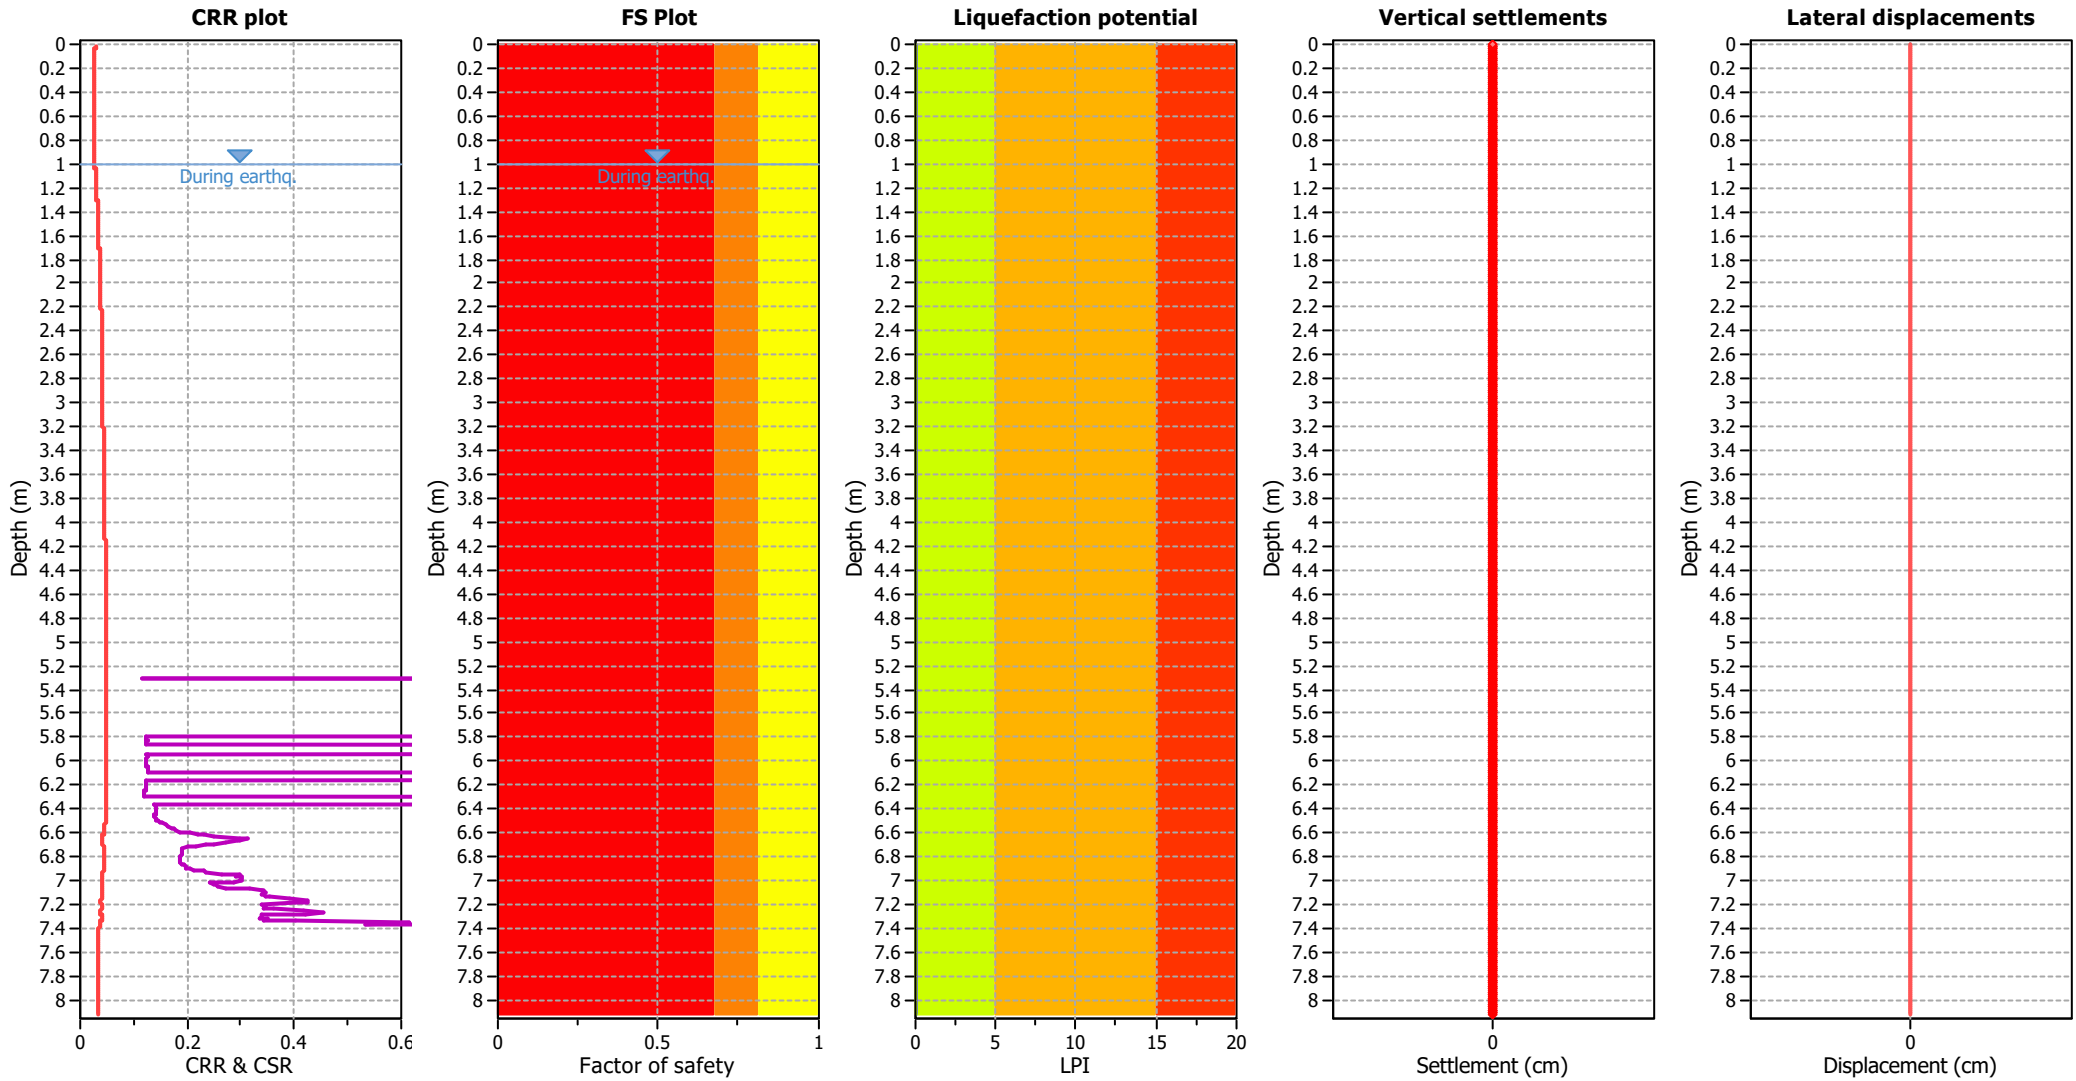

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

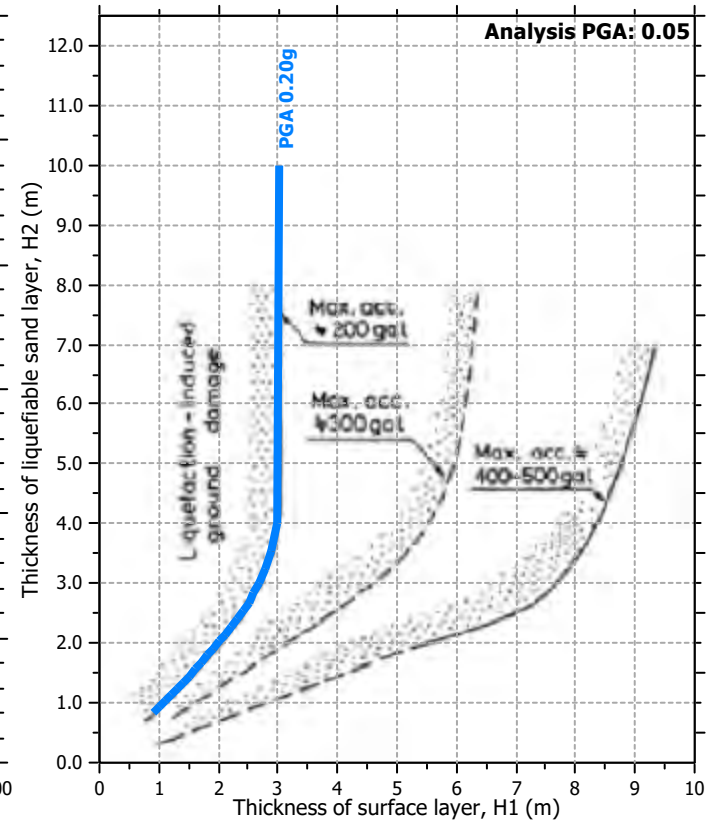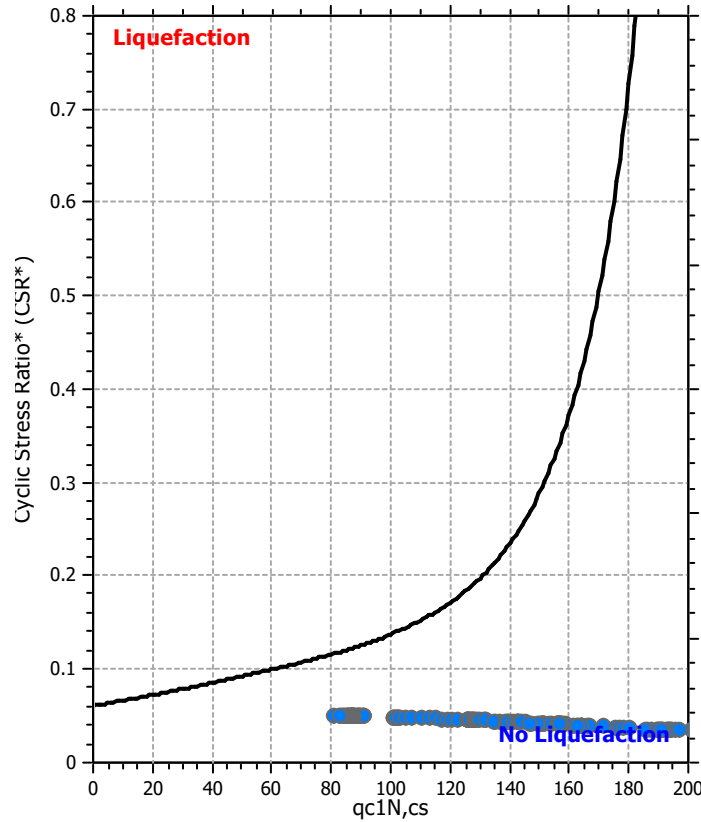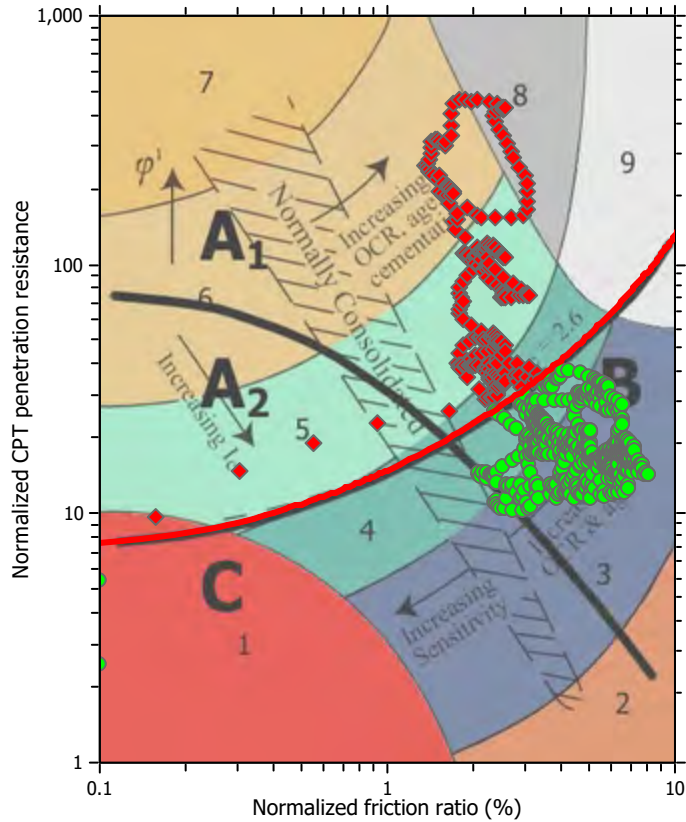

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

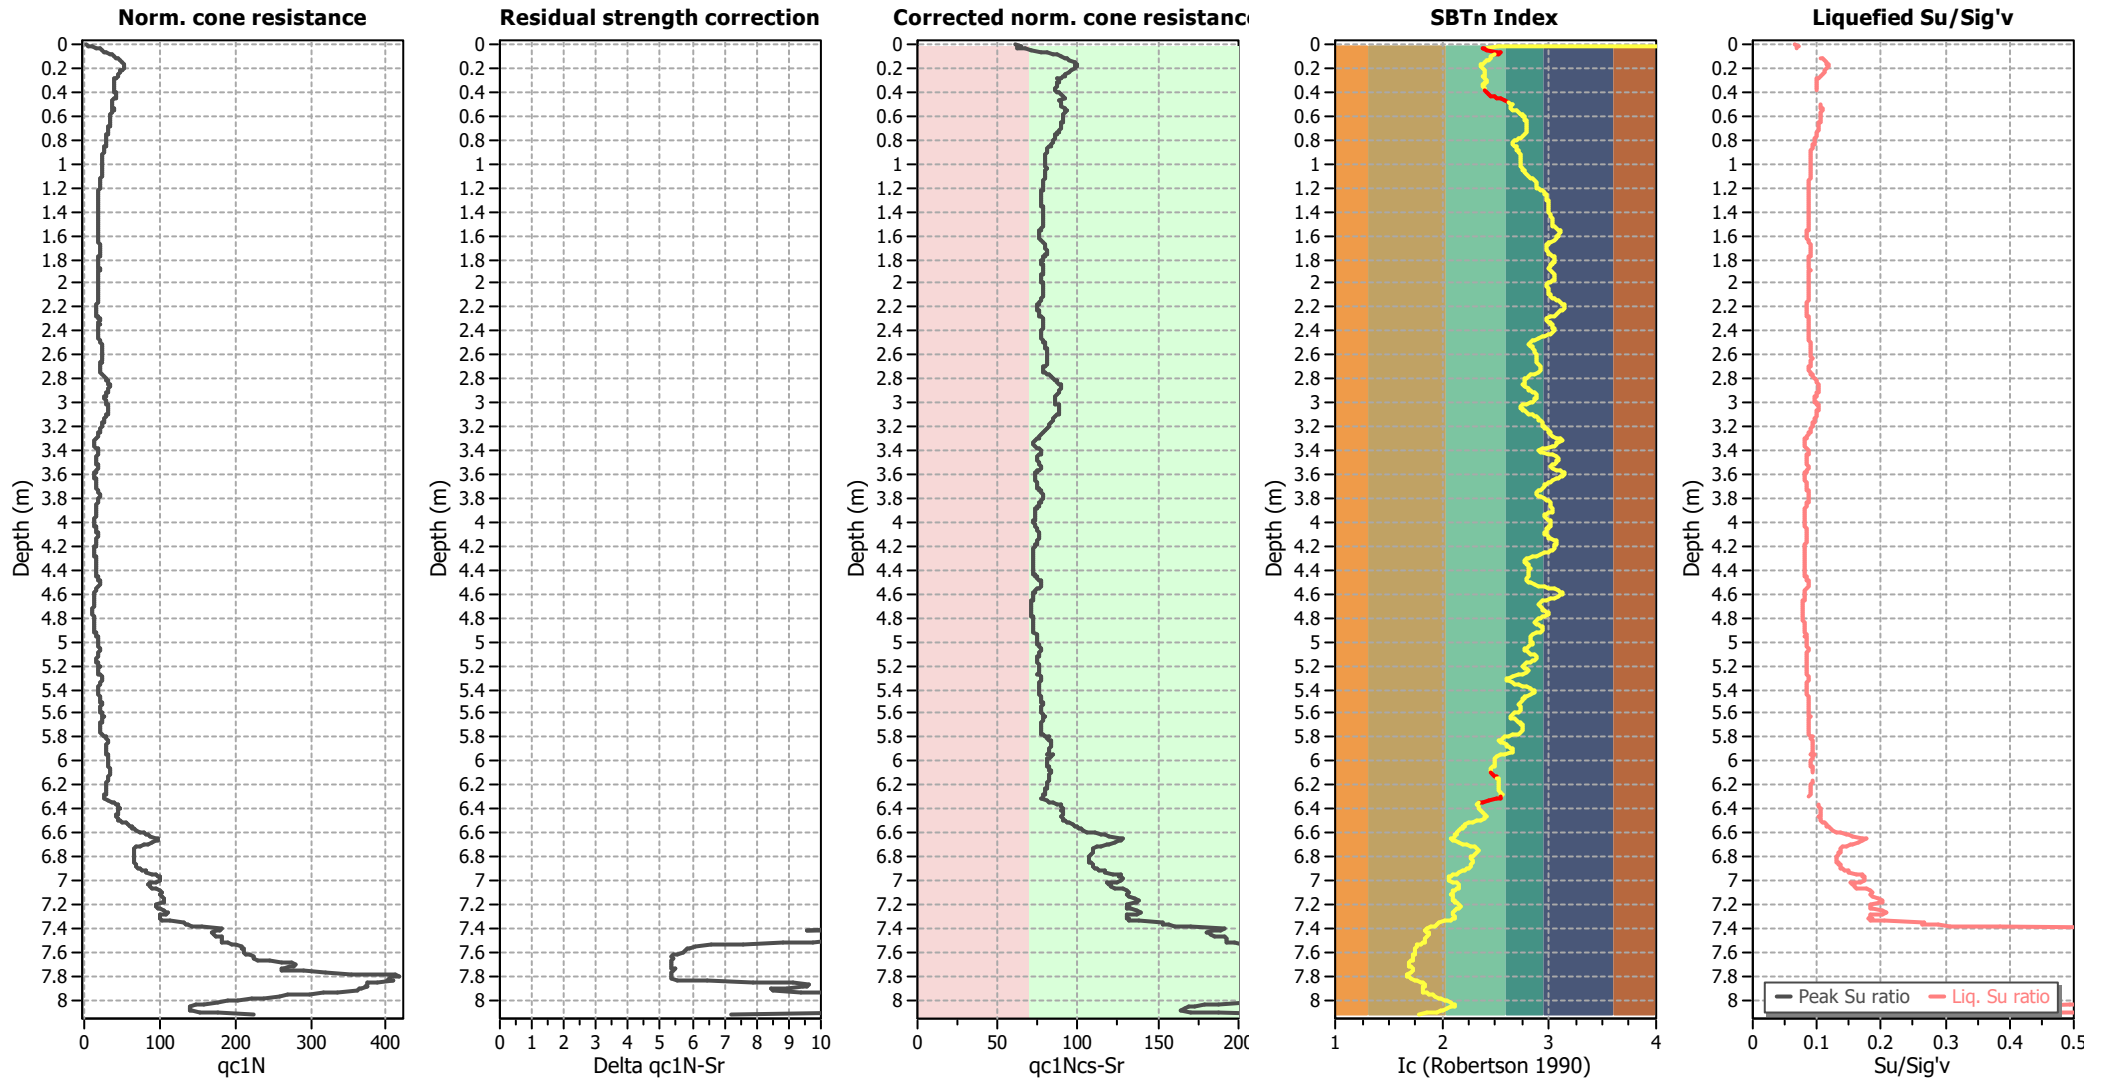

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

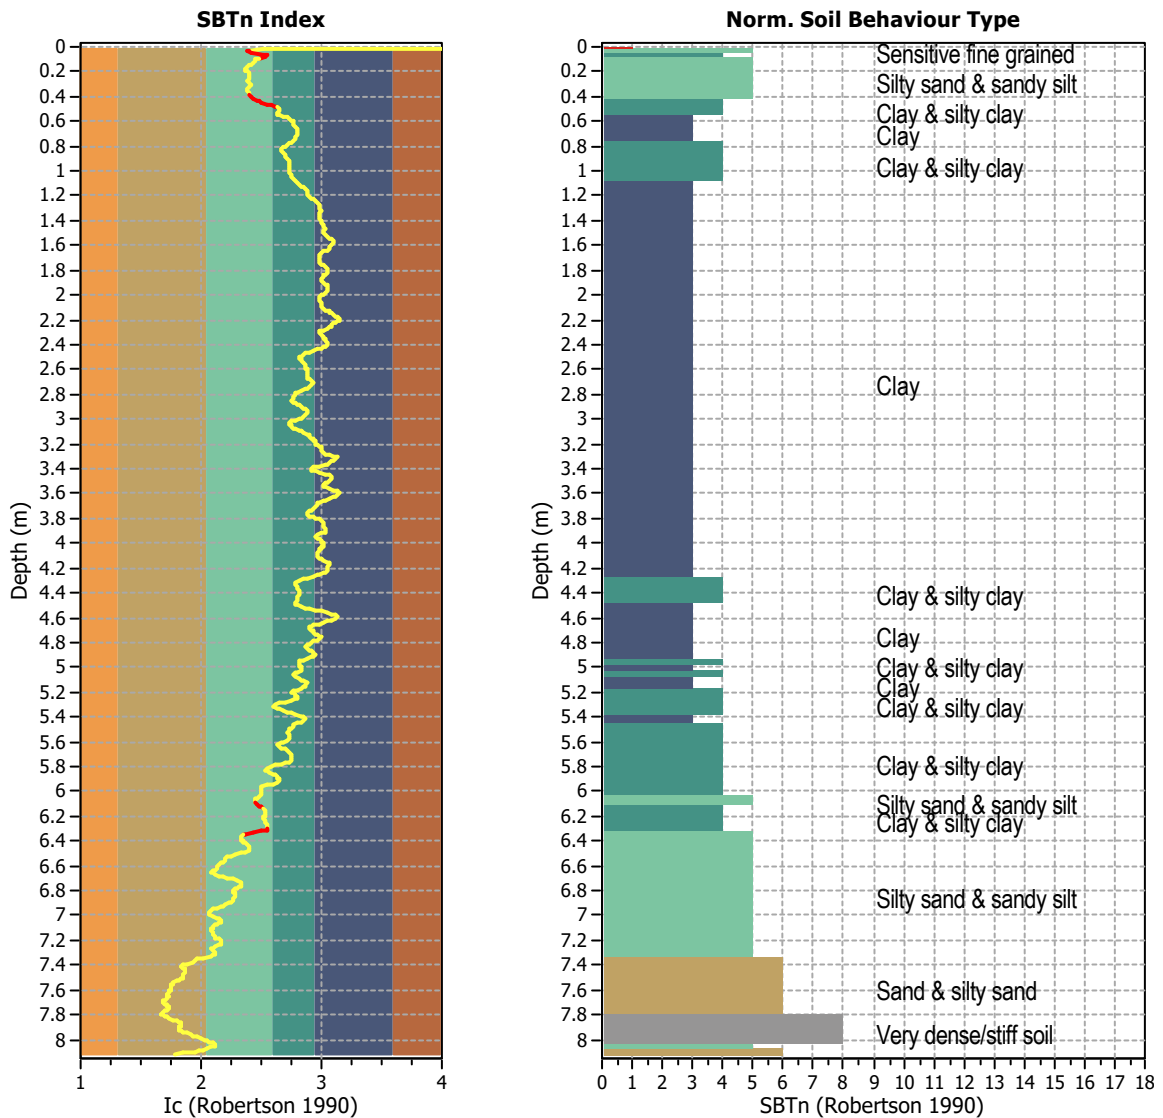


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 813
 Total points excluded: 31
 Exclusion percentage: 3.81%
 Number of layers detected: 5


Estimation of post-earthquake settlements

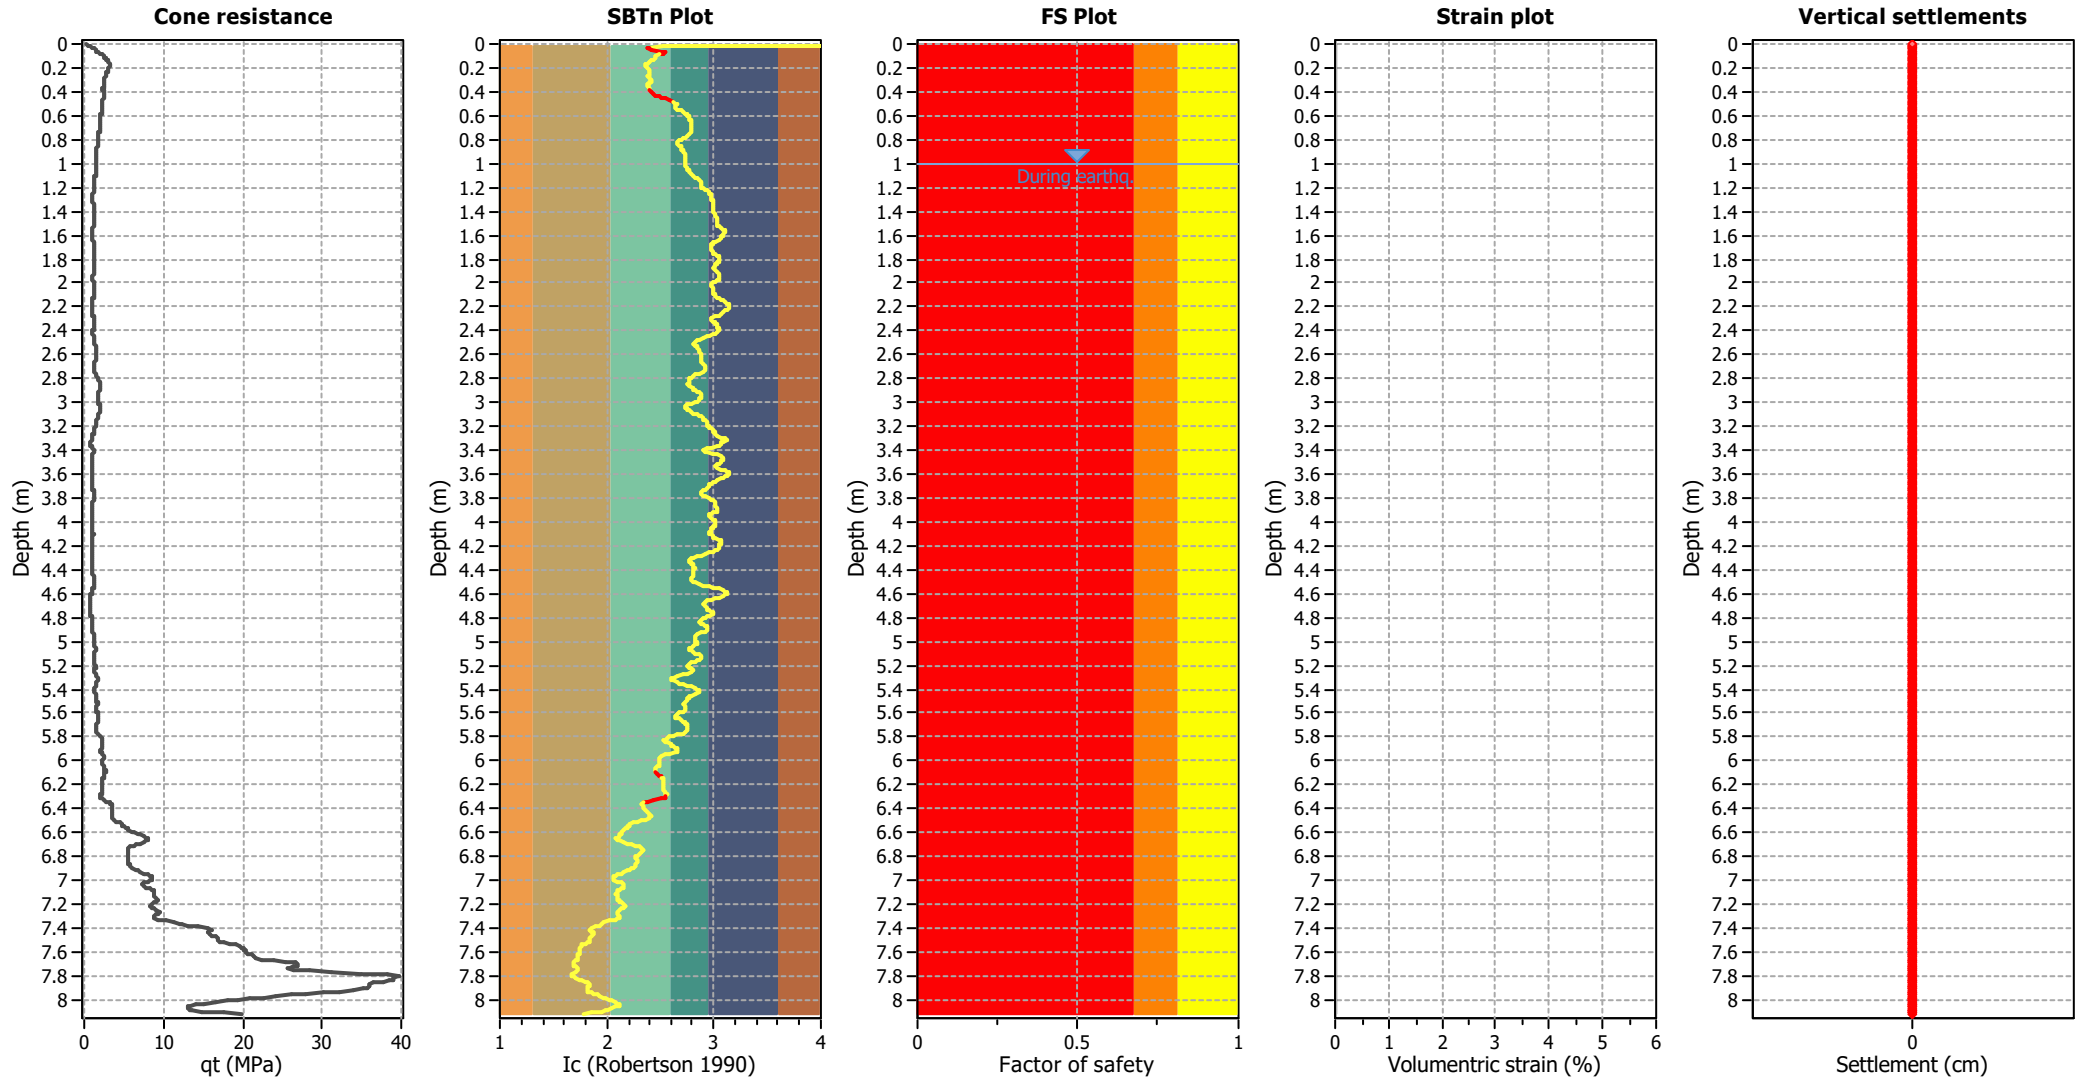

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

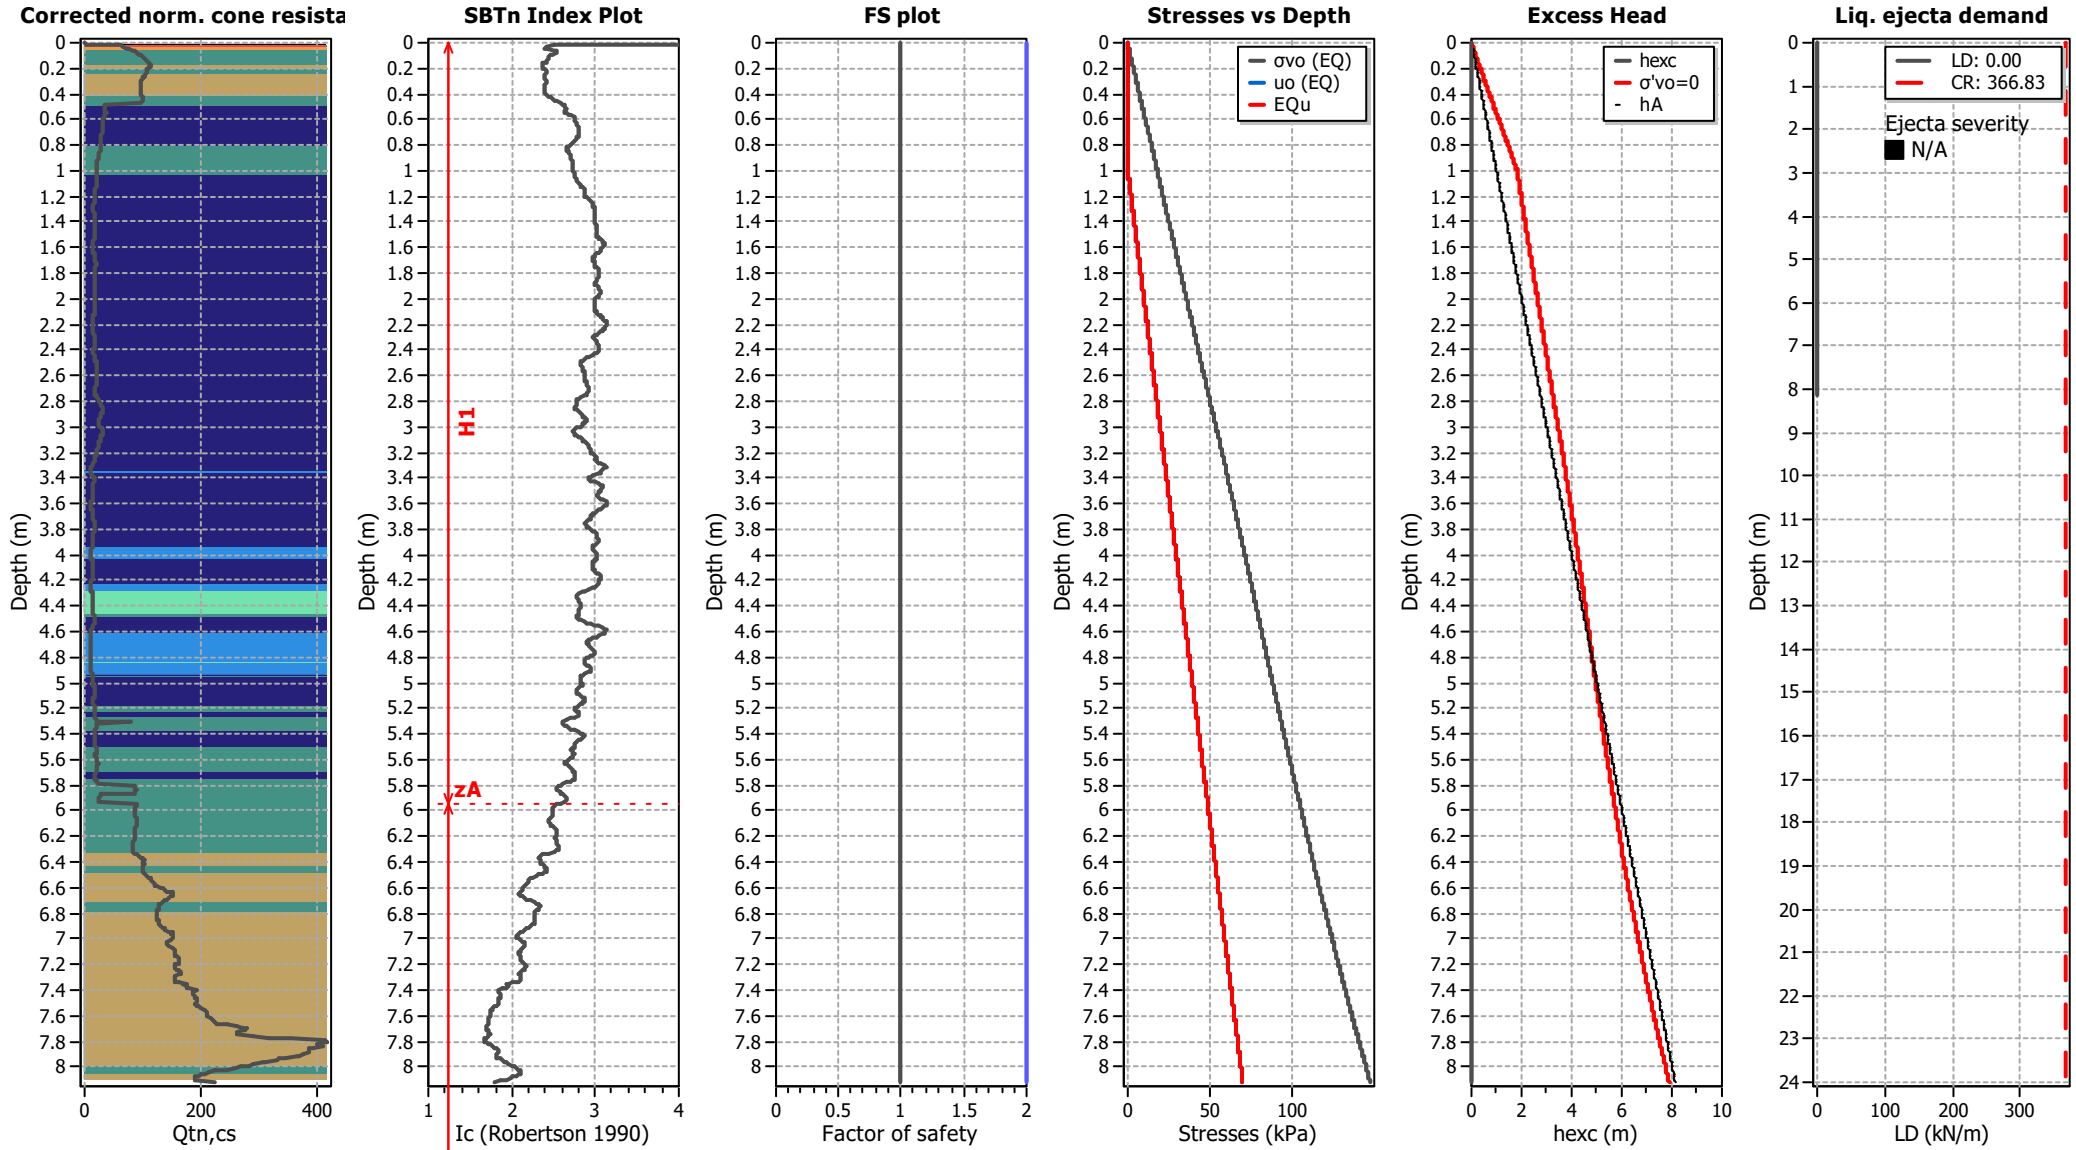

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT09

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

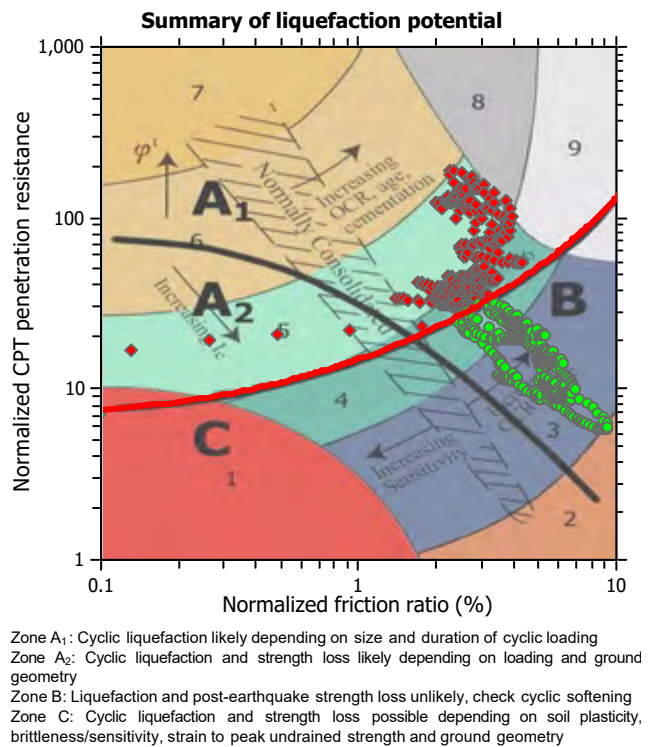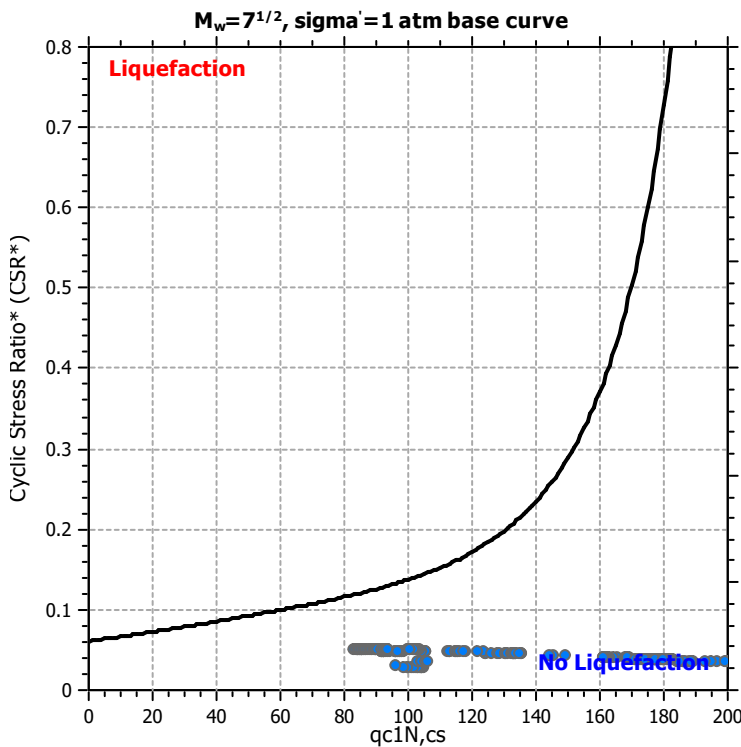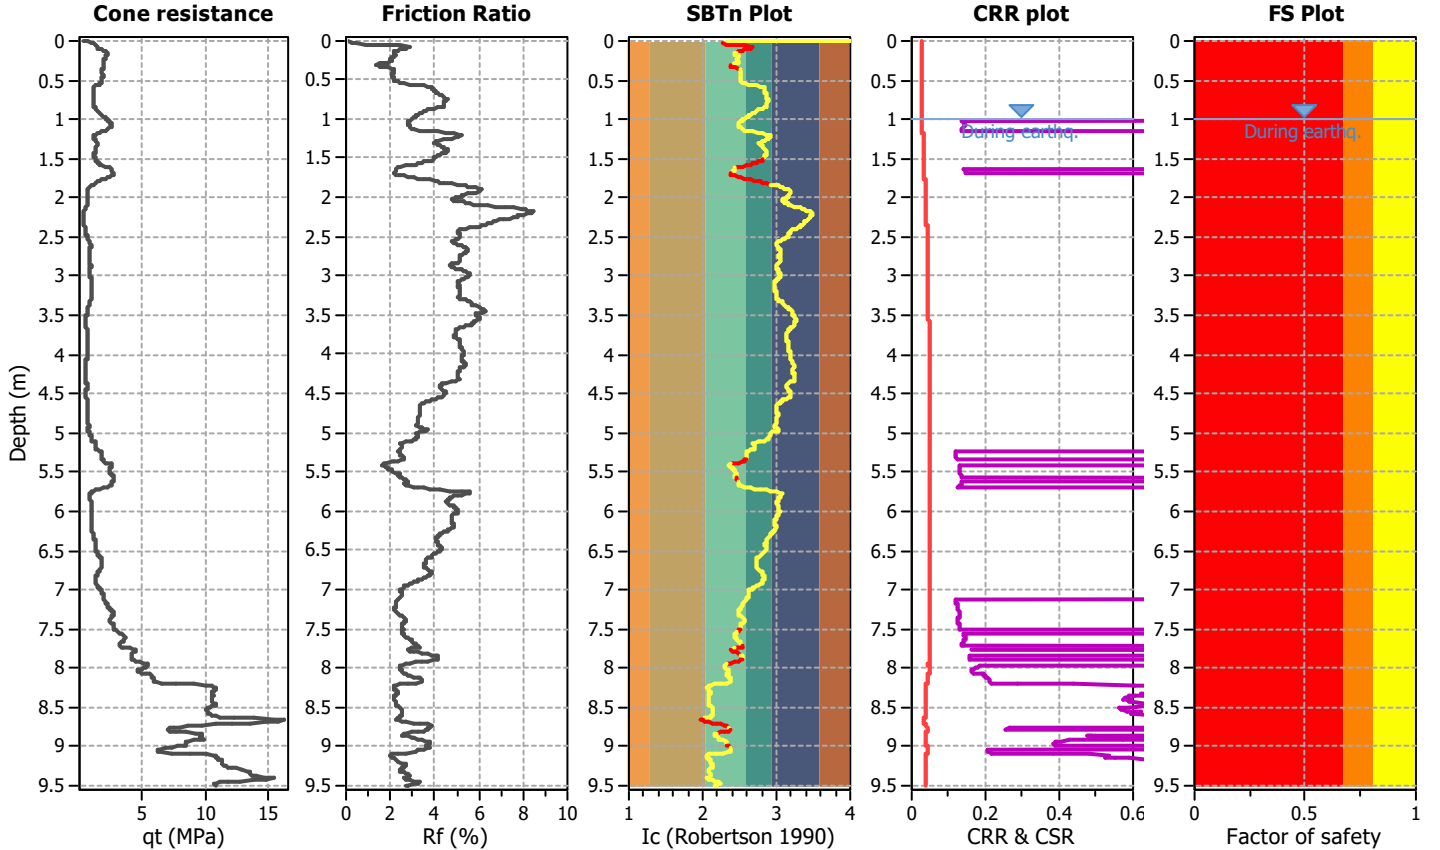

CPT basic interpretation plots

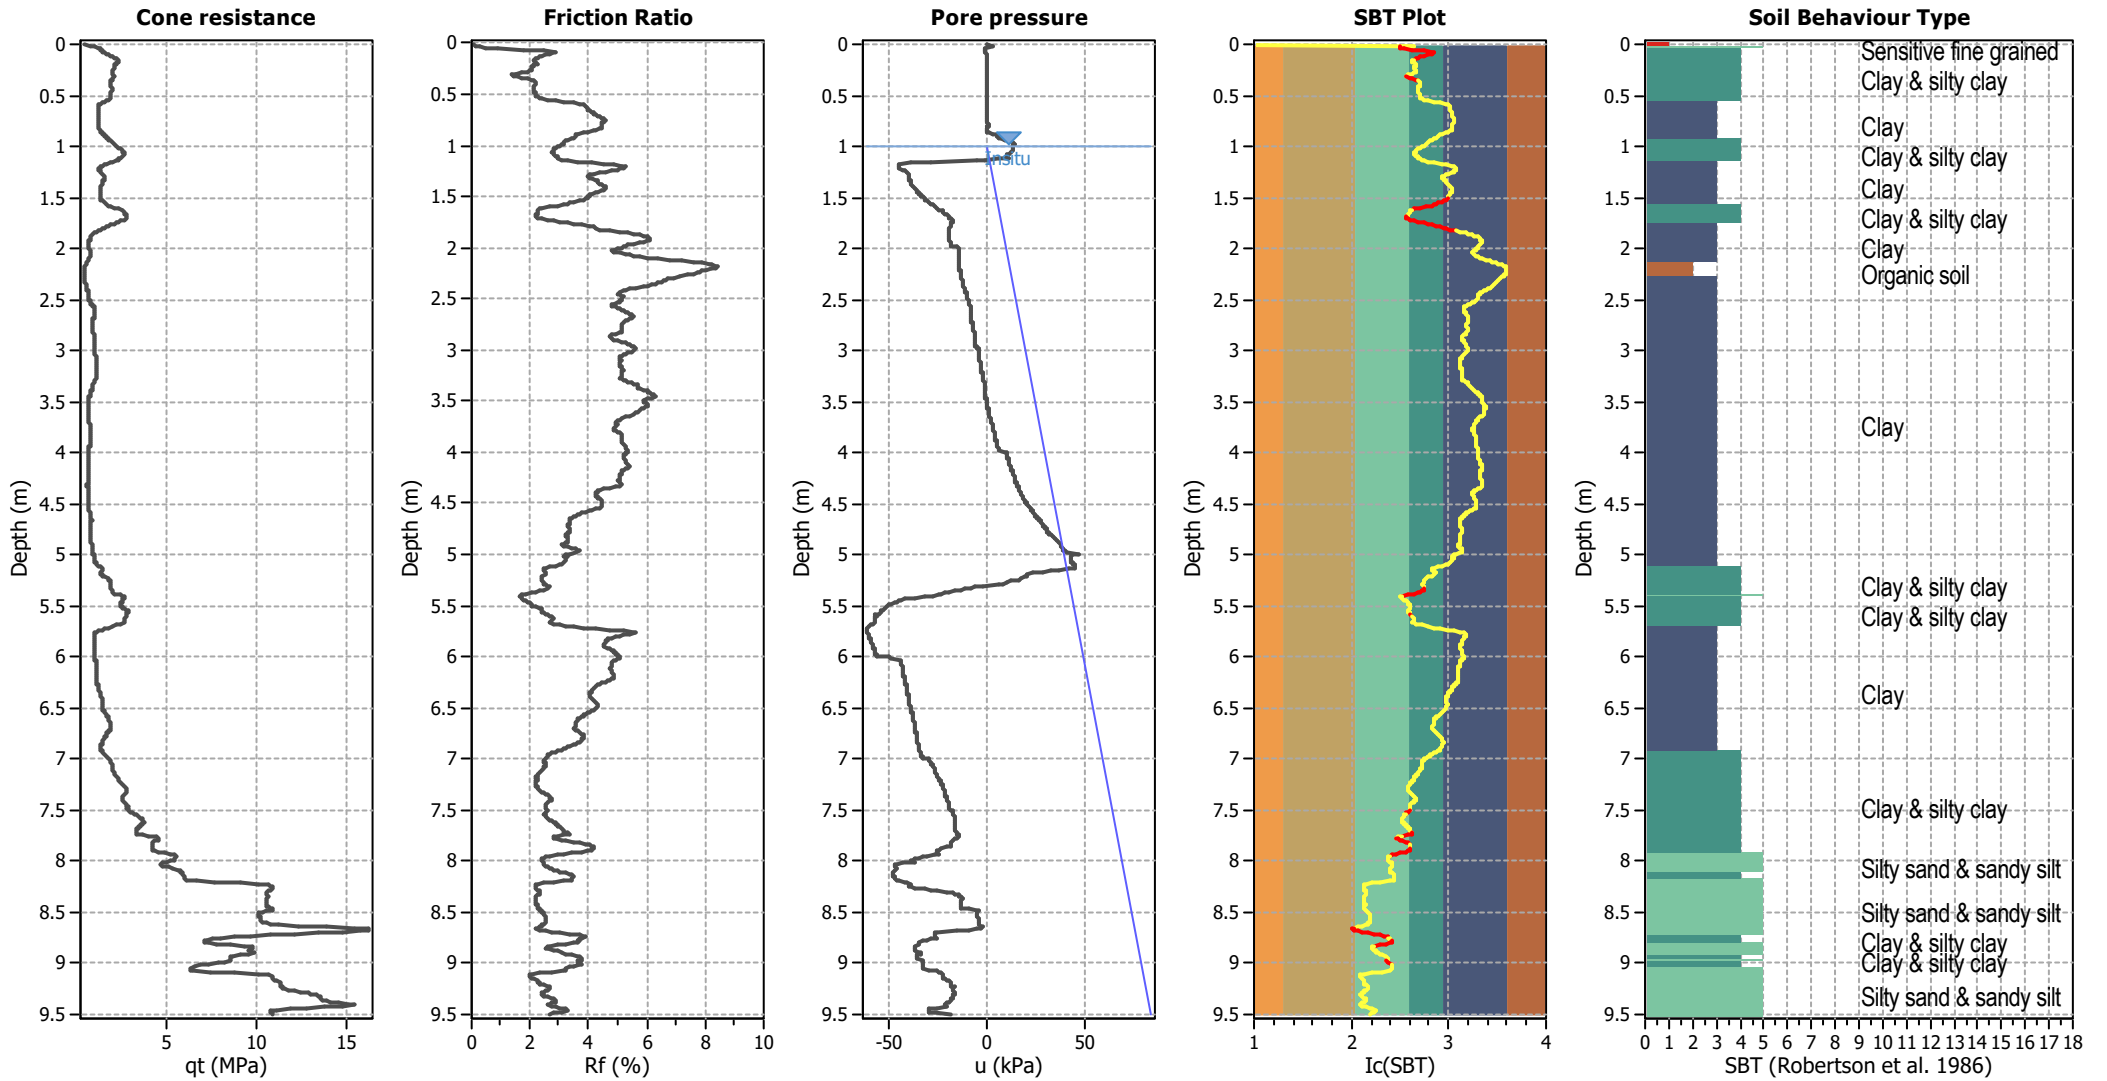


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

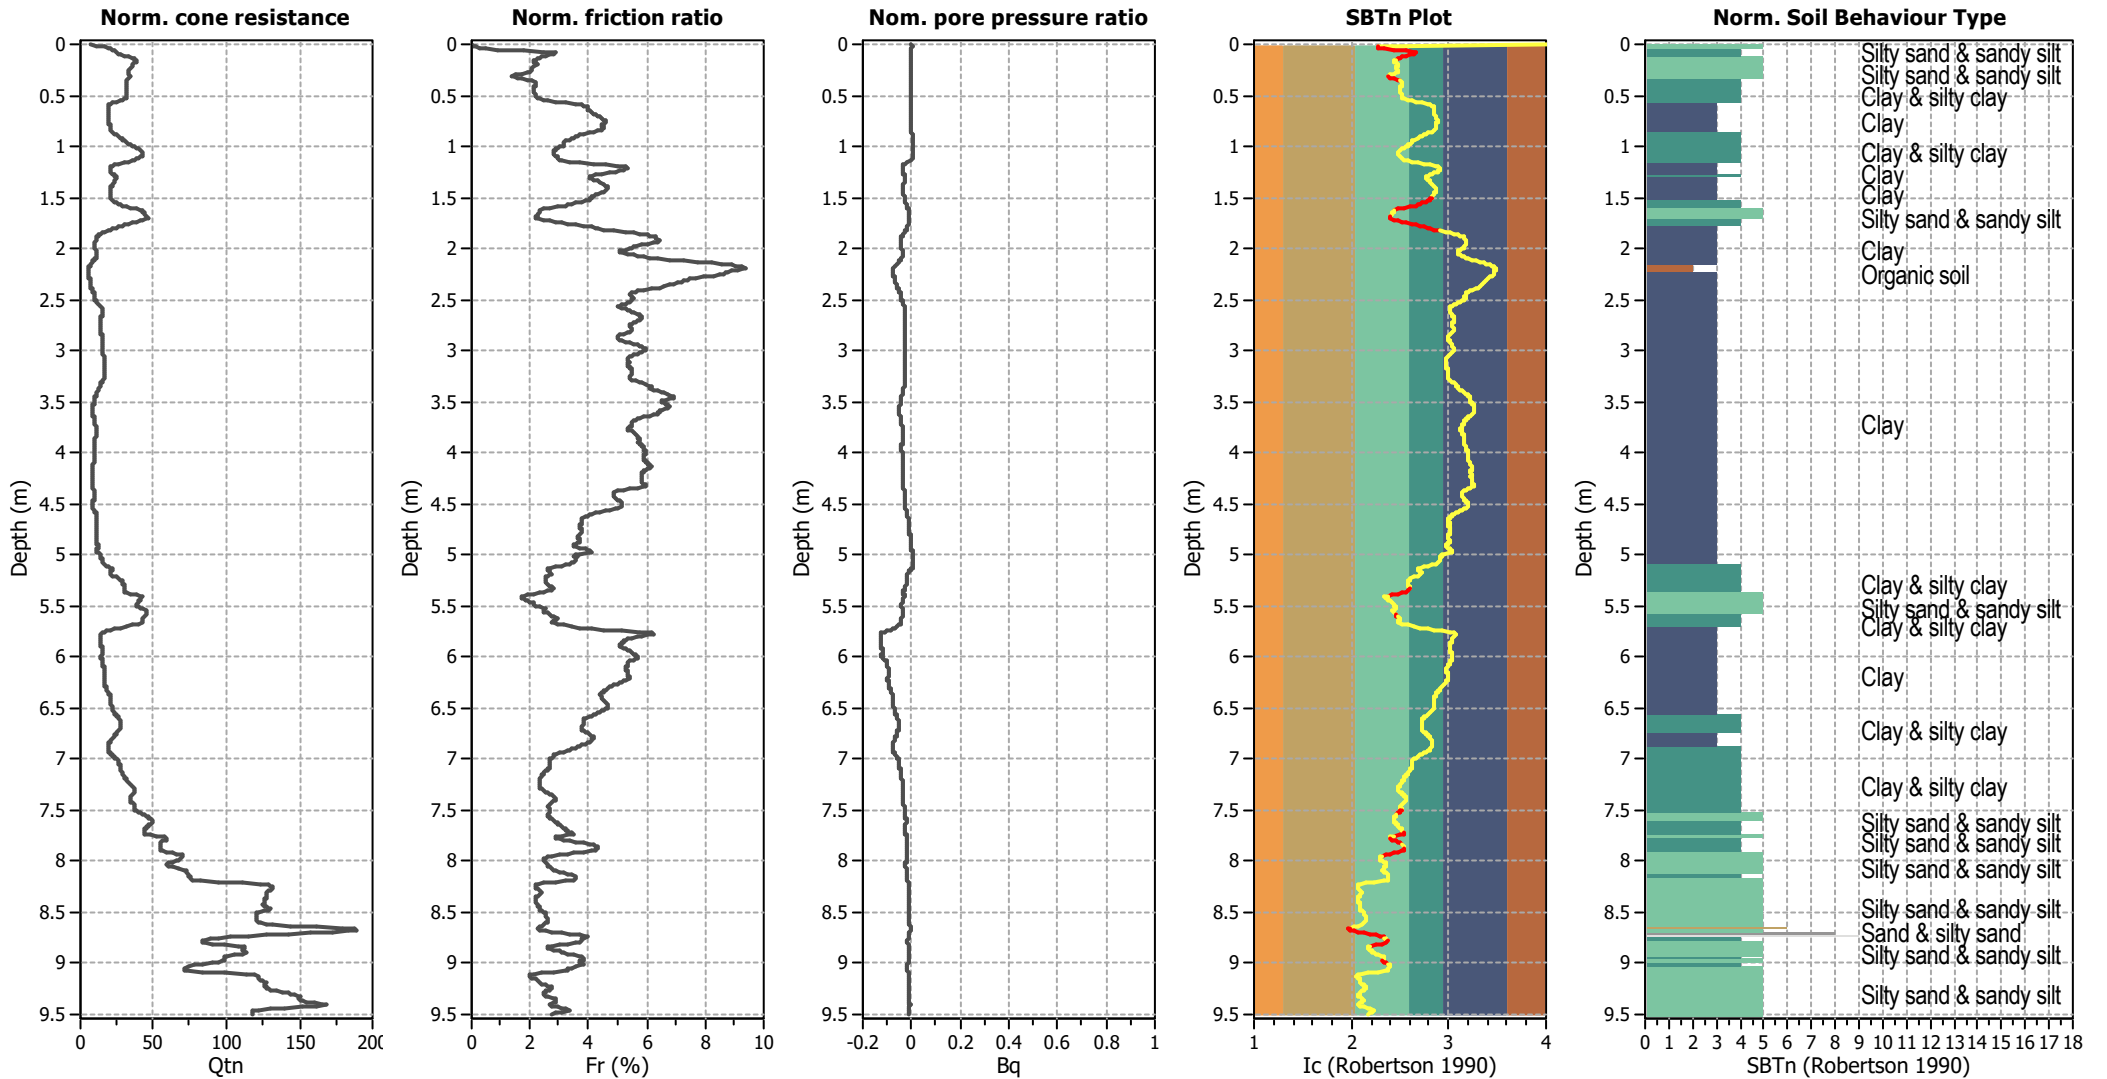


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

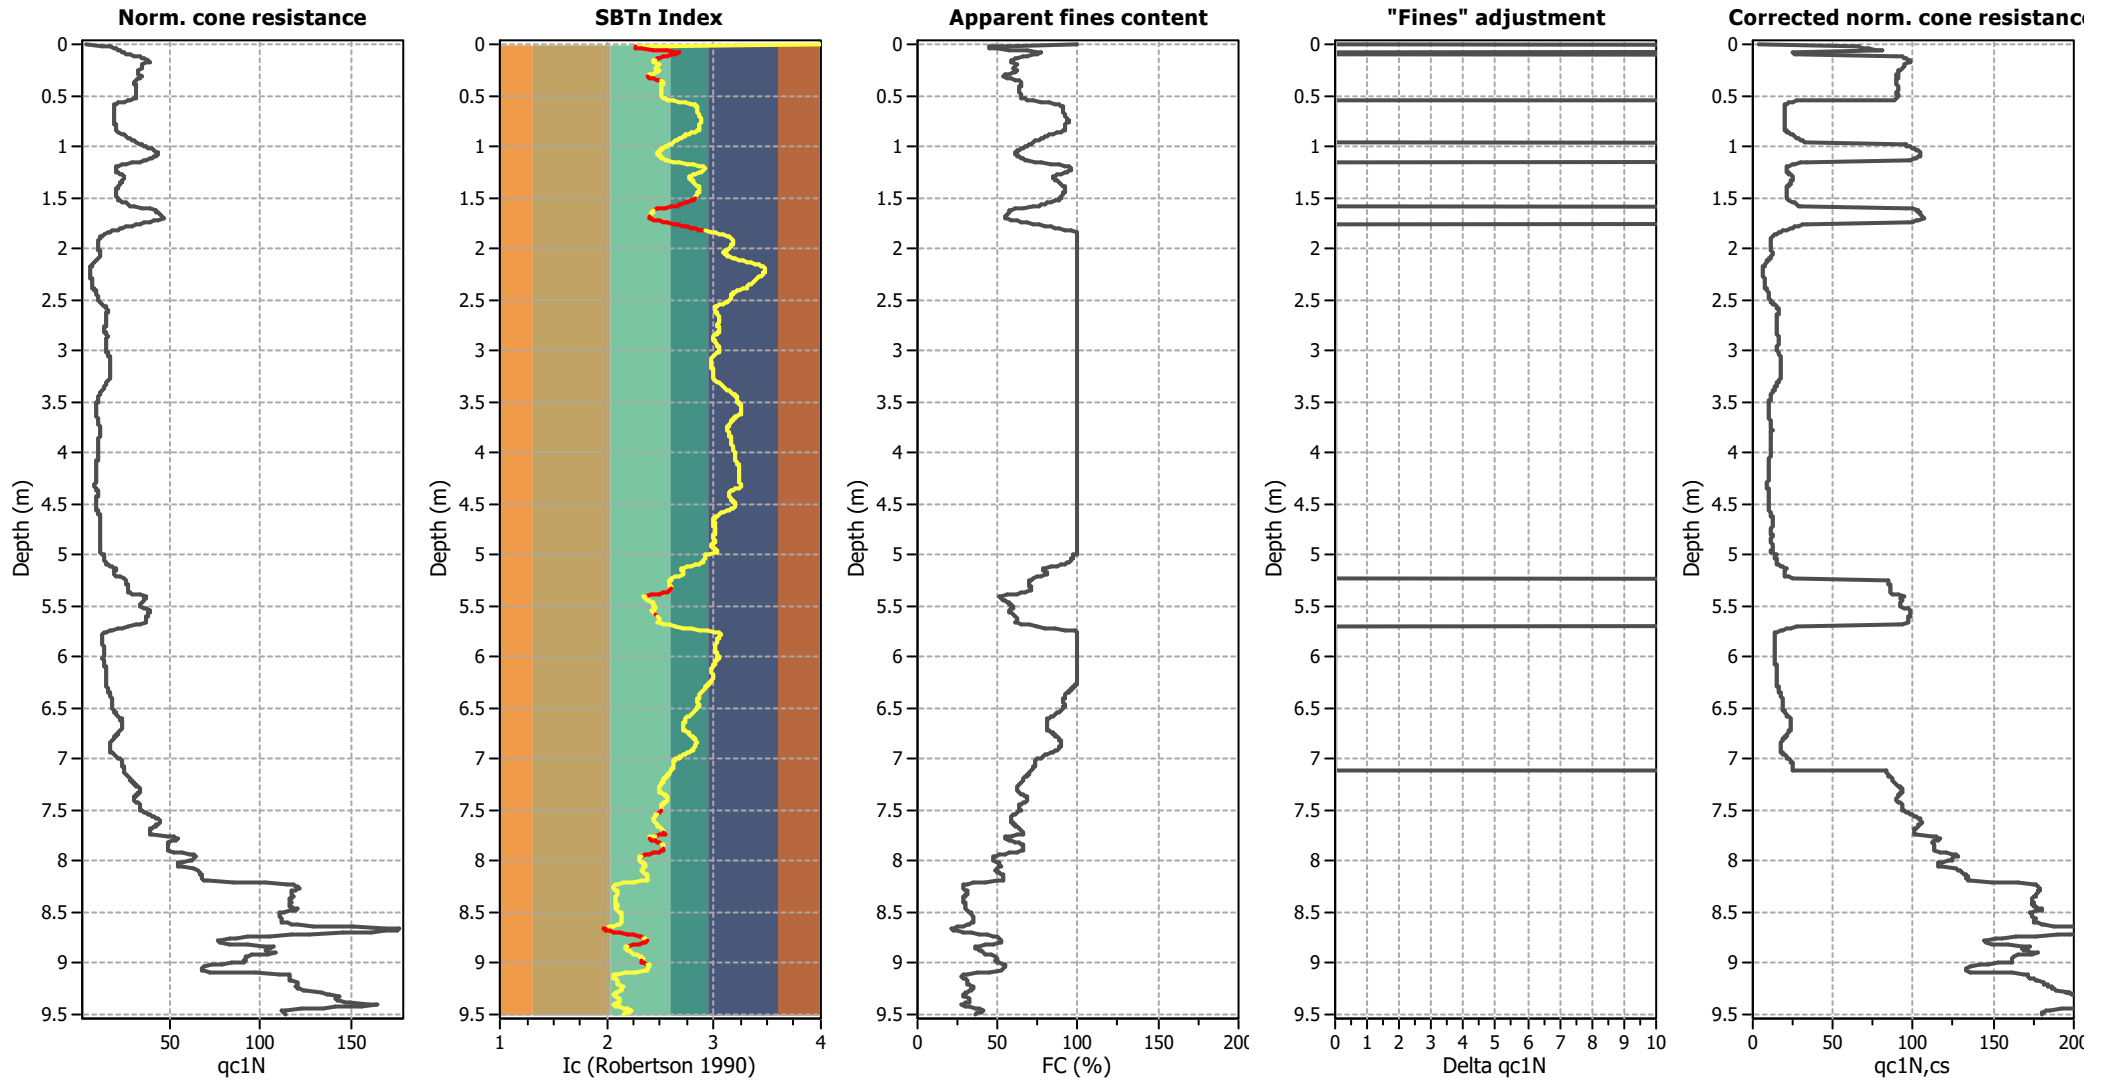

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

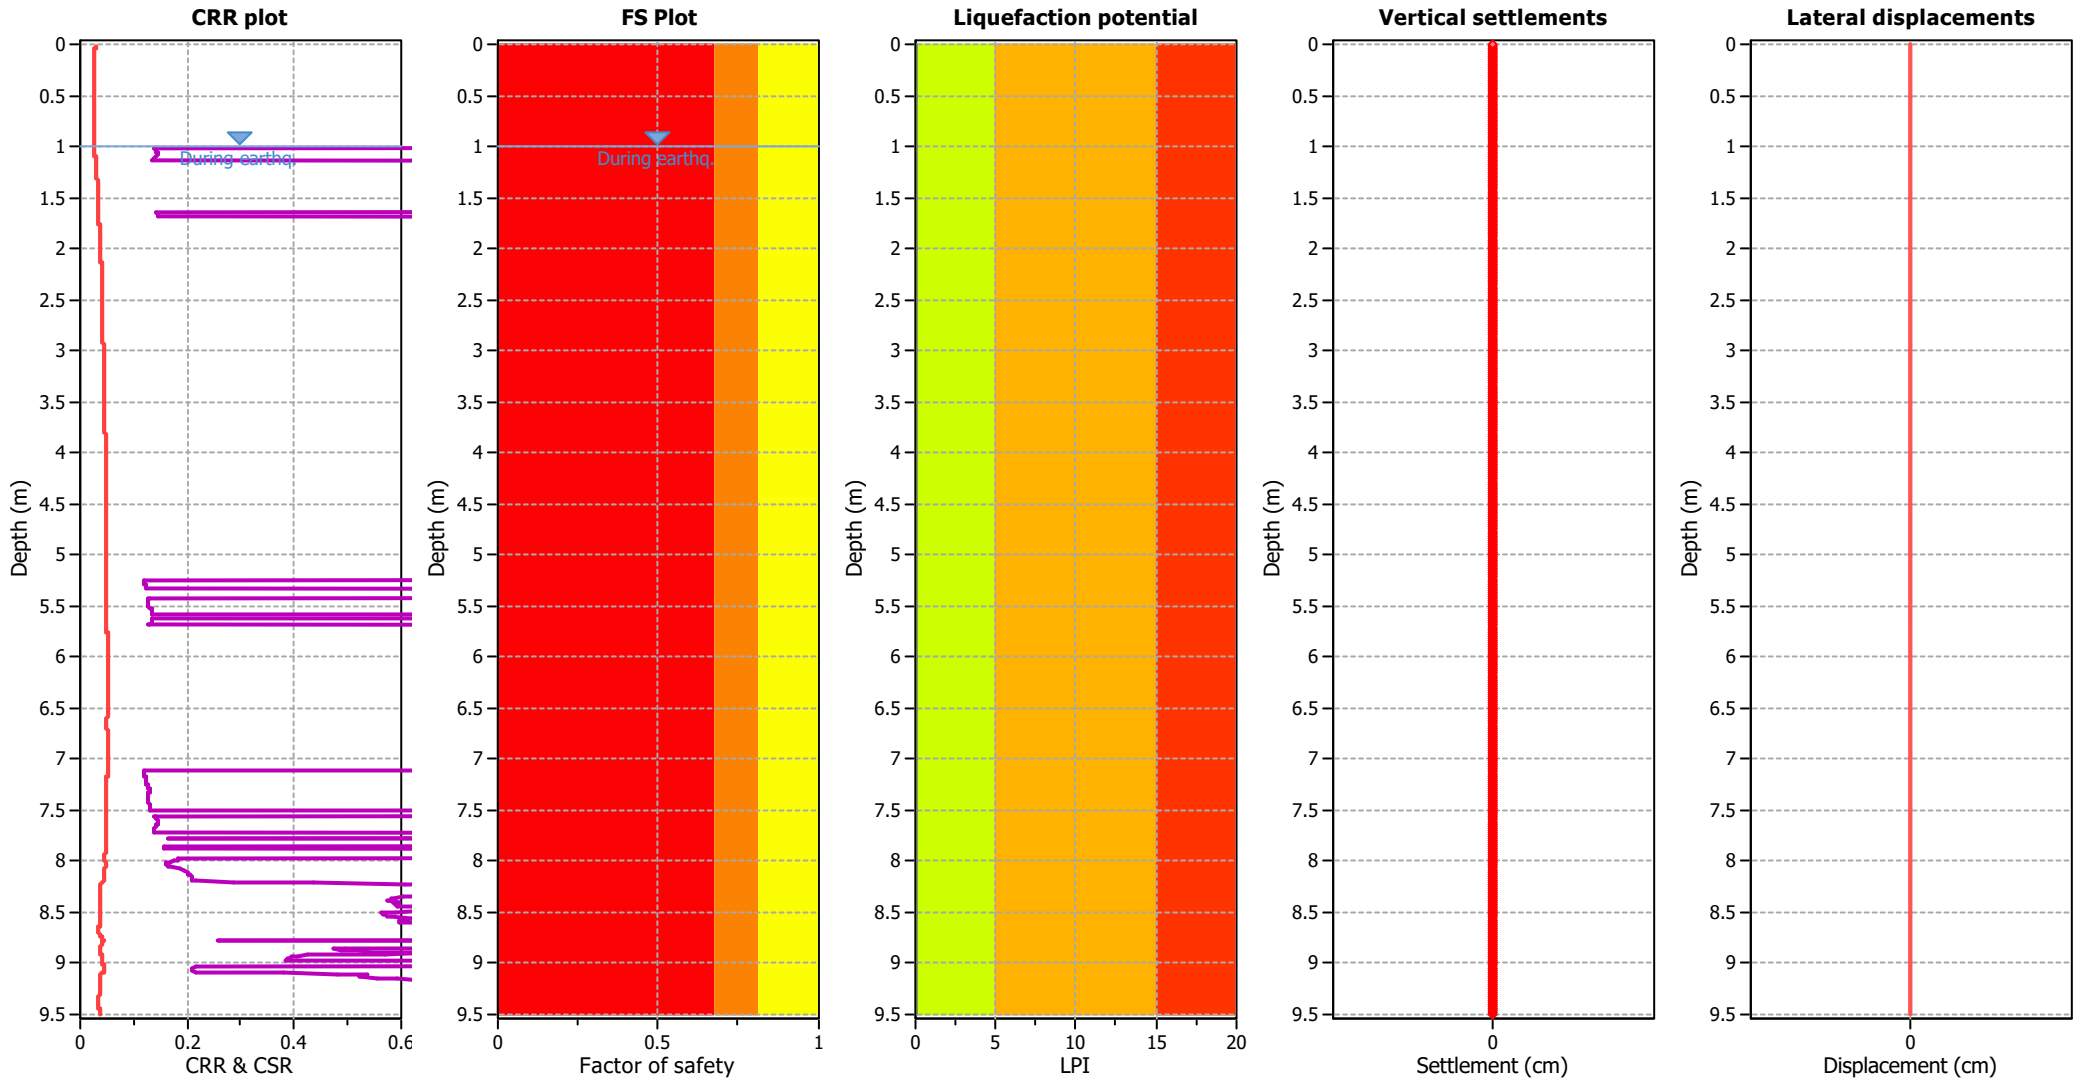

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

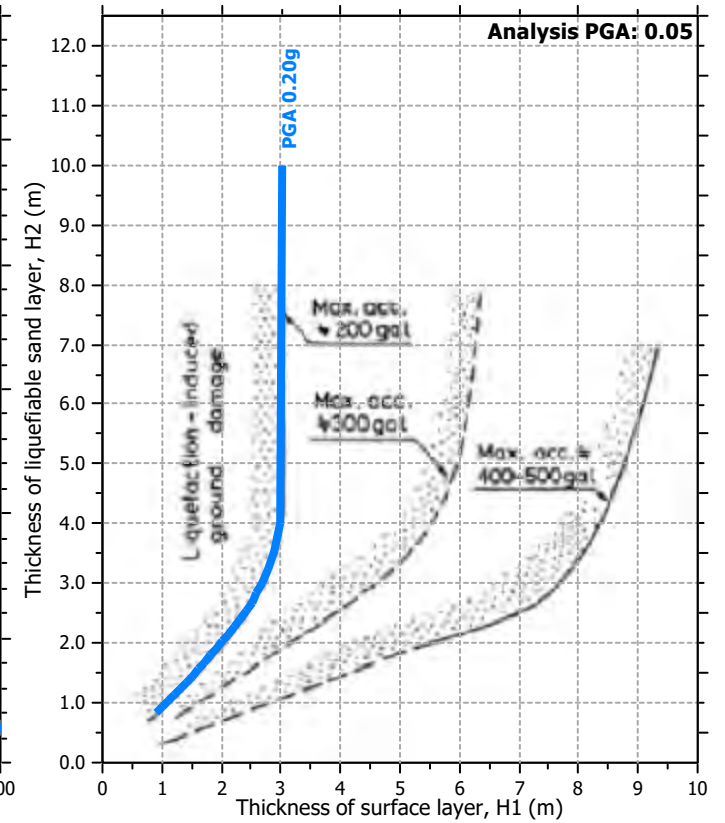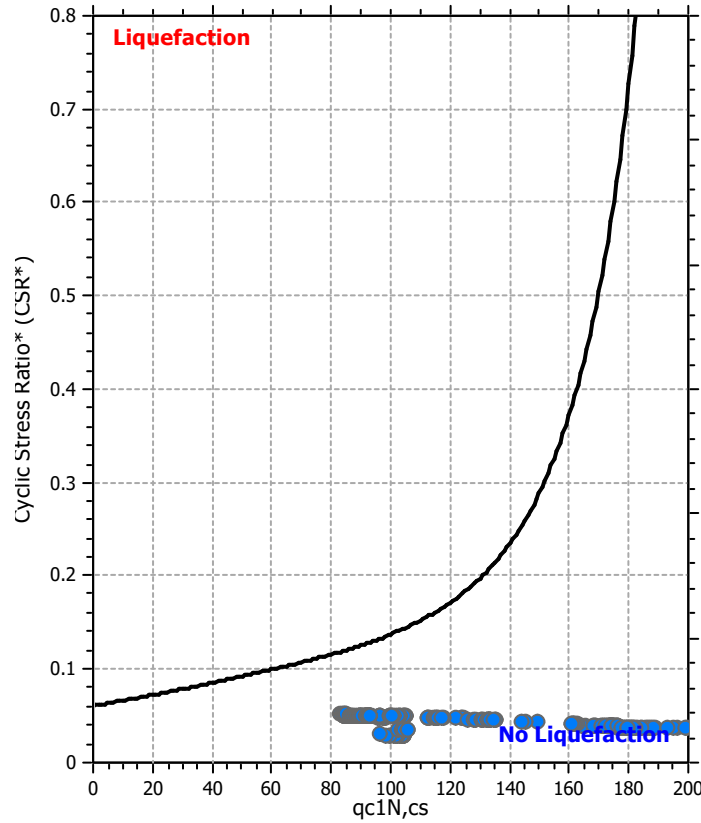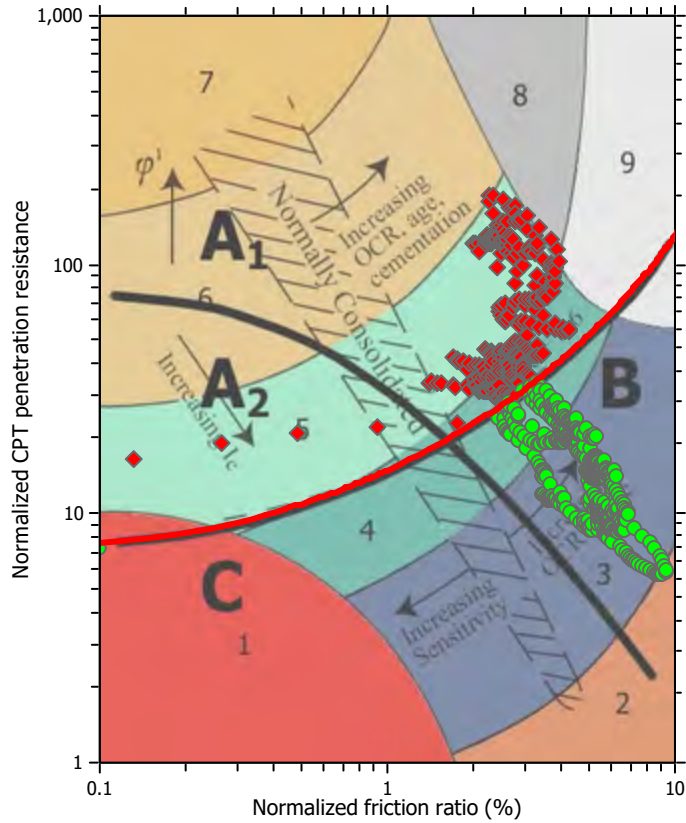

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

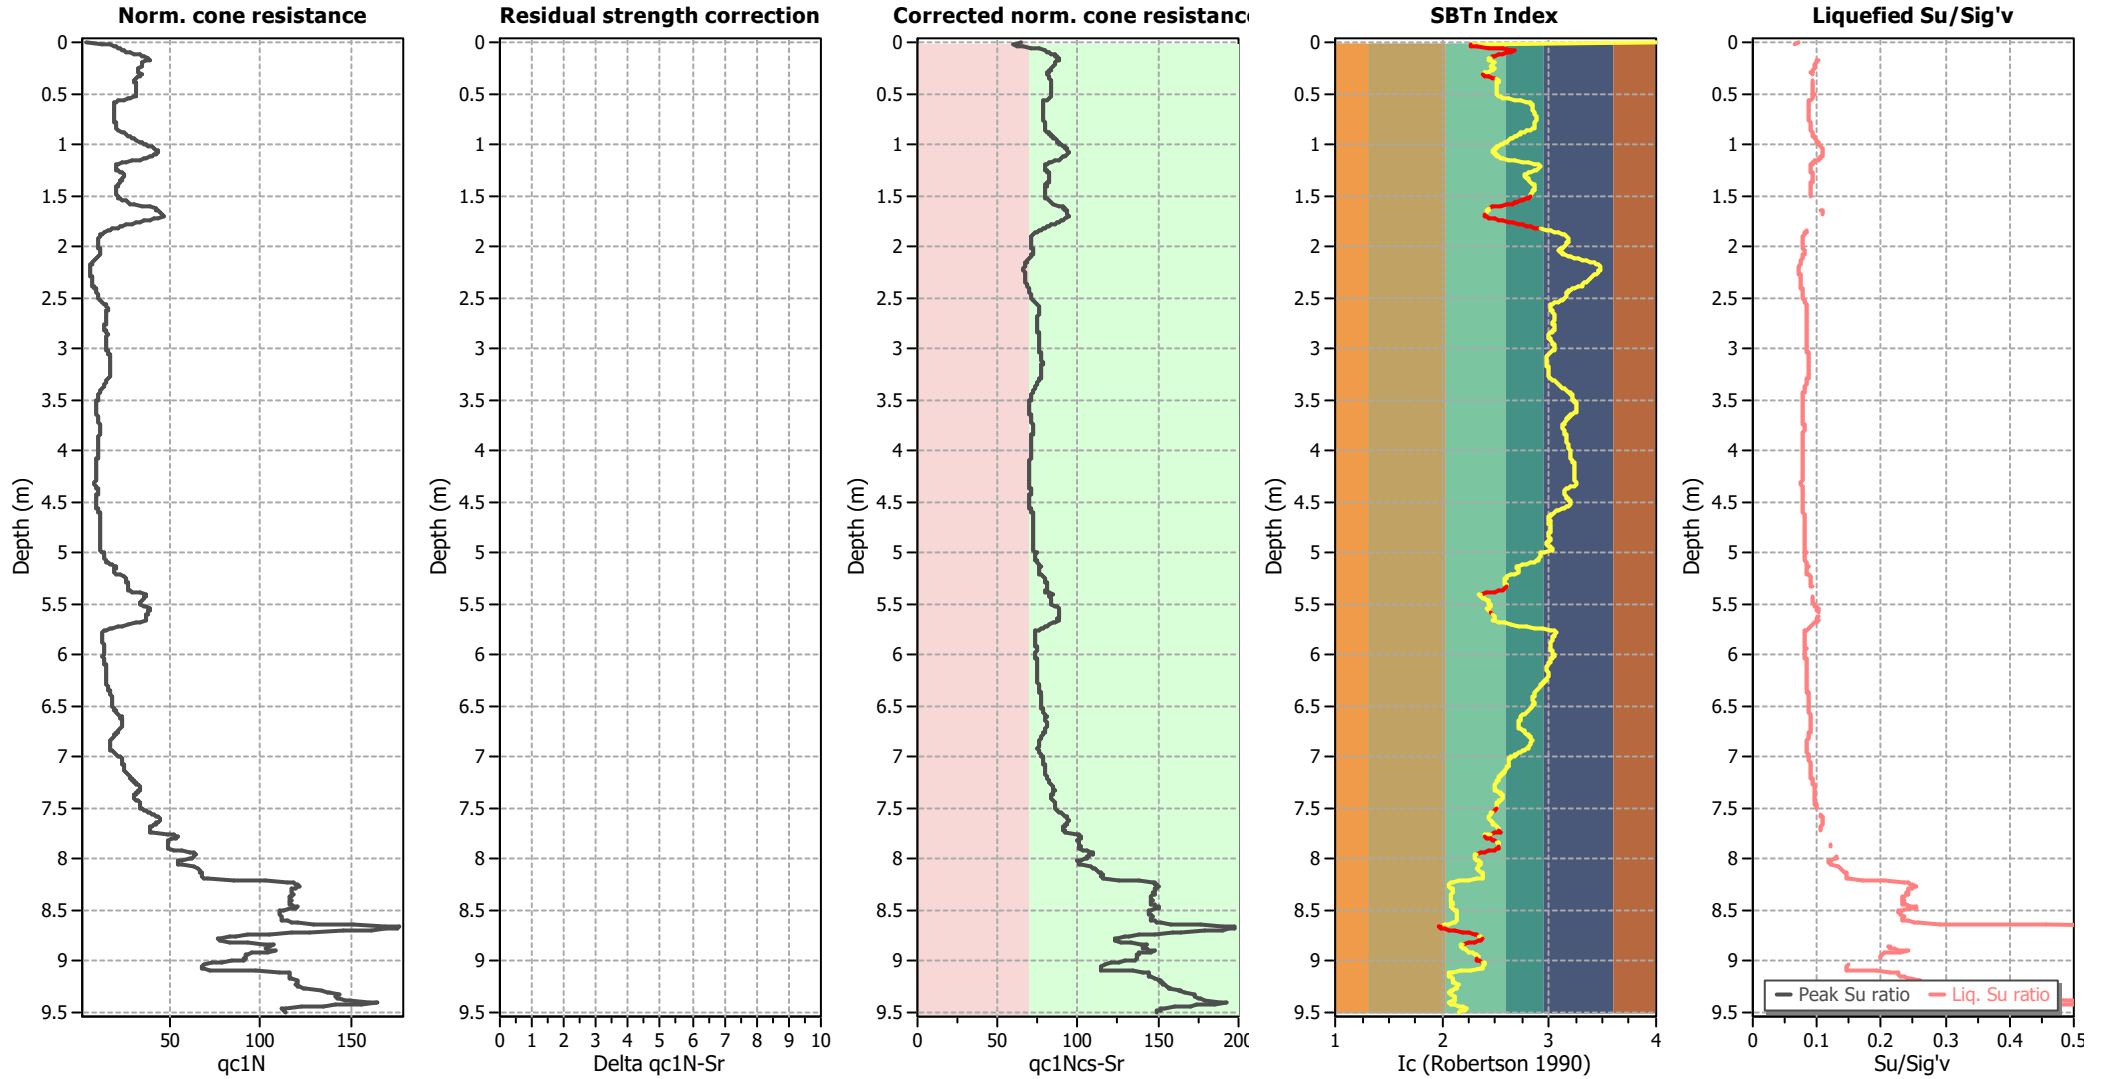

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

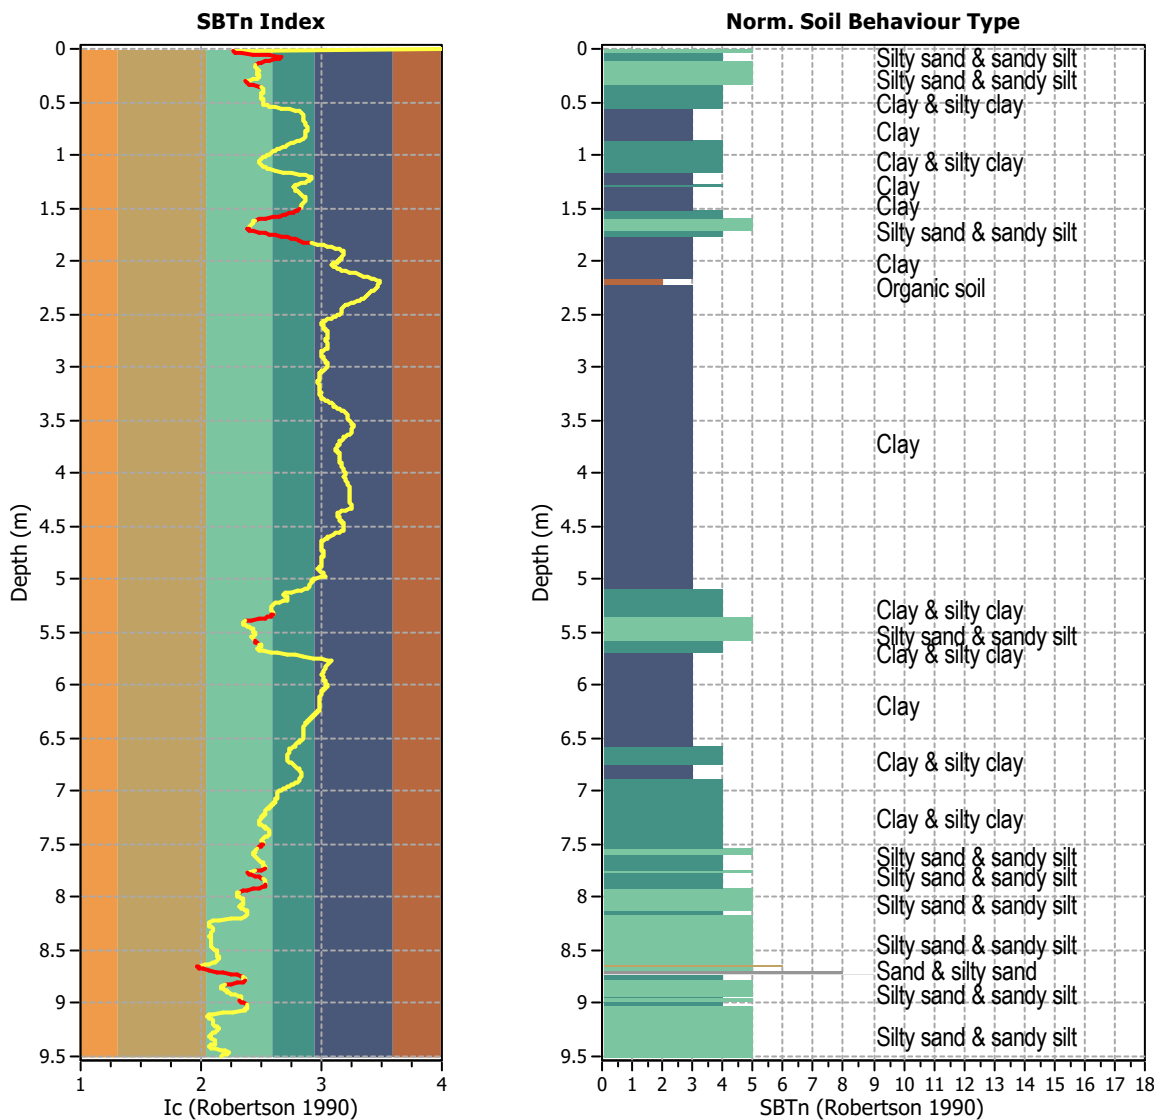


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 951
 Total points excluded: 106
 Exclusion percentage: 11.15%
 Number of layers detected: 14


Estimation of post-earthquake settlements

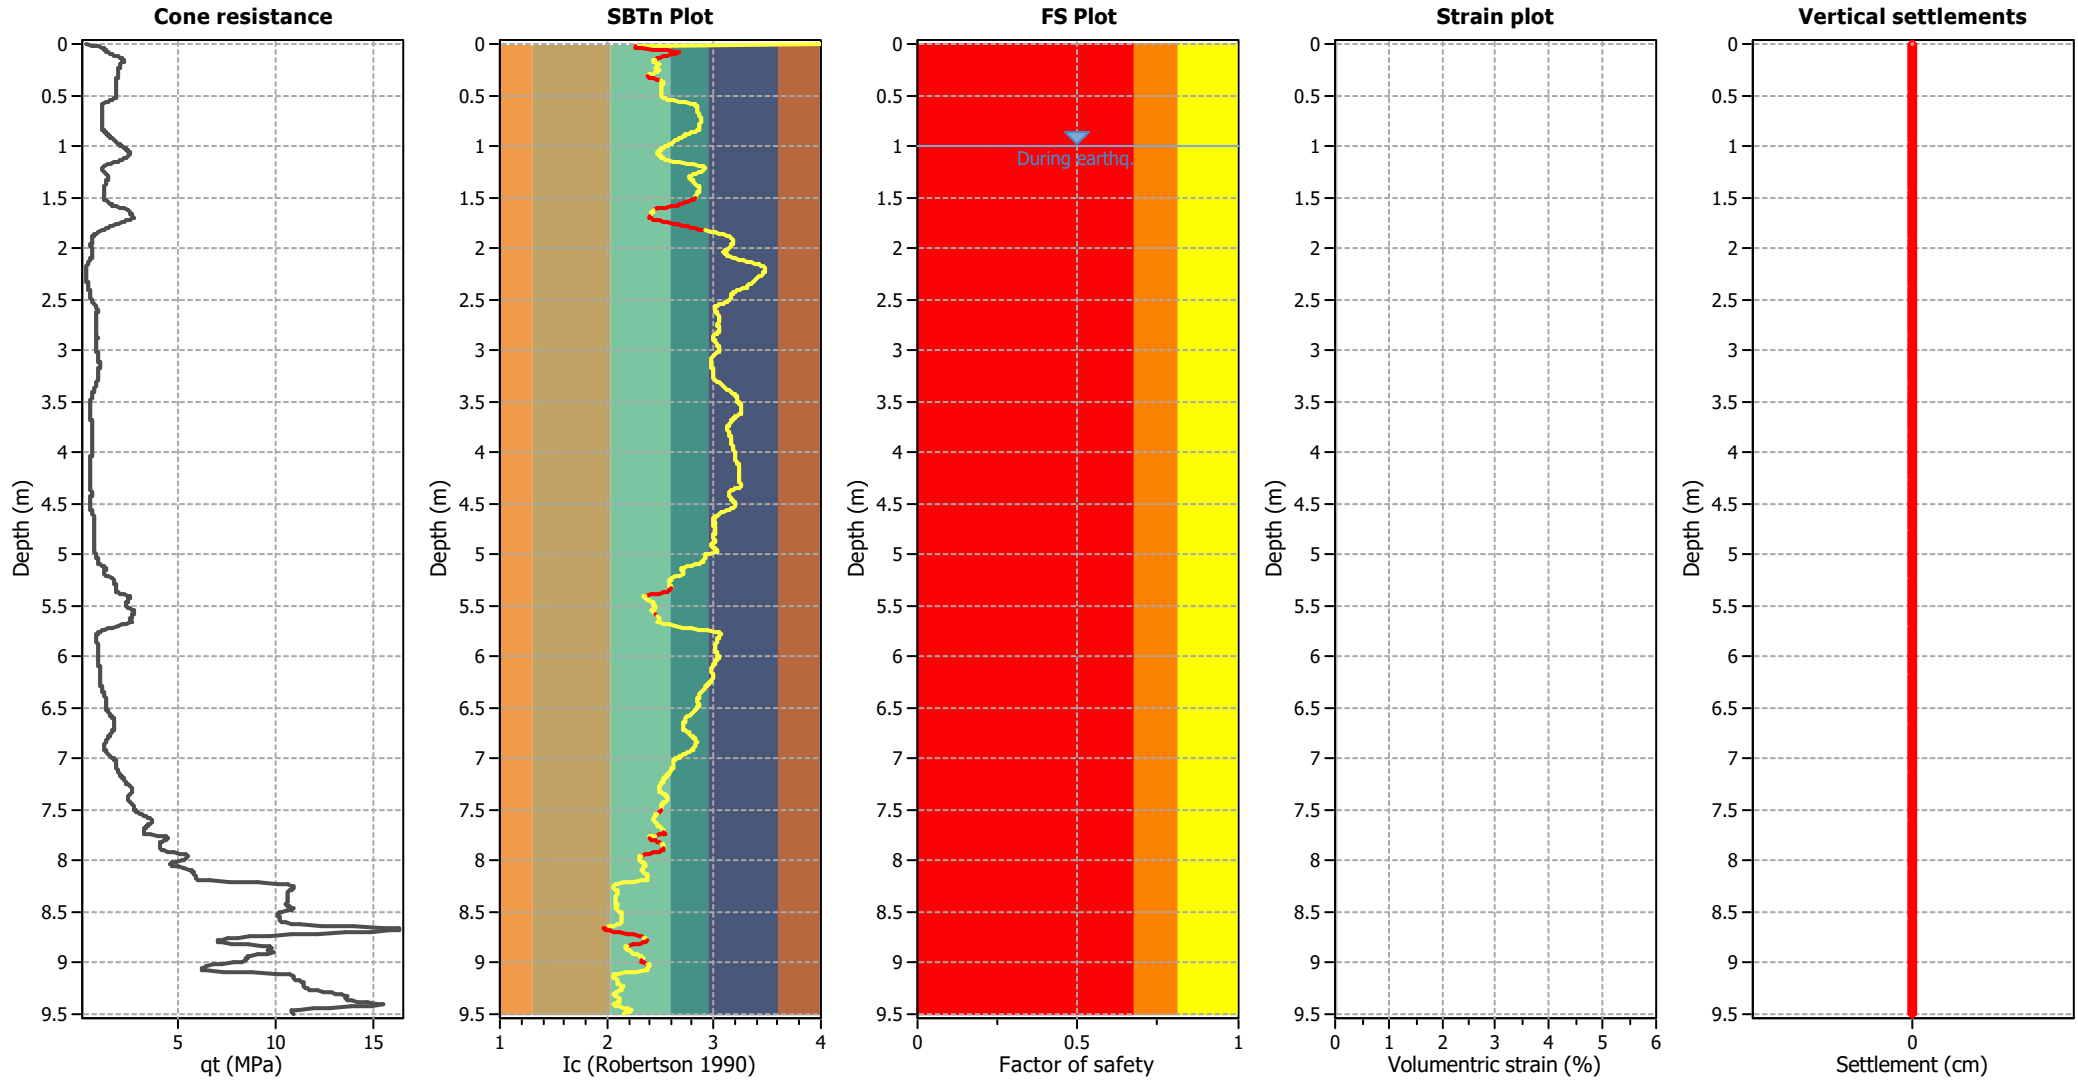

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

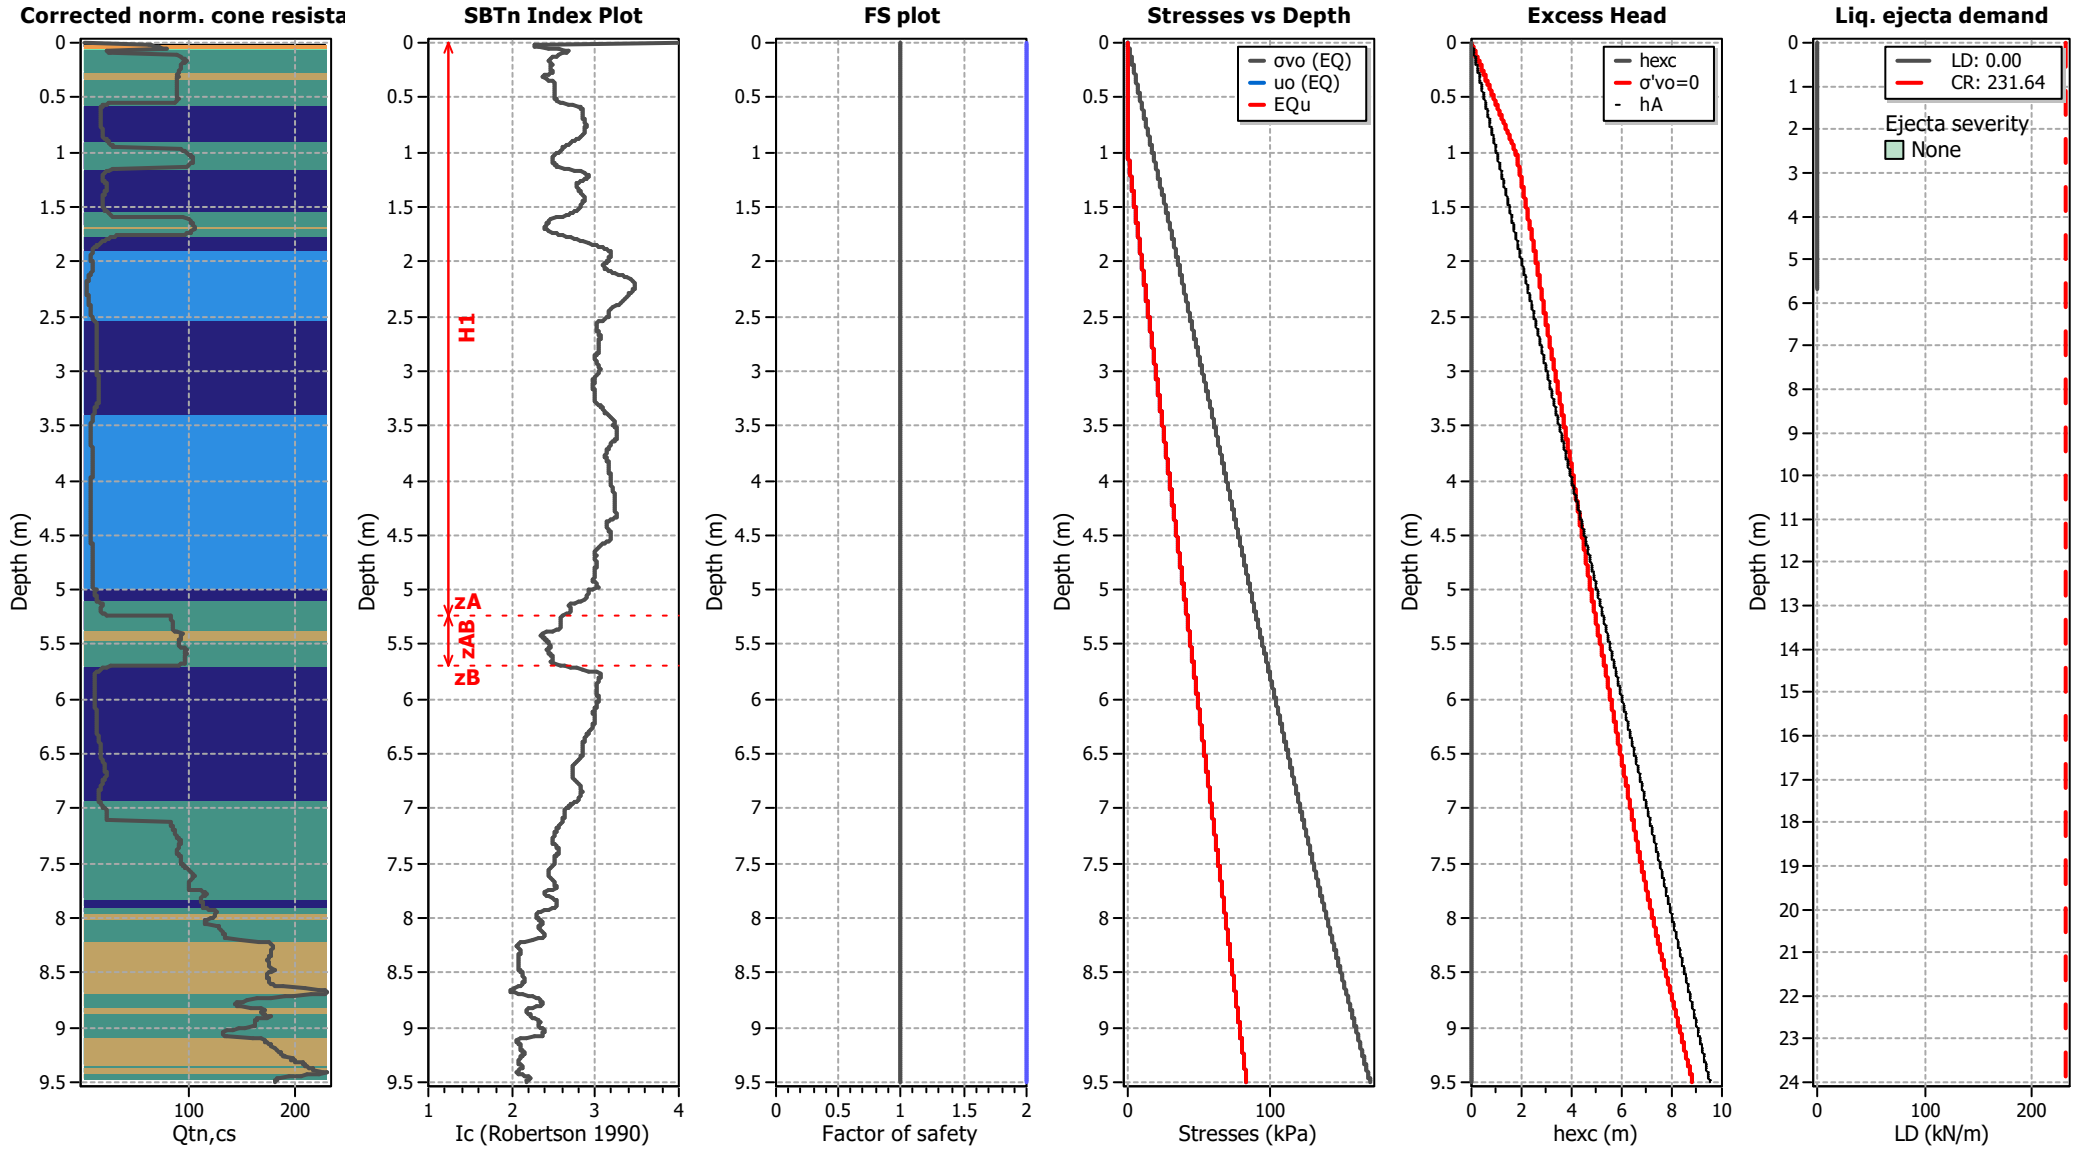

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT09A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

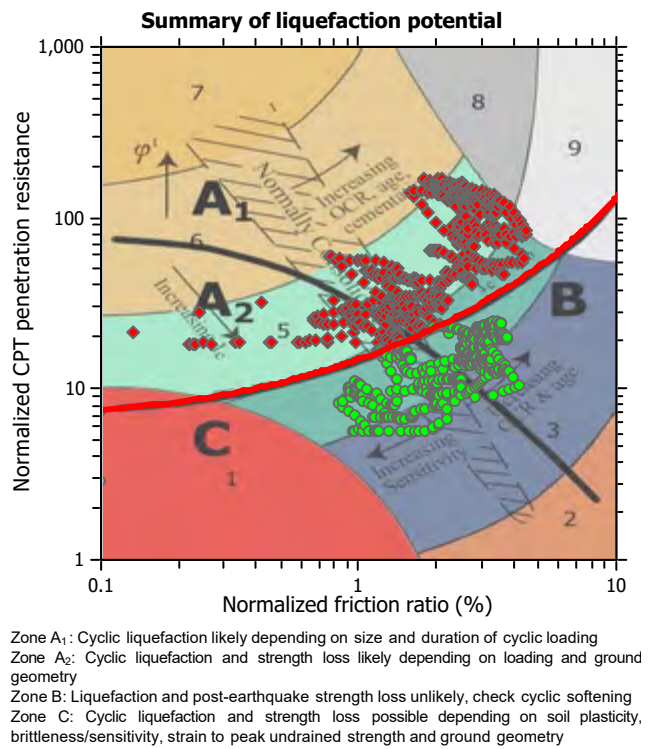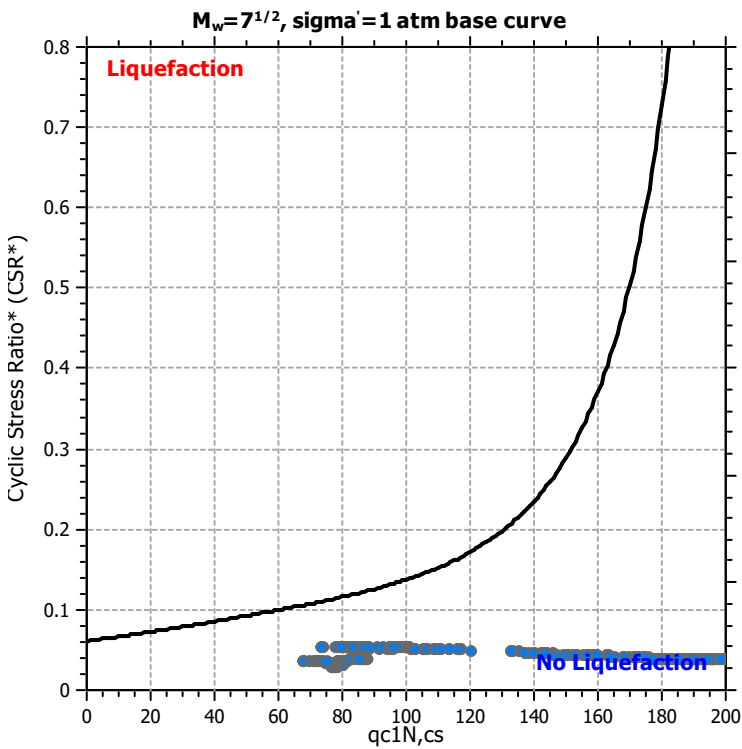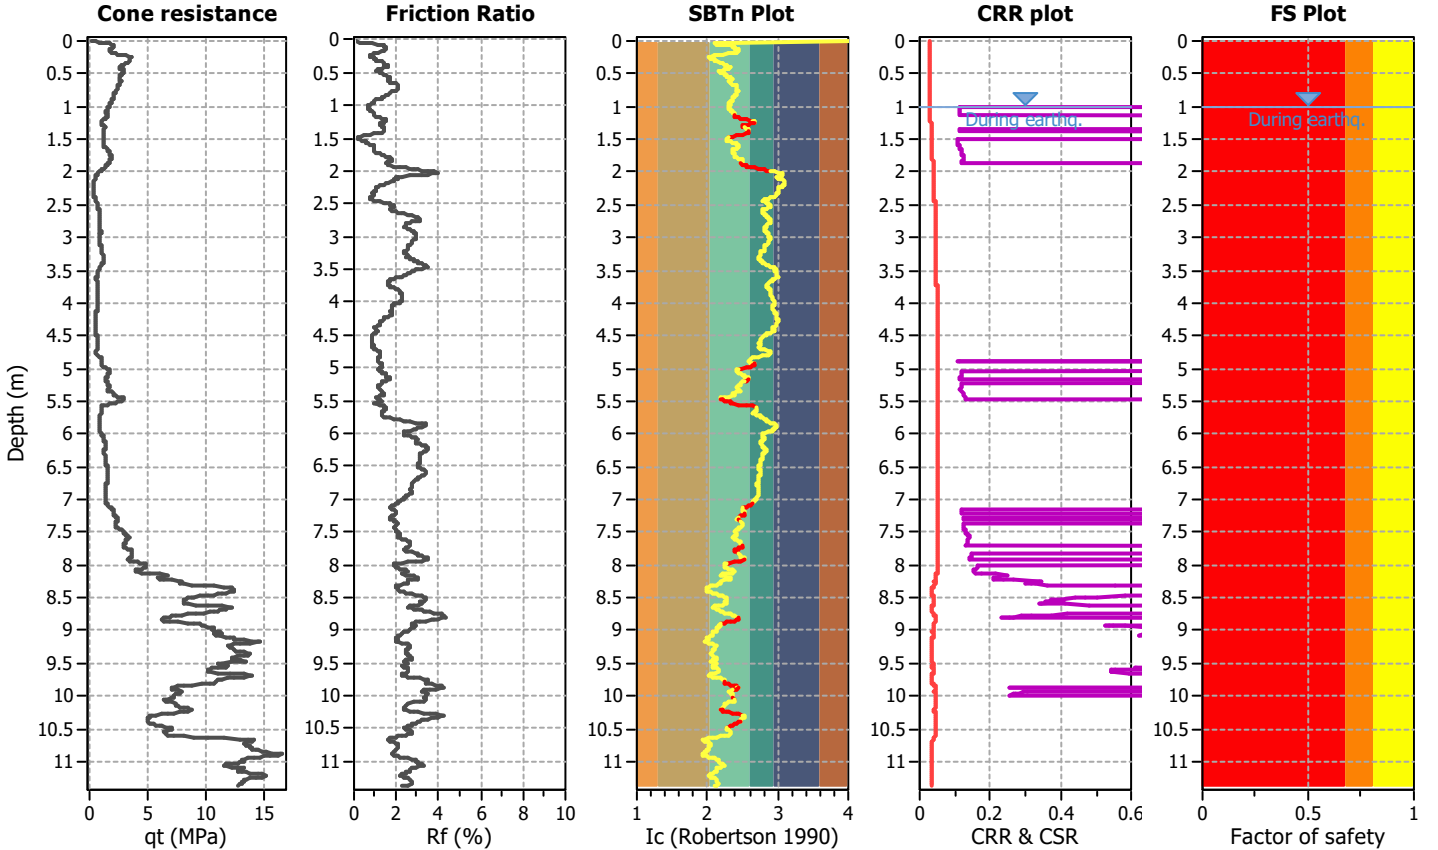

CPT basic interpretation plots

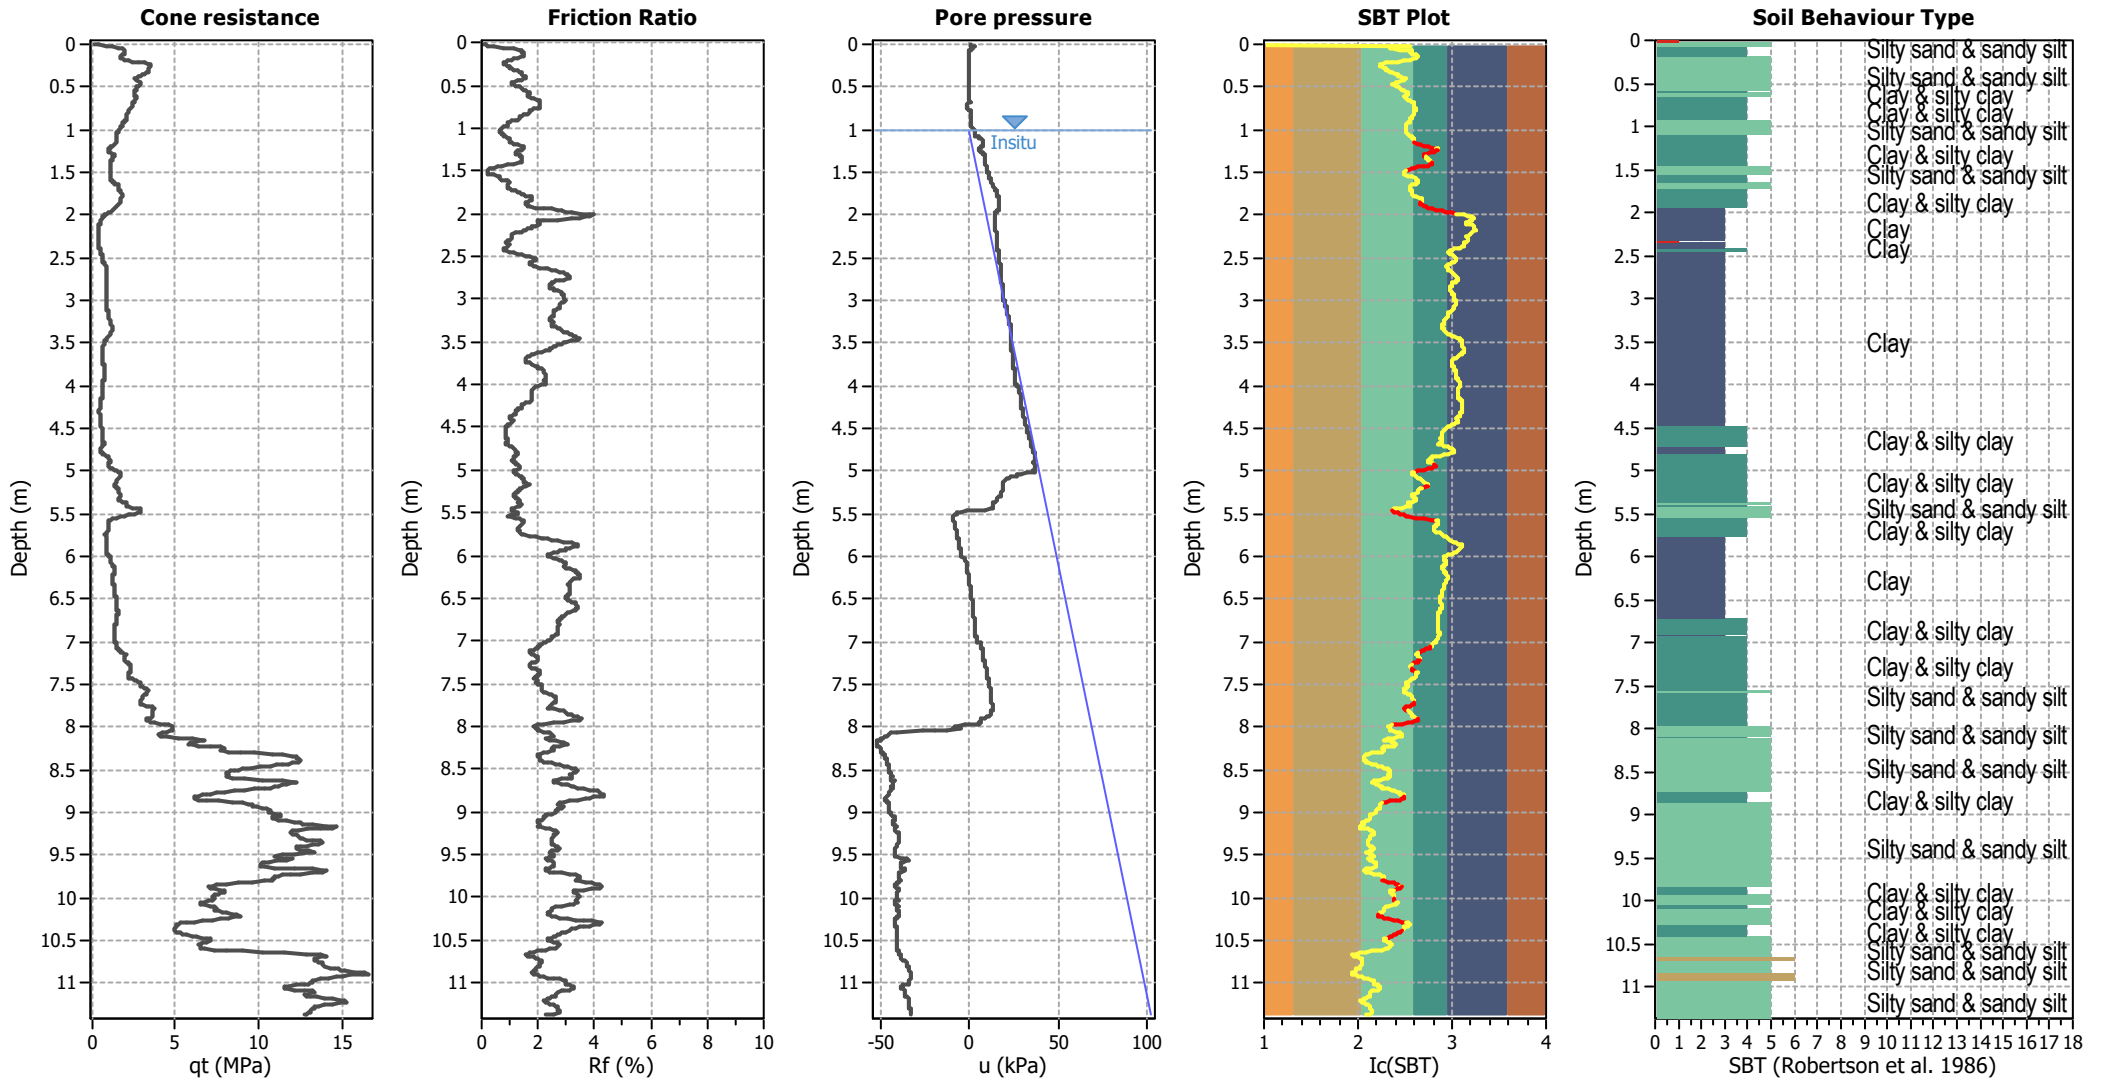


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

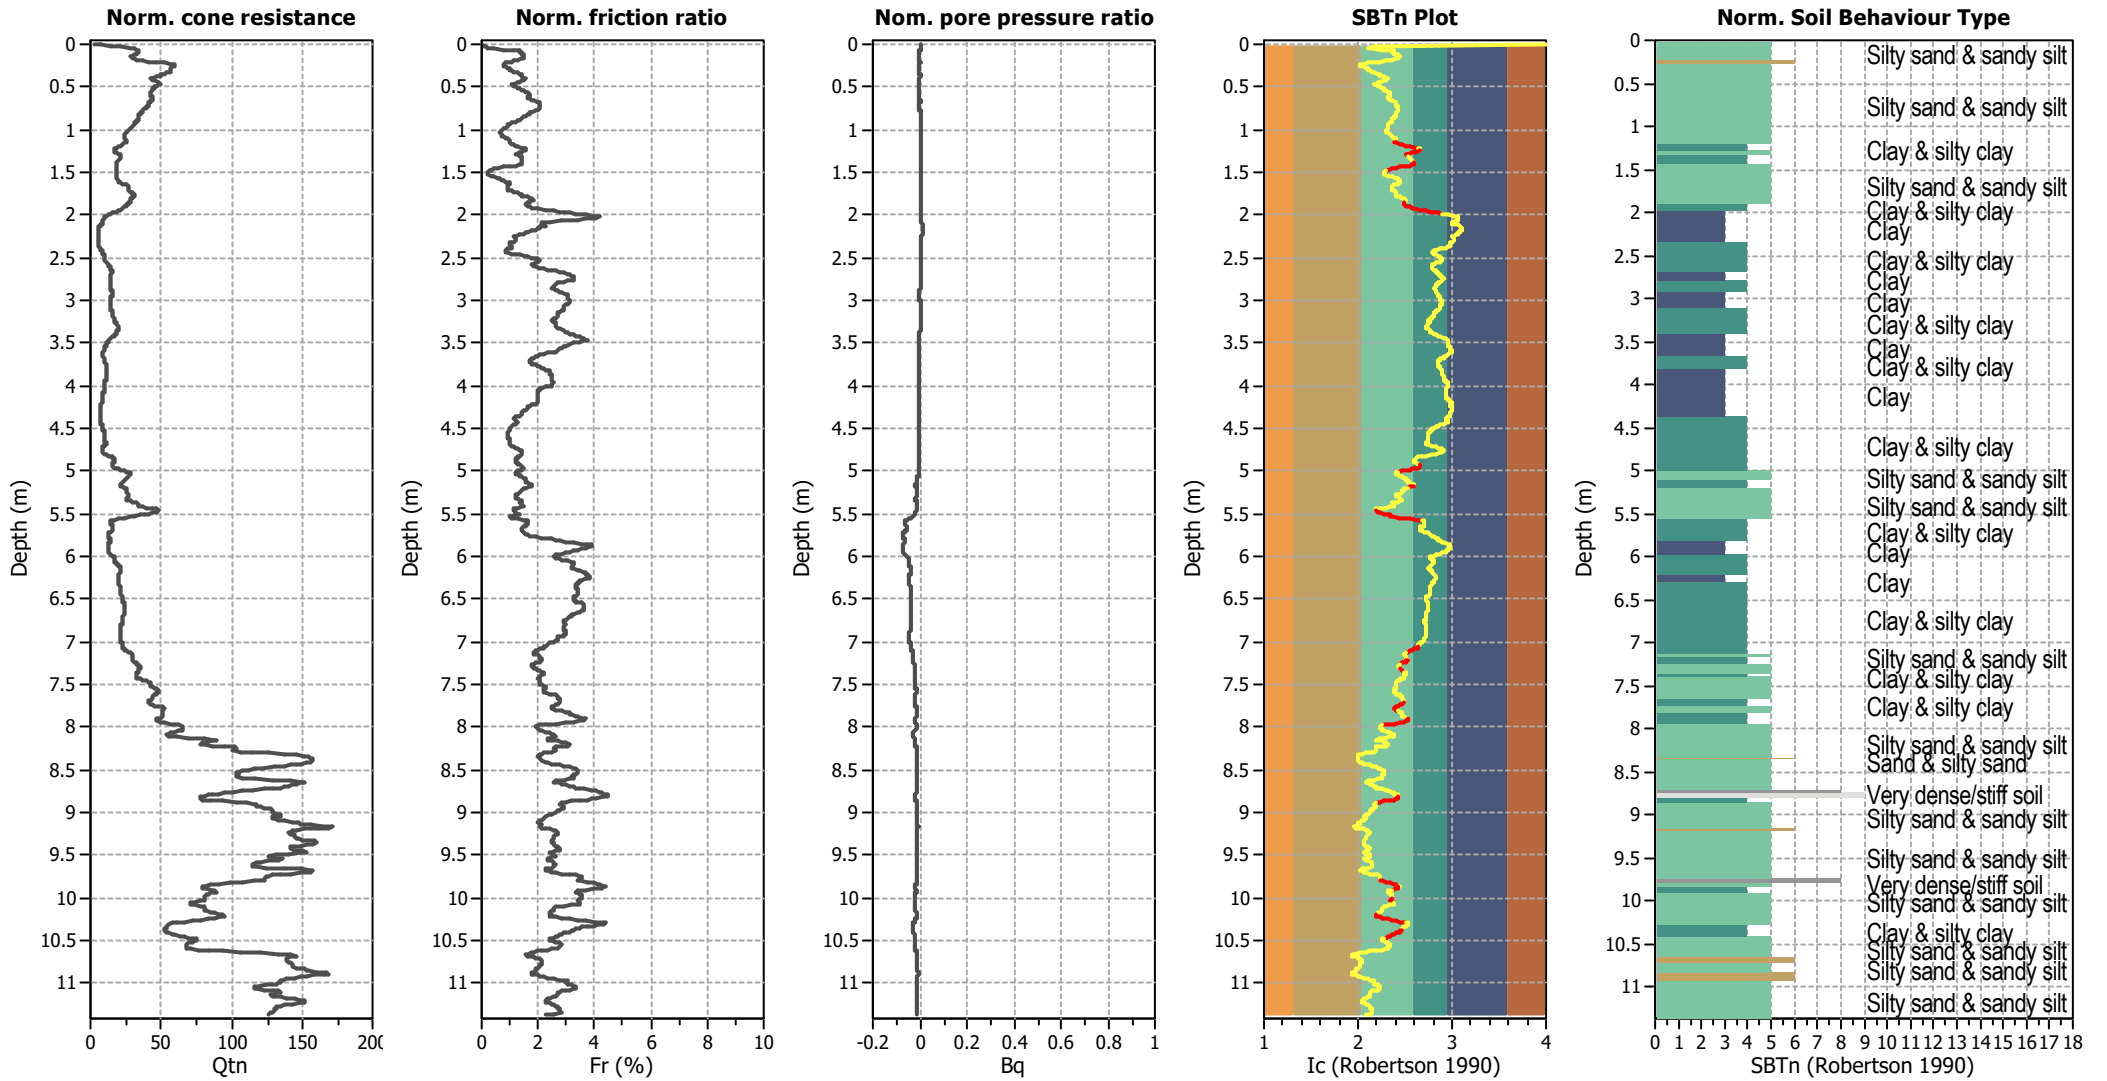


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

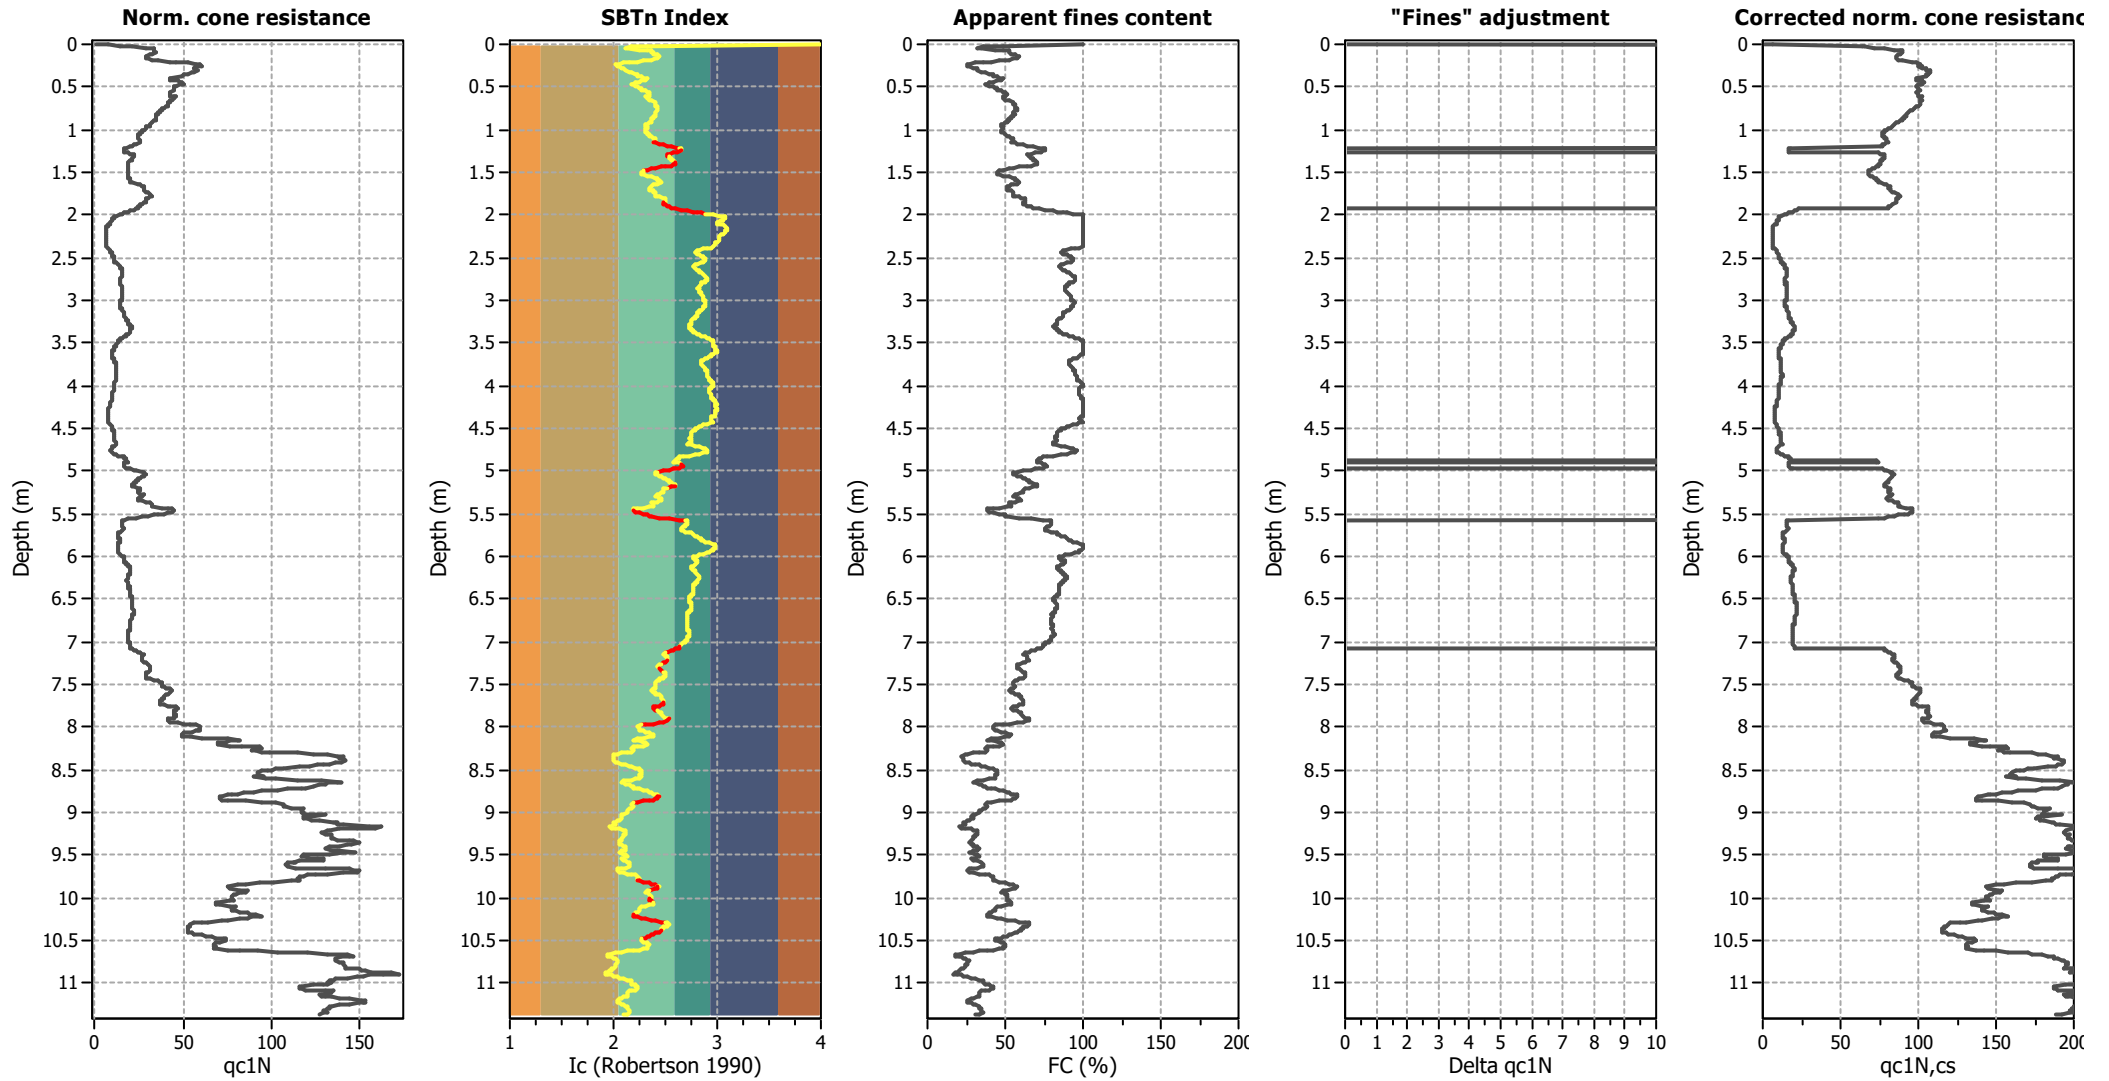

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

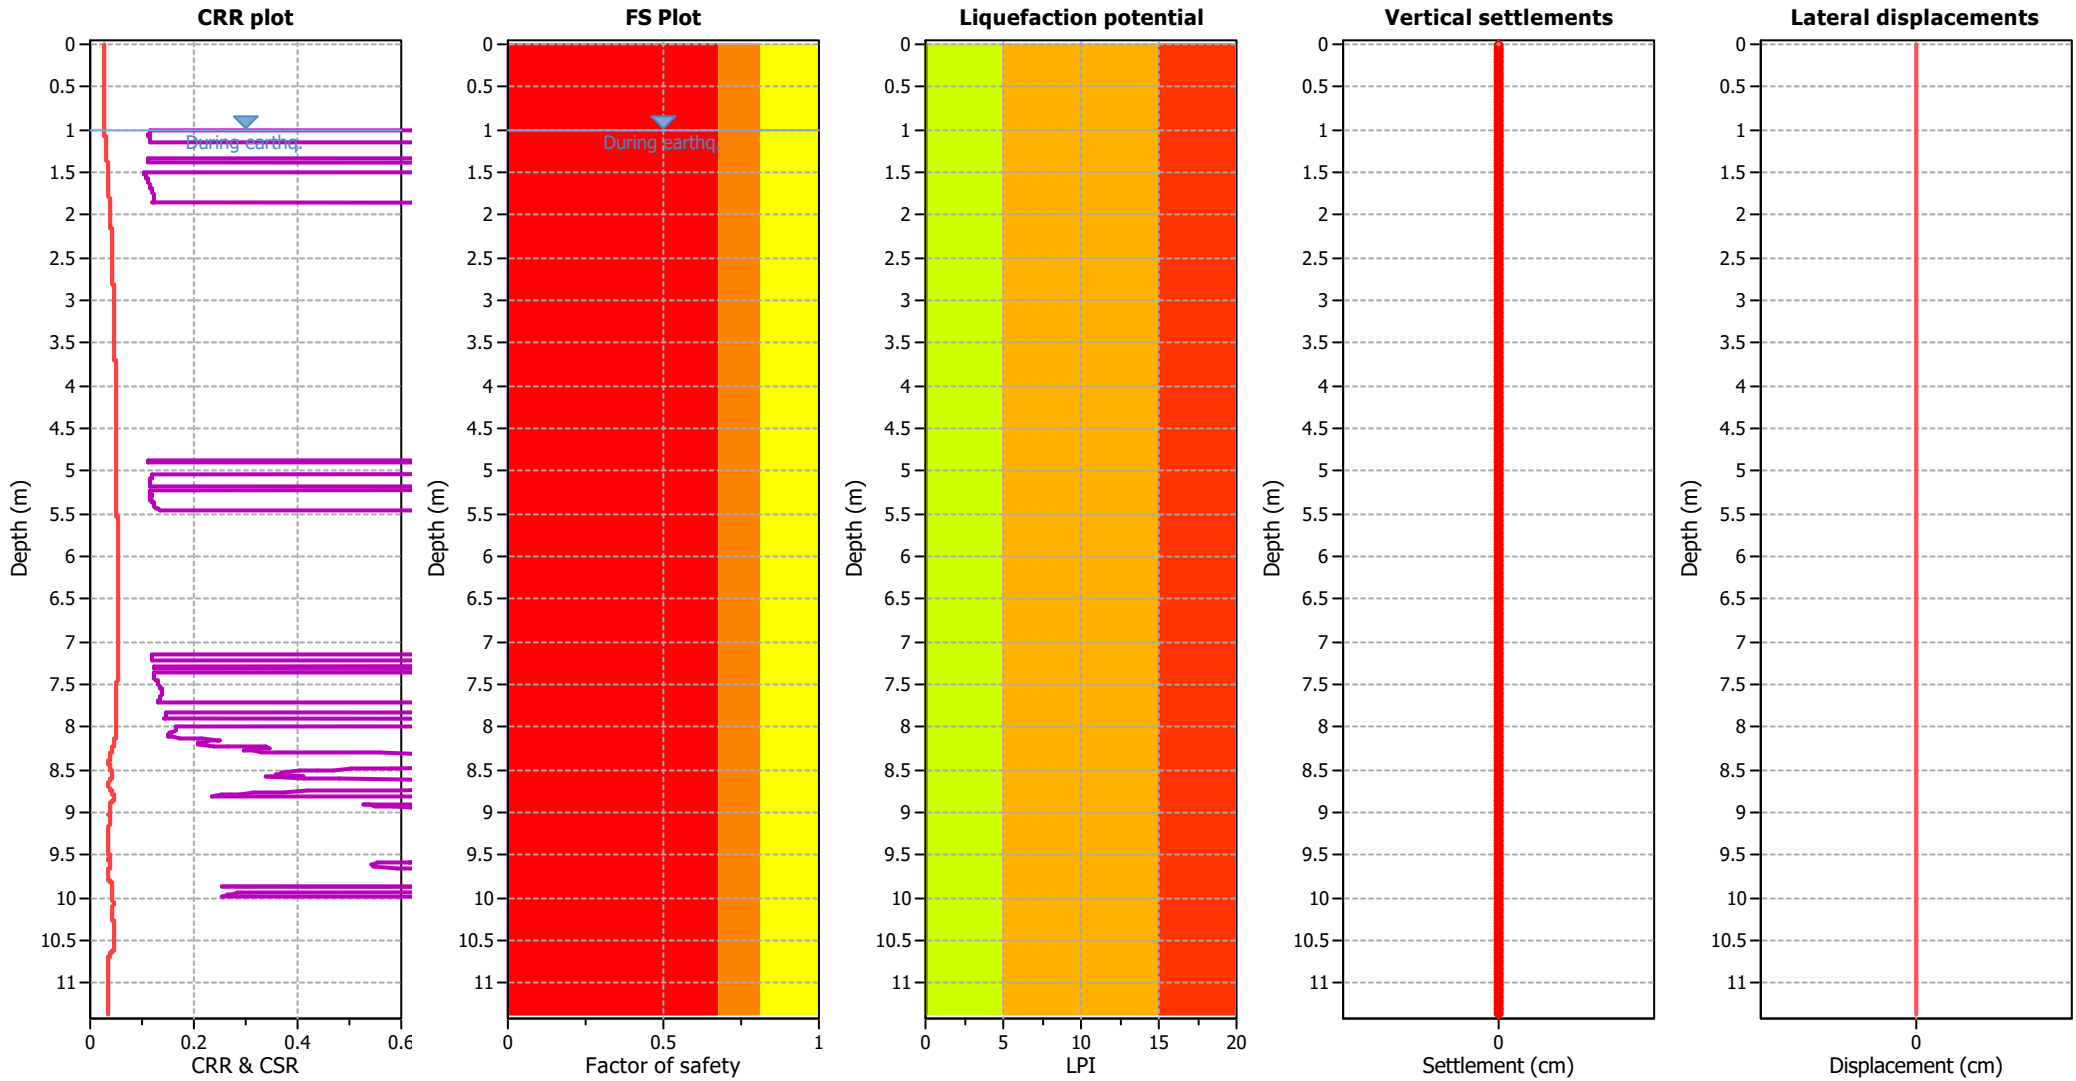

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

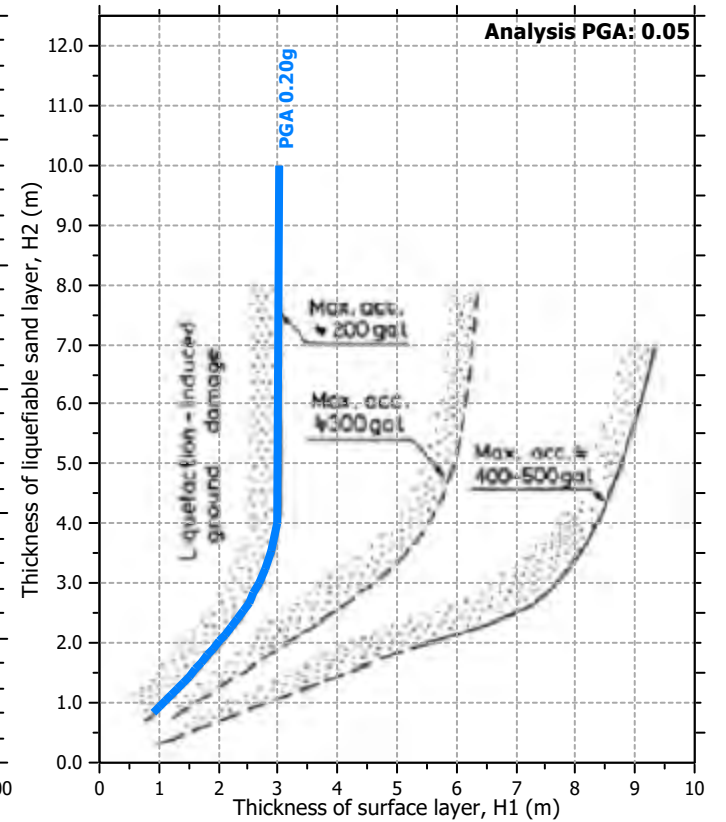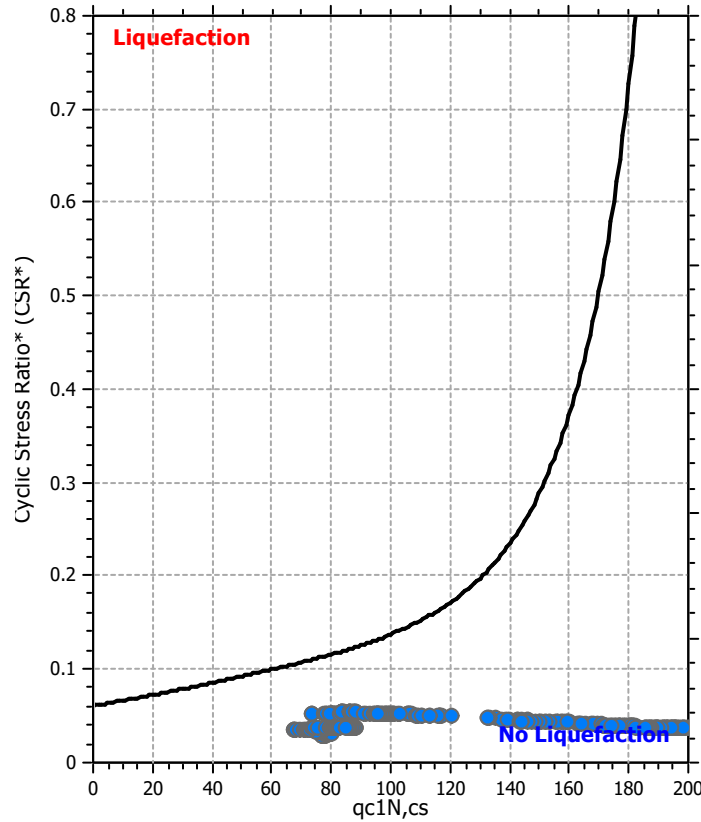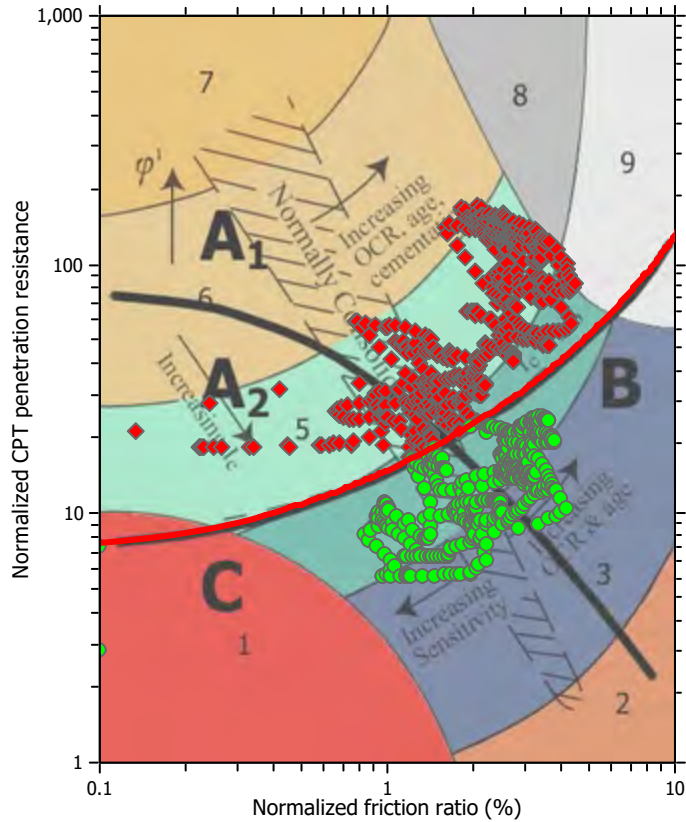

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

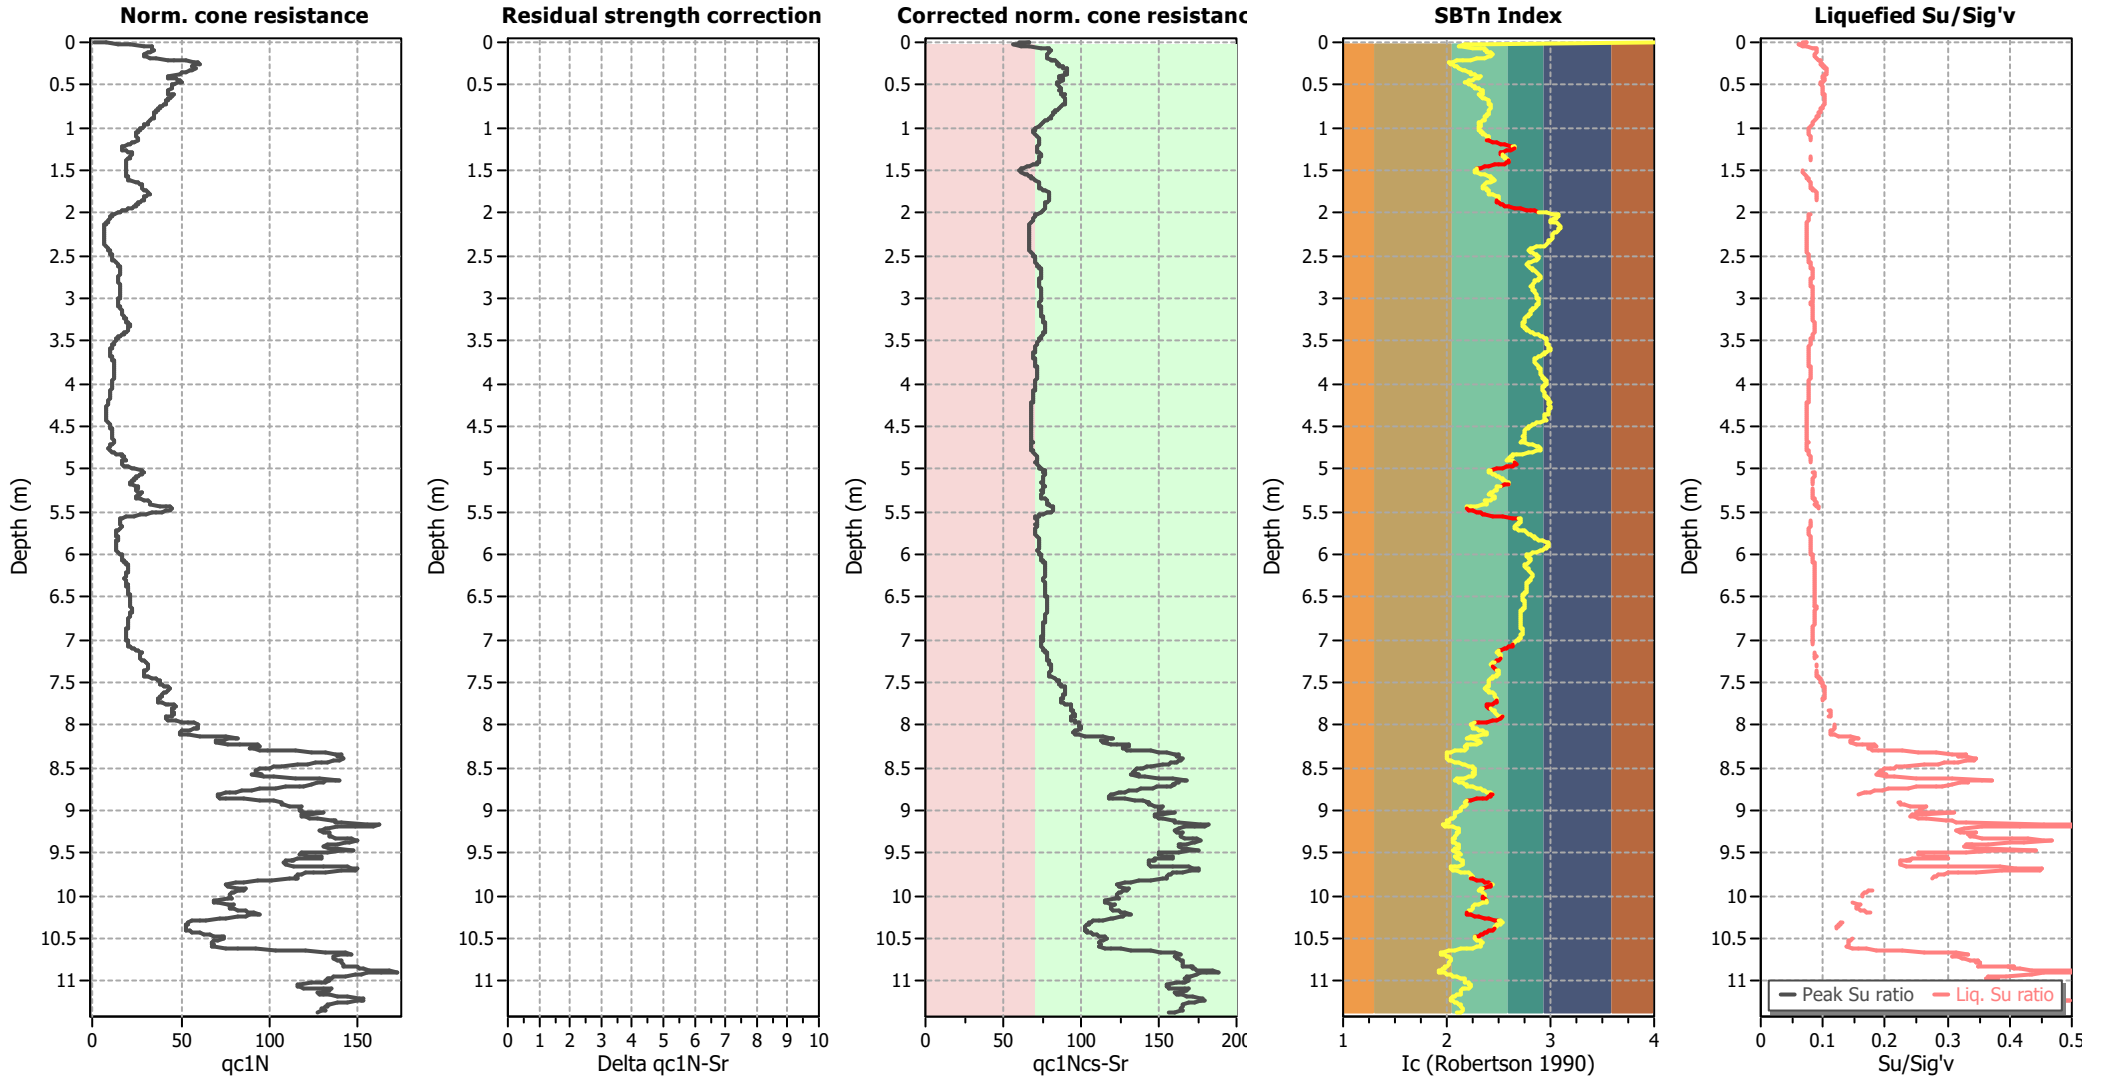

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

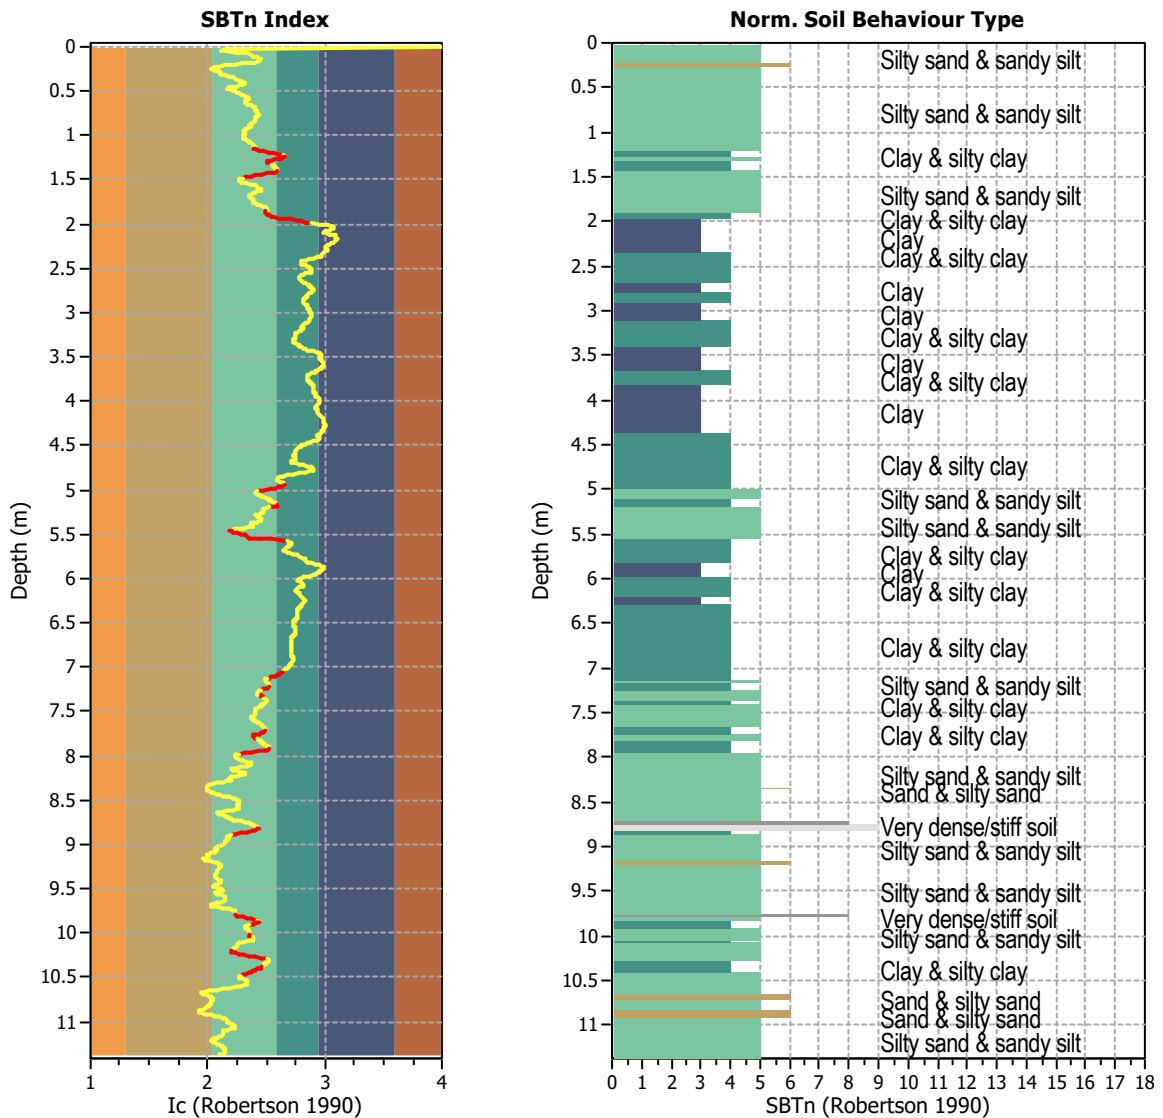


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1138
 Total points excluded: 150
 Exclusion percentage: 13.18%
 Number of layers detected: 20


Estimation of post-earthquake settlements

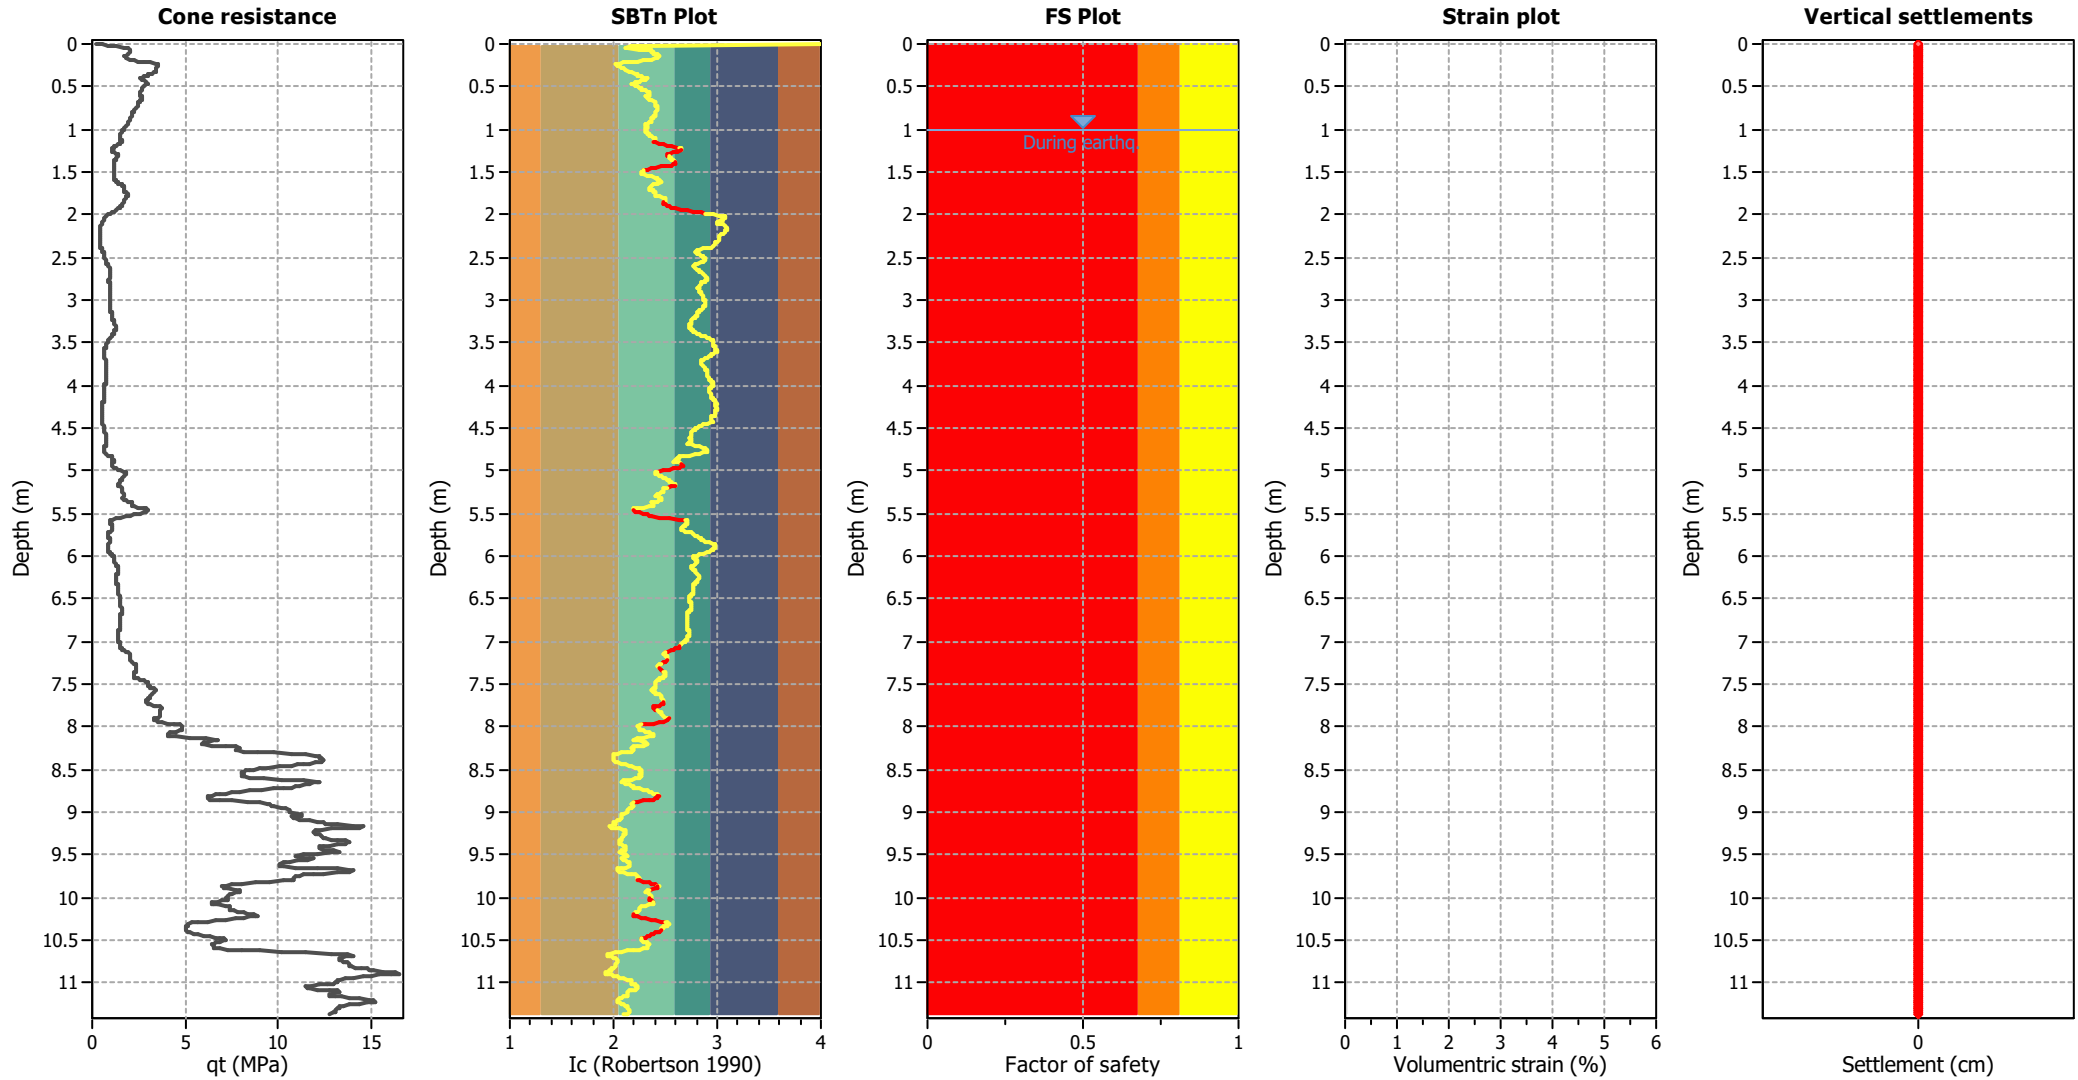

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

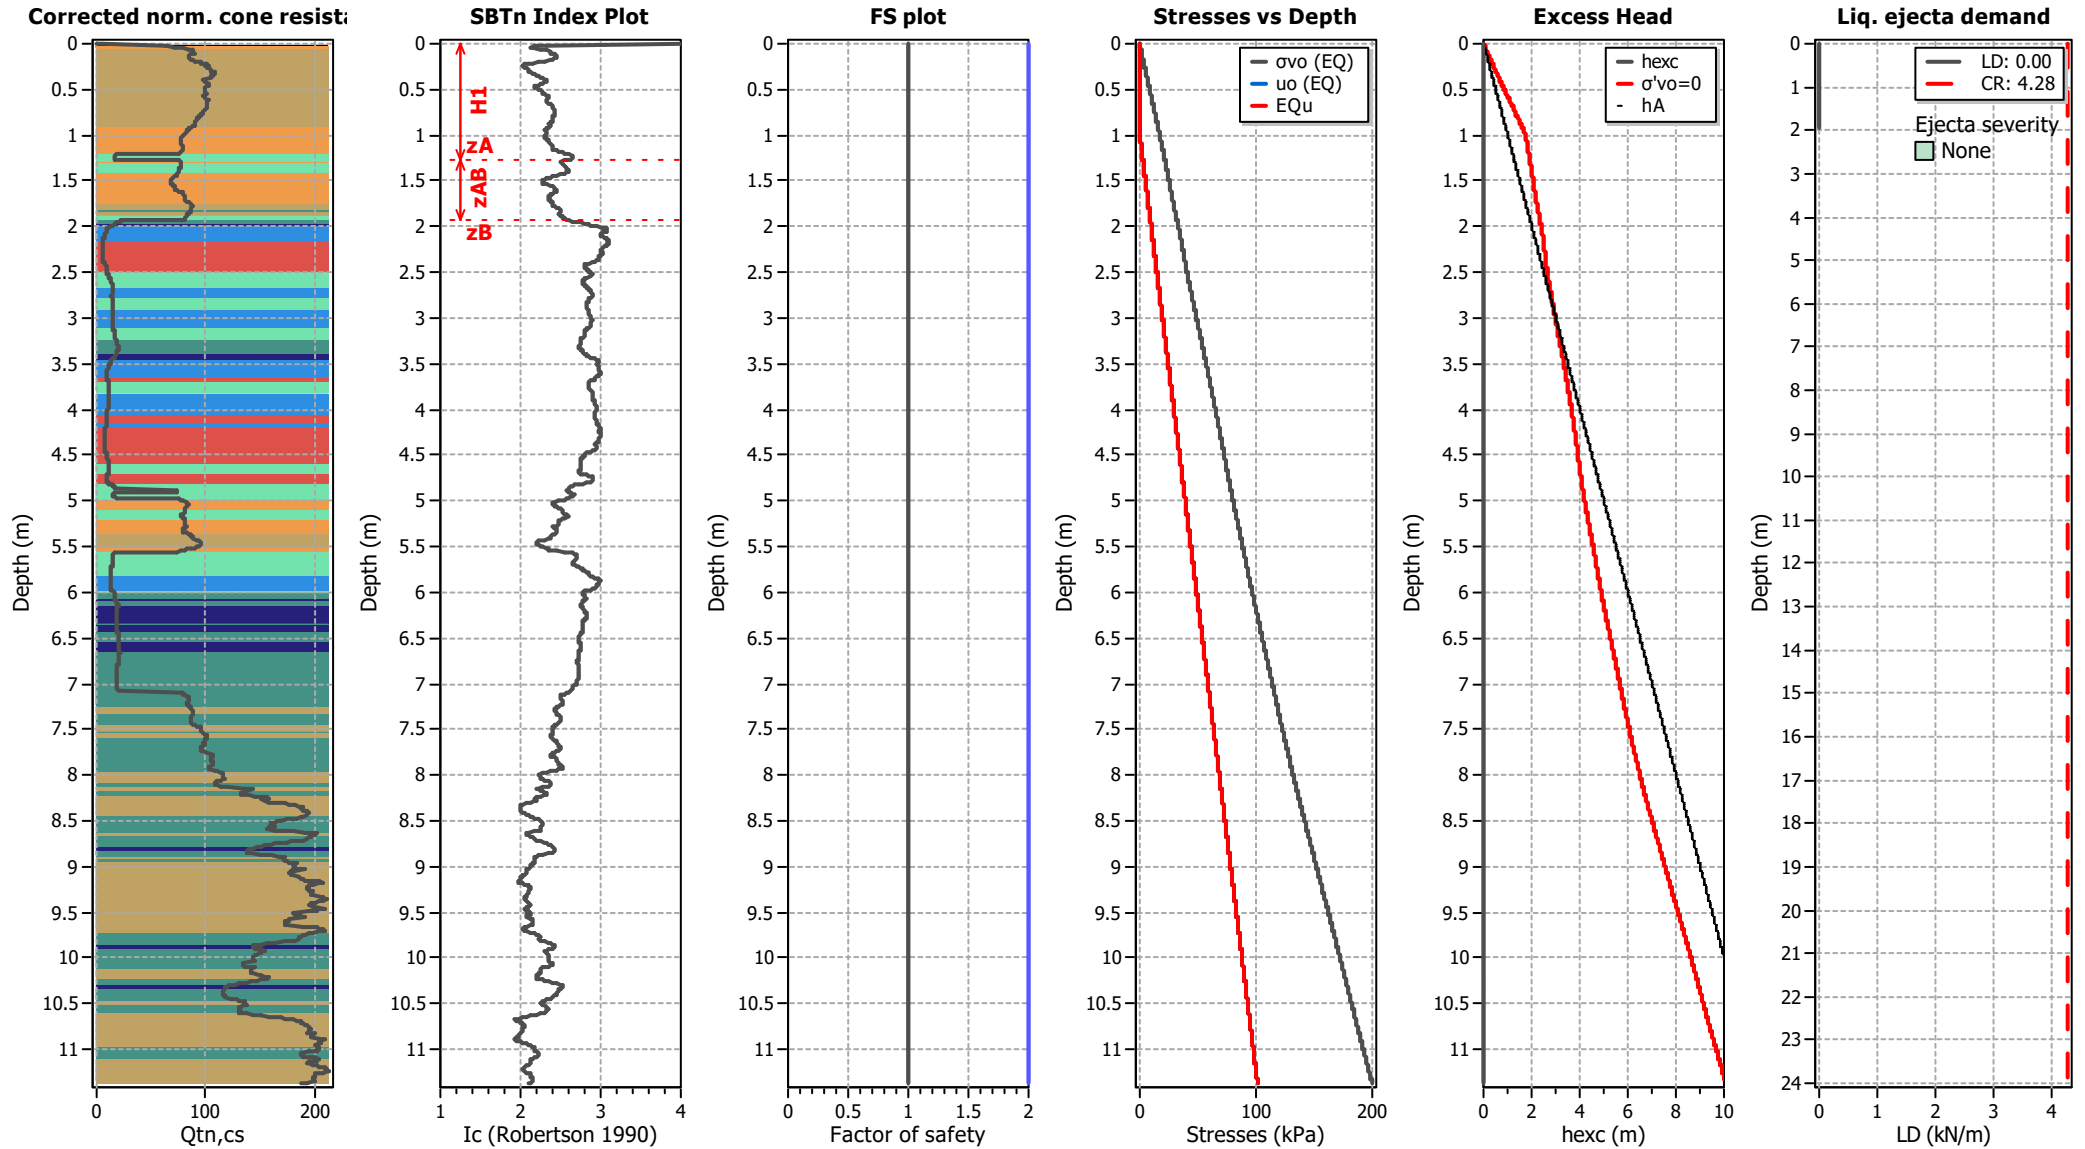

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT10

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

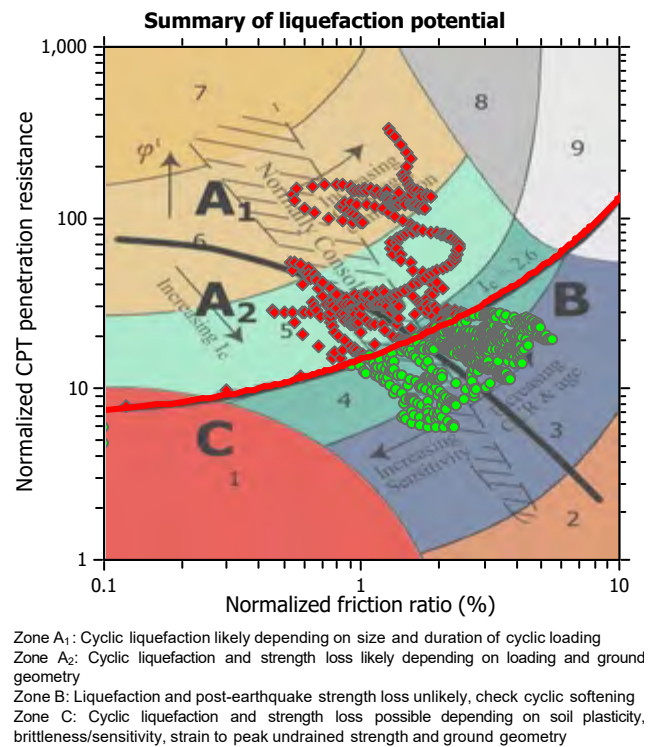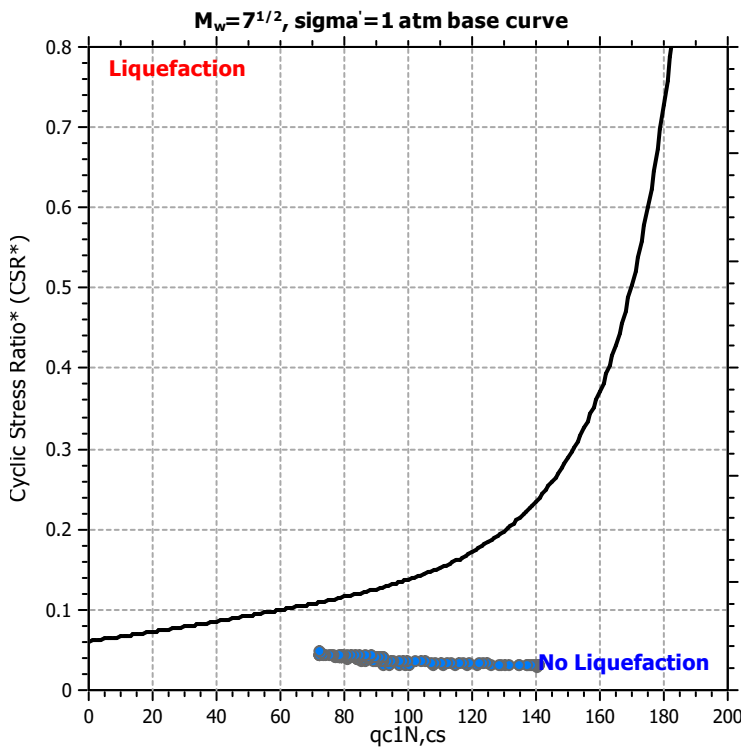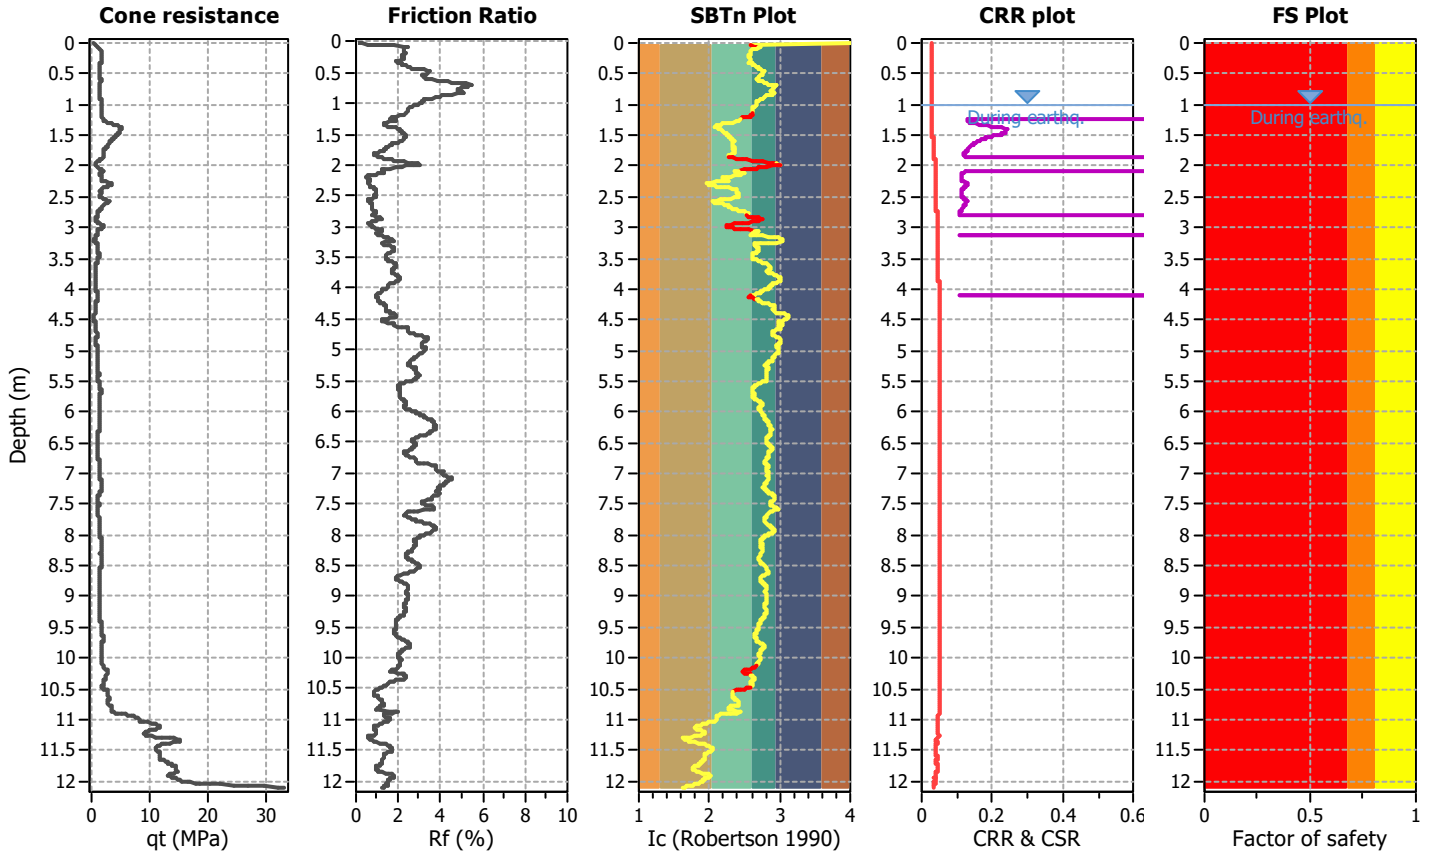

CPT basic interpretation plots

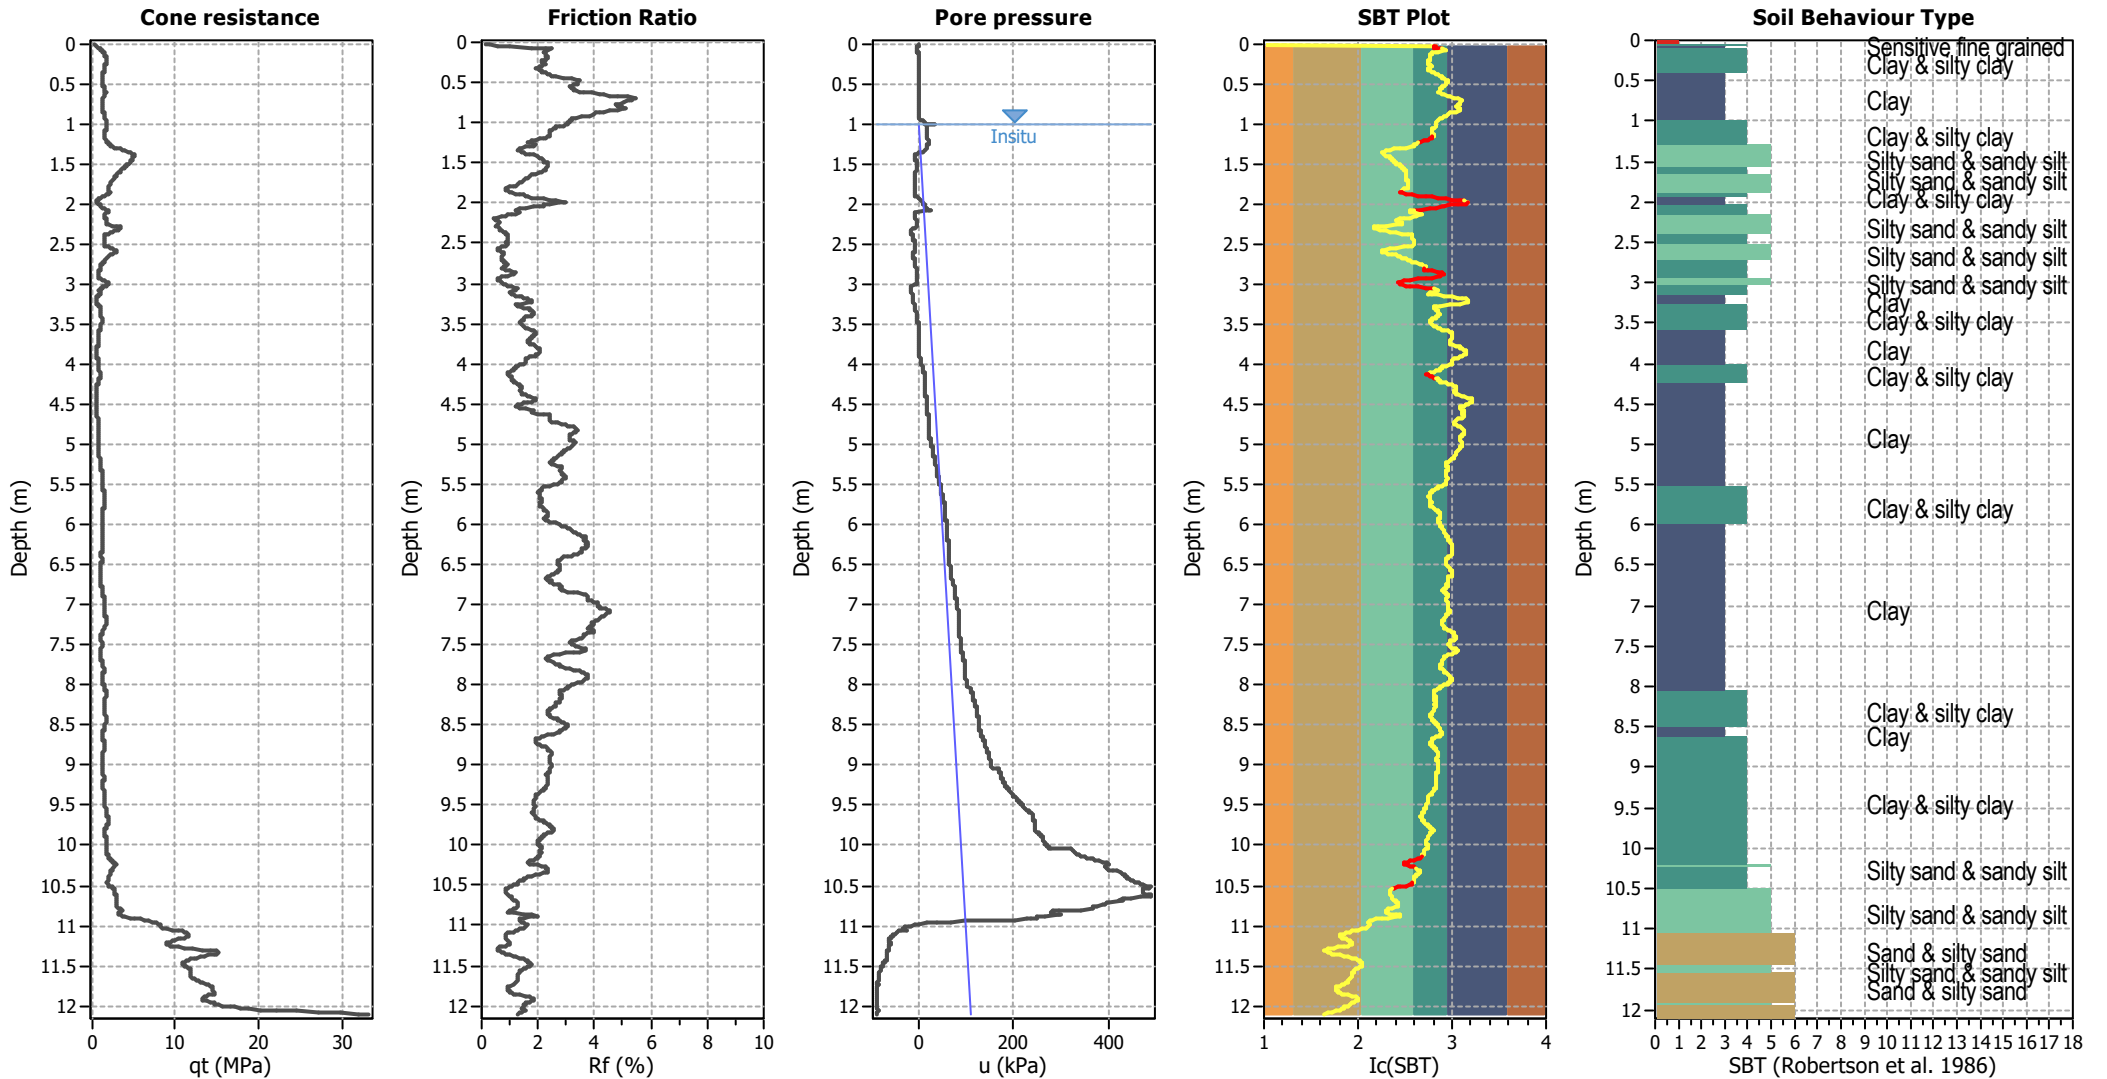


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

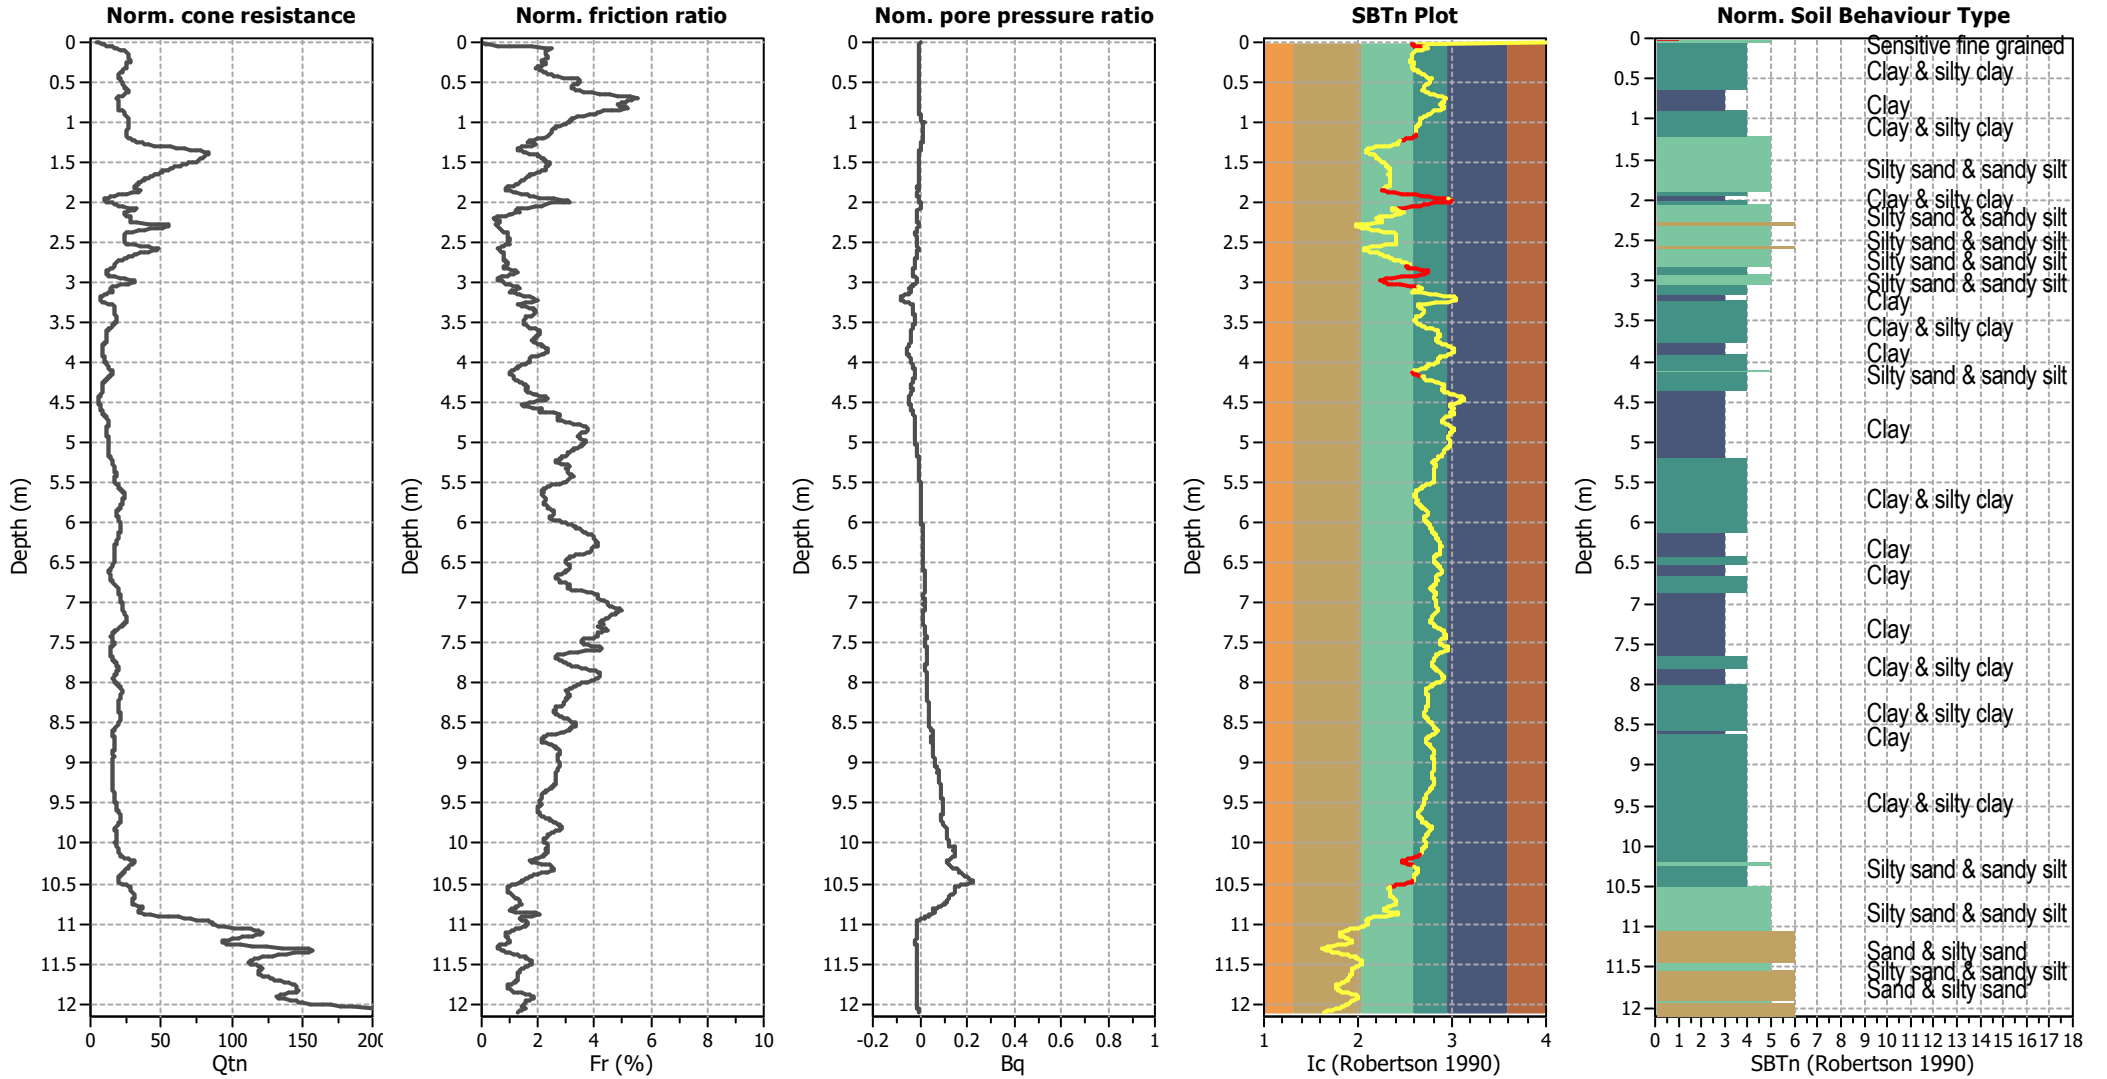


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I _c value	I _c cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

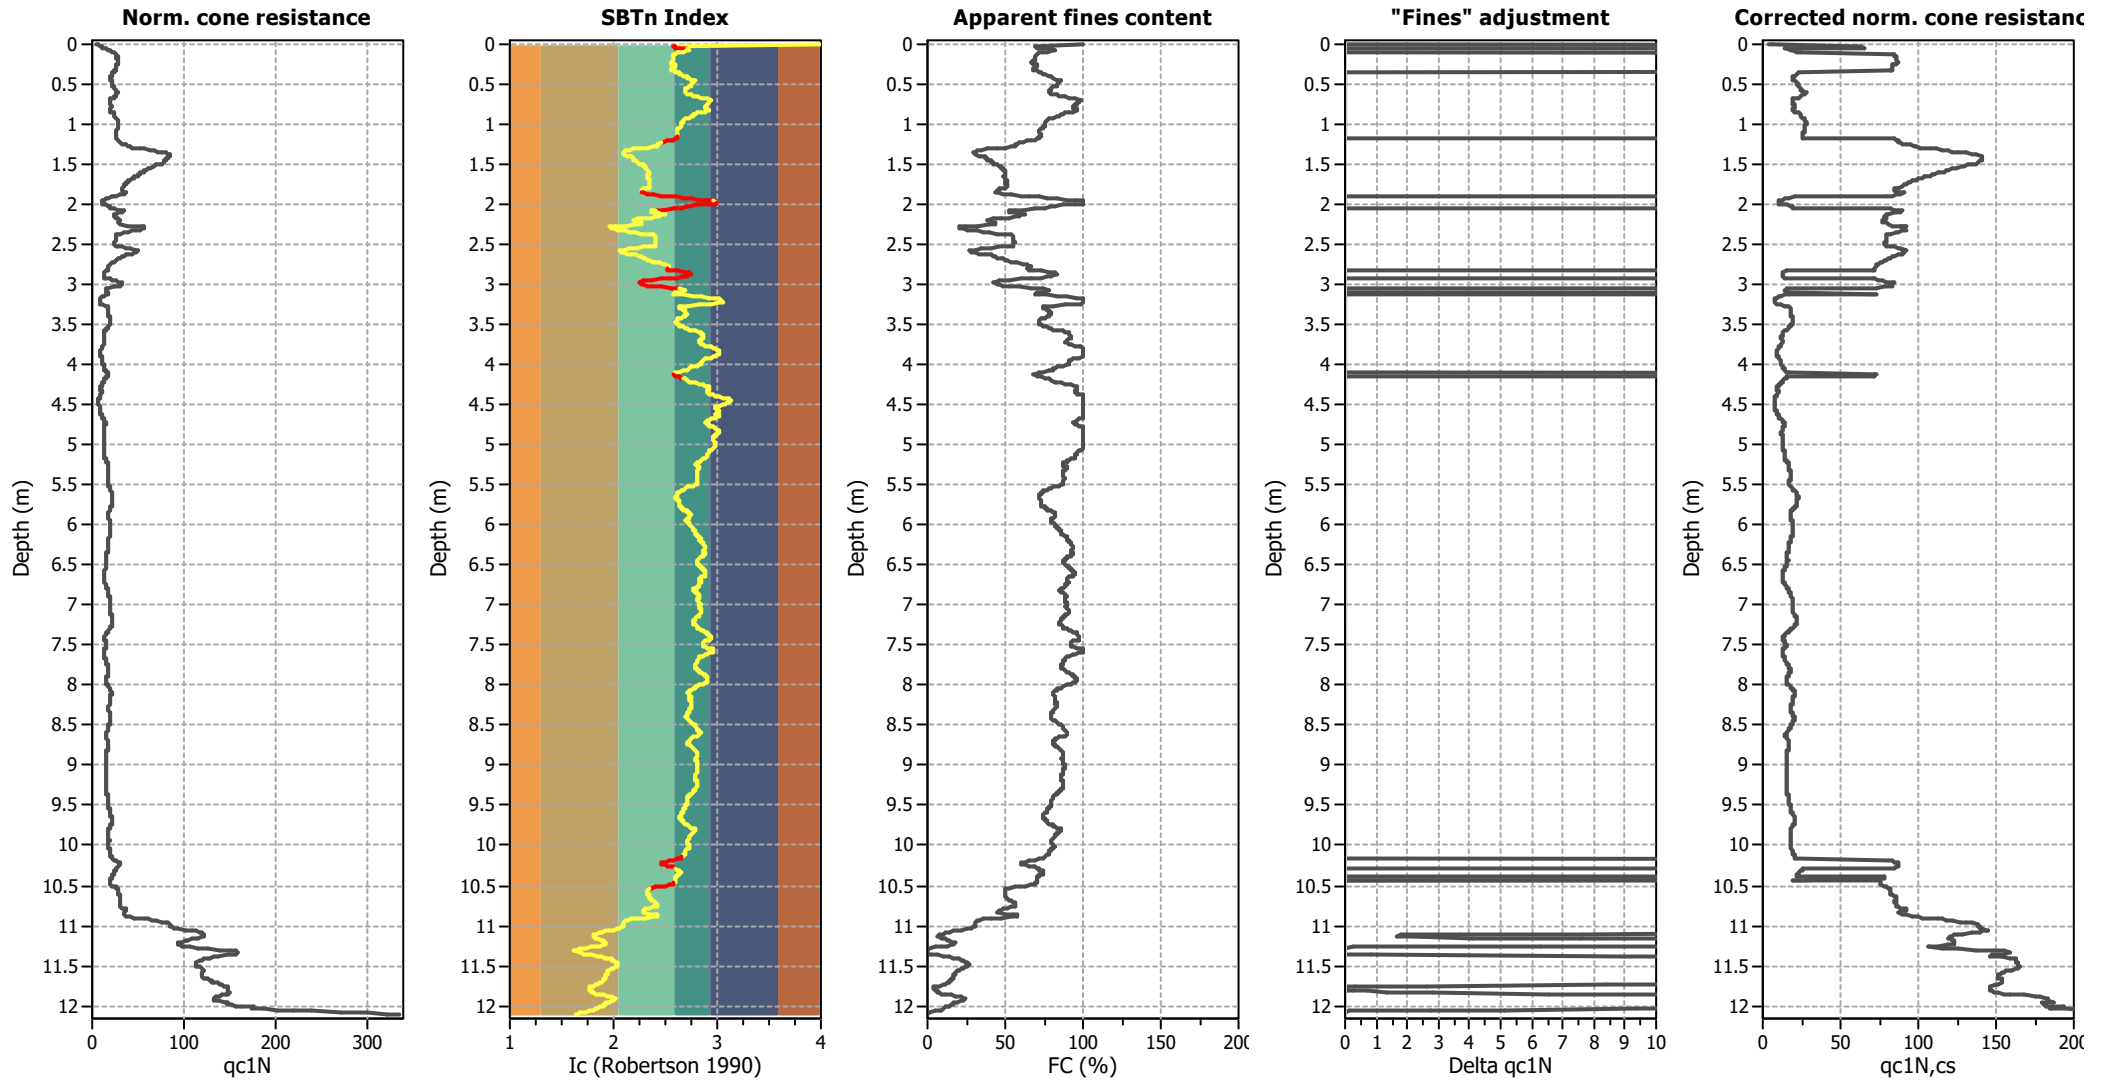

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

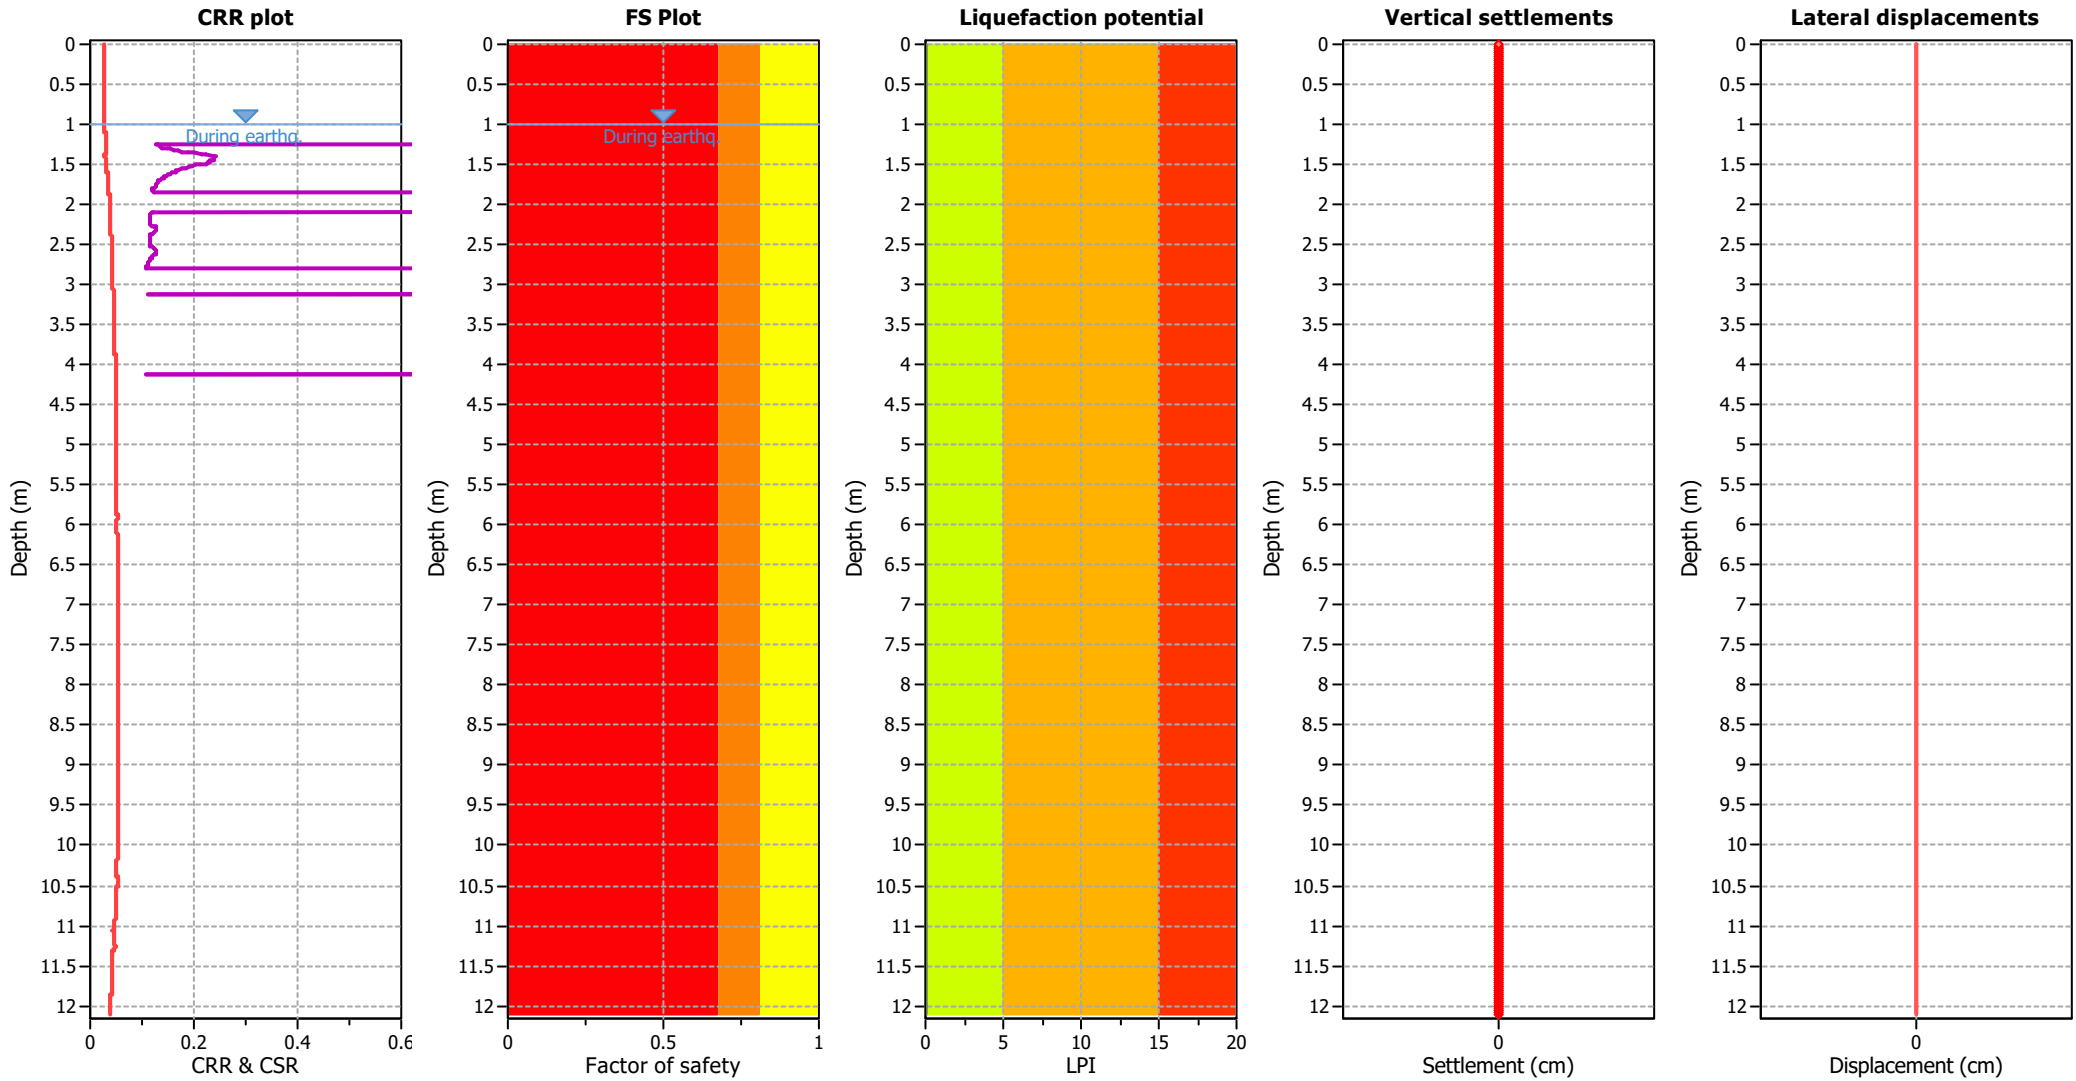

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

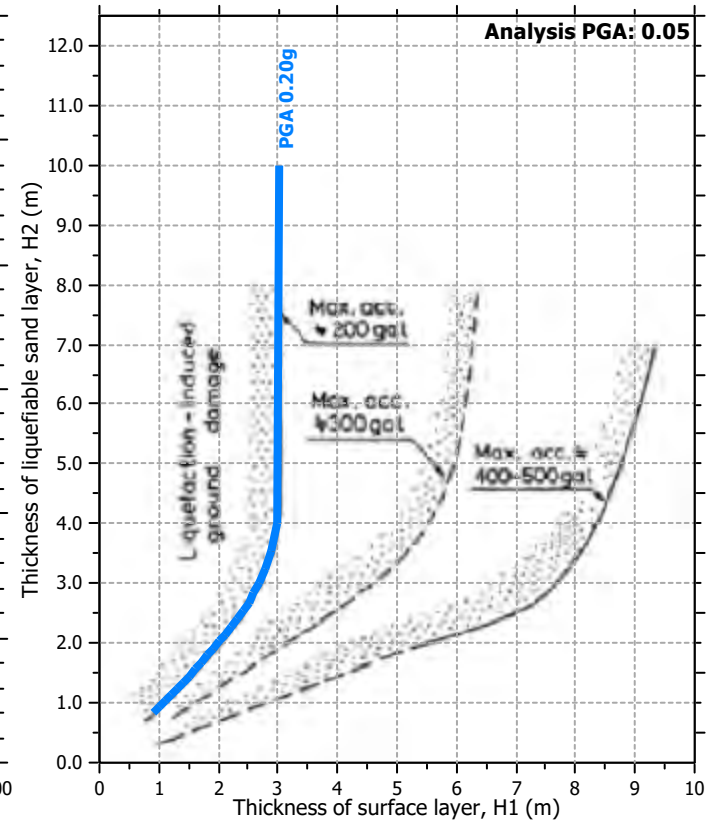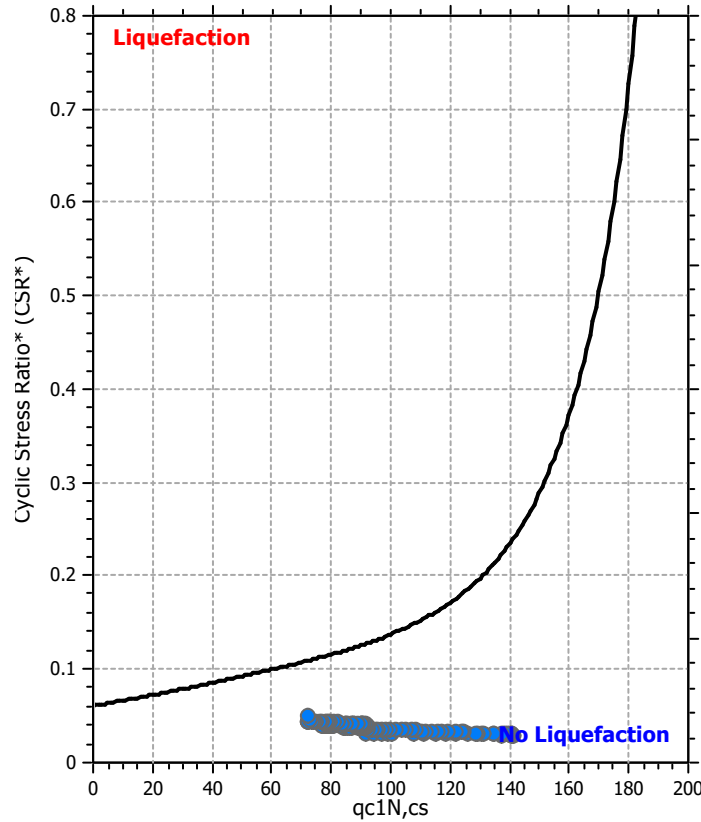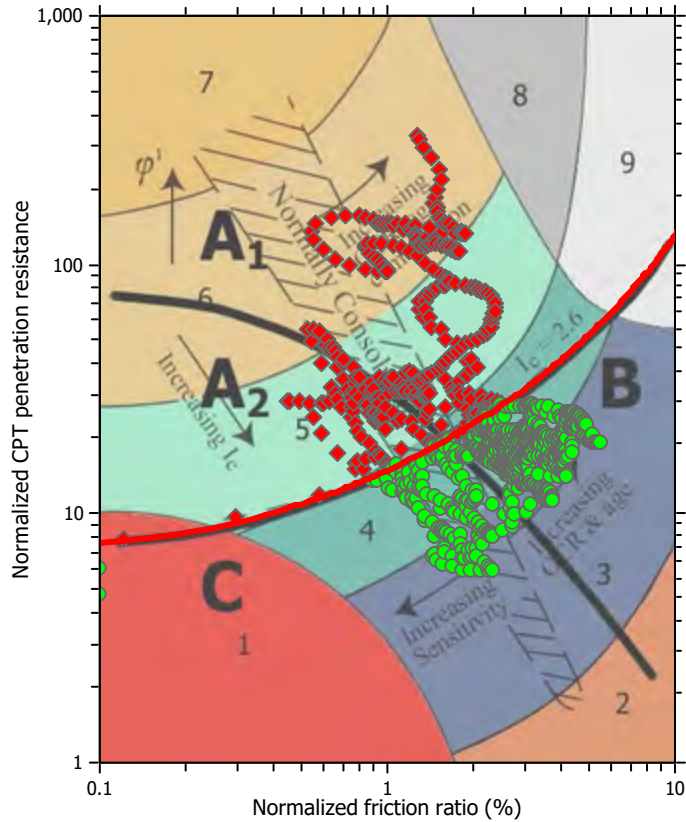

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

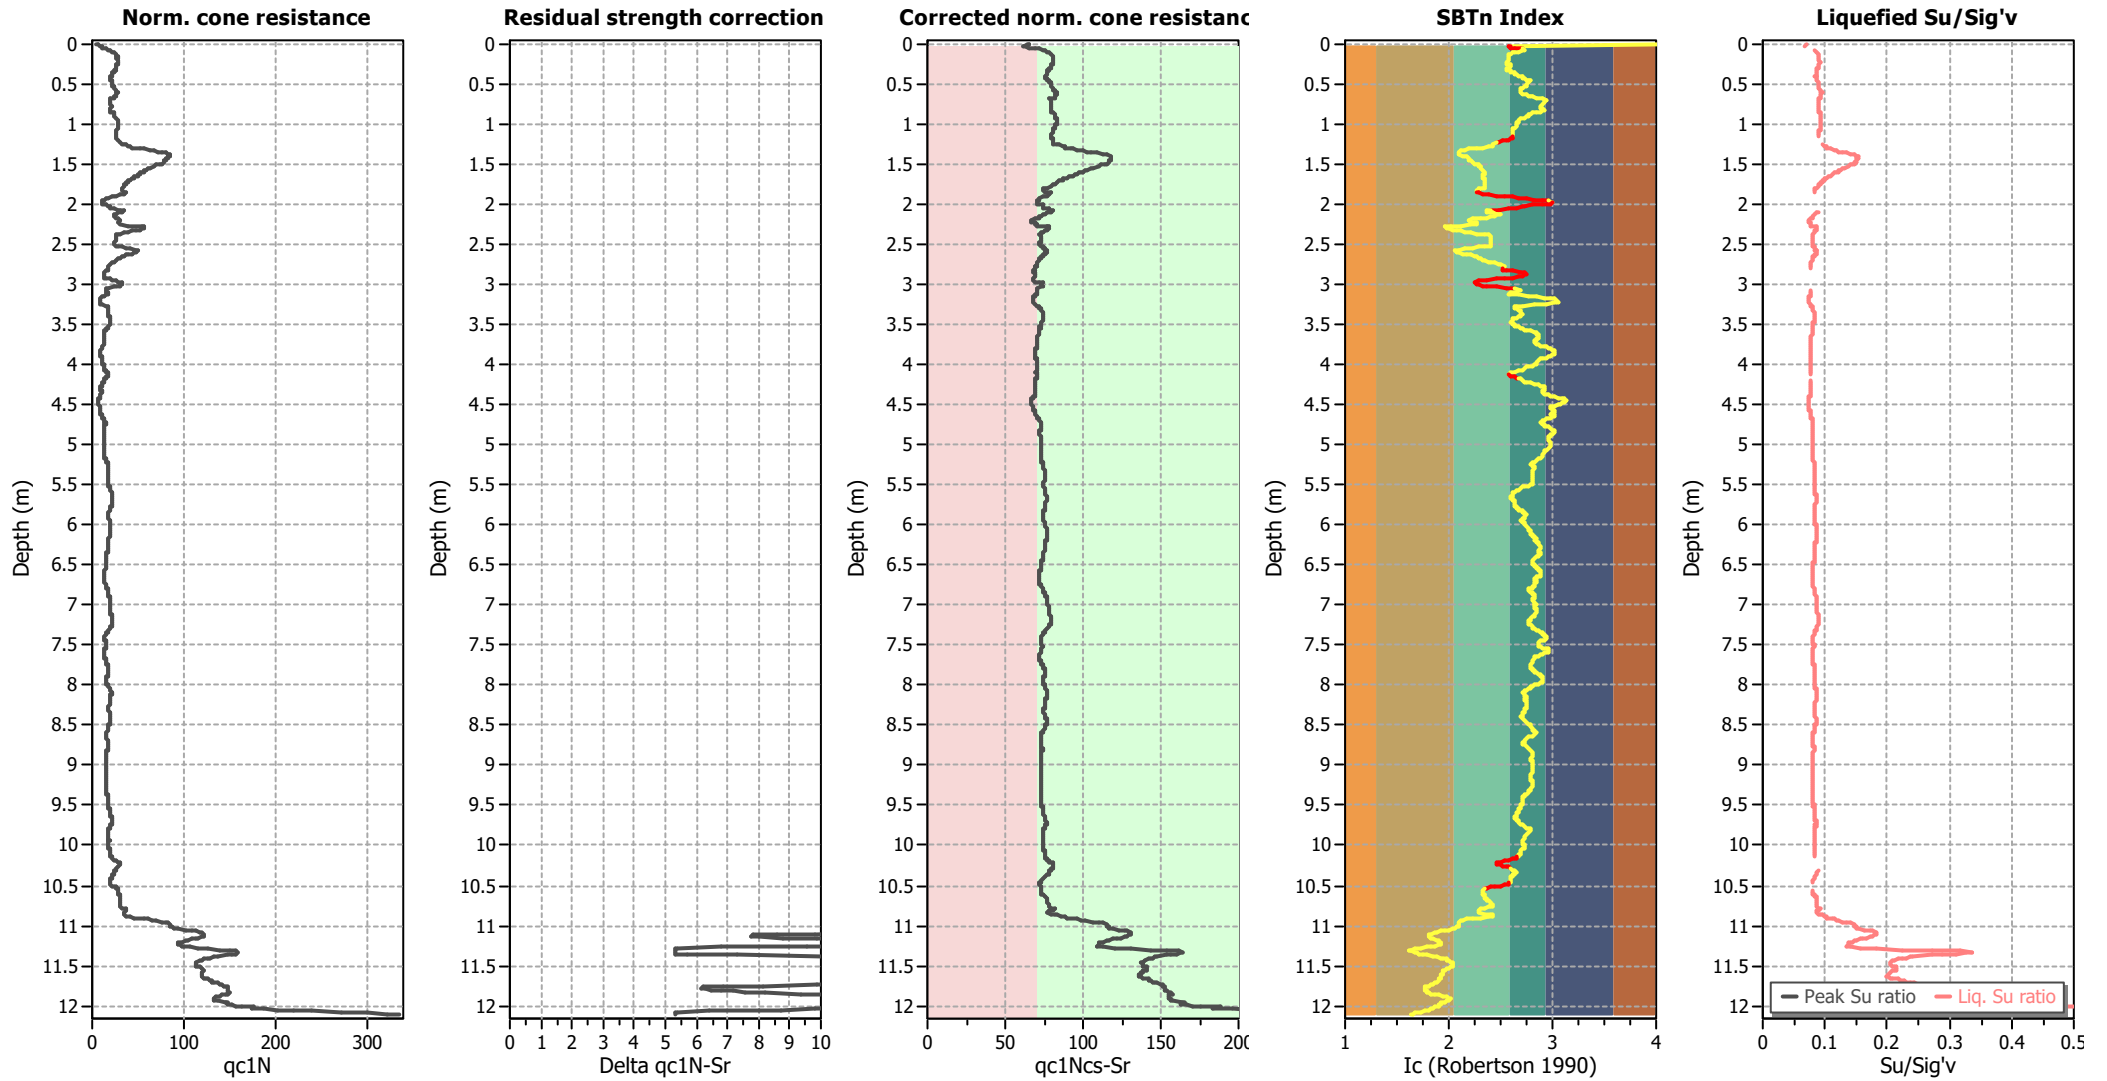

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

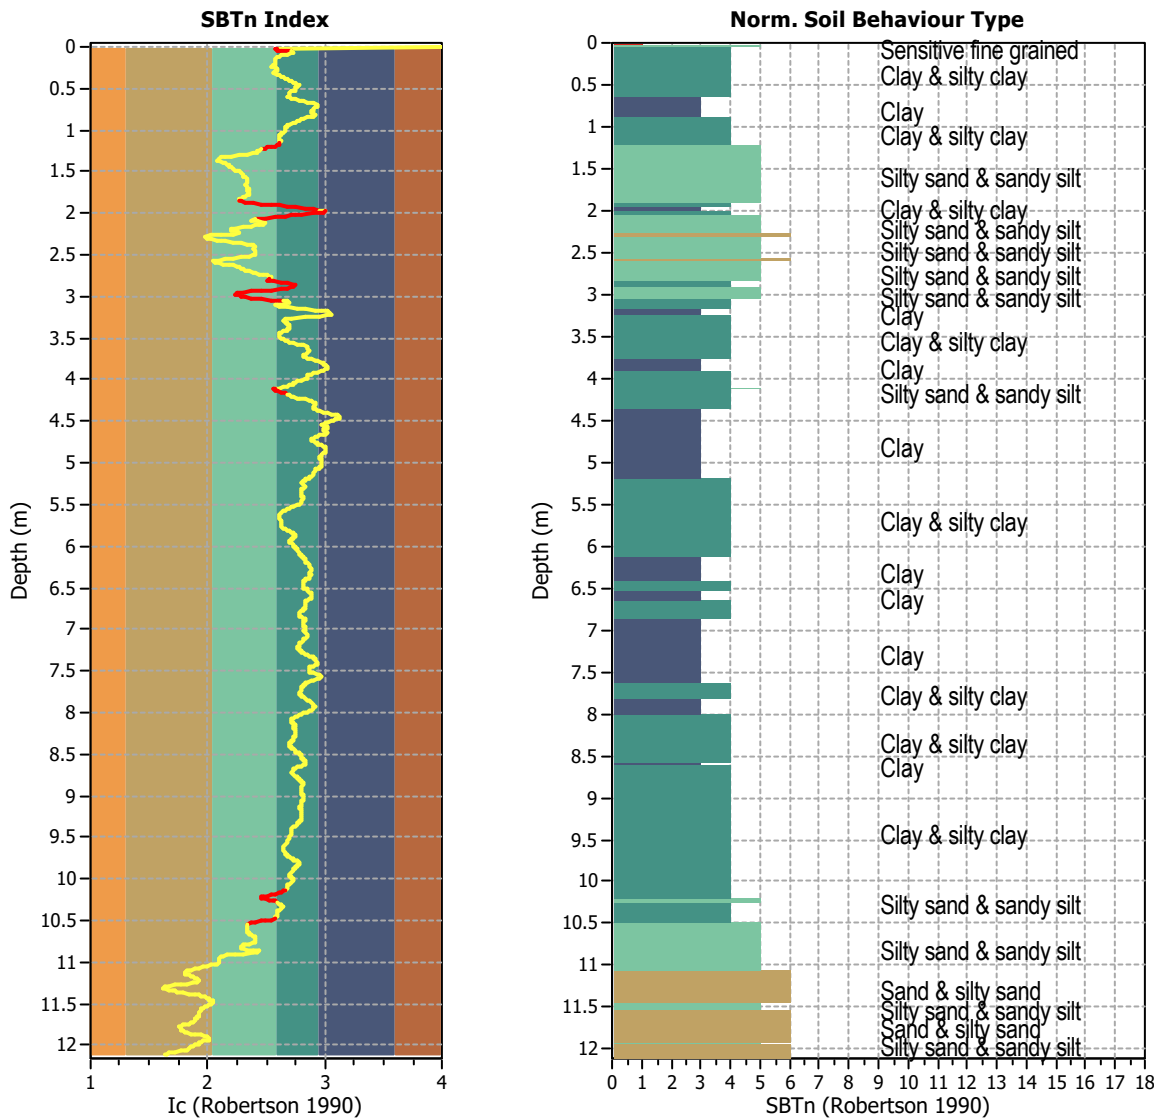

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	1212
I_c maximum check value:	3.00	Total points excluded:	94
I_c change ratio value:	0.0100	Exclusion percentage:	7.76%
Minimum number of points in layer:	4	Number of layers detected:	11


Estimation of post-earthquake settlements

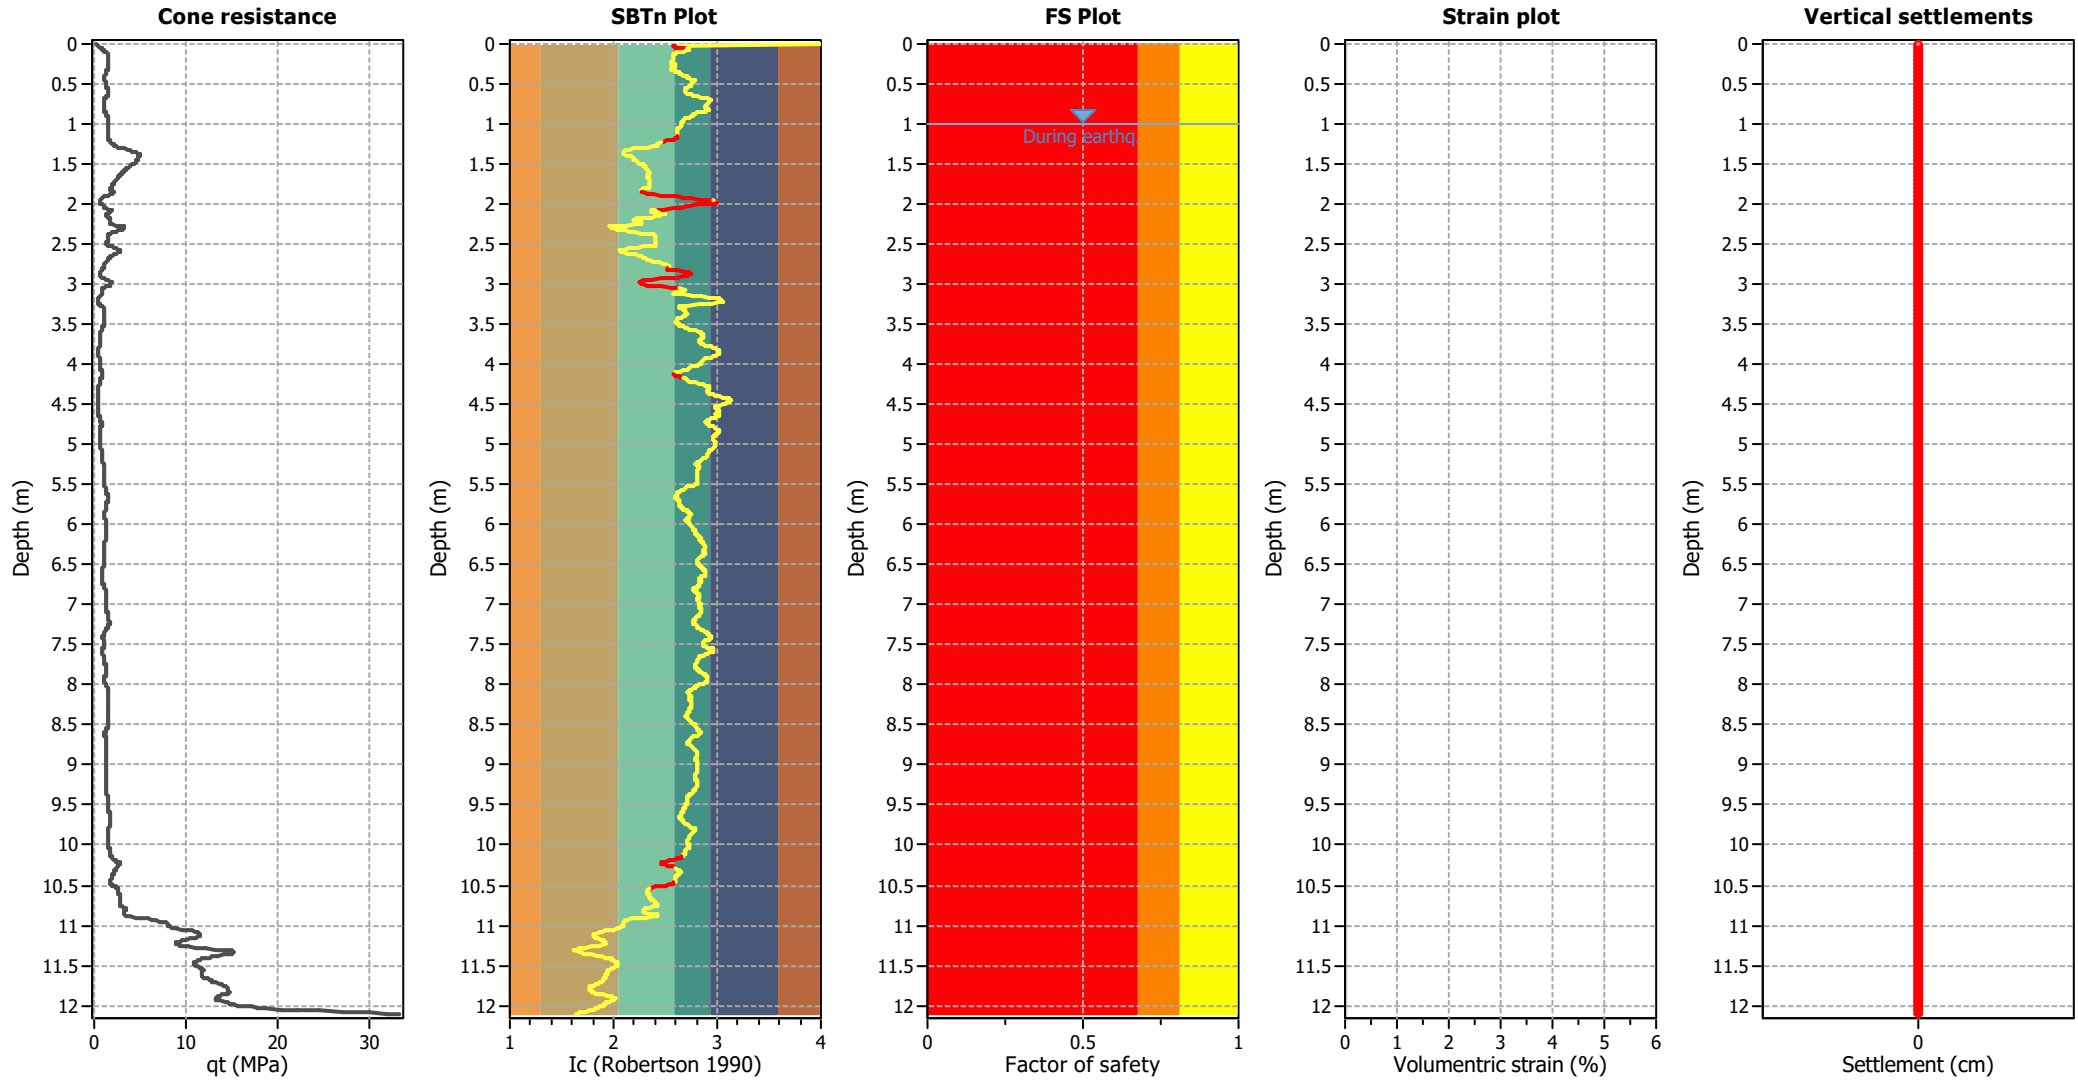

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

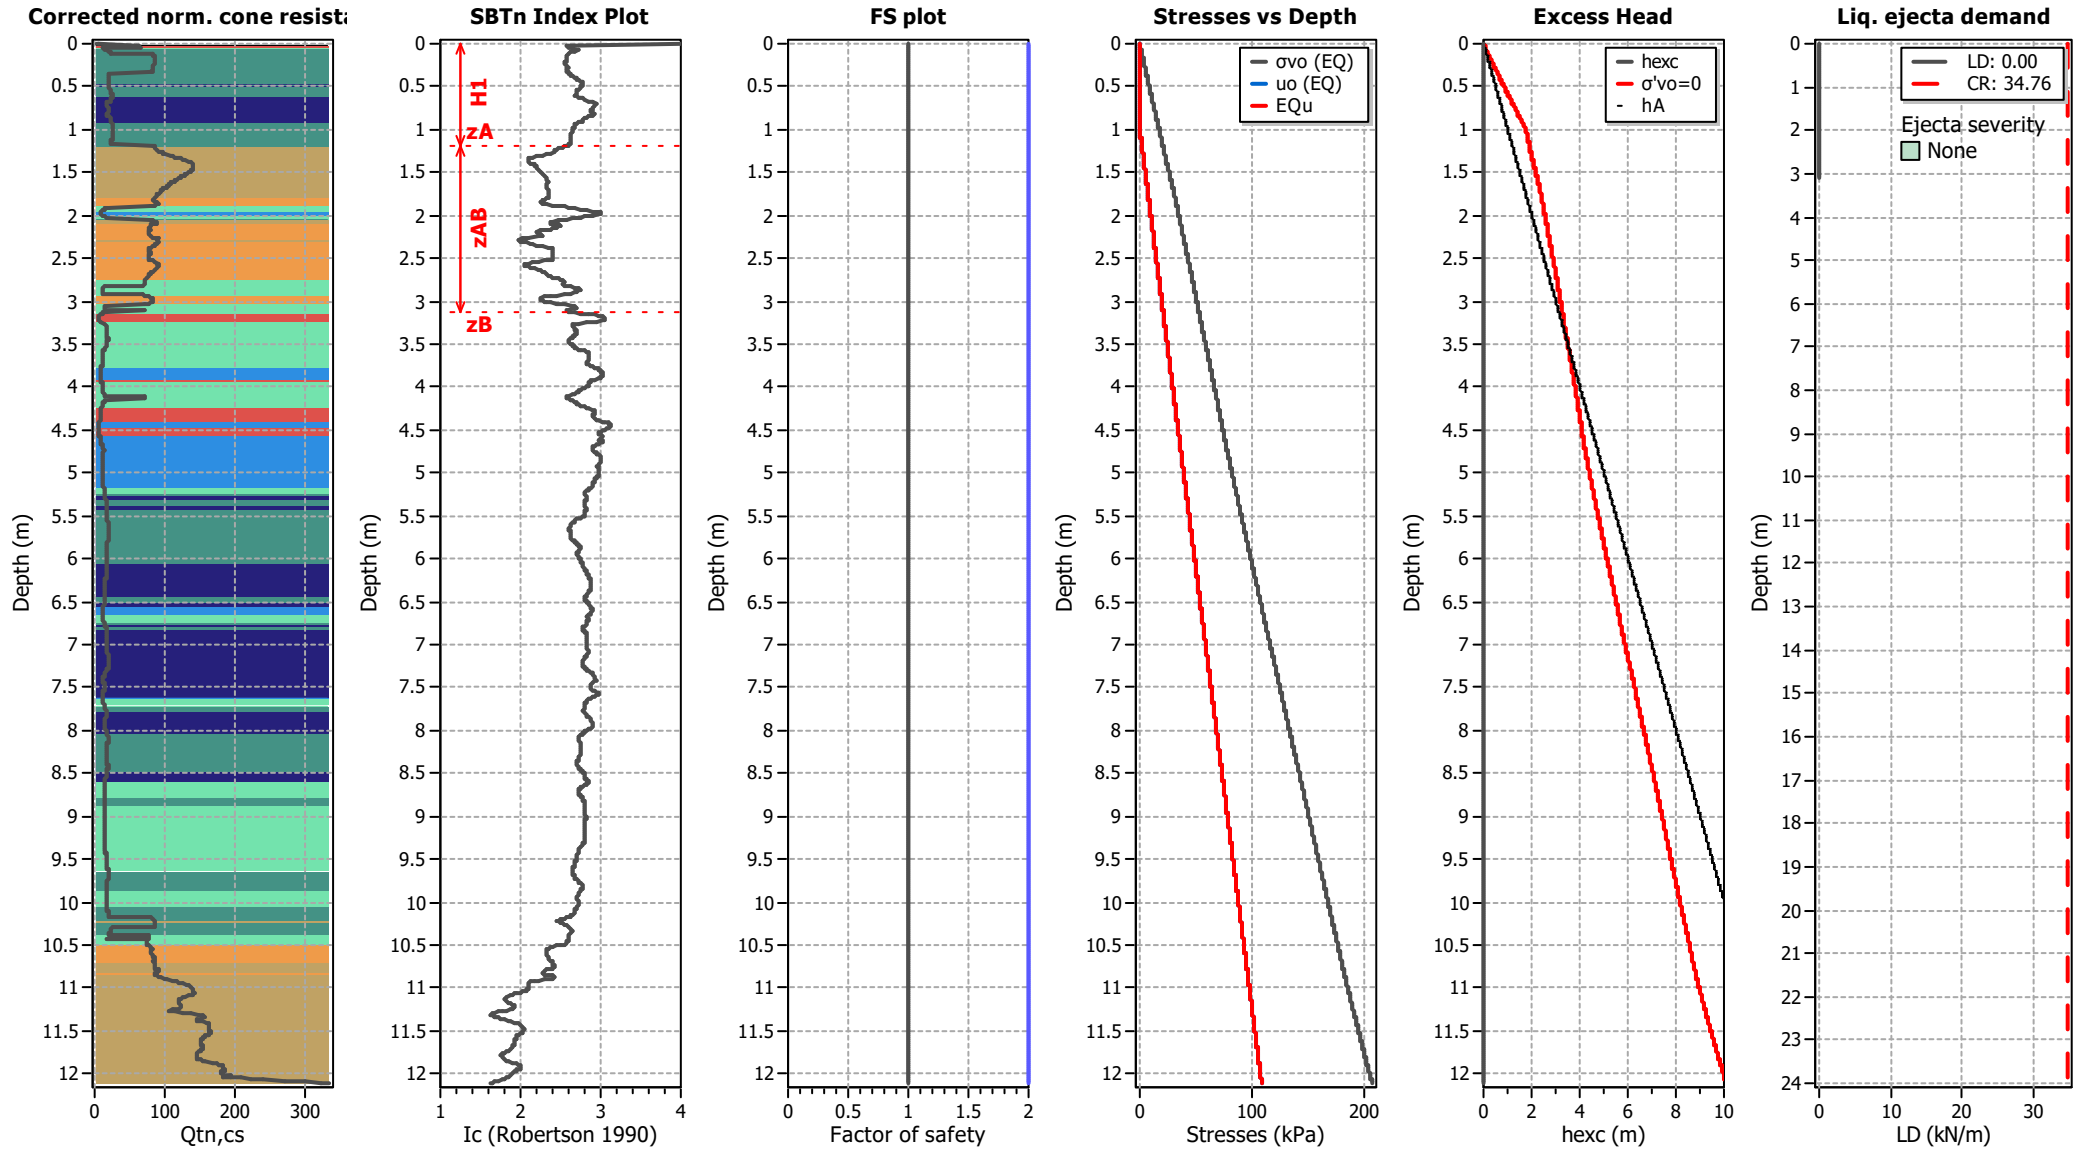

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT11

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

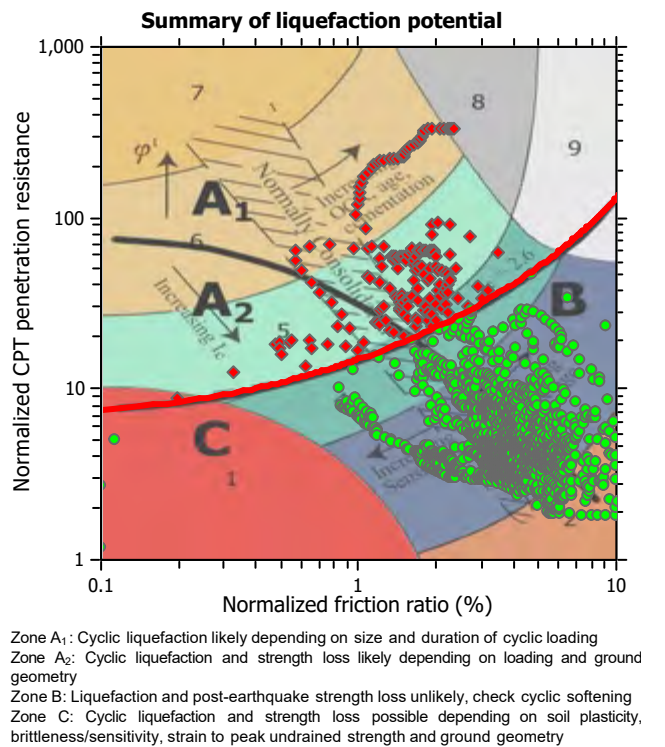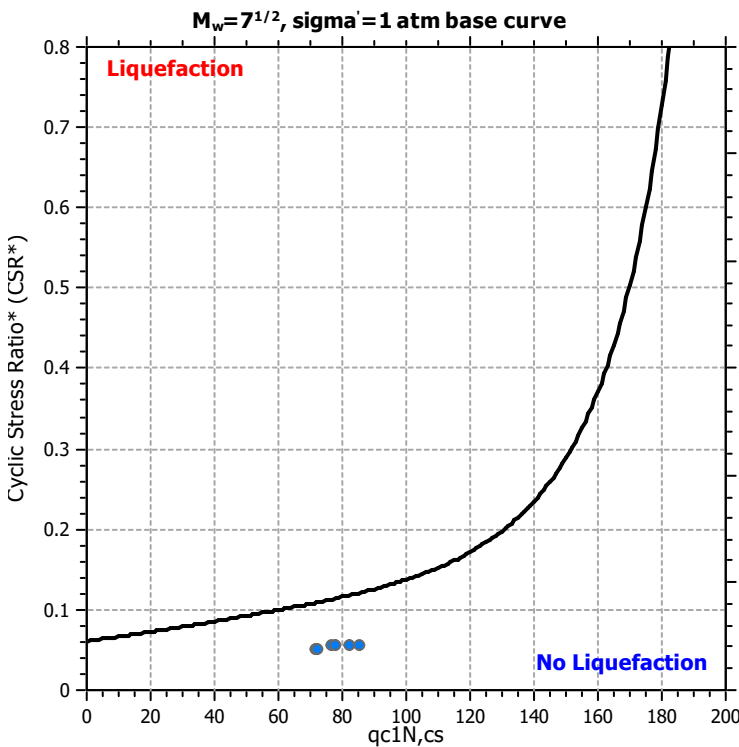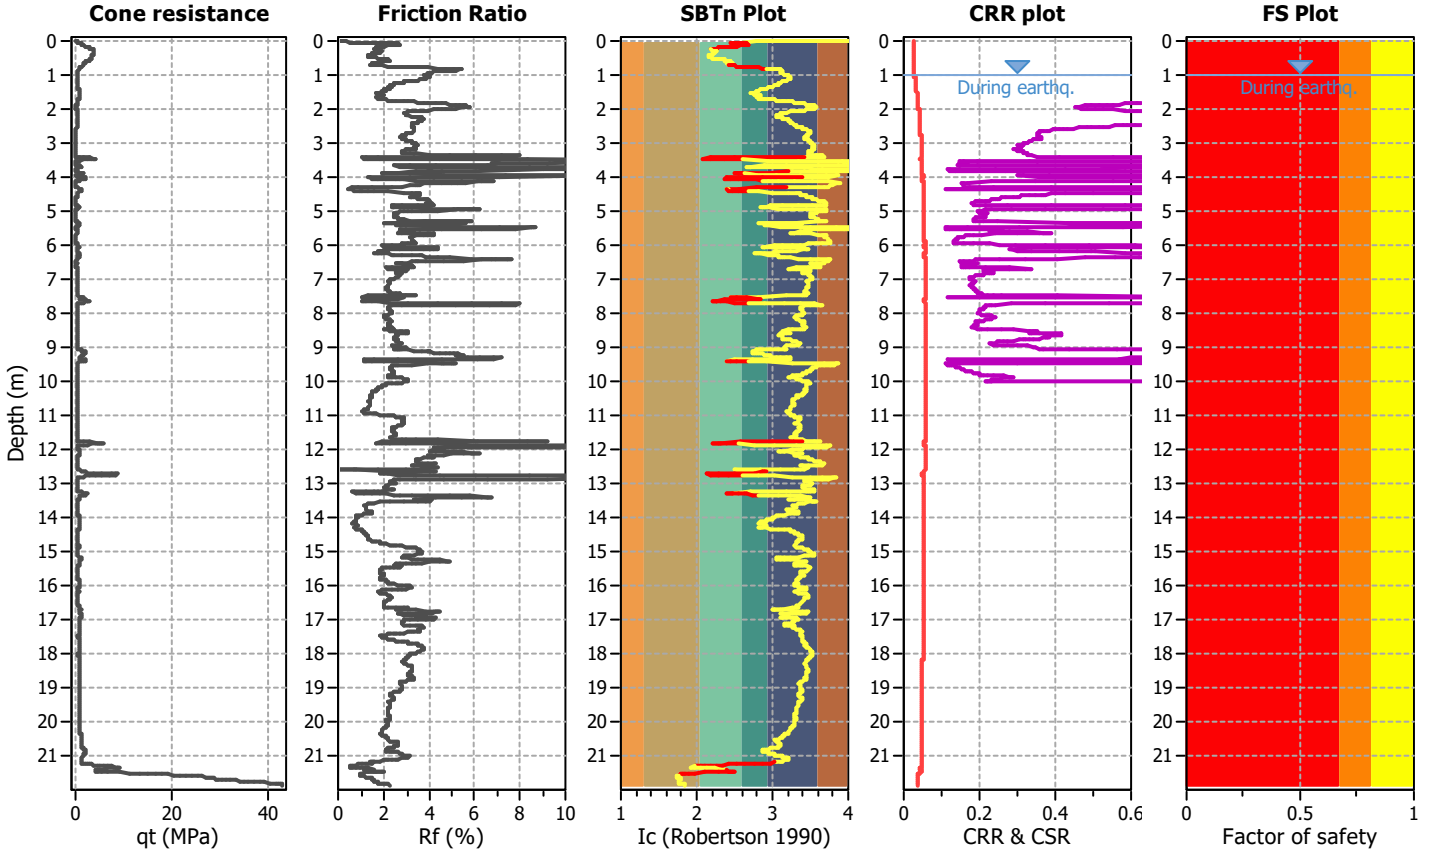

CPT basic interpretation plots

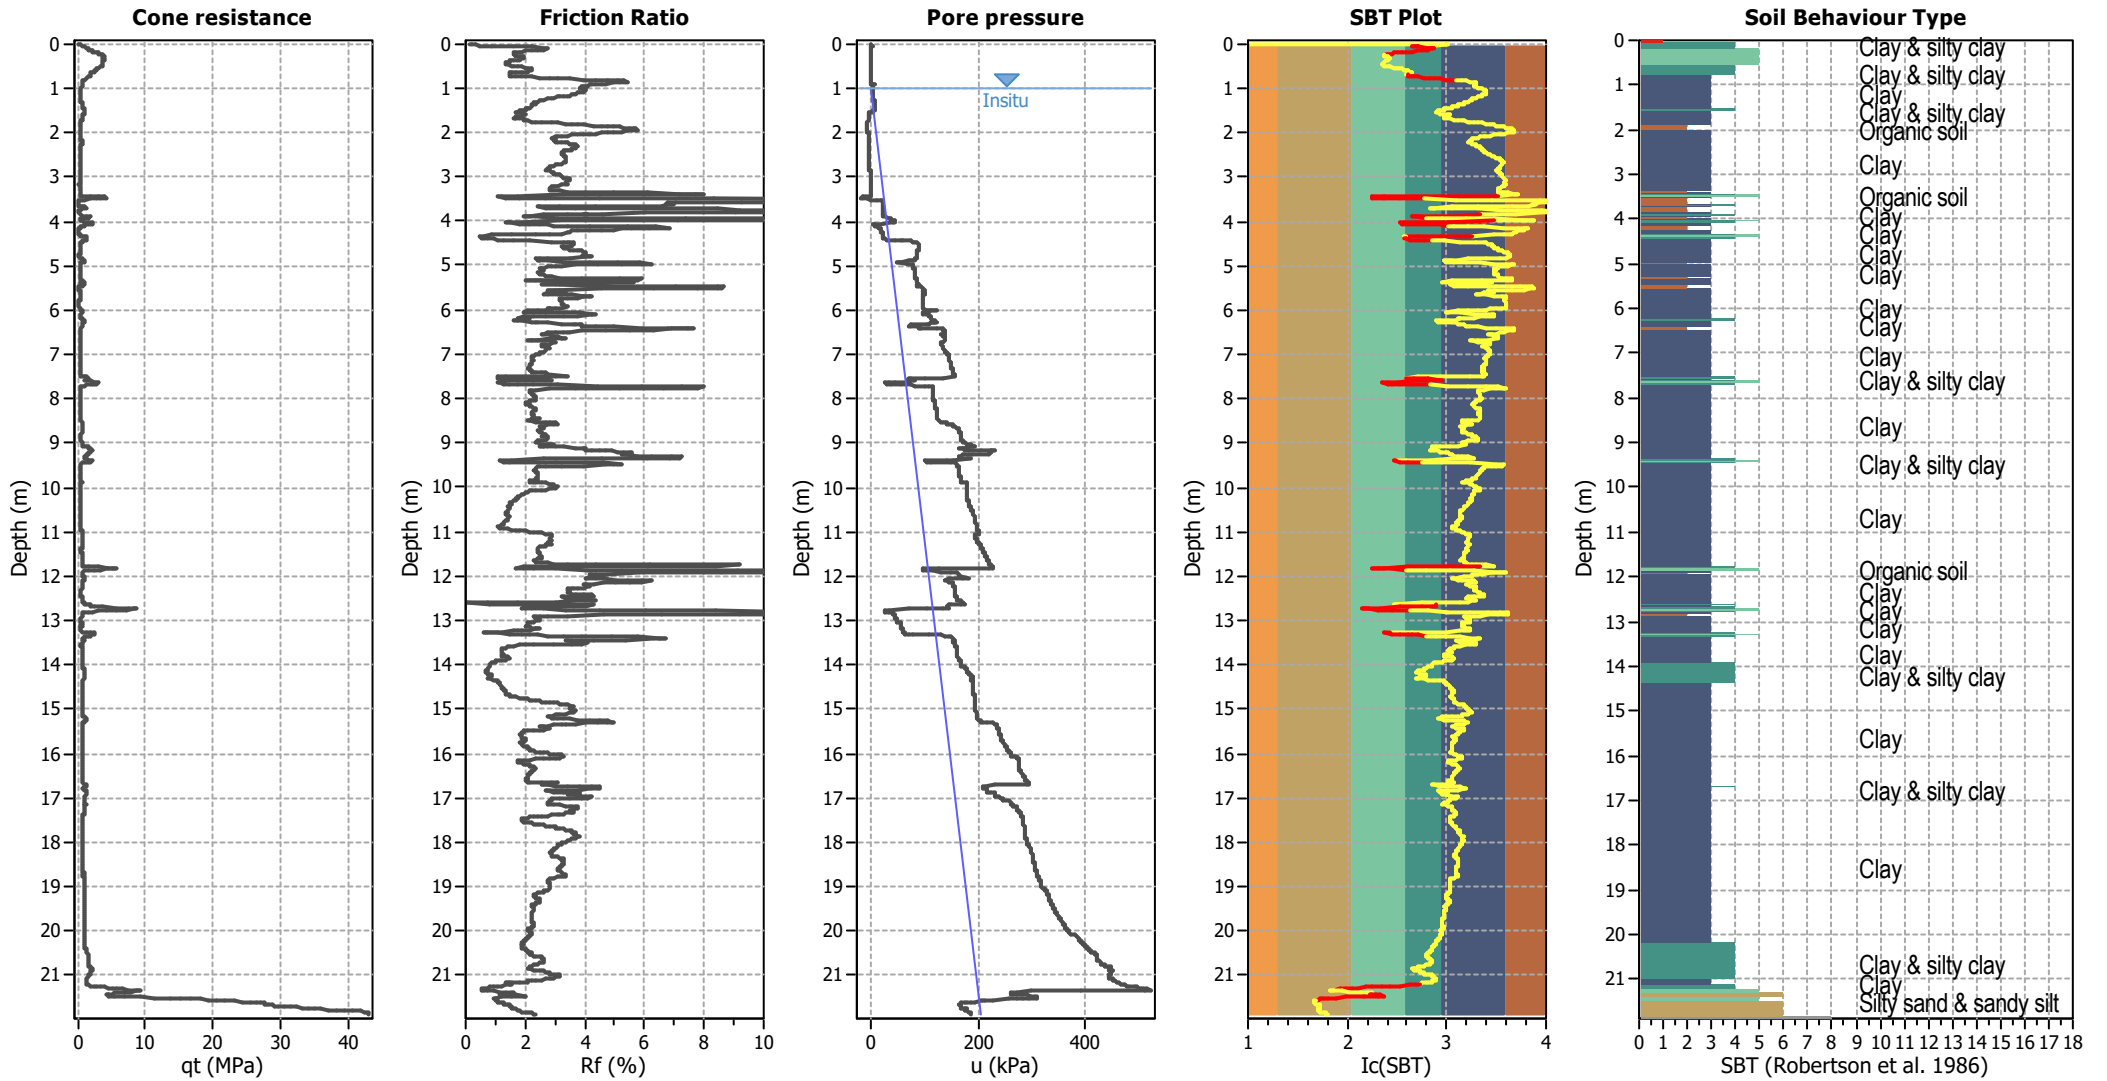


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

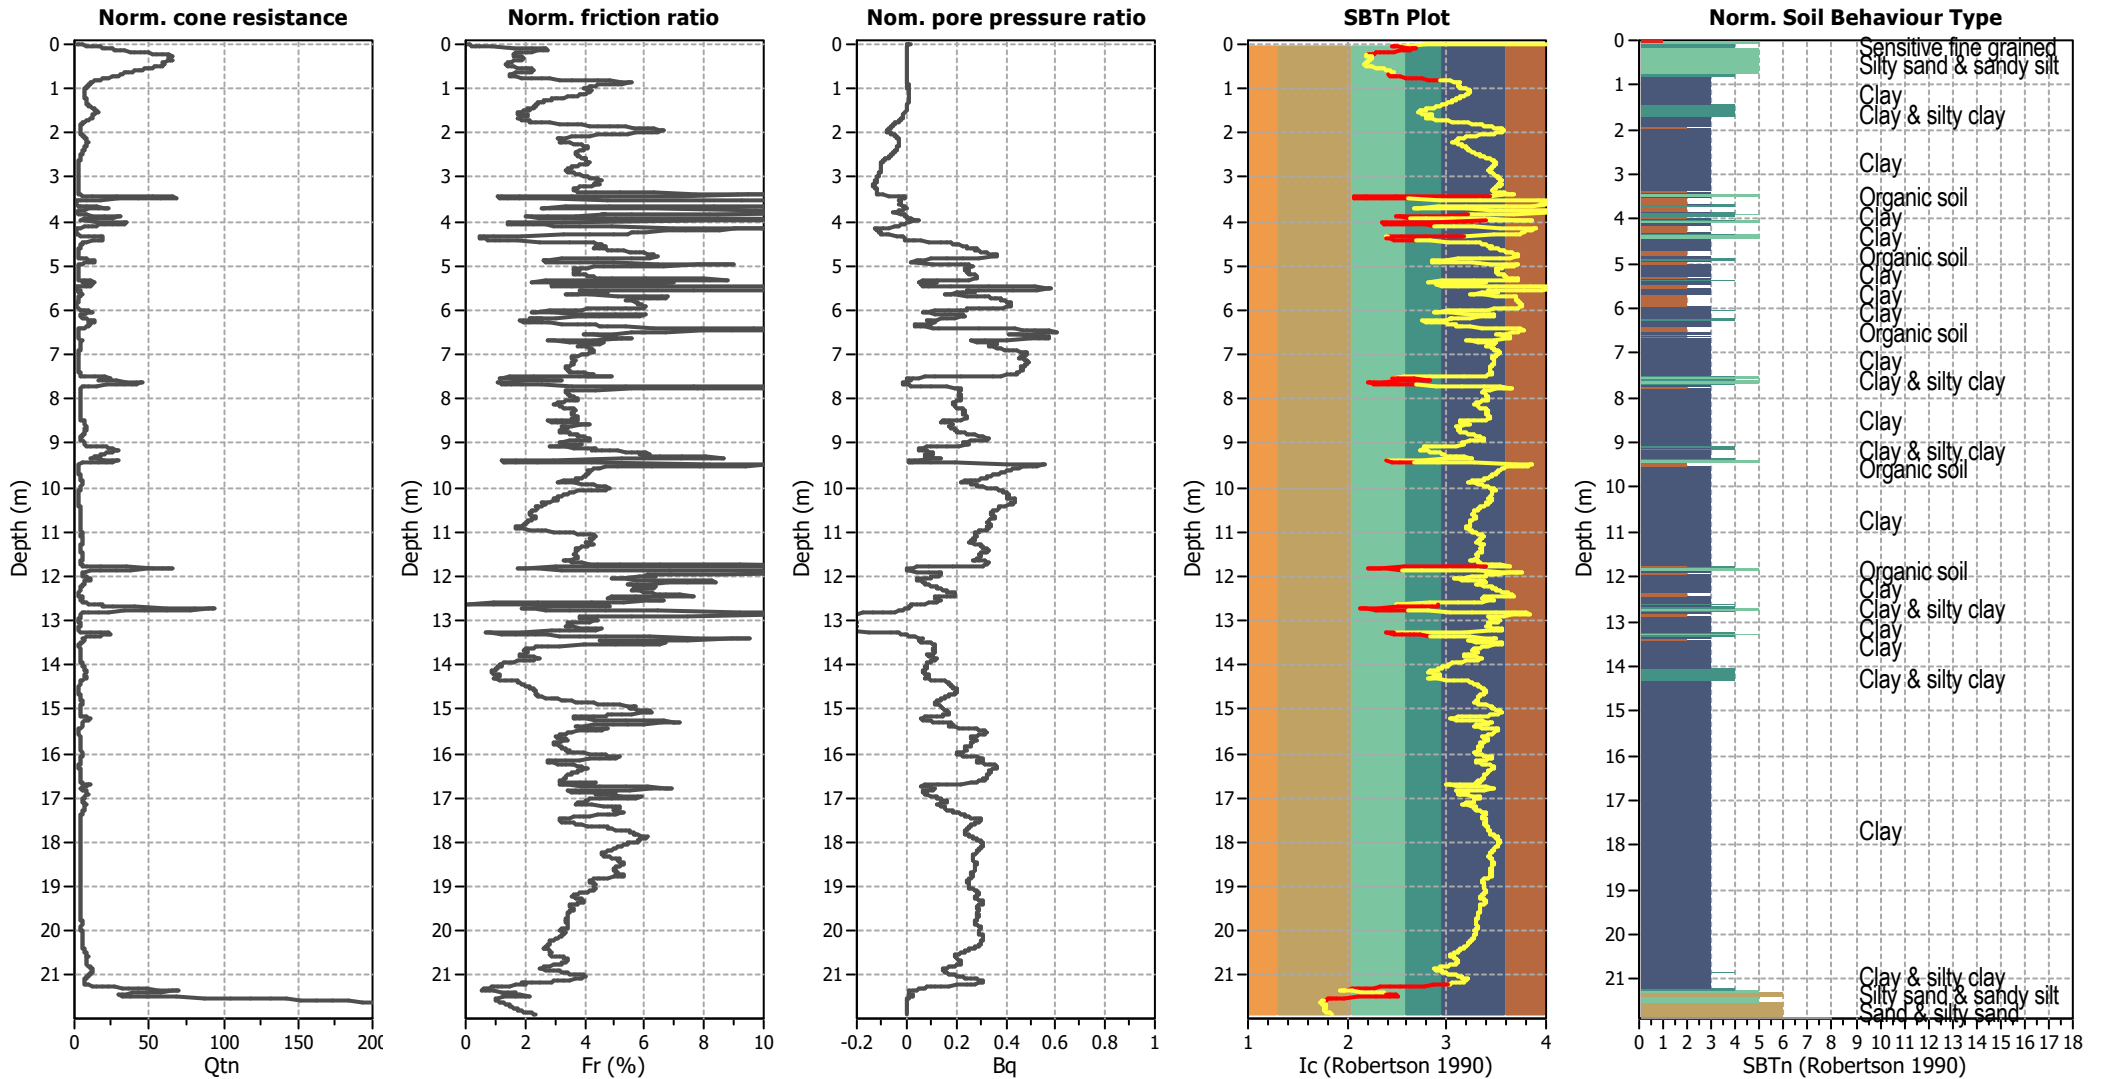


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

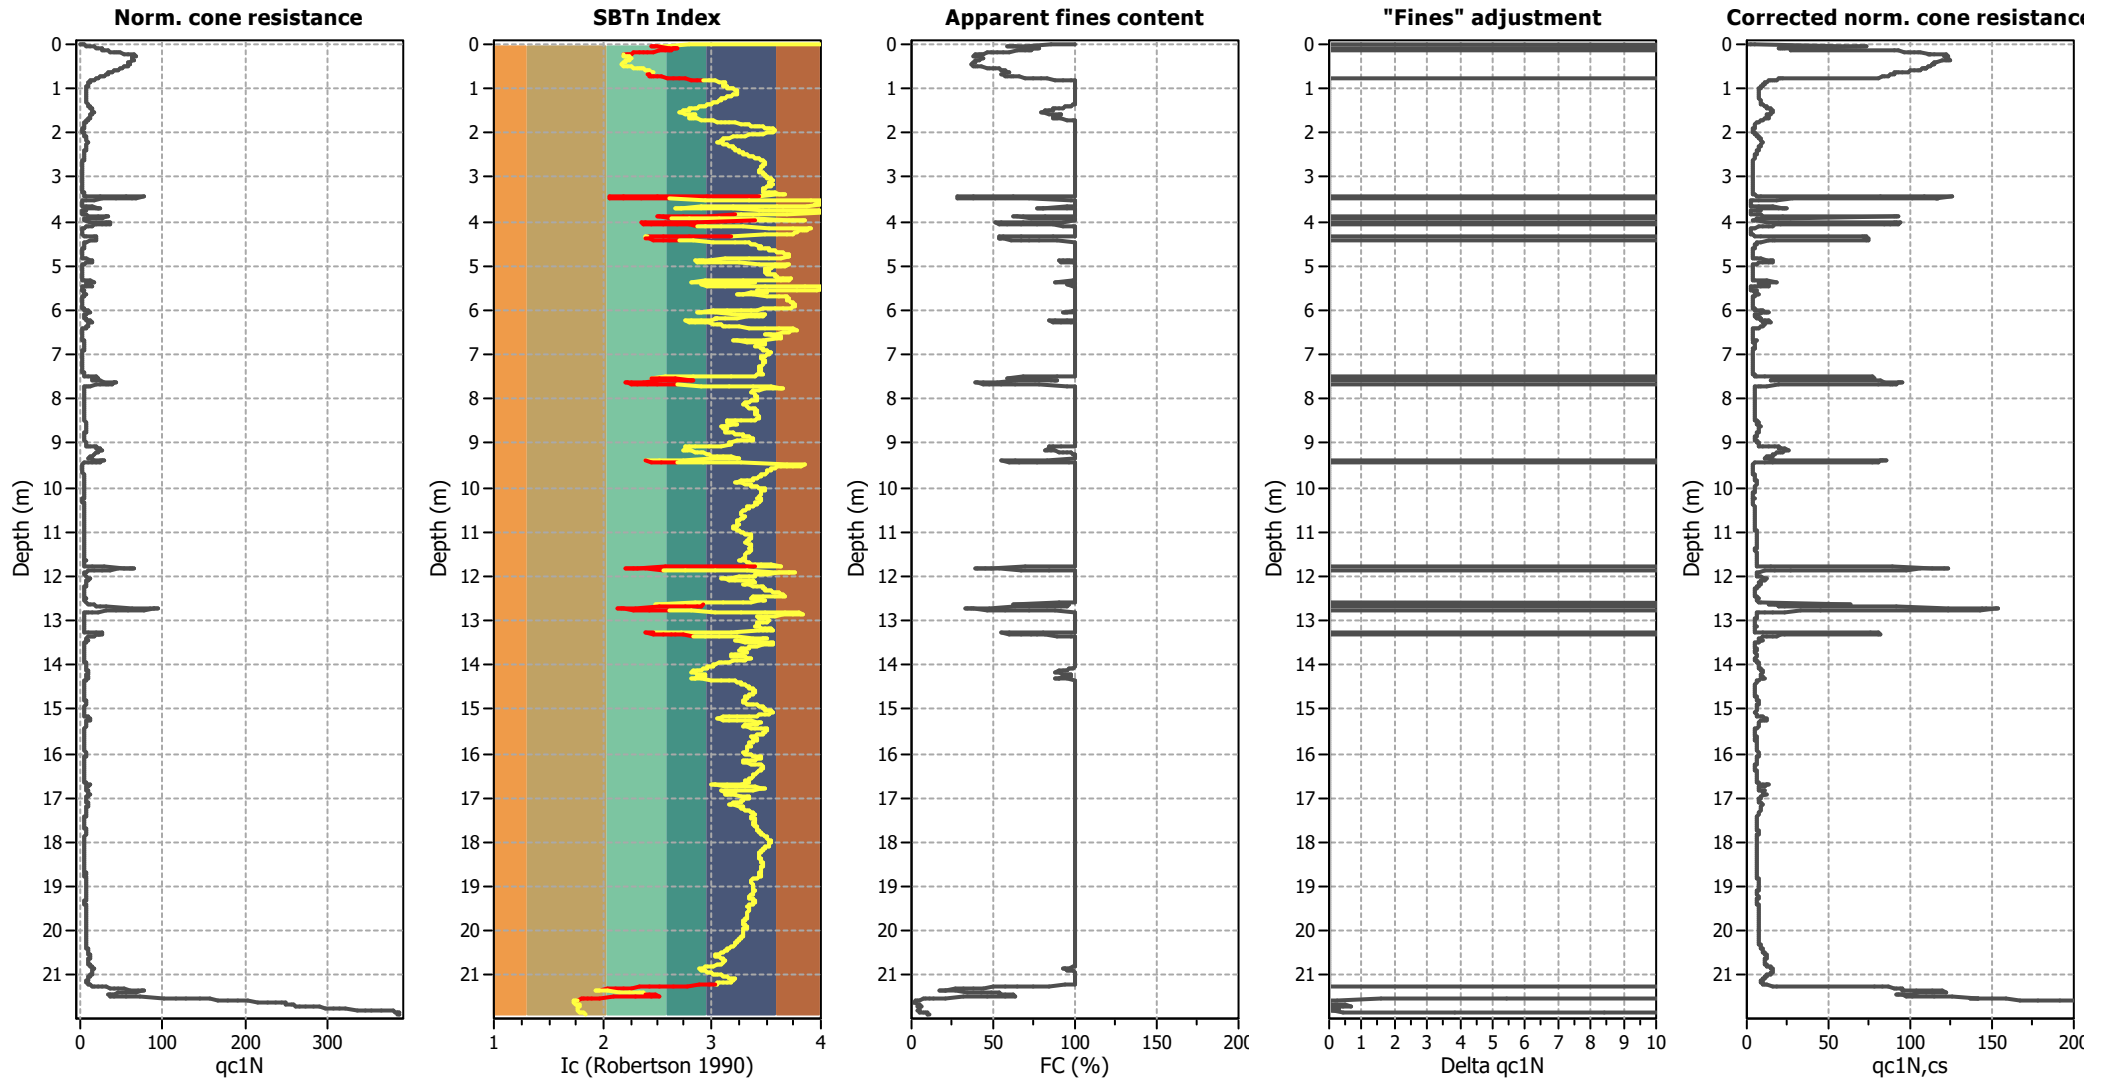

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

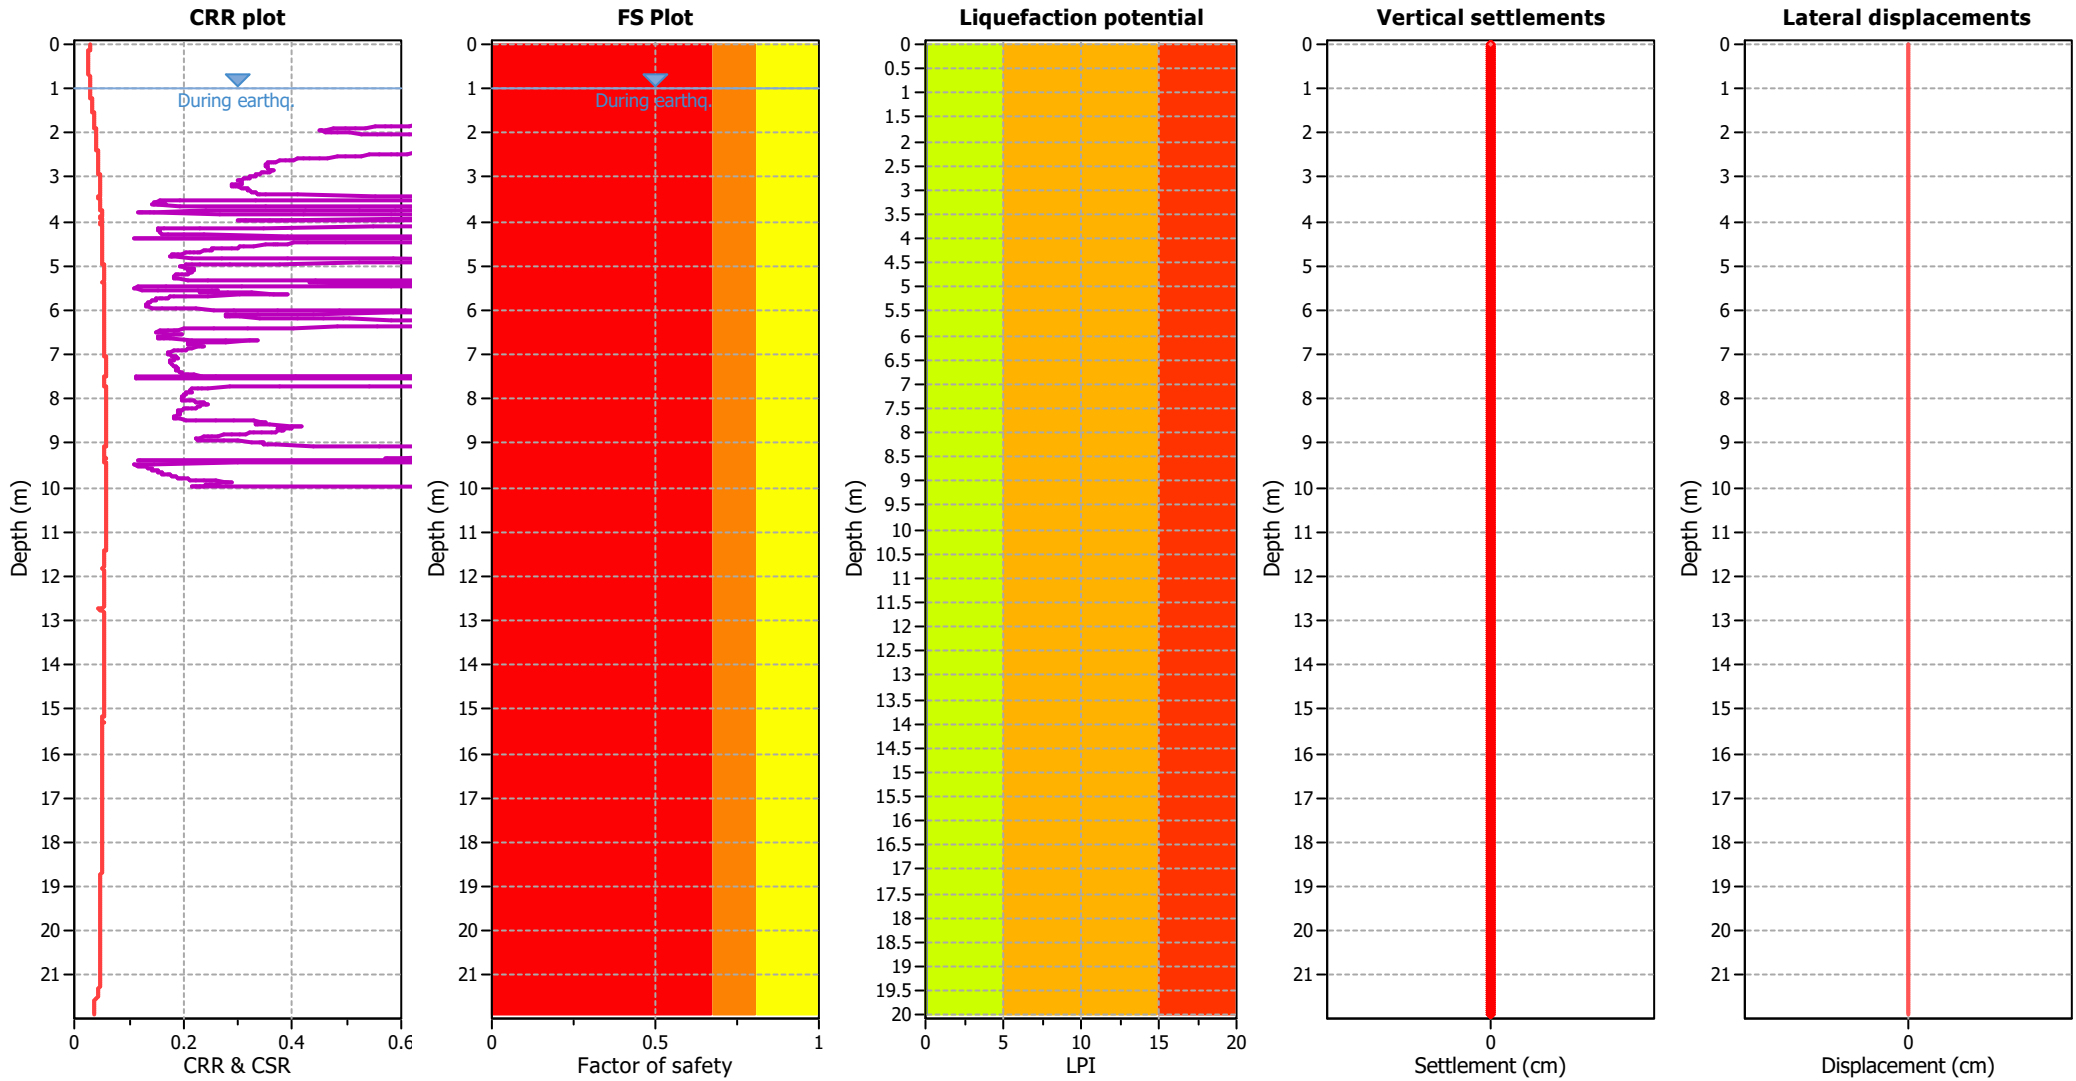

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

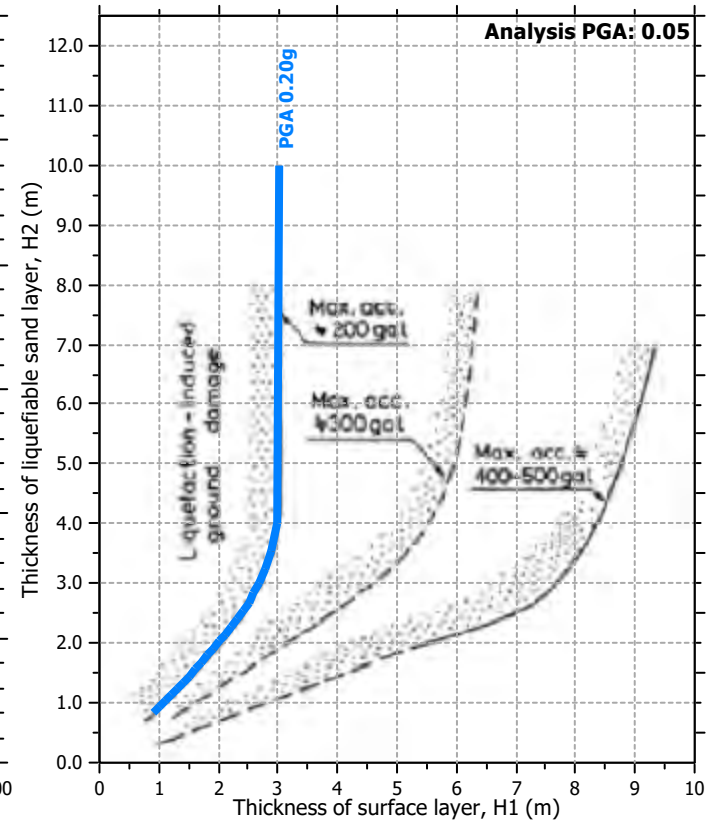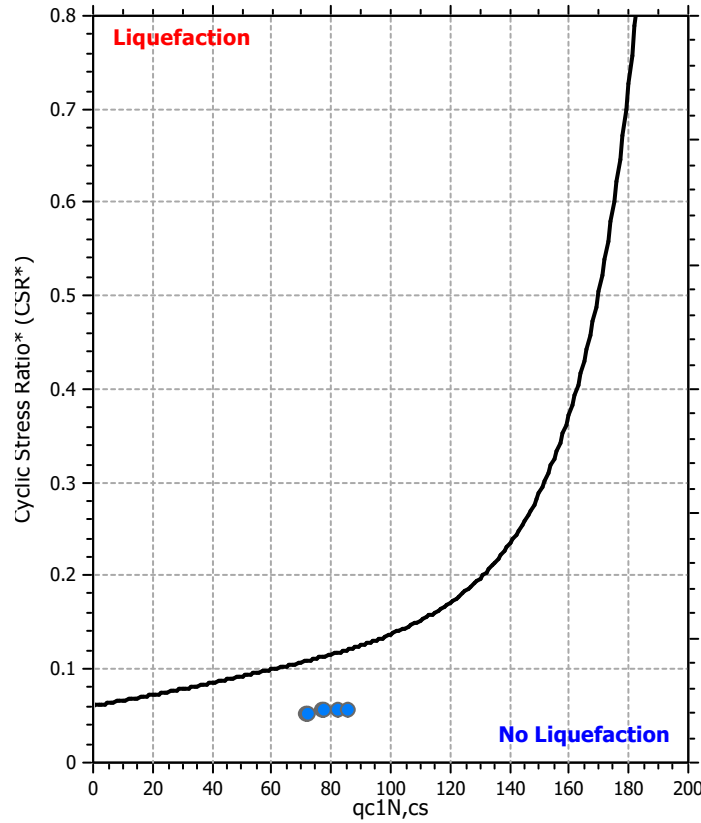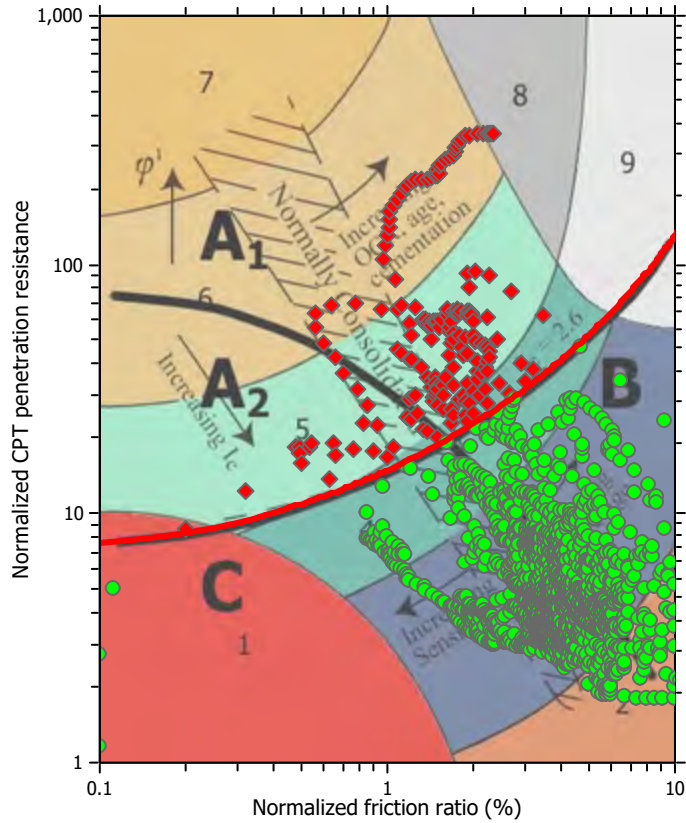

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

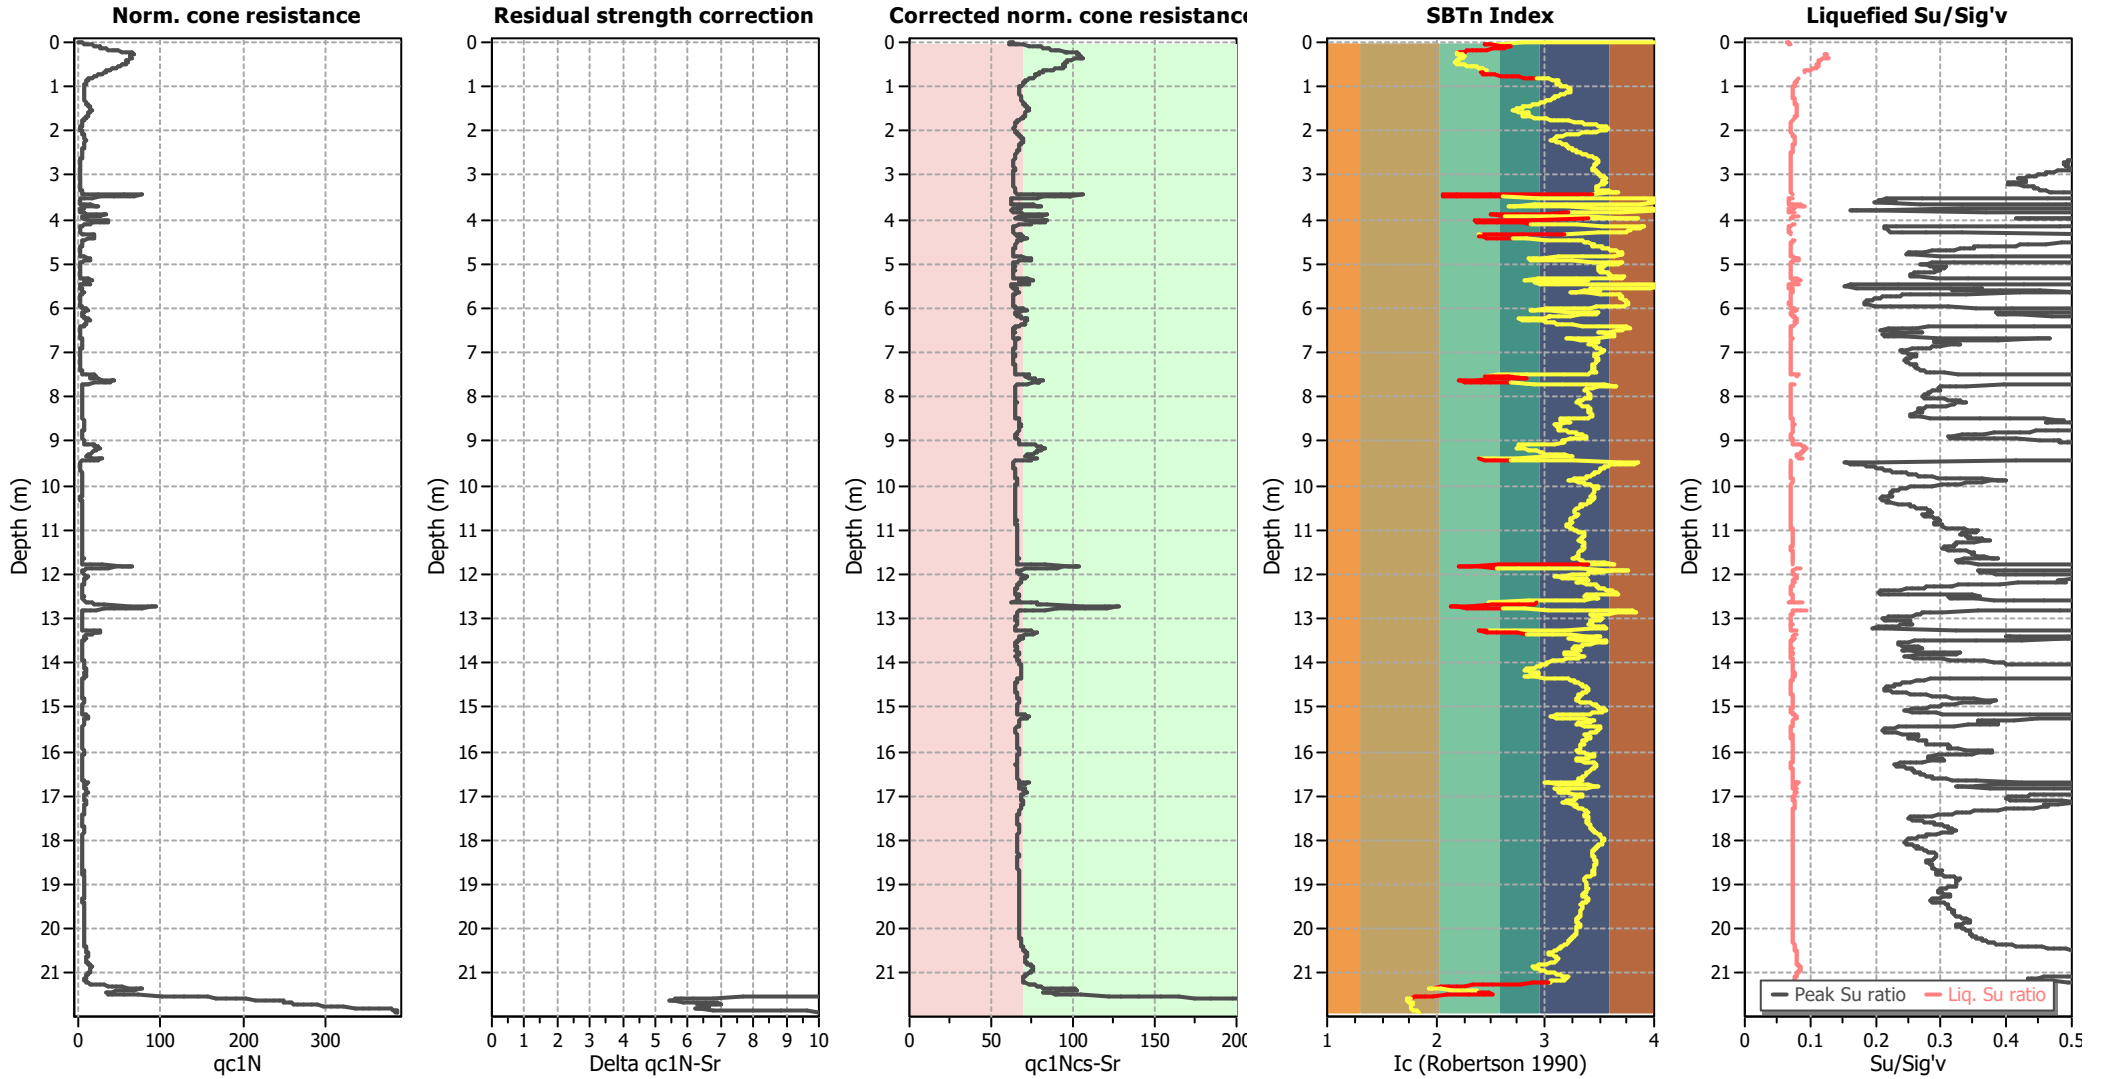

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

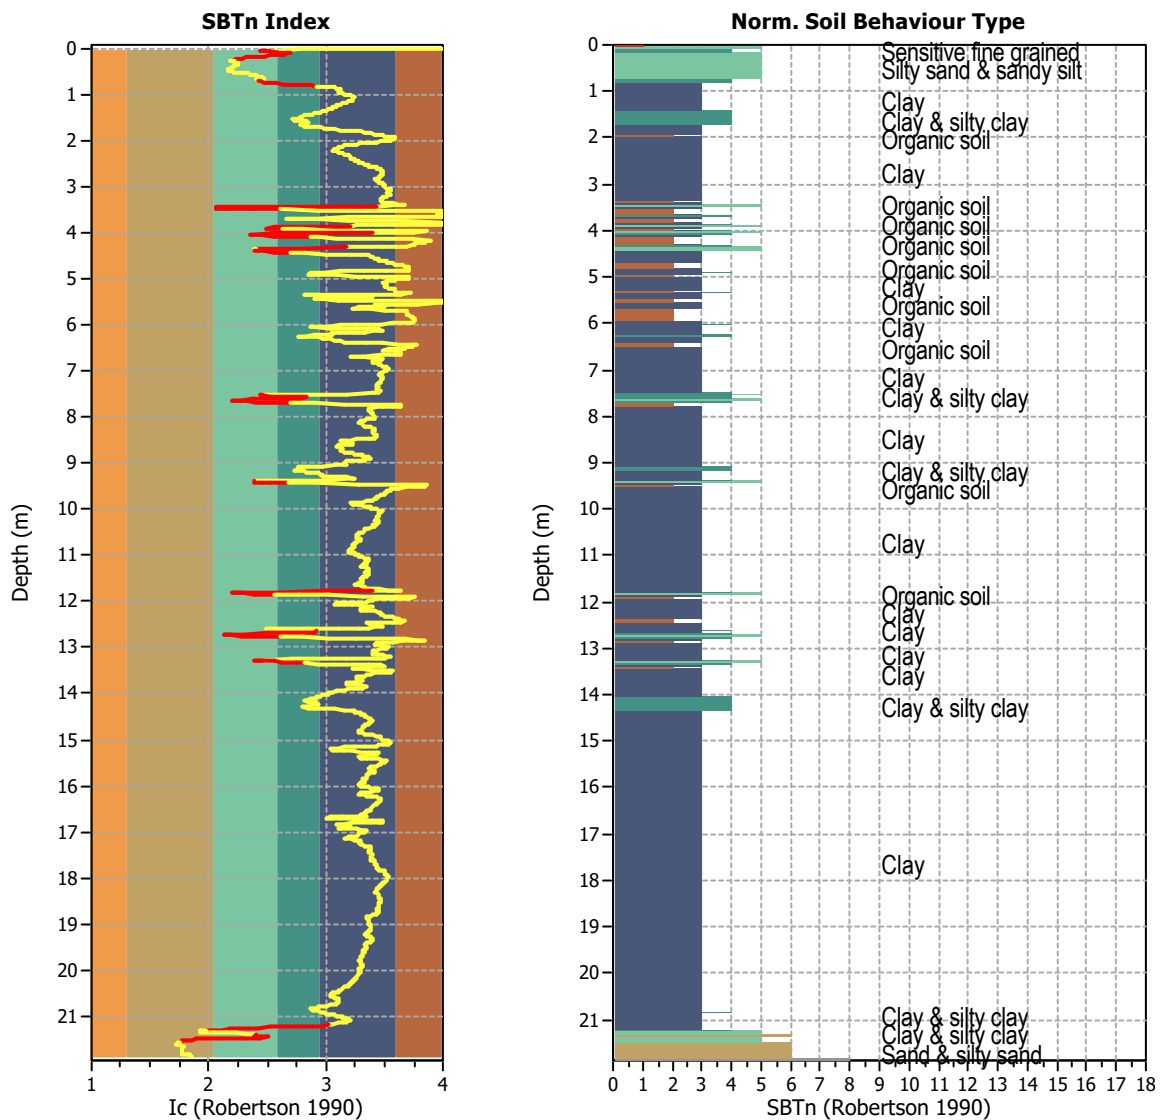


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2189
 Total points excluded: 161
 Exclusion percentage: 7.35%
 Number of layers detected: 23


Estimation of post-earthquake settlements

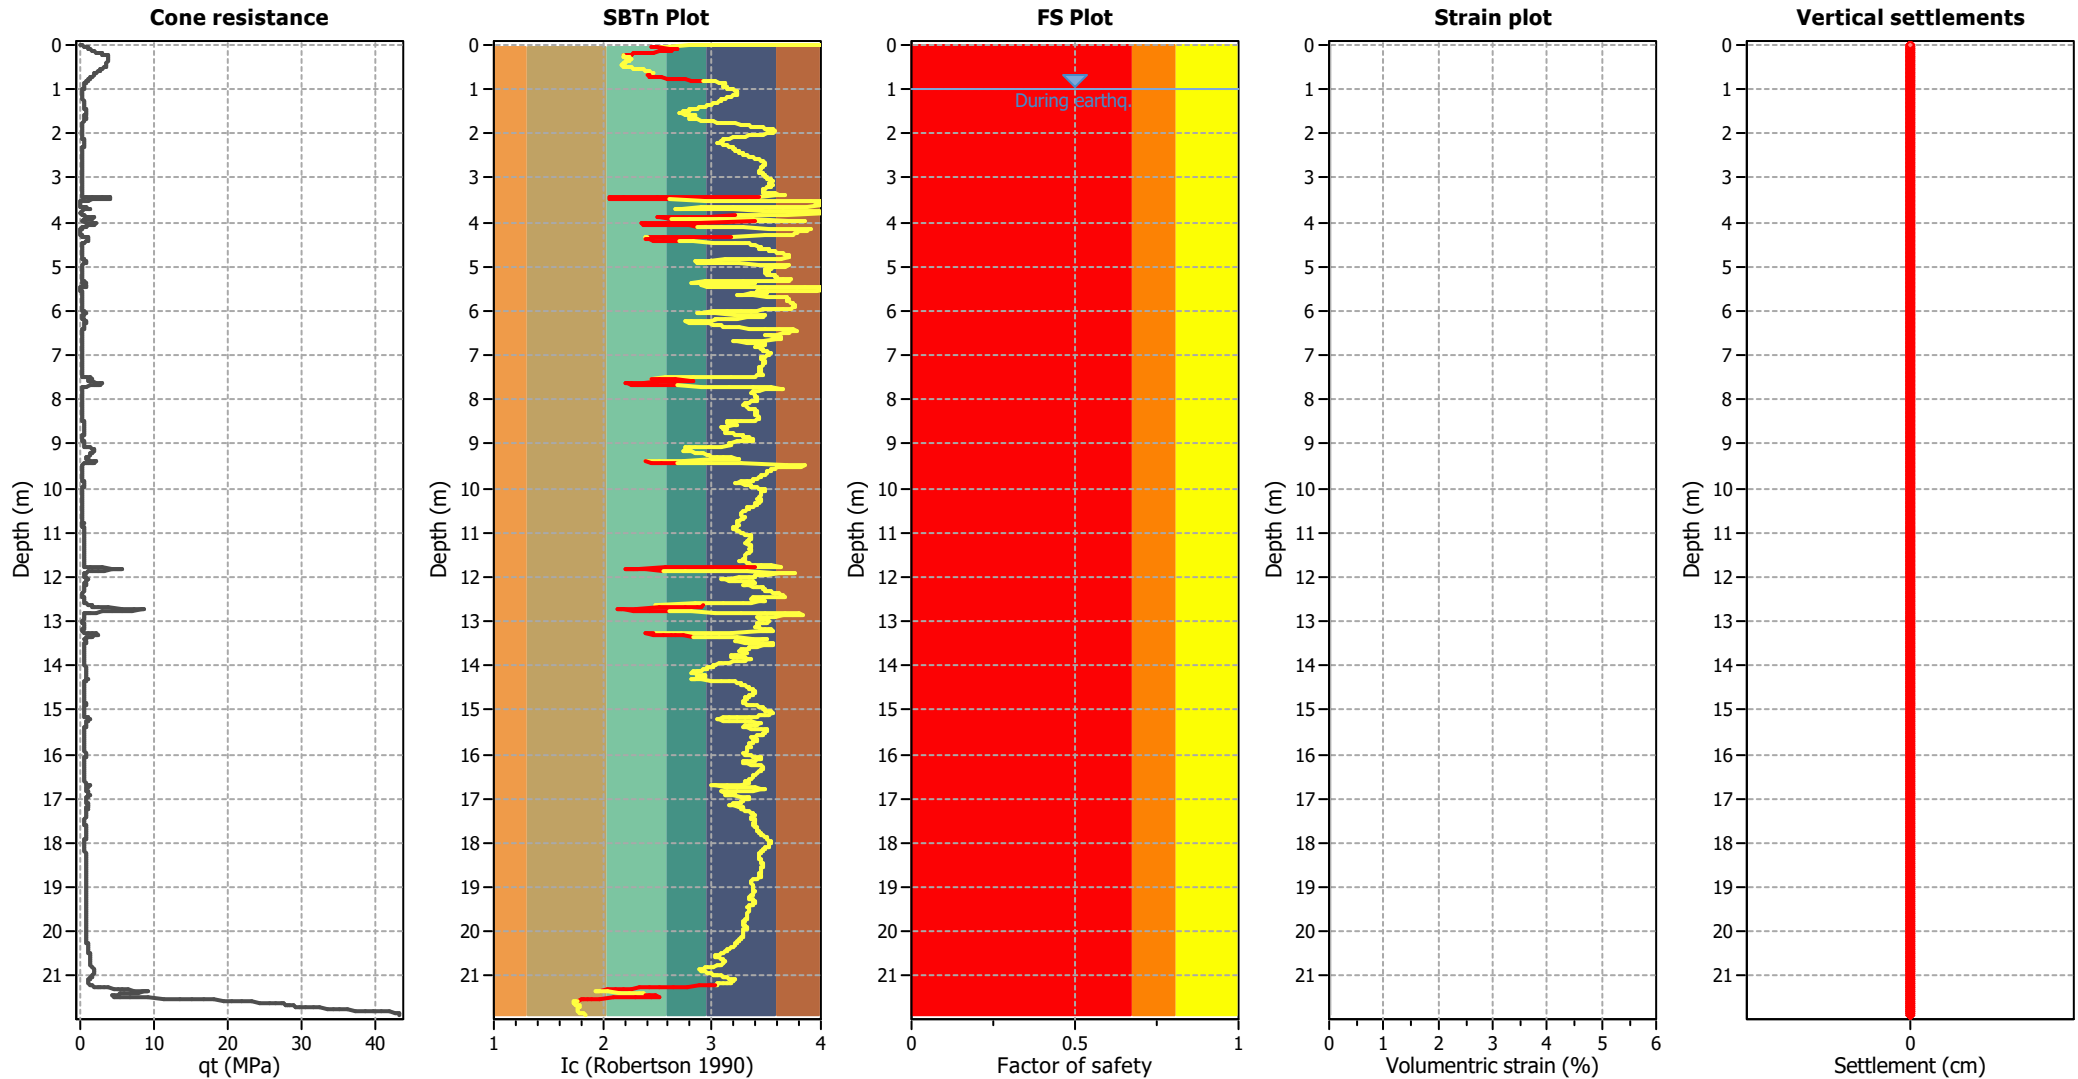

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

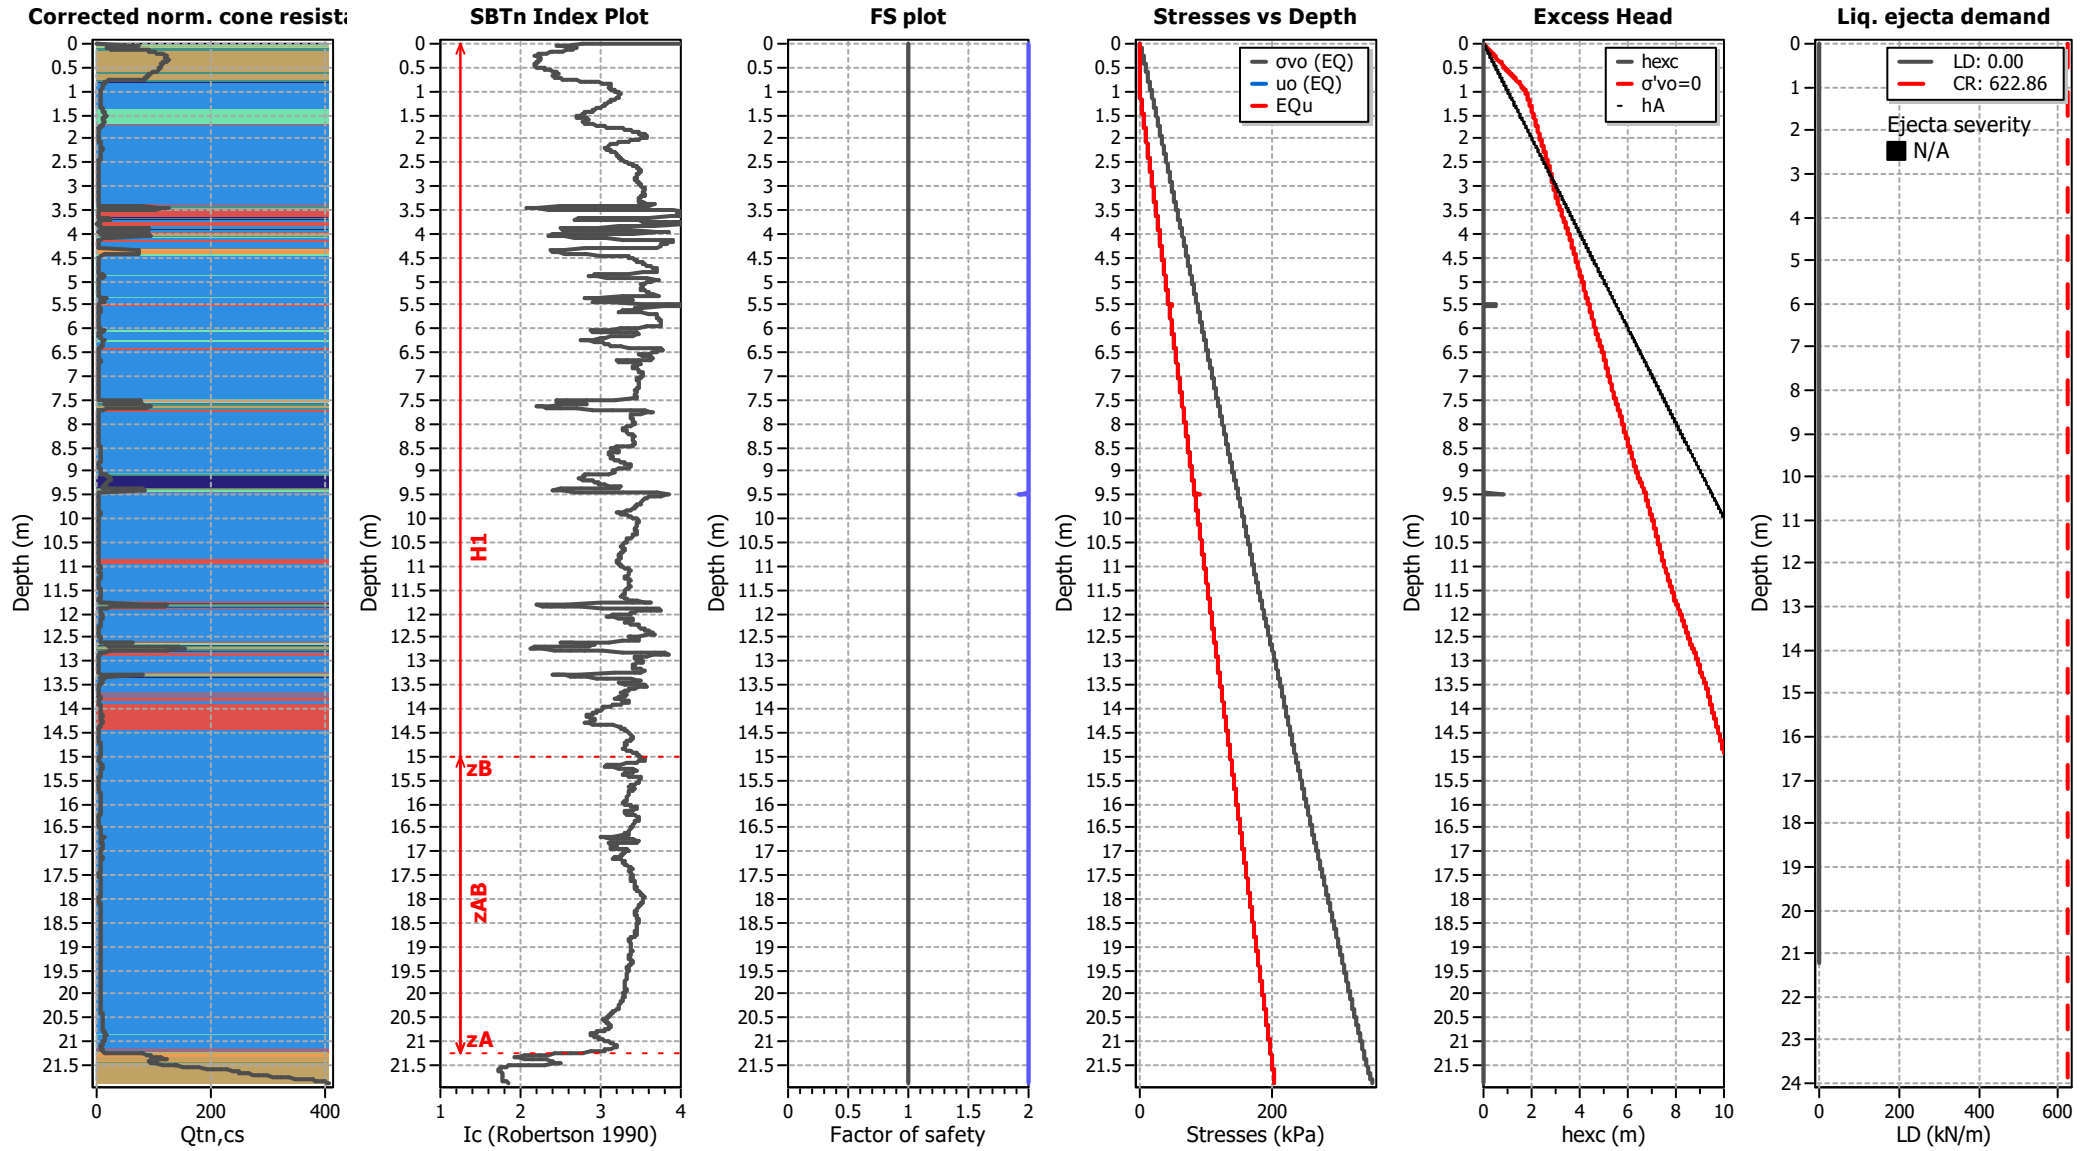

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT12

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

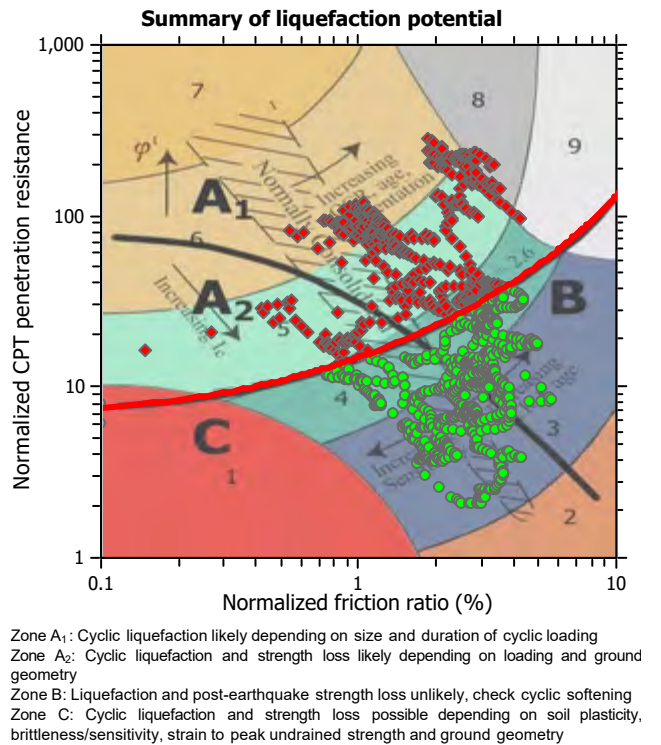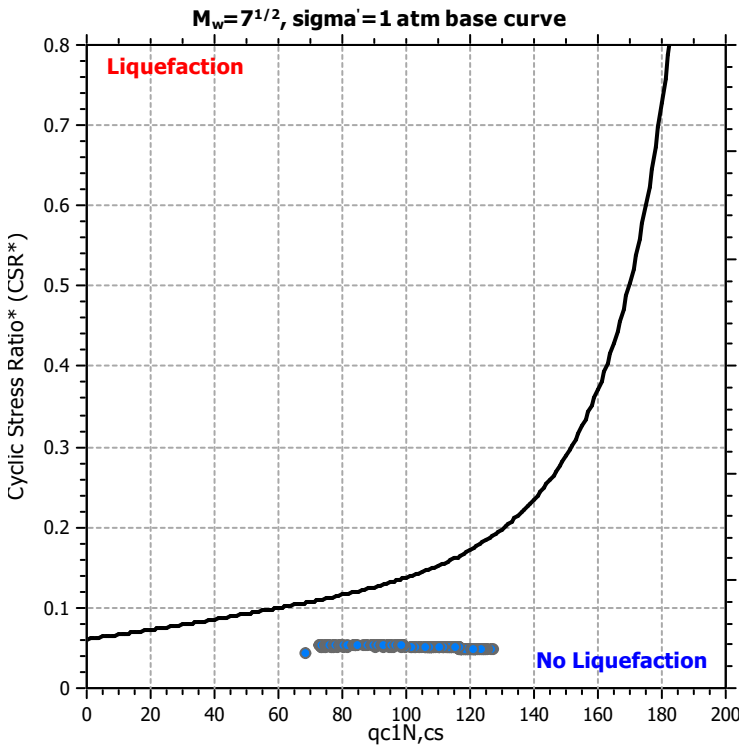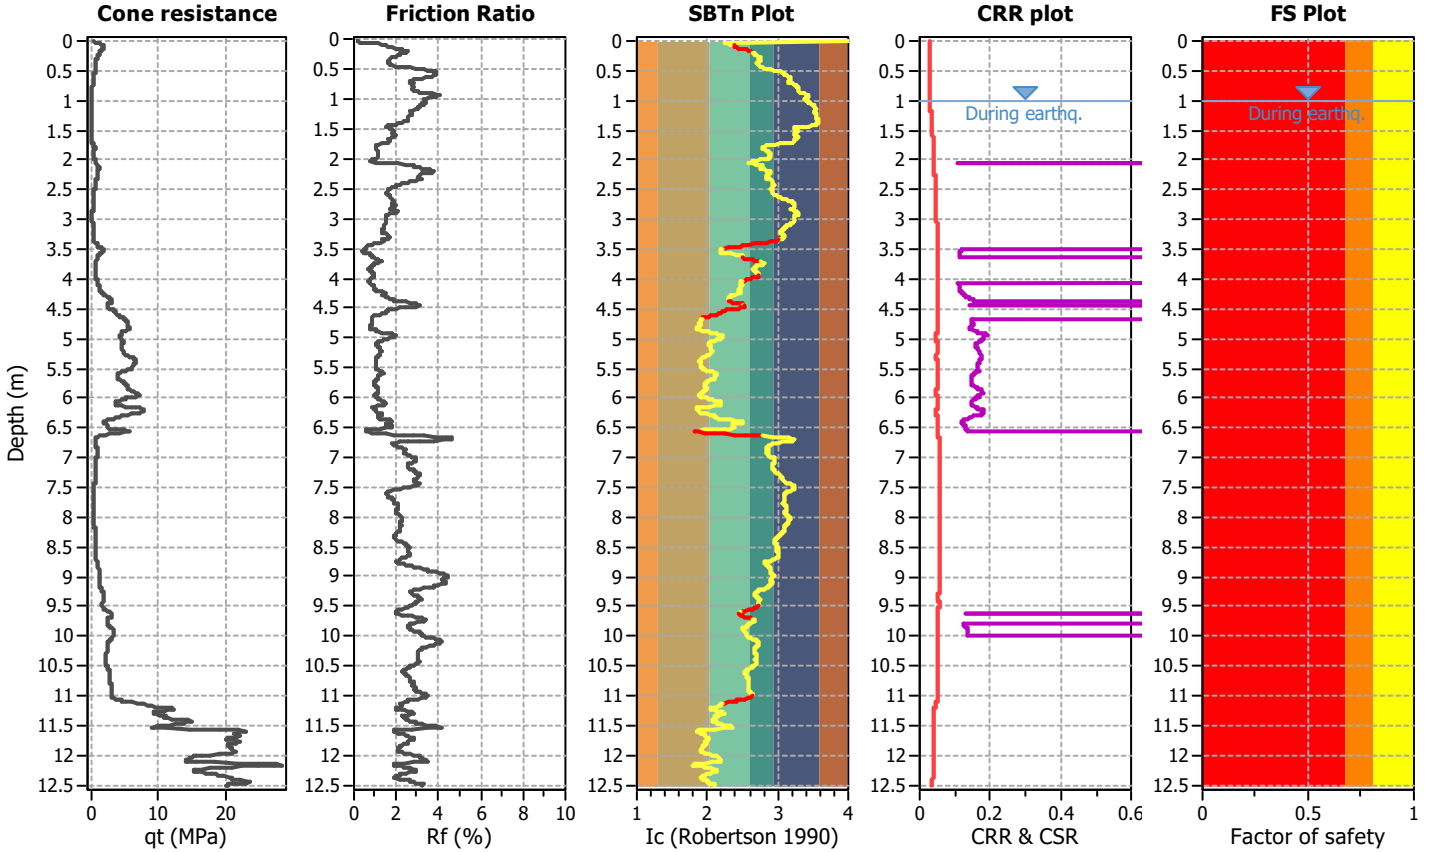

CPT basic interpretation plots

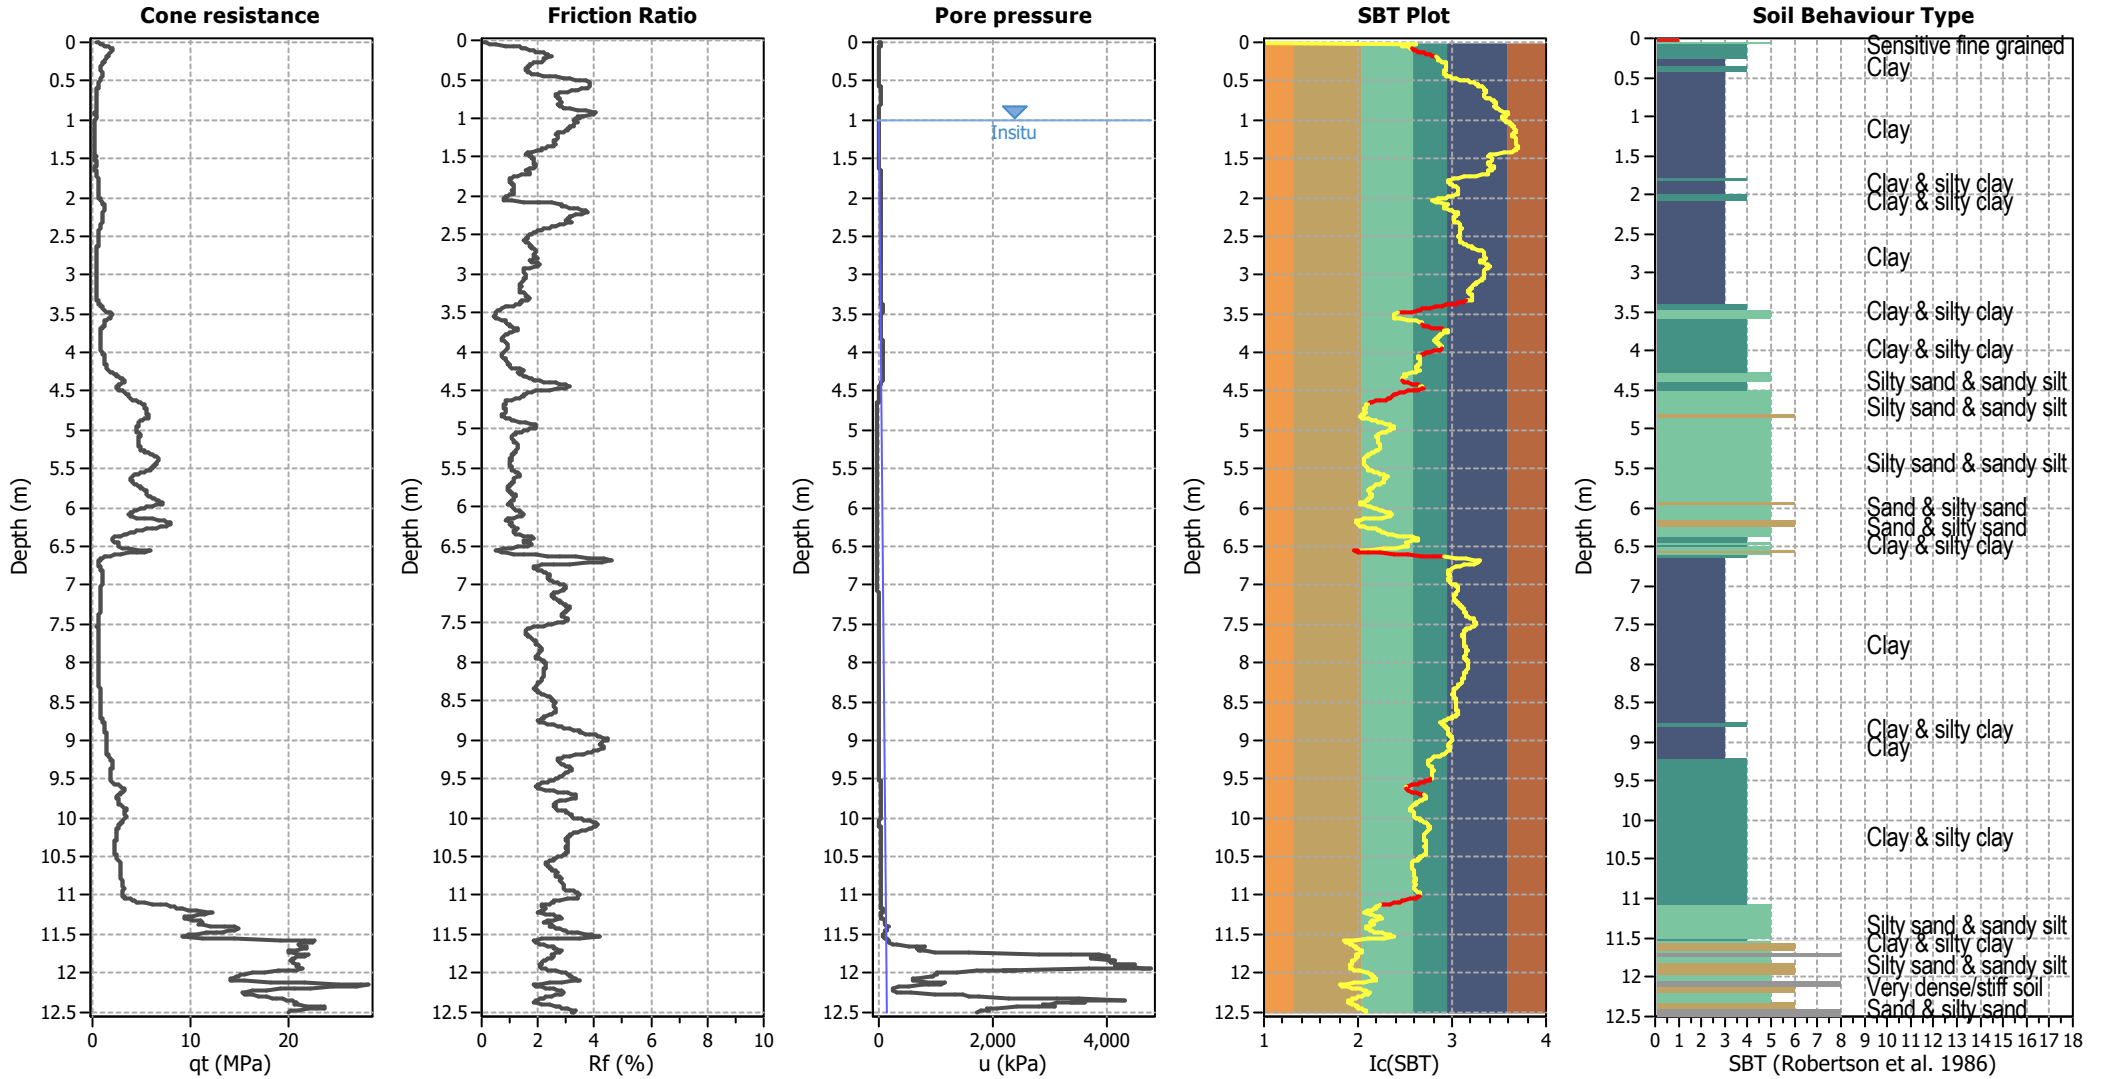


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

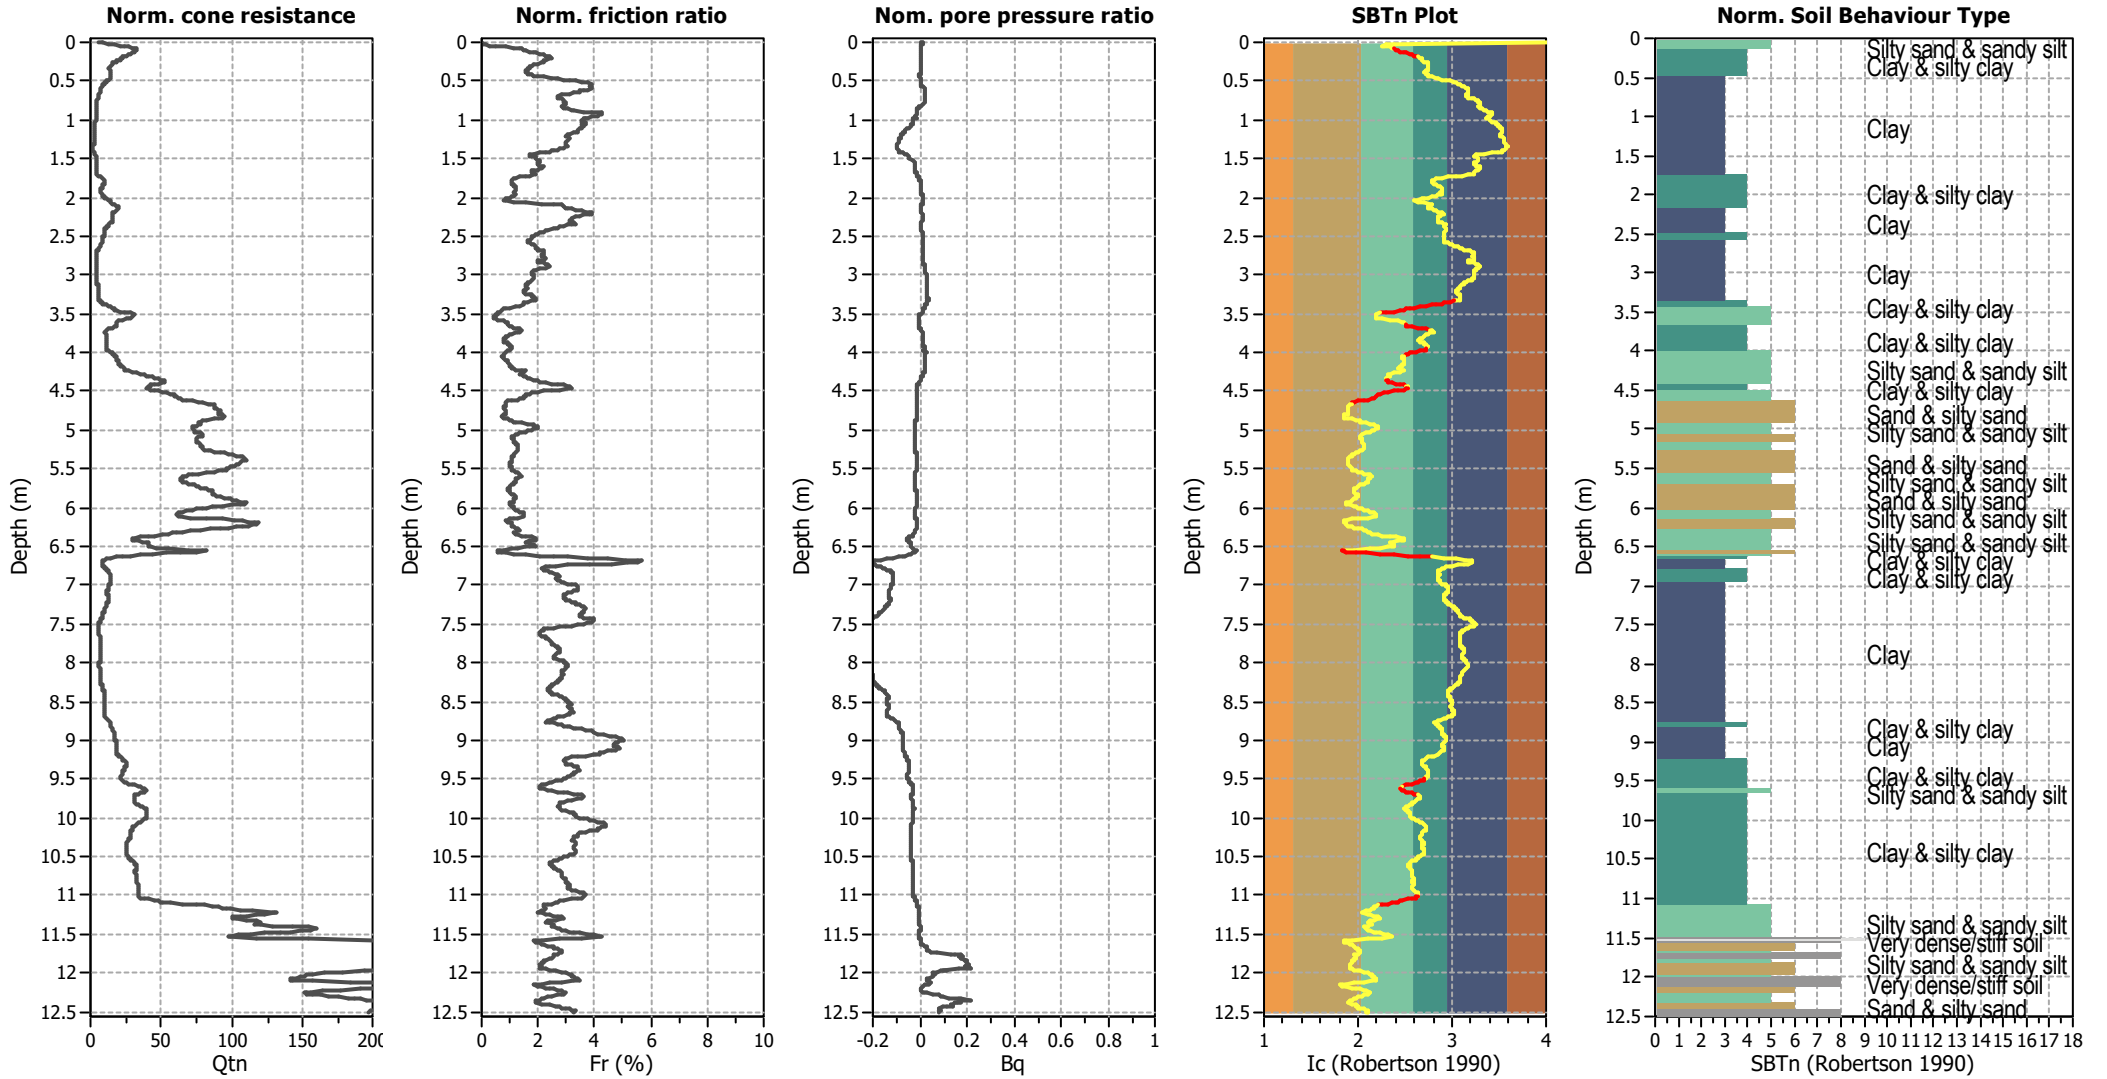


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

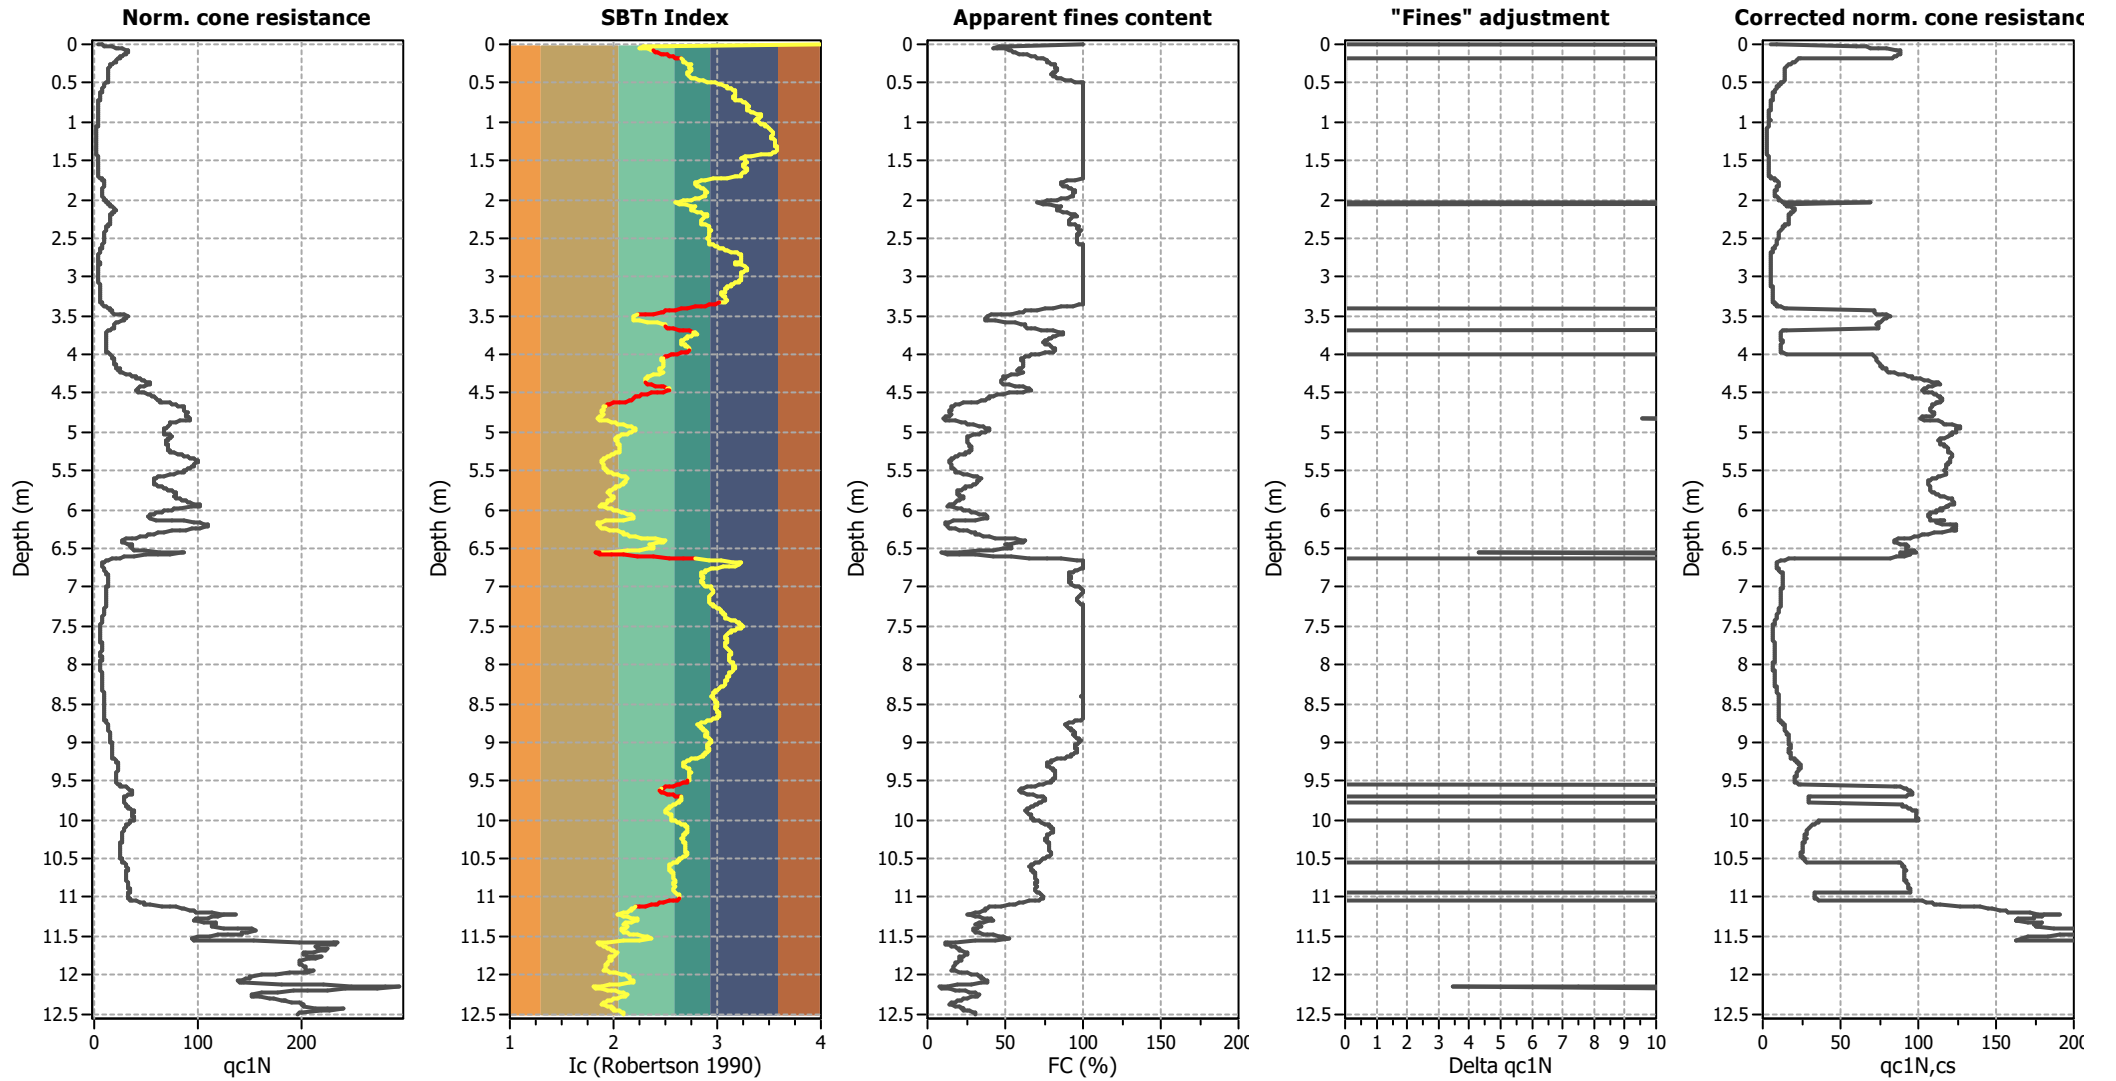

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

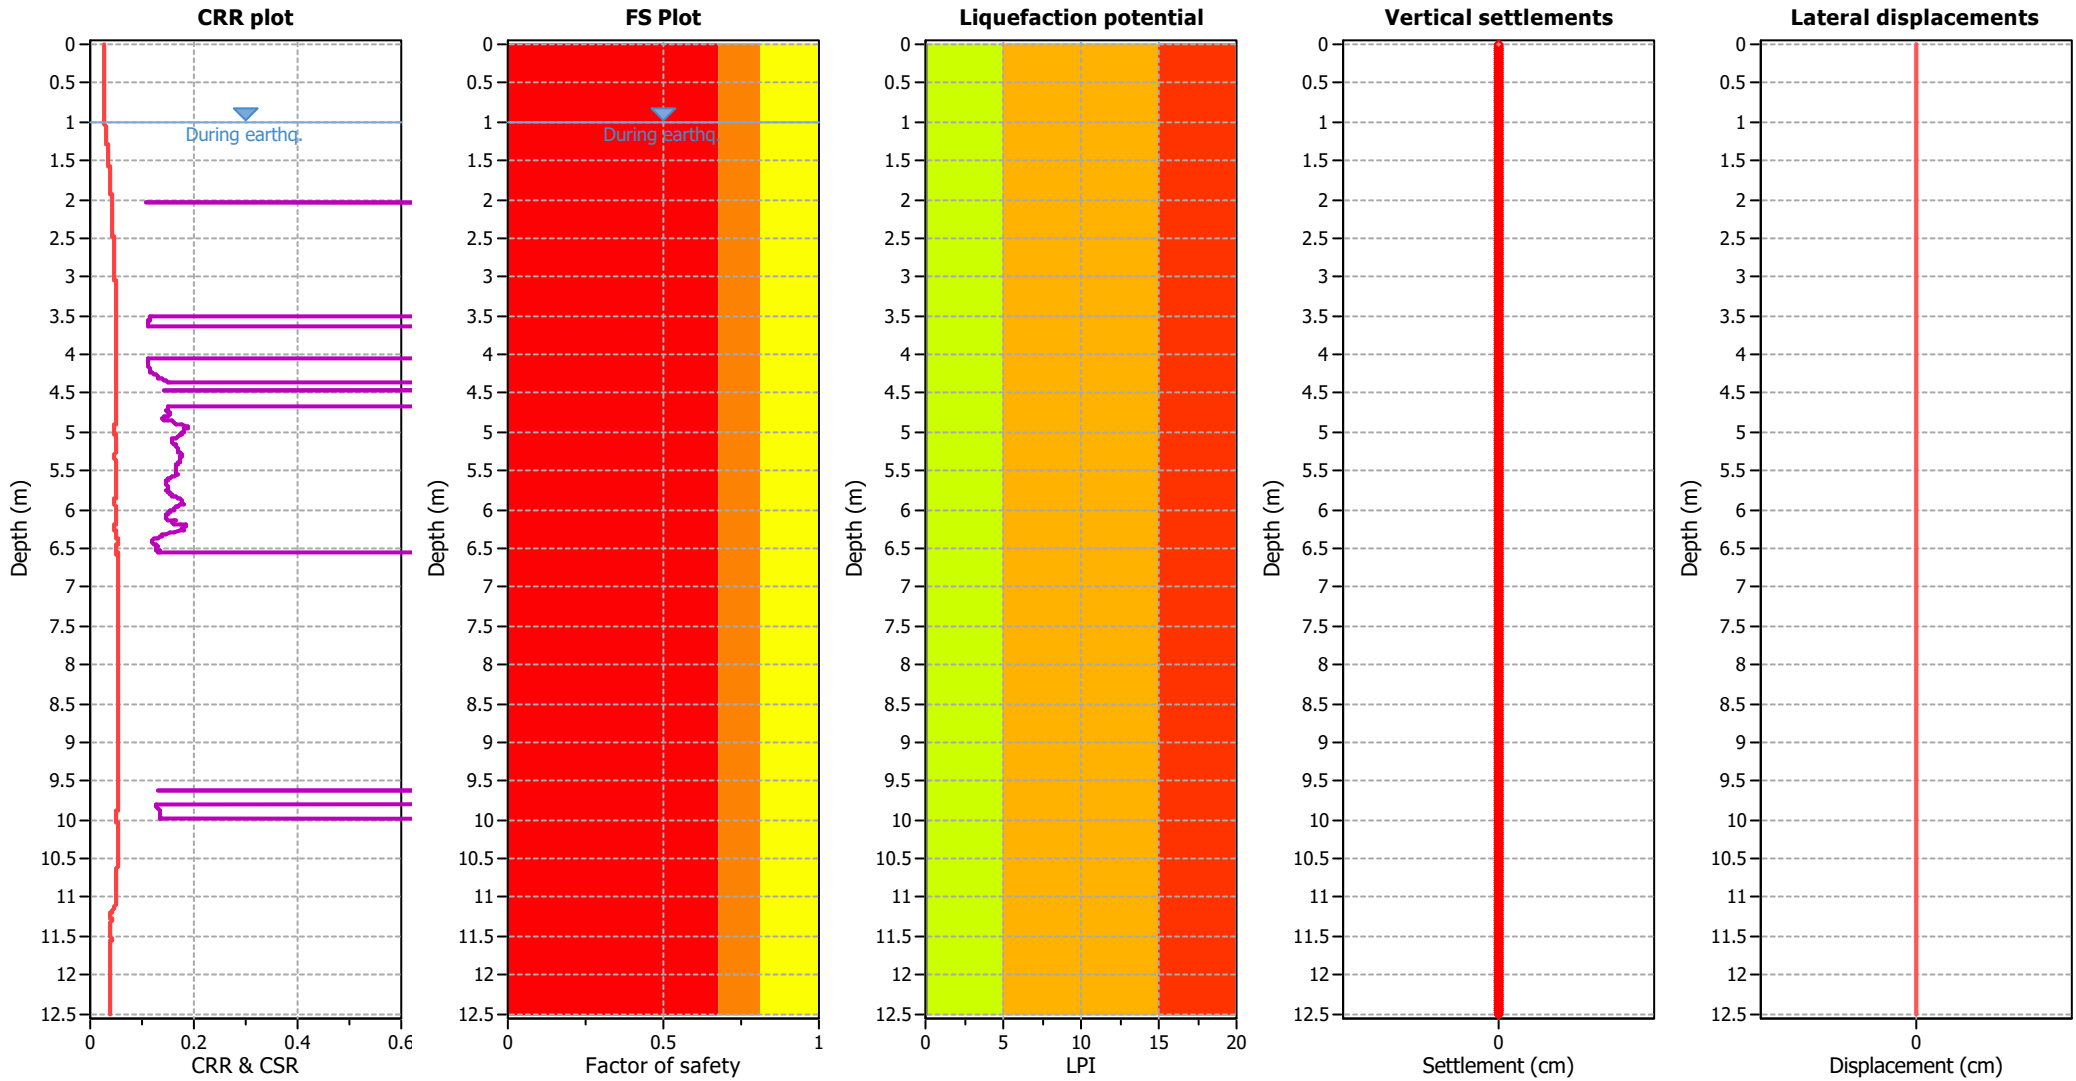

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

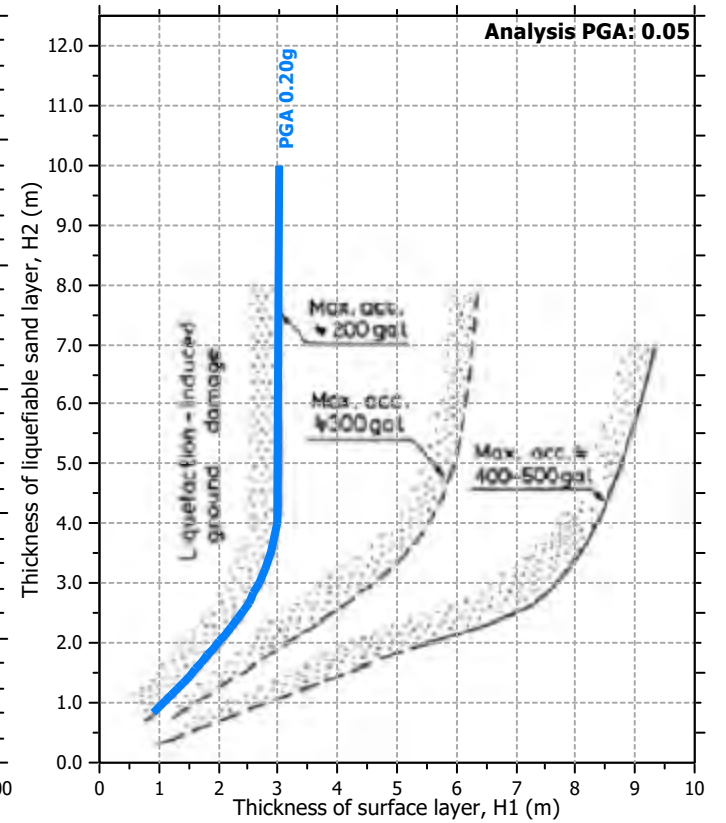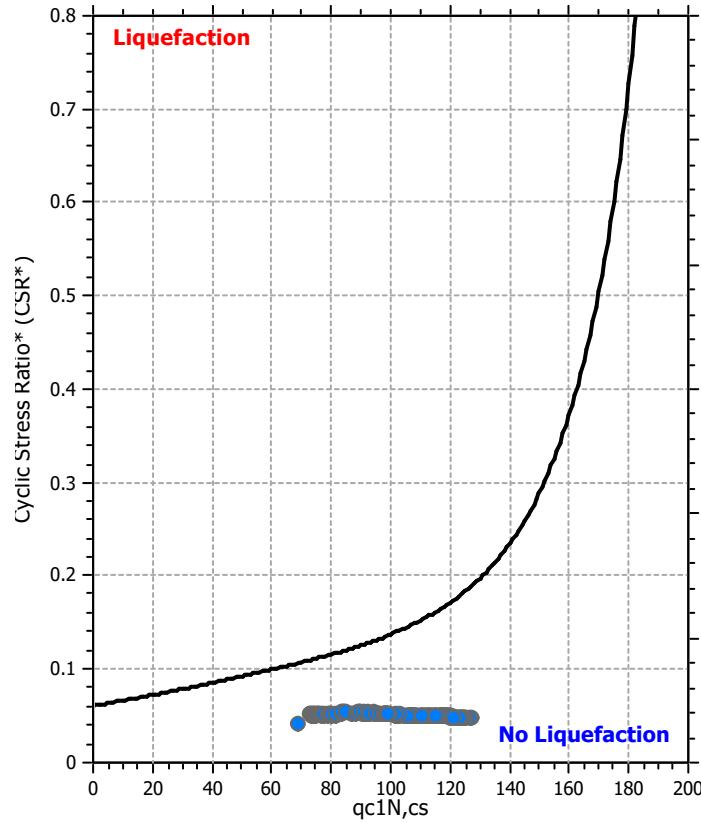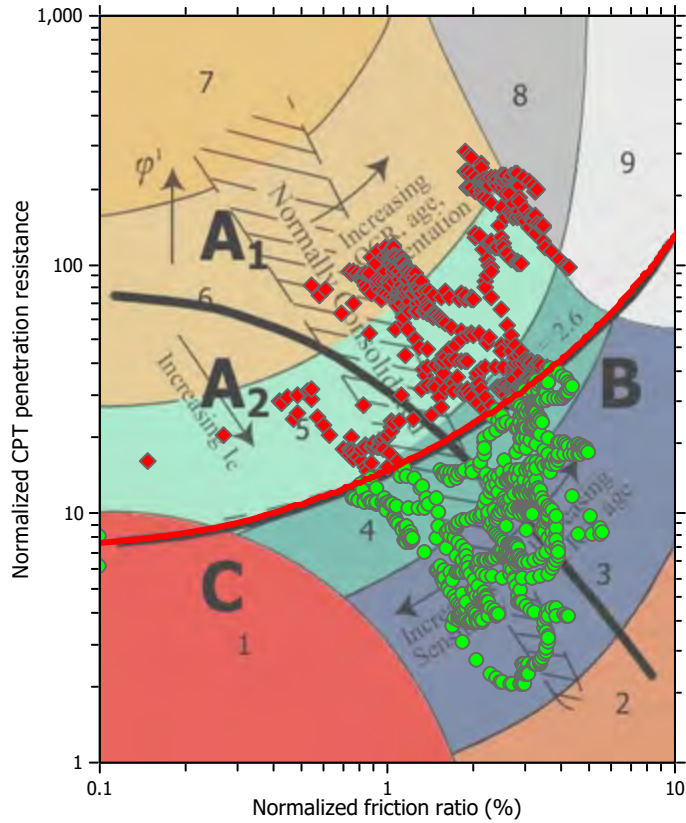

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

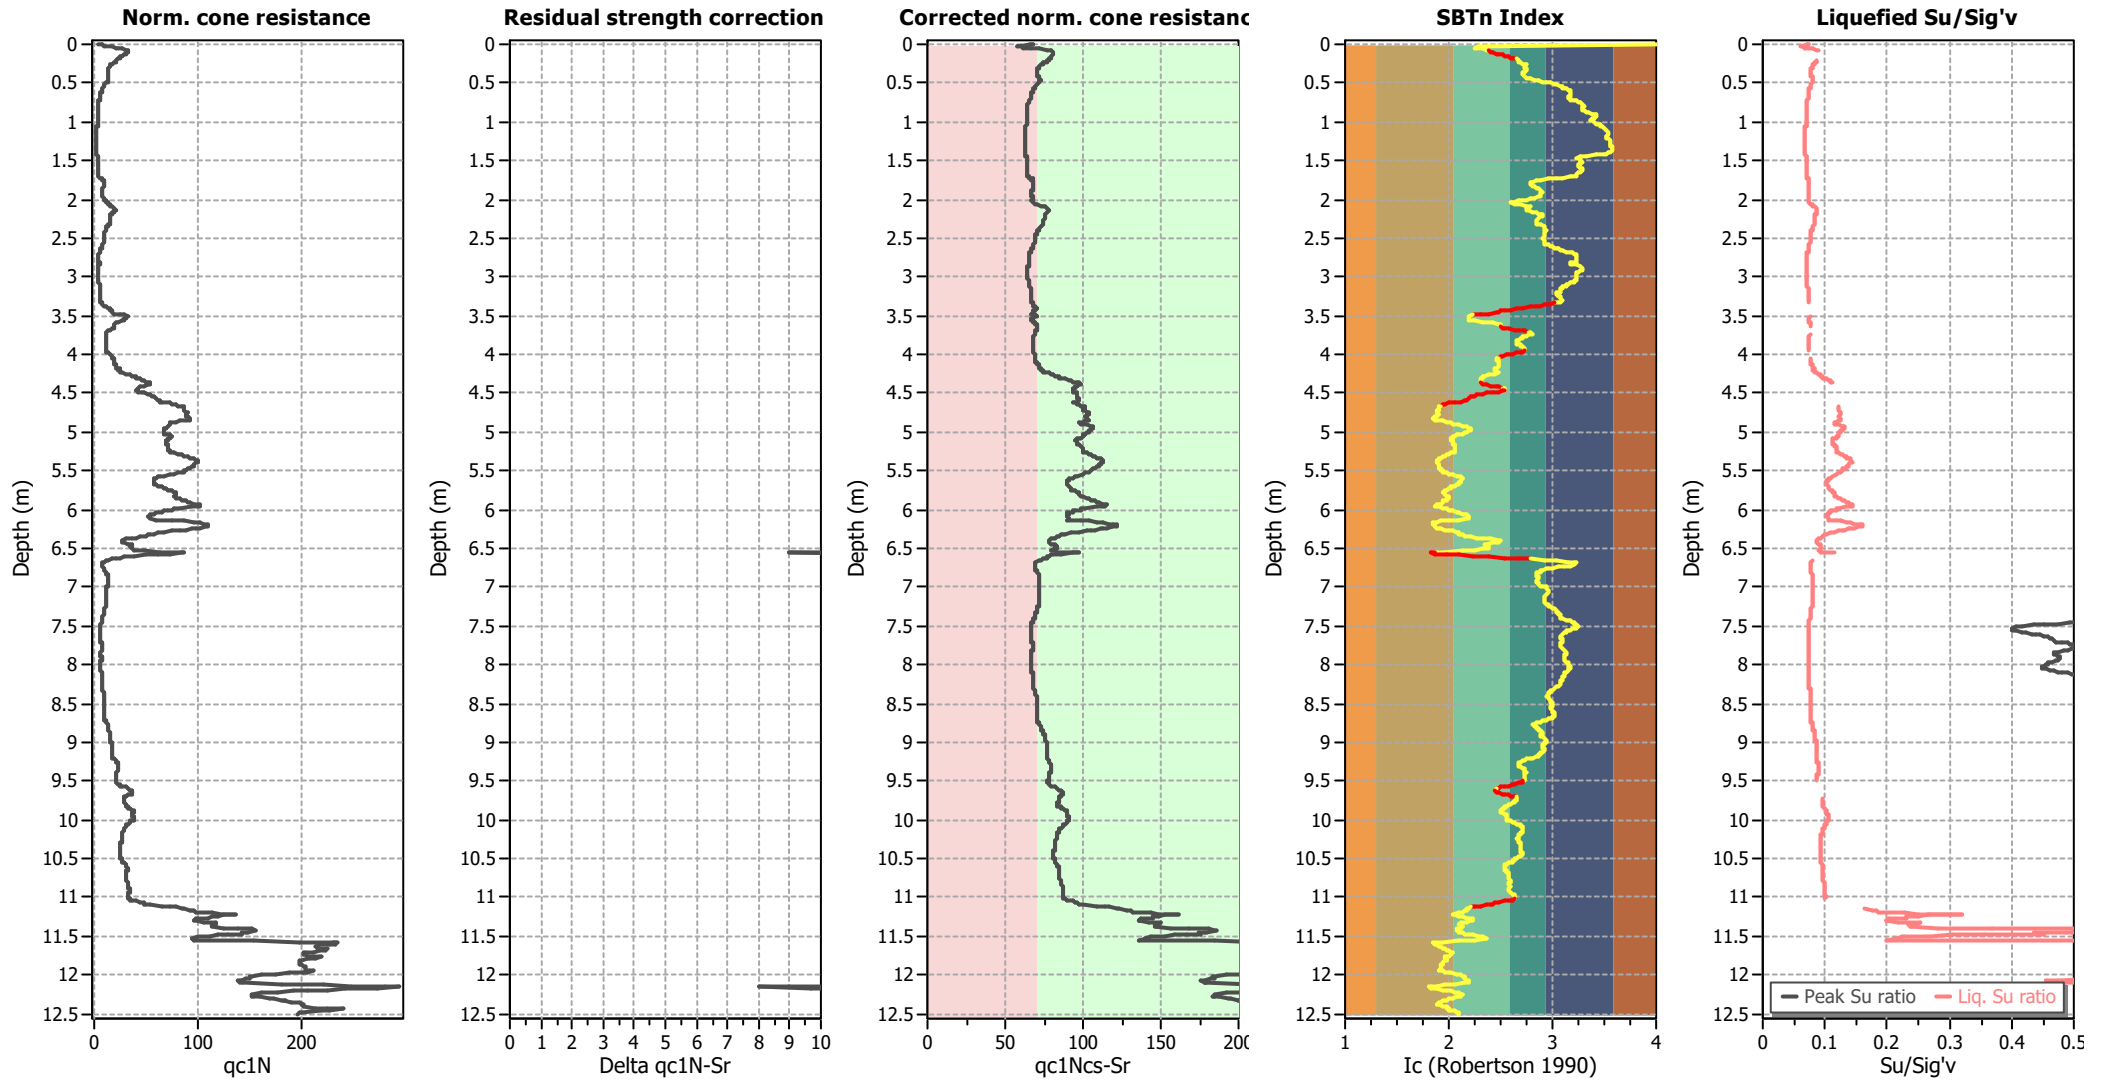

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

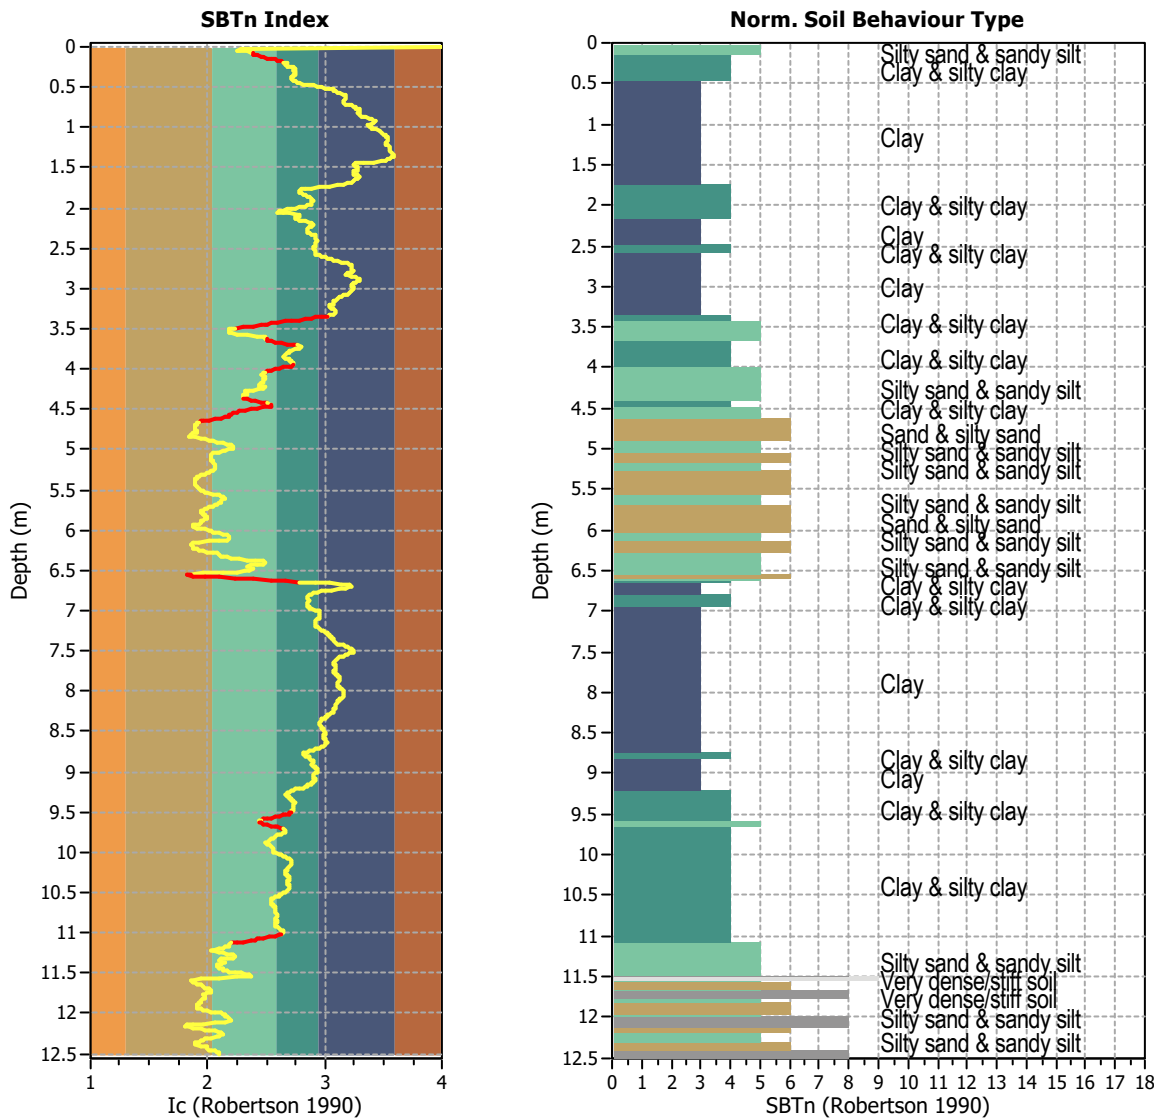


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1252
 Total points excluded: 122
 Exclusion percentage: 9.74%
 Number of layers detected: 10


Estimation of post-earthquake settlements

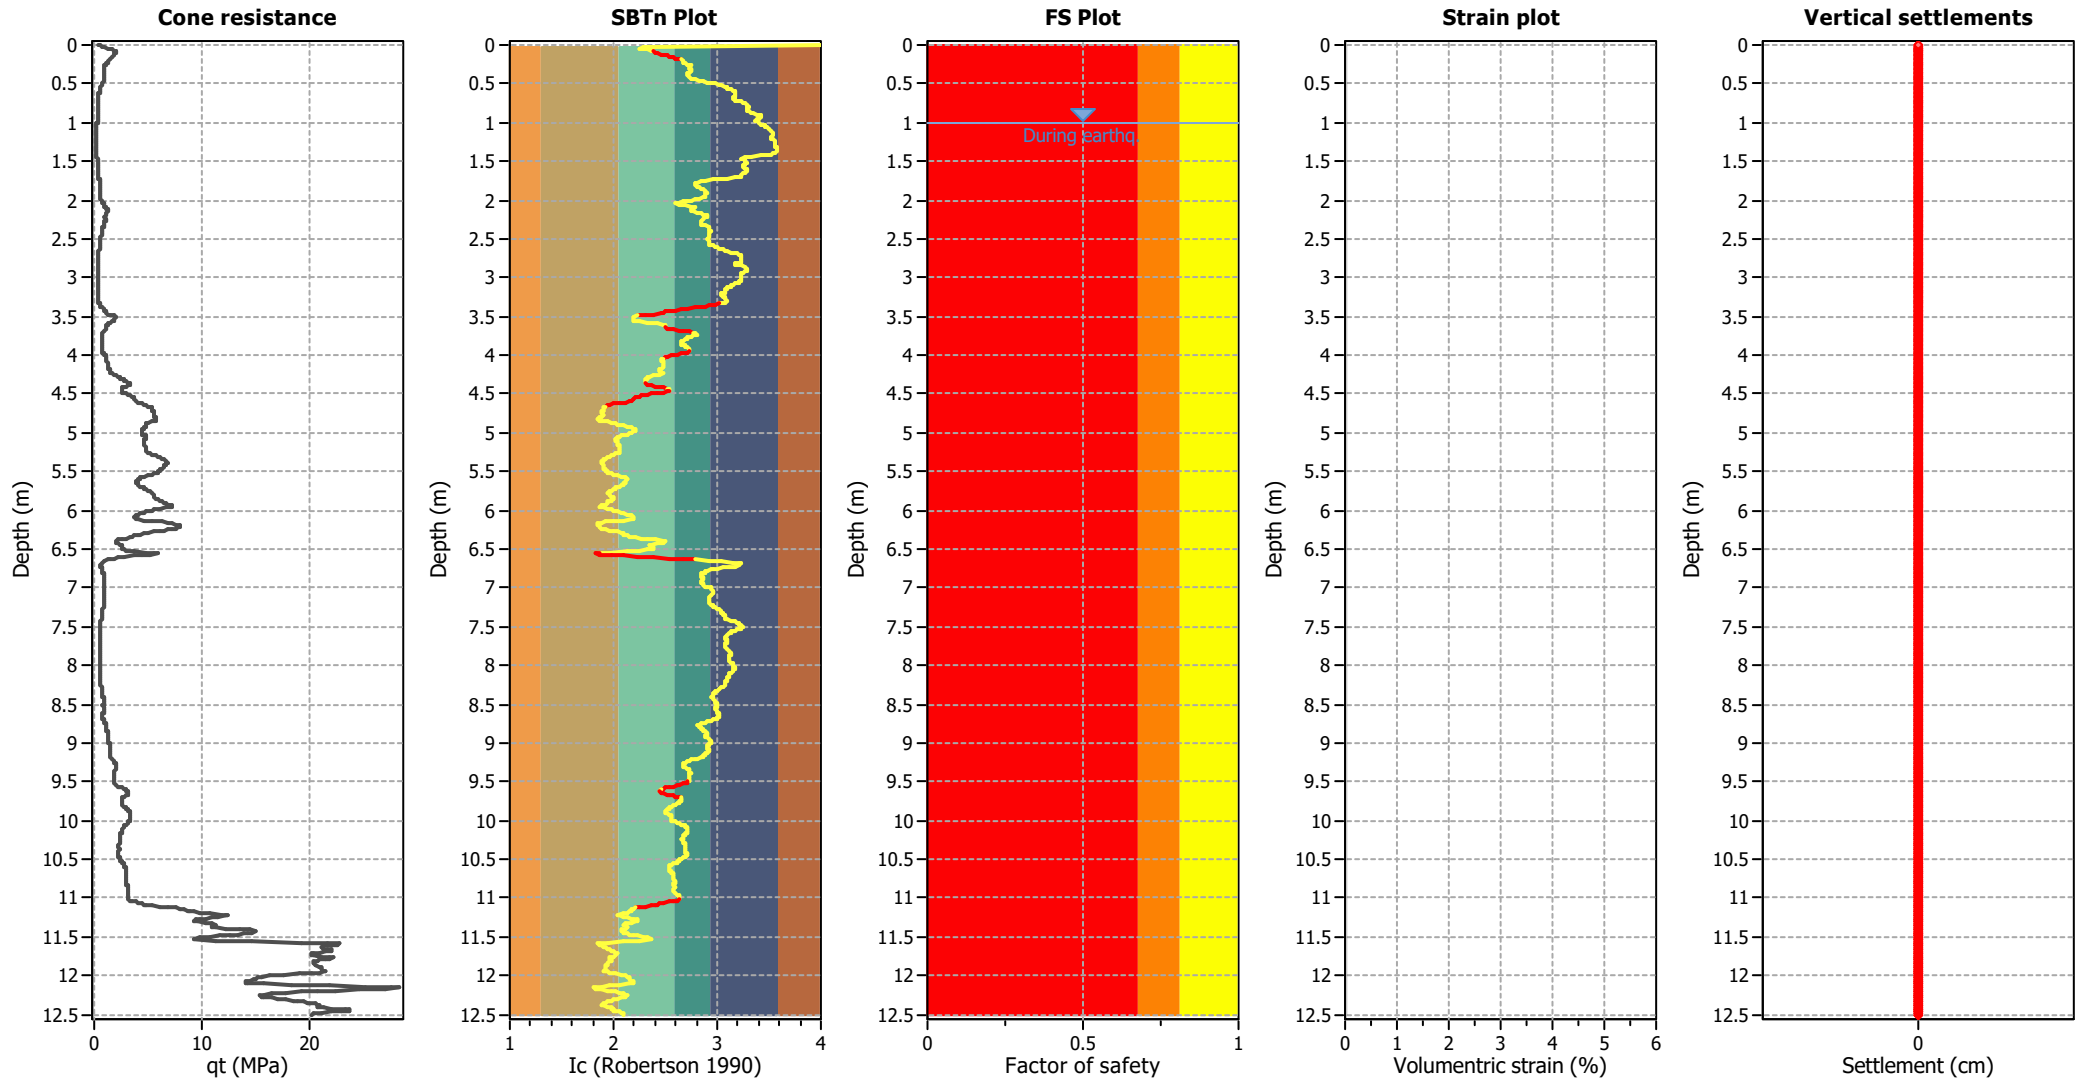

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

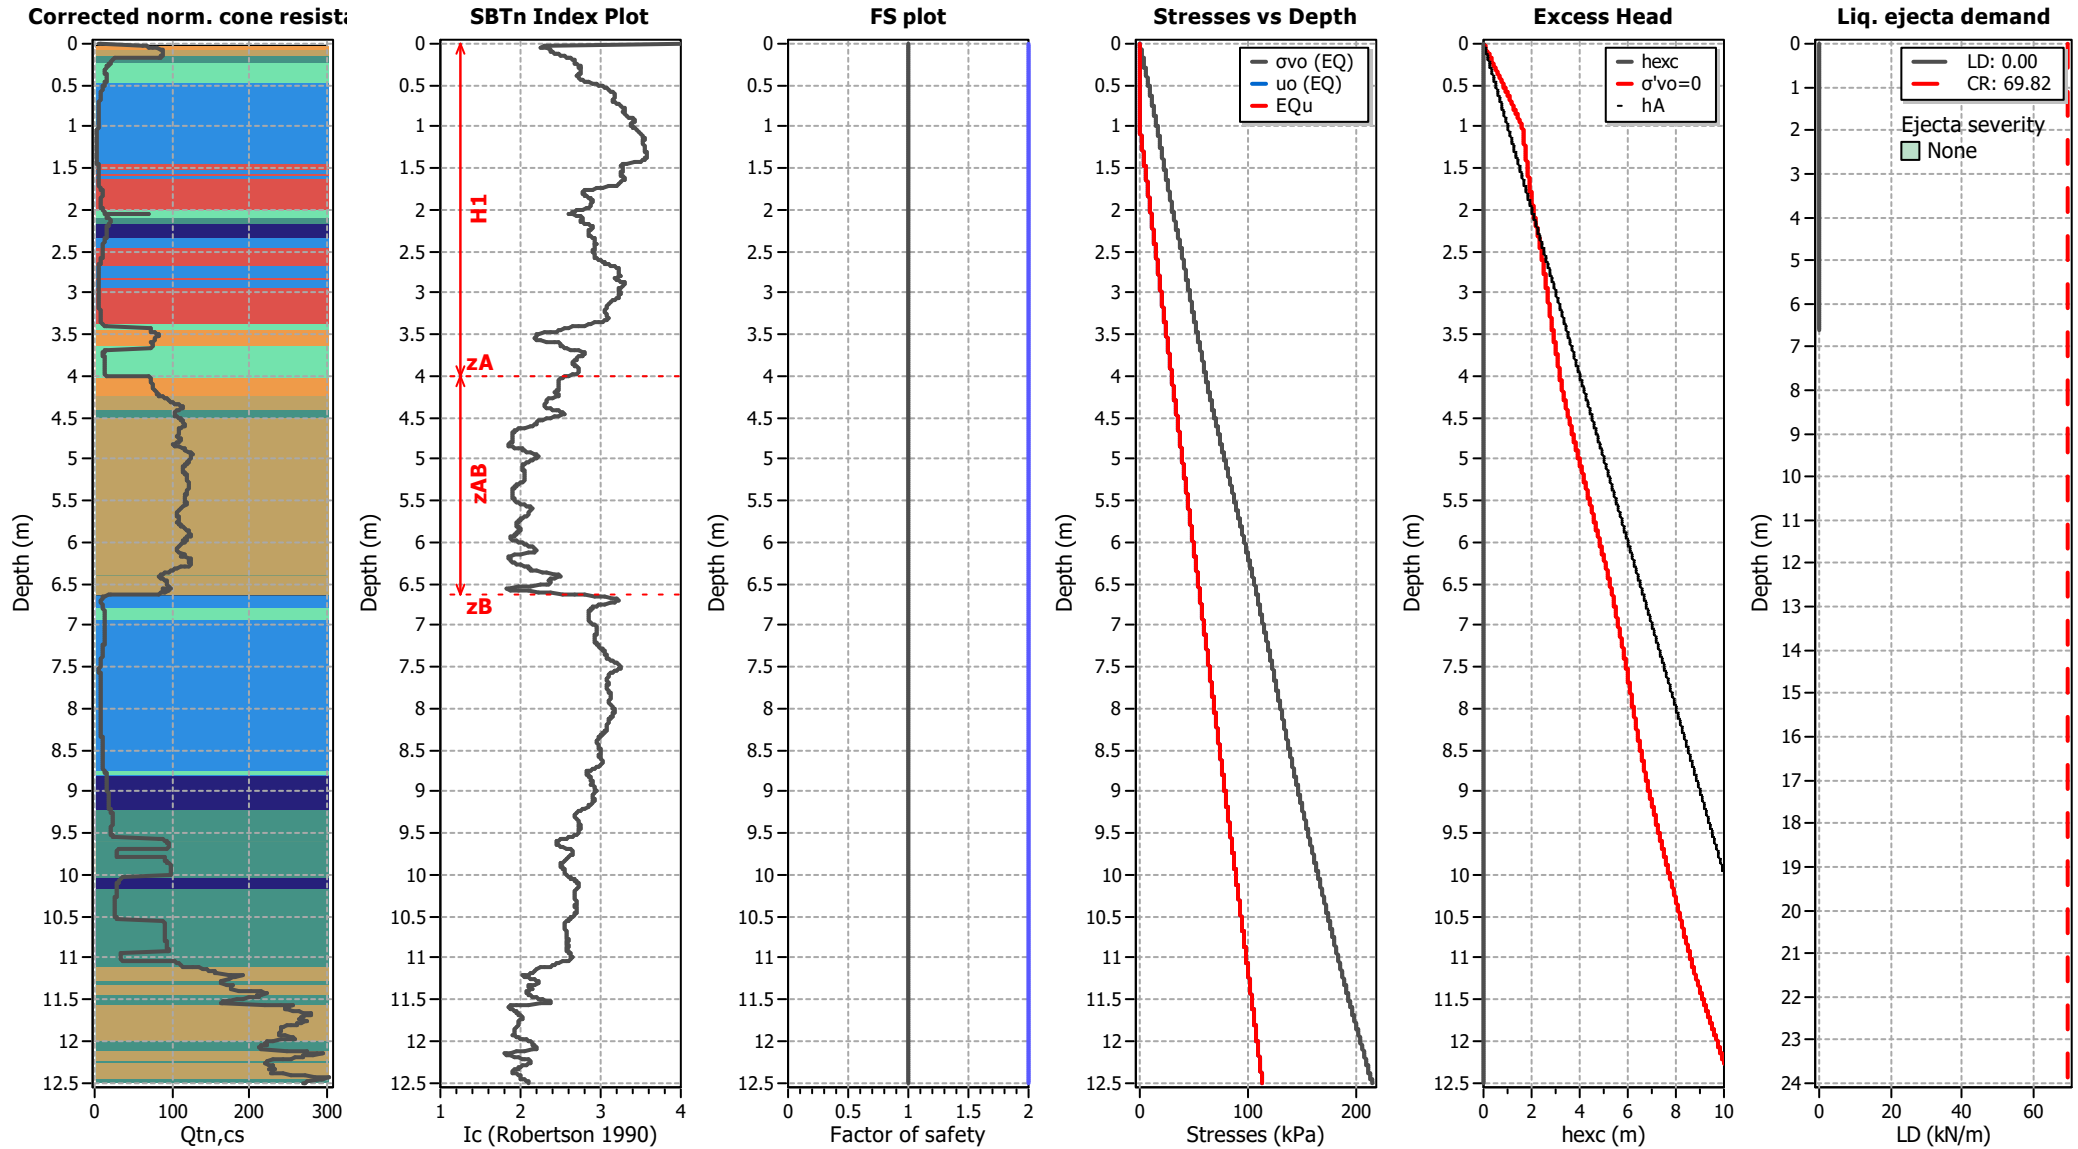

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT13A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

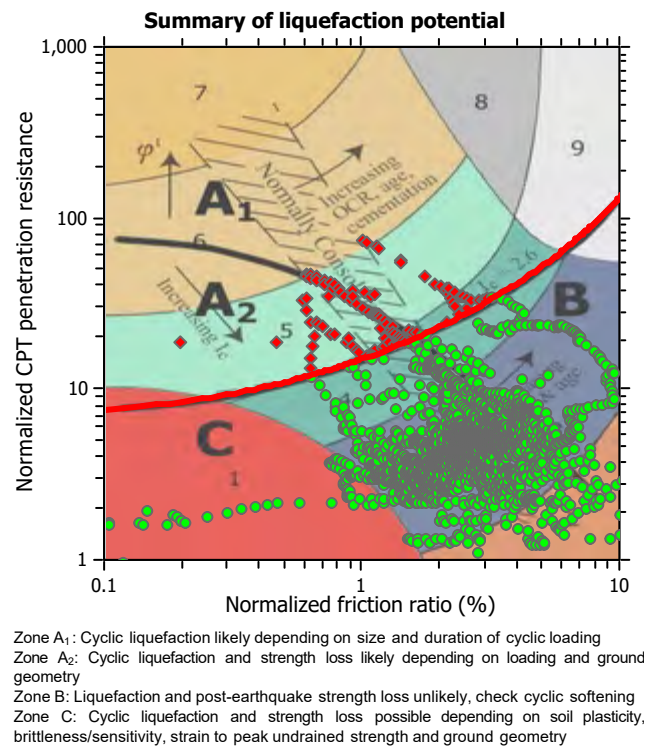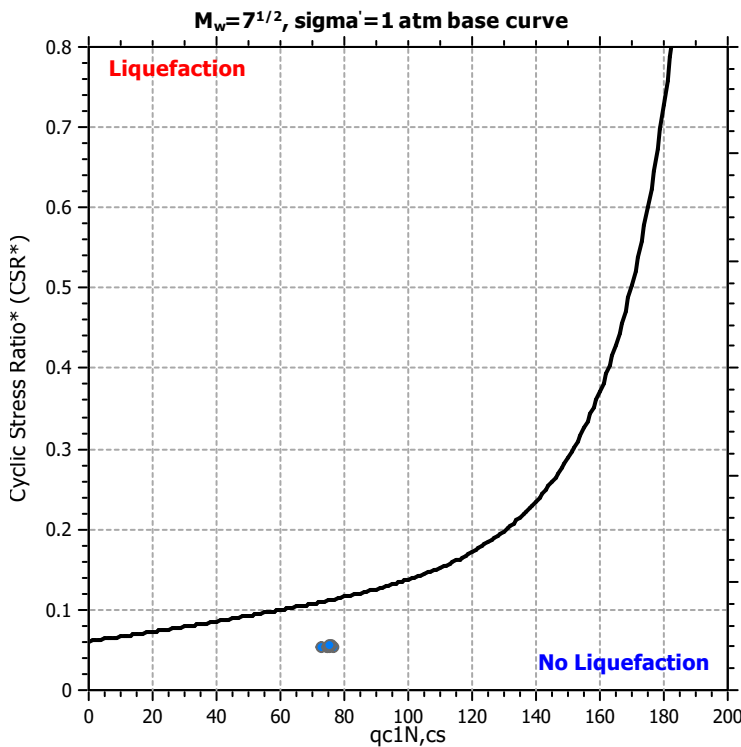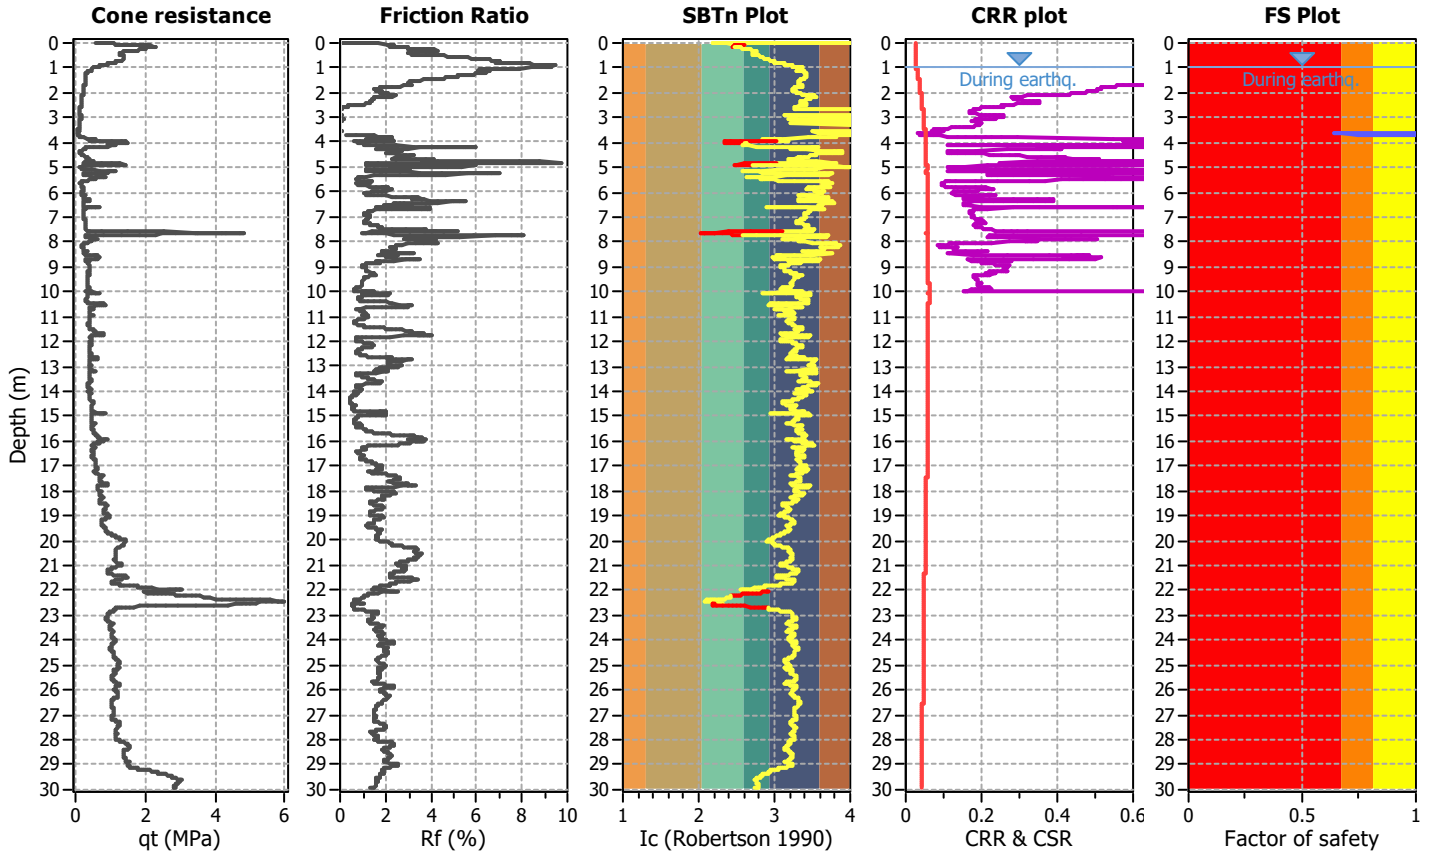

CPT basic interpretation plots

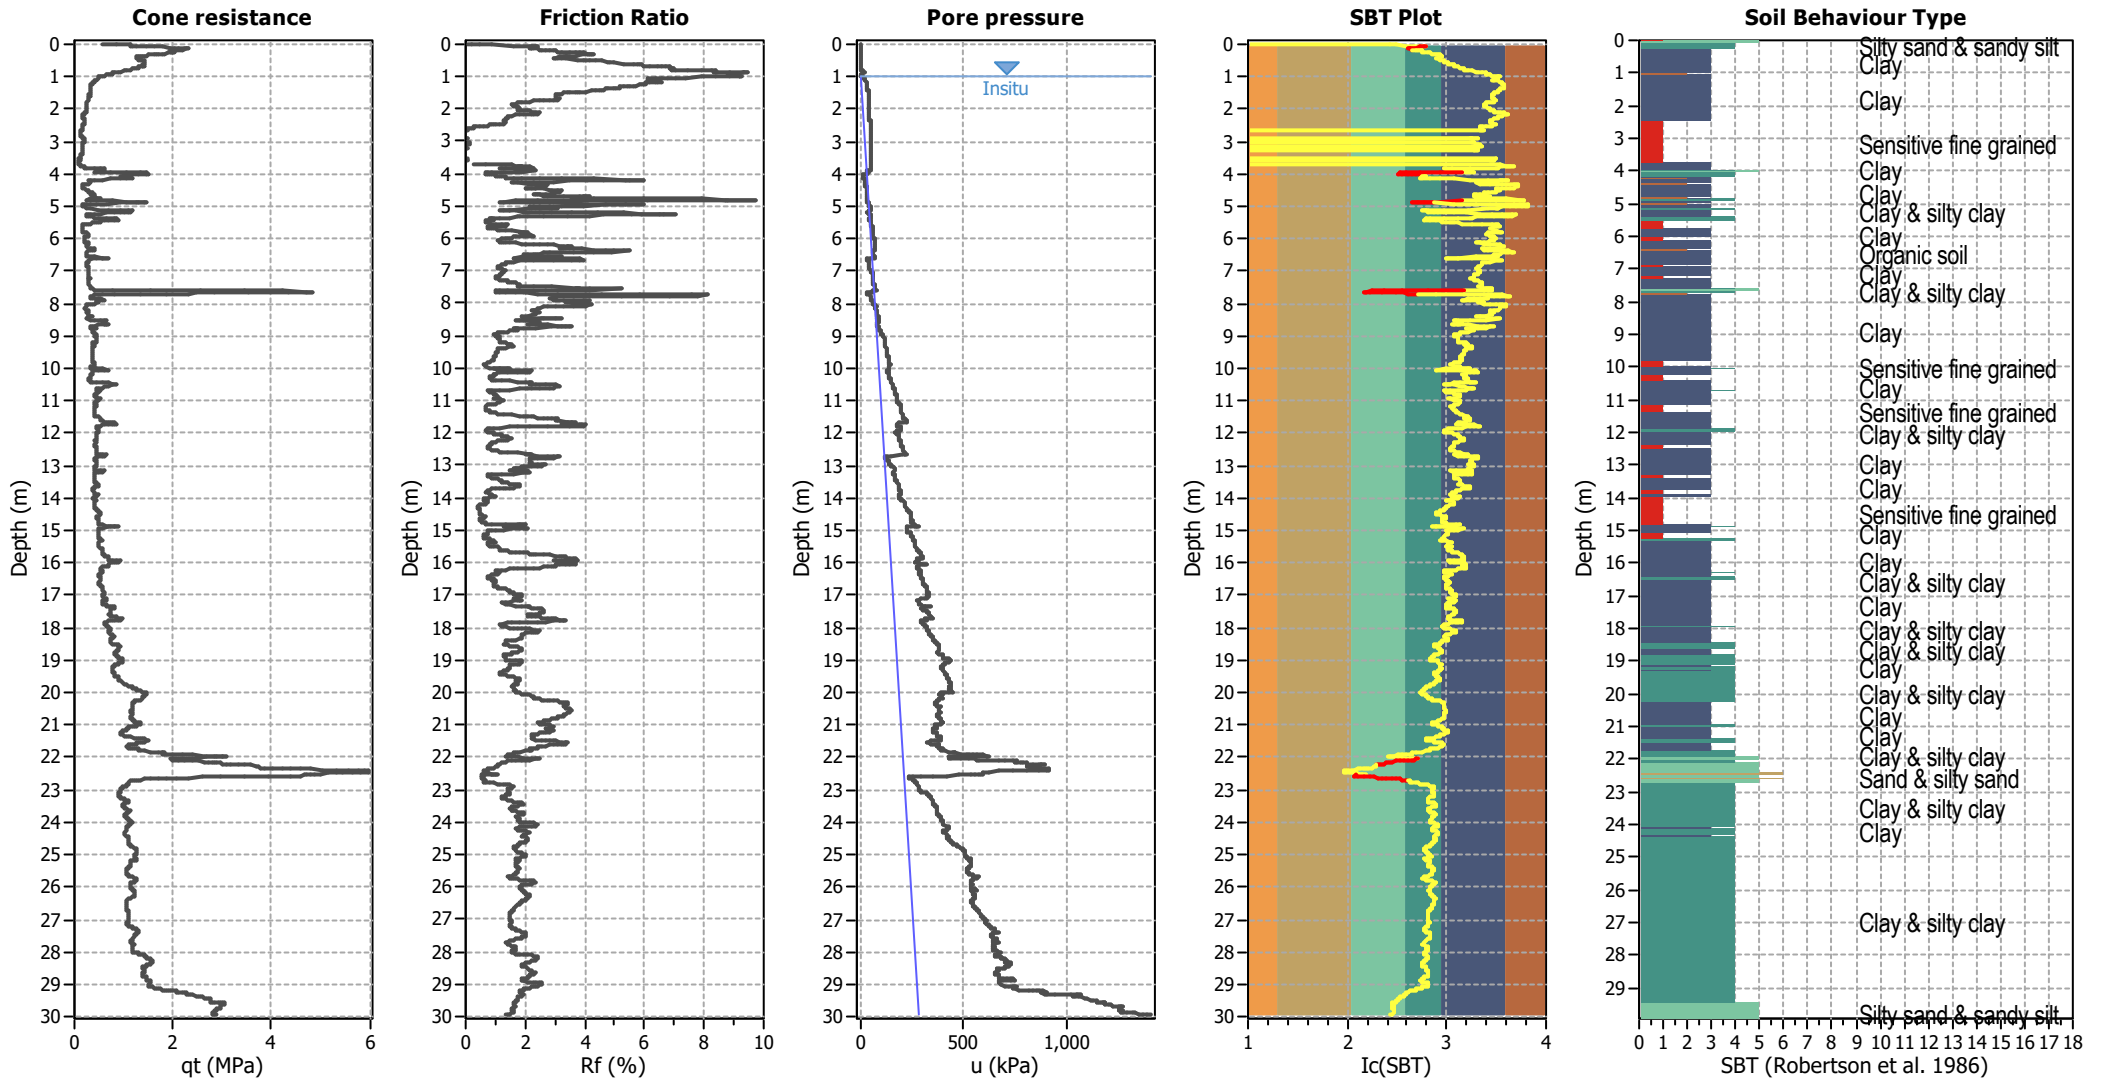


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

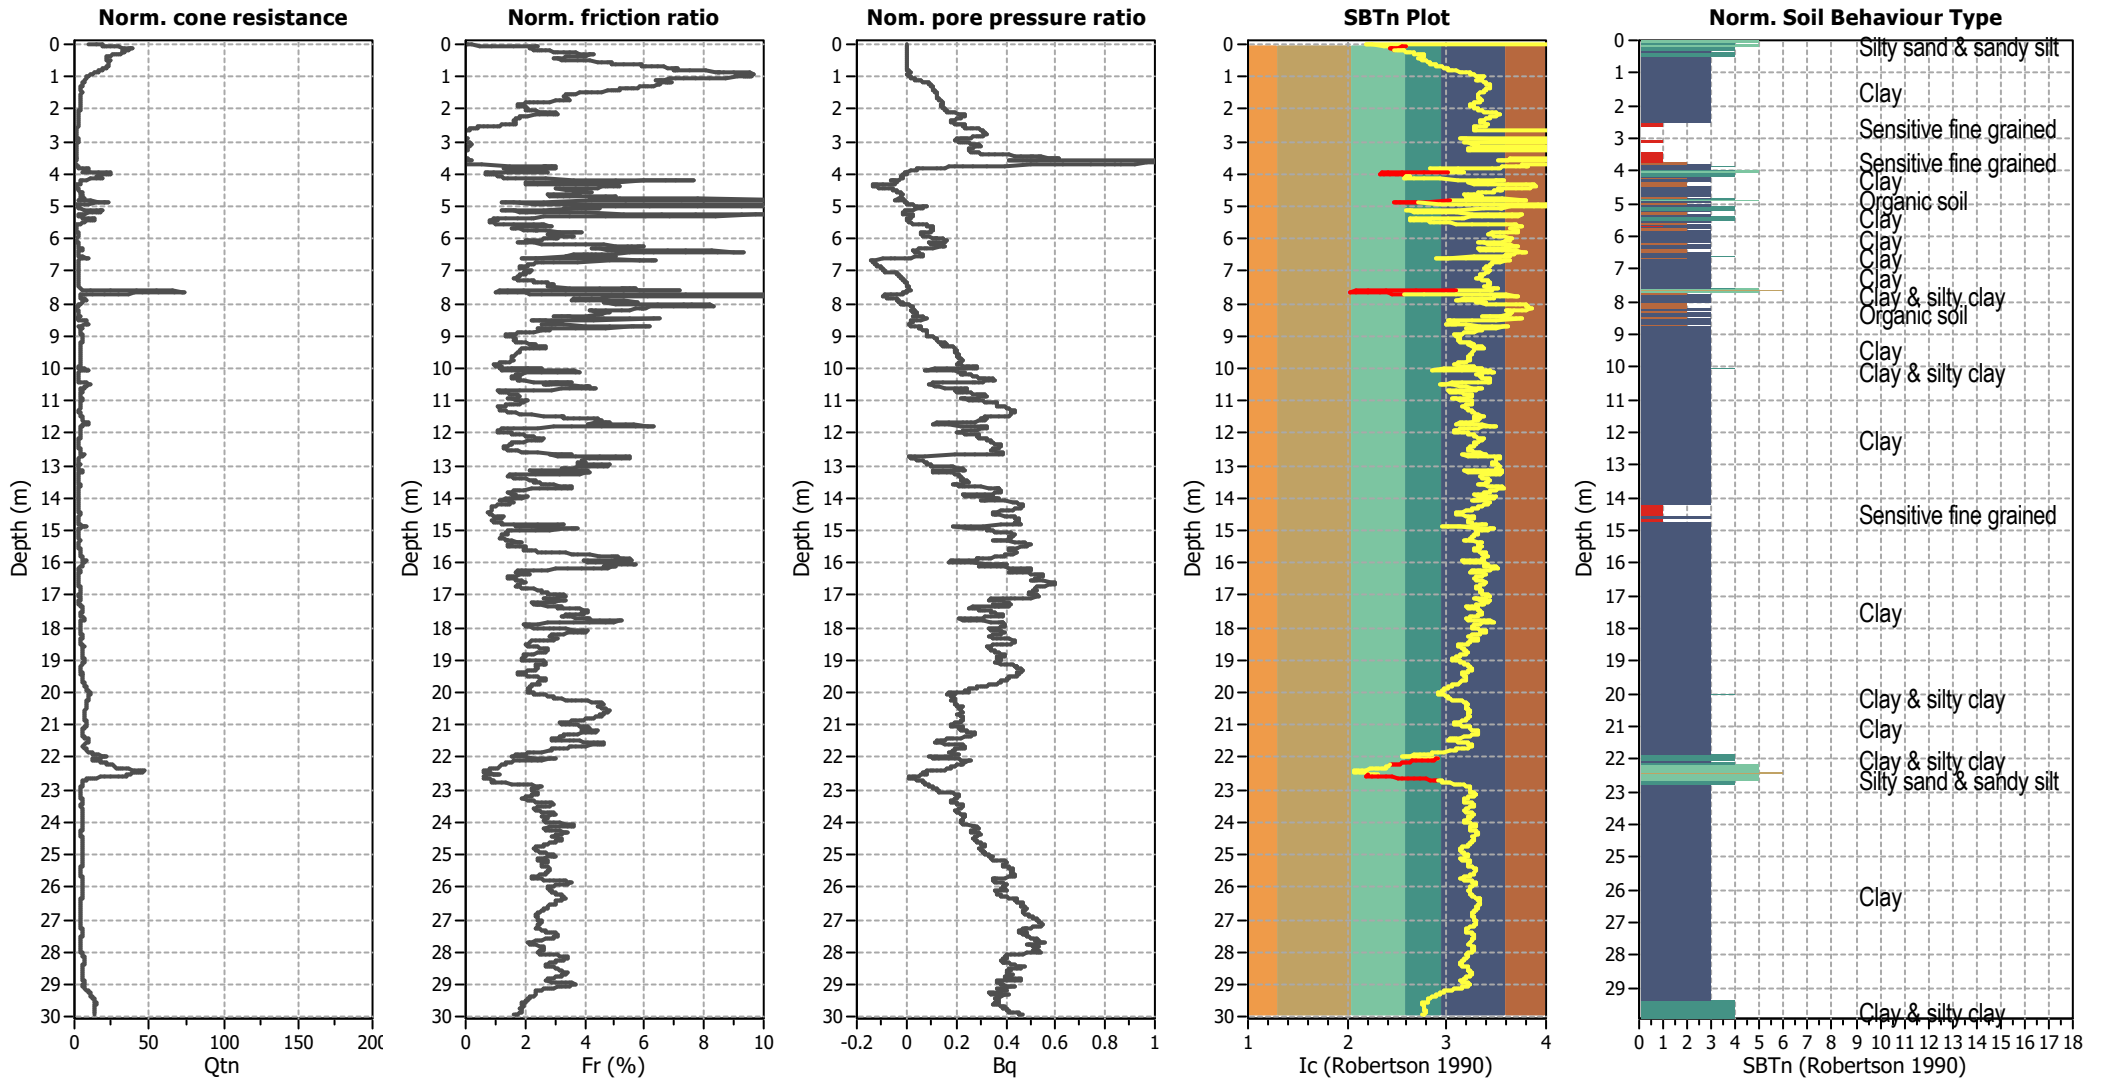


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

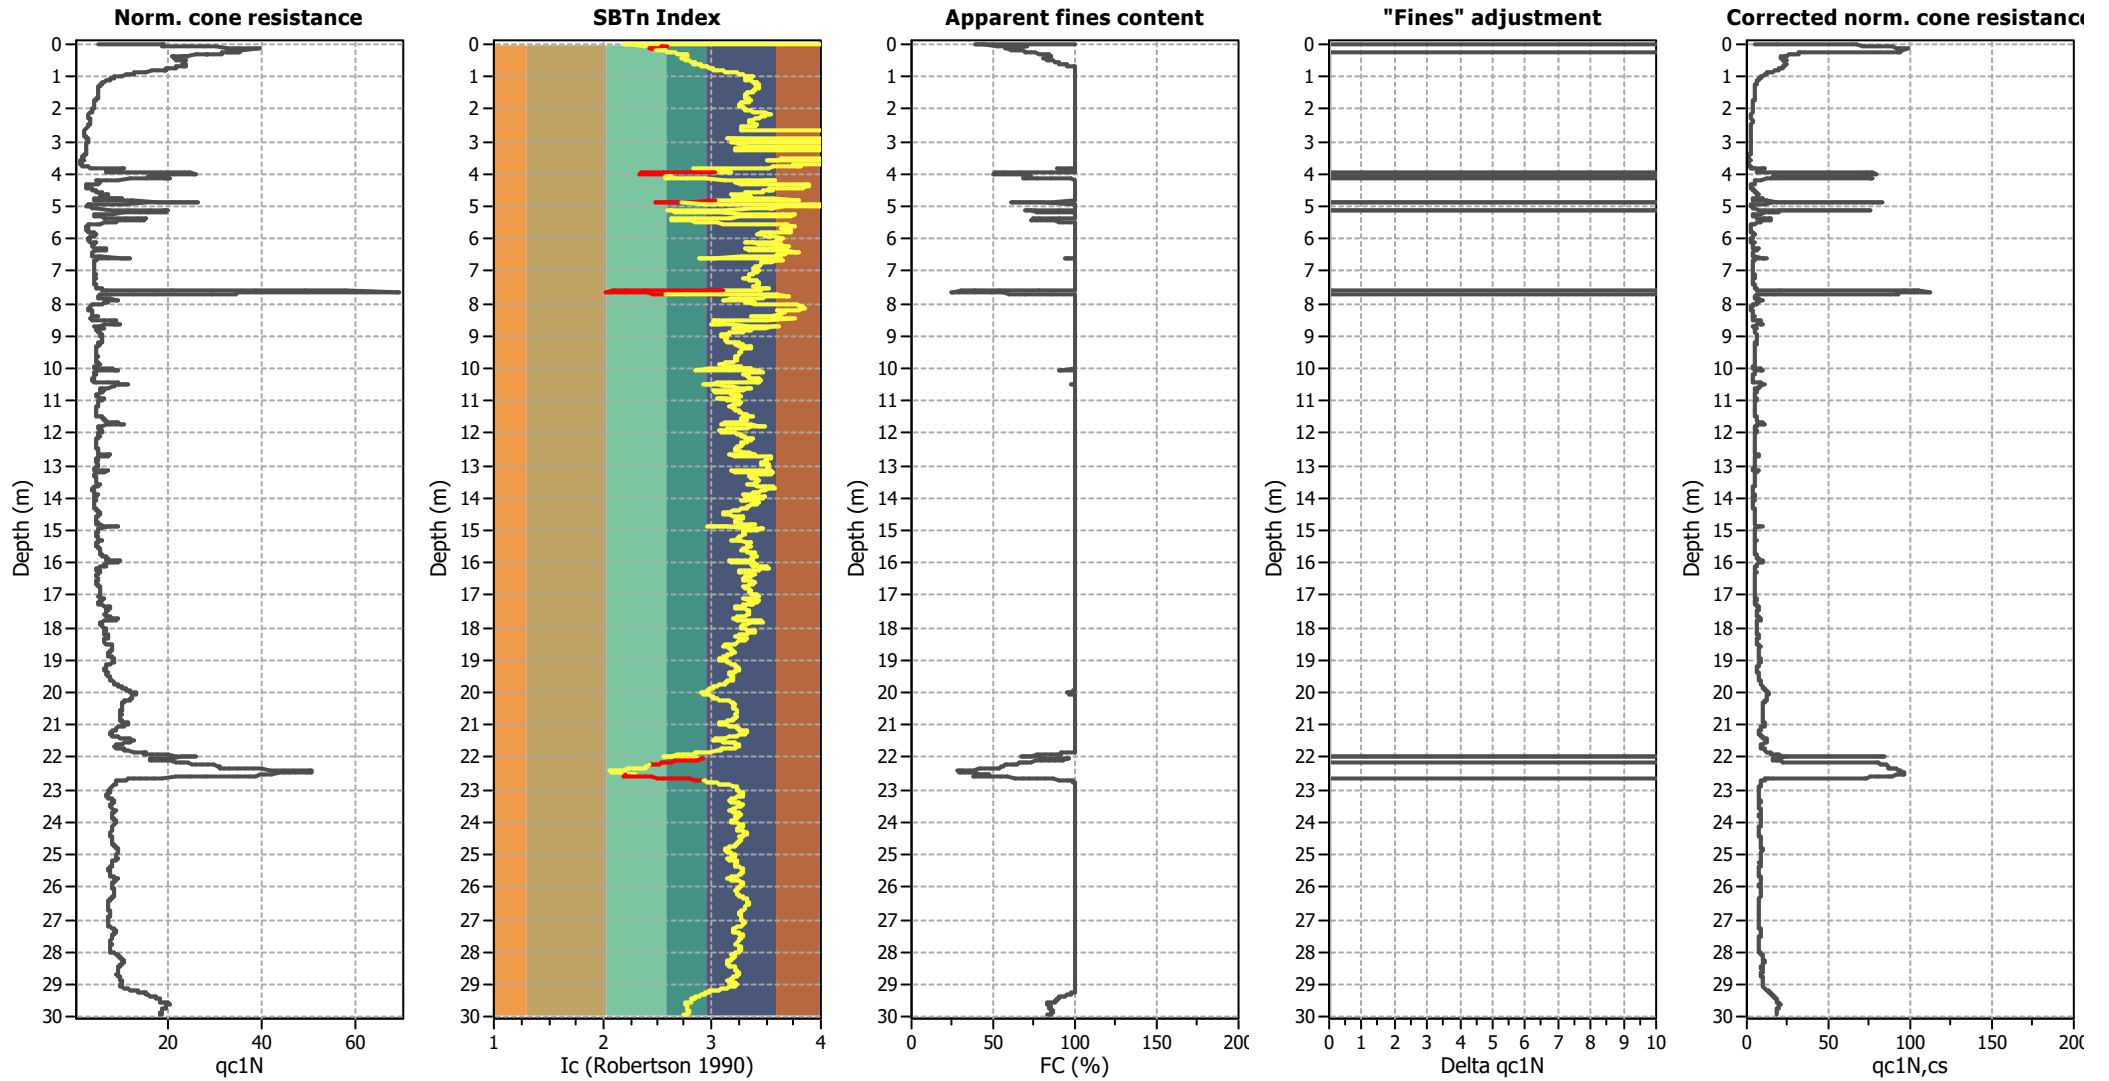

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

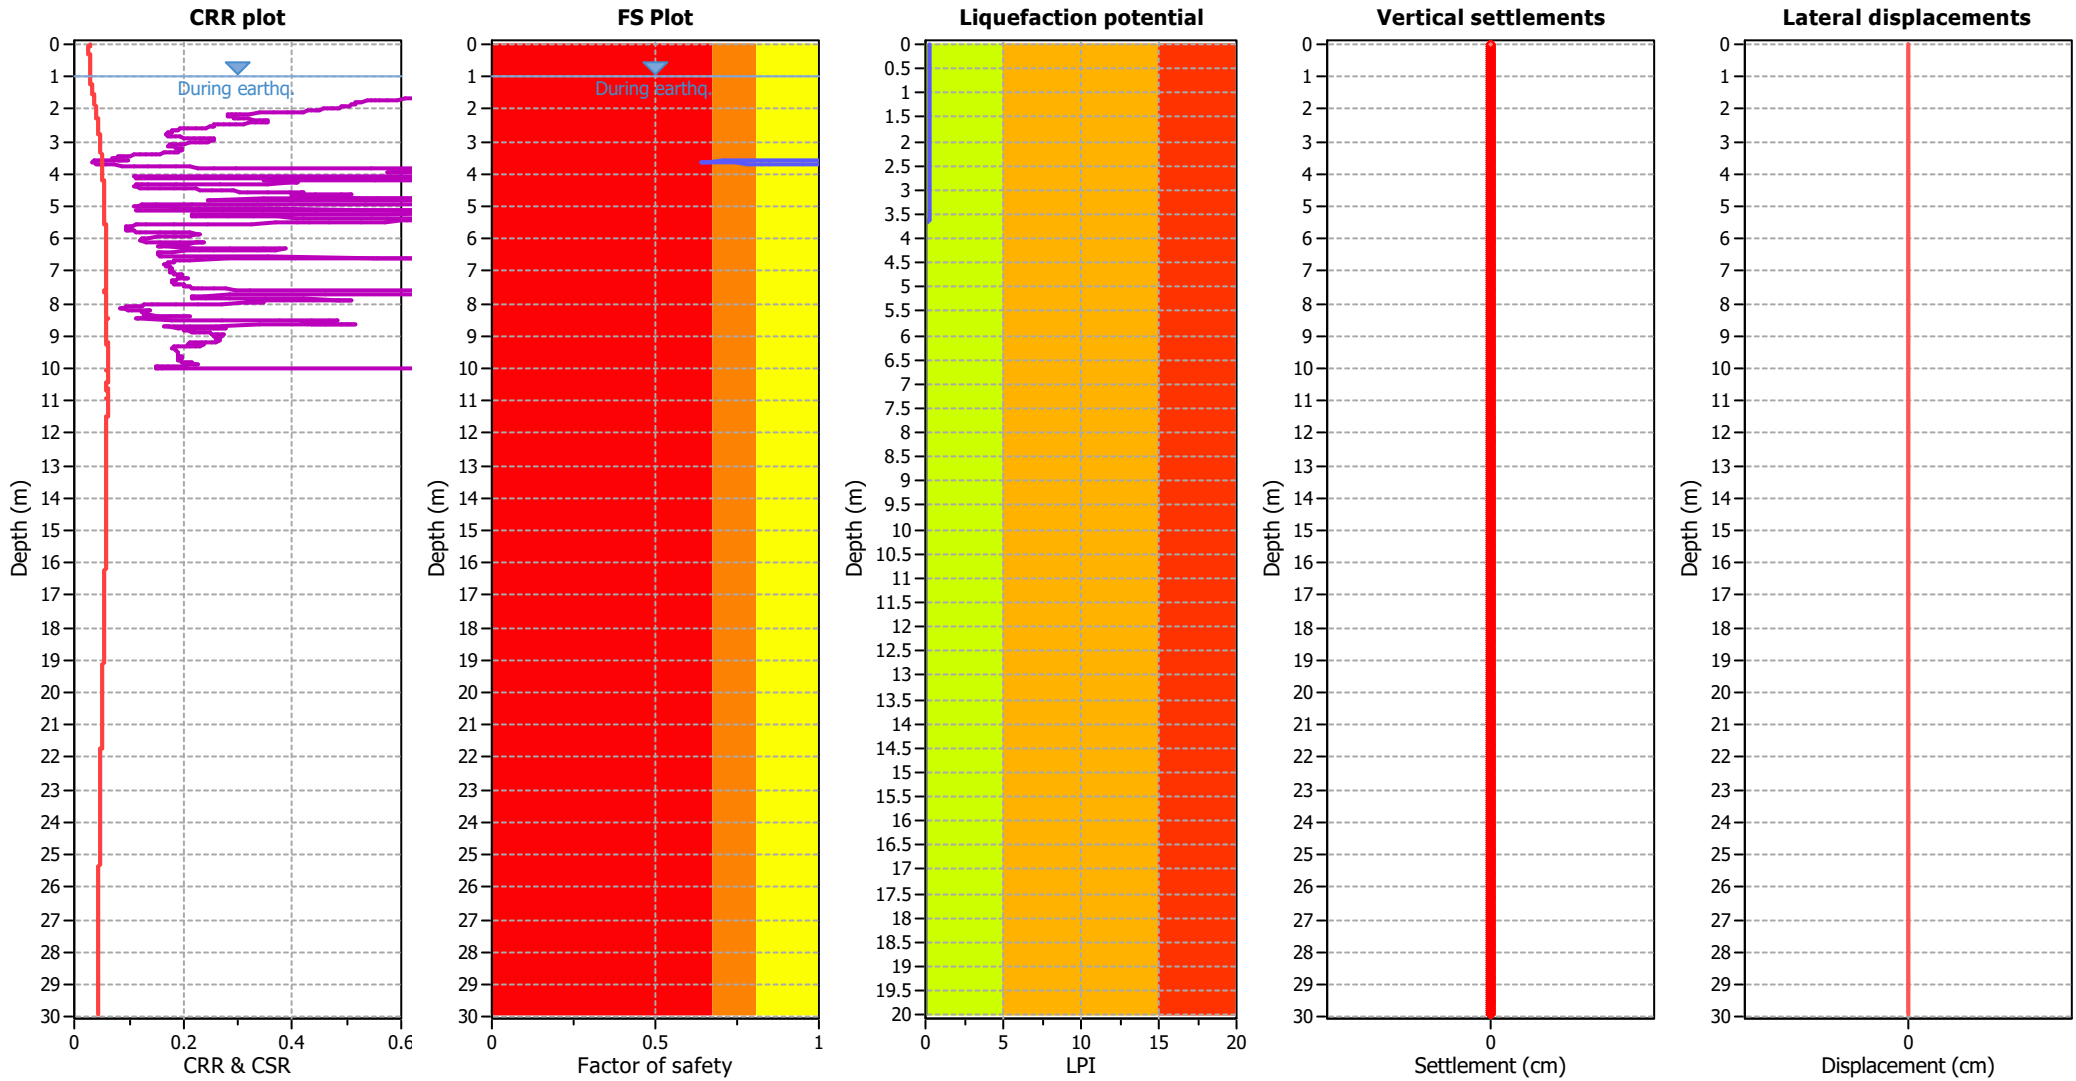

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

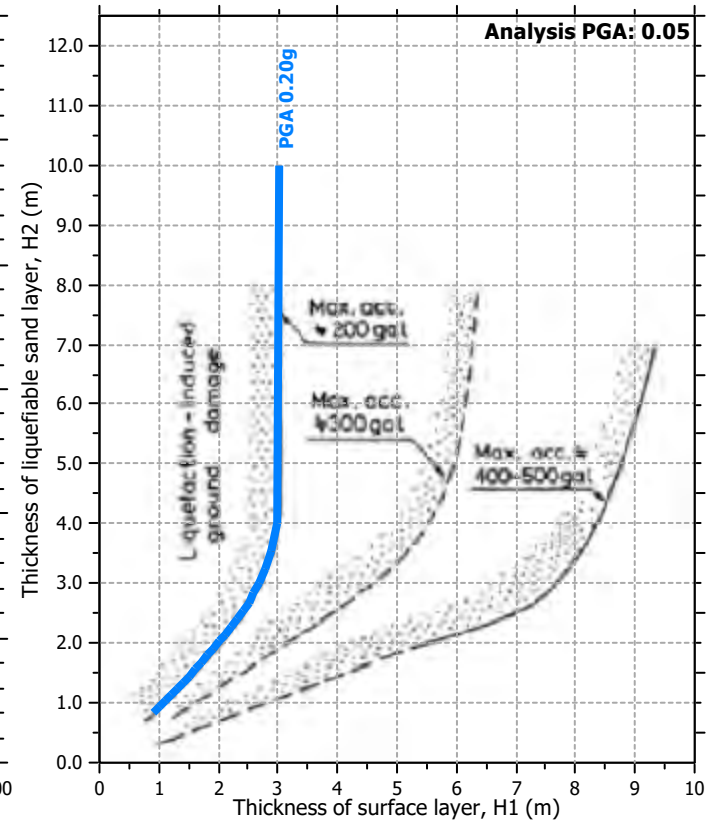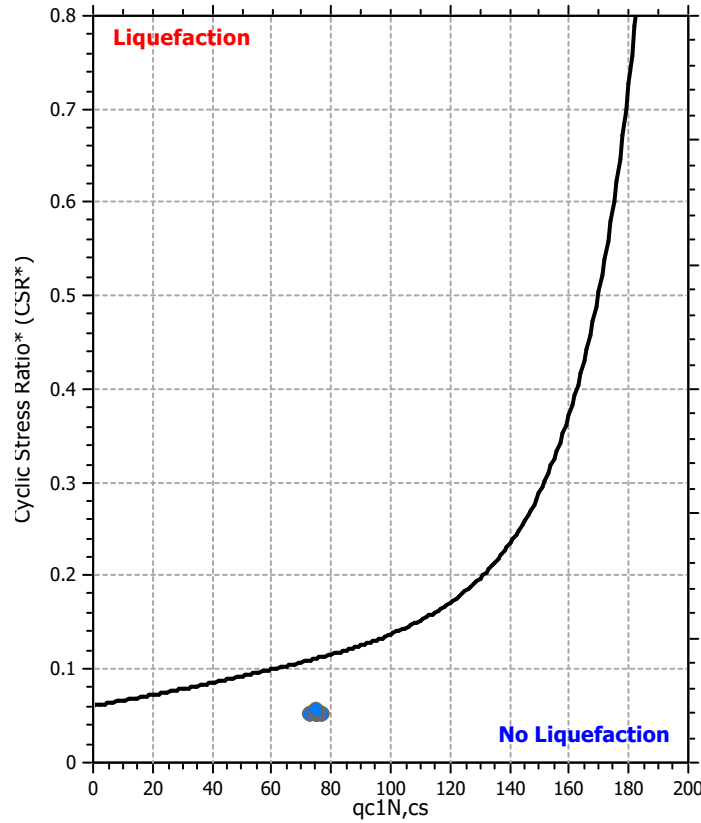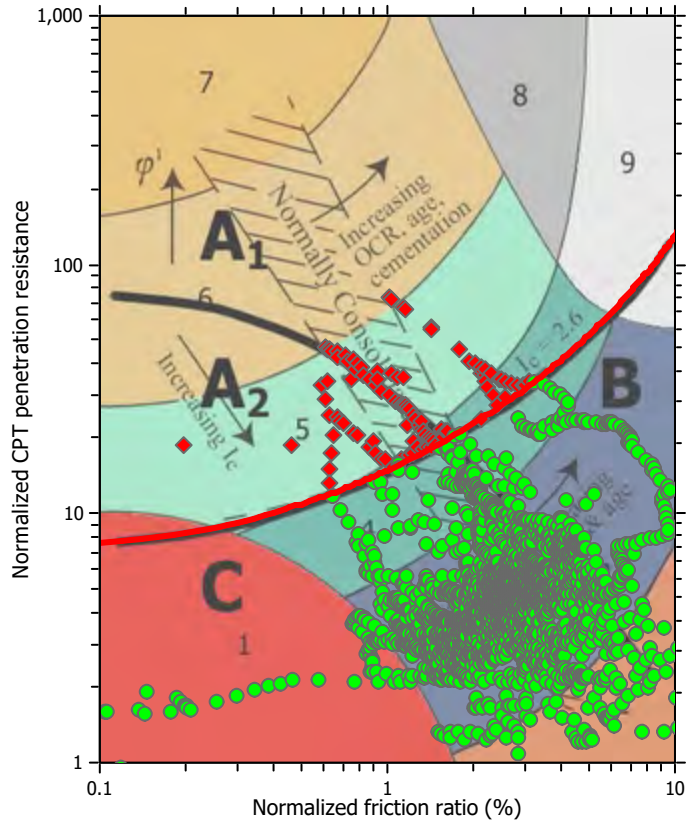

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

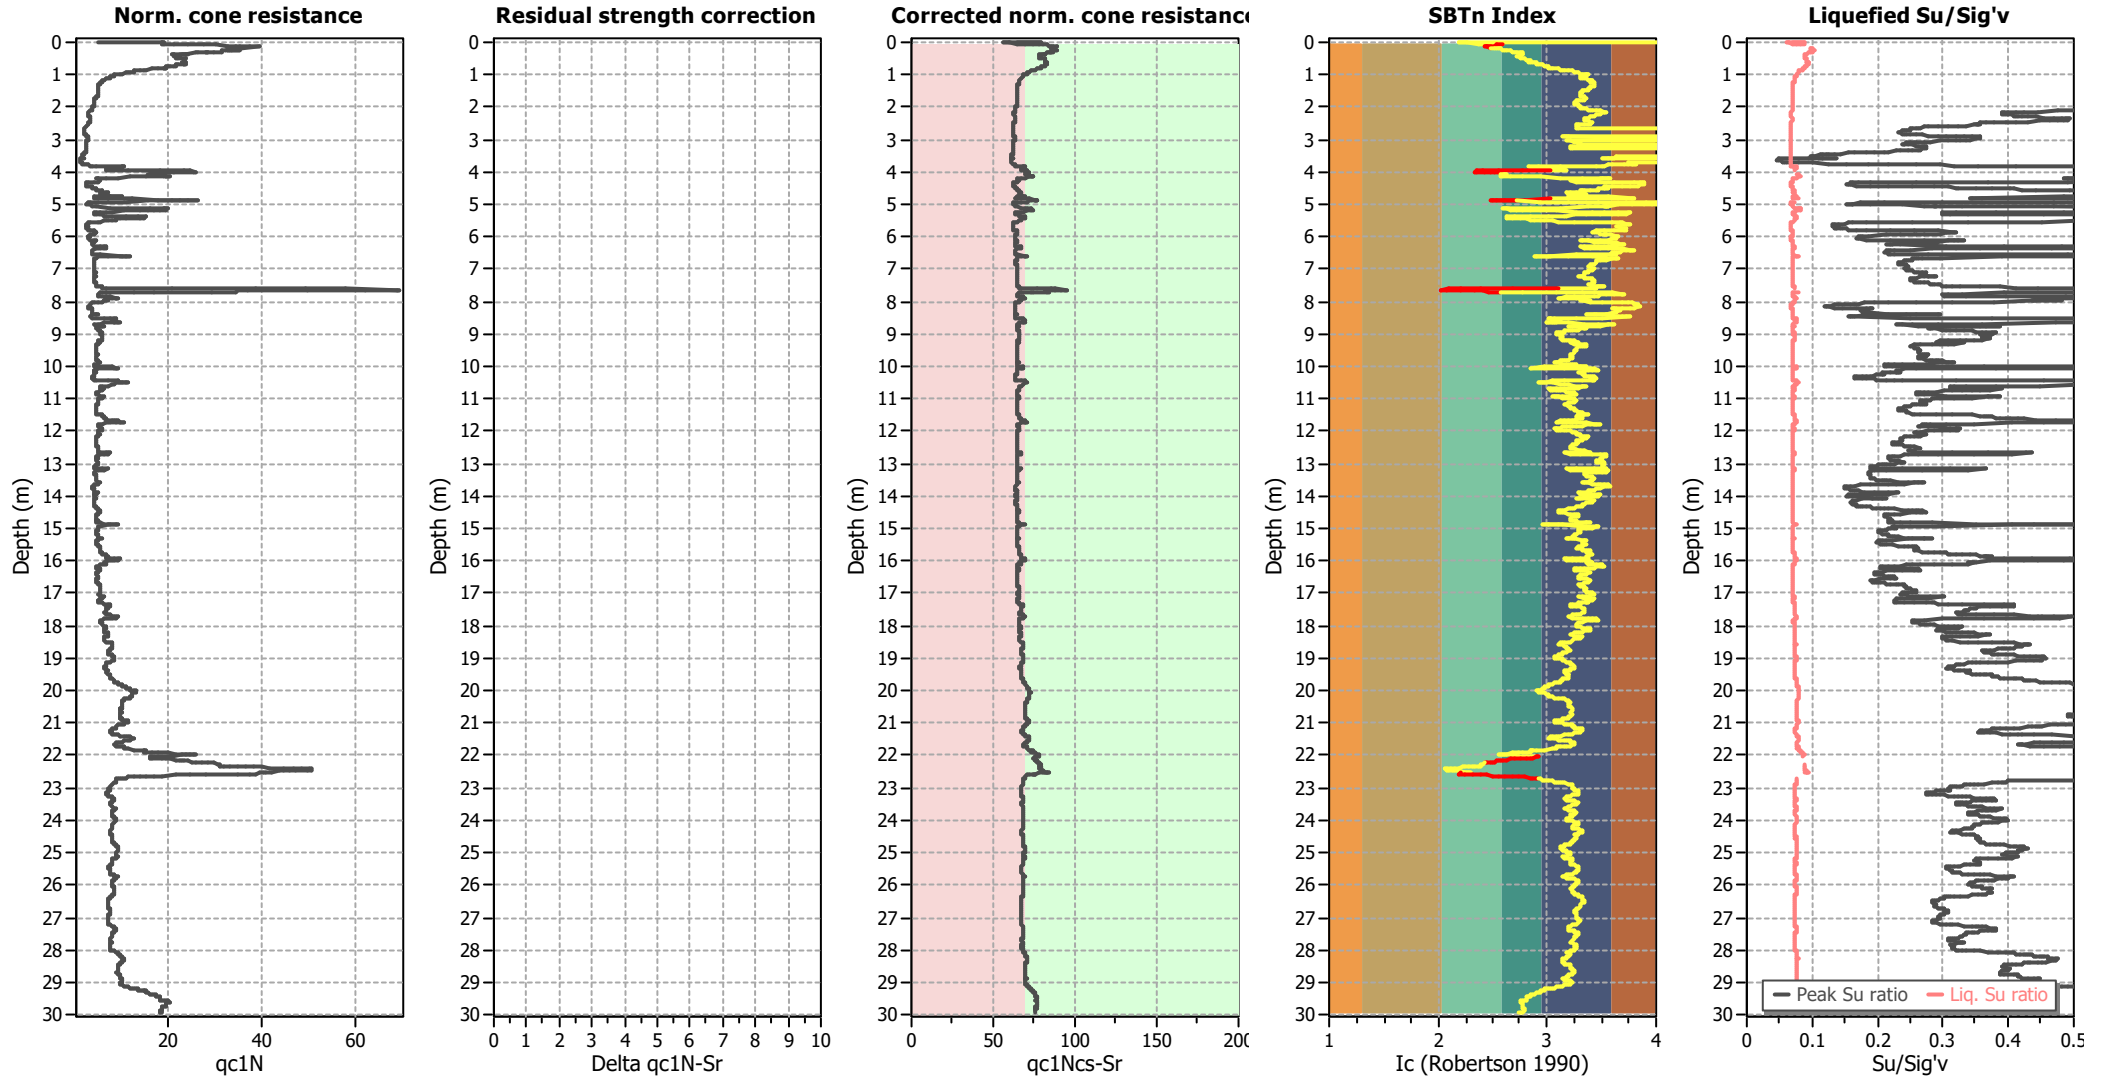

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

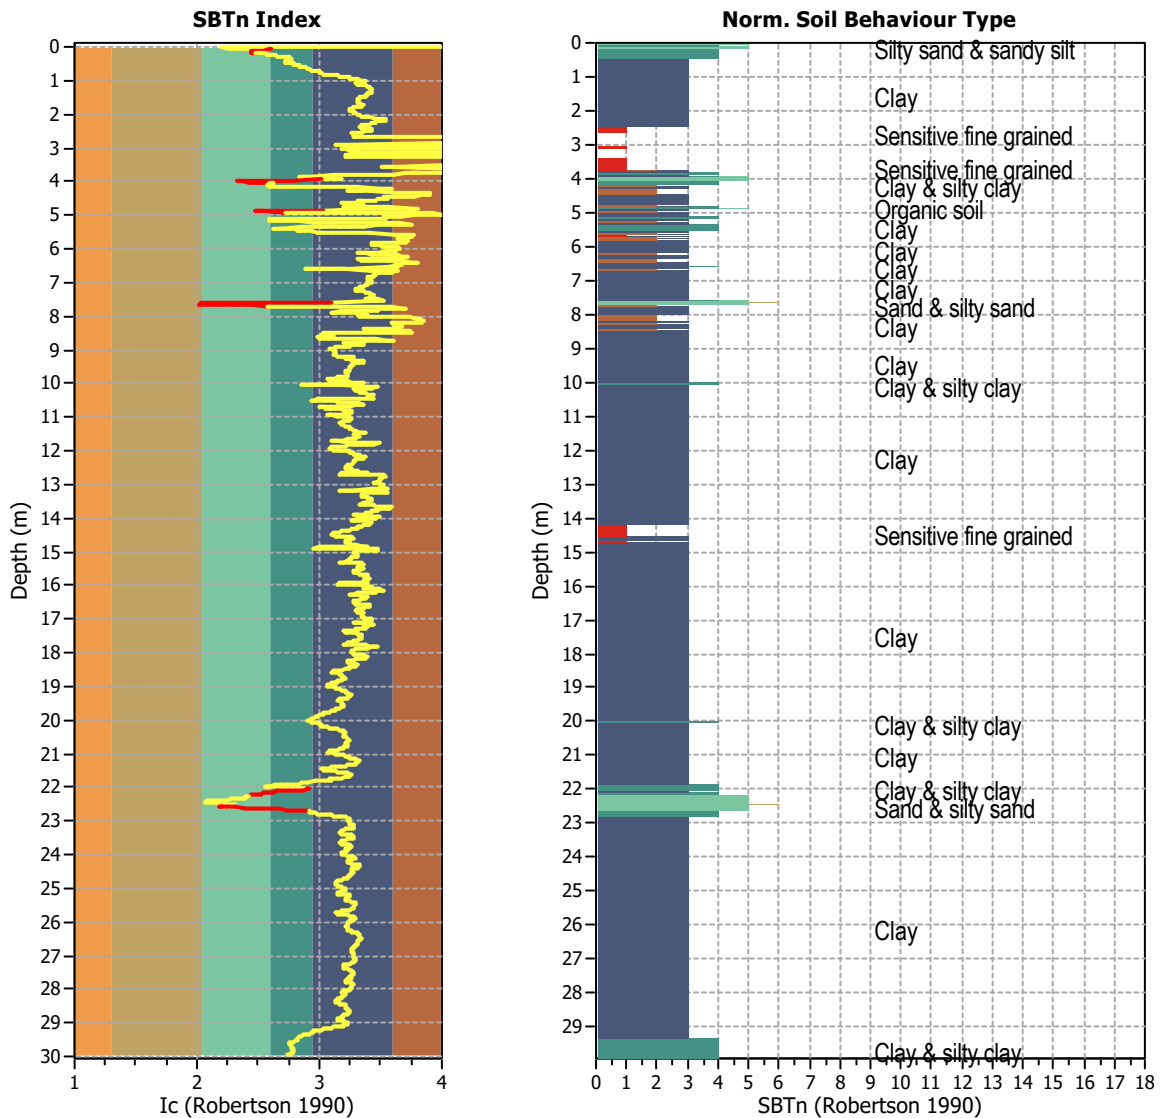


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2994
 Total points excluded: 84
 Exclusion percentage: 2.81%
 Number of layers detected: 10


Estimation of post-earthquake settlements

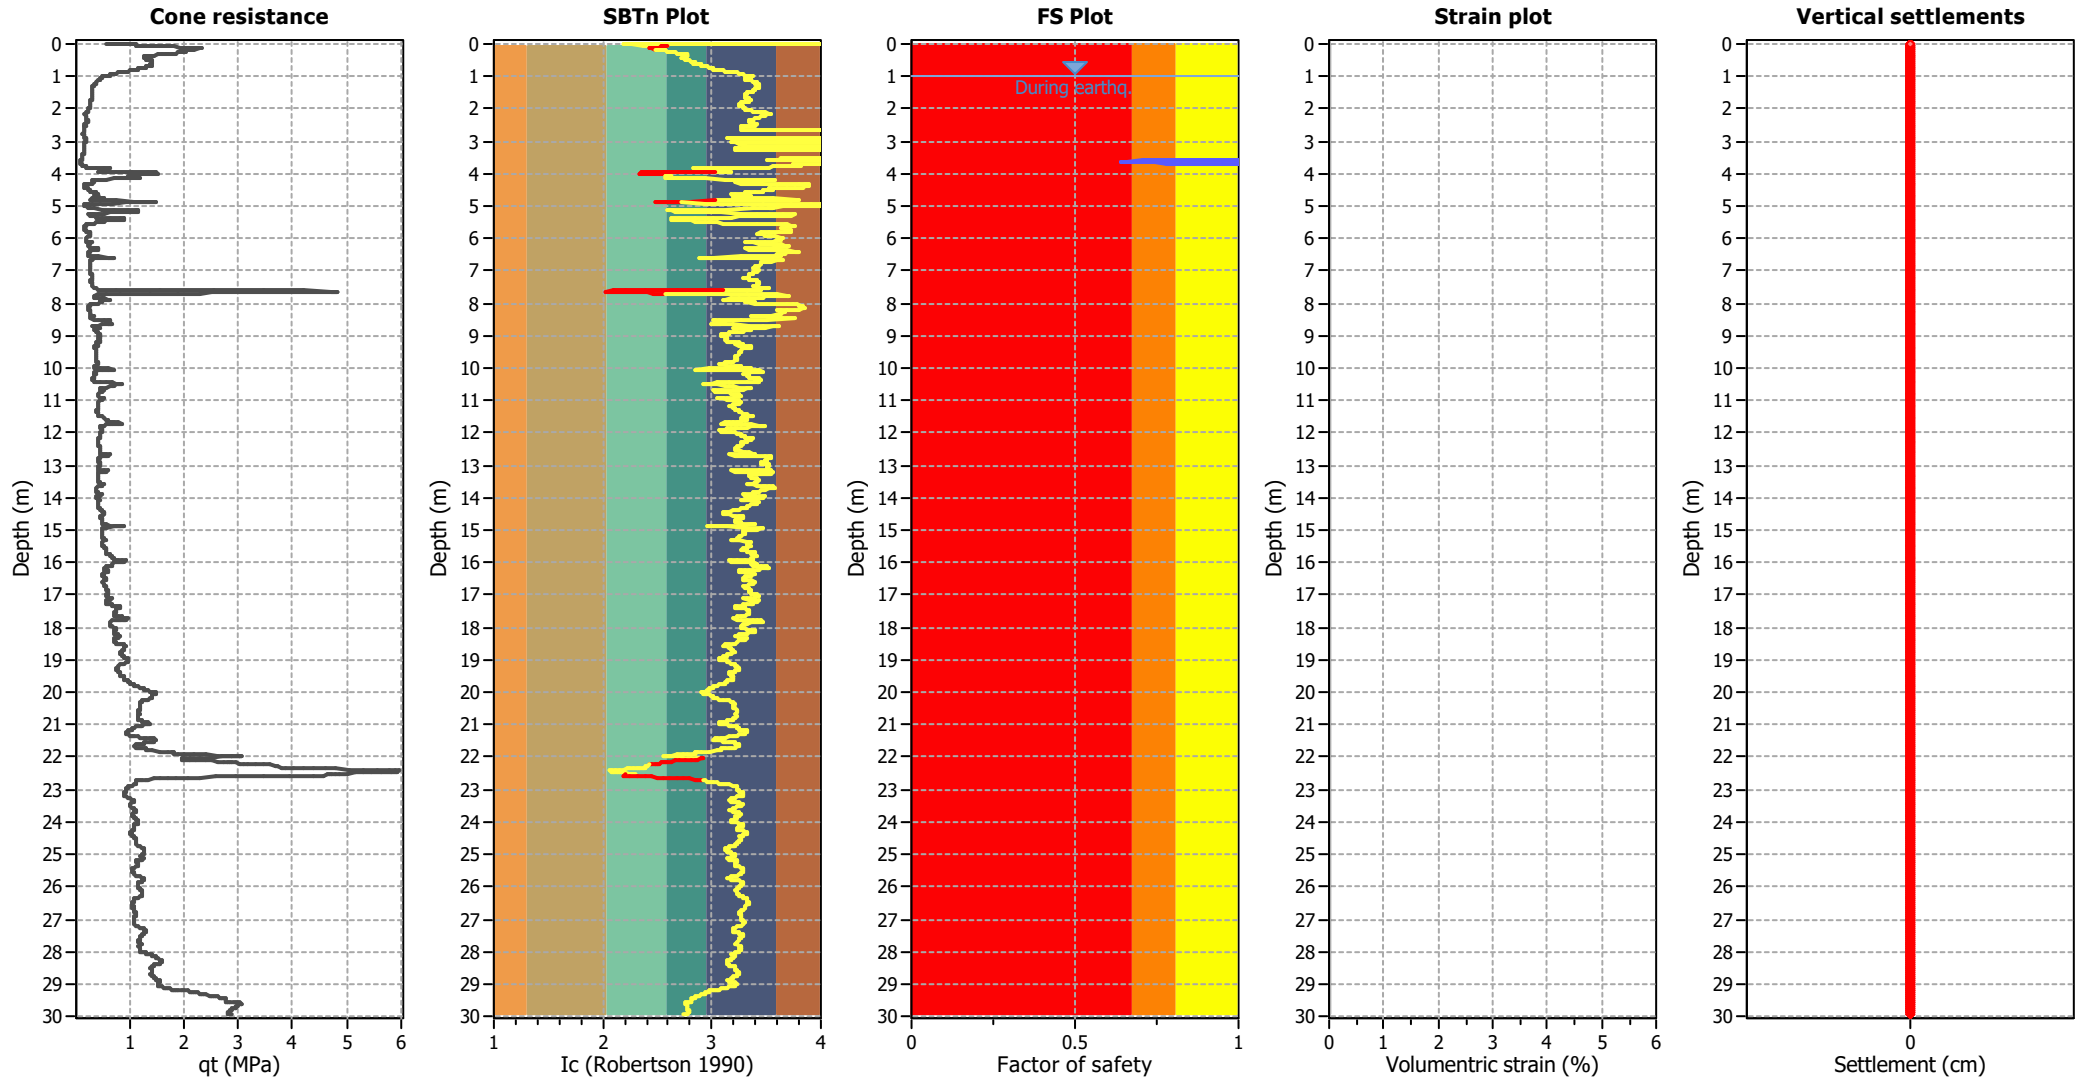

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

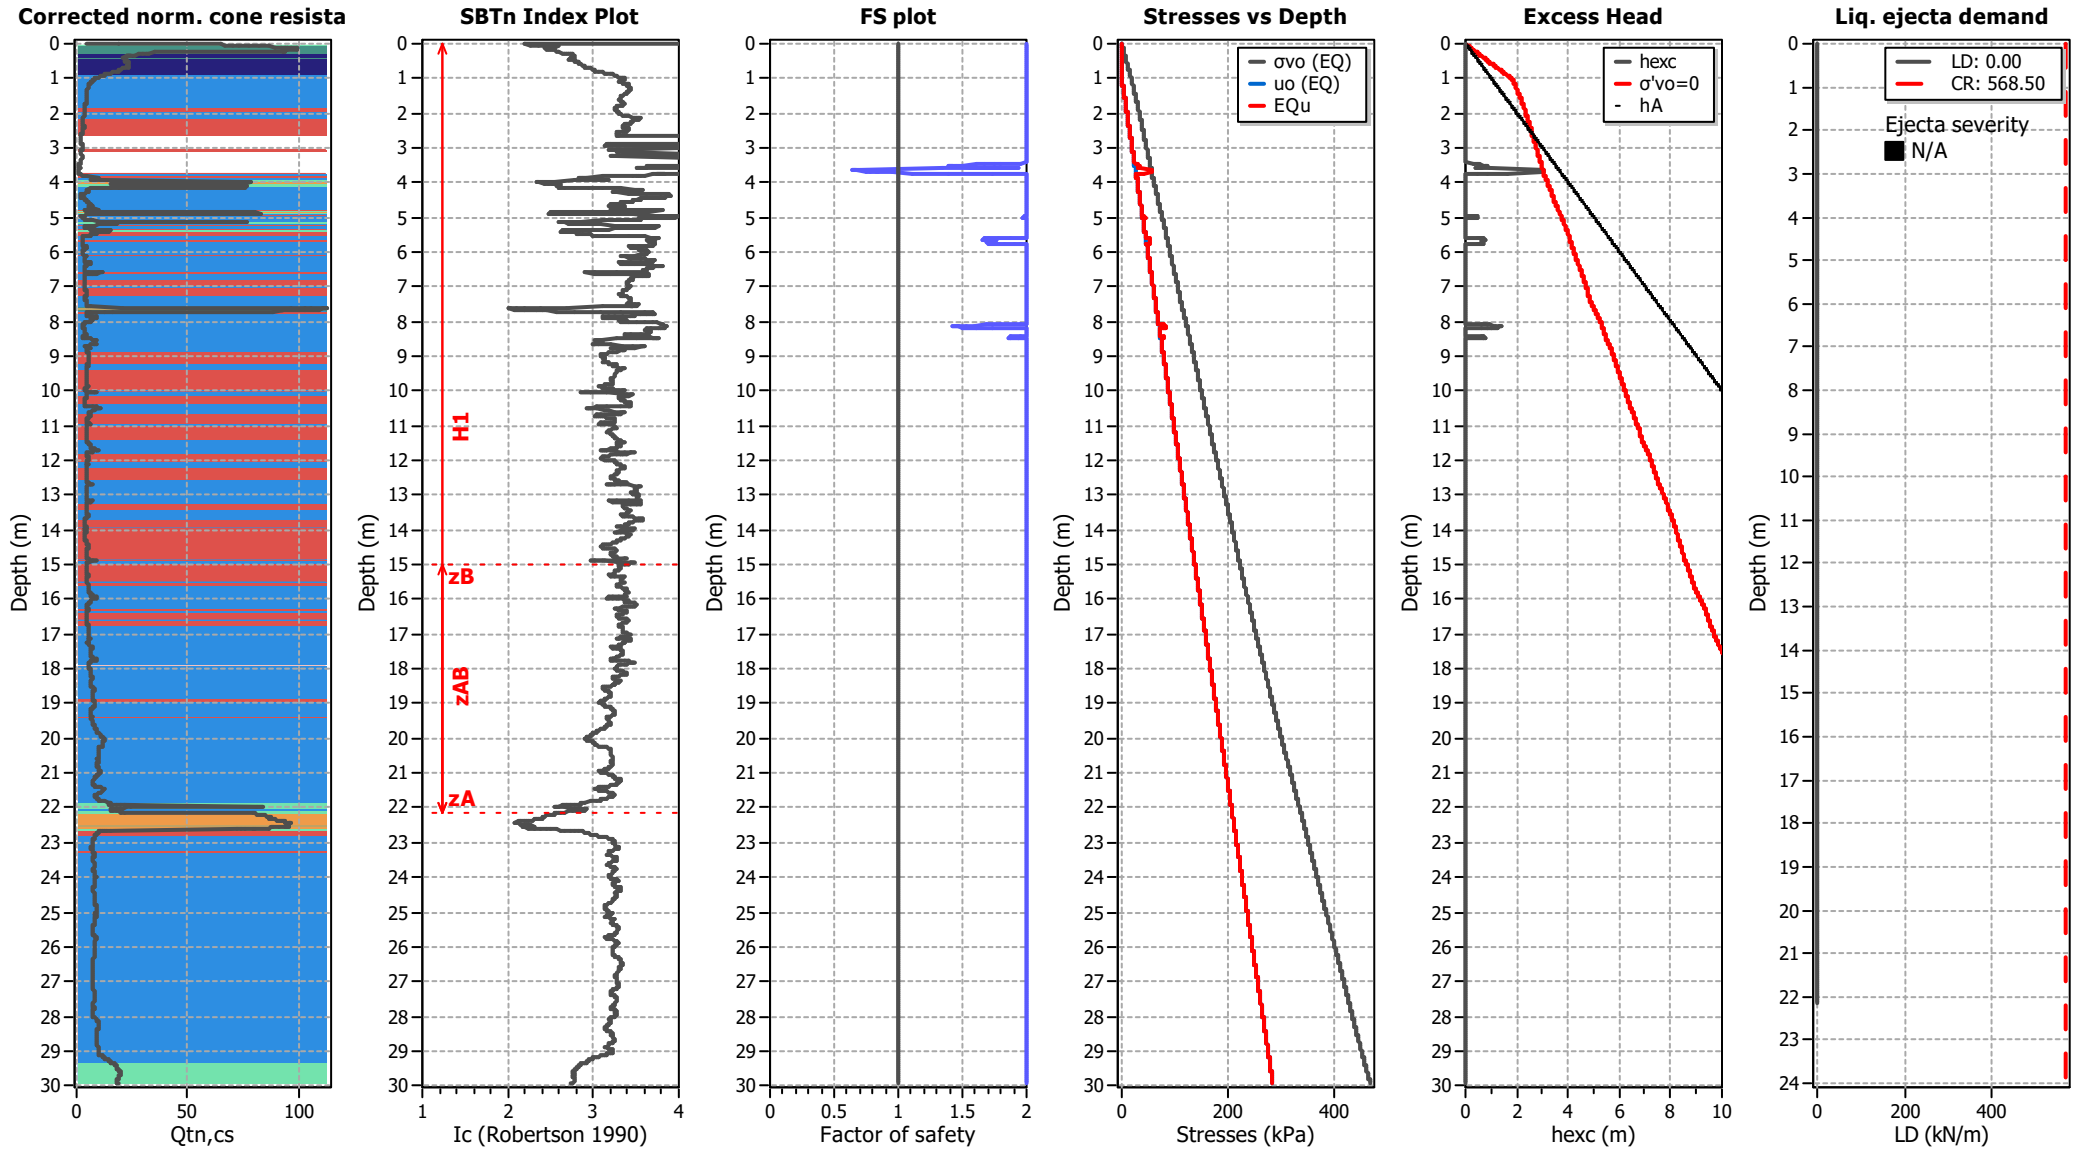

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT14

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	IC cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

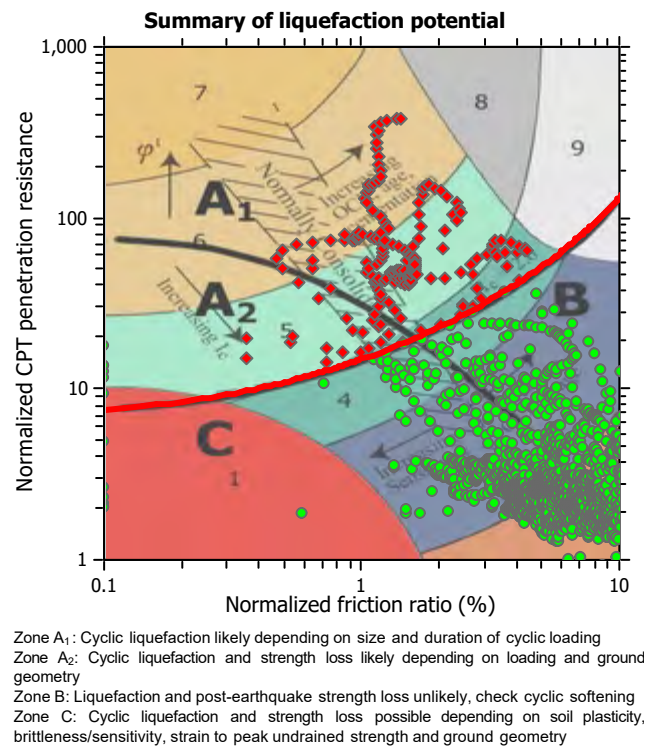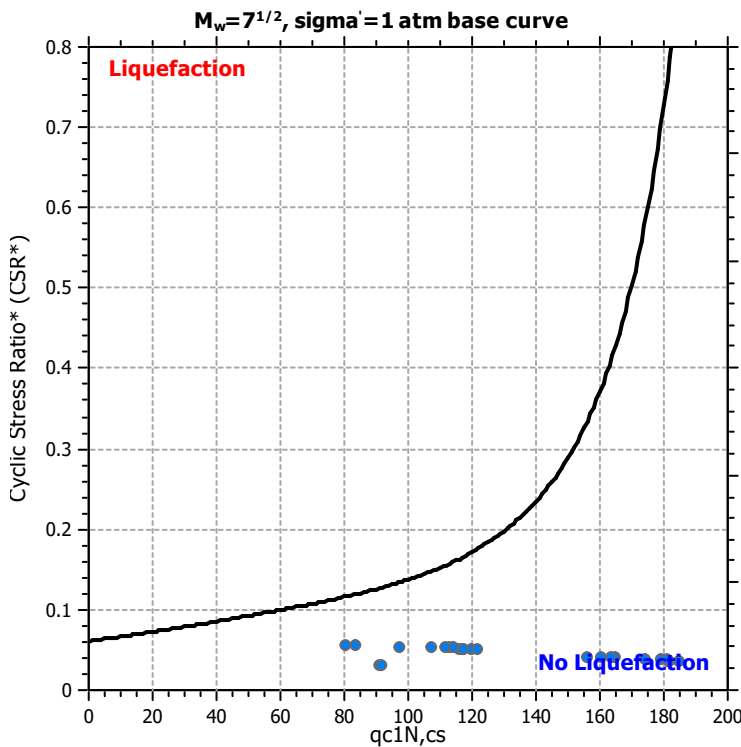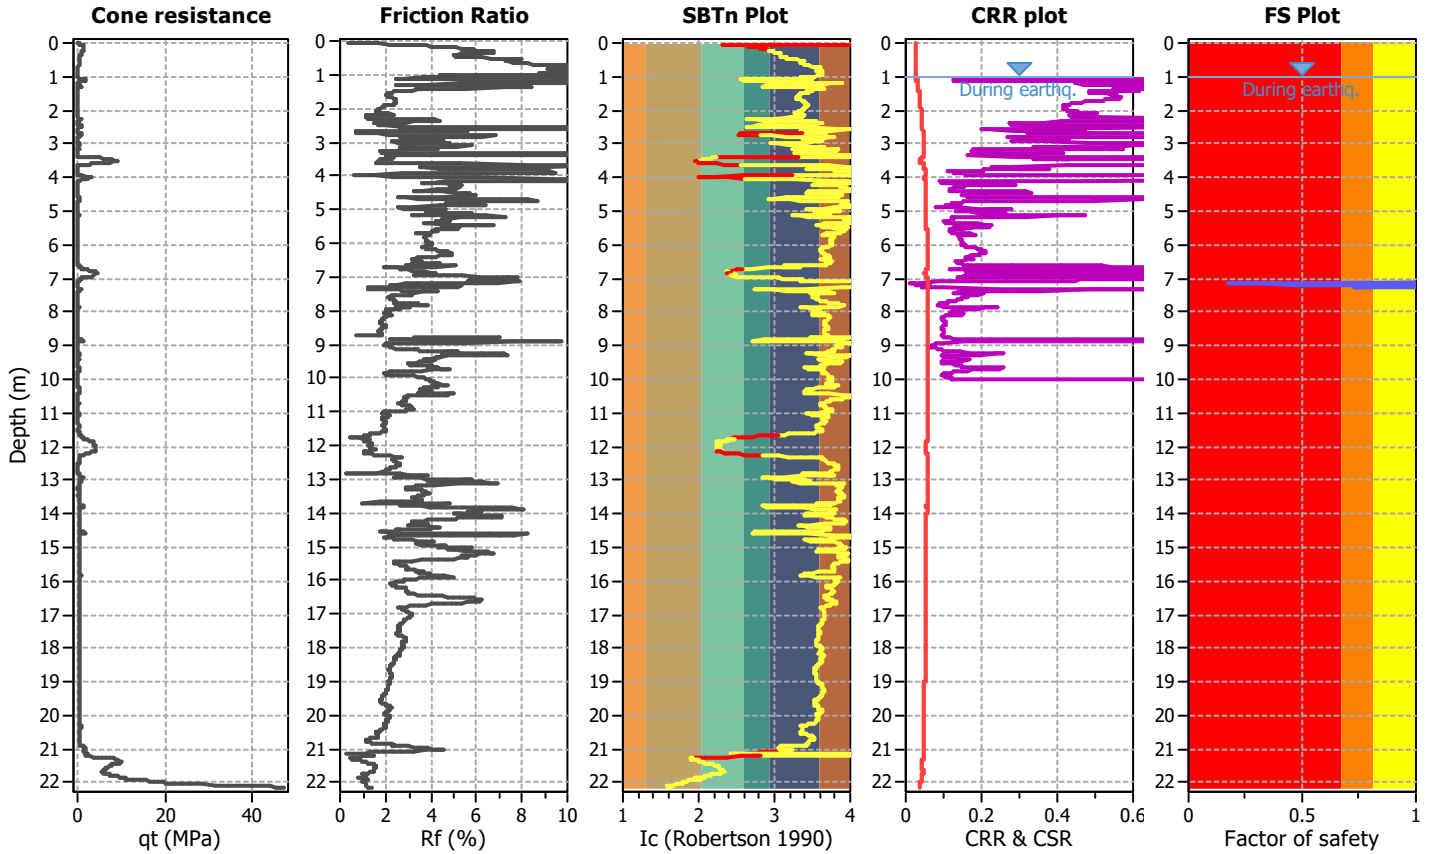

CPT basic interpretation plots

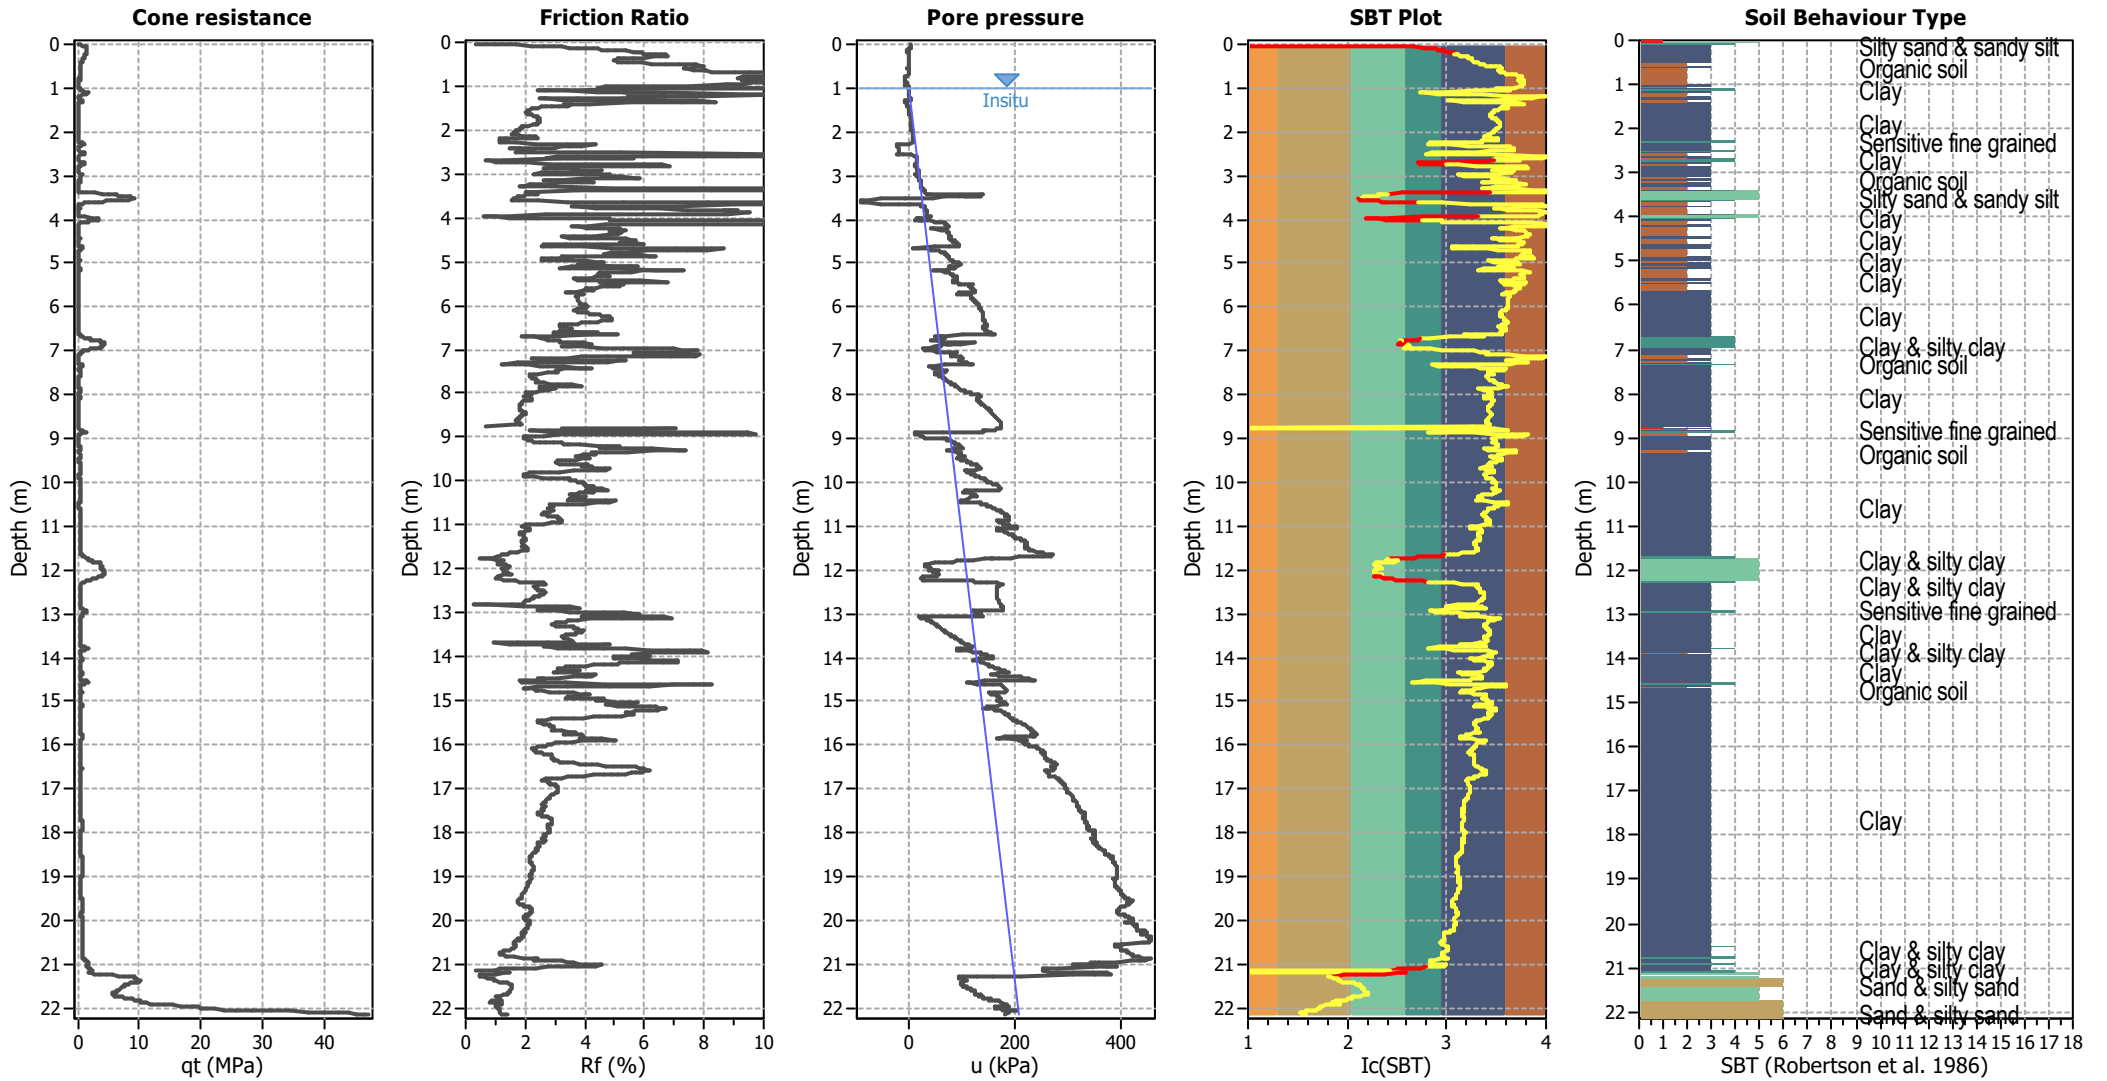


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

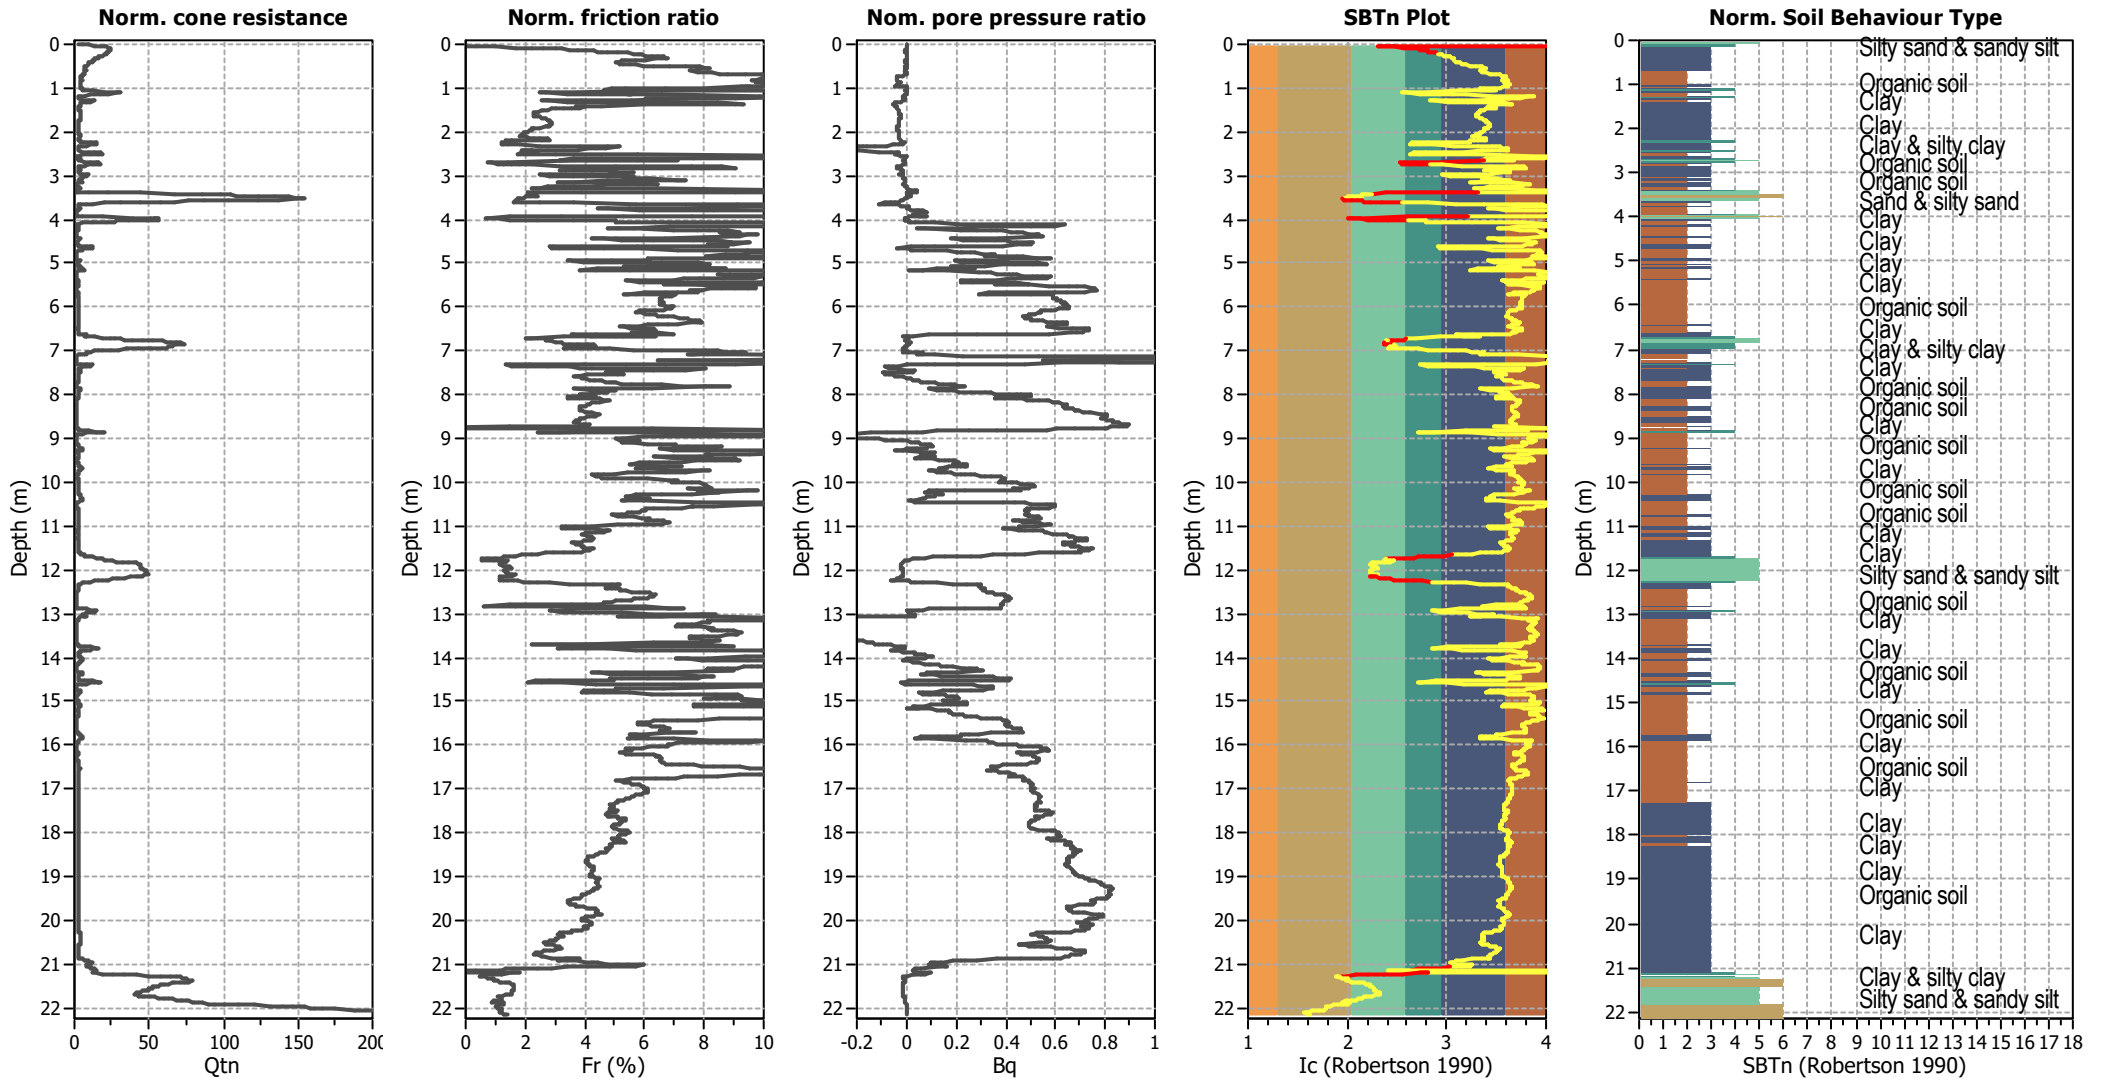


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

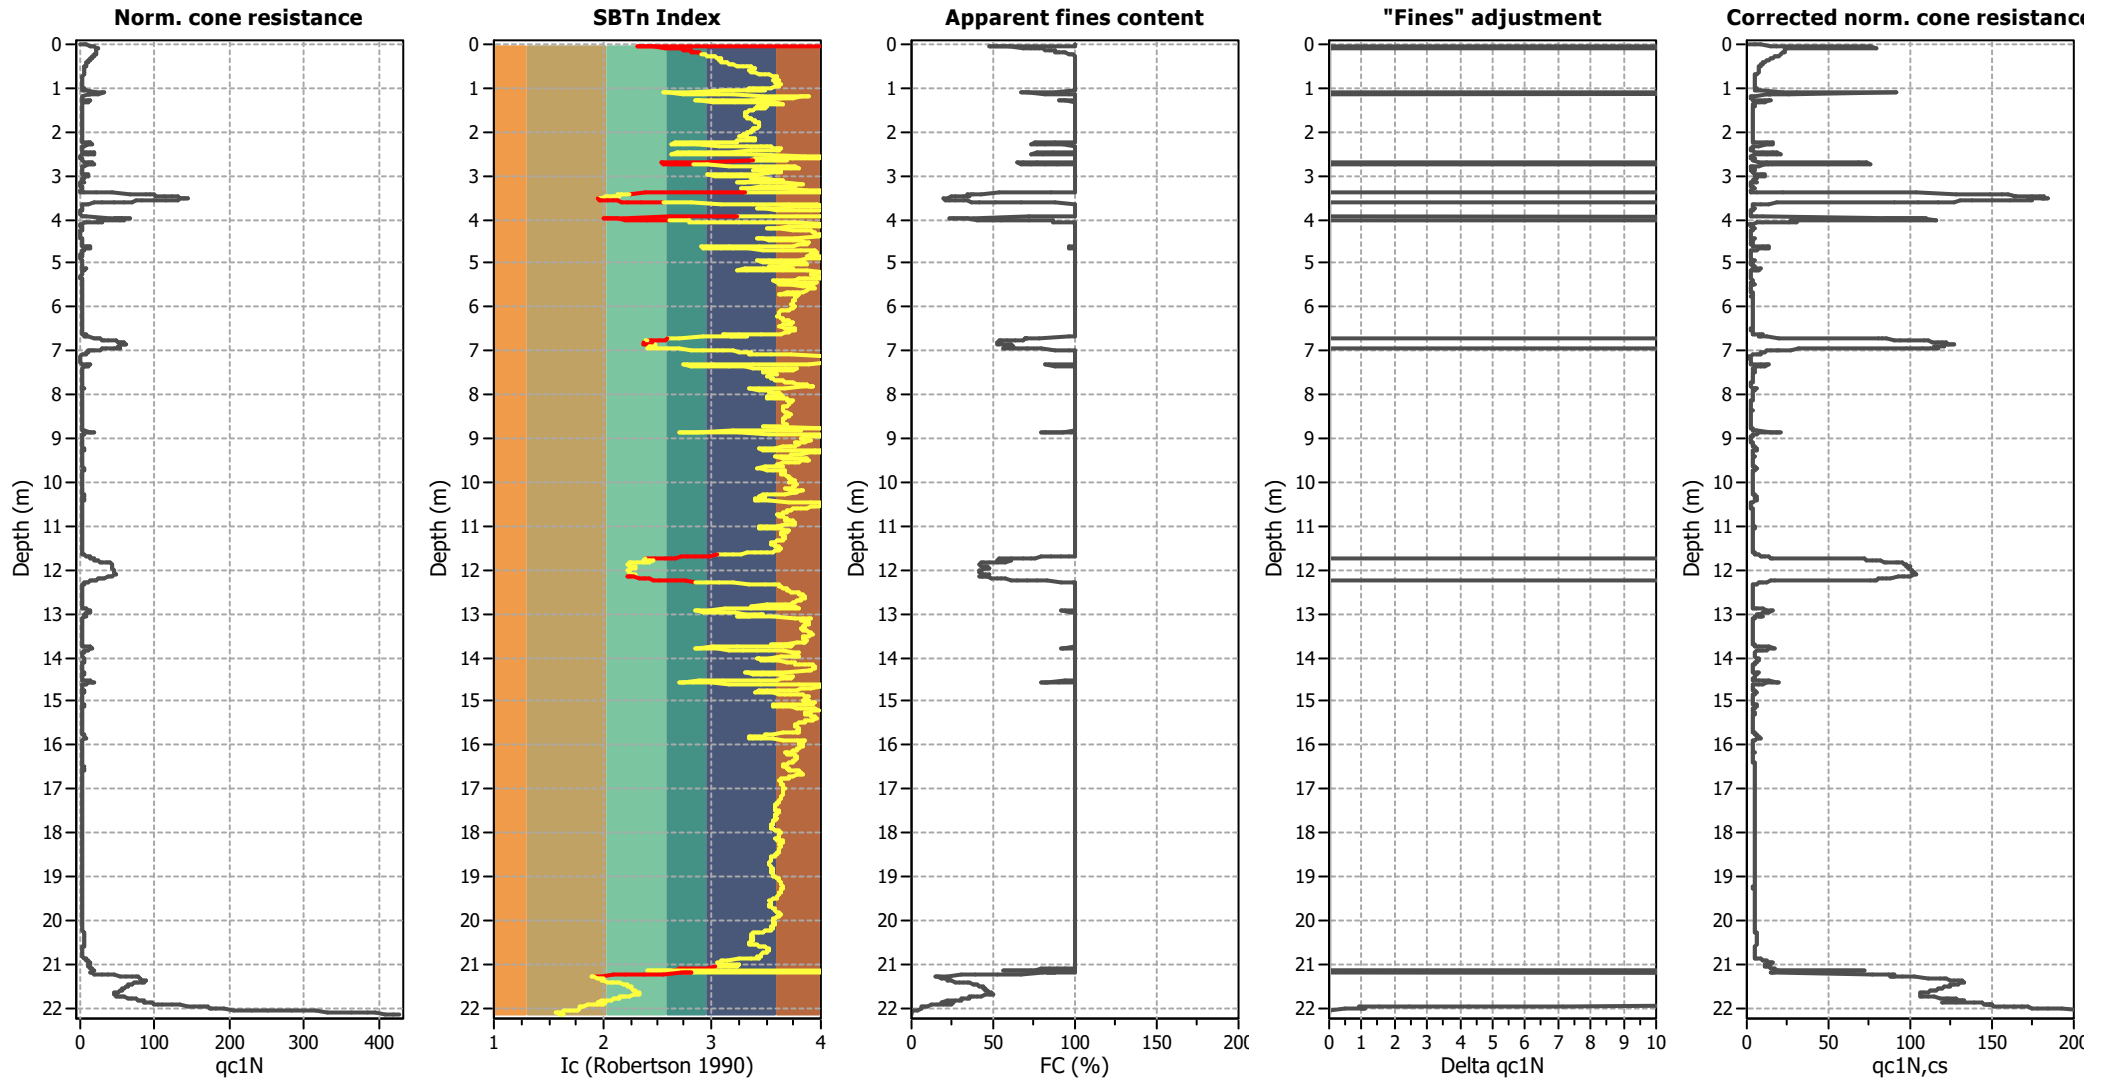

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

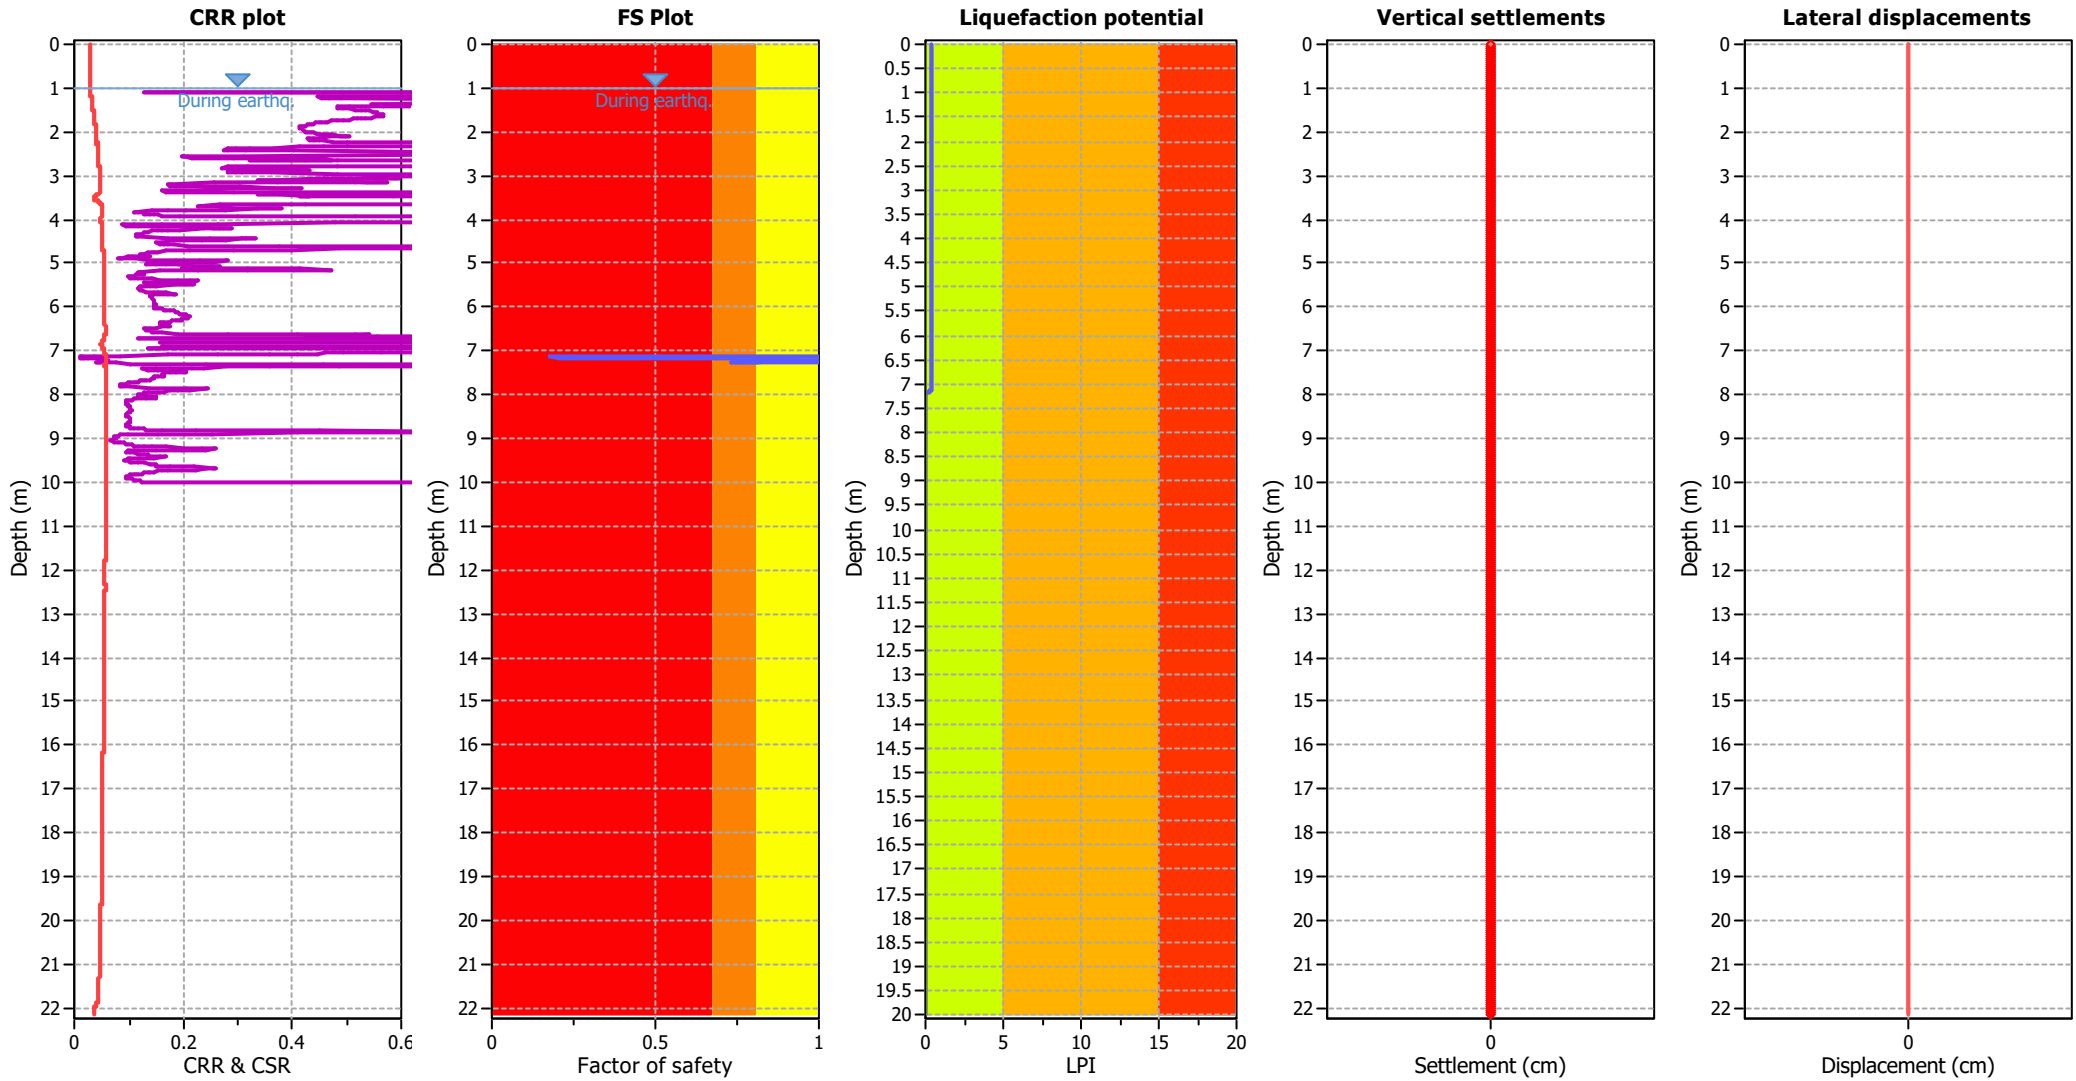

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

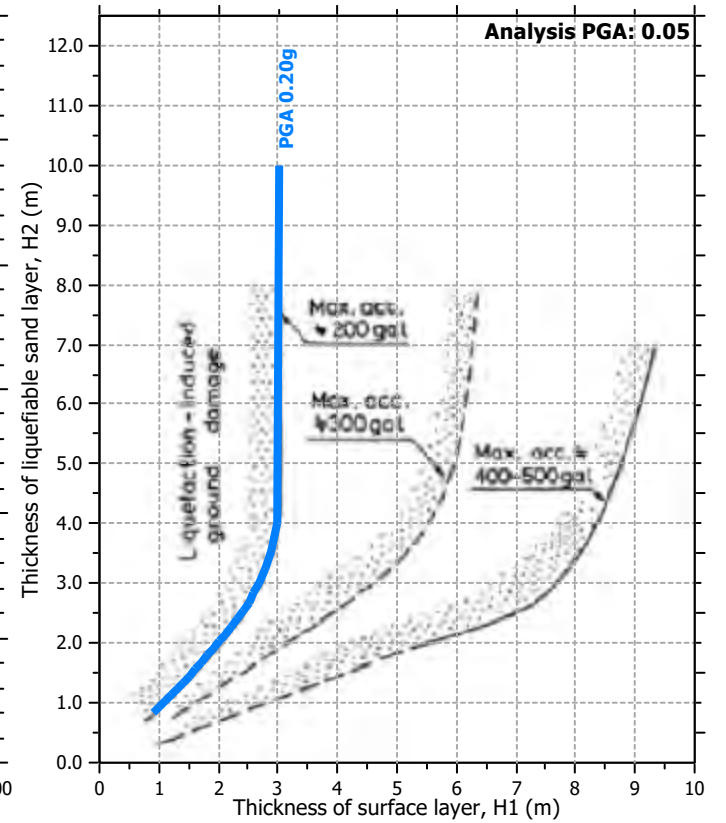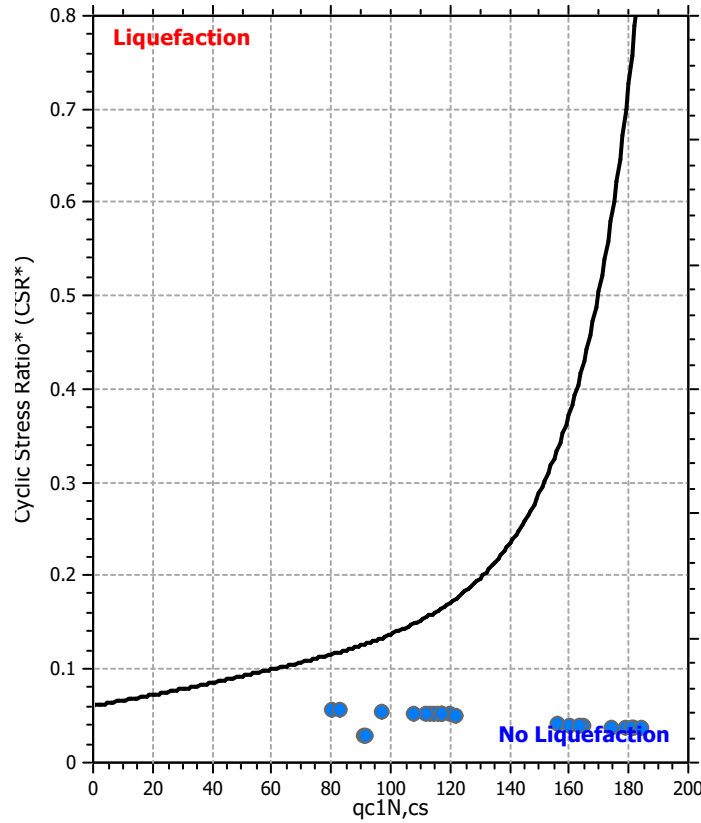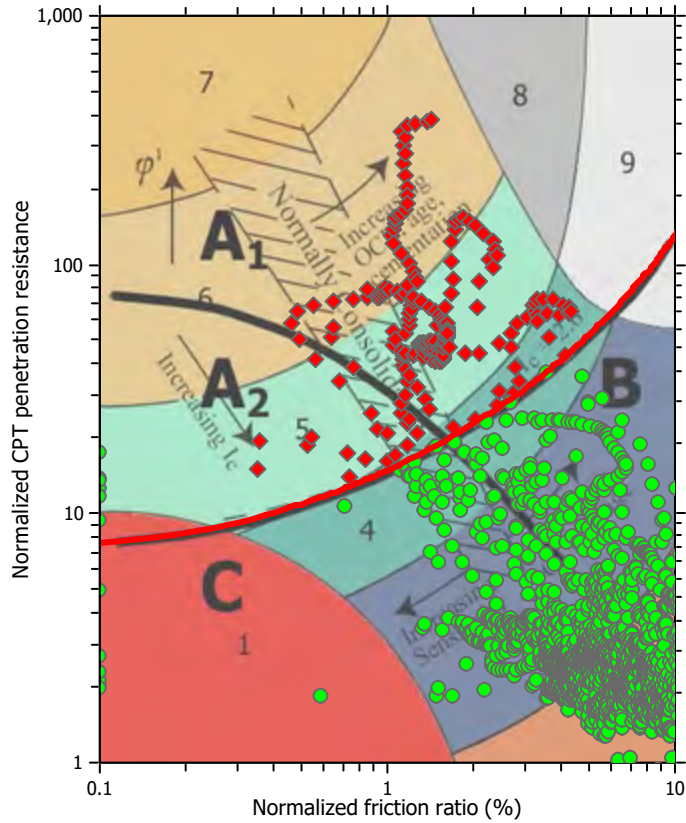

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

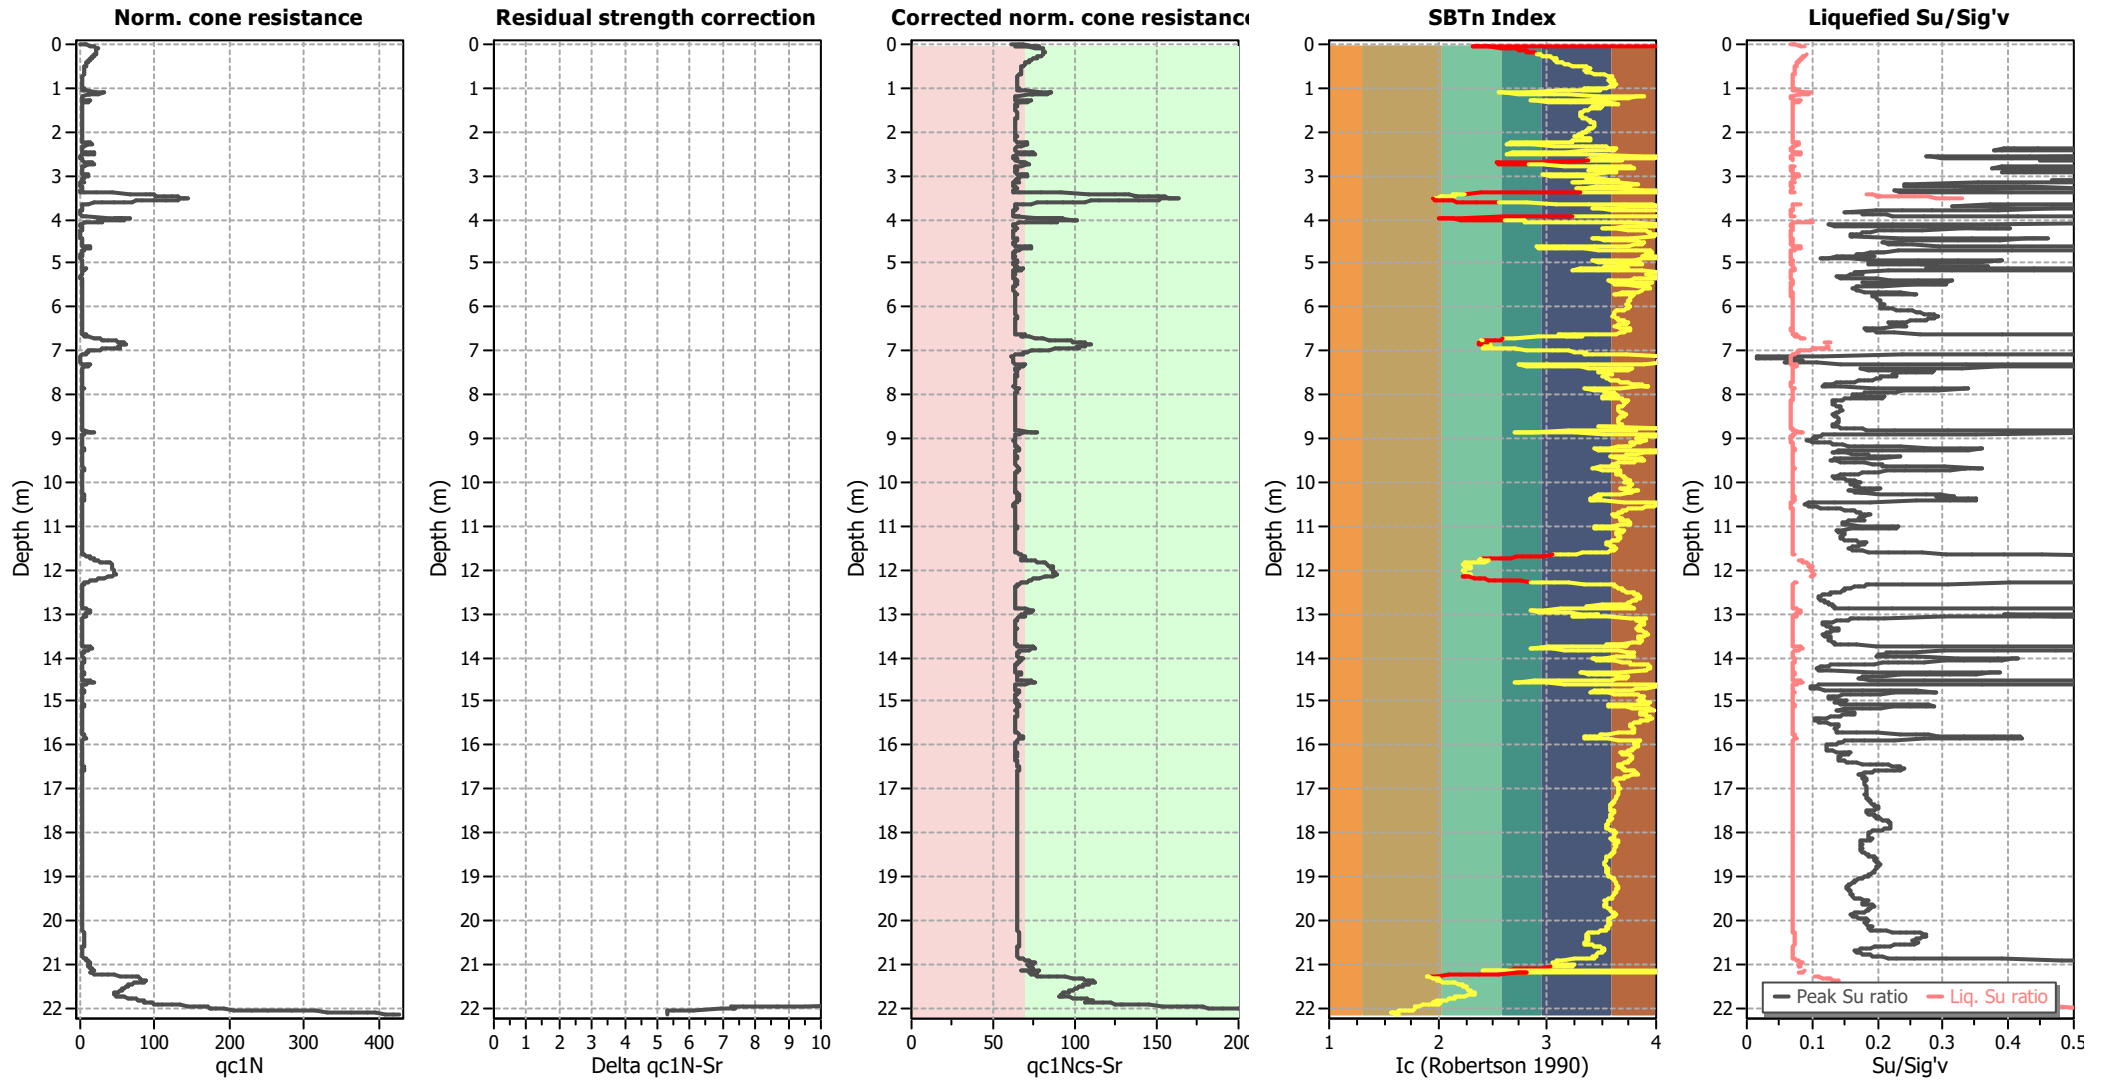

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

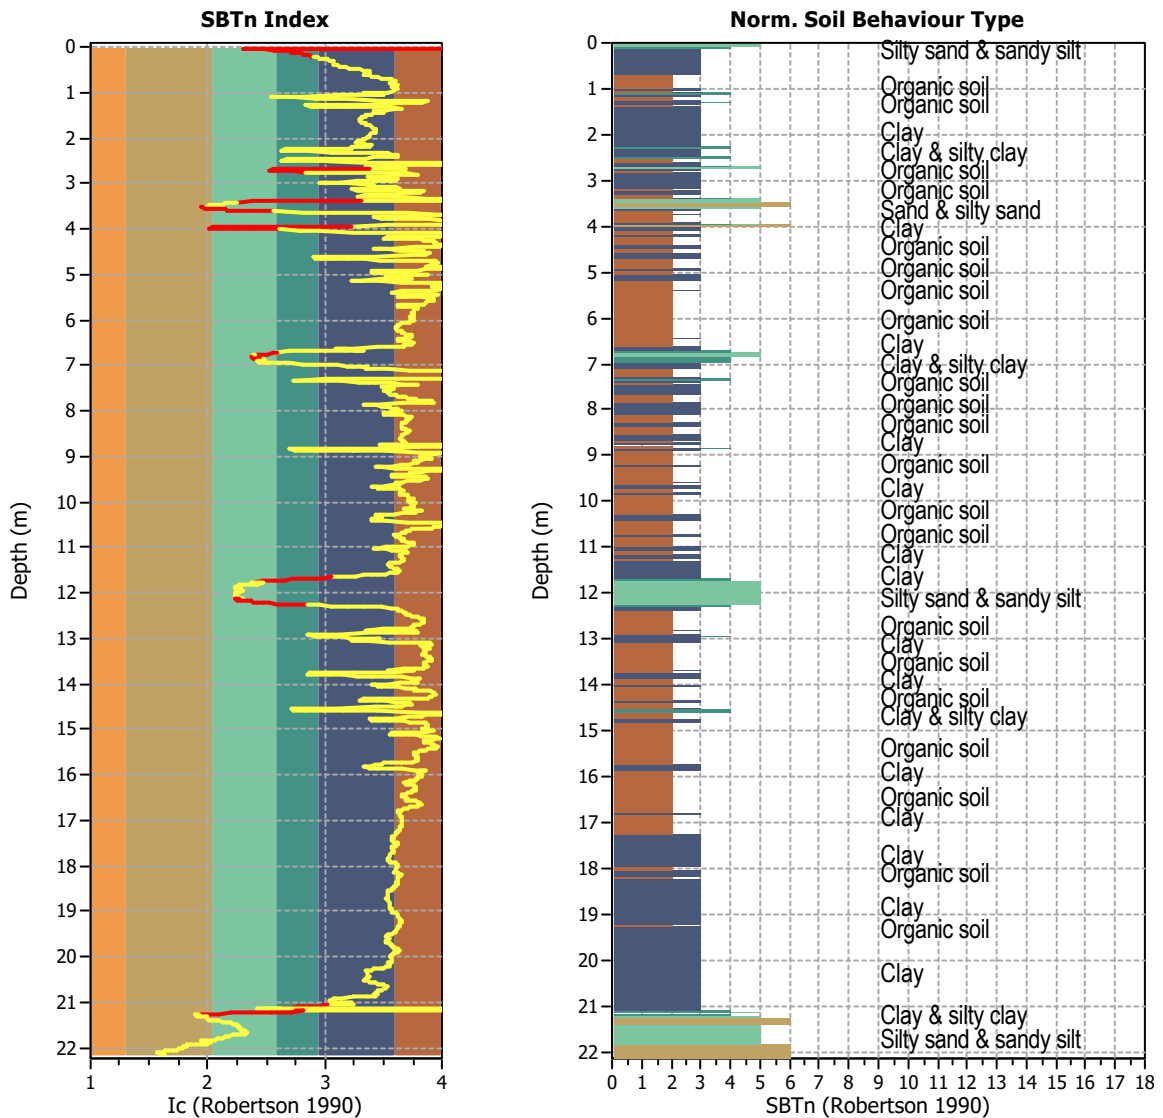


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2216
 Total points excluded: 107
 Exclusion percentage: 4.83%
 Number of layers detected: 13


Estimation of post-earthquake settlements

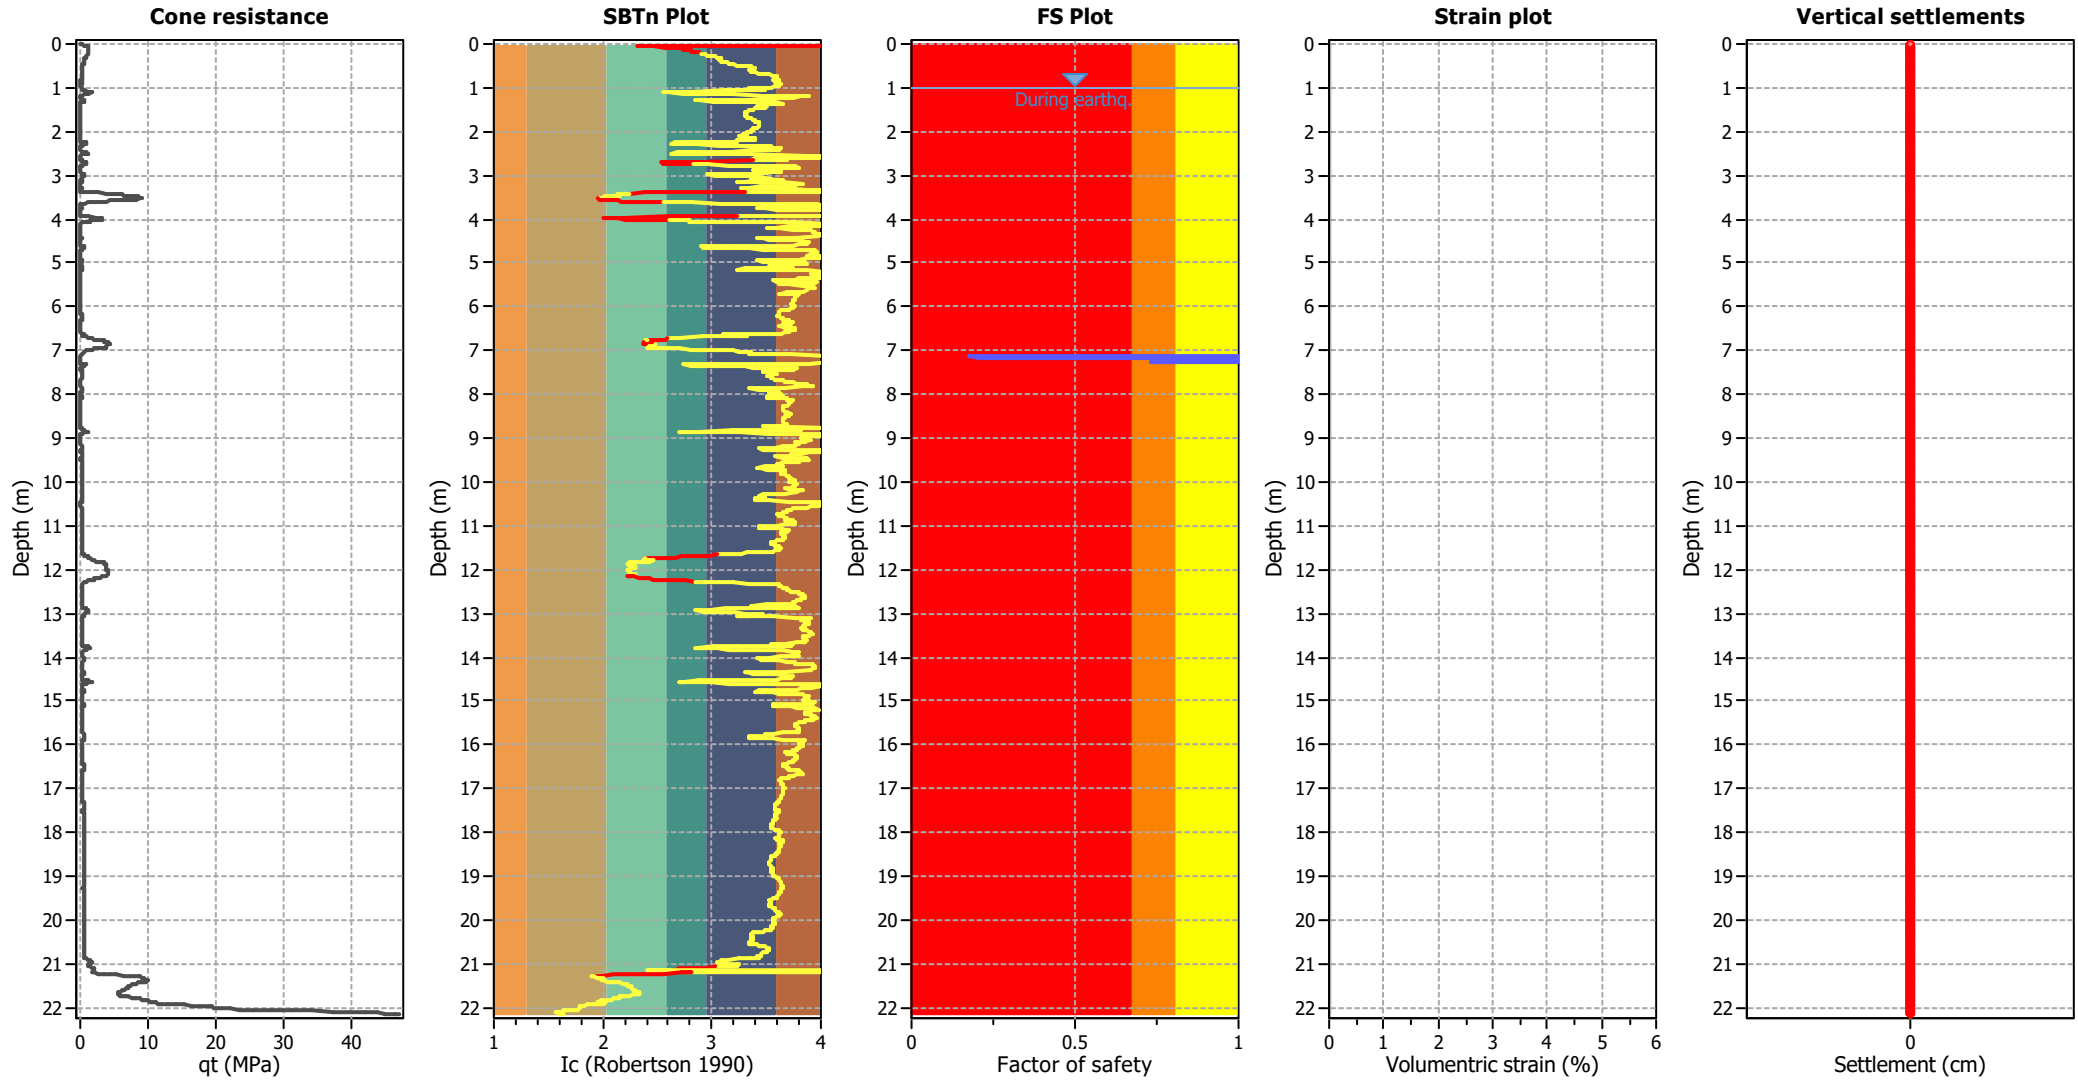

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

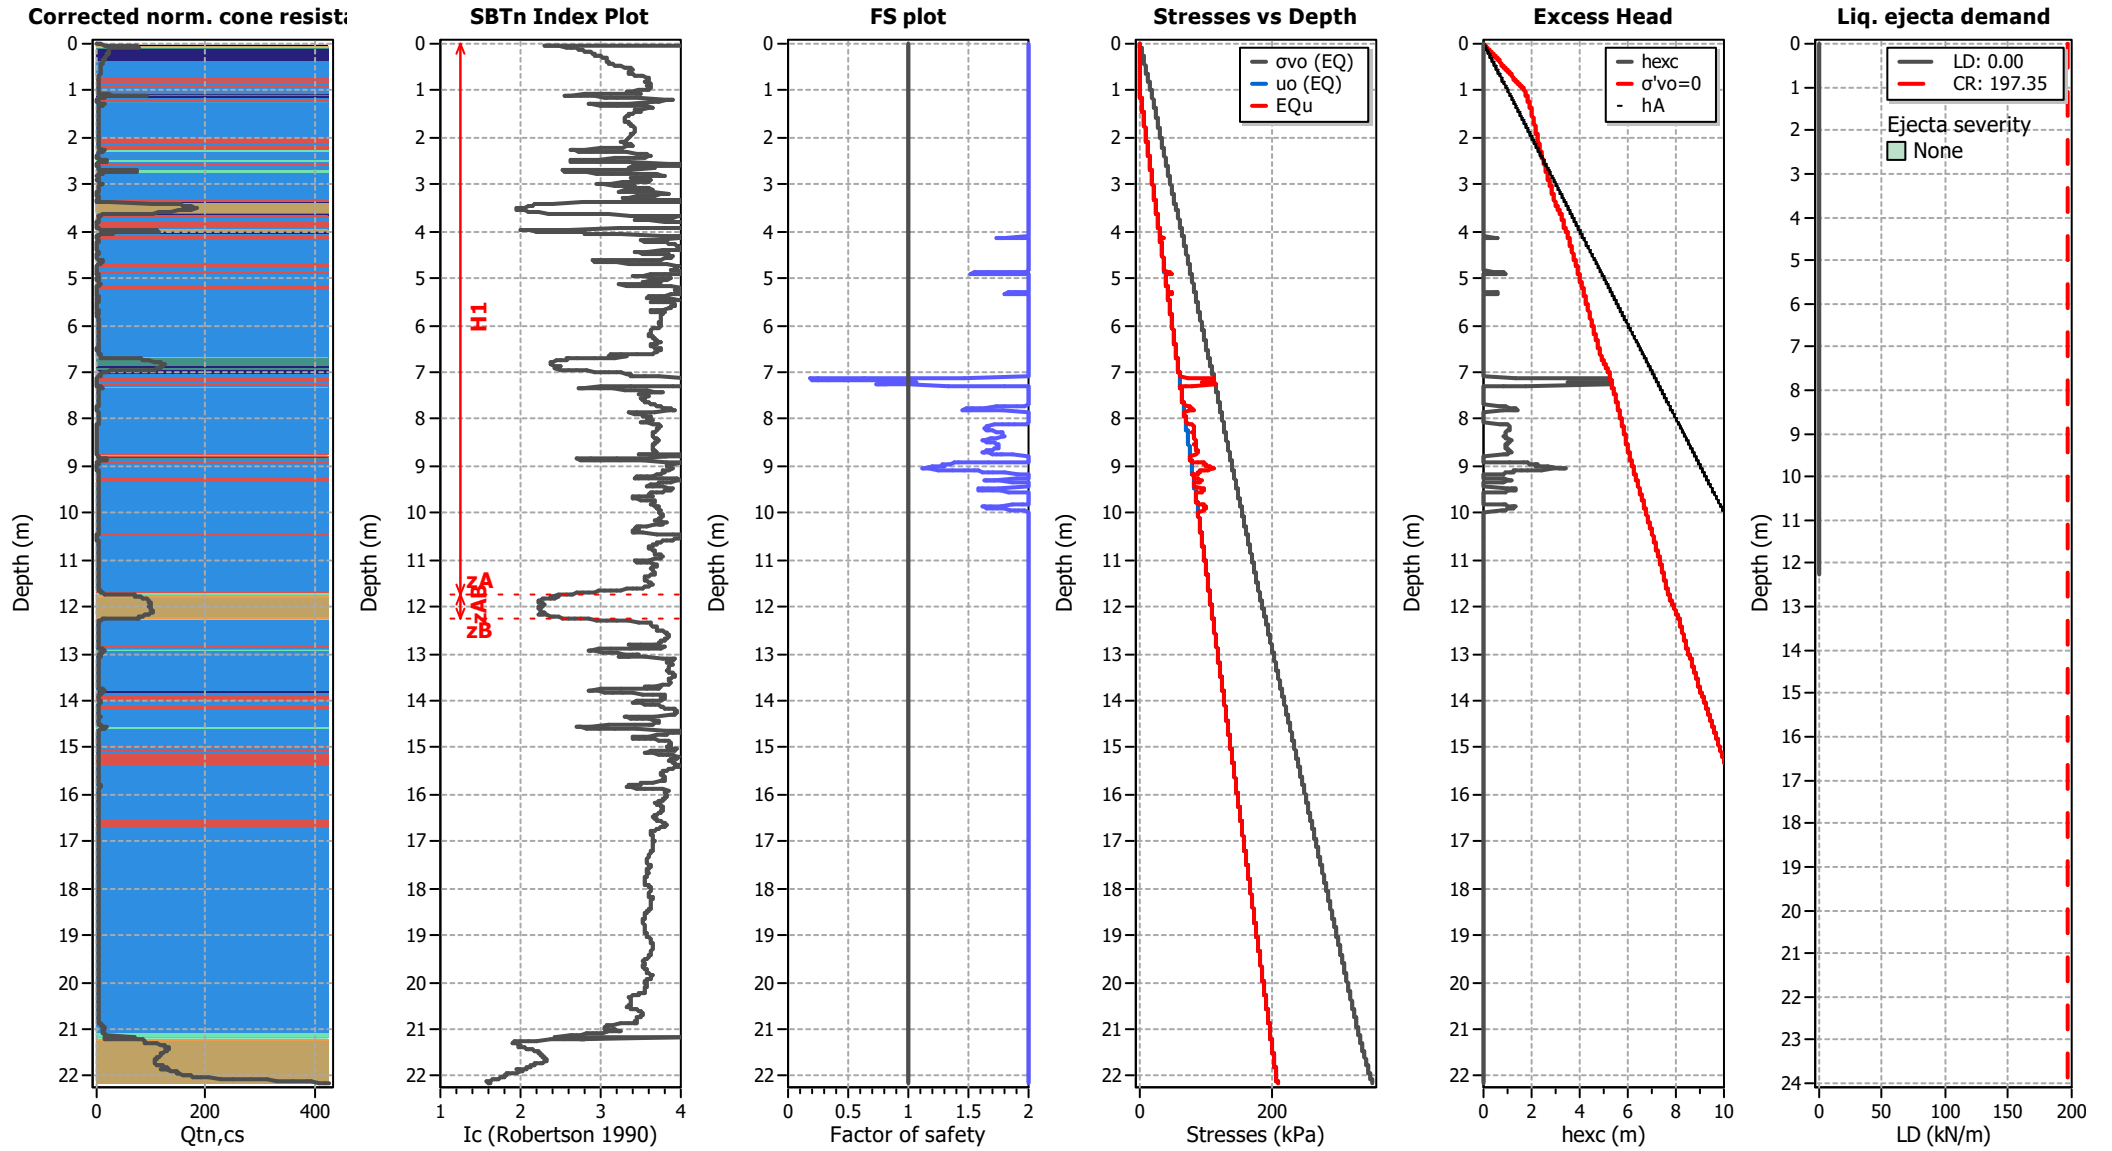

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT15

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

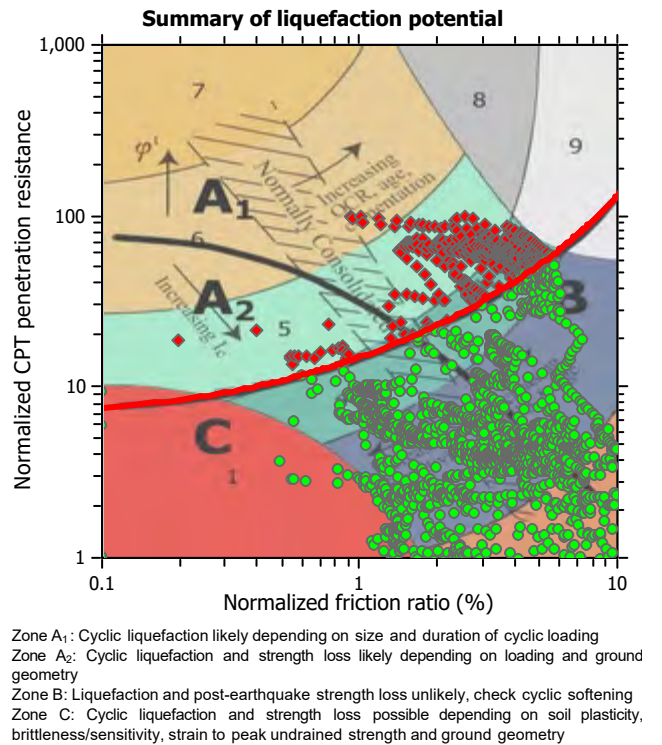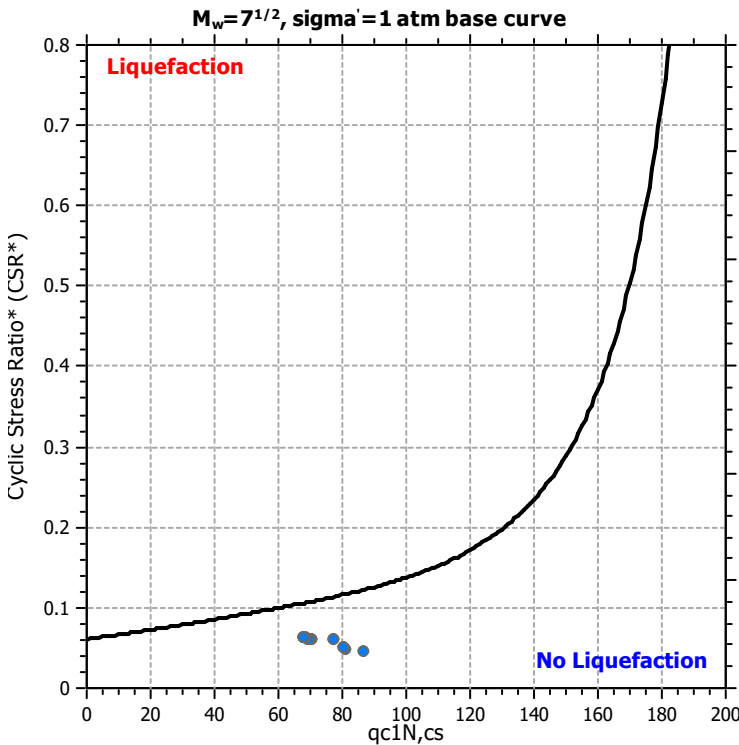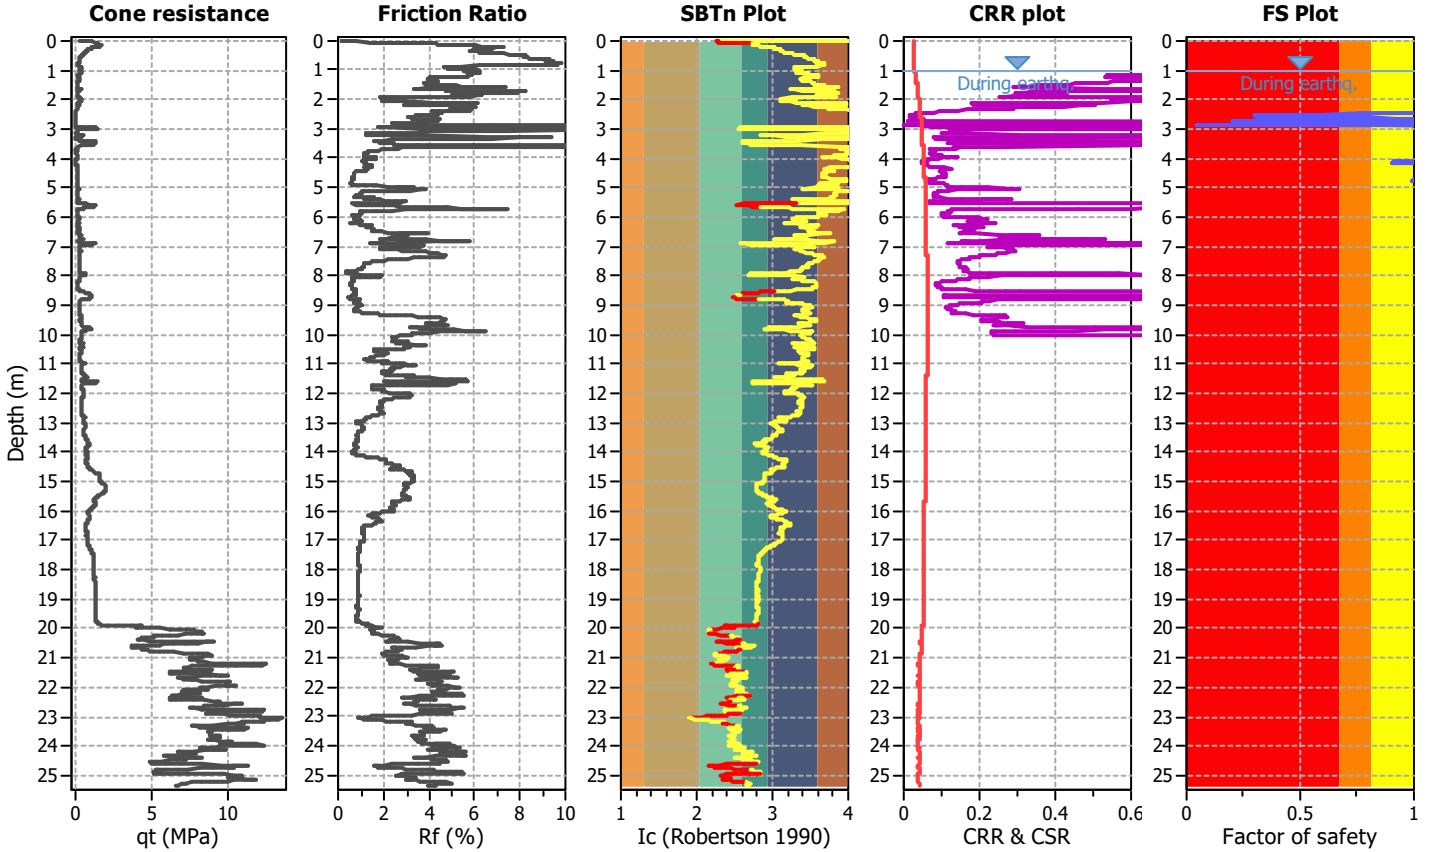

CPT basic interpretation plots

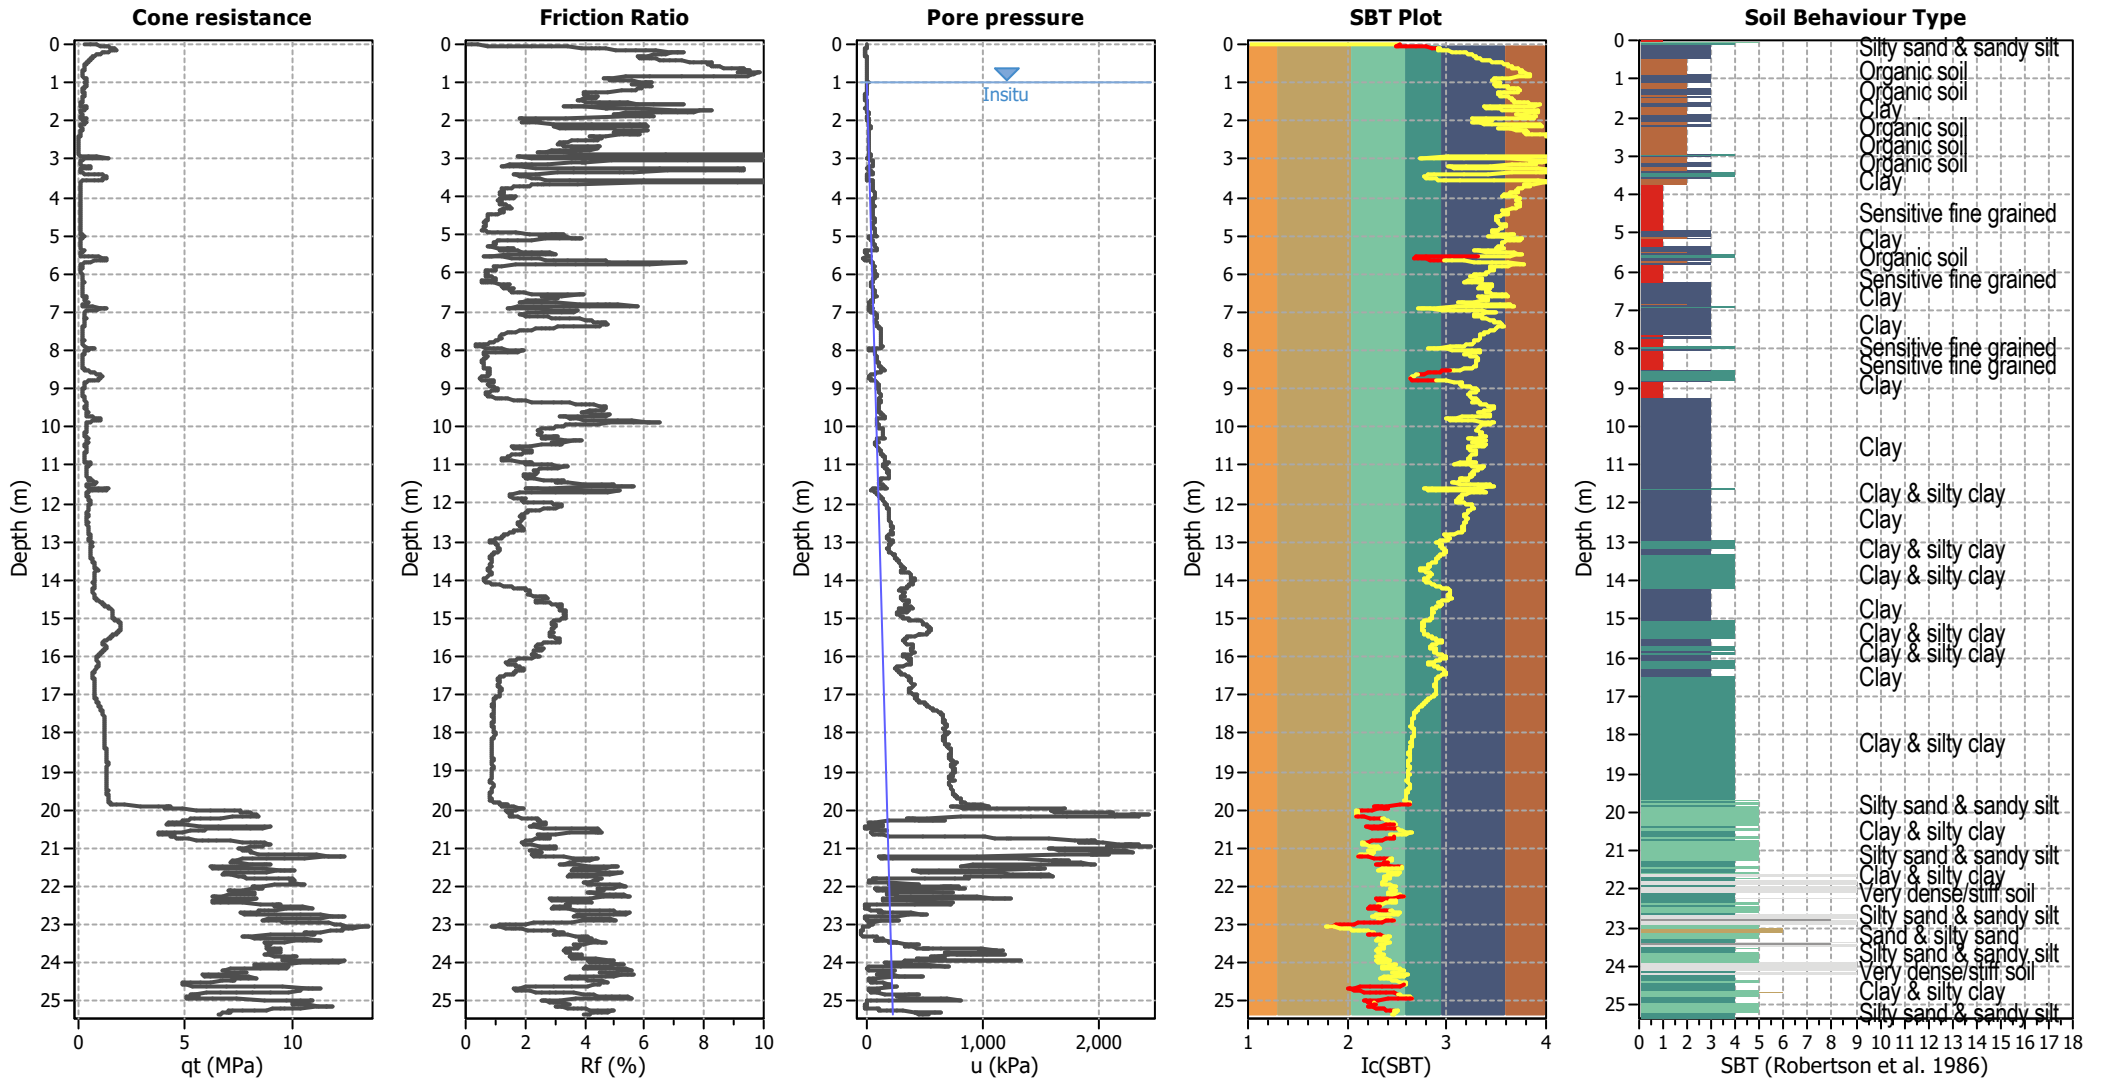


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

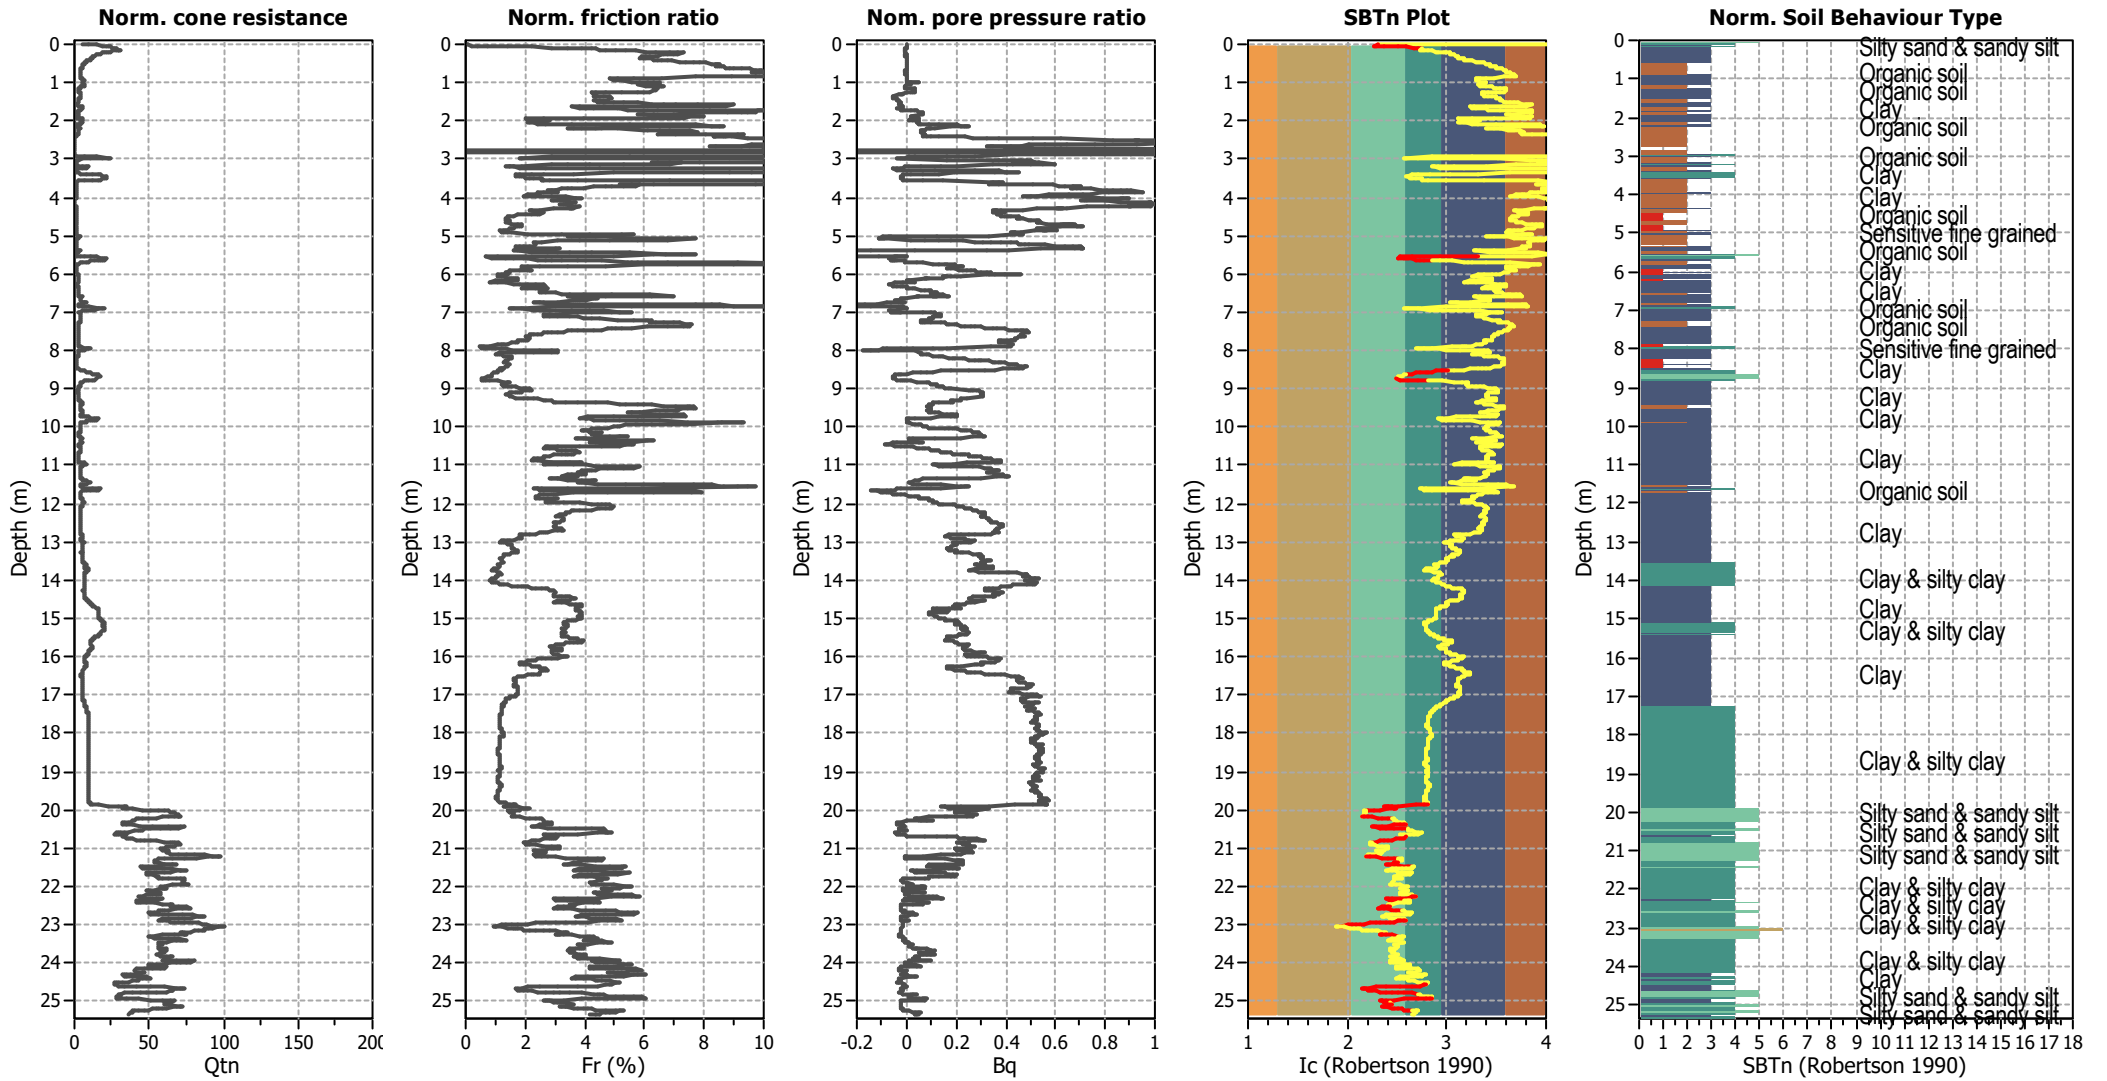


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

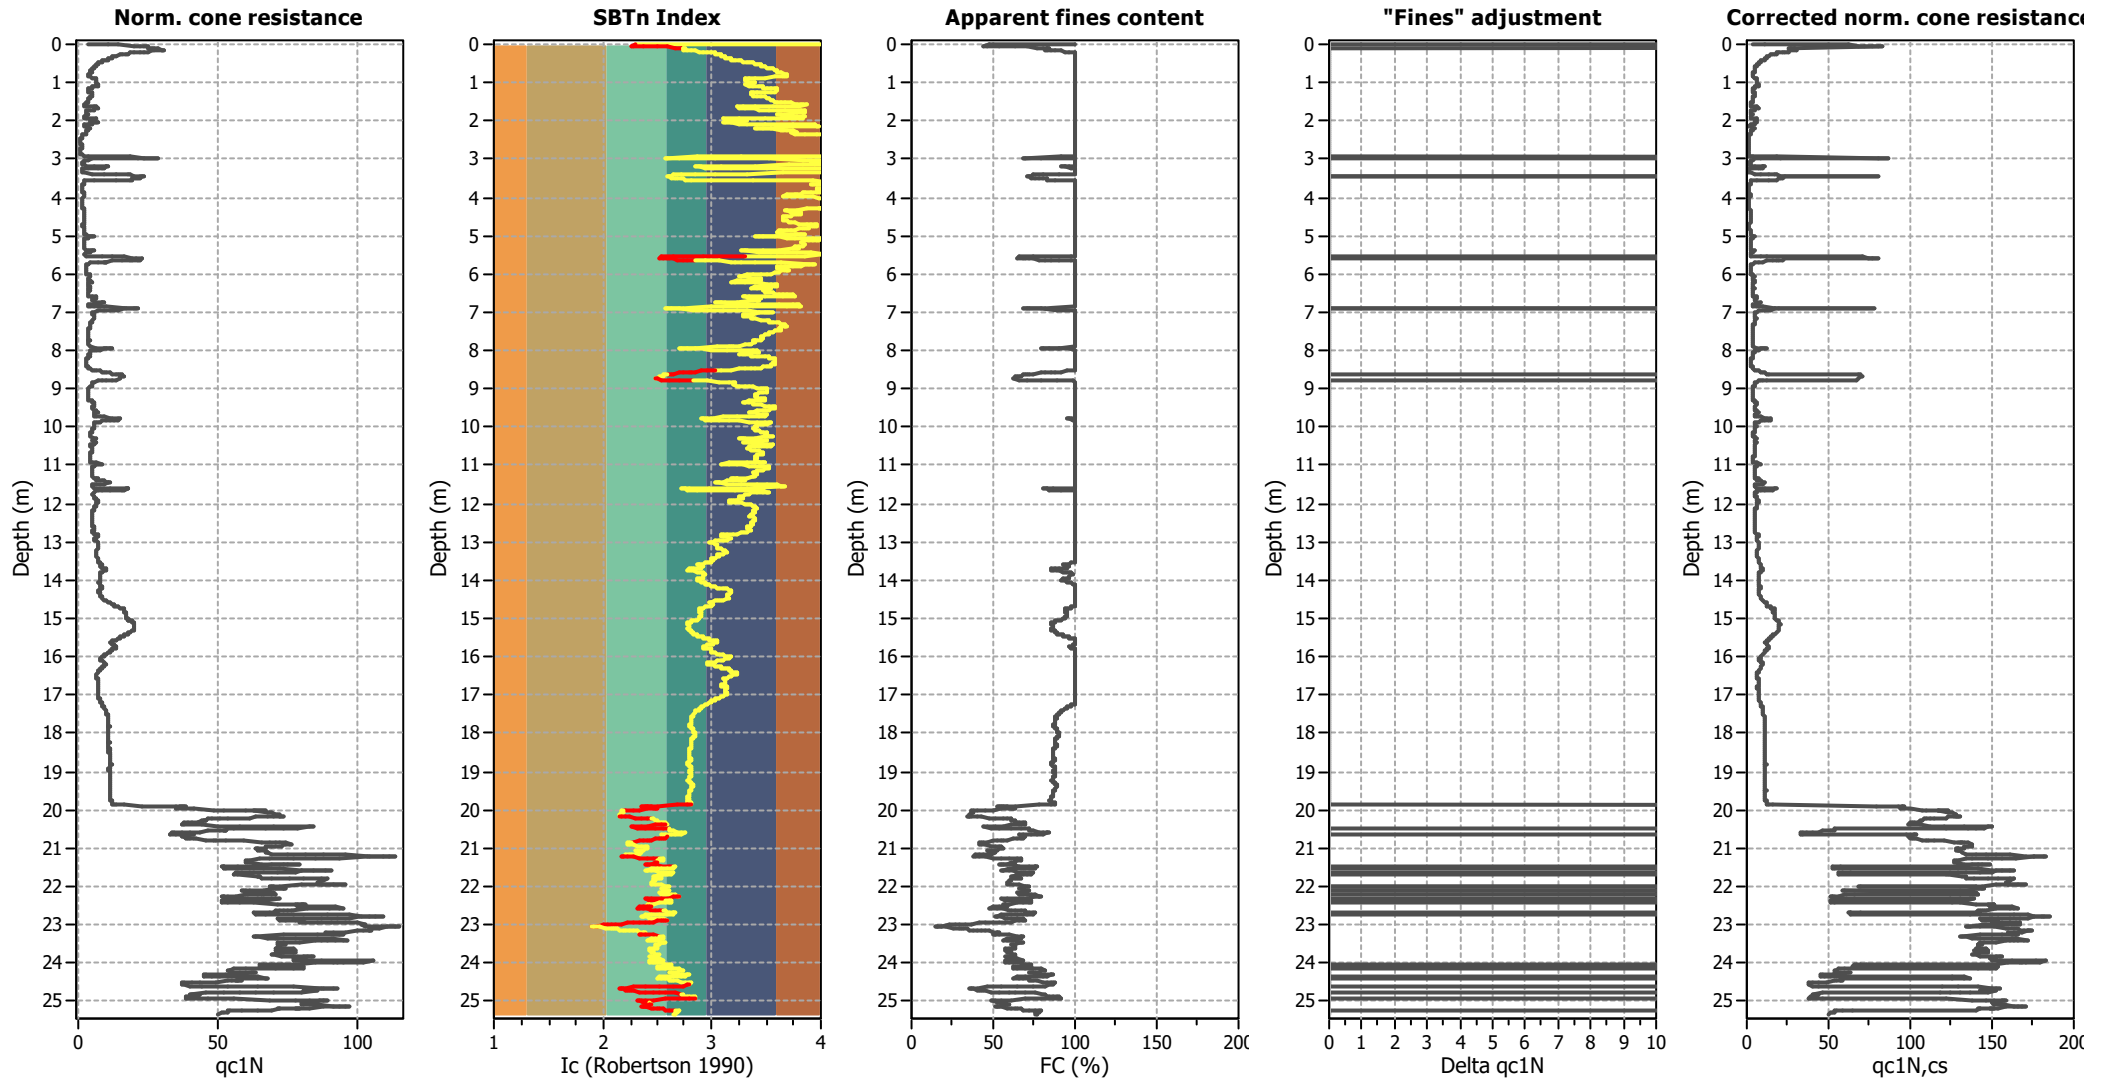

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

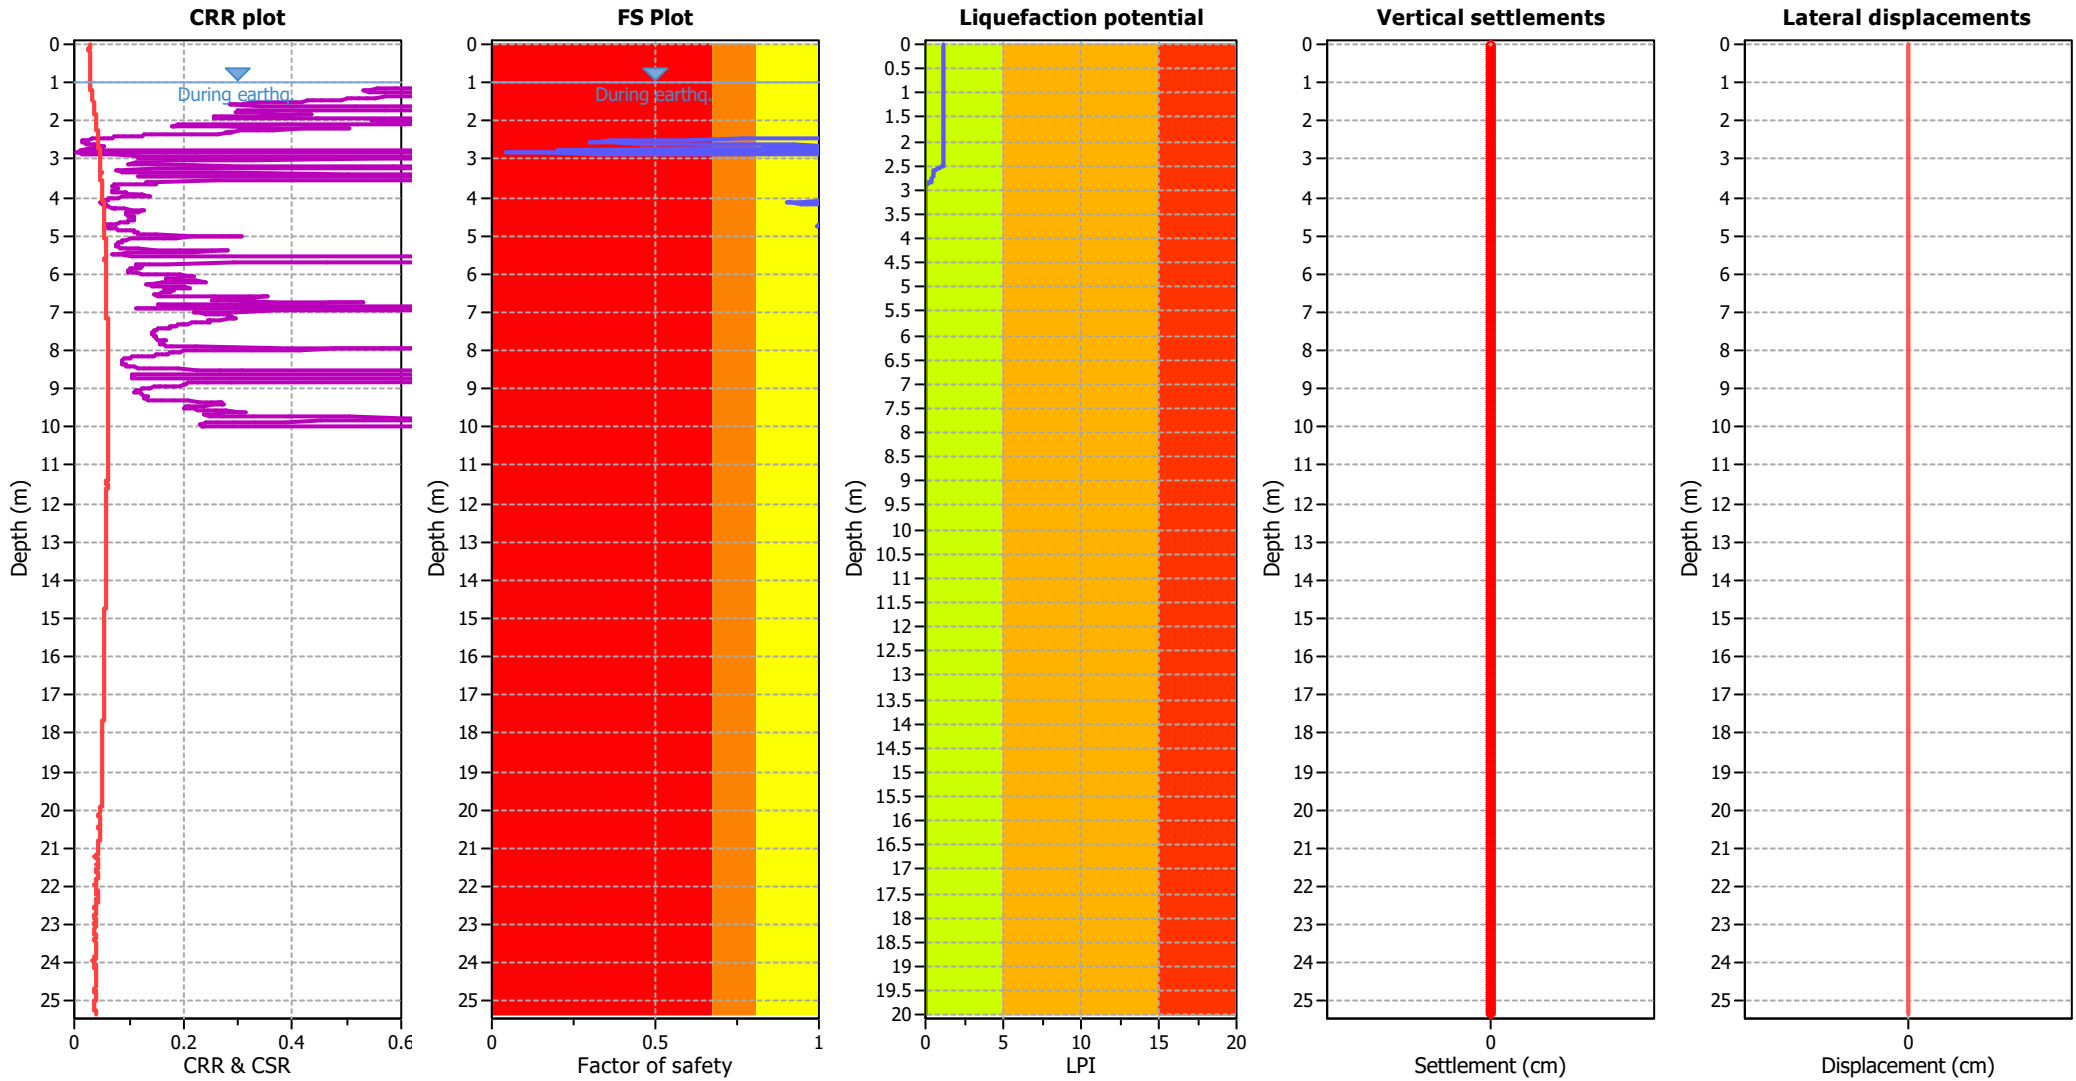

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

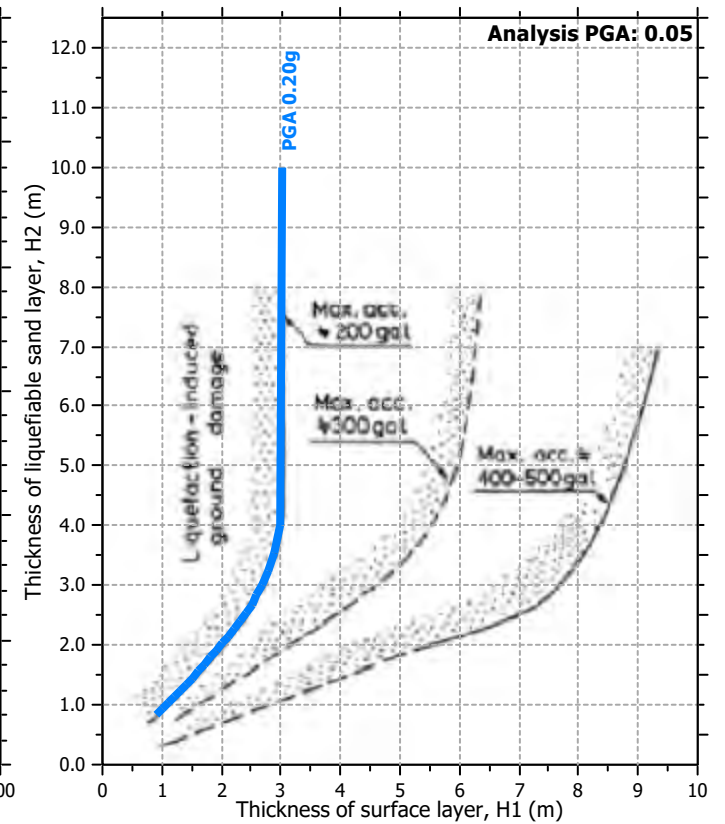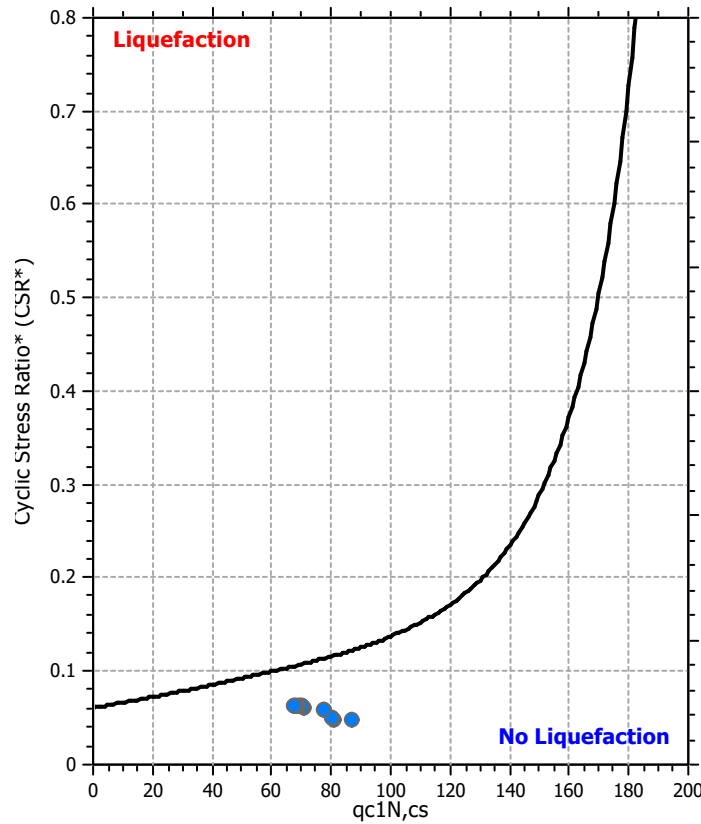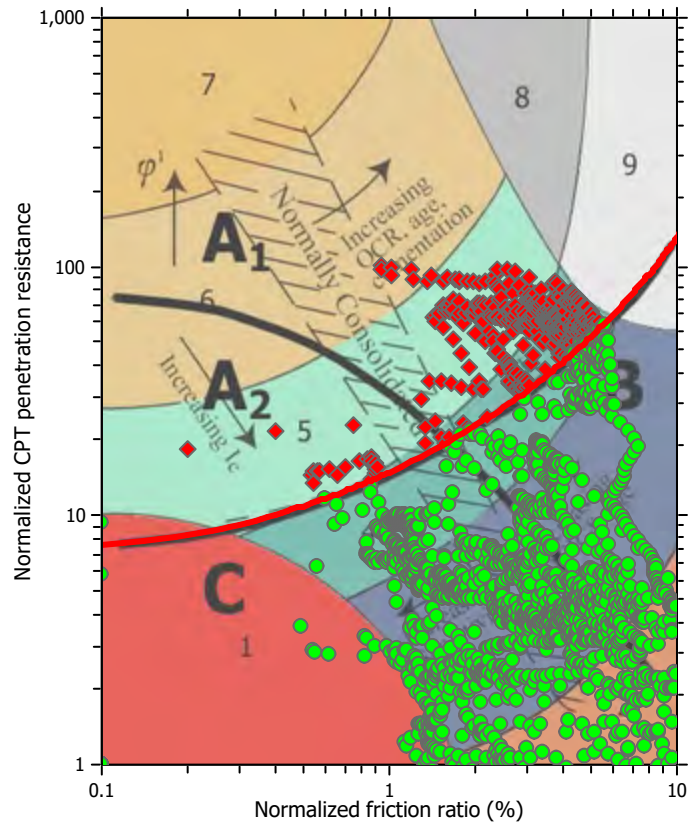

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

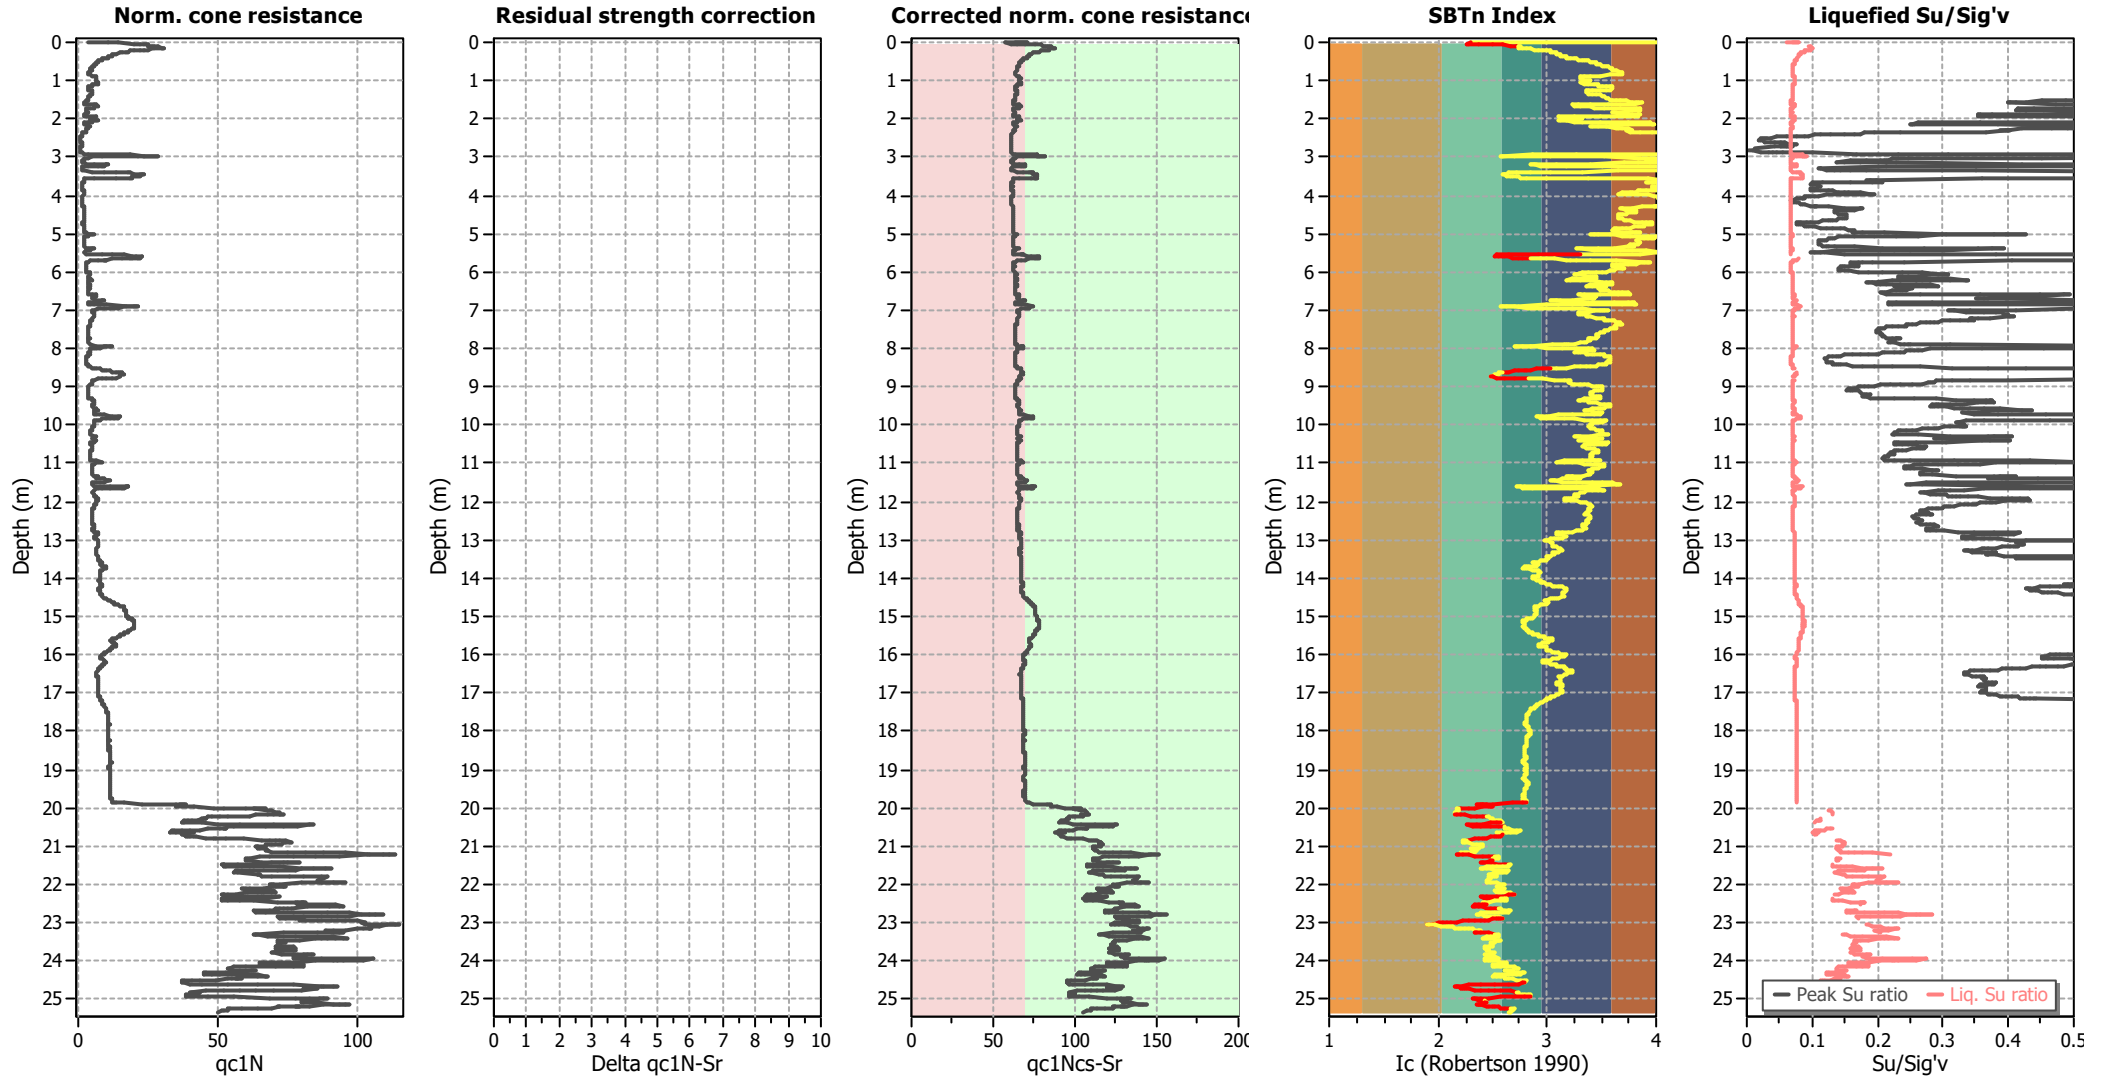

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

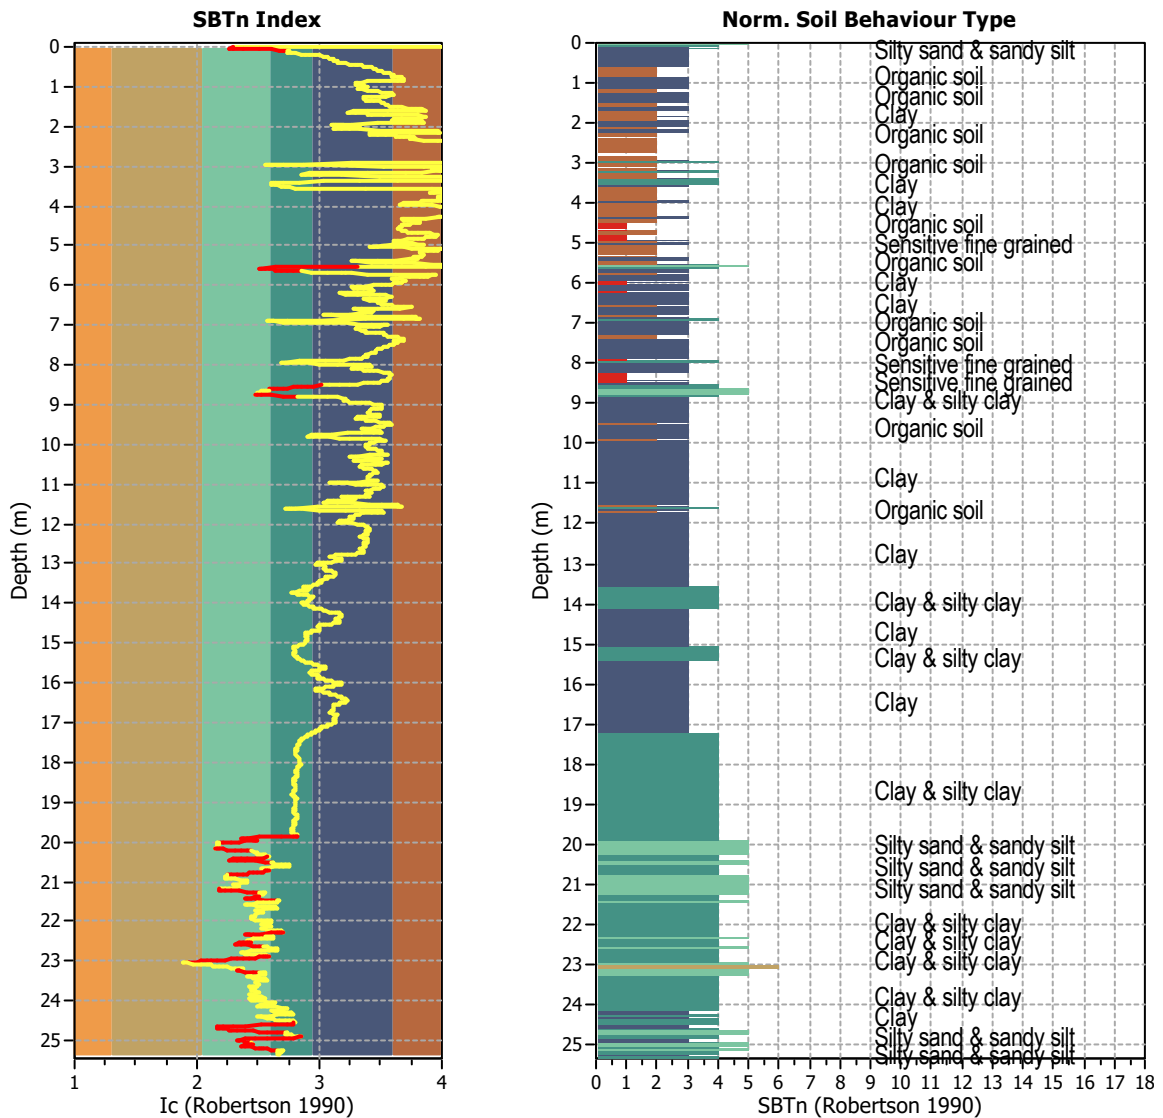


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2536
 Total points excluded: 230
 Exclusion percentage: 9.07%
 Number of layers detected: 27


Estimation of post-earthquake settlements

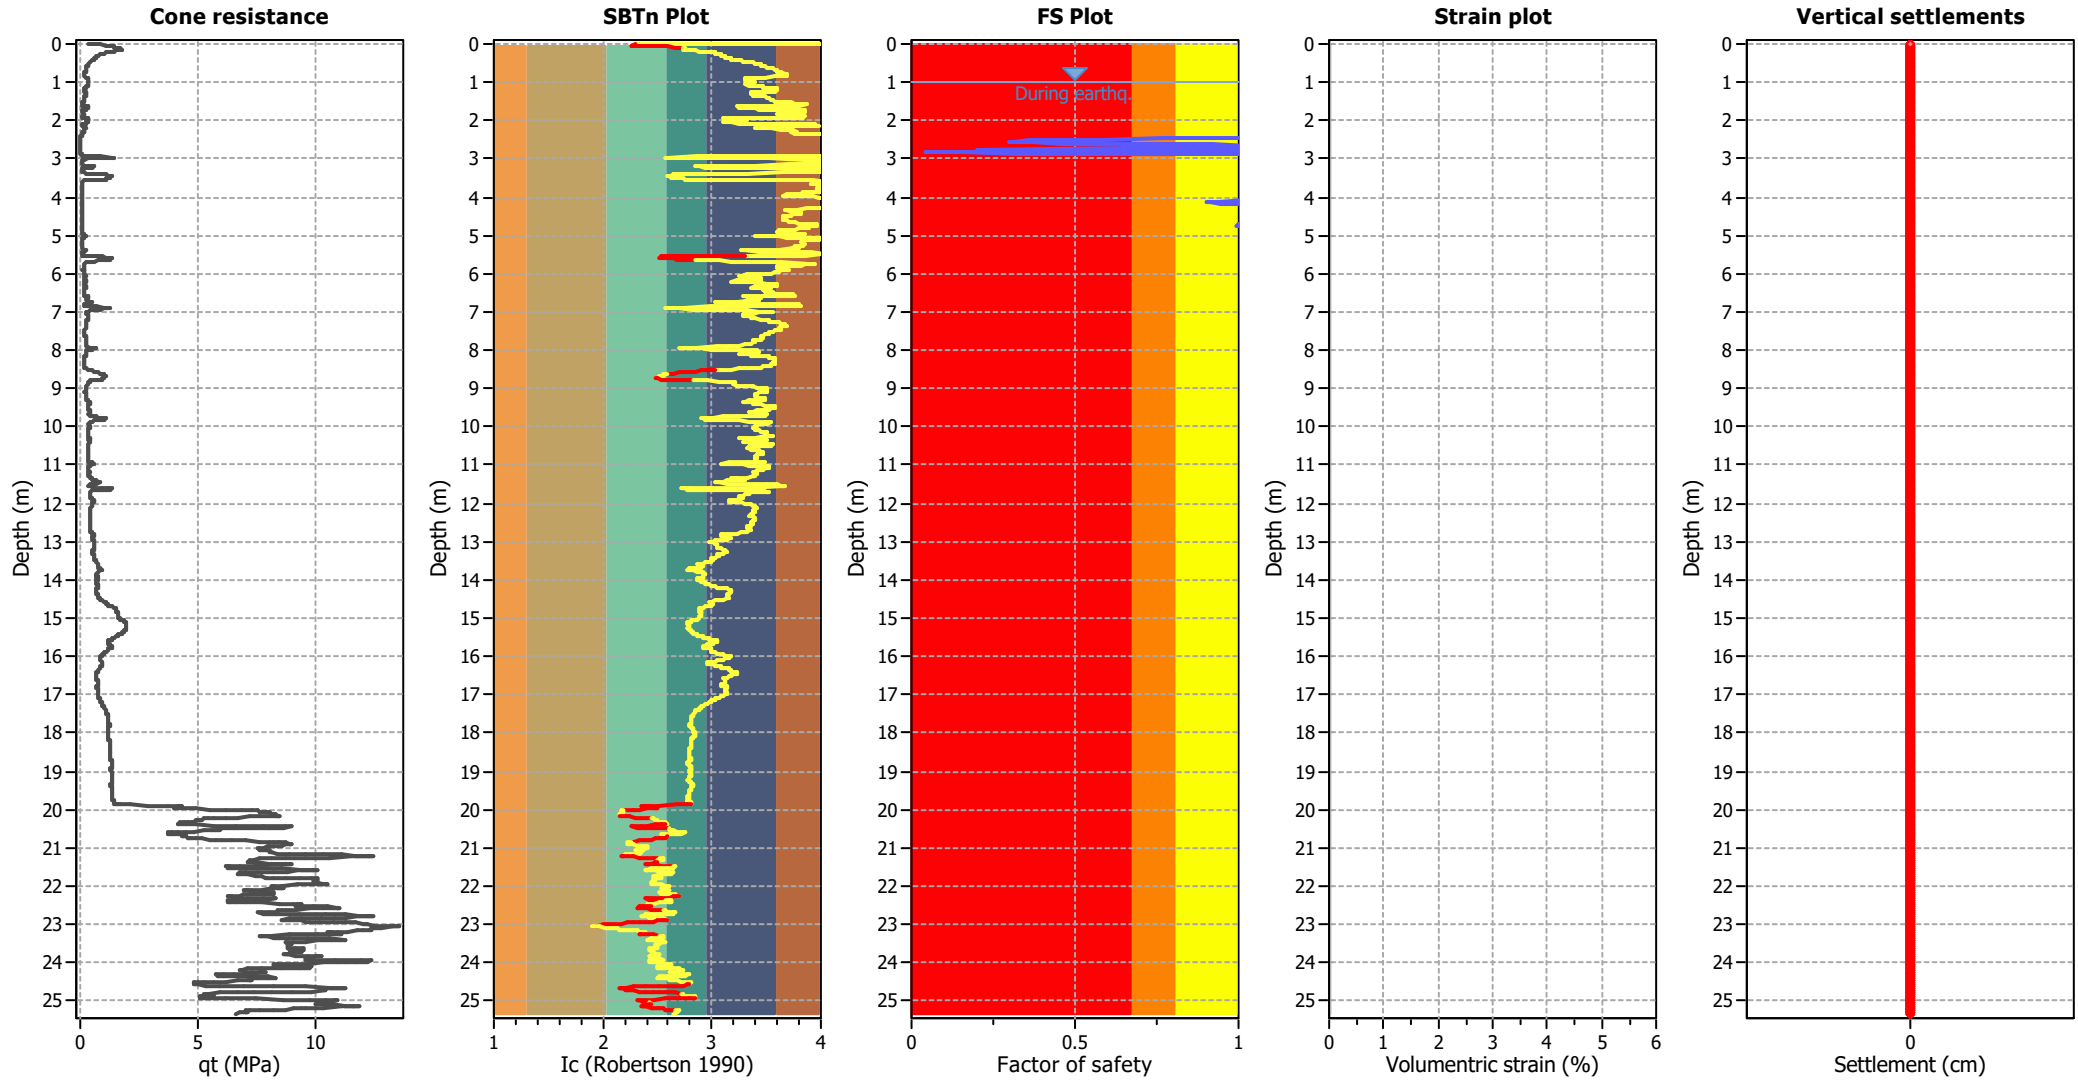

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

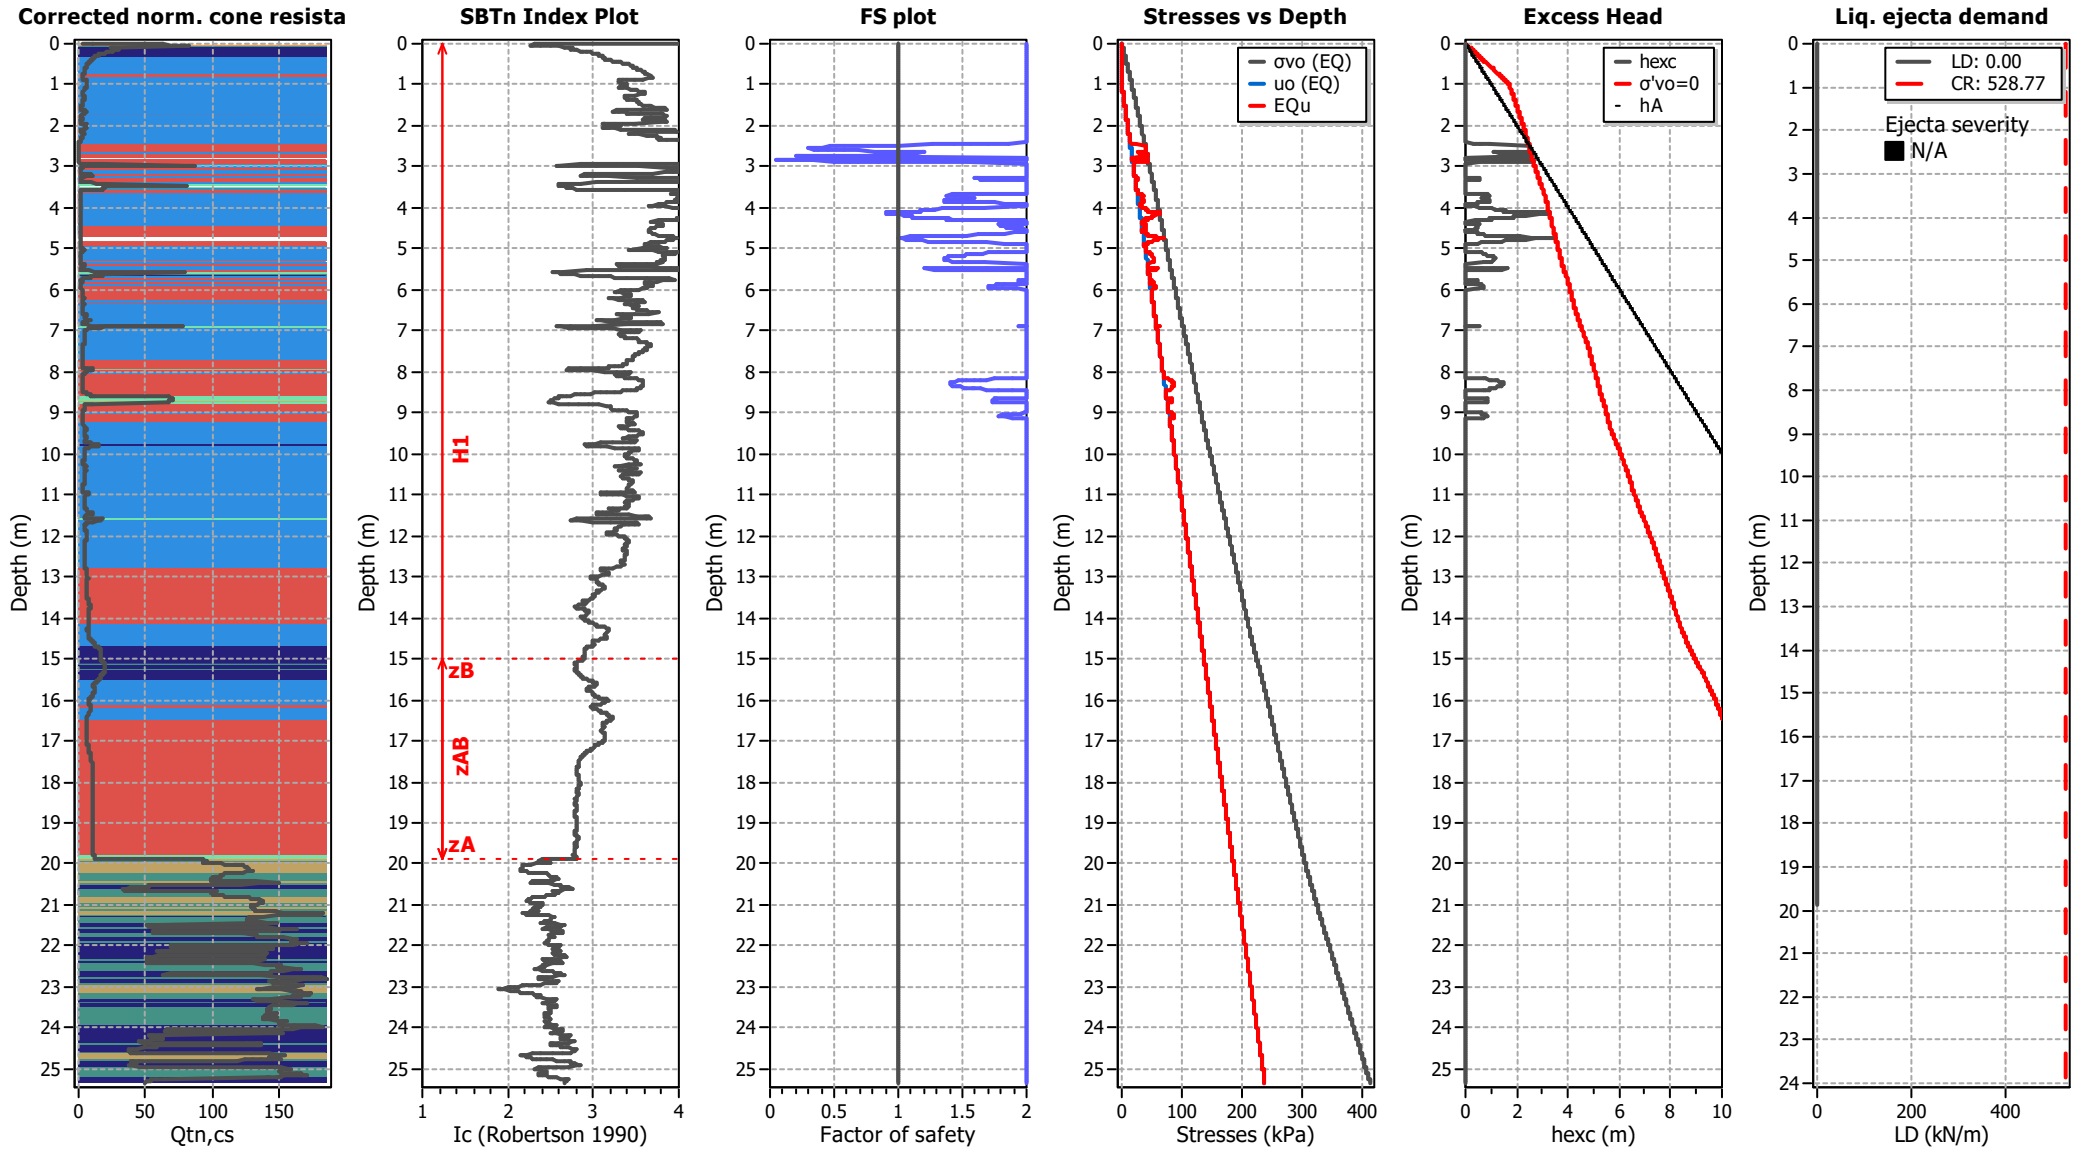

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT16

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

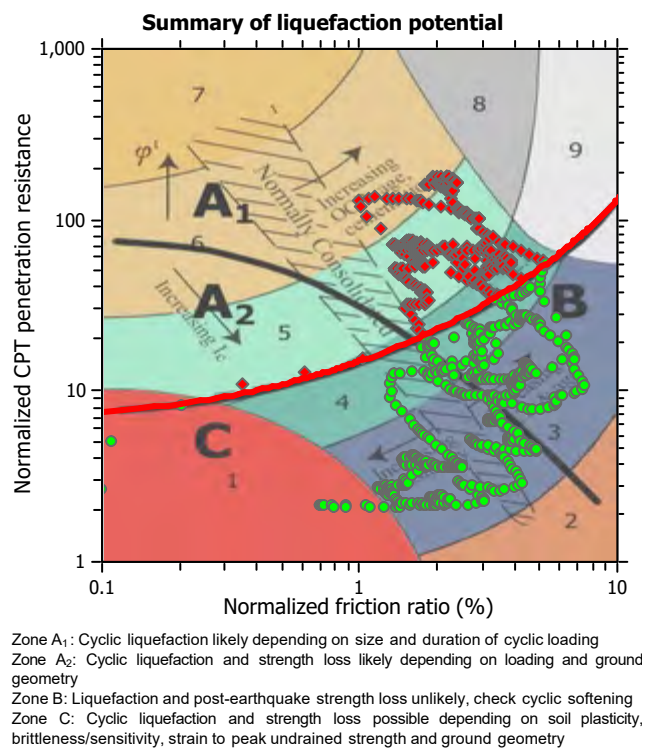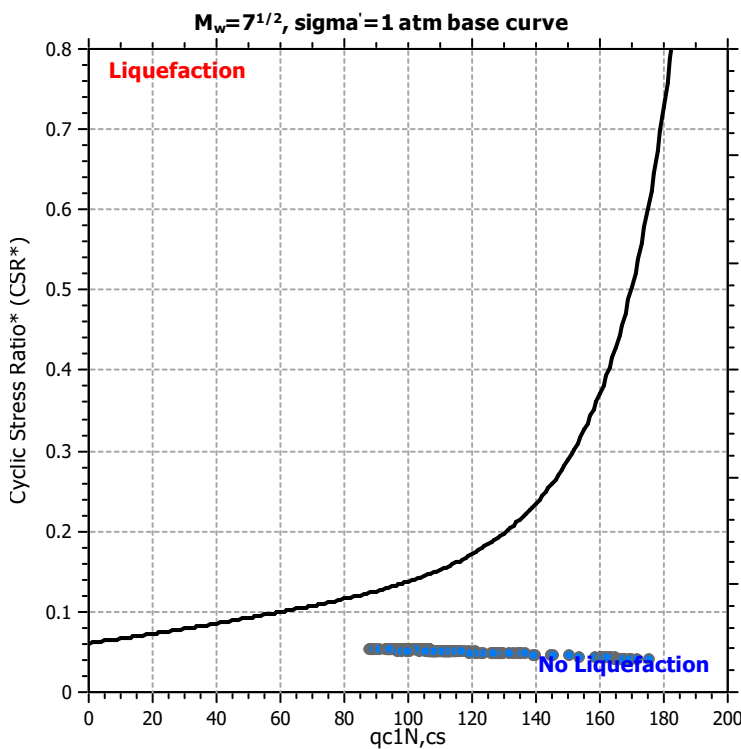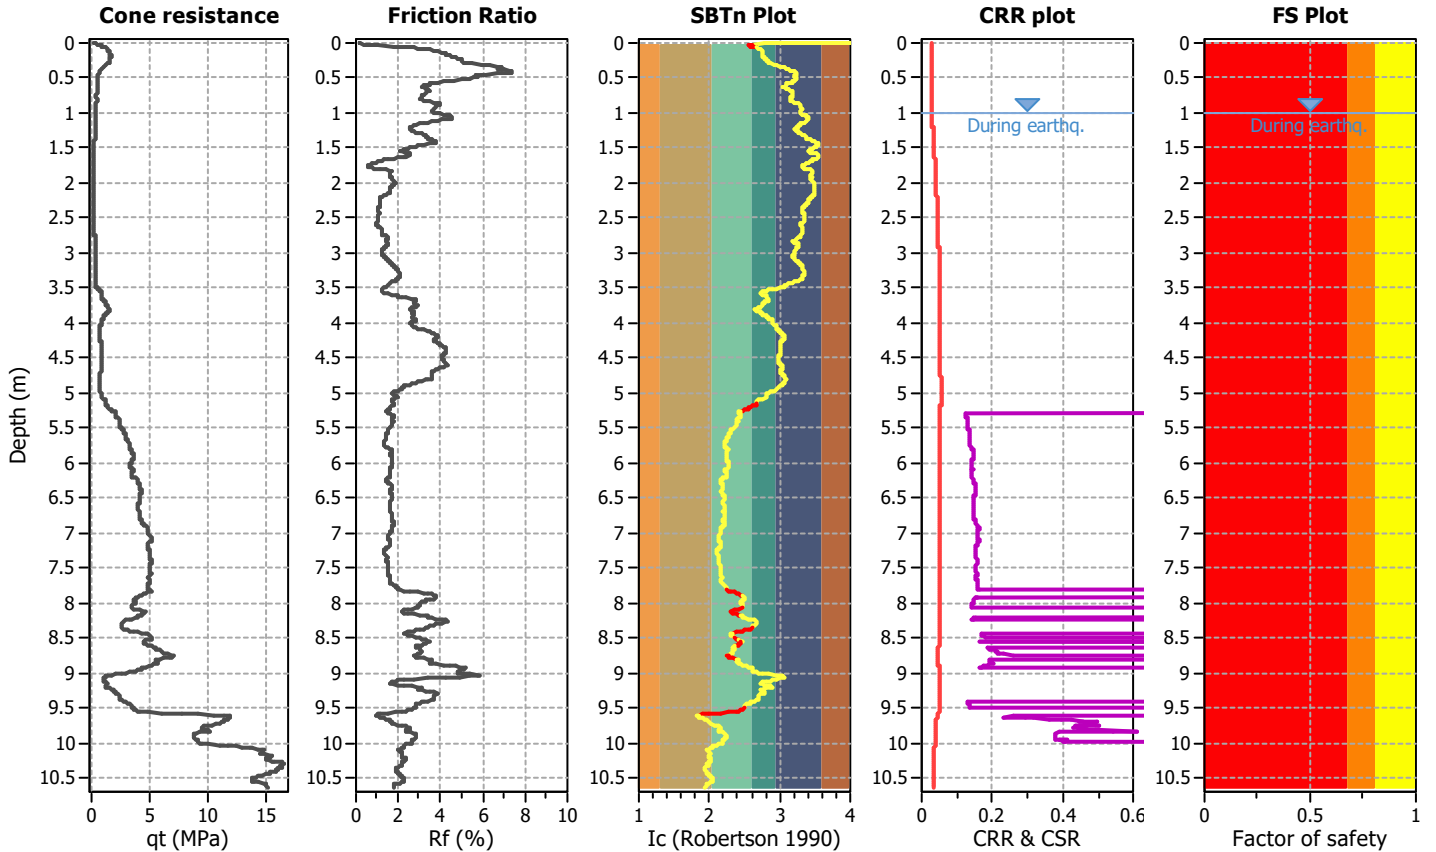

CPT basic interpretation plots

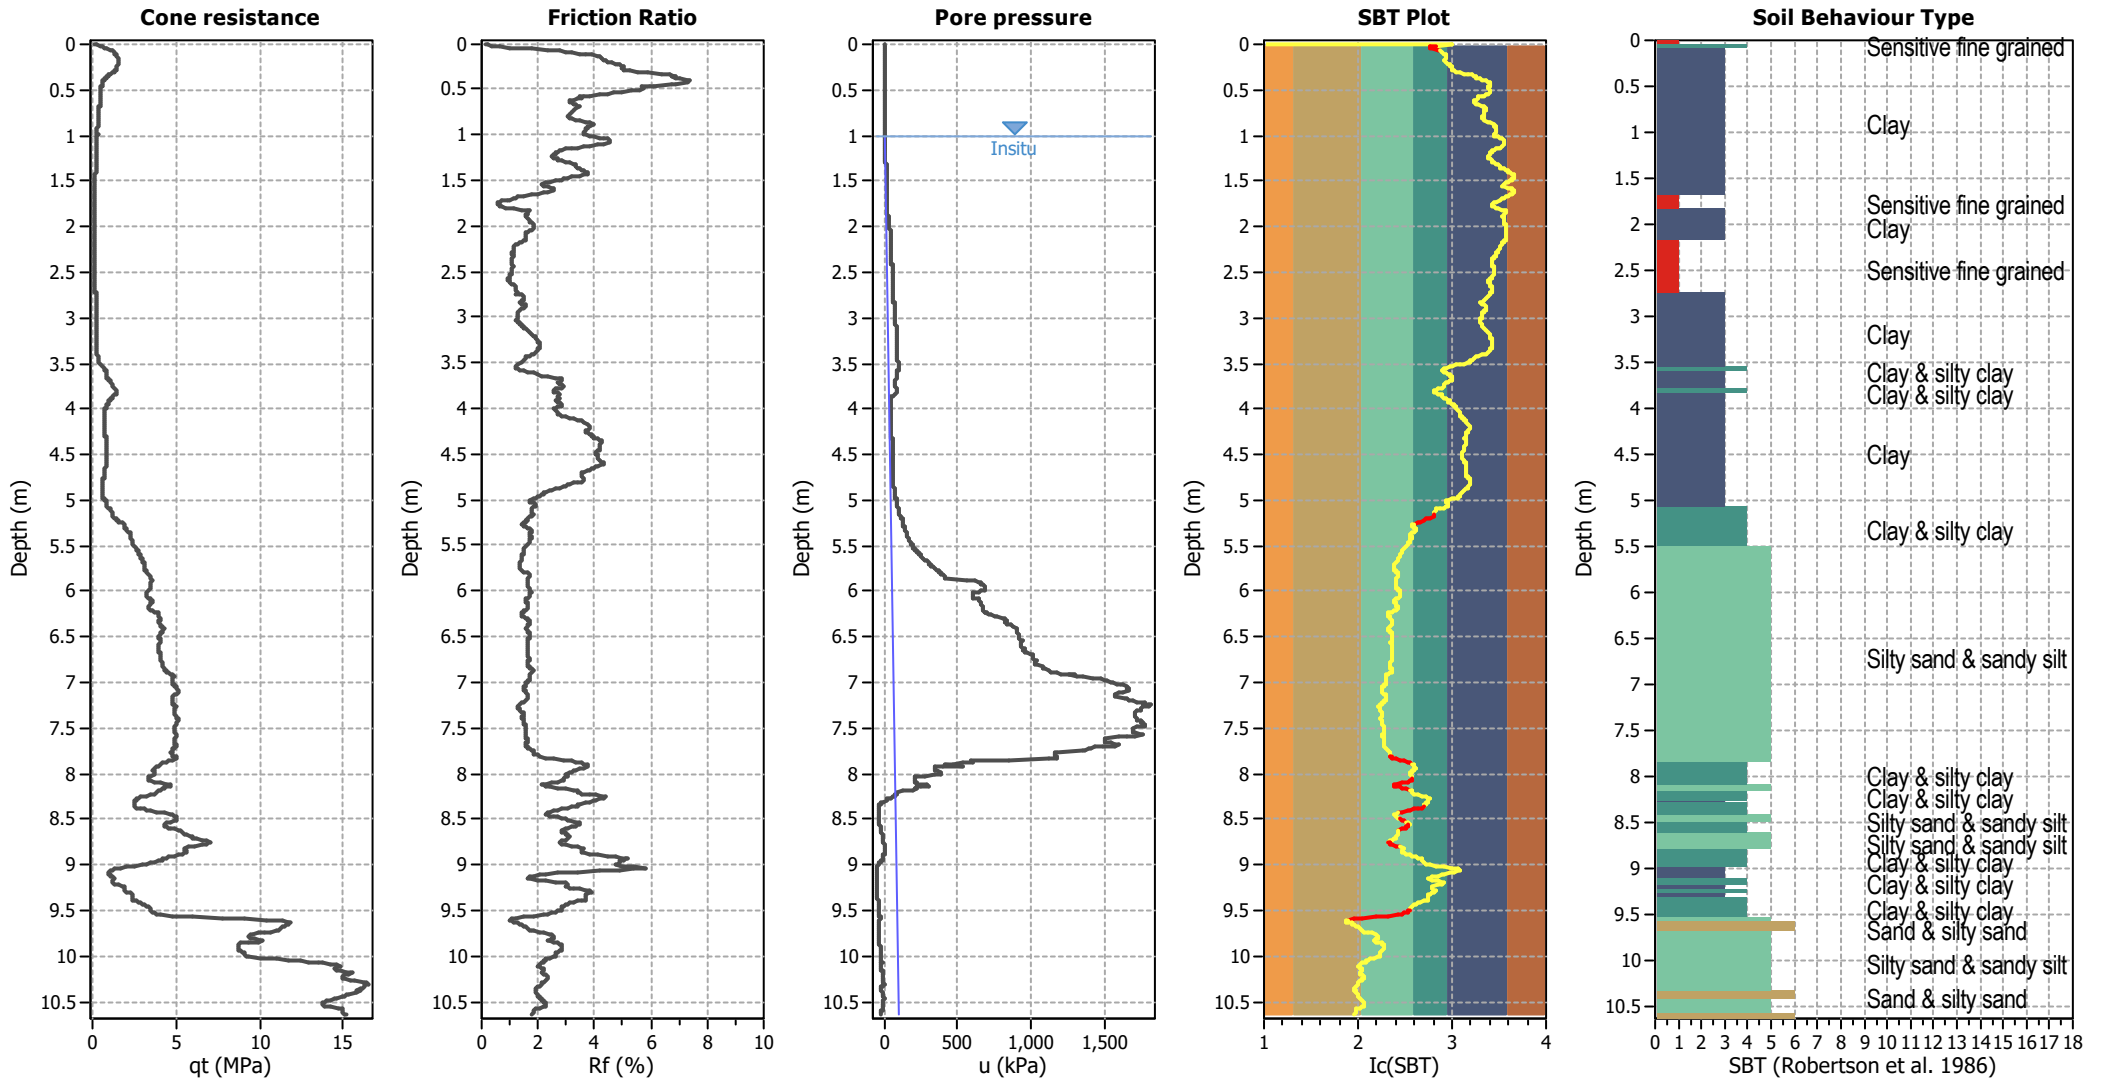


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained

CPT basic interpretation plots (normalized)

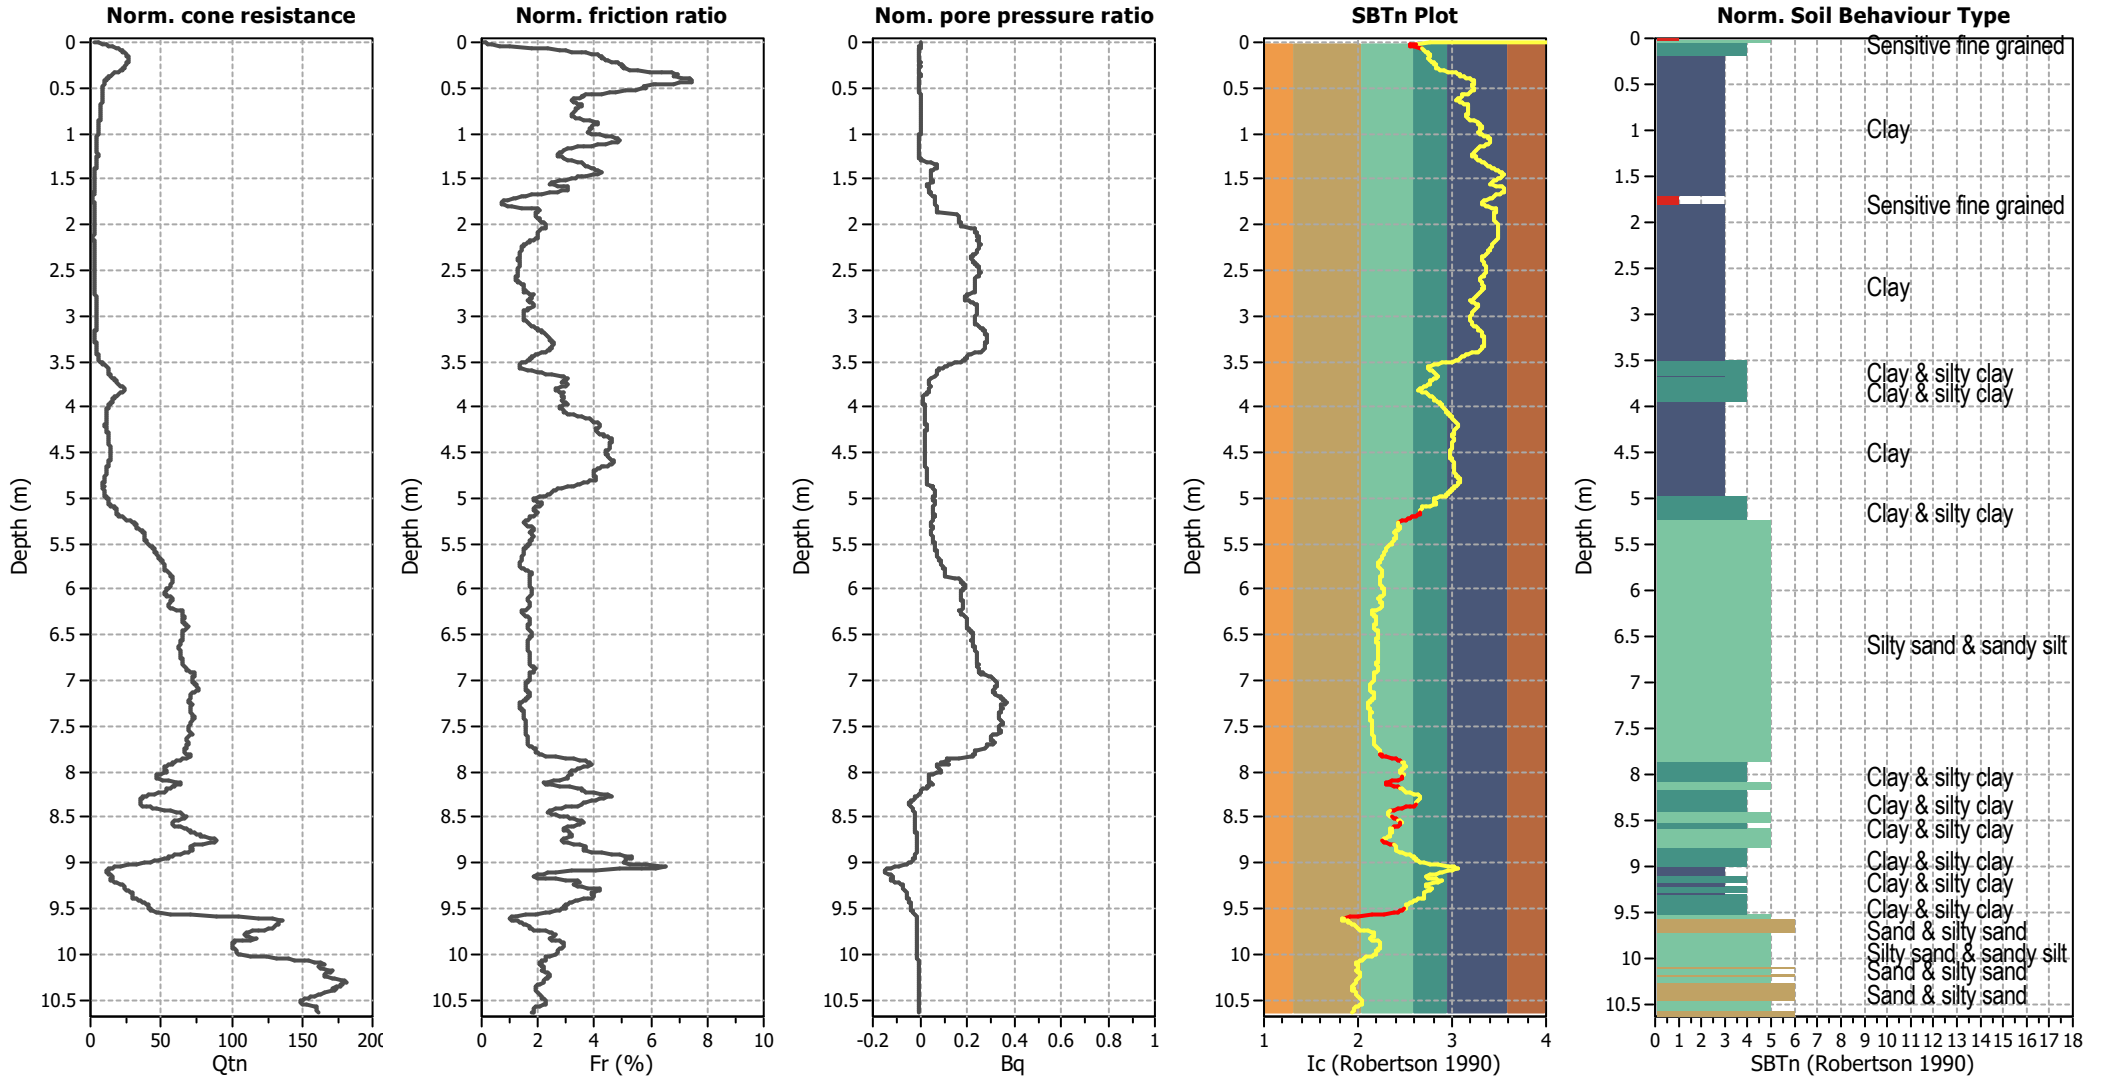


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

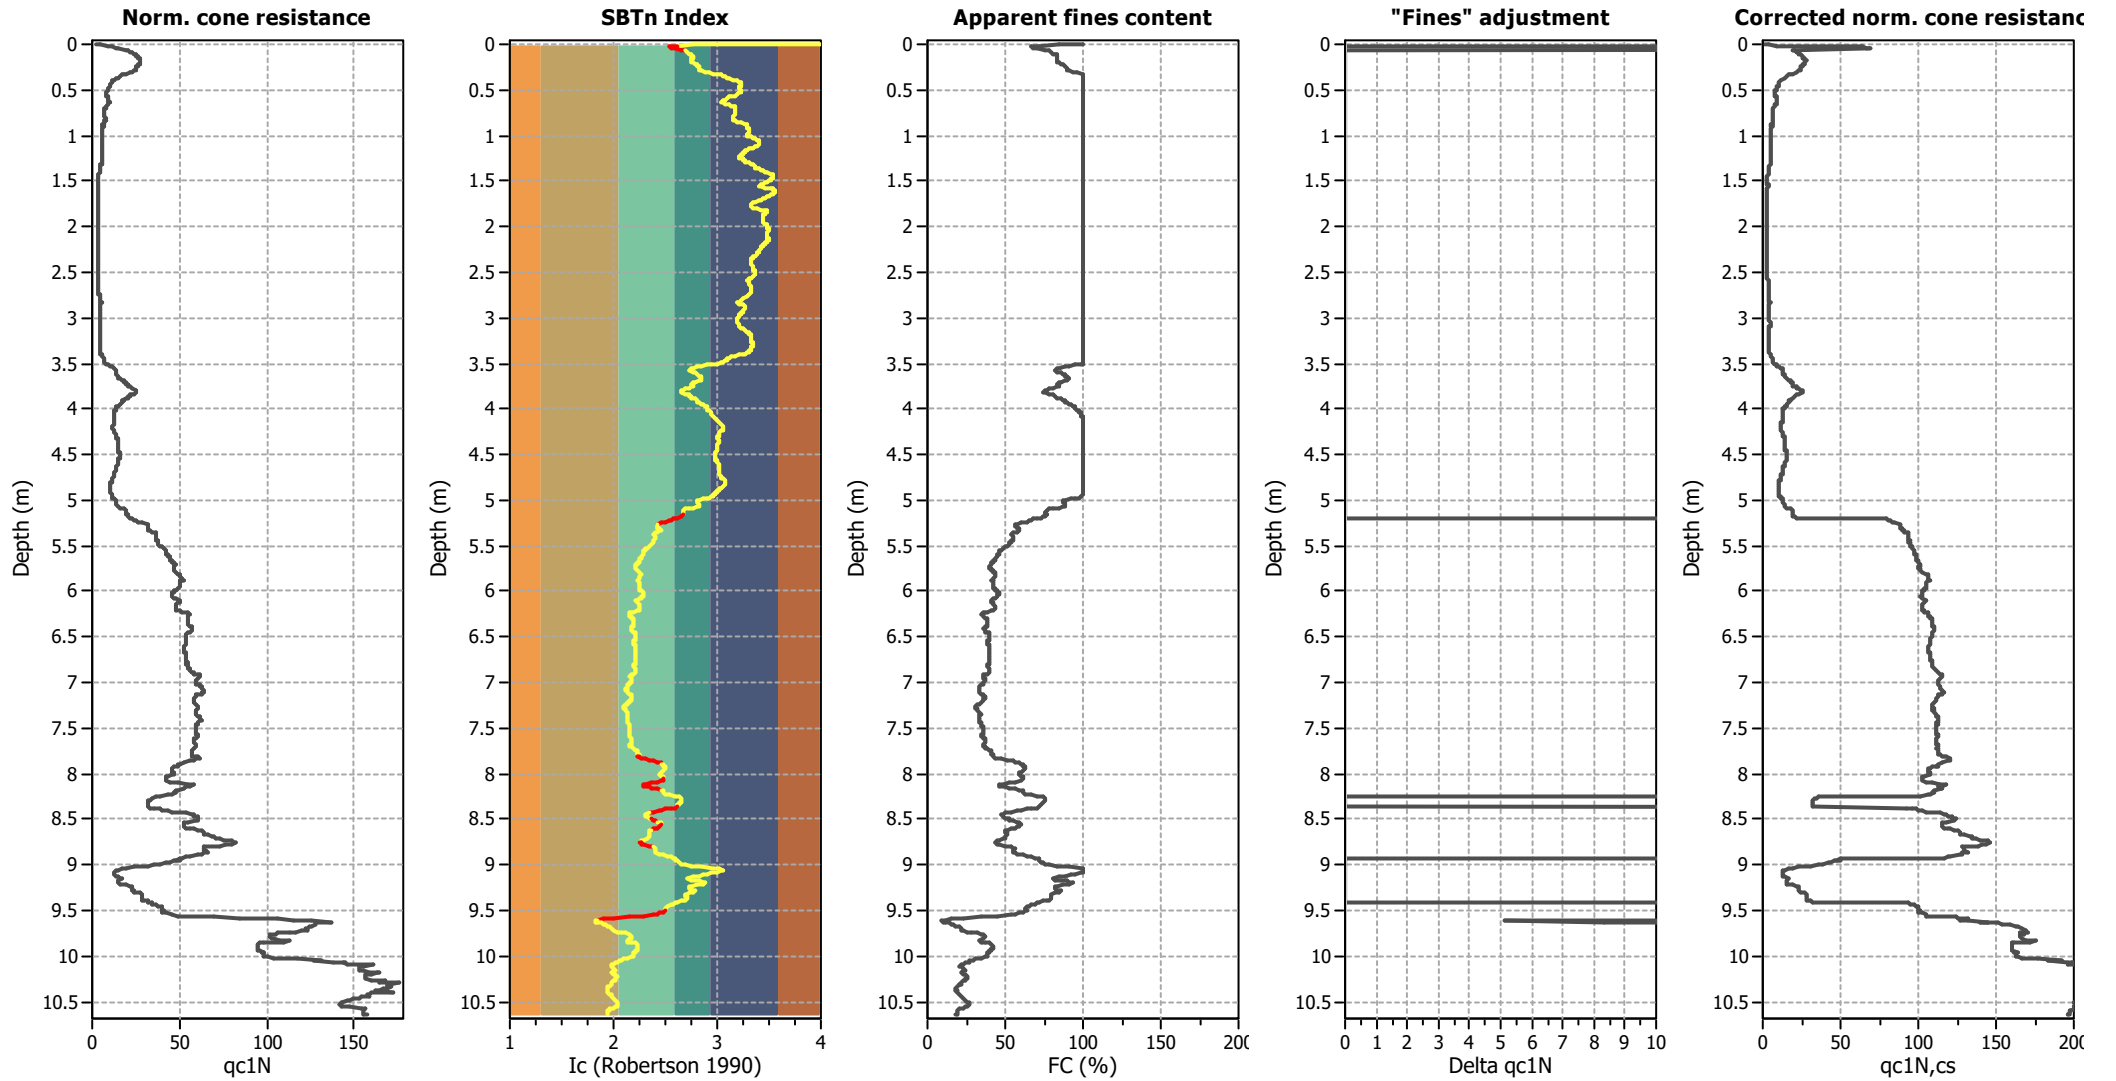

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

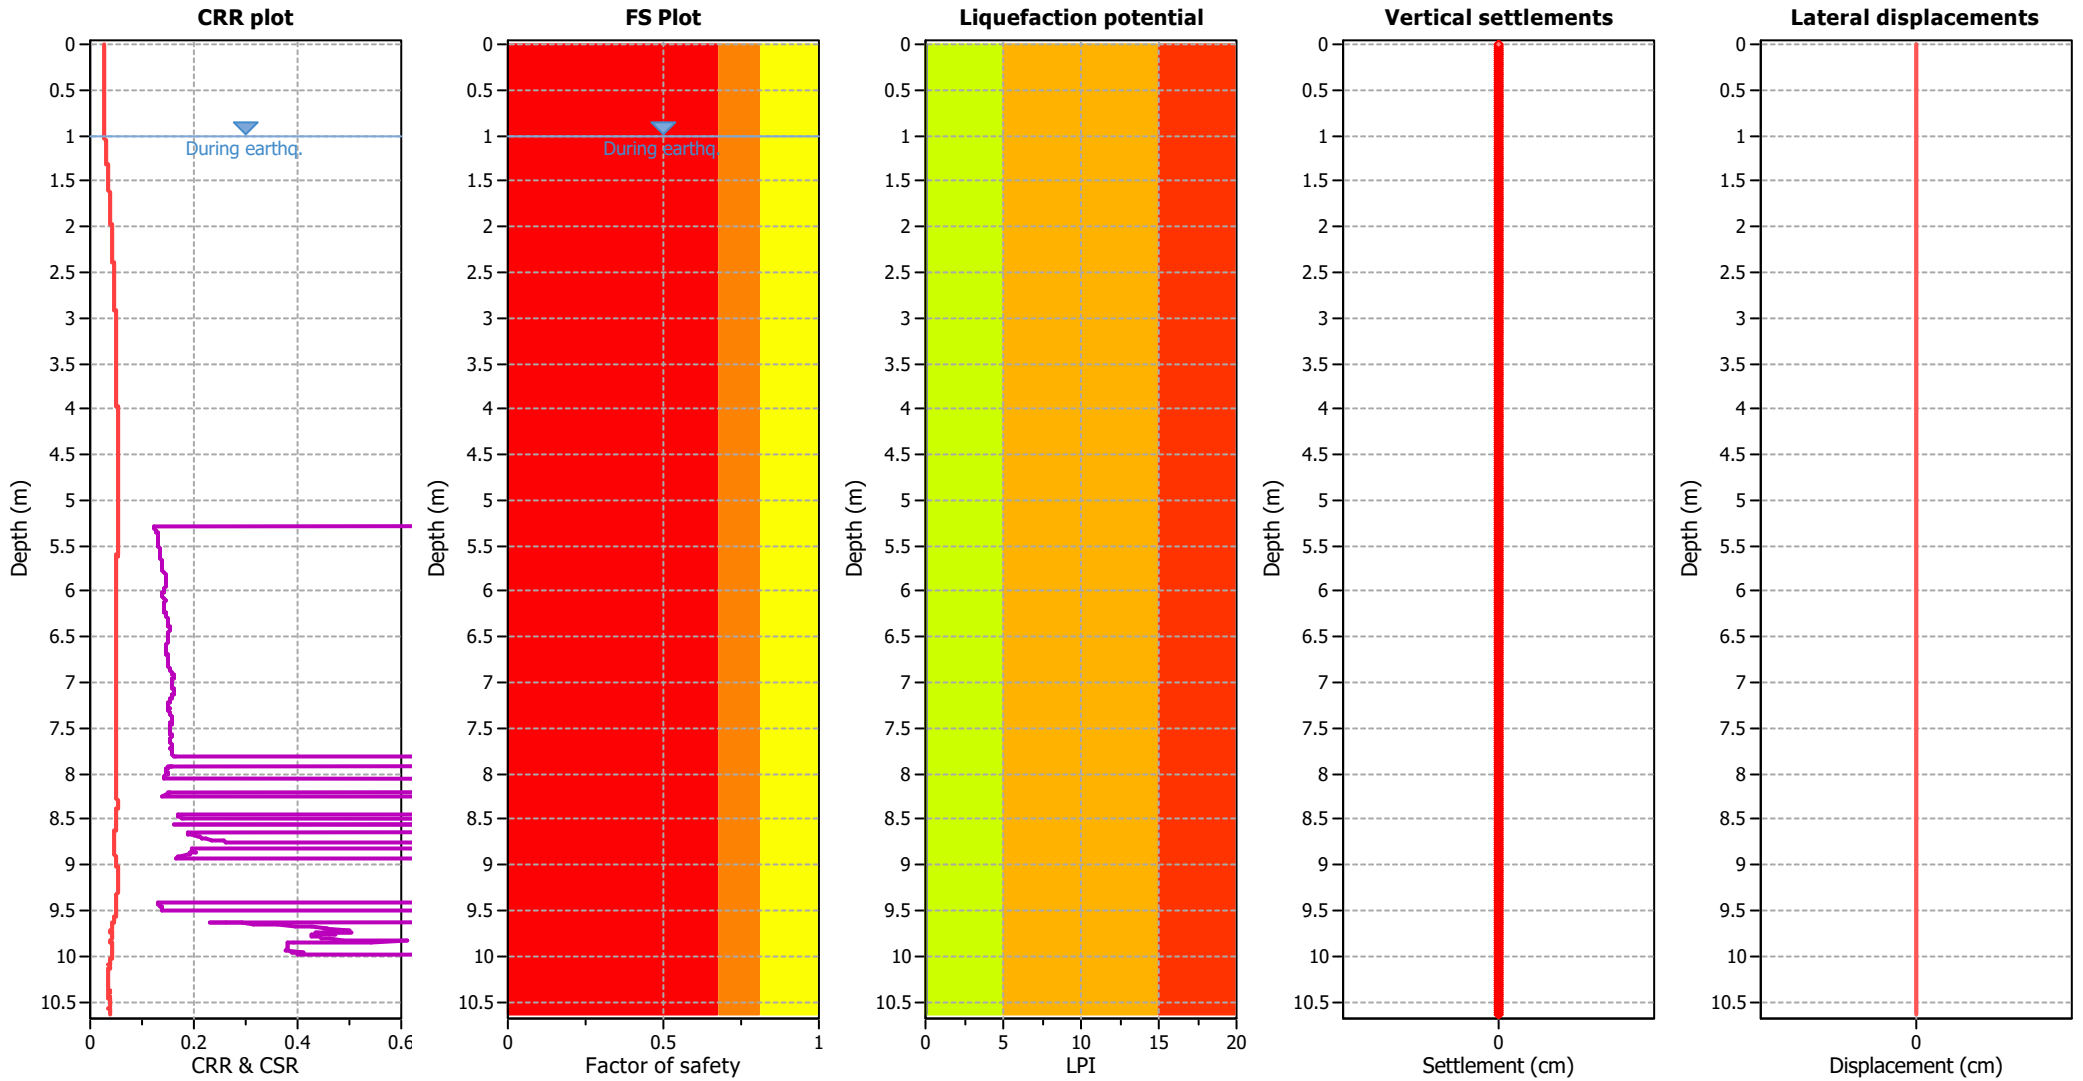

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

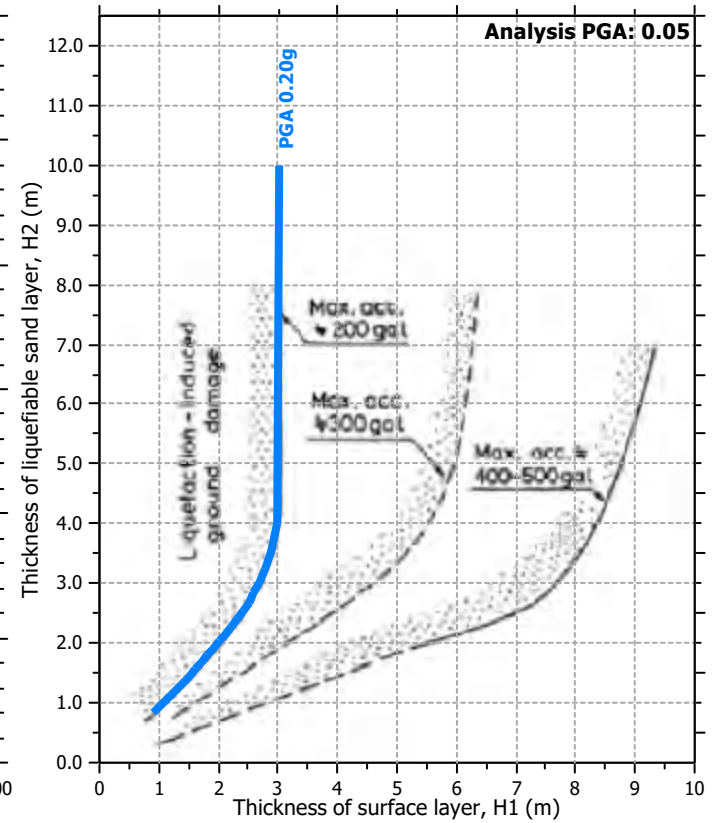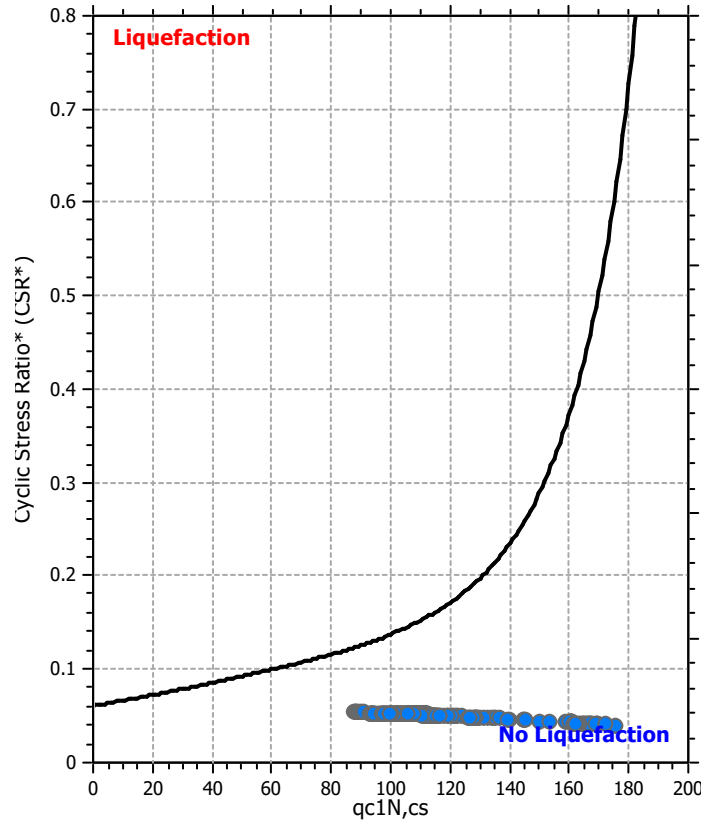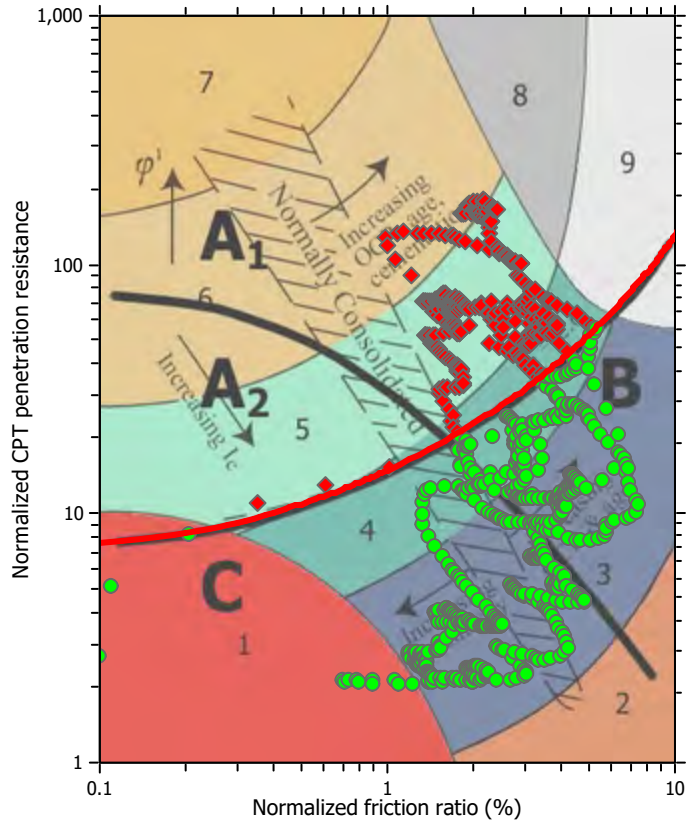

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

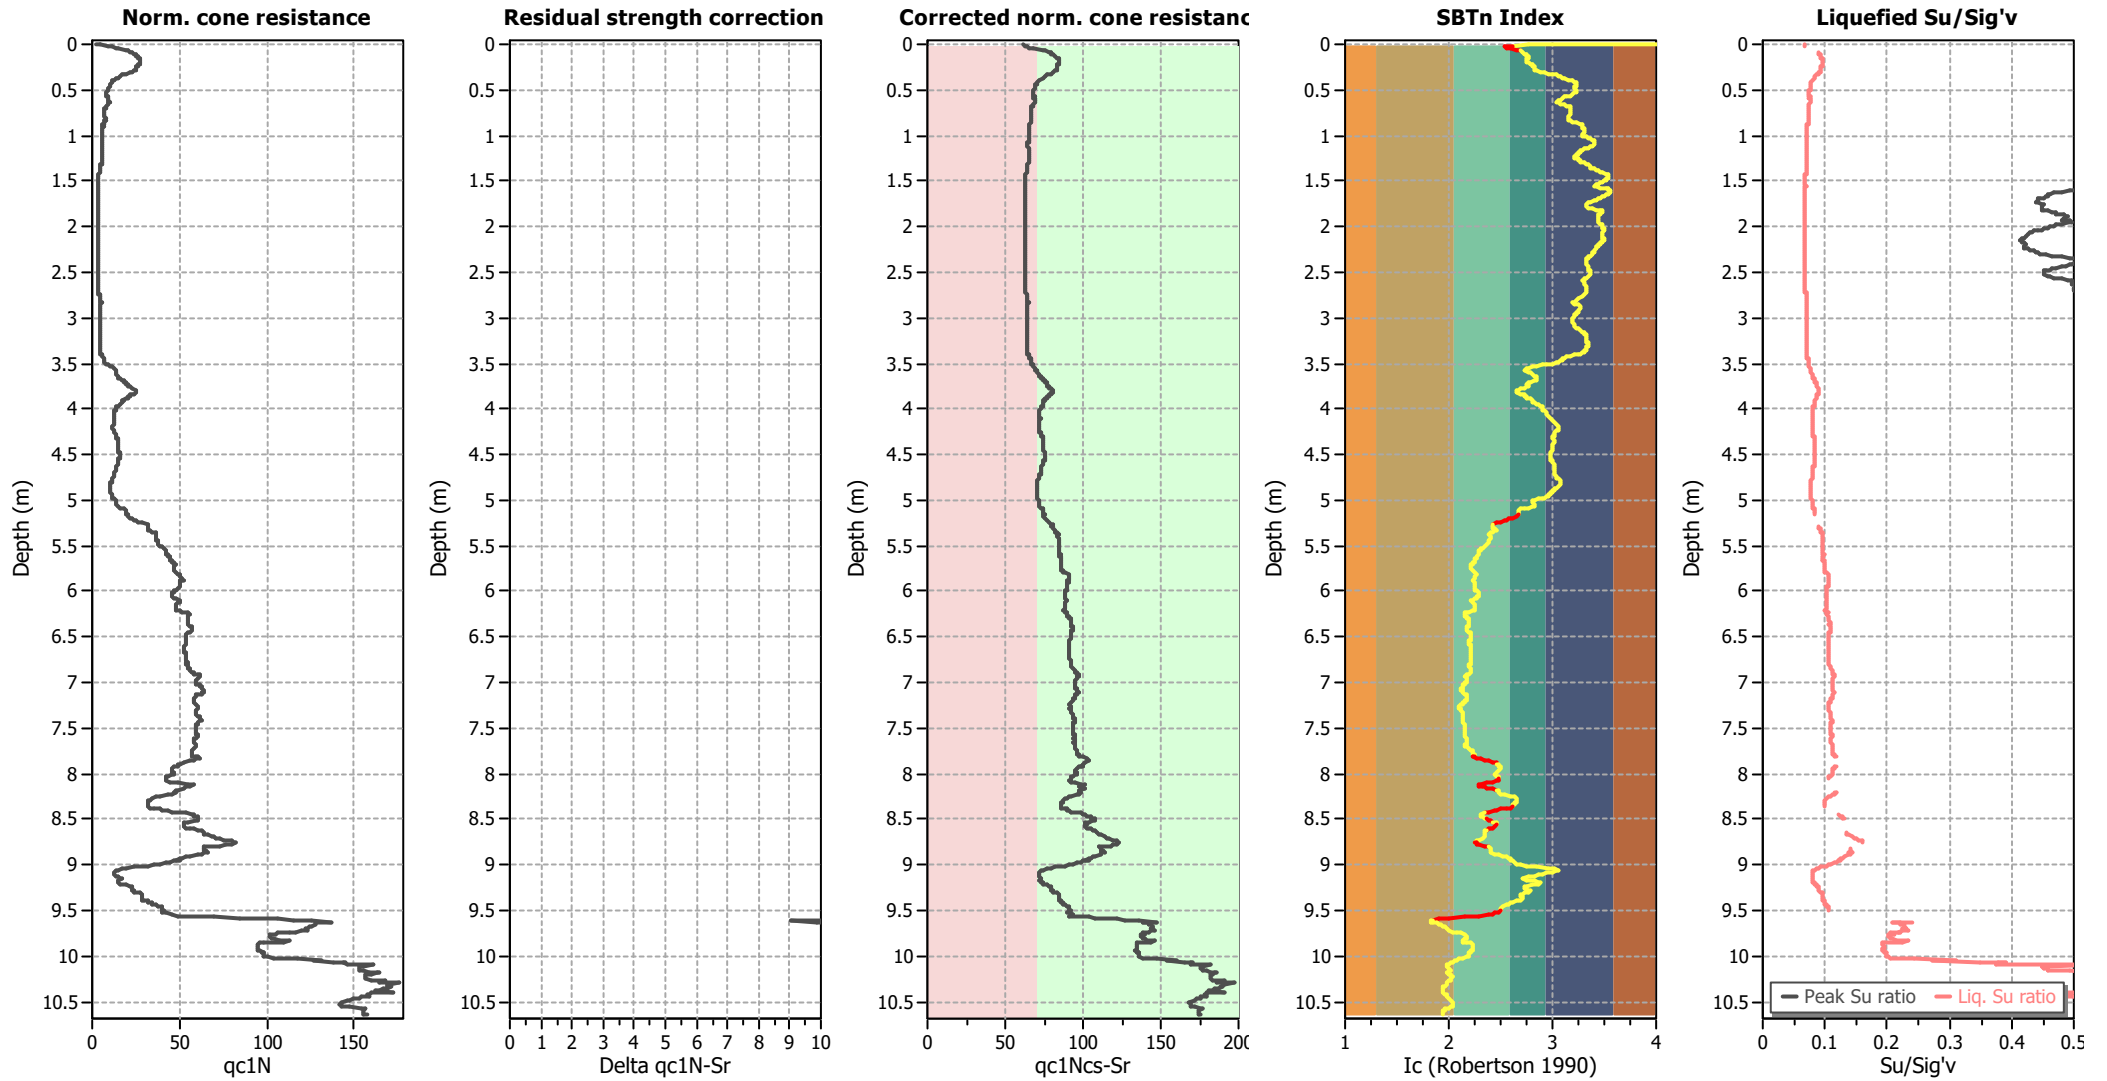

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

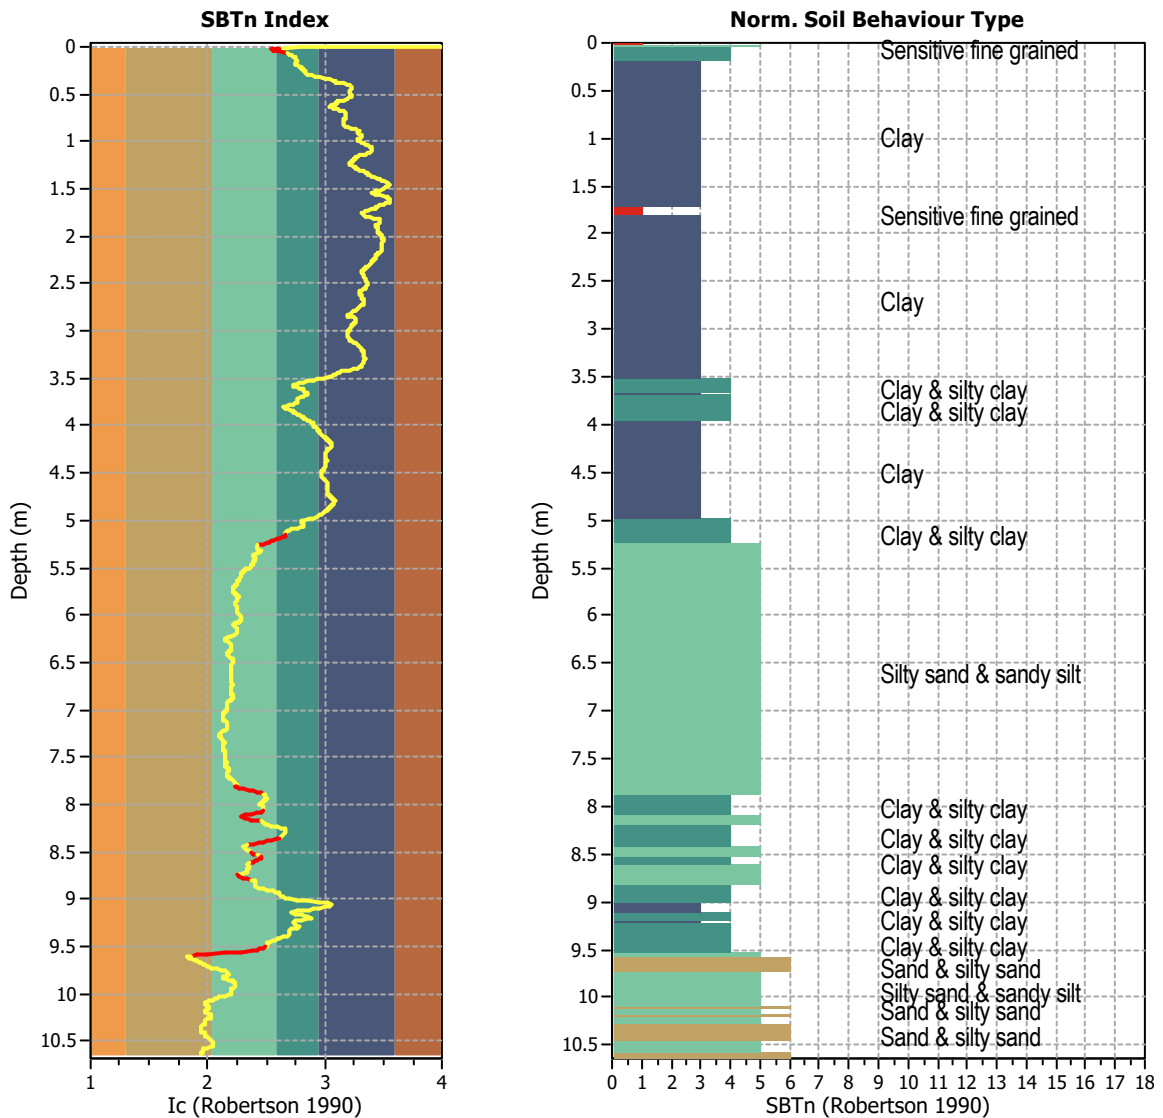


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1065
 Total points excluded: 76
 Exclusion percentage: 7.14%
 Number of layers detected: 10


Estimation of post-earthquake settlements

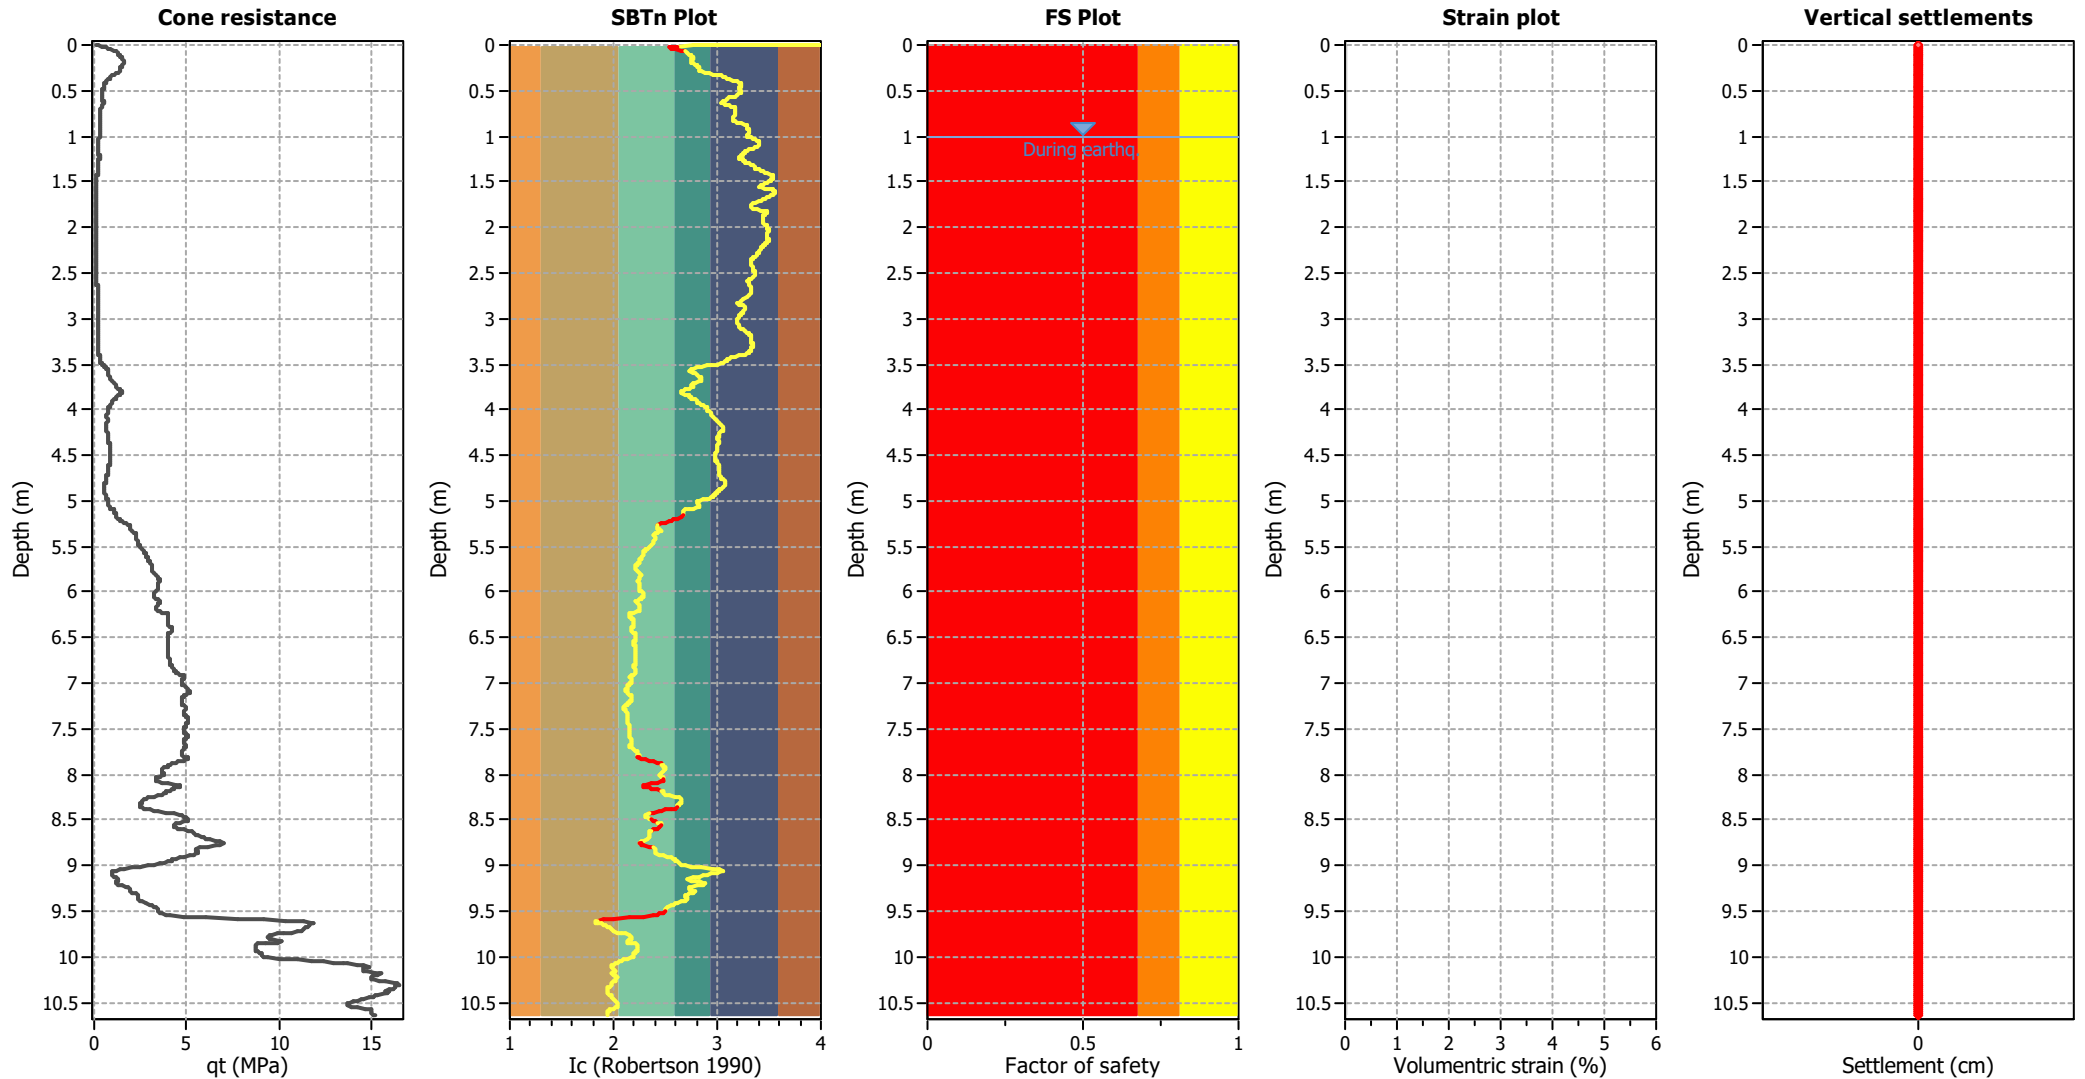

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

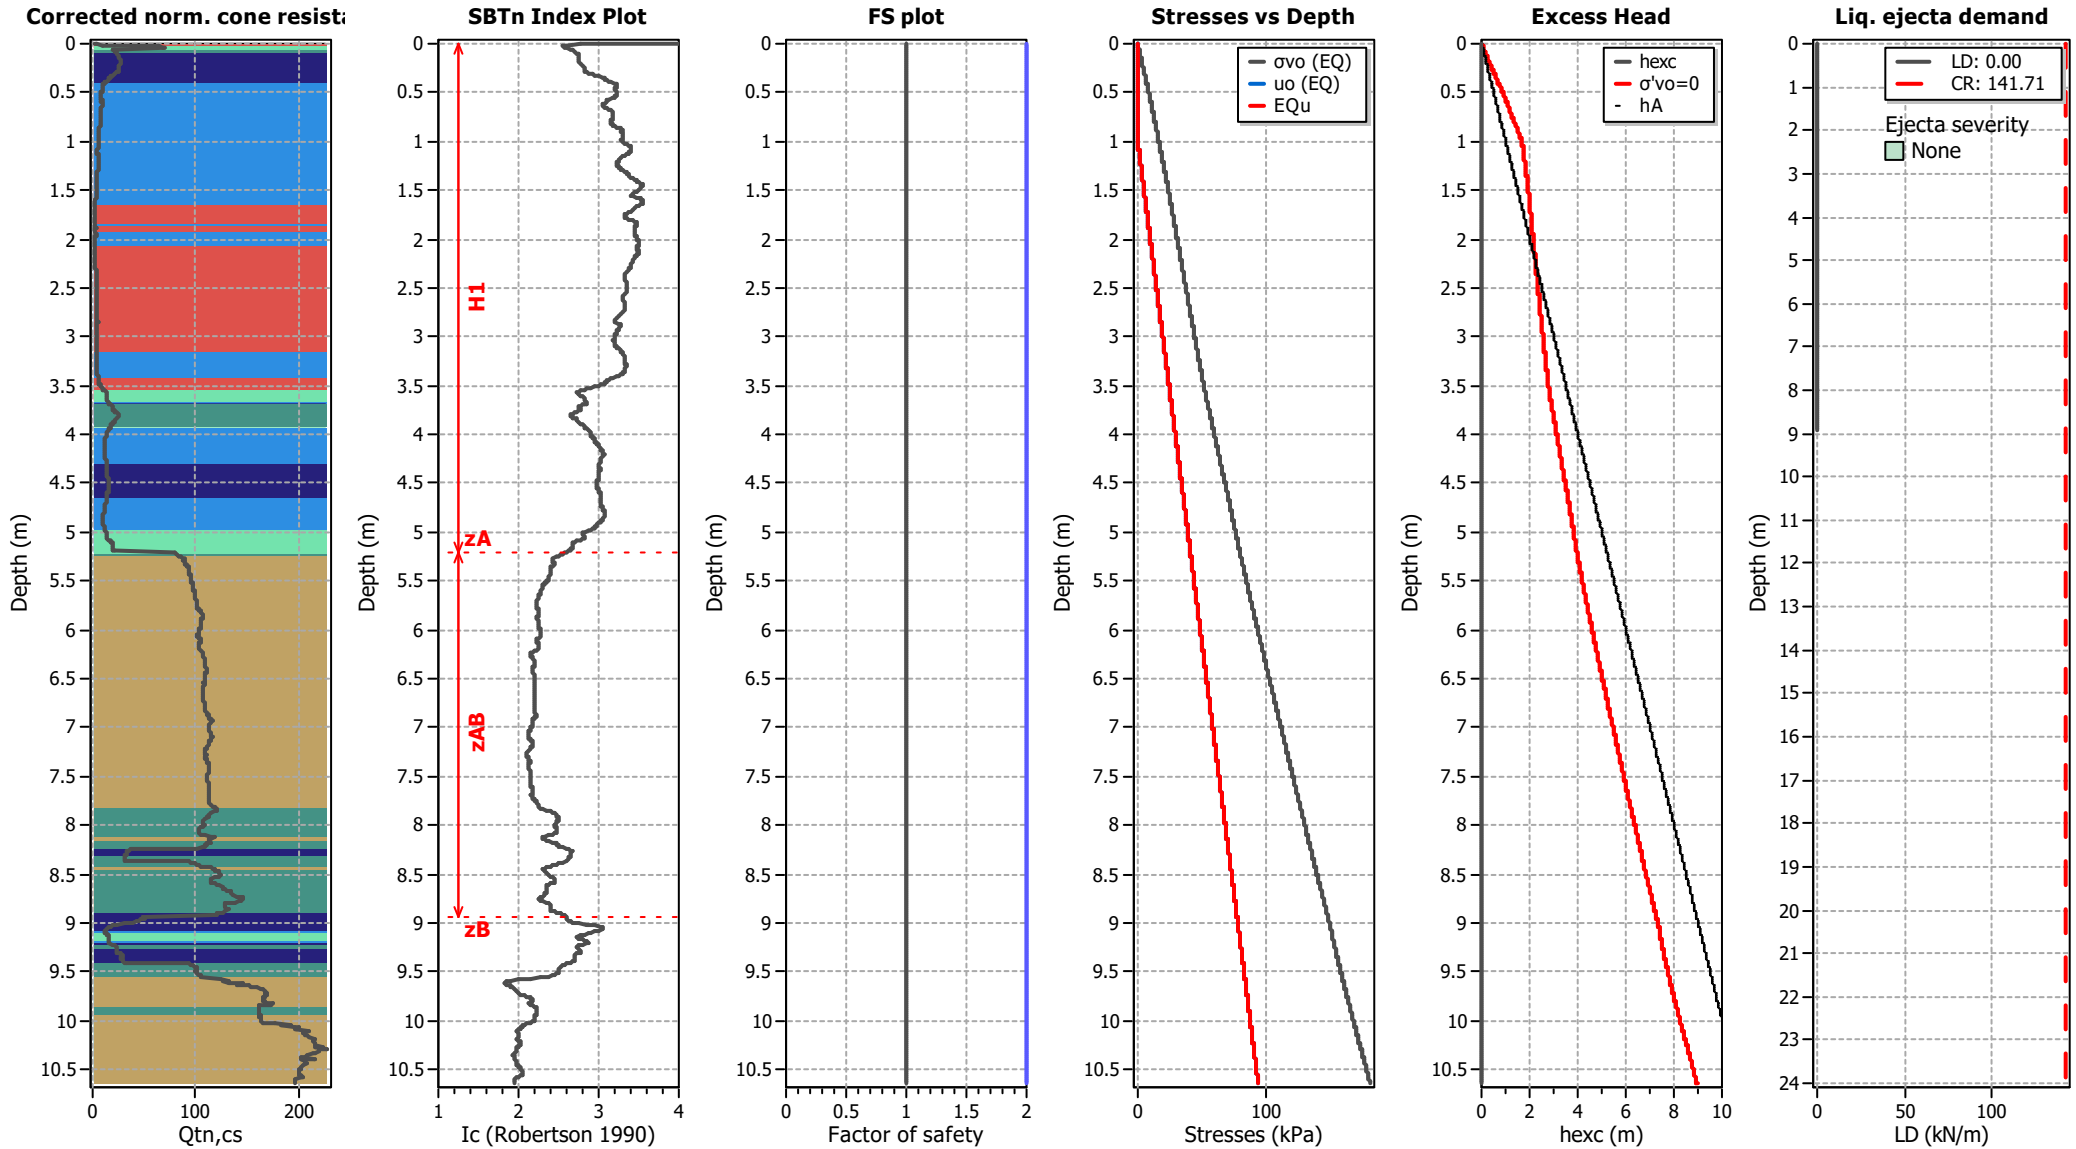

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT17

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05			K_σ applied:	Yes		

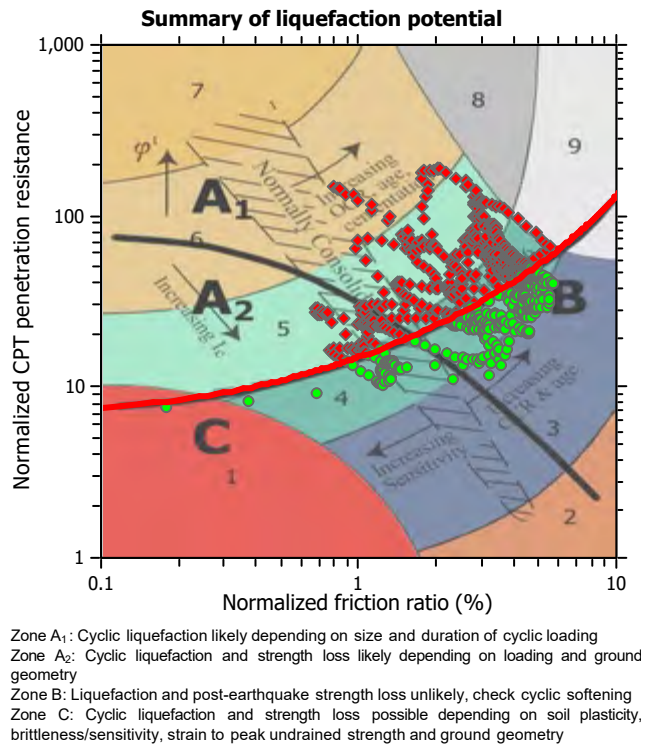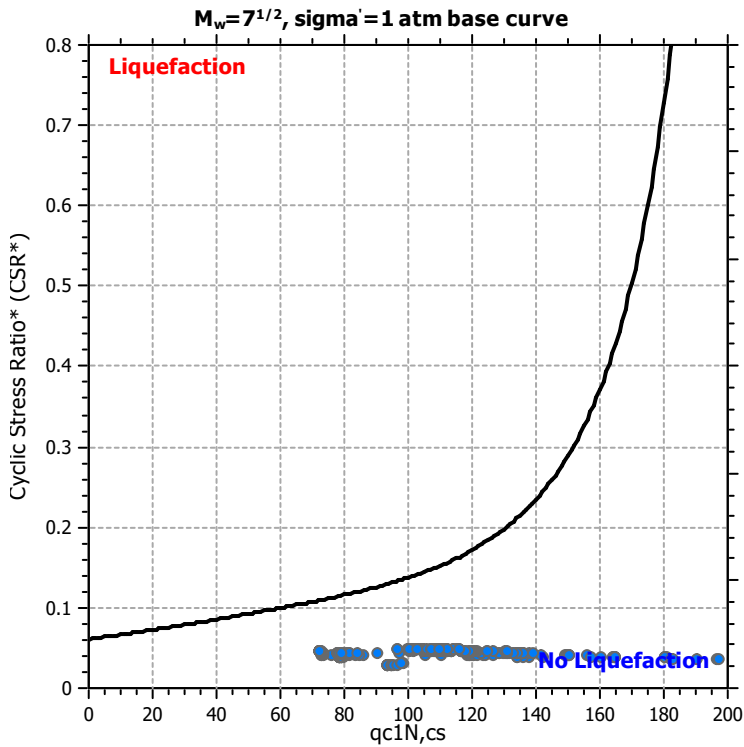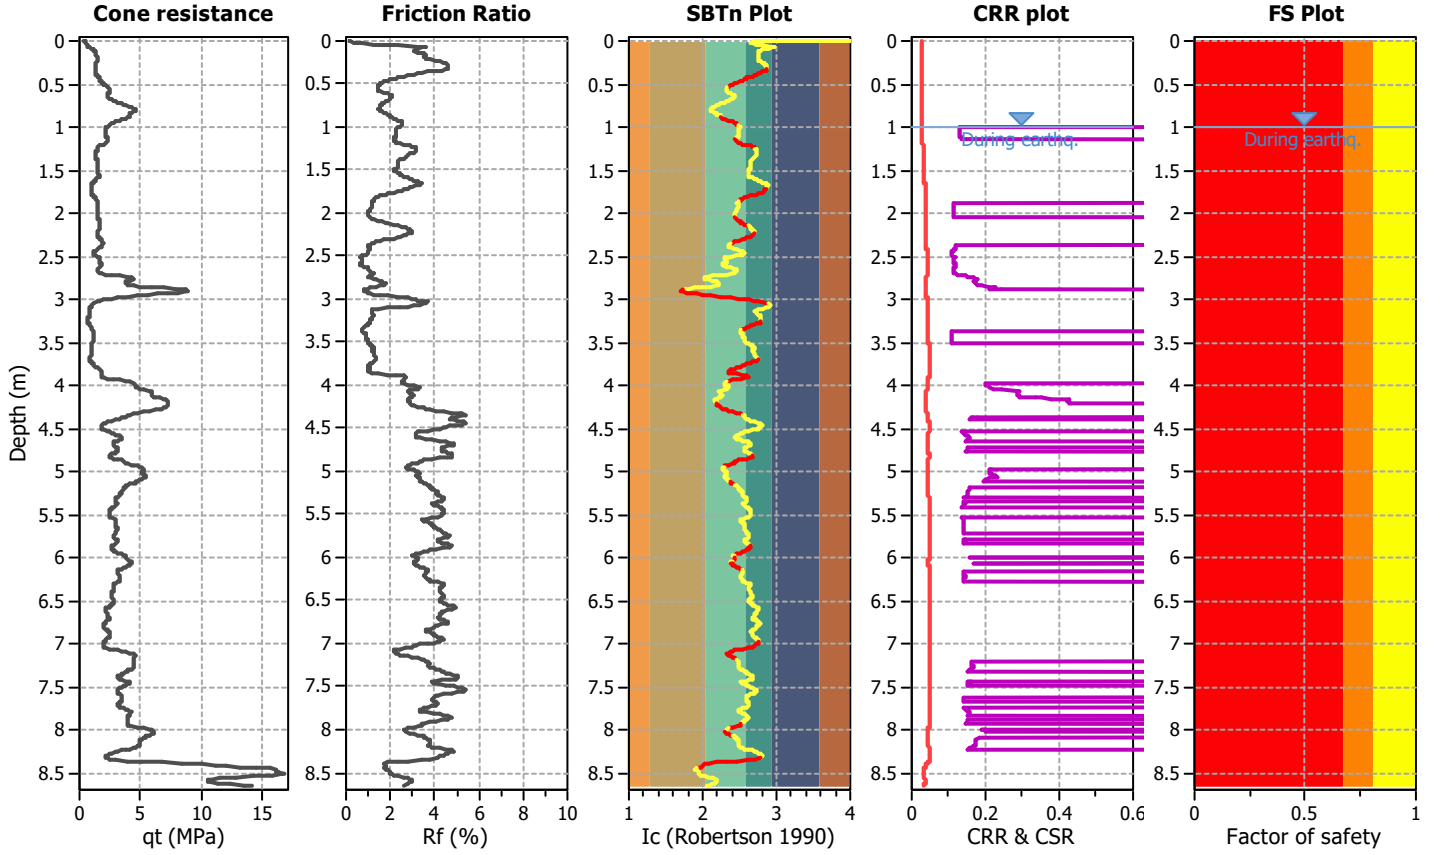

CPT basic interpretation plots

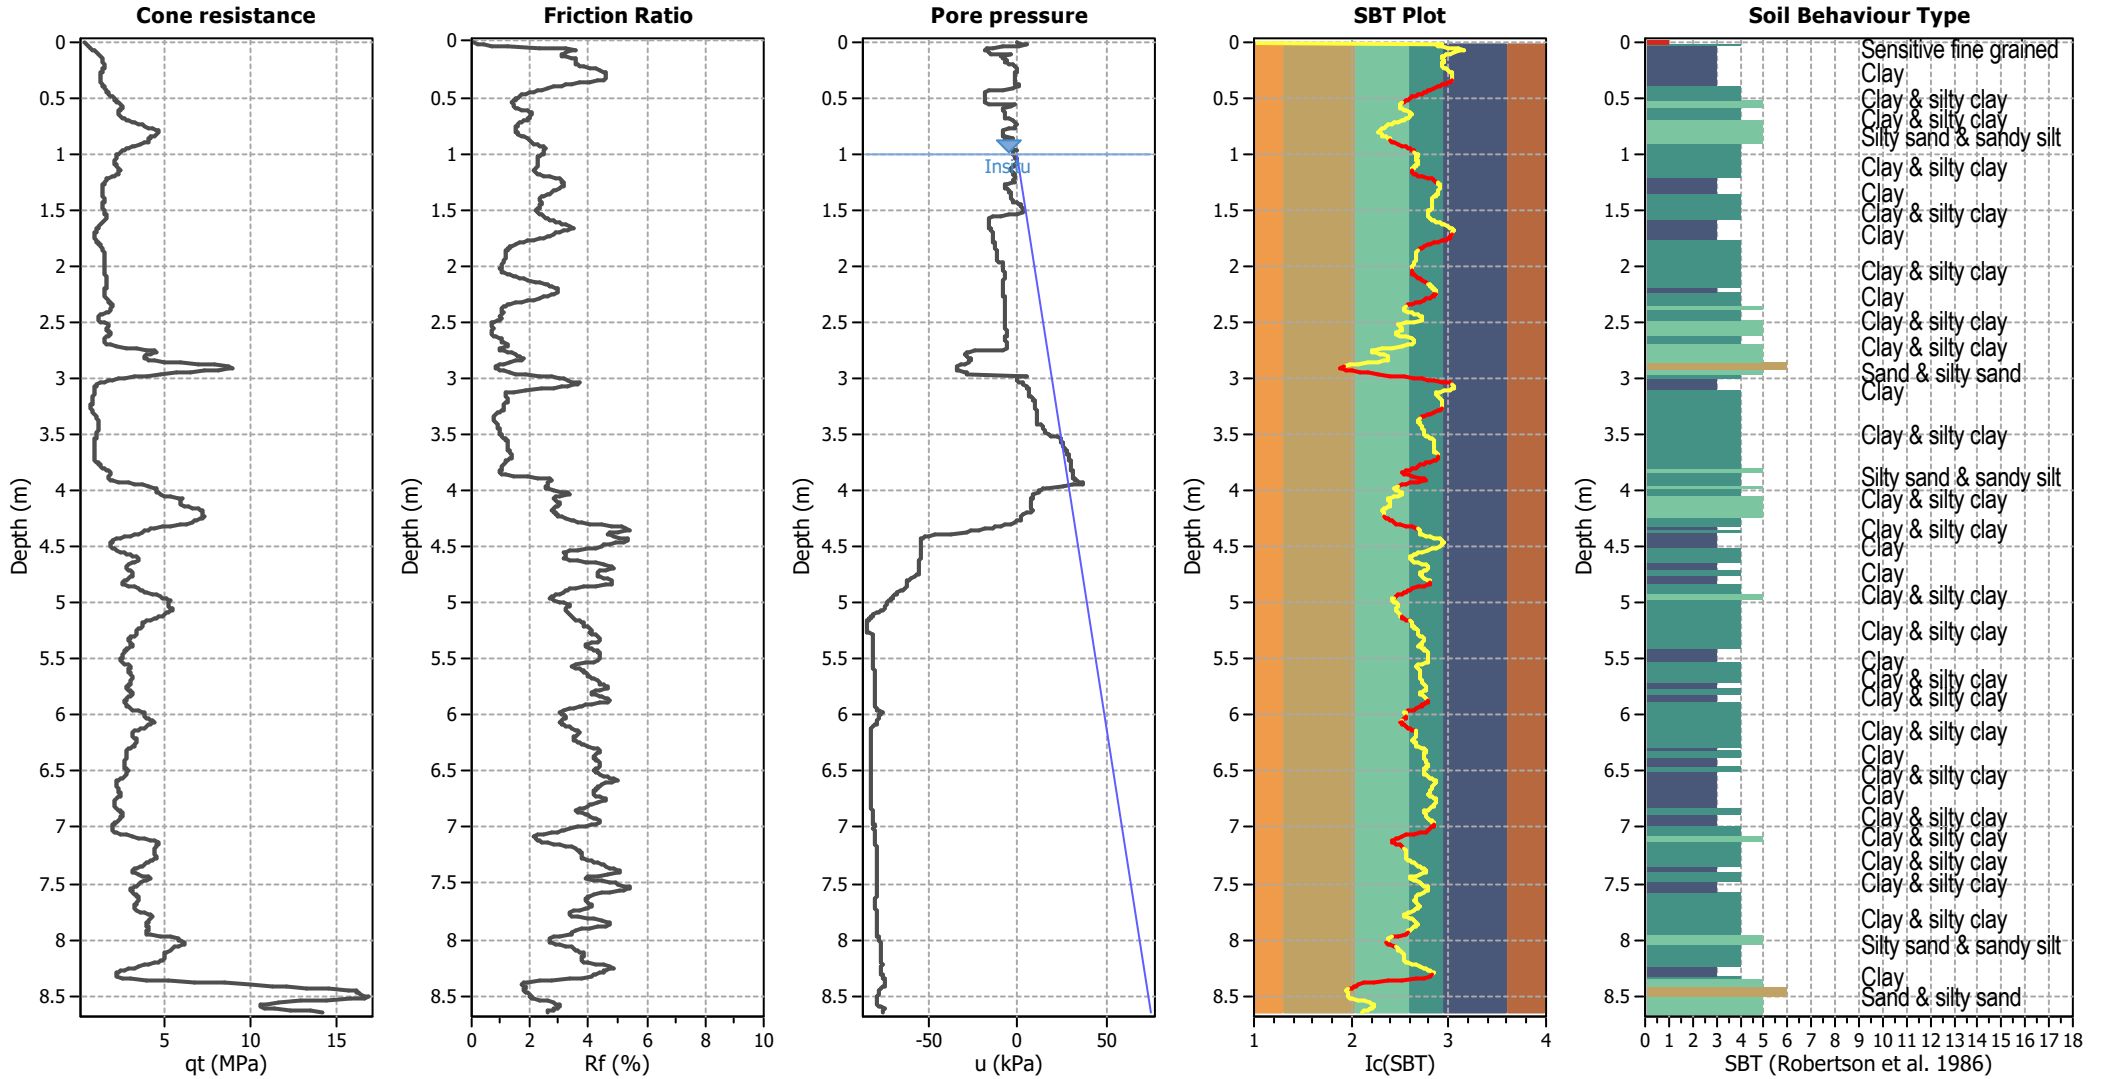


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

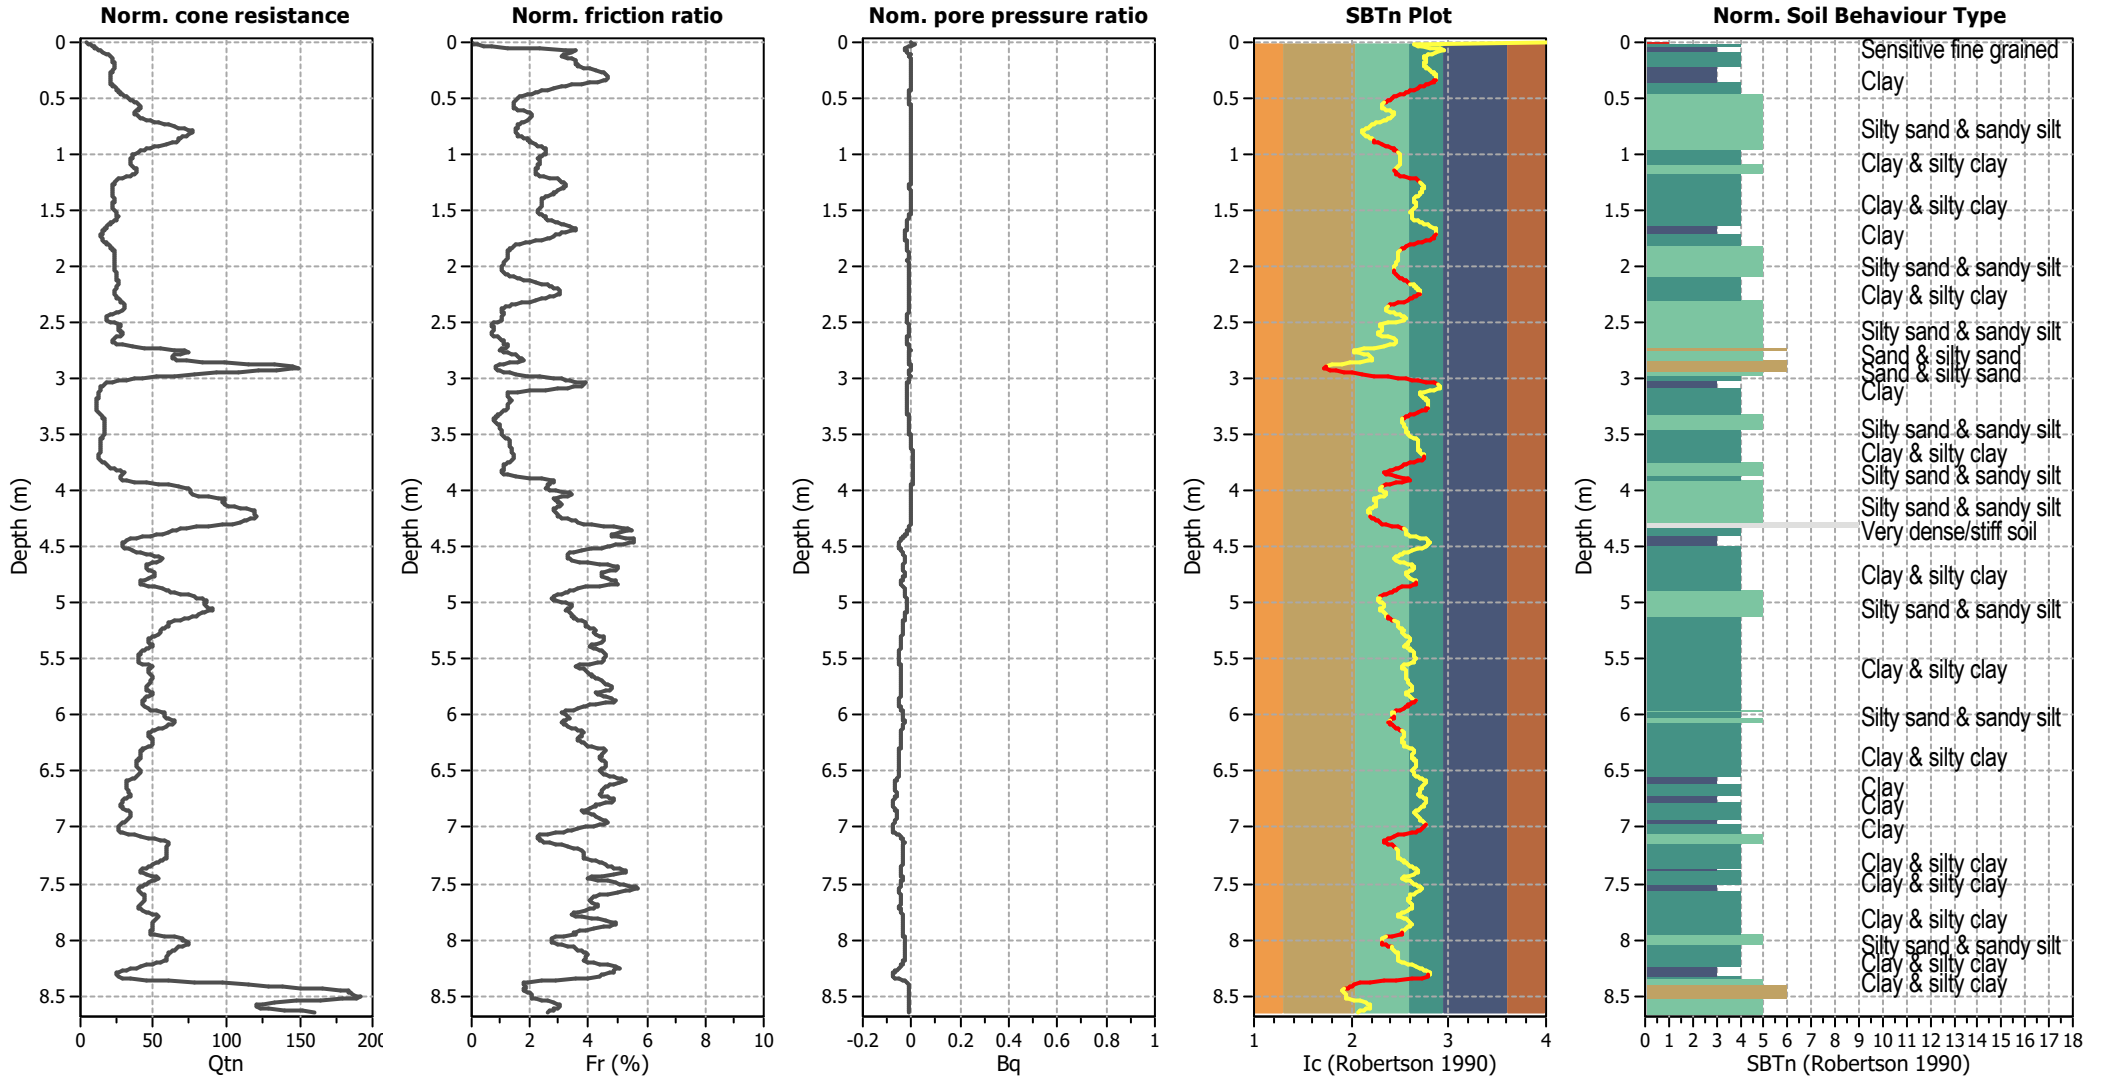


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

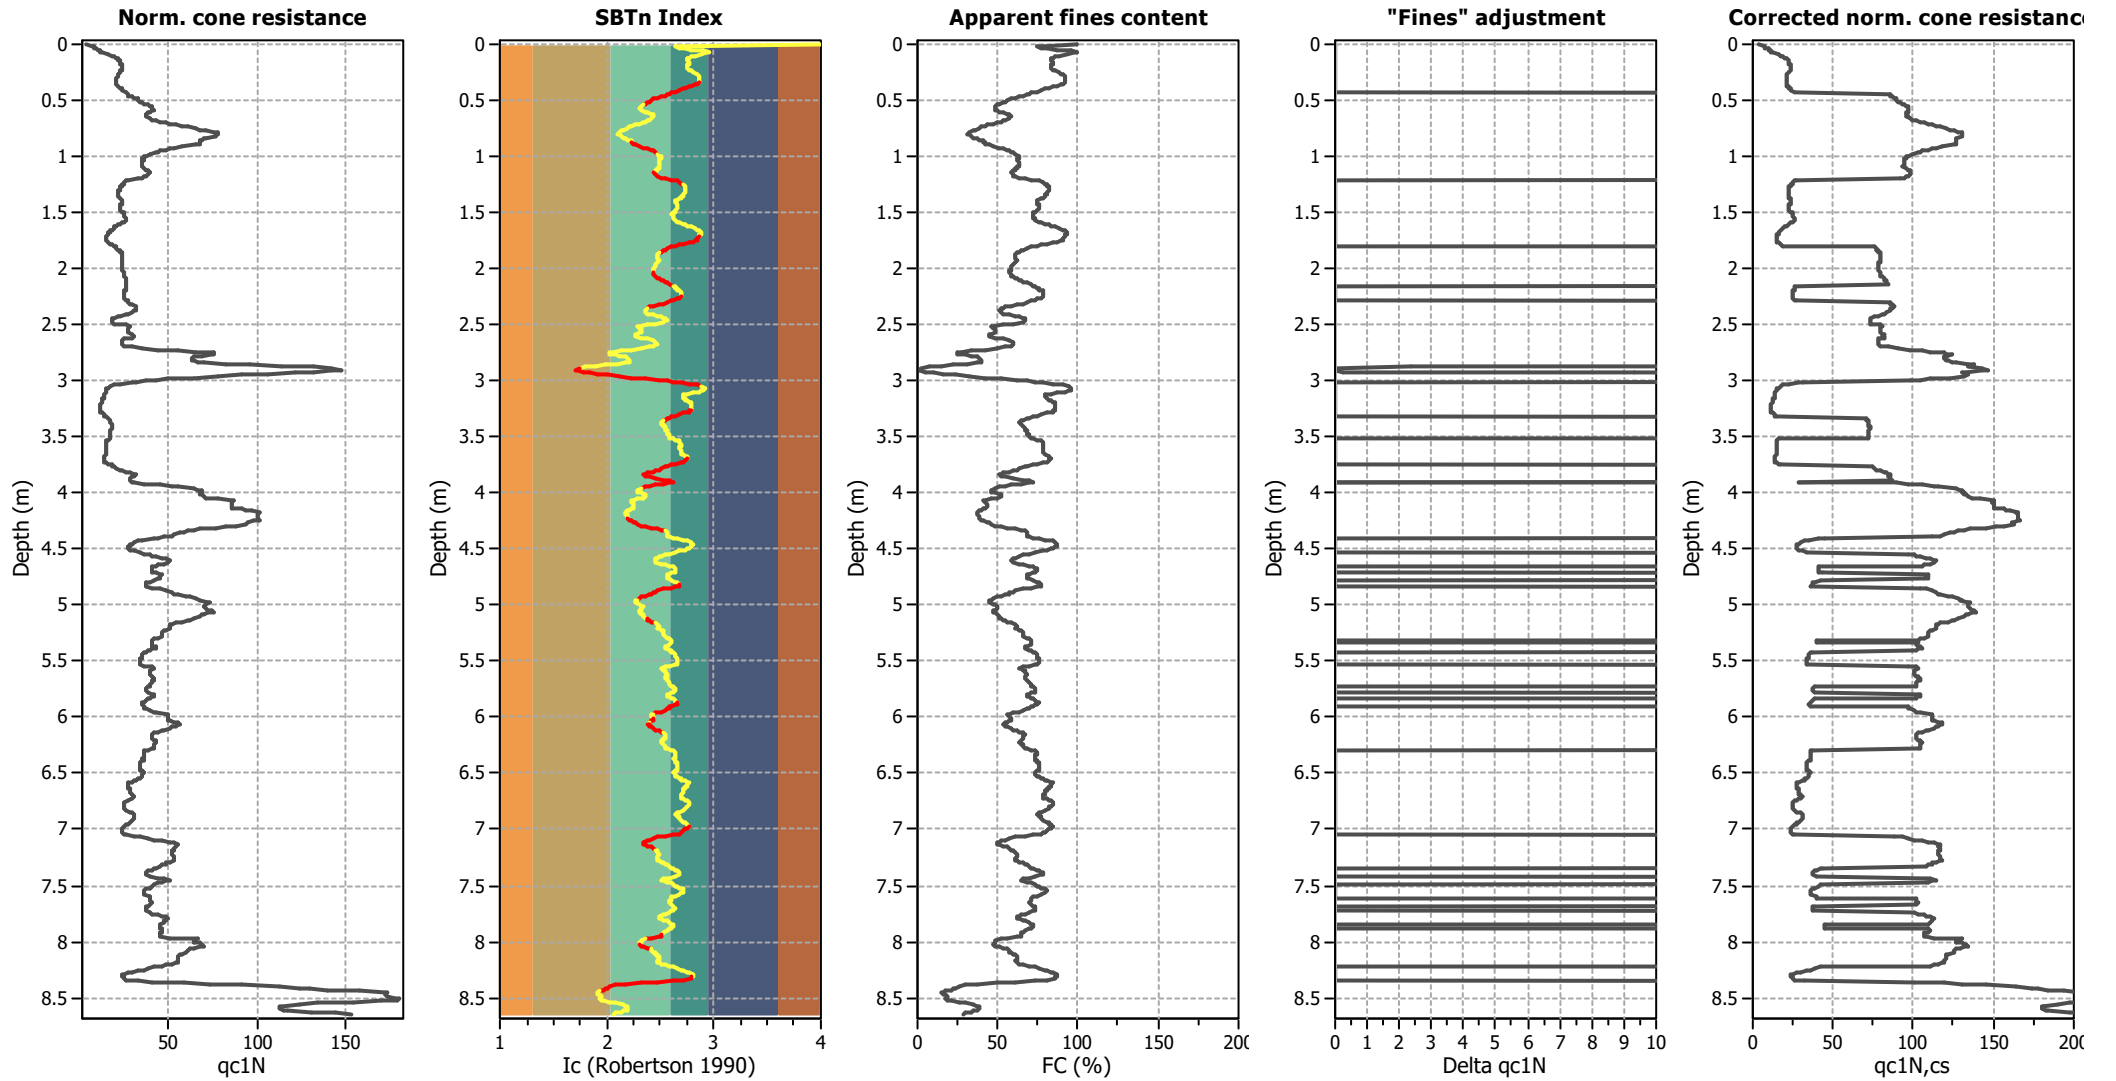

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

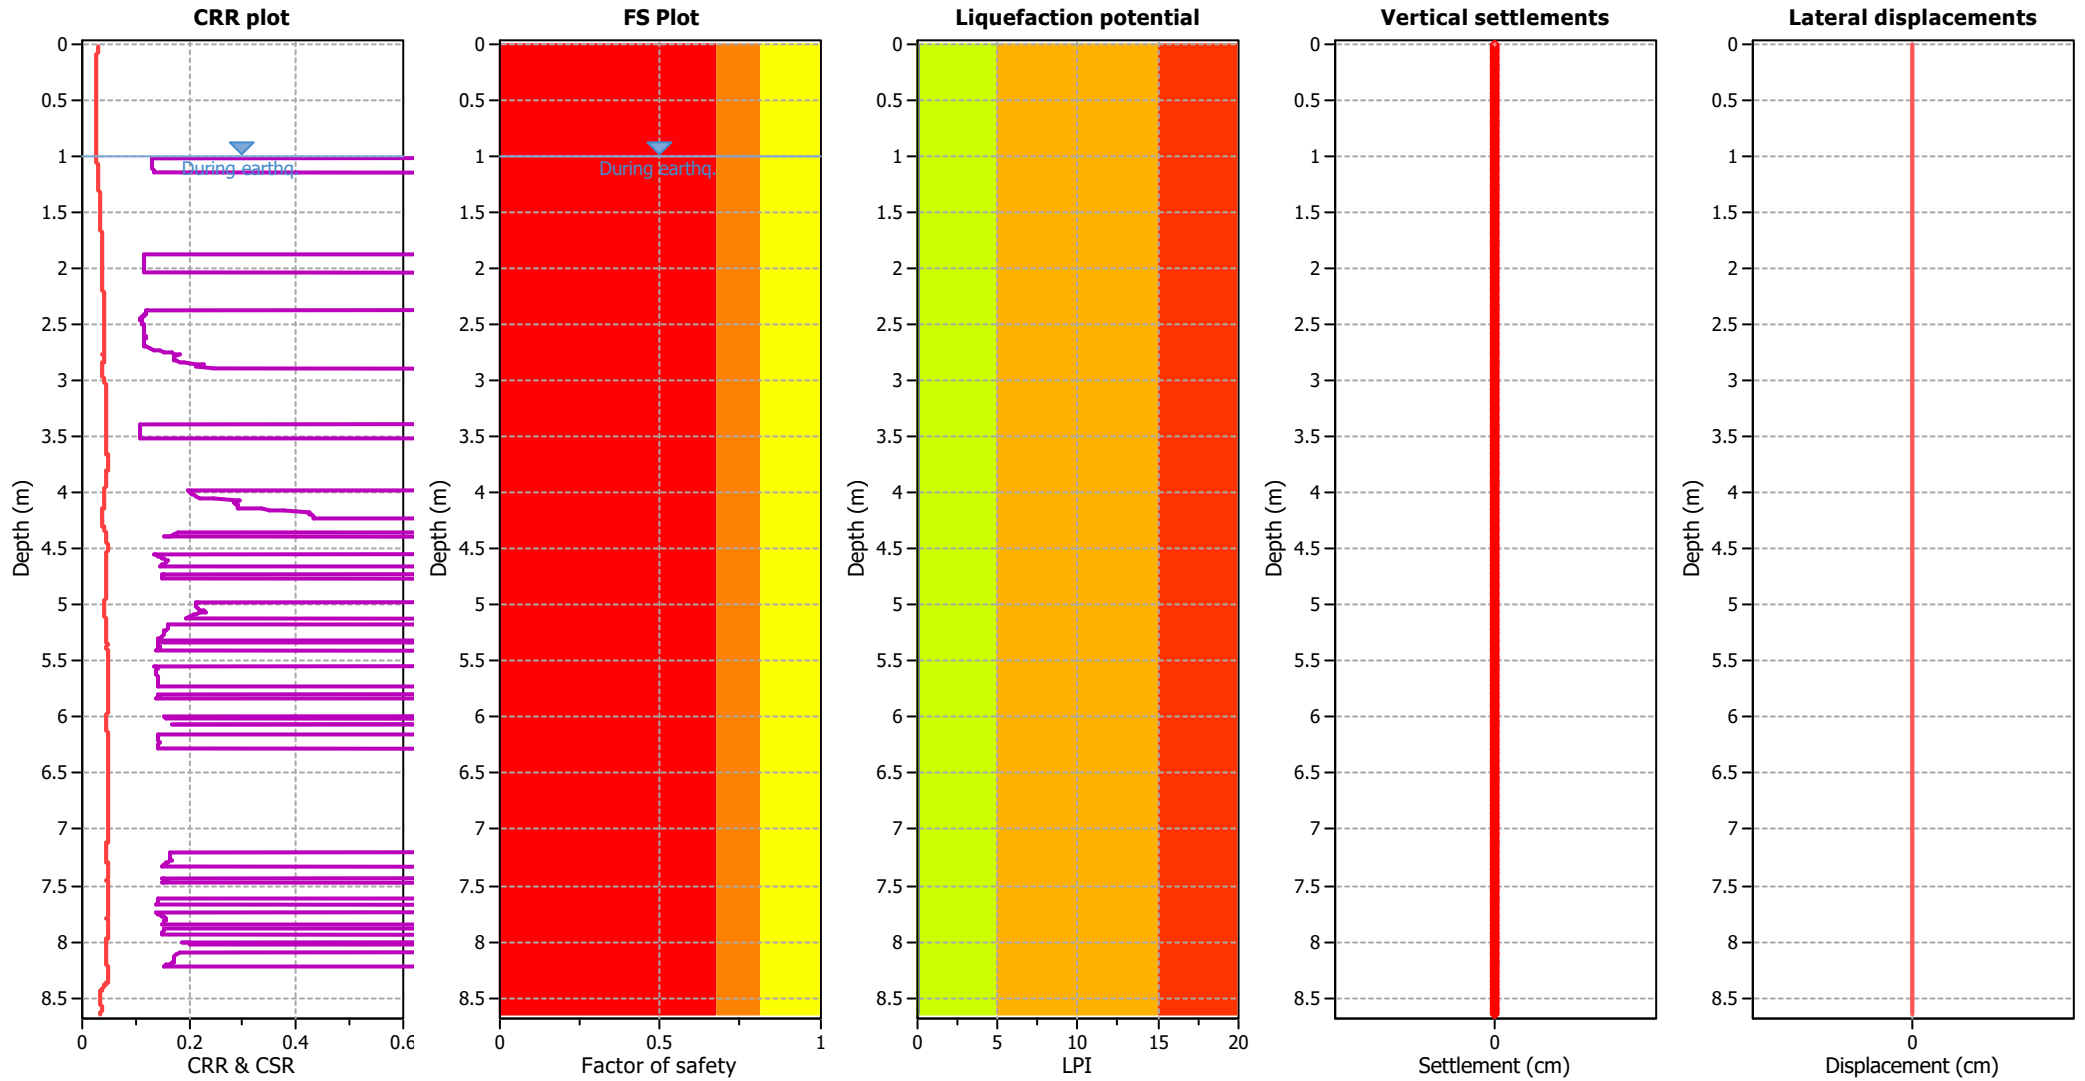

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

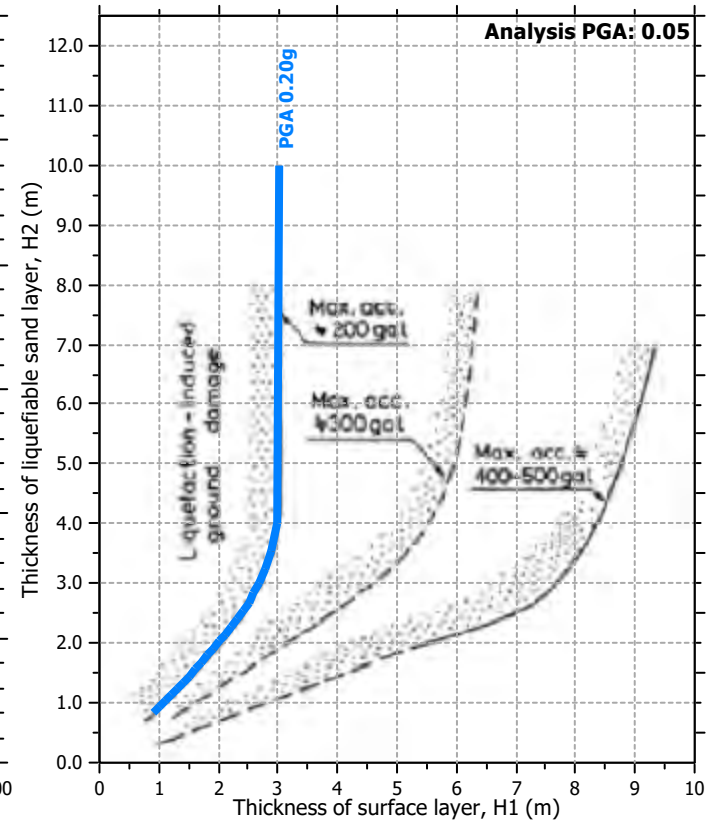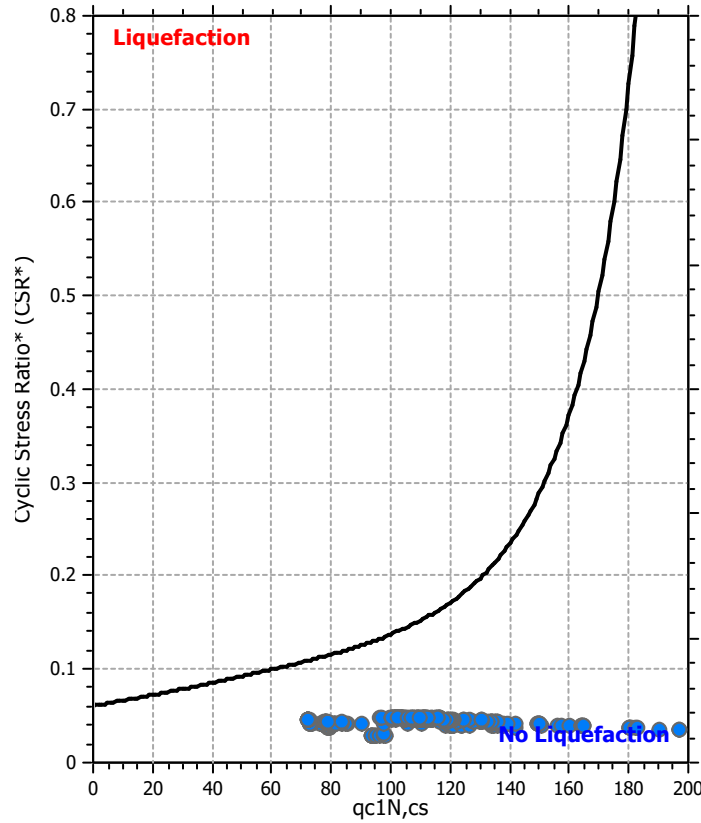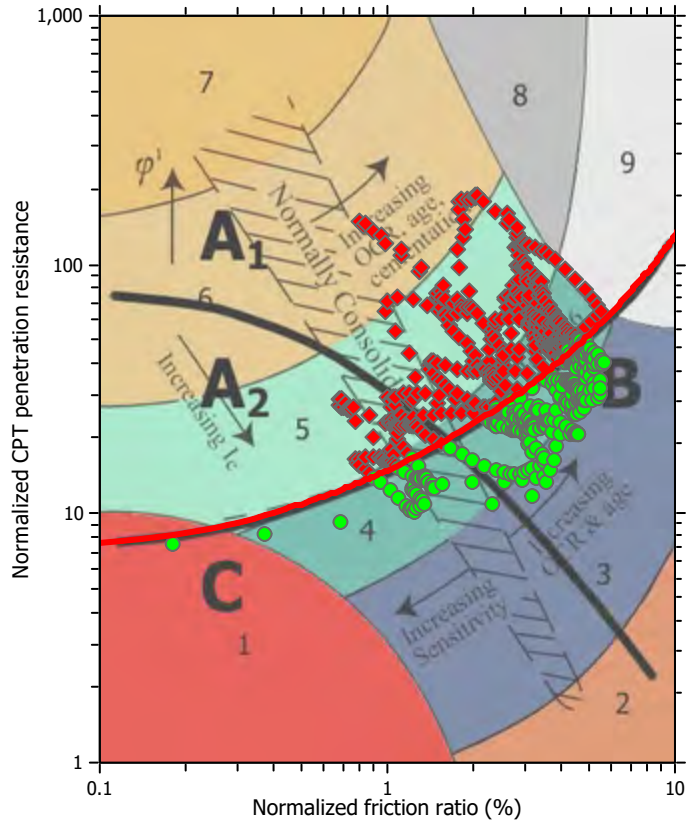

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

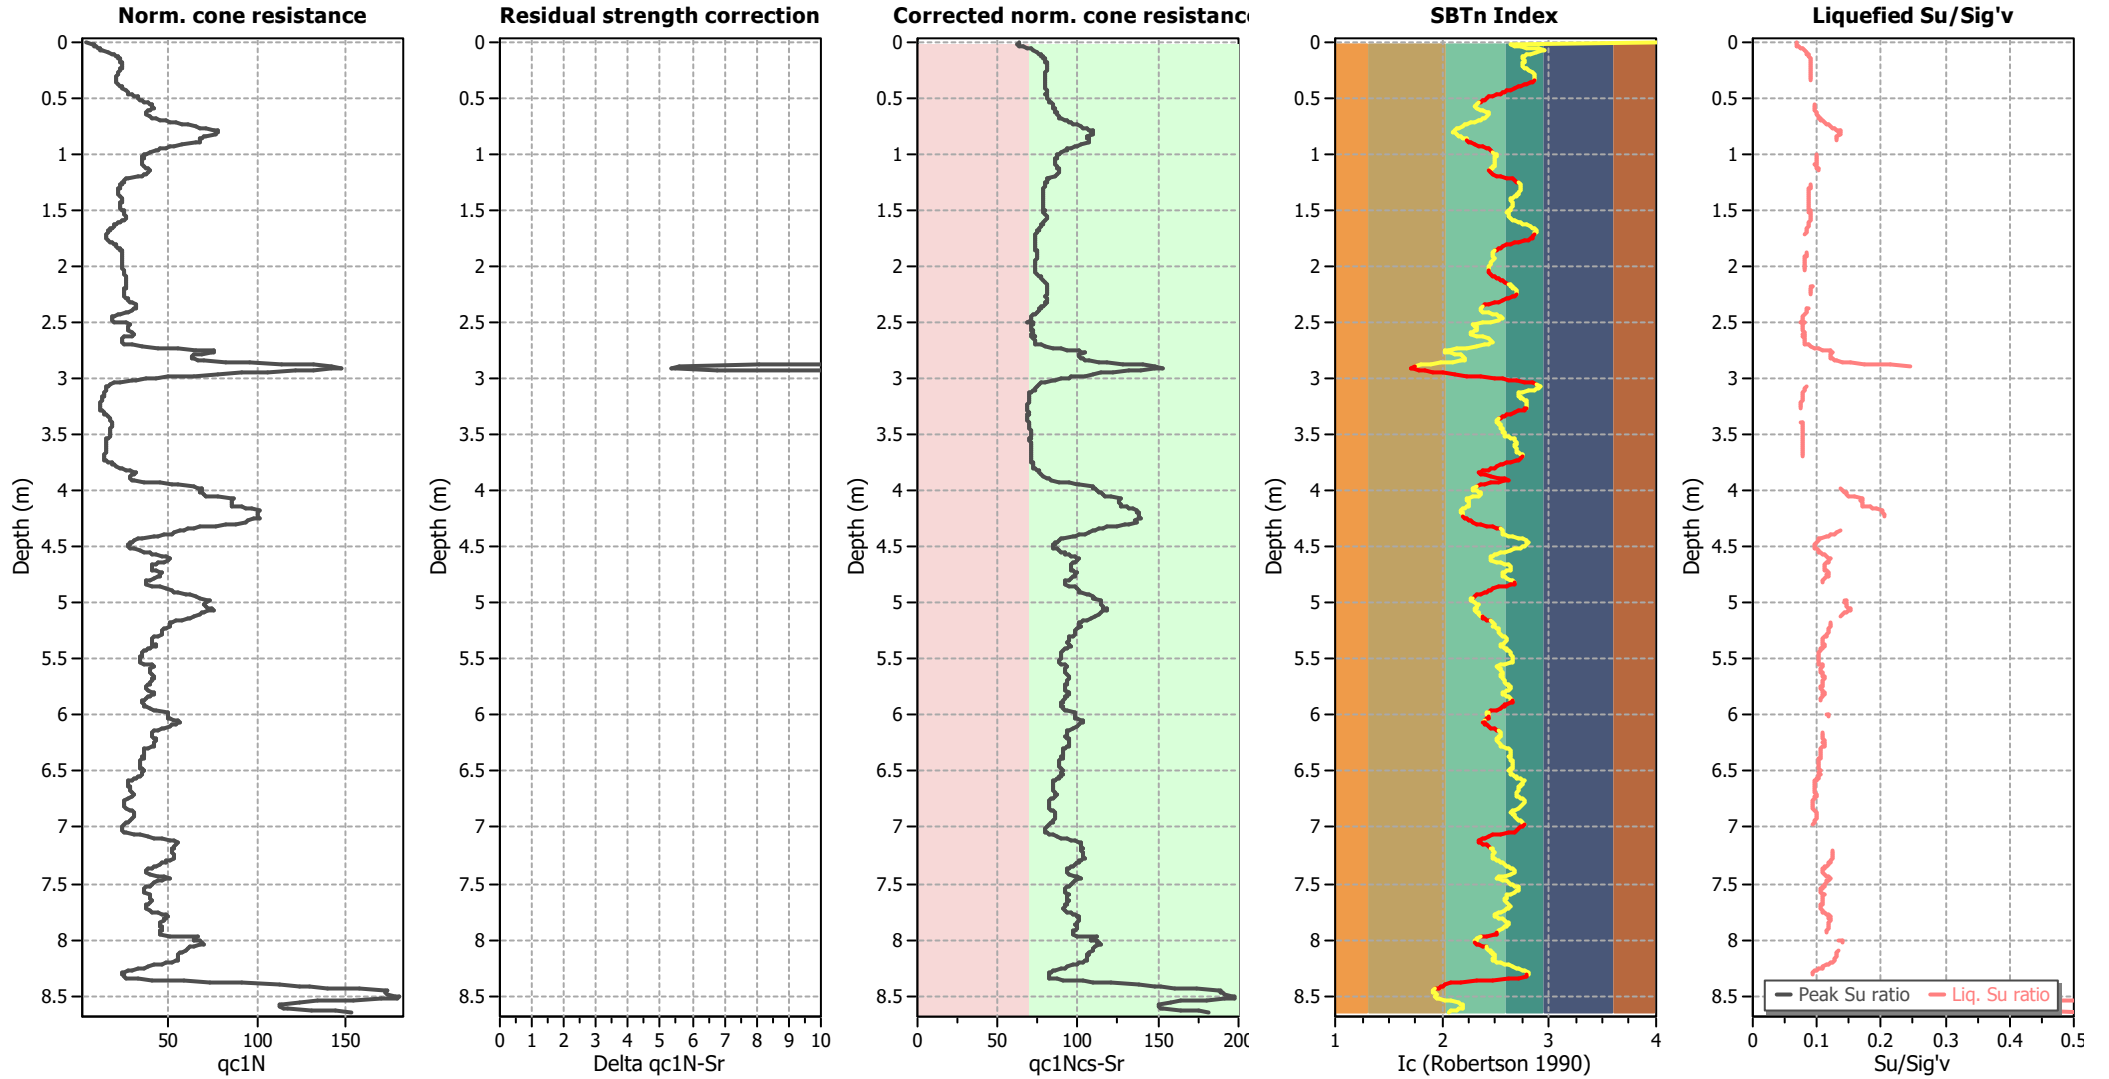

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

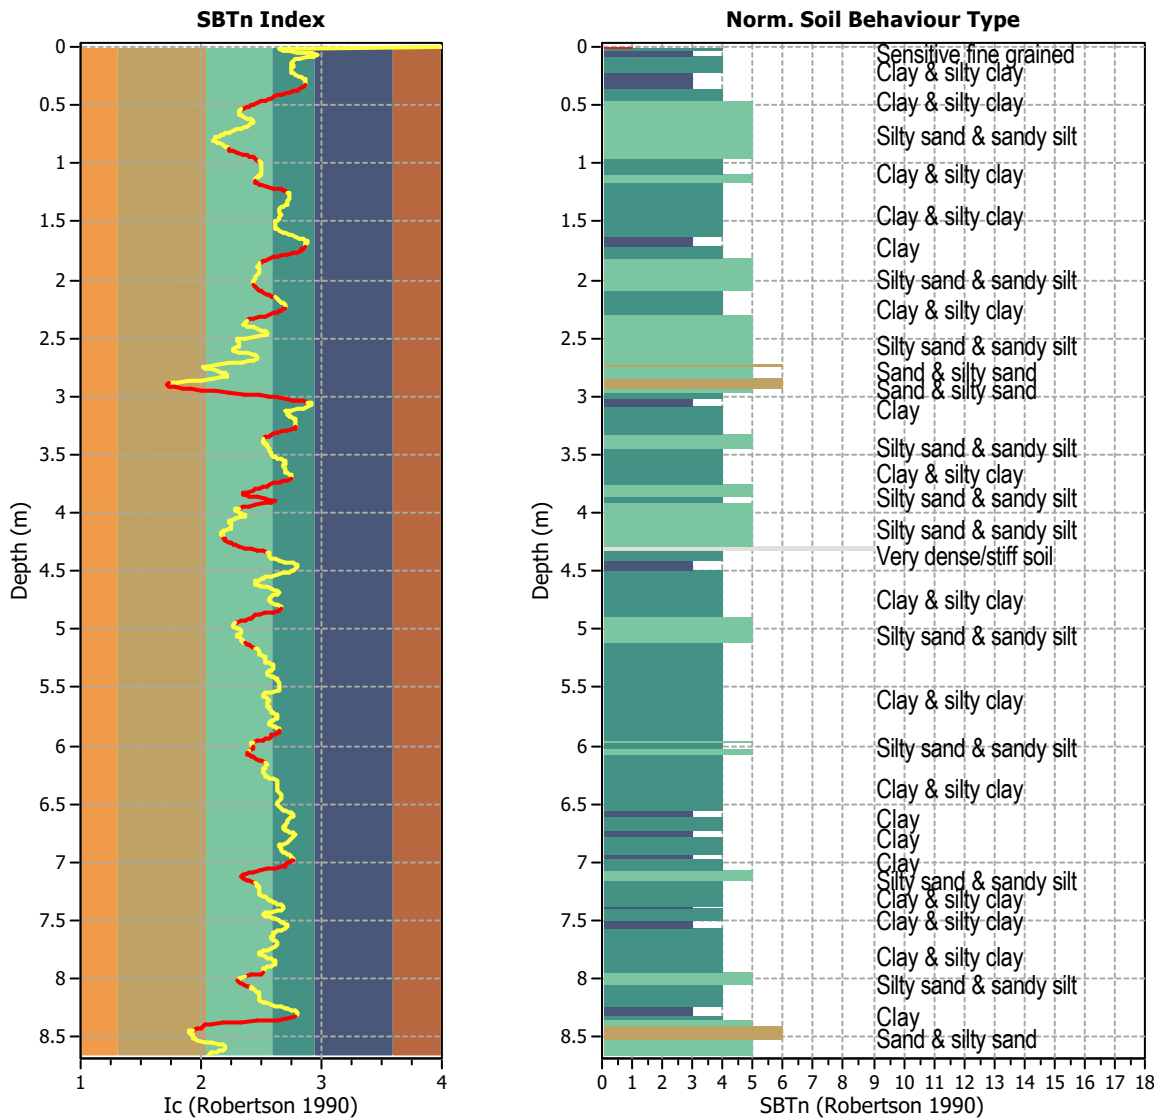


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 866
 Total points excluded: 241
 Exclusion percentage: 27.83%
 Number of layers detected: 22


Estimation of post-earthquake settlements

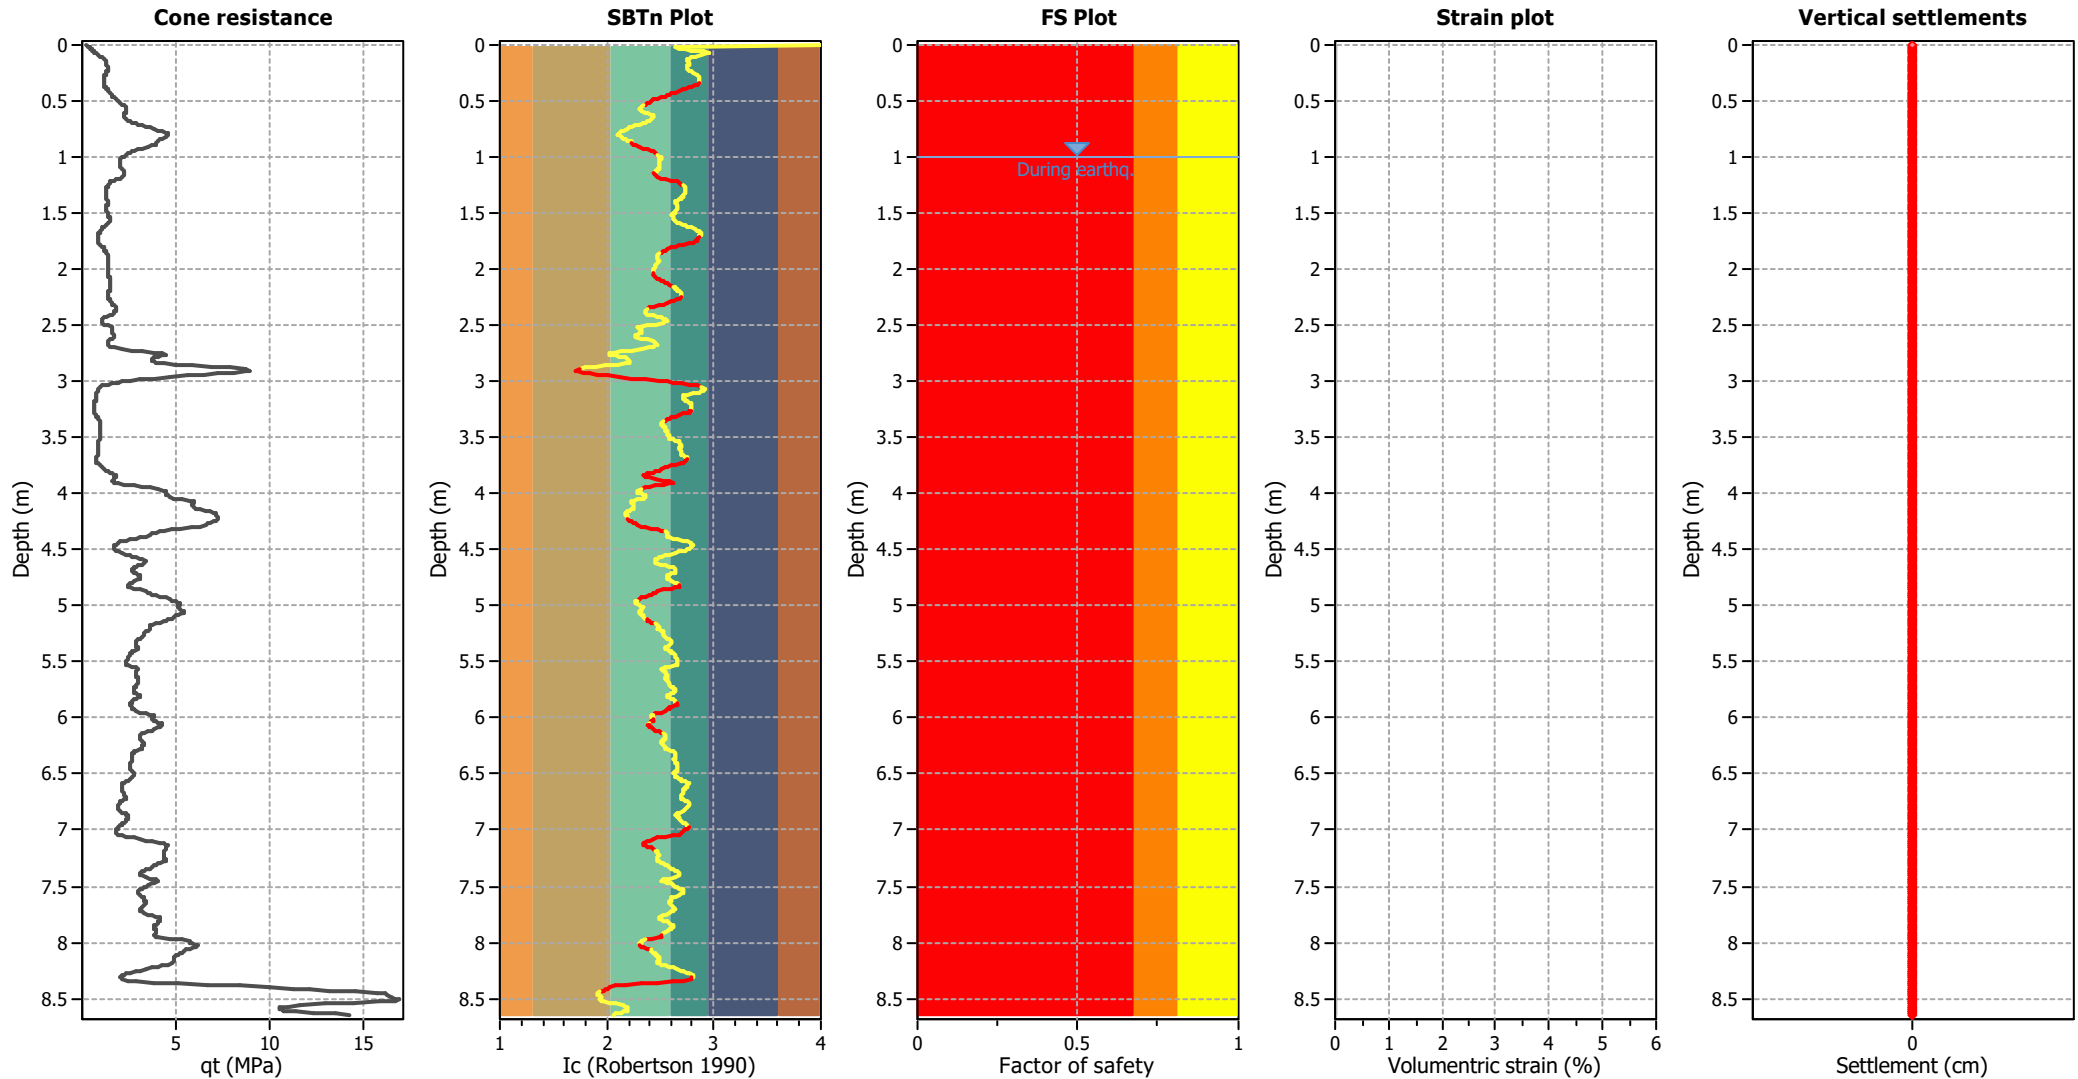

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

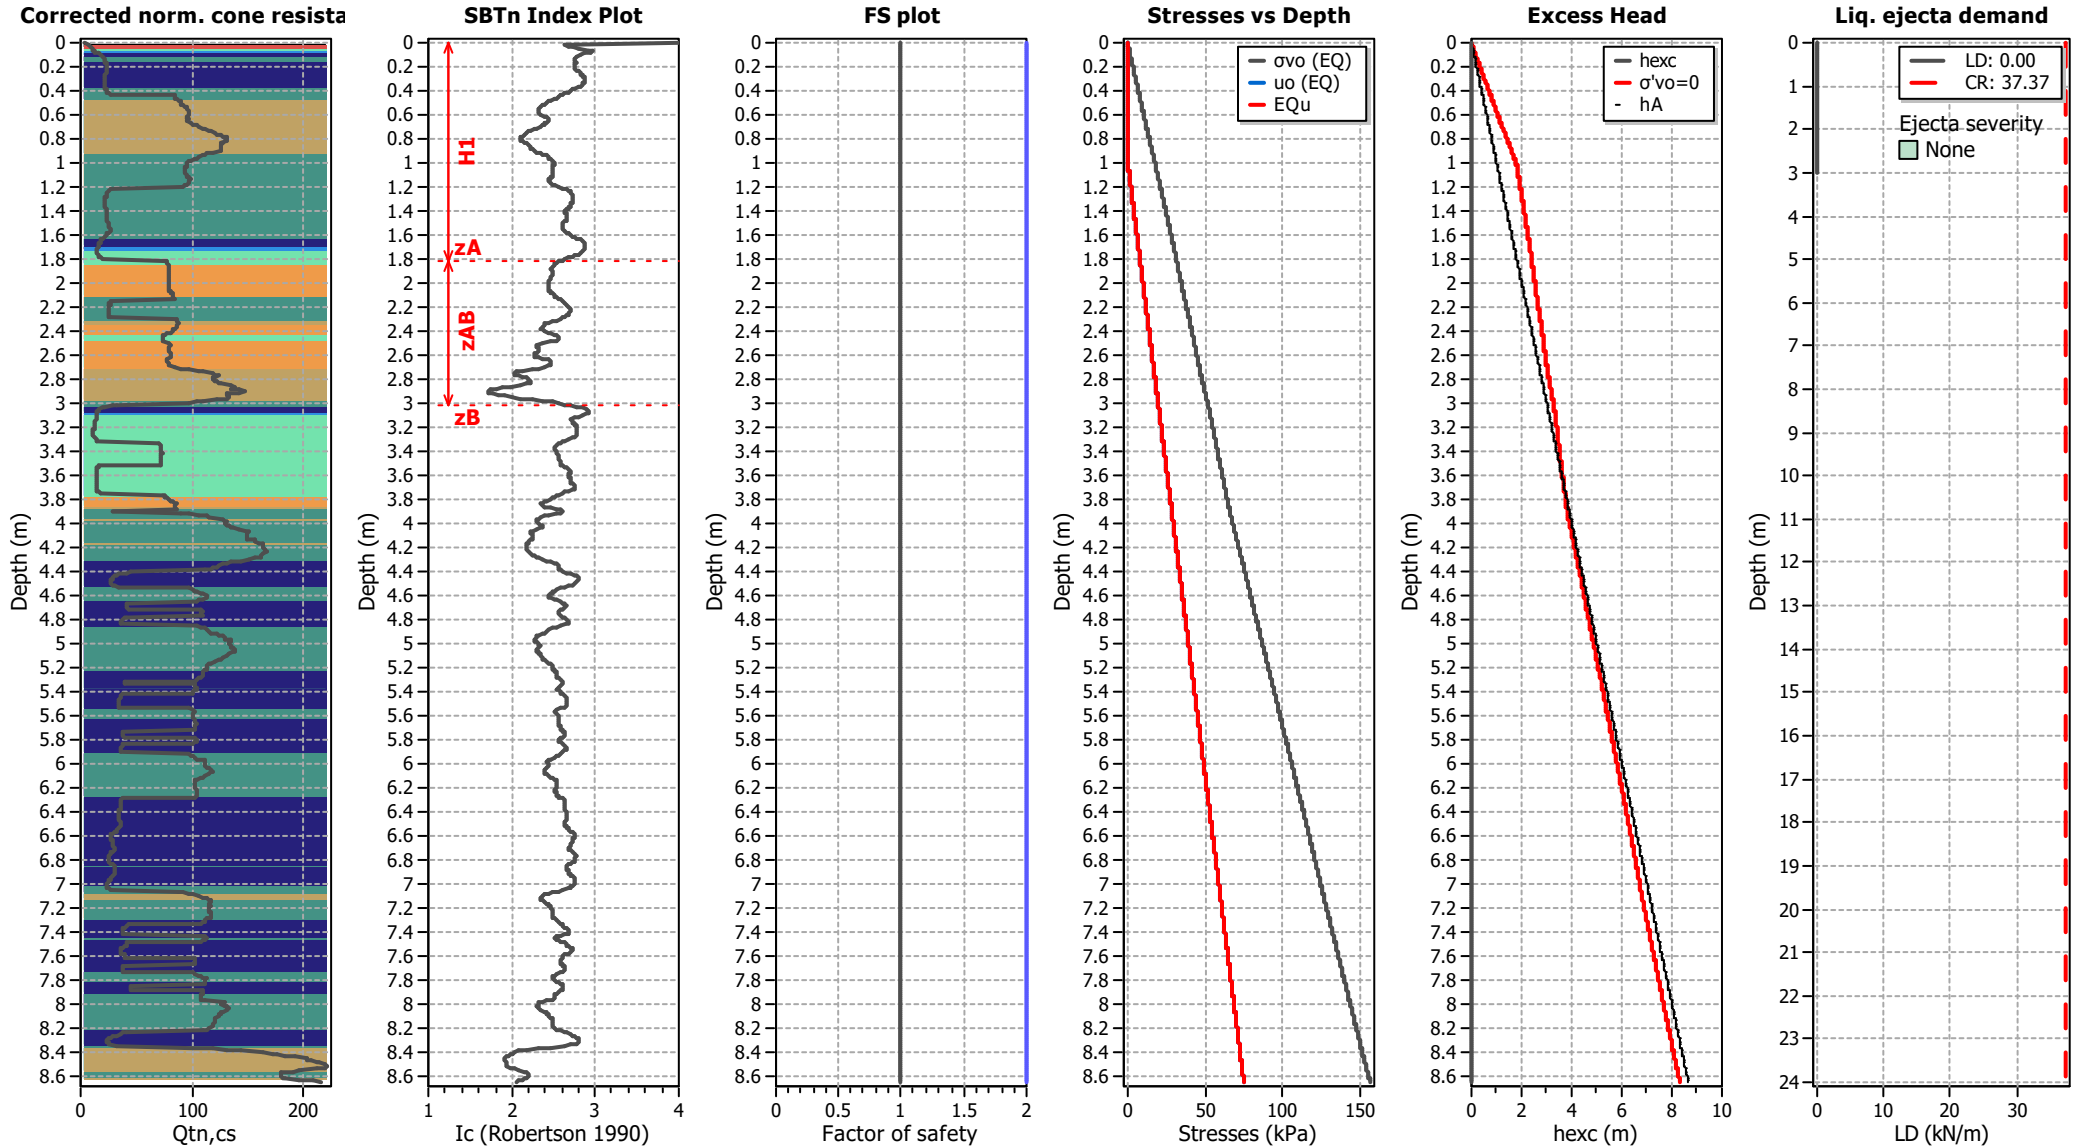

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT18

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

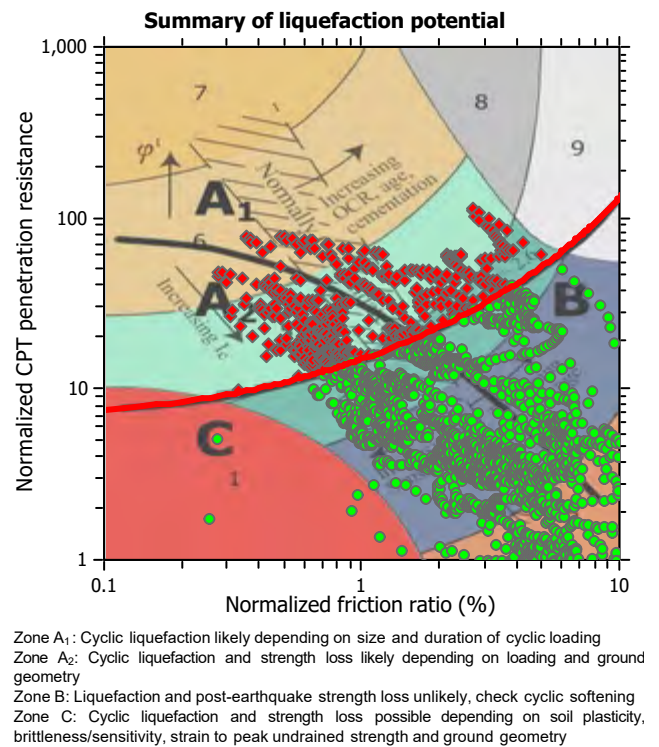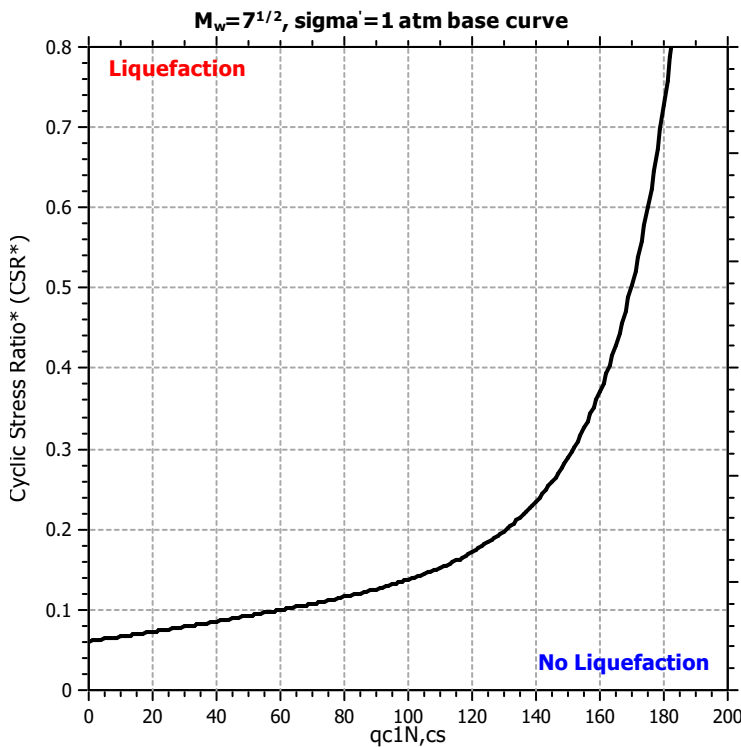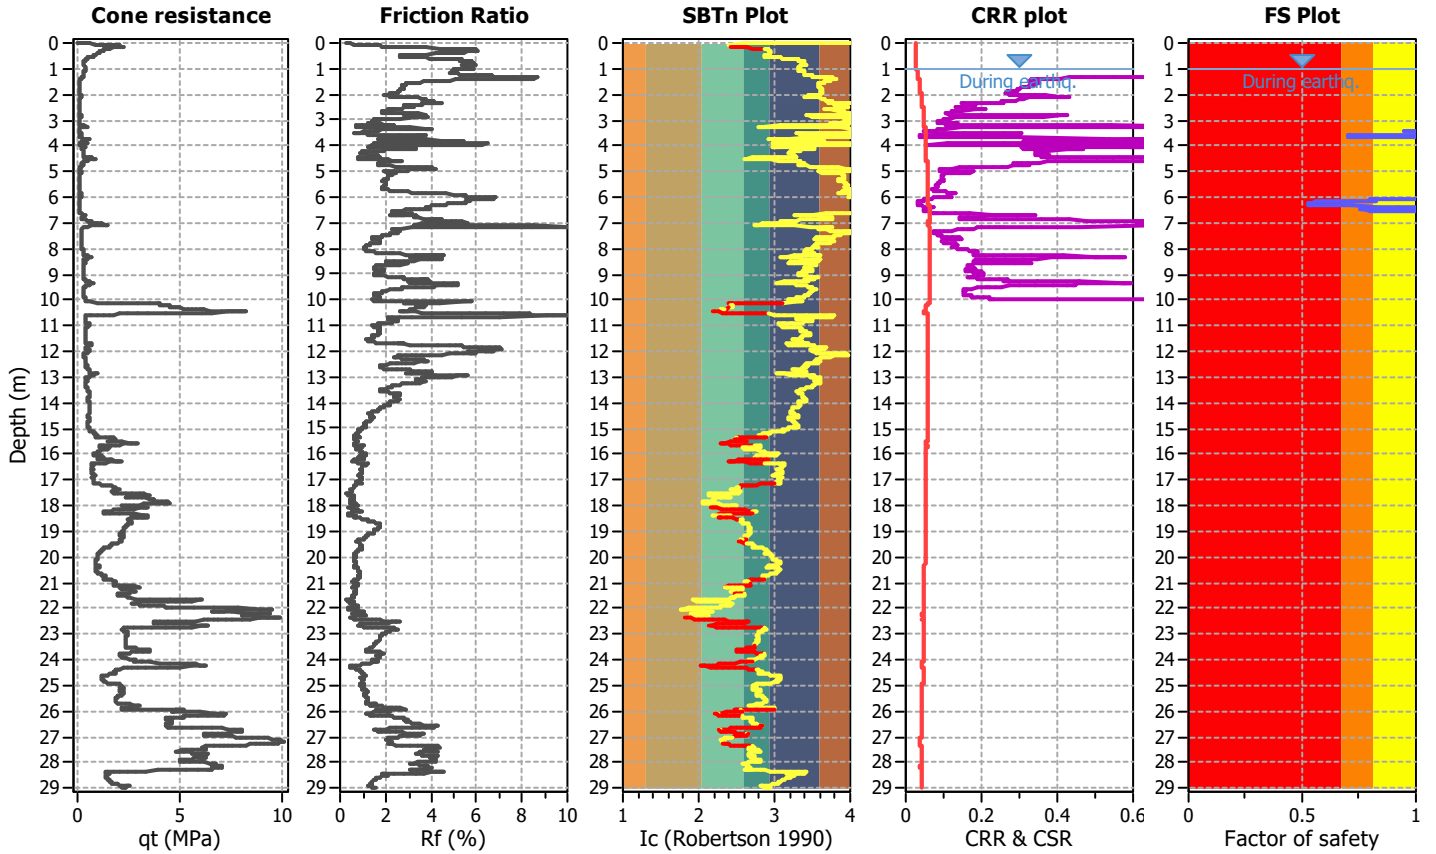

CPT basic interpretation plots

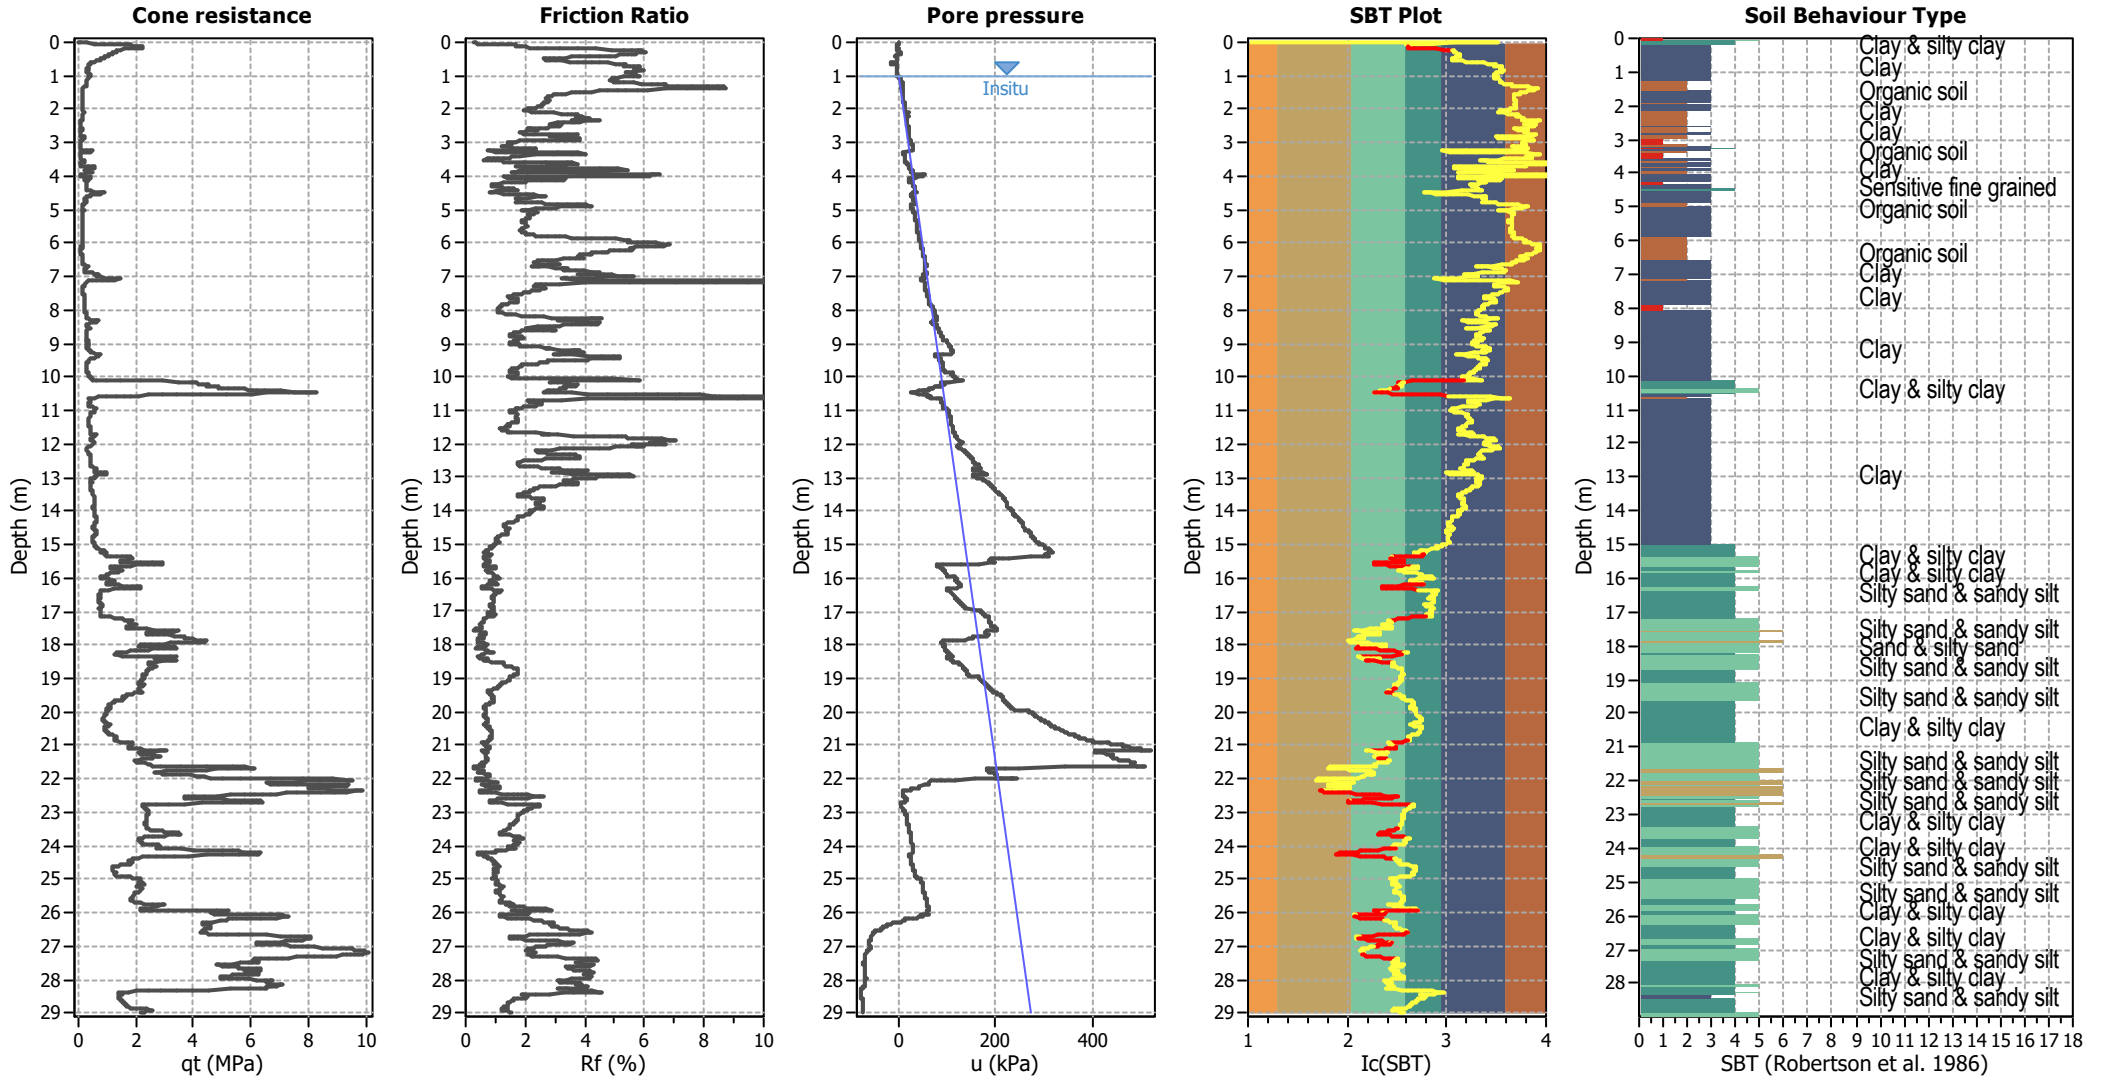


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

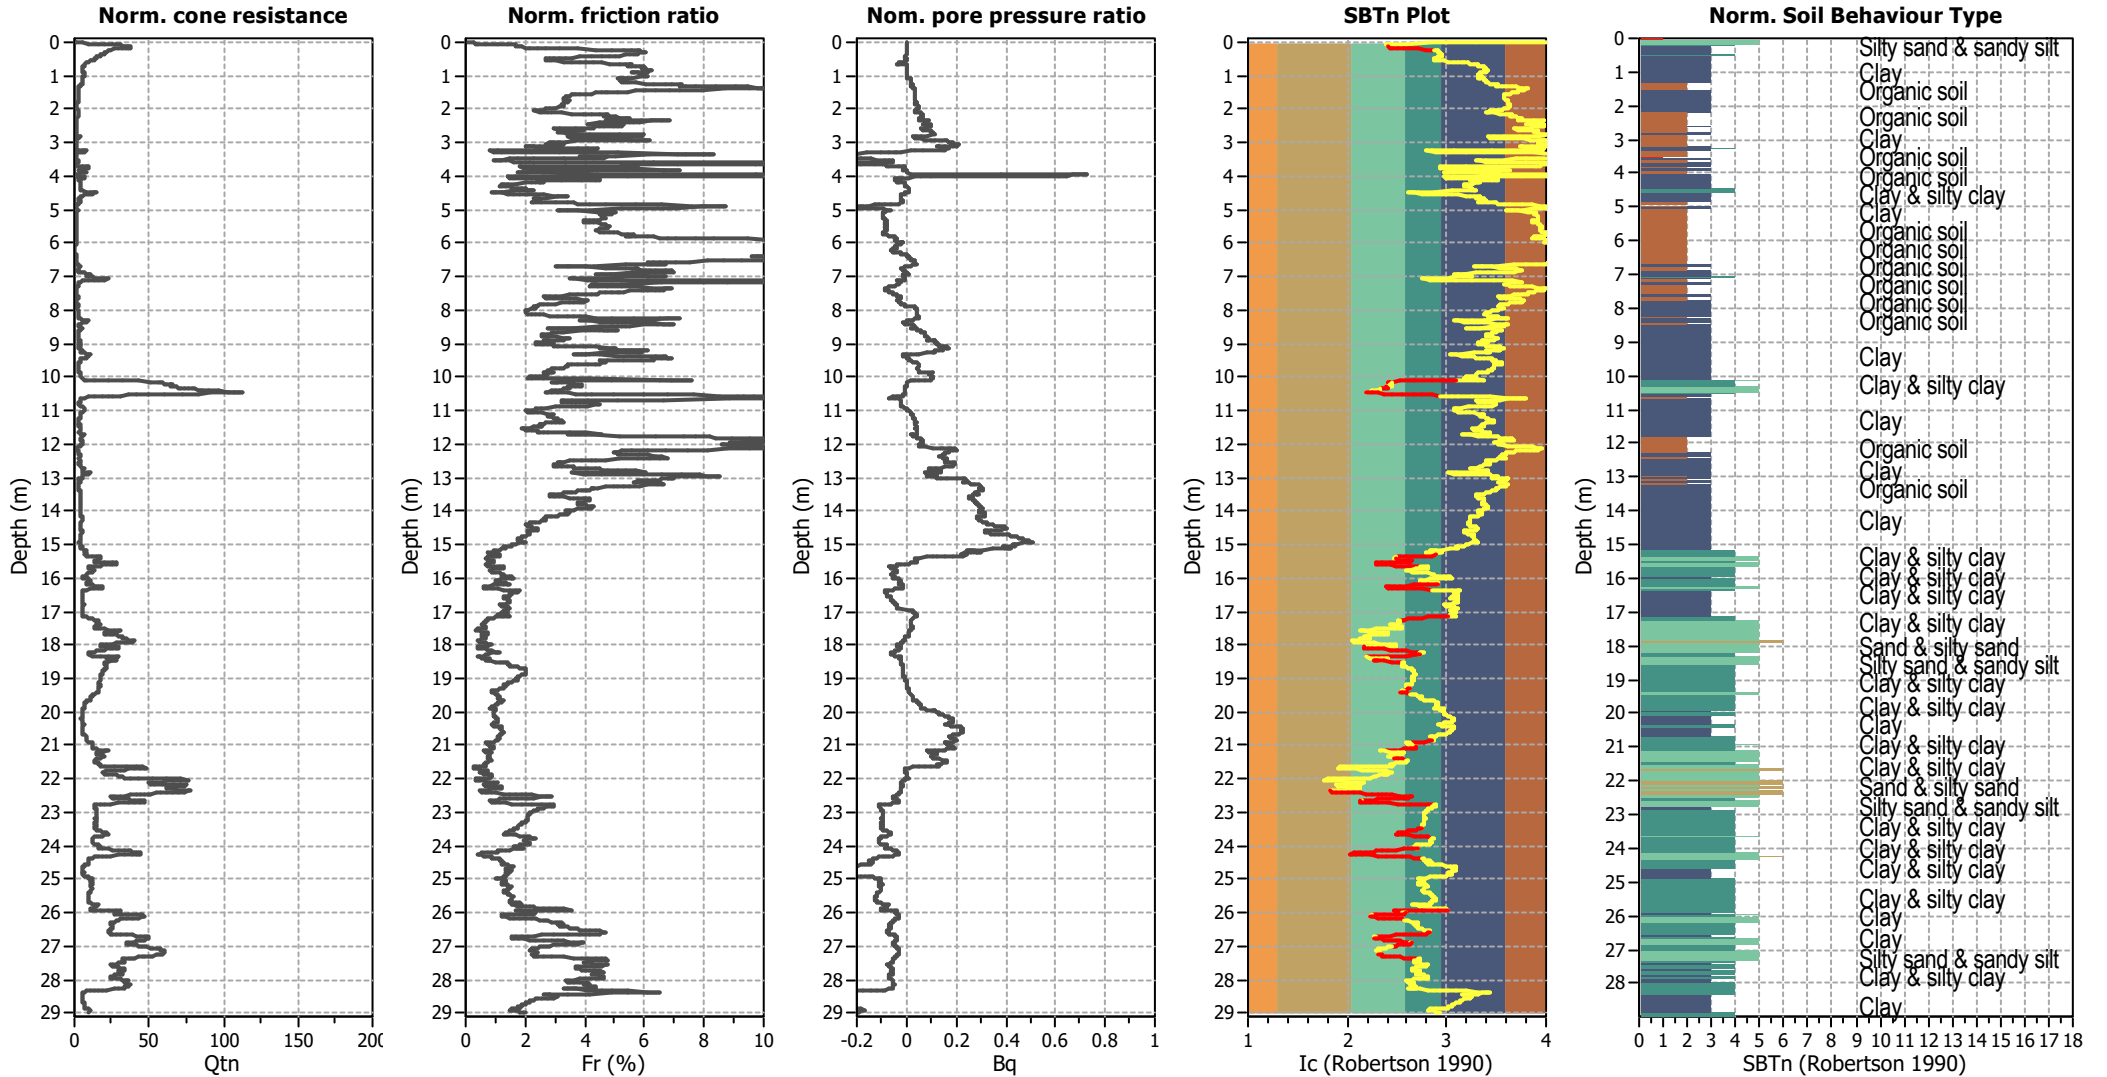


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_p applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

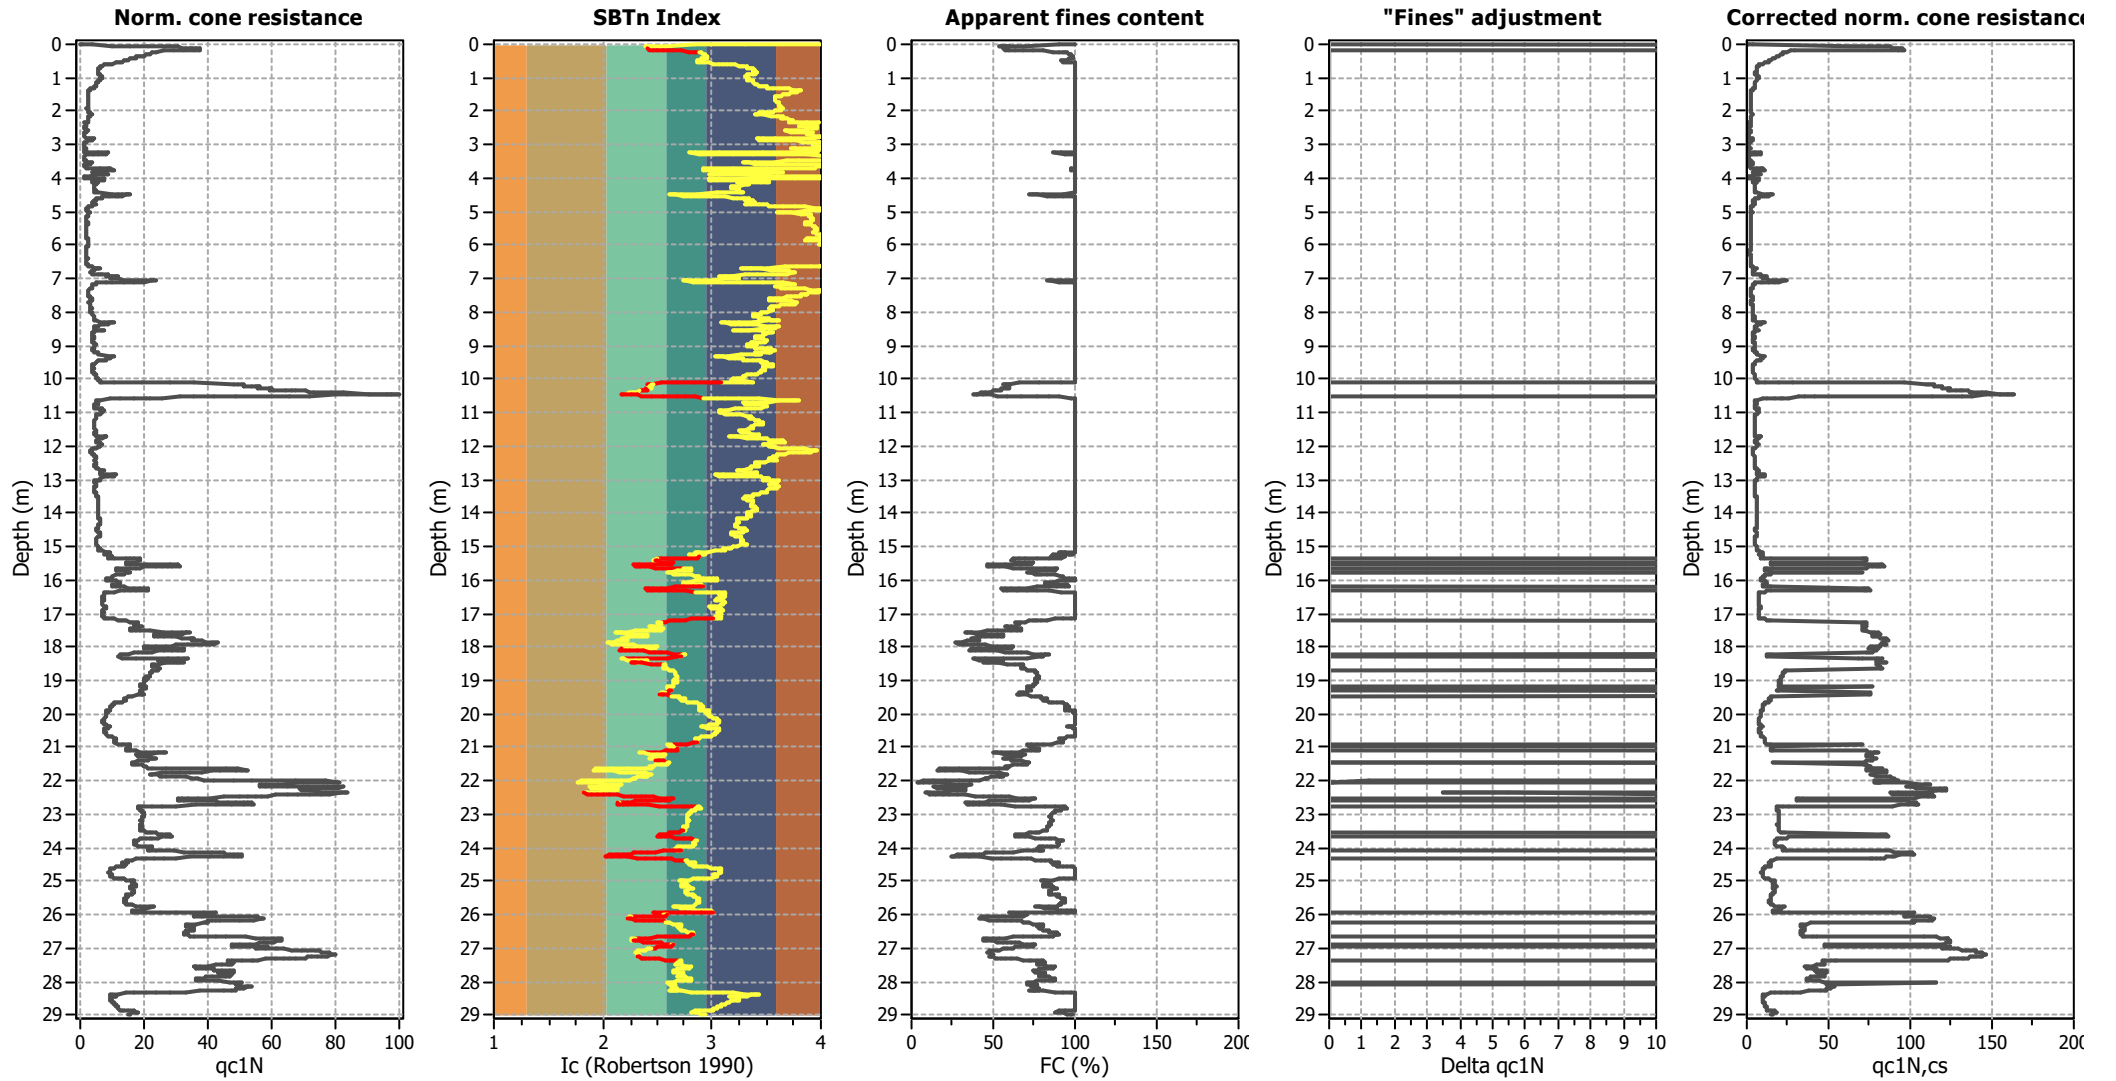

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

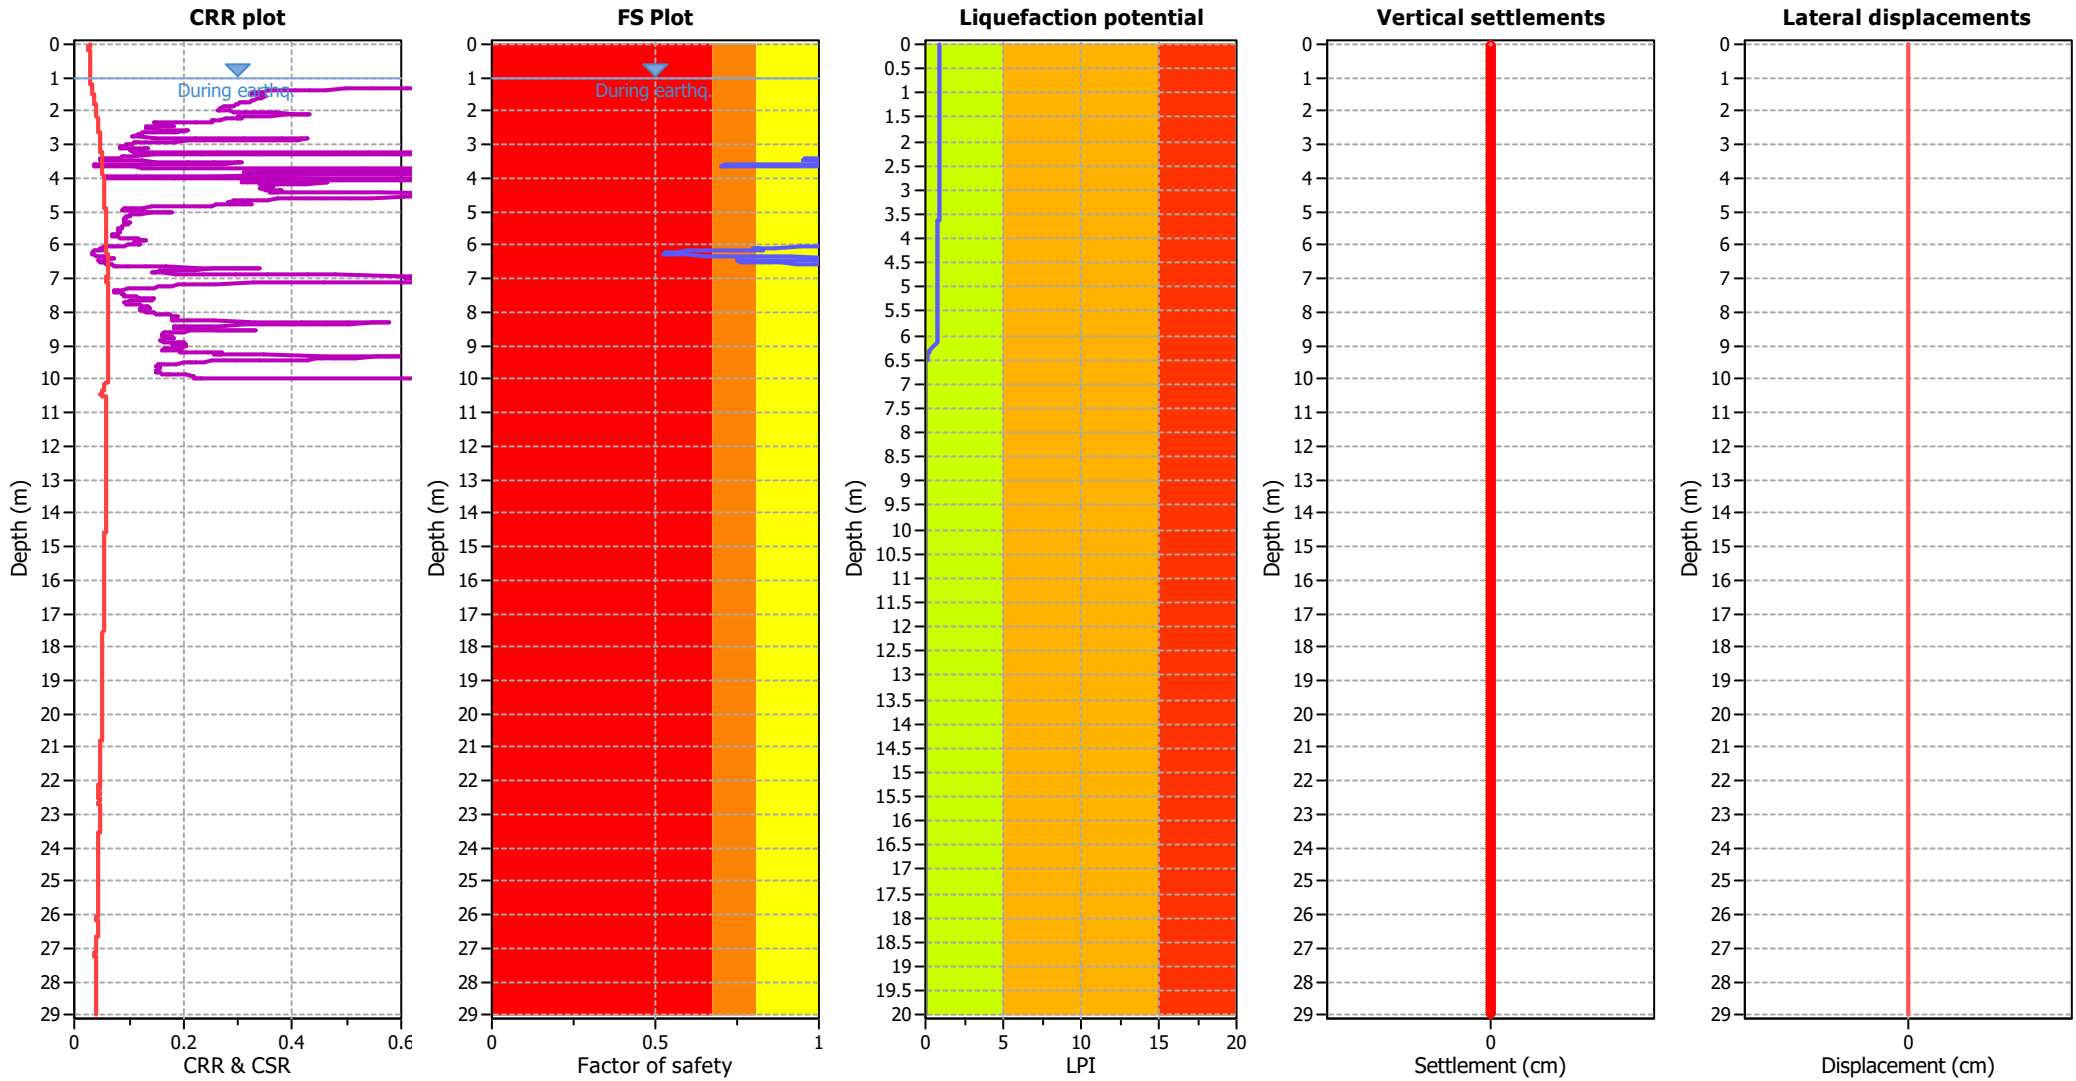

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

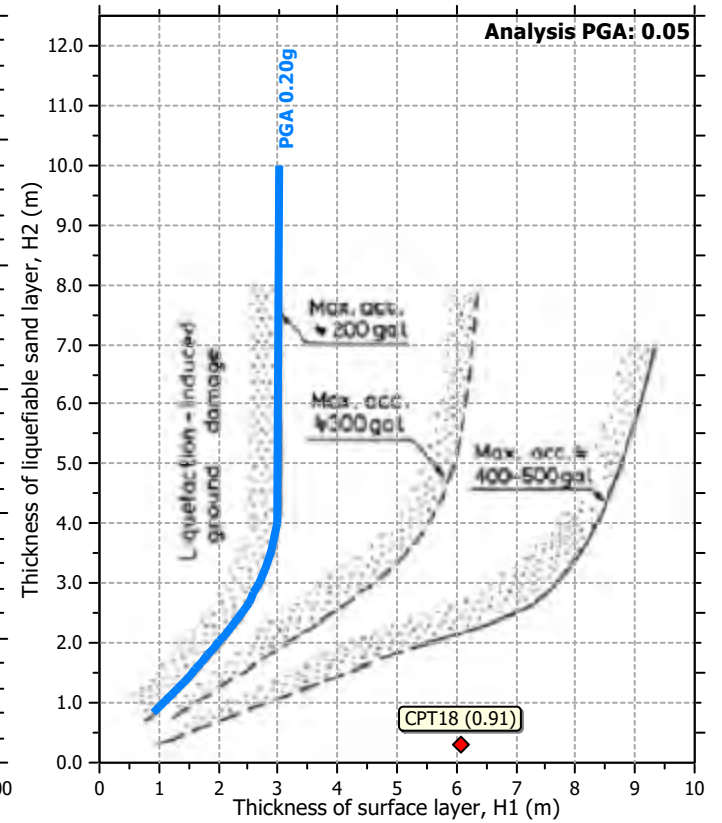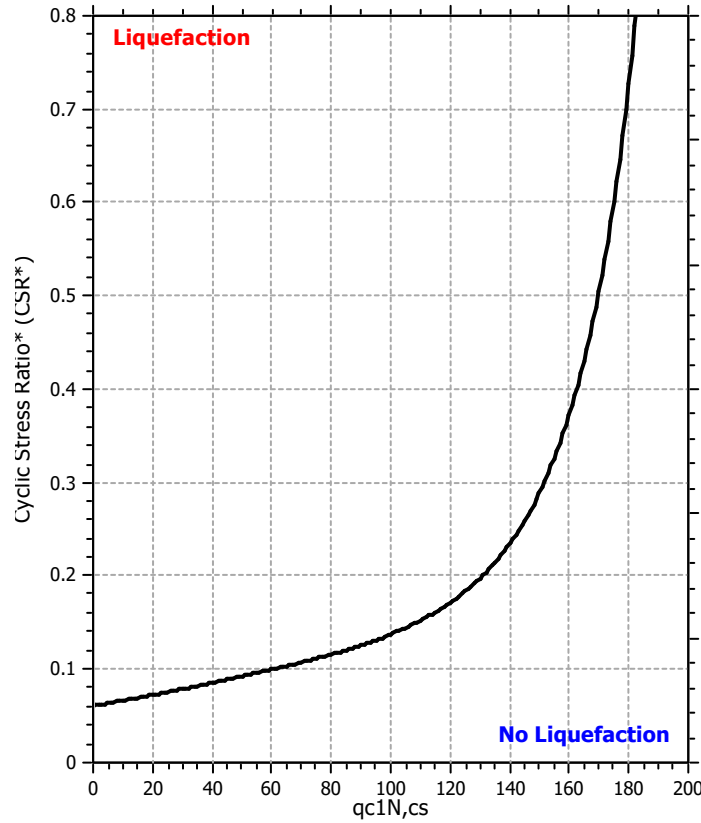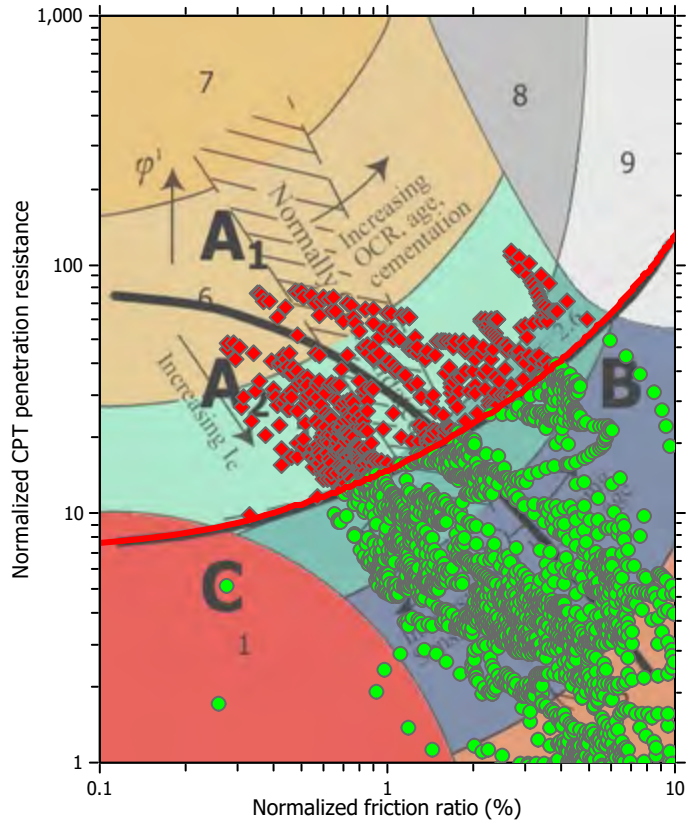

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

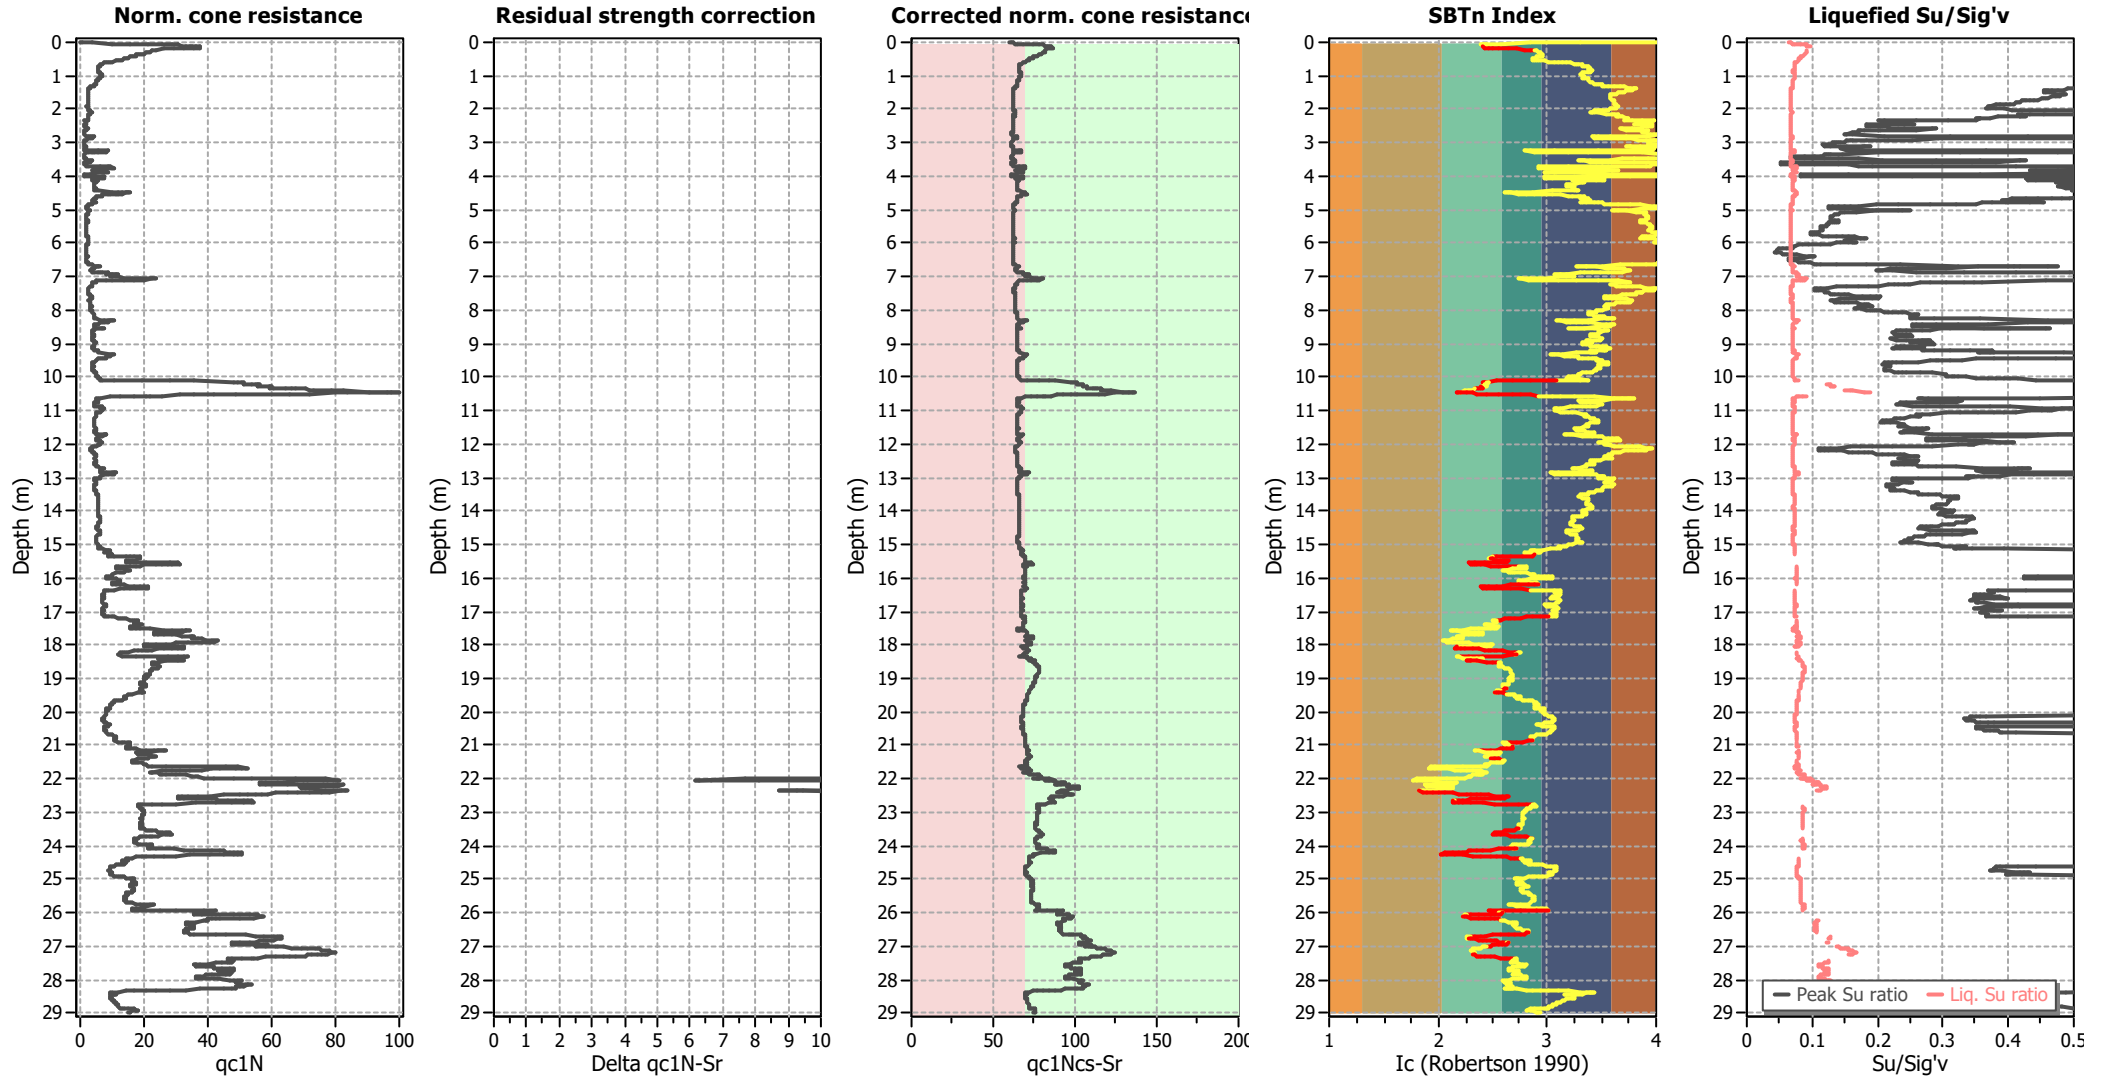

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

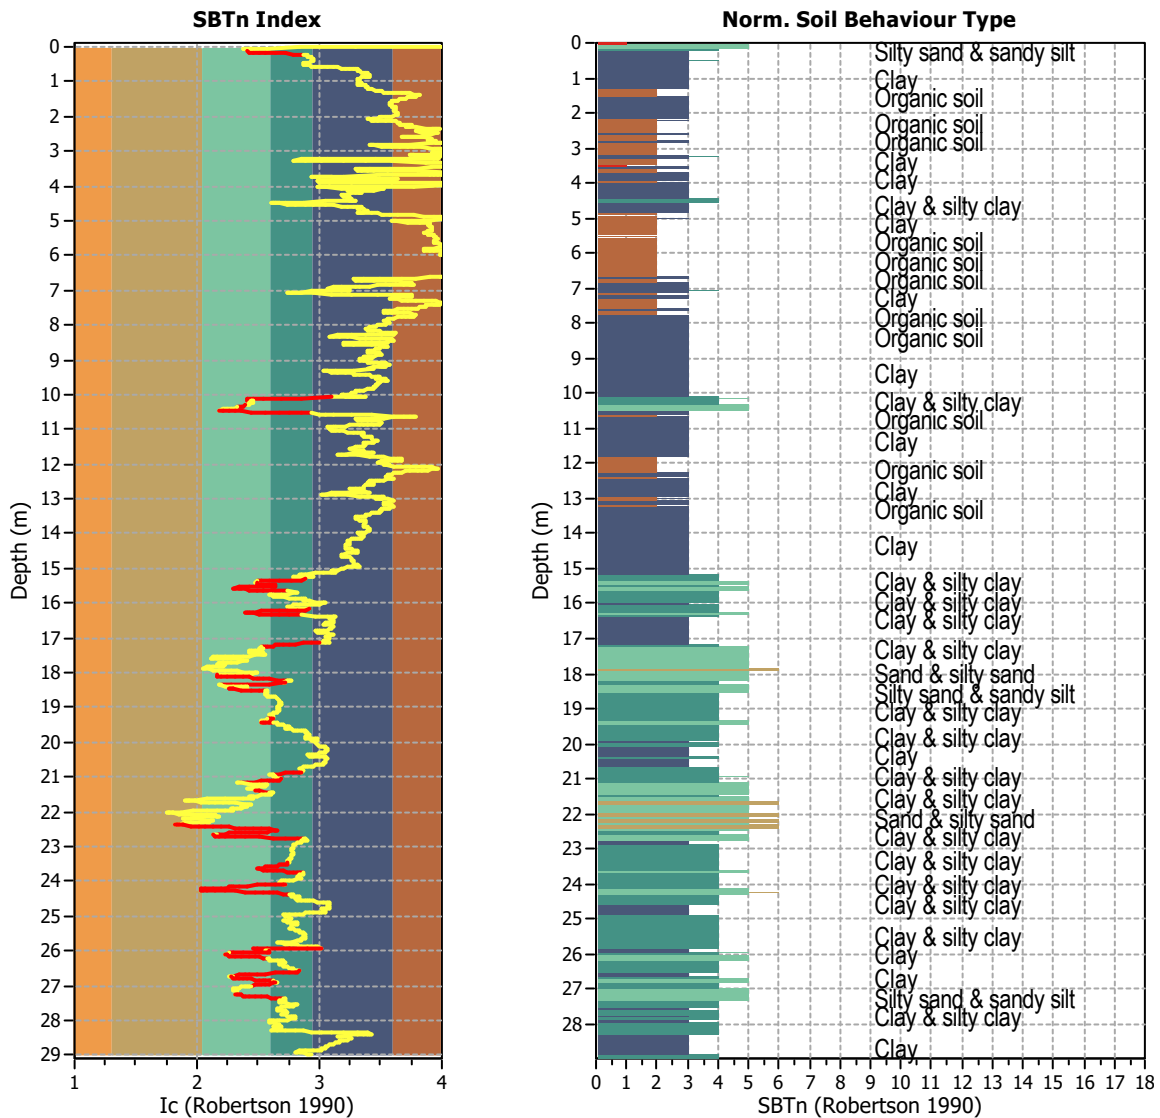

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	2899
I_c maximum check value:	3.00	Total points excluded:	351
I_c change ratio value:	0.0100	Exclusion percentage:	12.11%
Minimum number of points in layer:	4	Number of layers detected:	35

Estimation of post-earthquake settlements

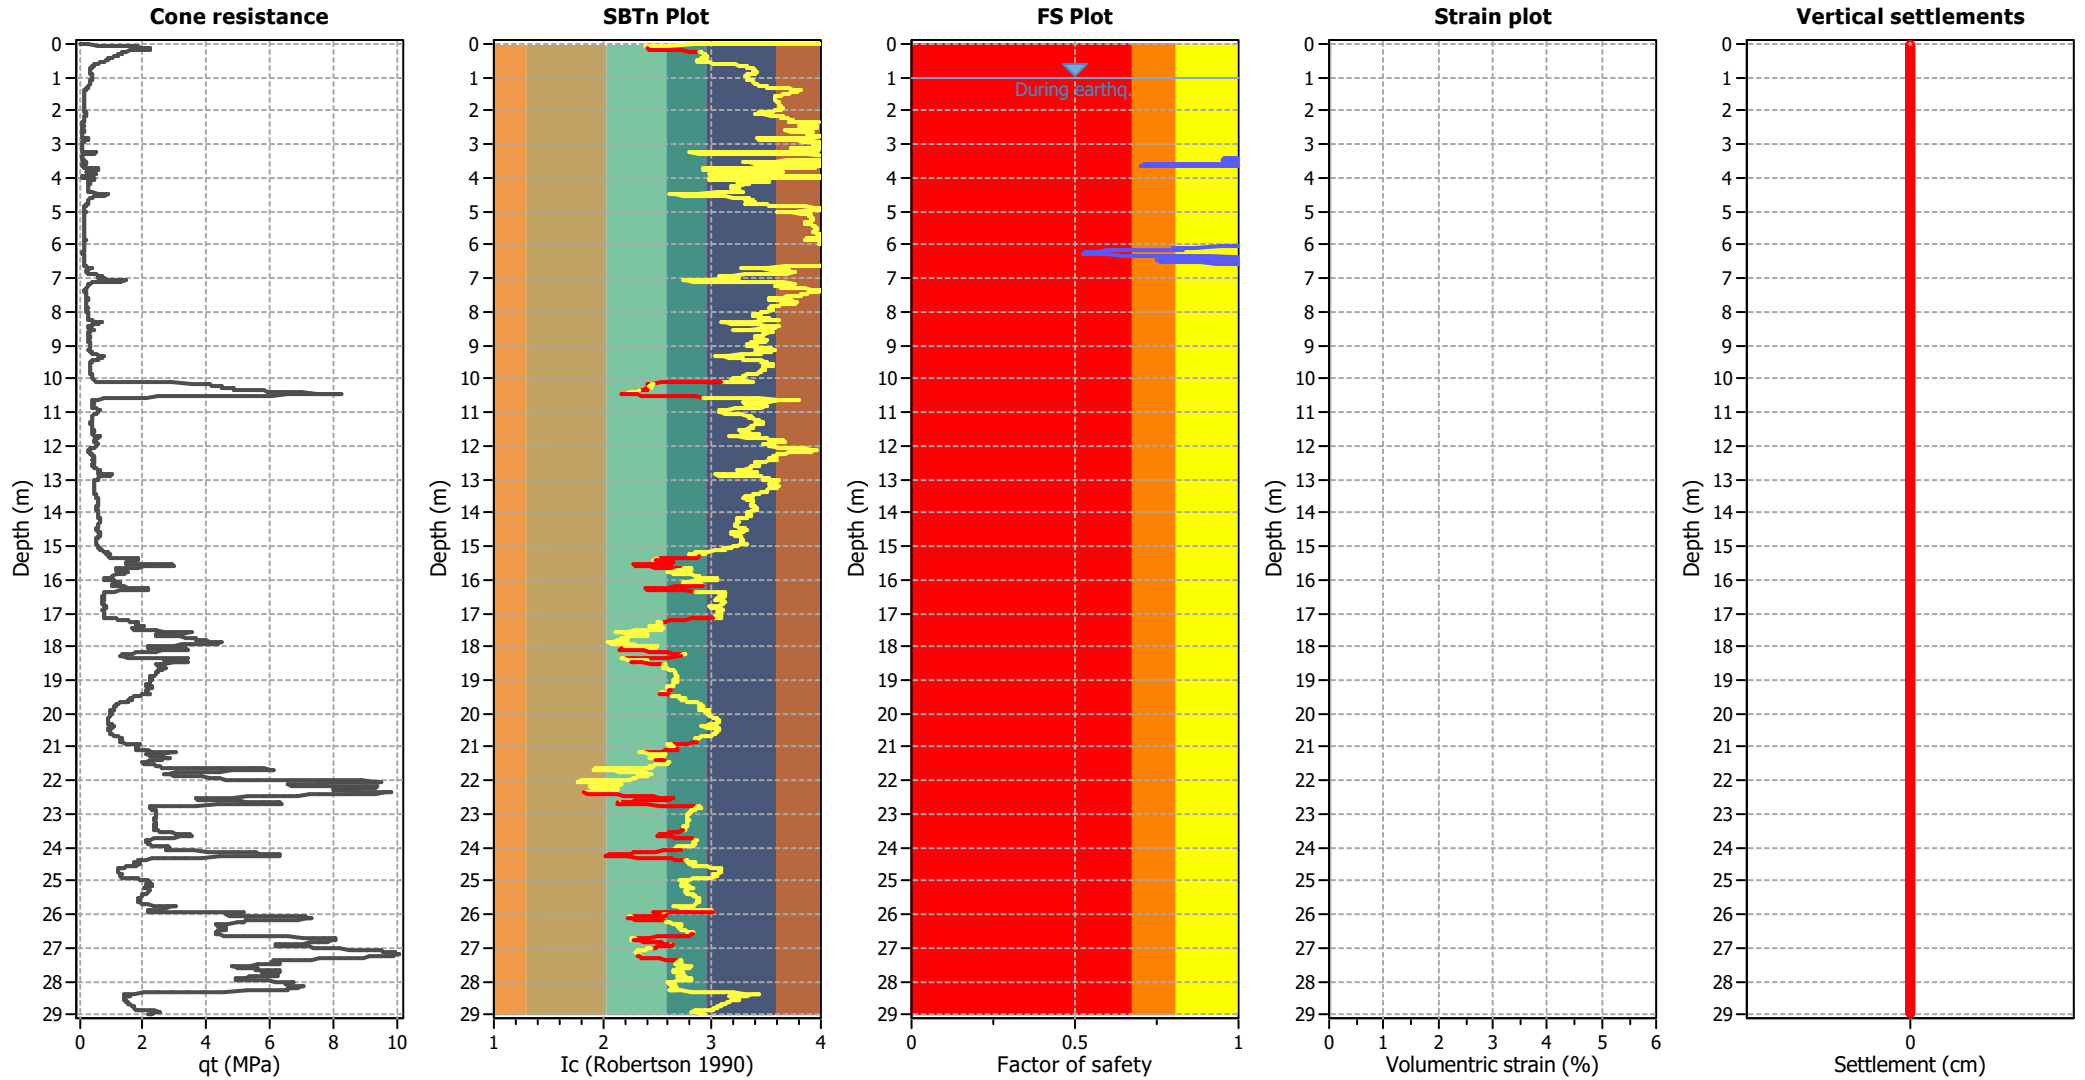


Abbreviations


- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation


Corrected norm. cone resista

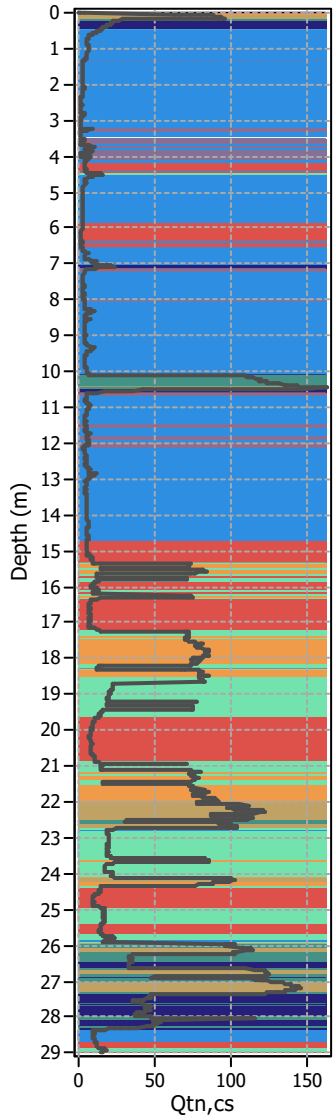


SBTn Index Plot

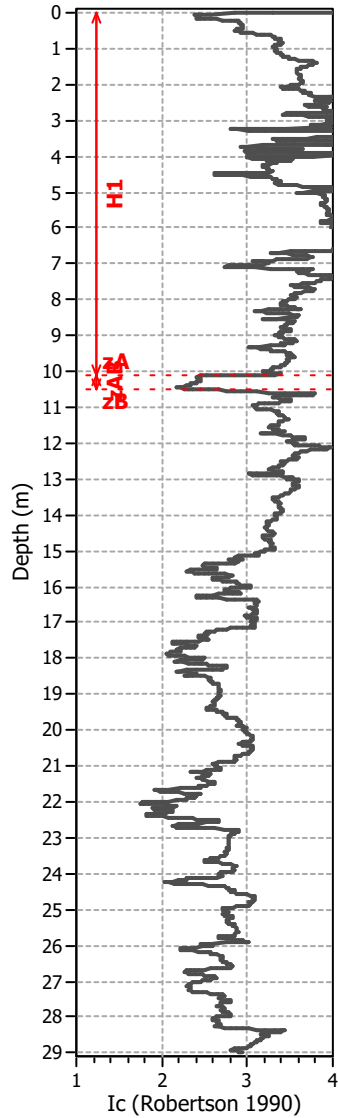


FS plot

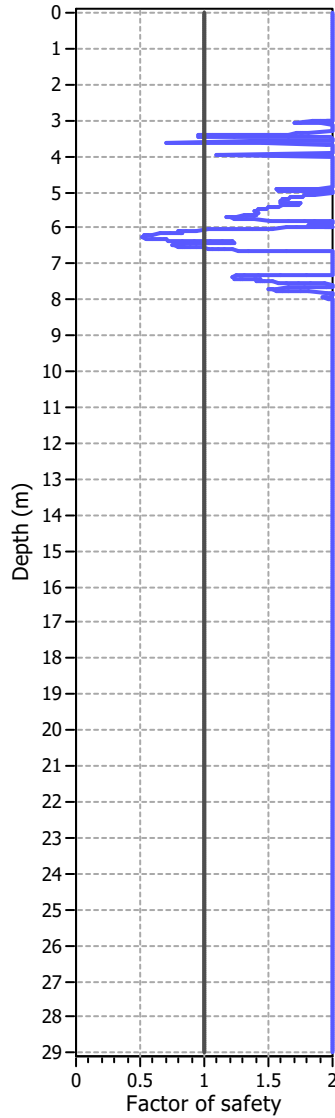


Stresses vs Depth

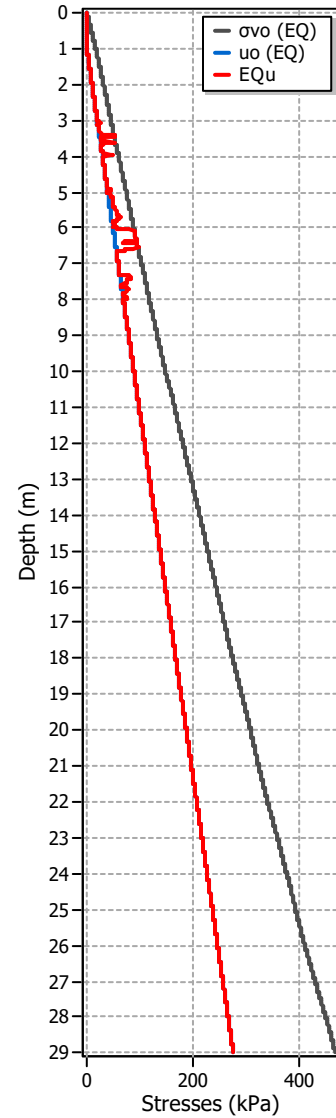

Excess Head

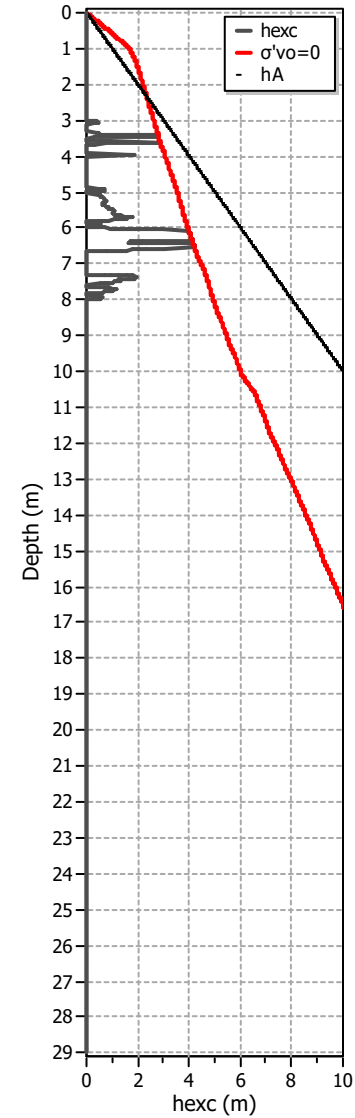

Liq. ejecta demand

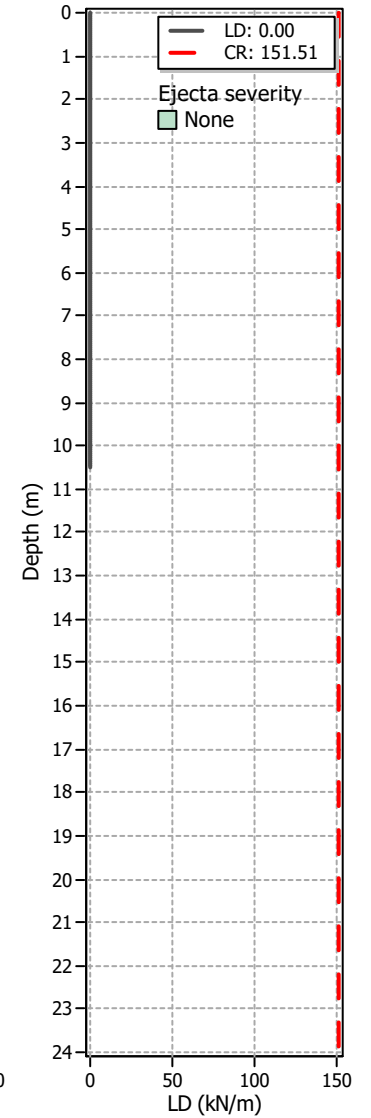

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT19A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

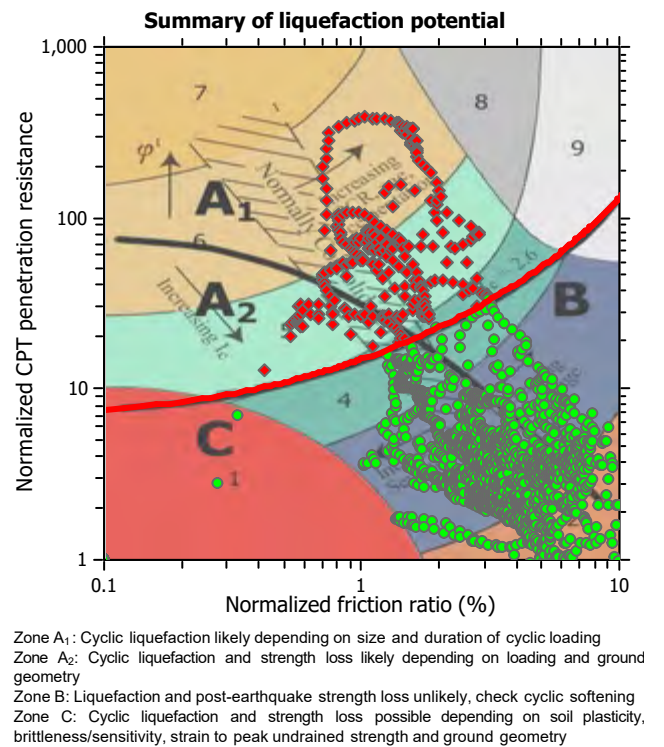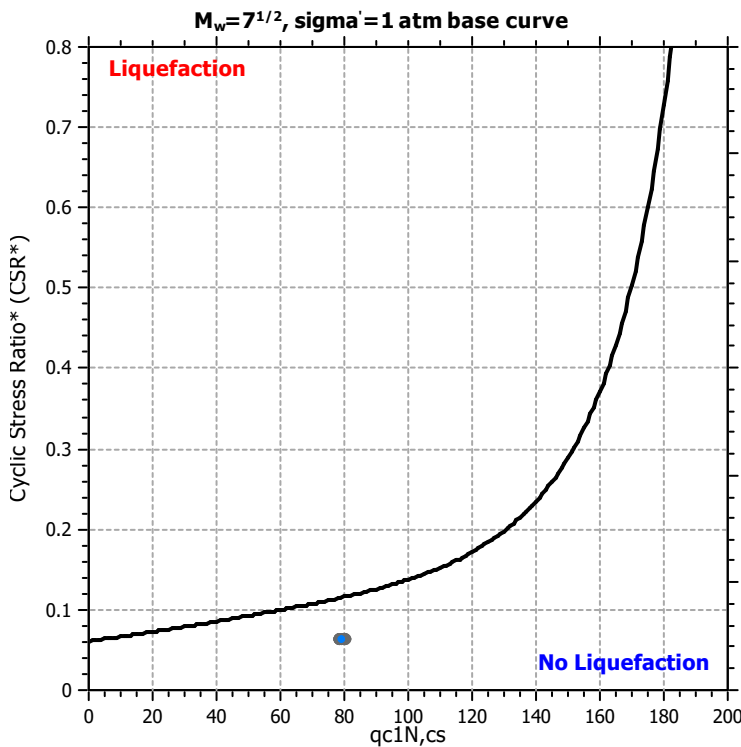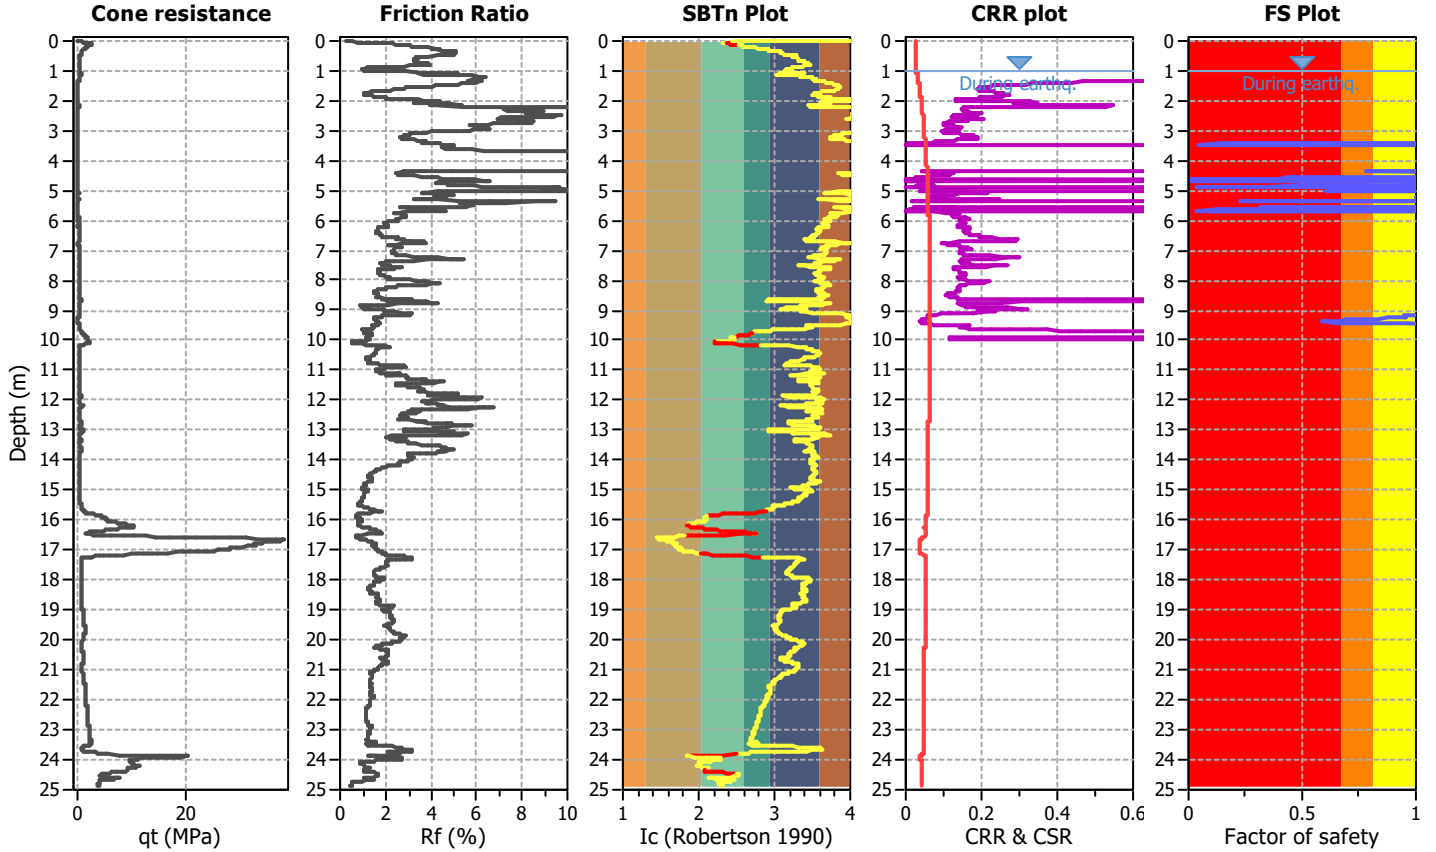

CPT basic interpretation plots

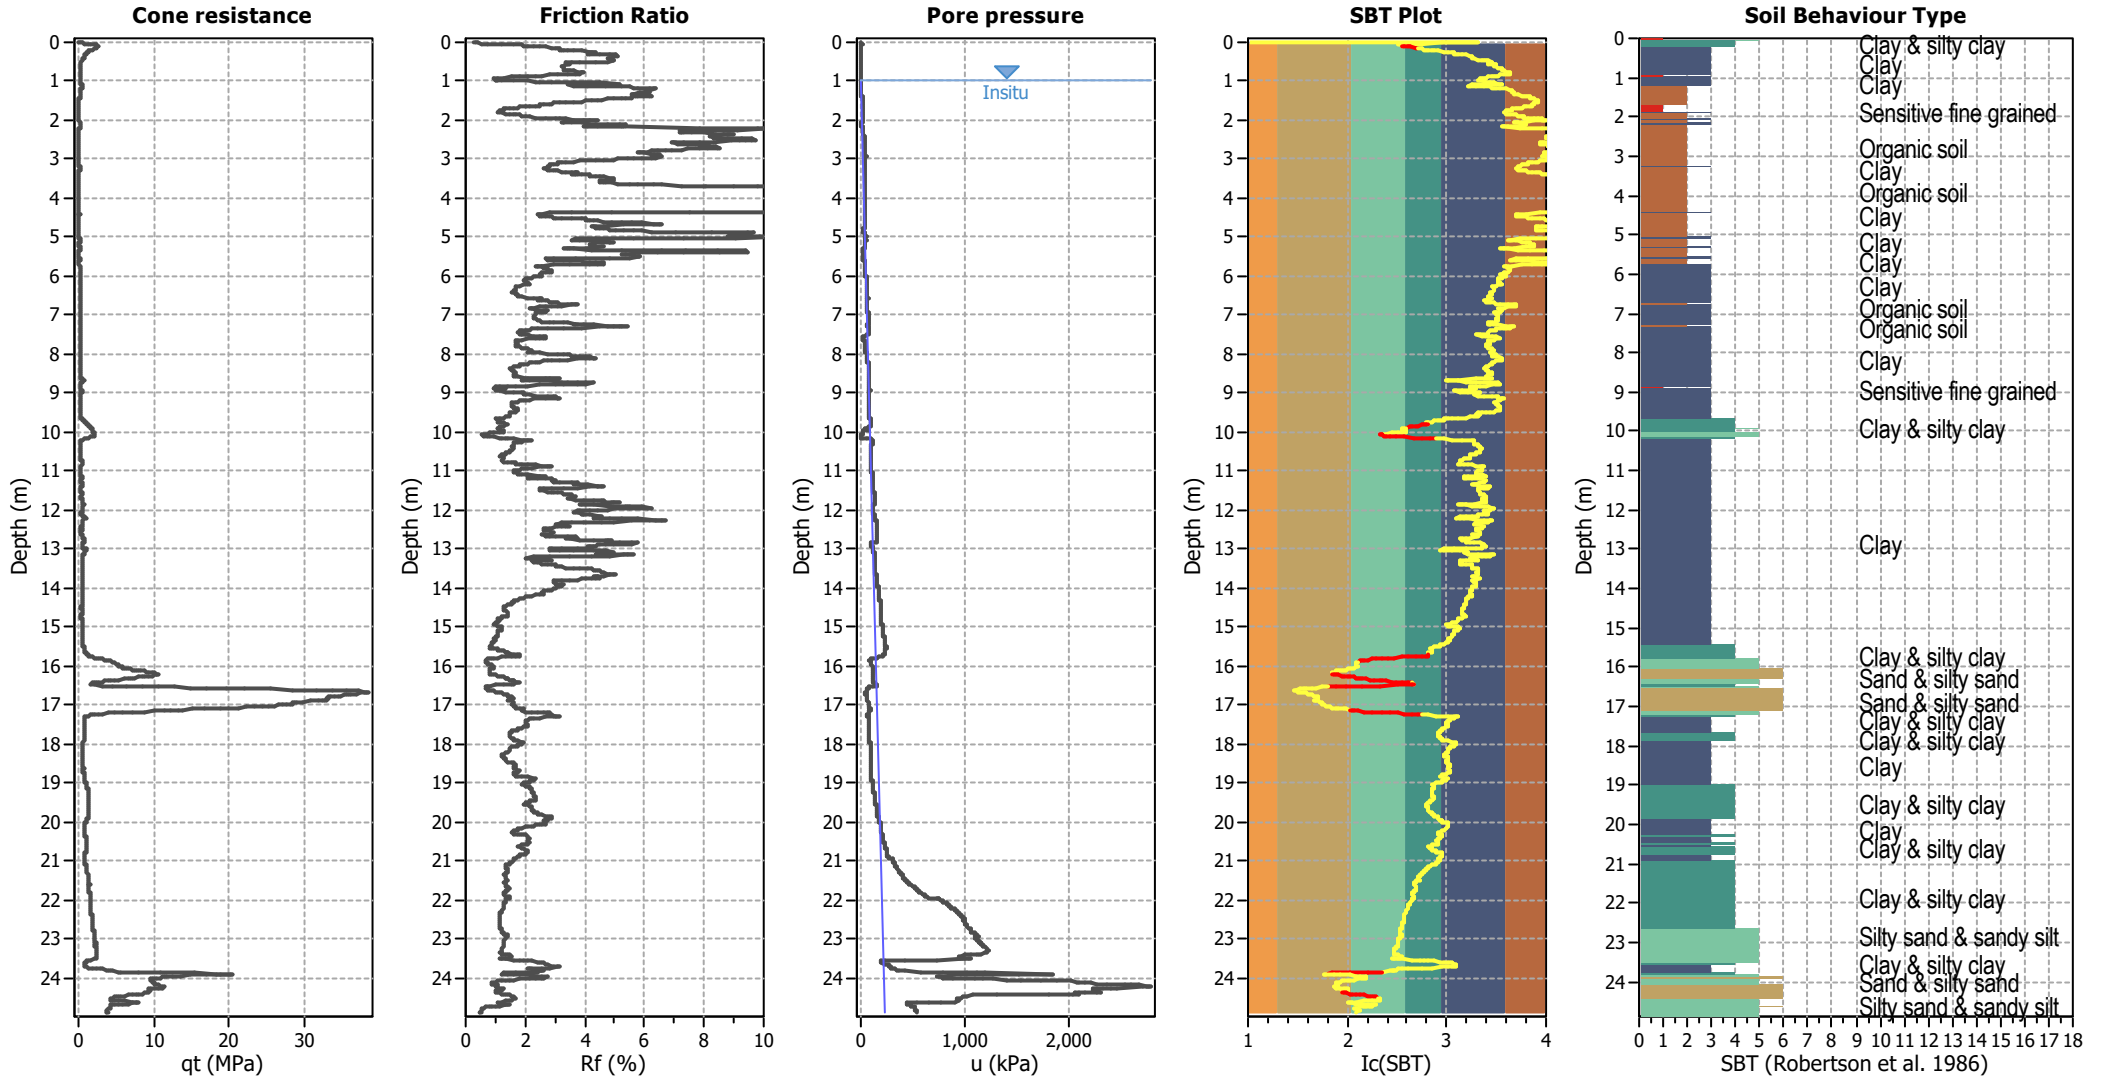


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

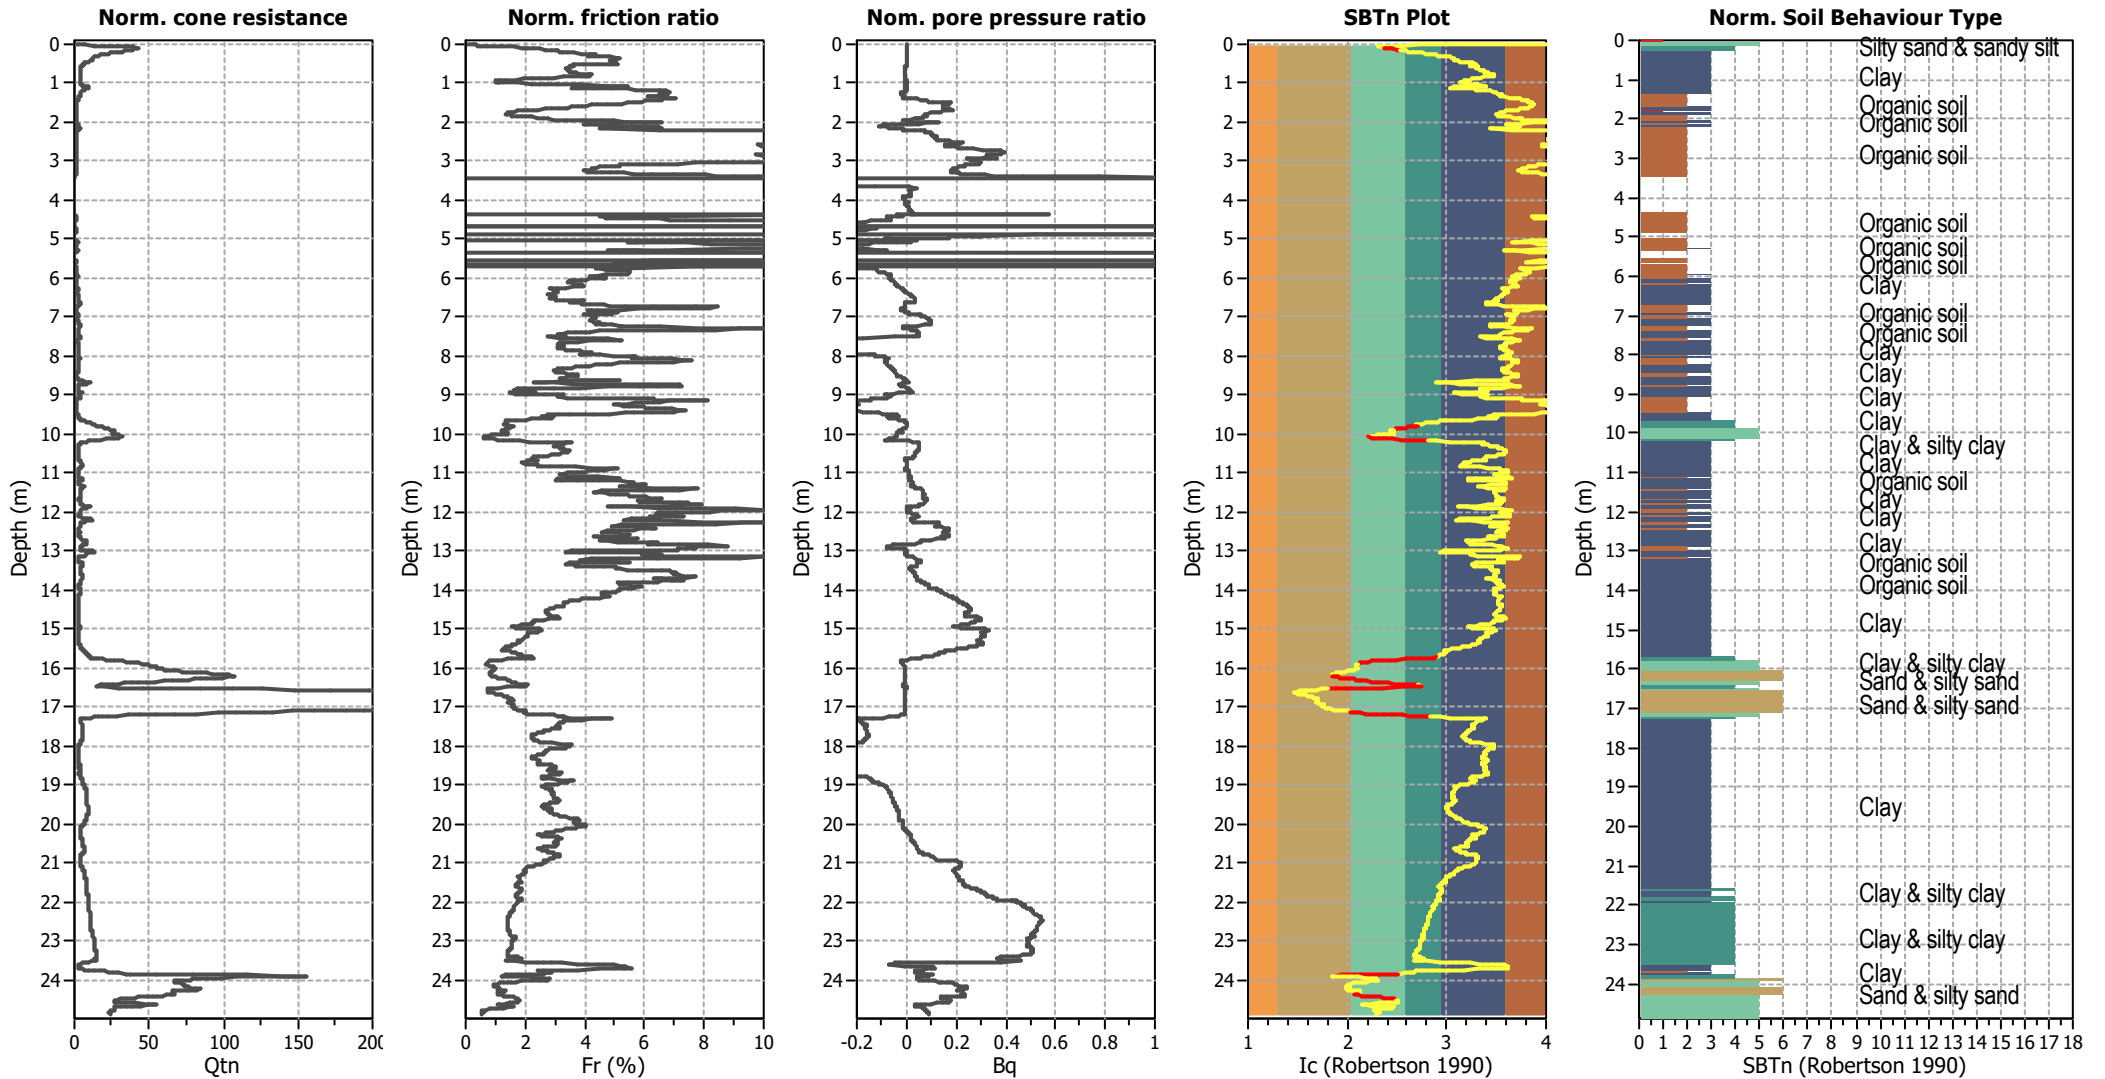


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

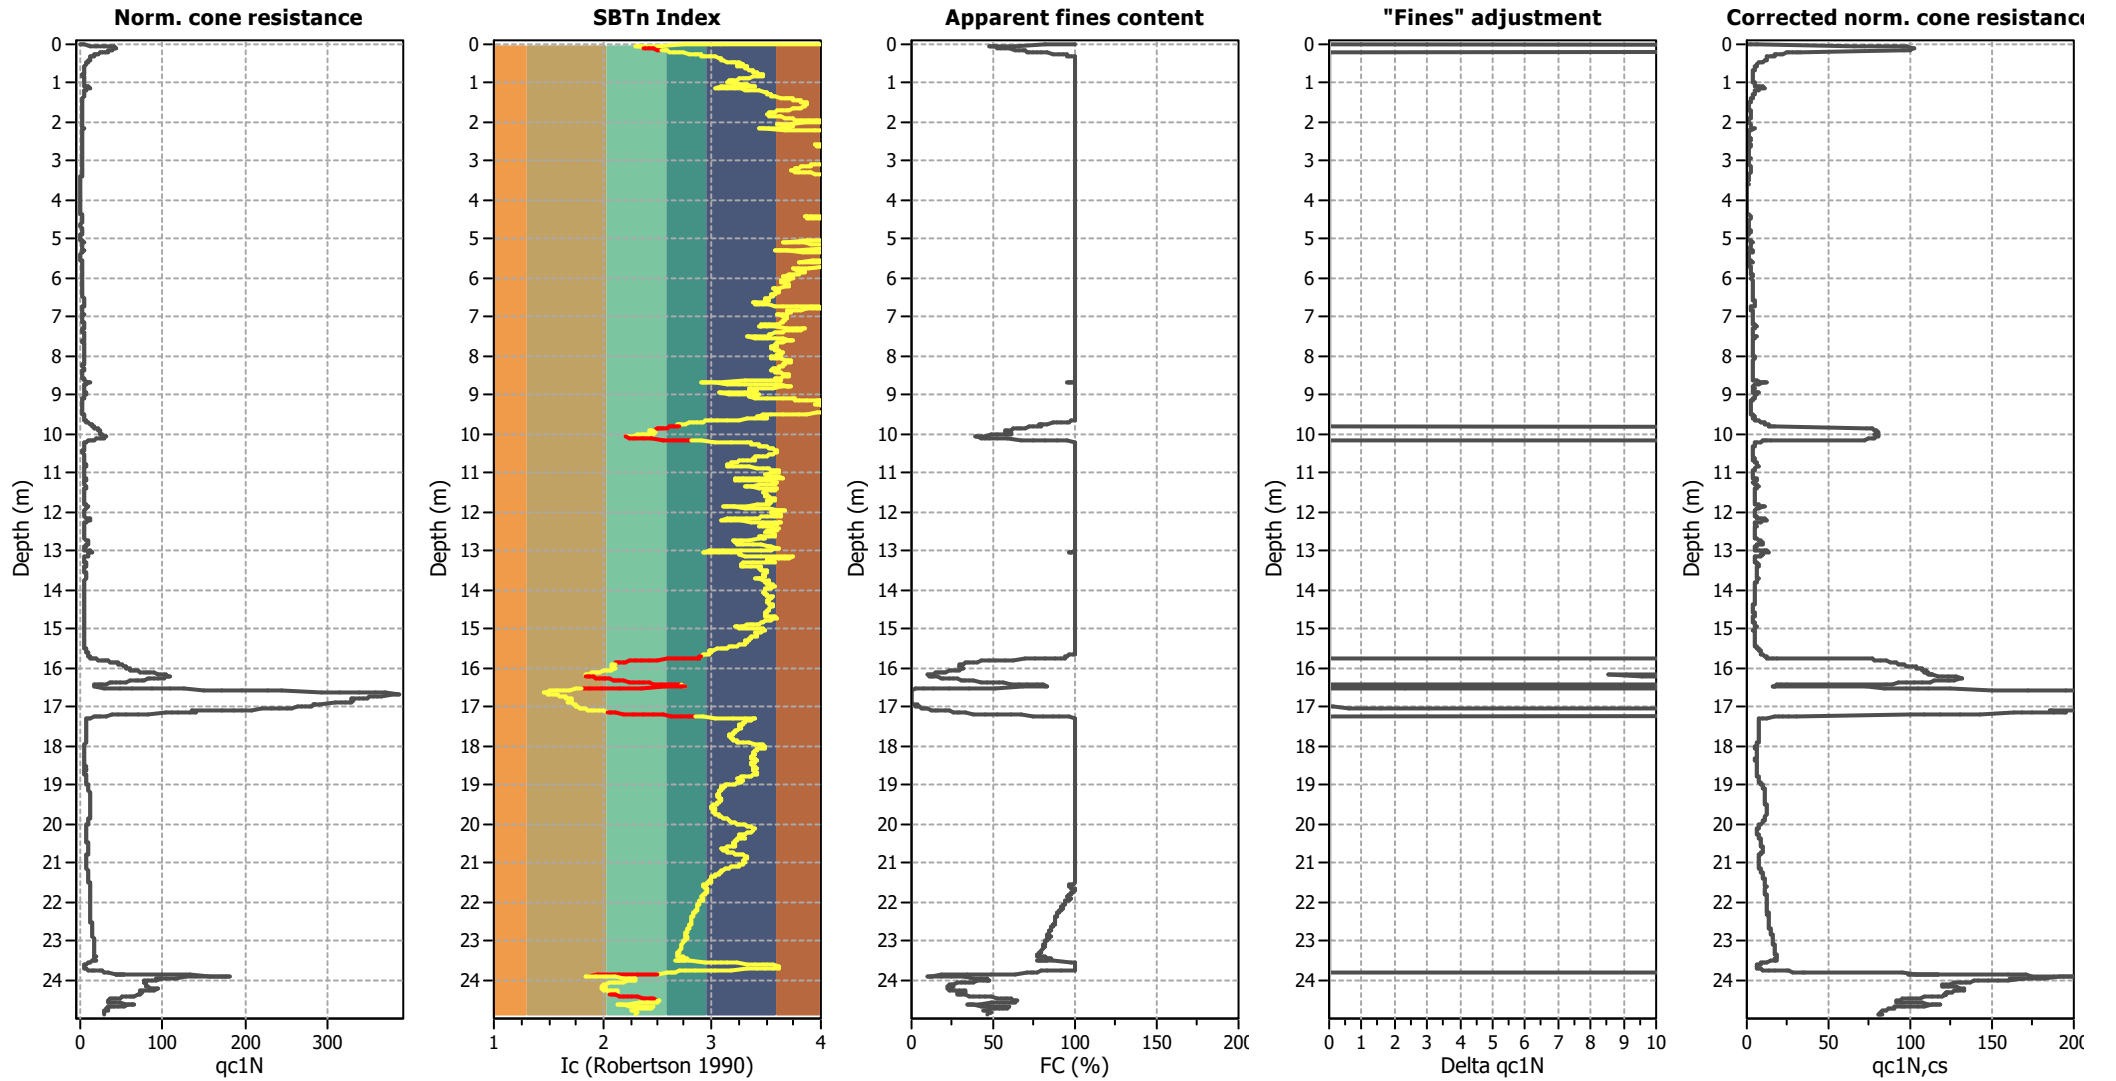

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

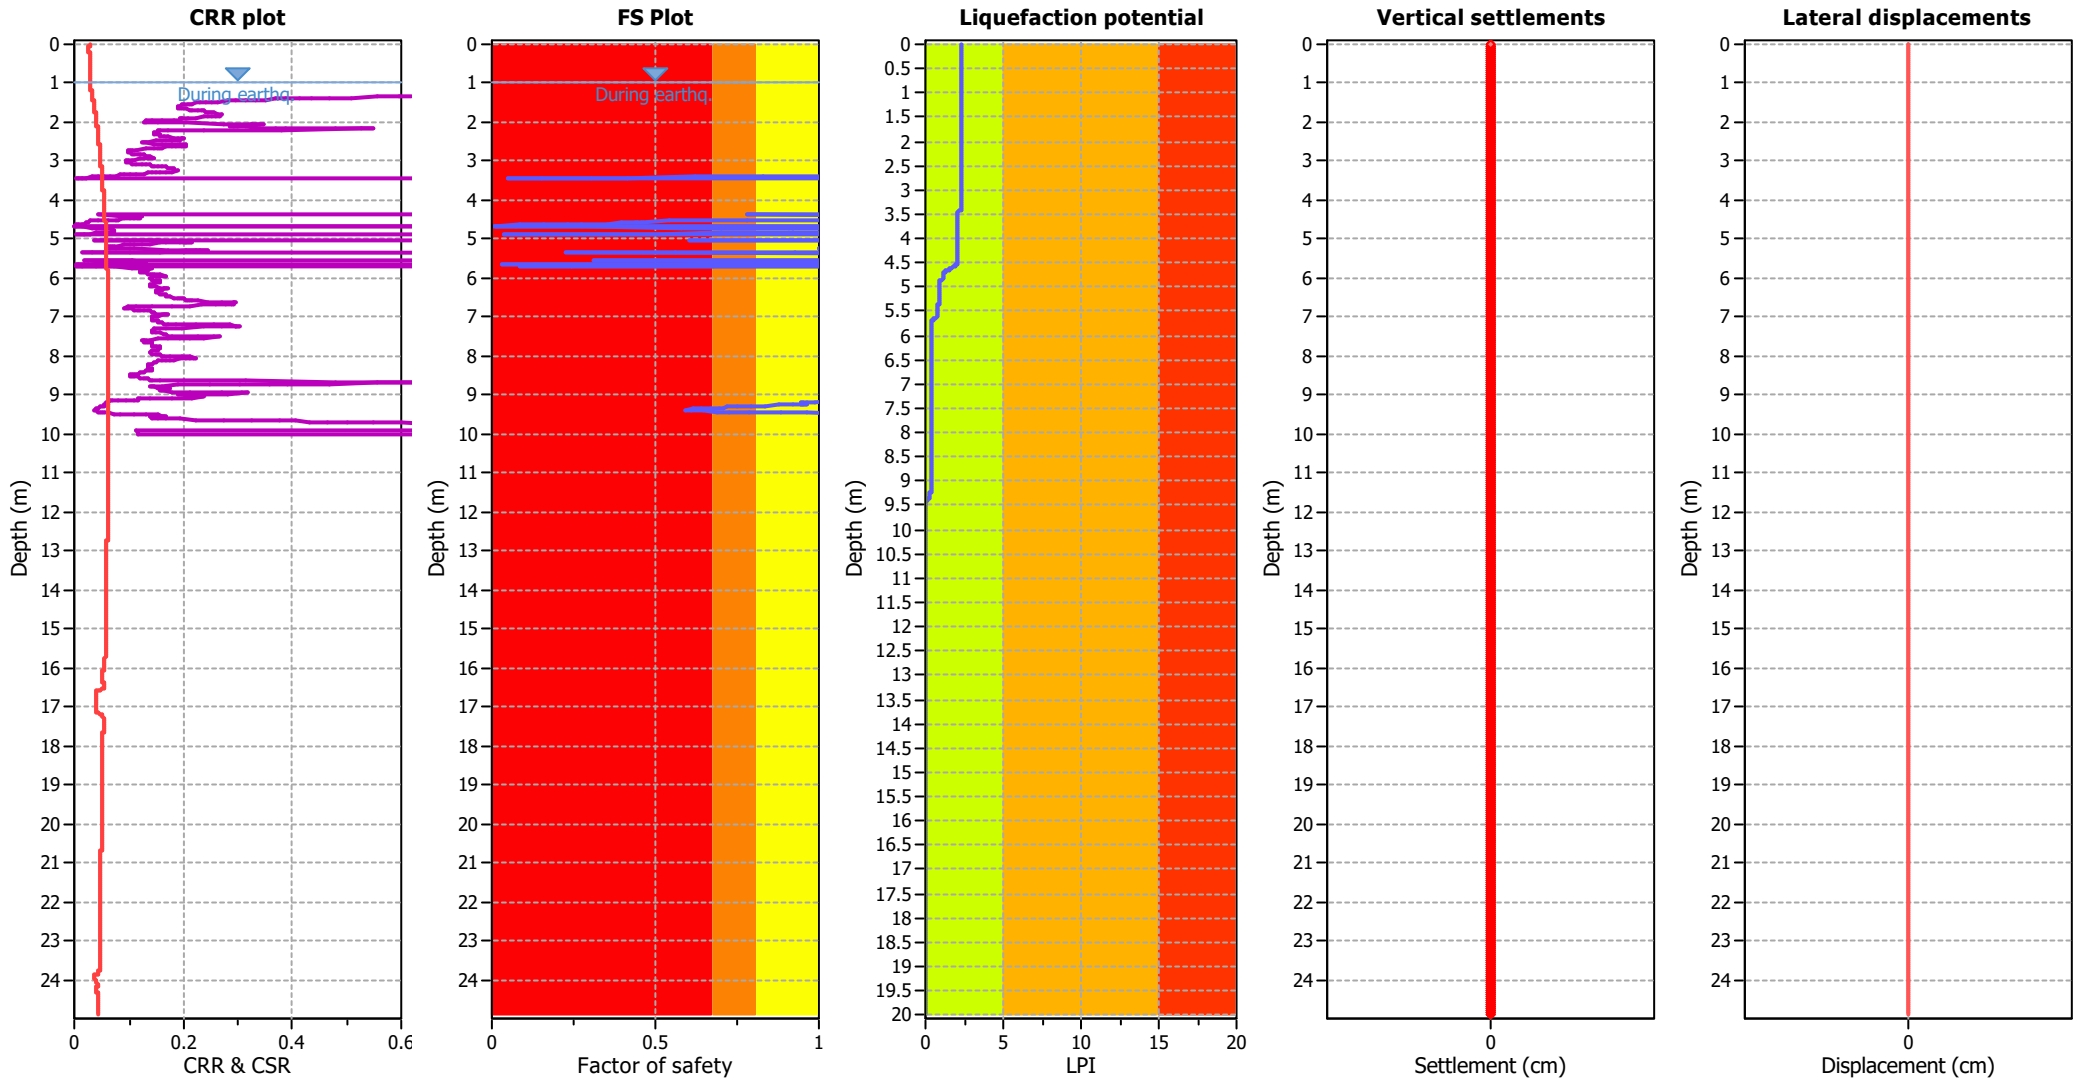

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

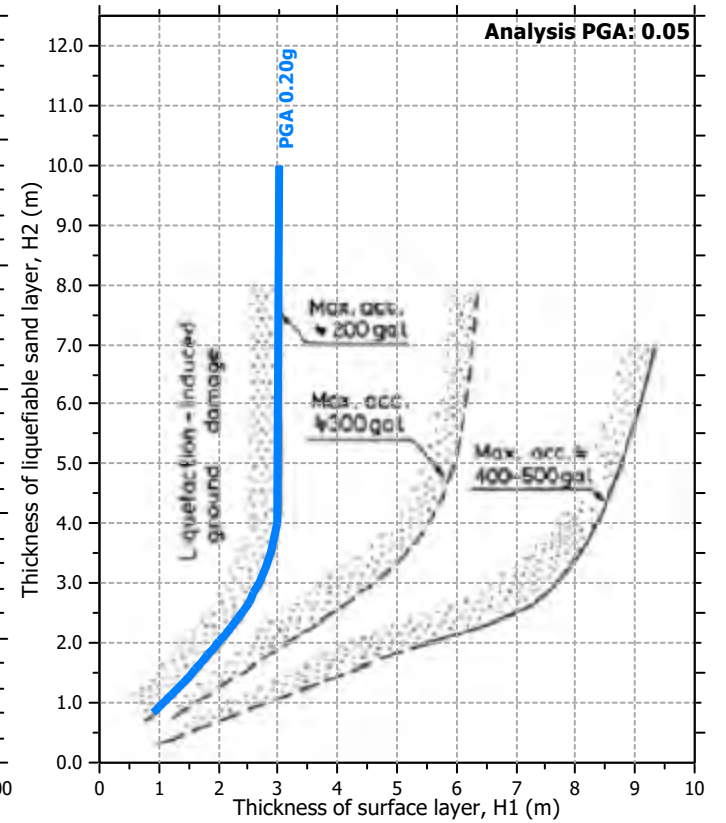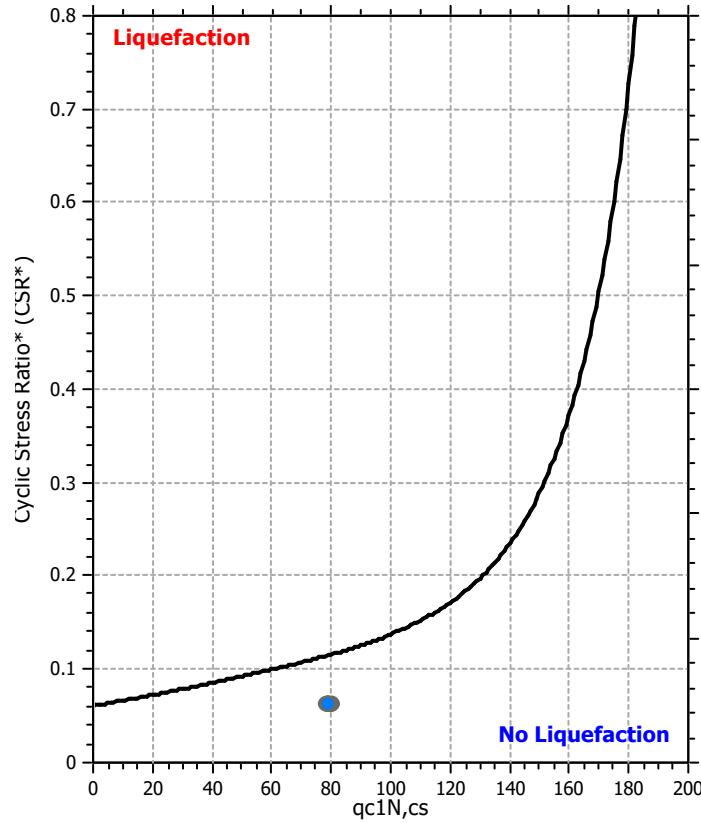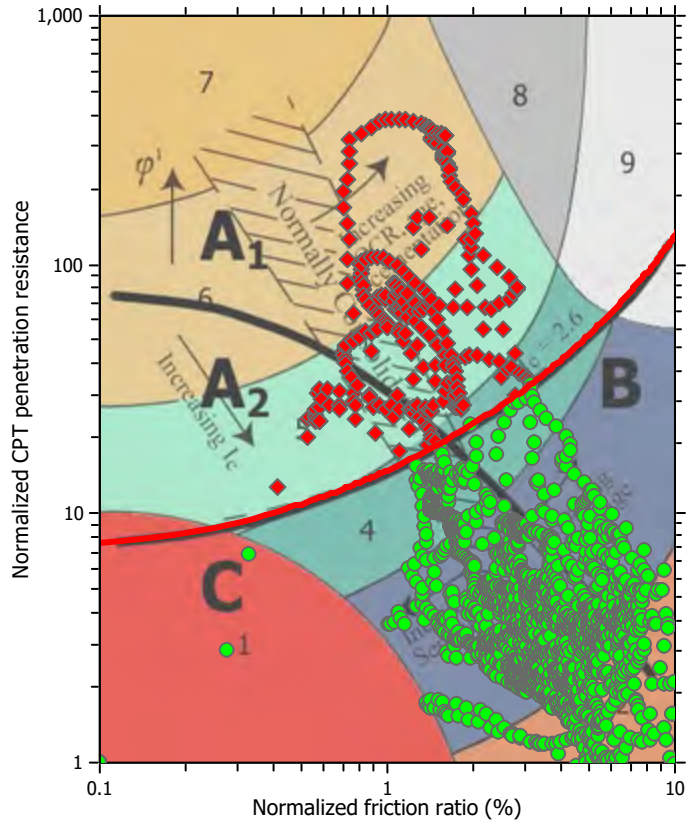

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

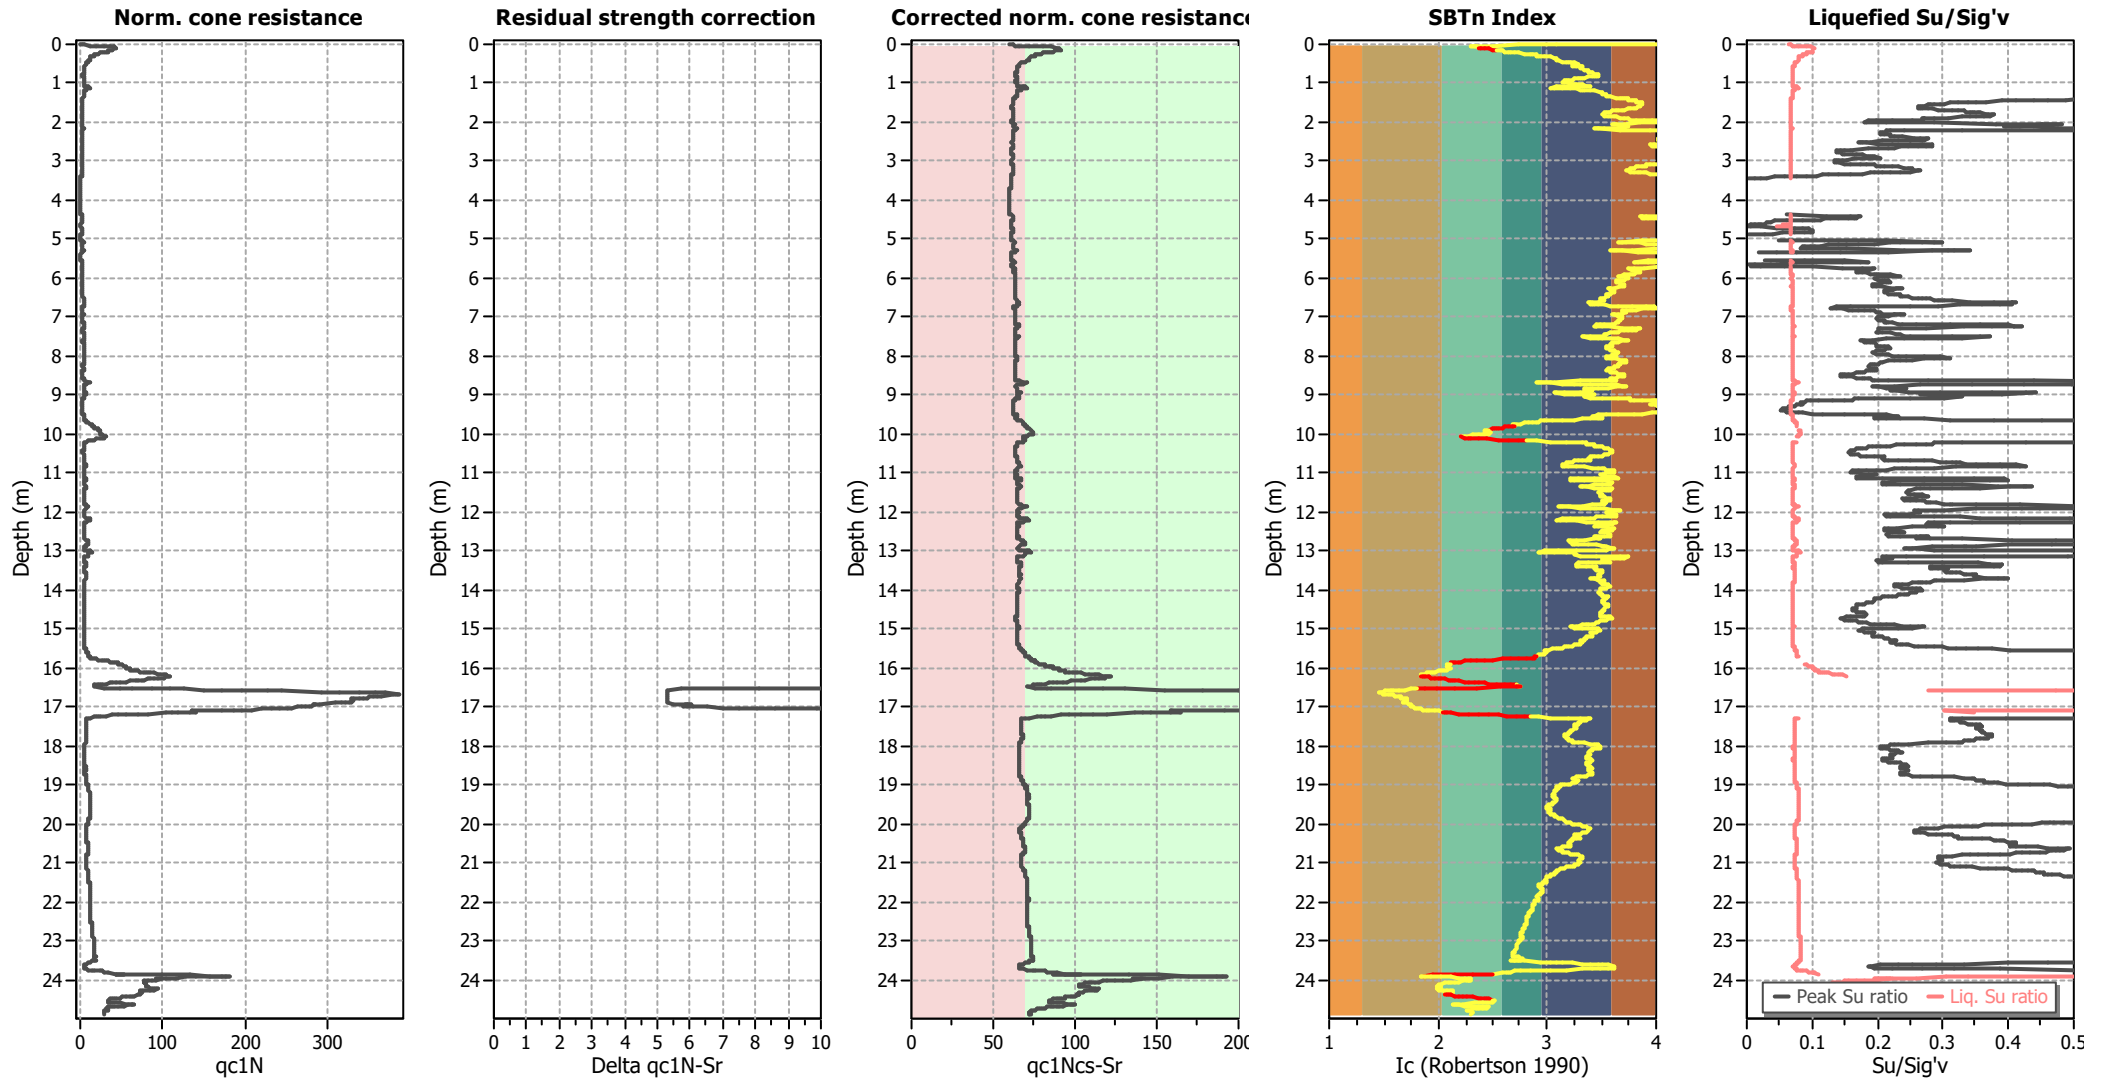

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

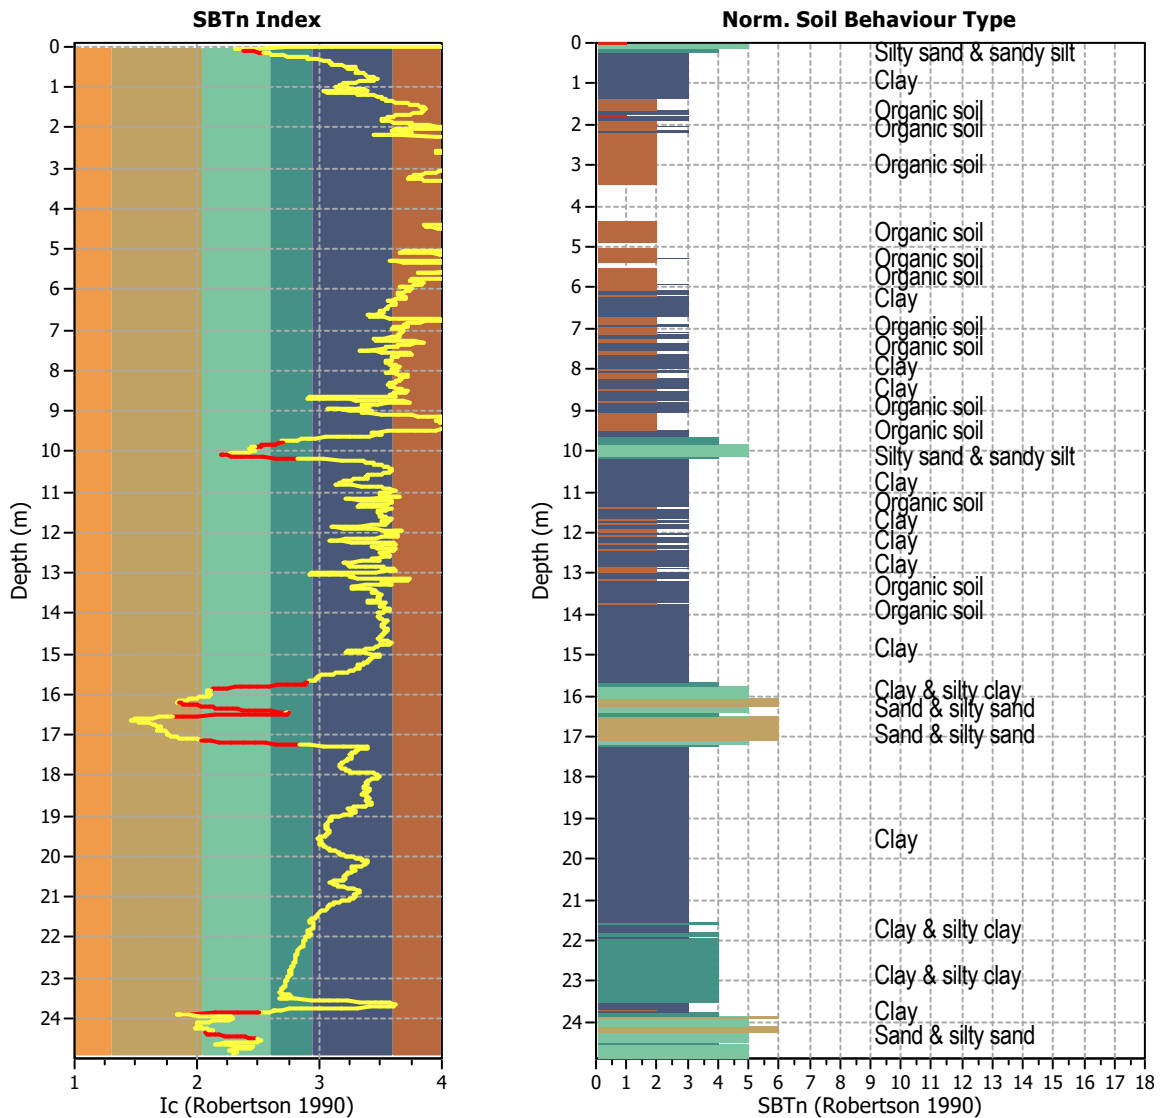


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2490
 Total points excluded: 118
 Exclusion percentage: 4.74%
 Number of layers detected: 9


Estimation of post-earthquake settlements

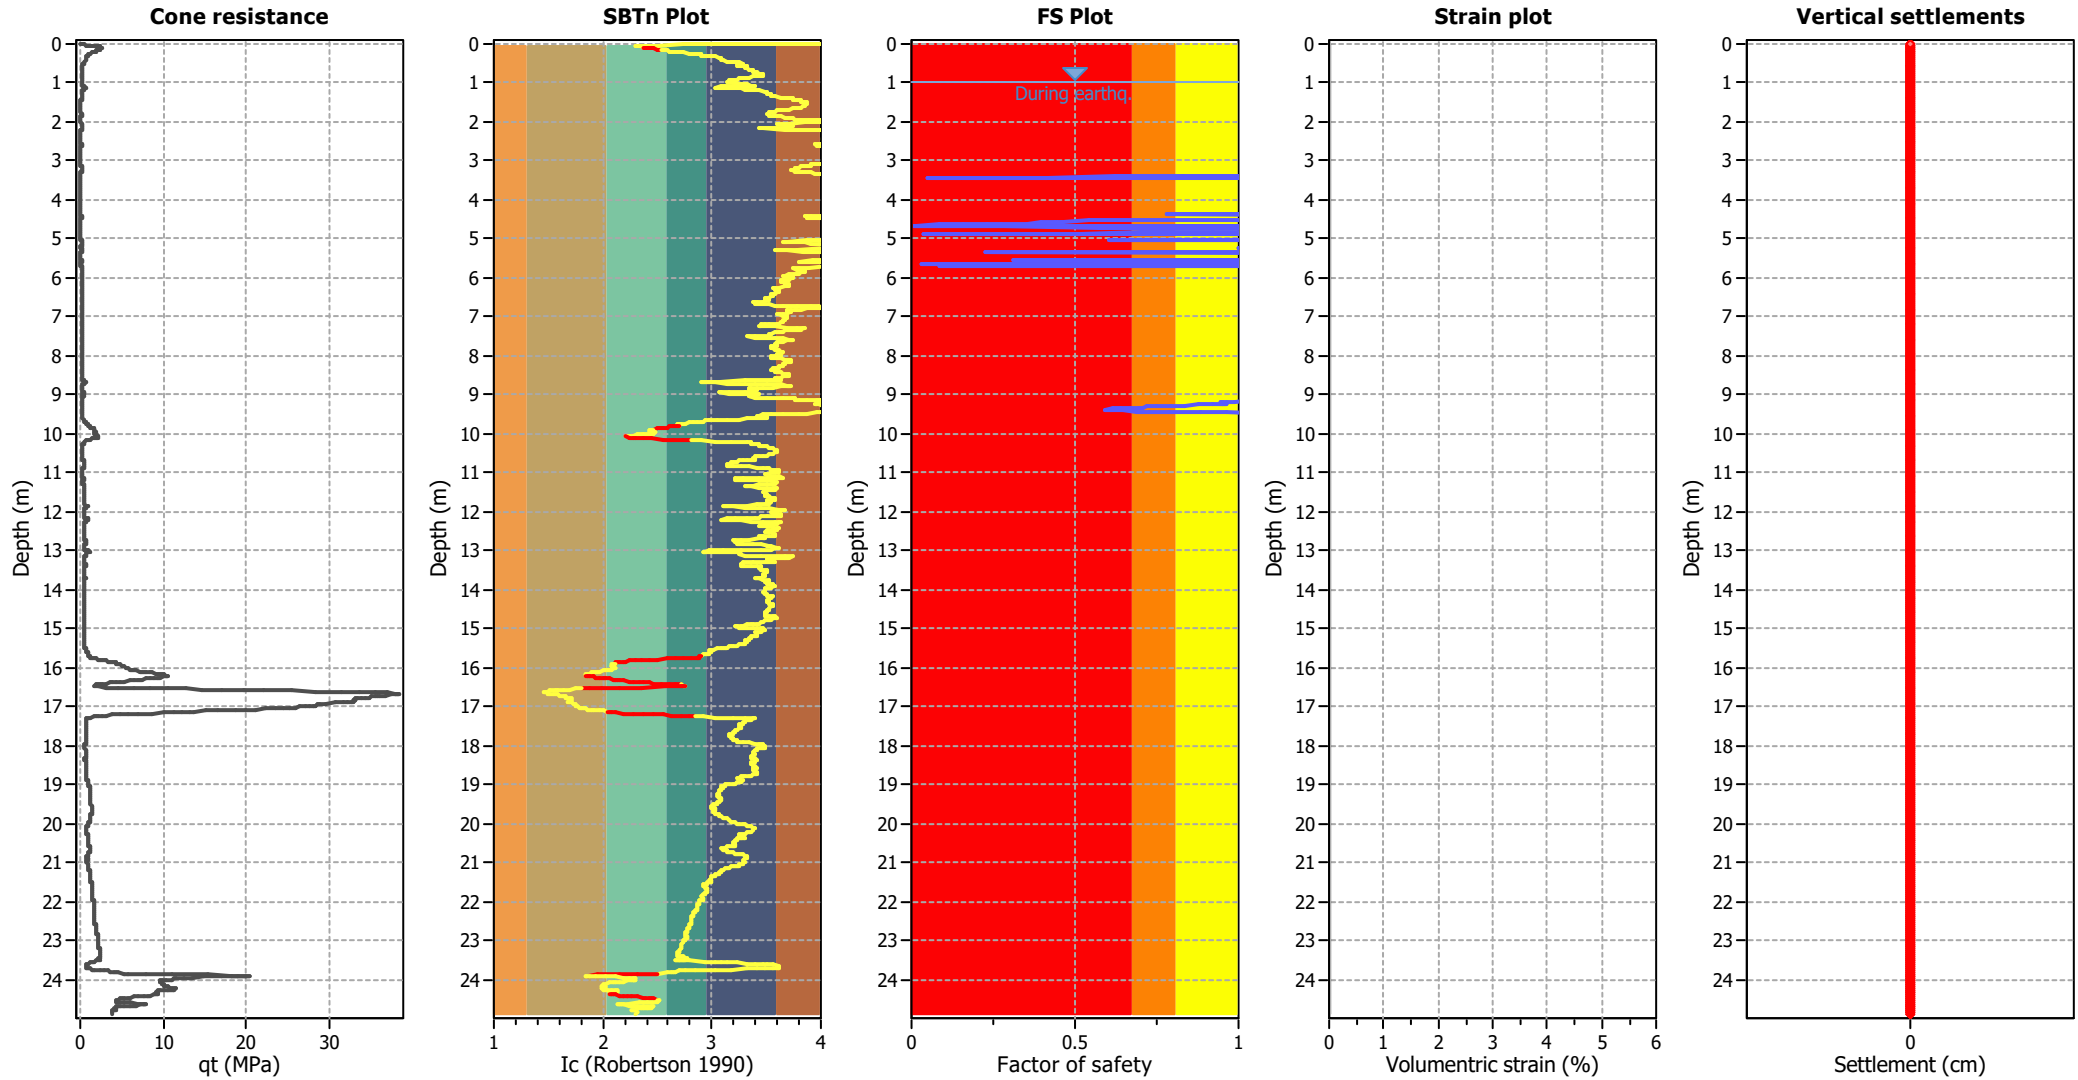

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

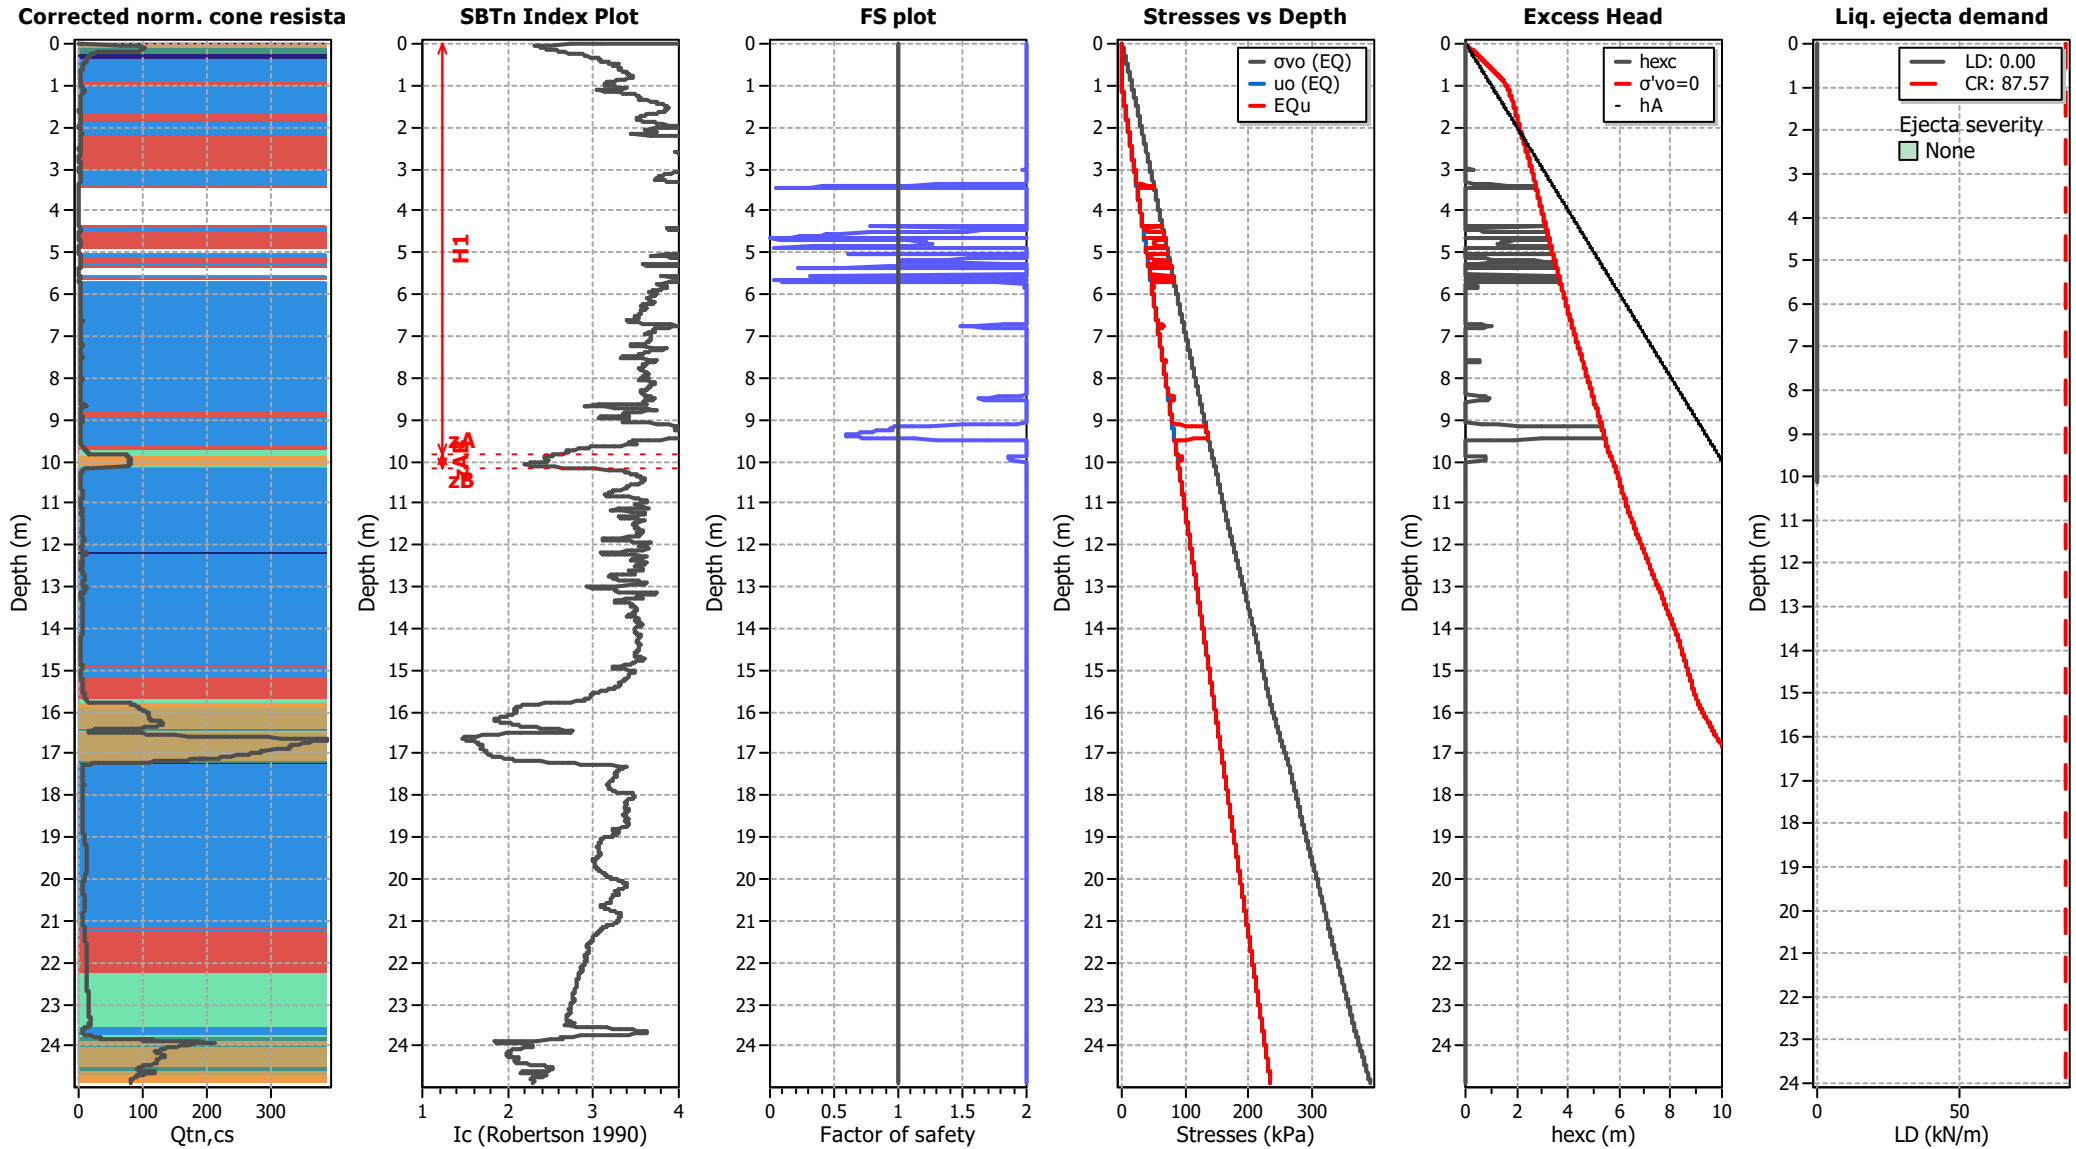

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT20

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

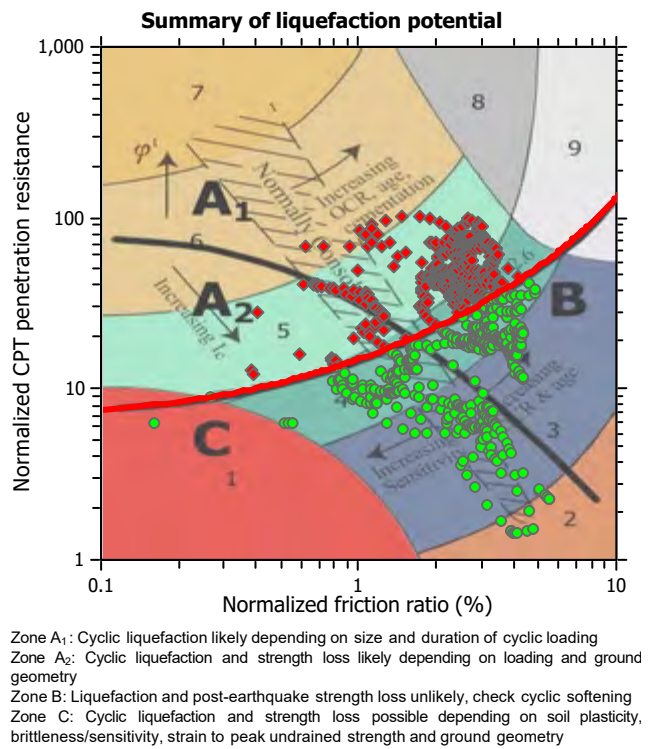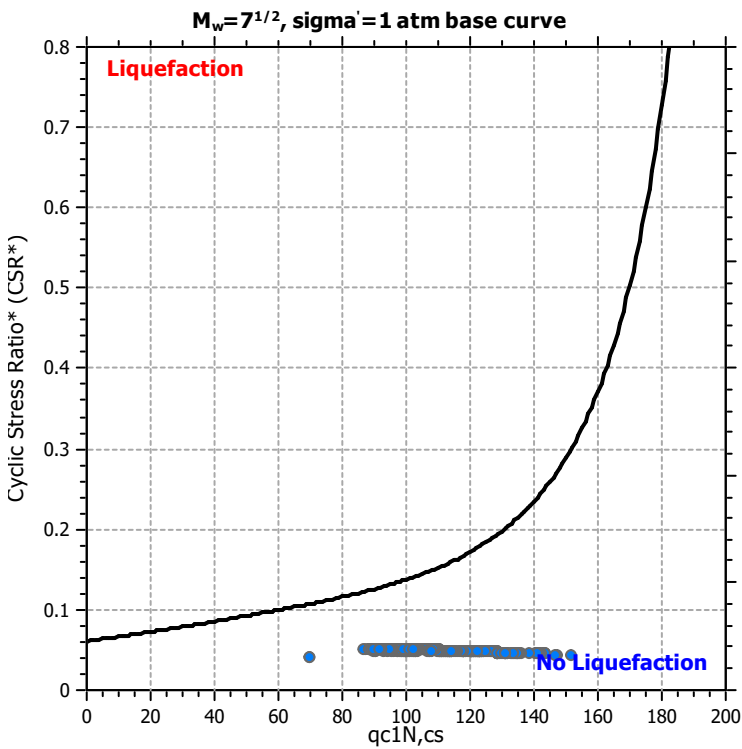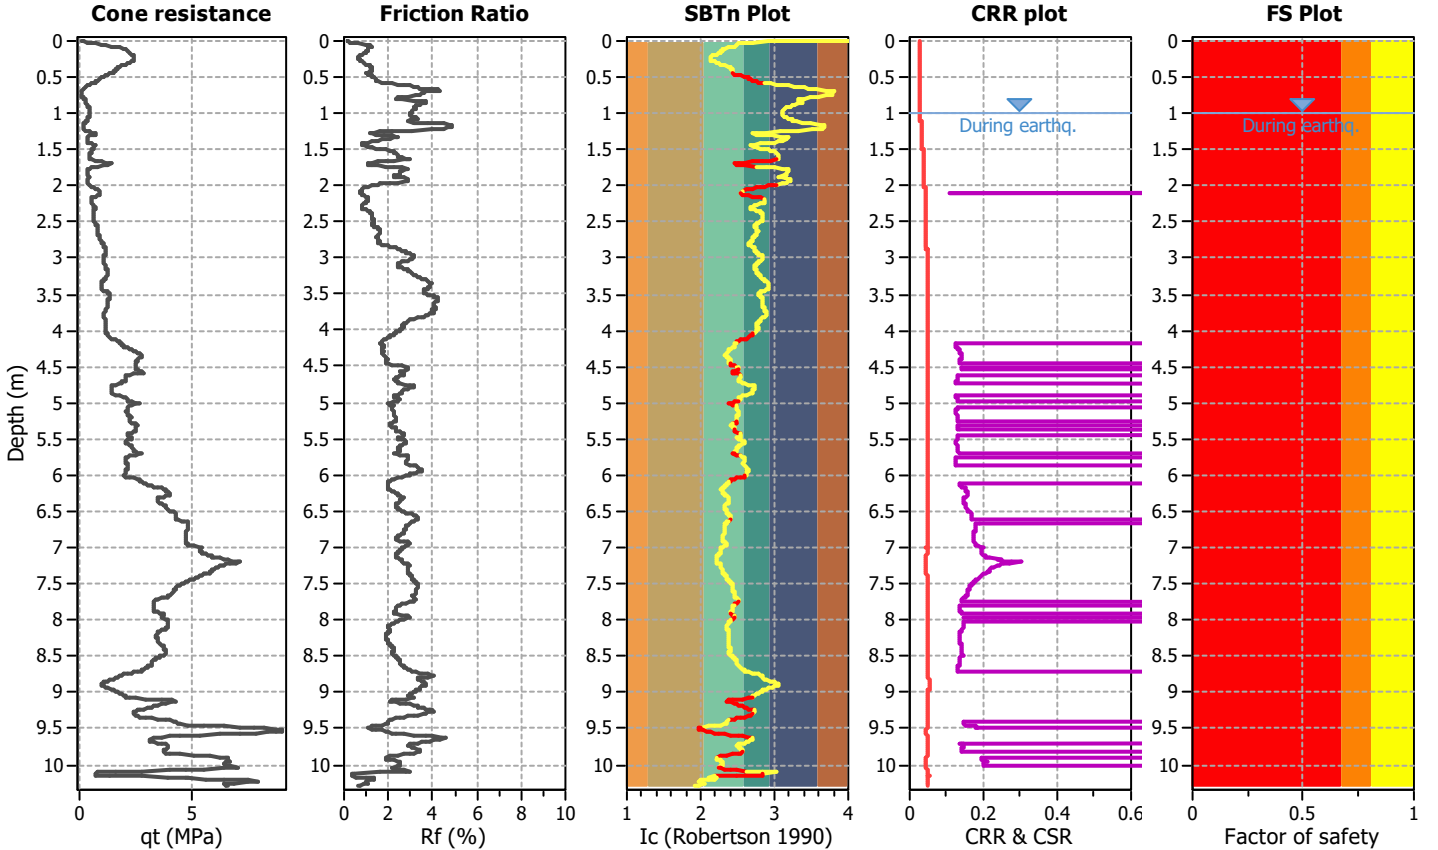

CPT basic interpretation plots

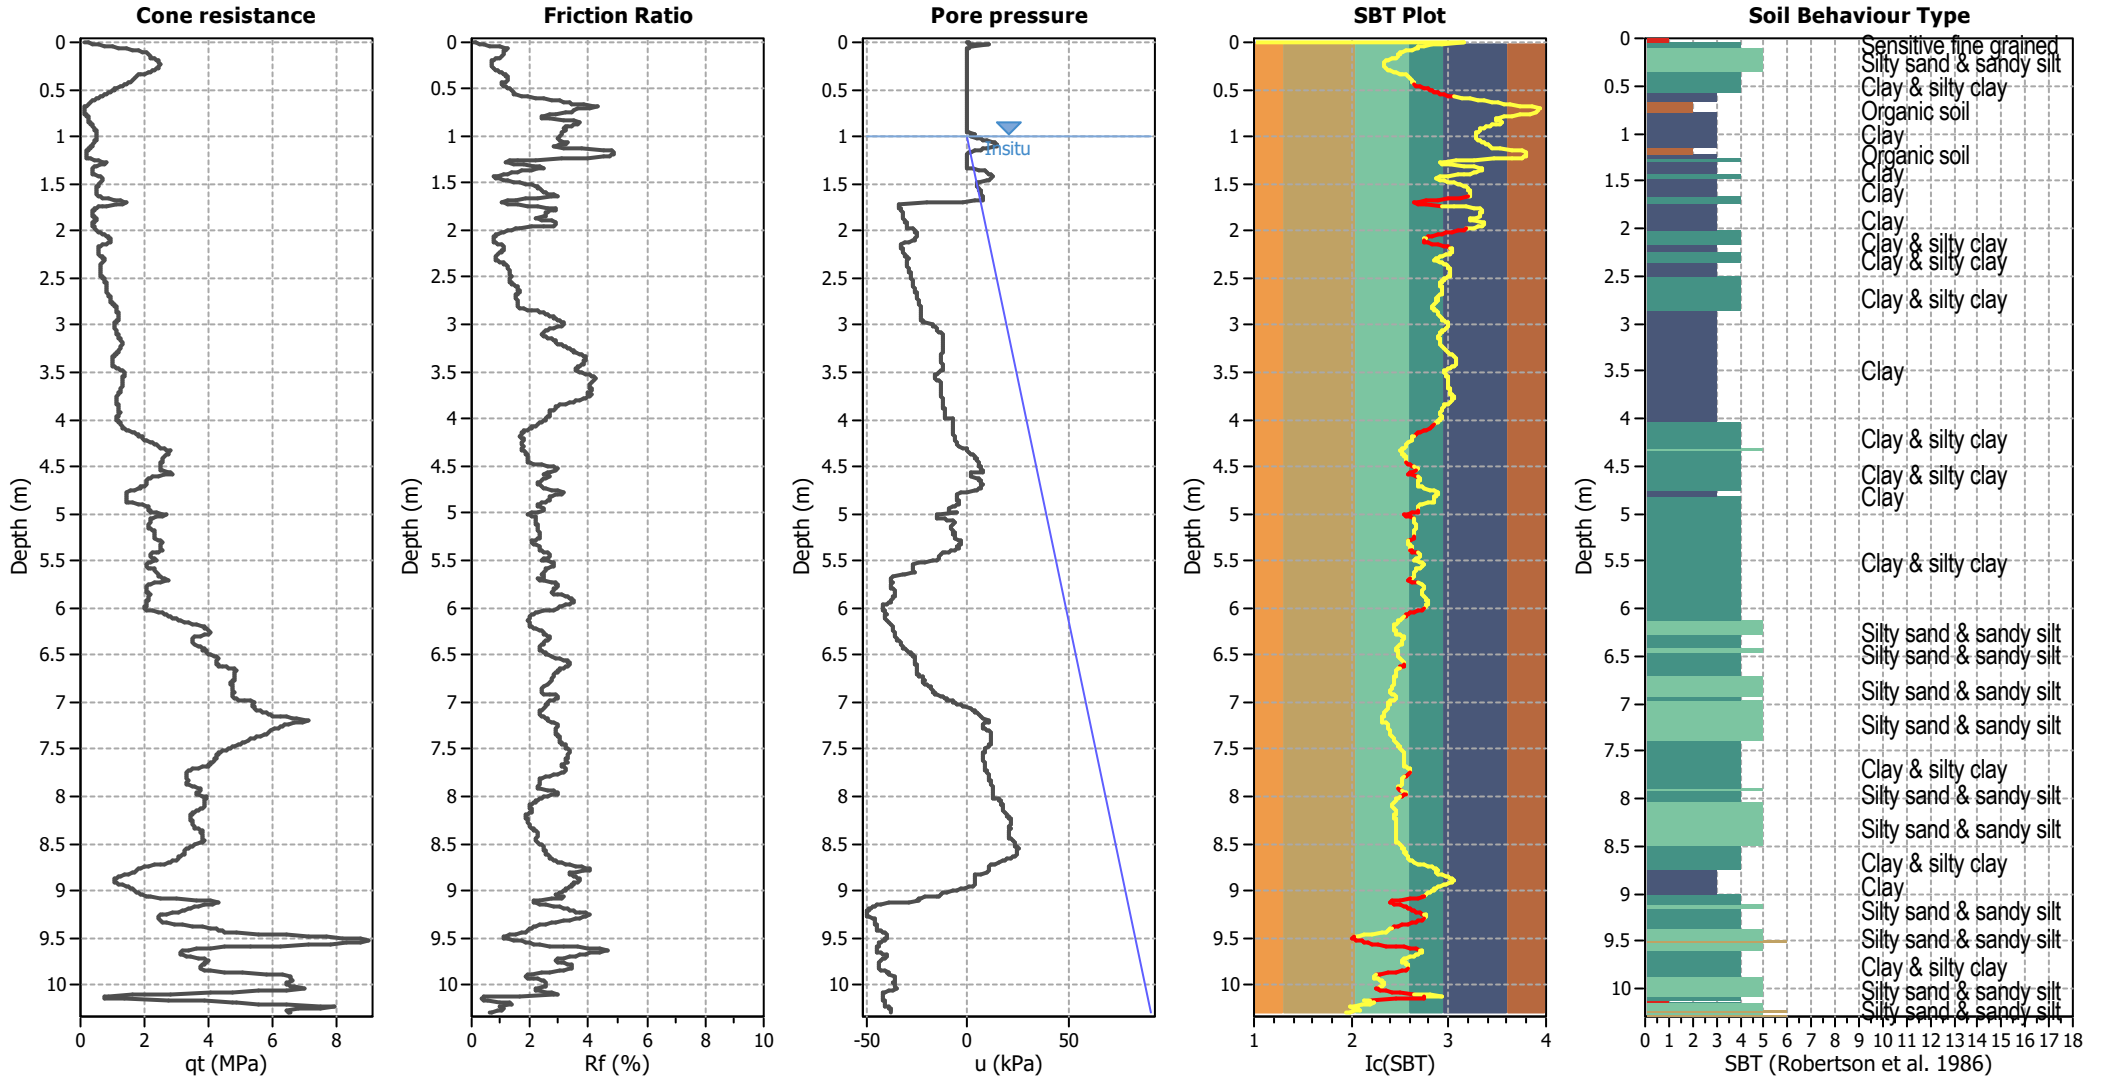


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

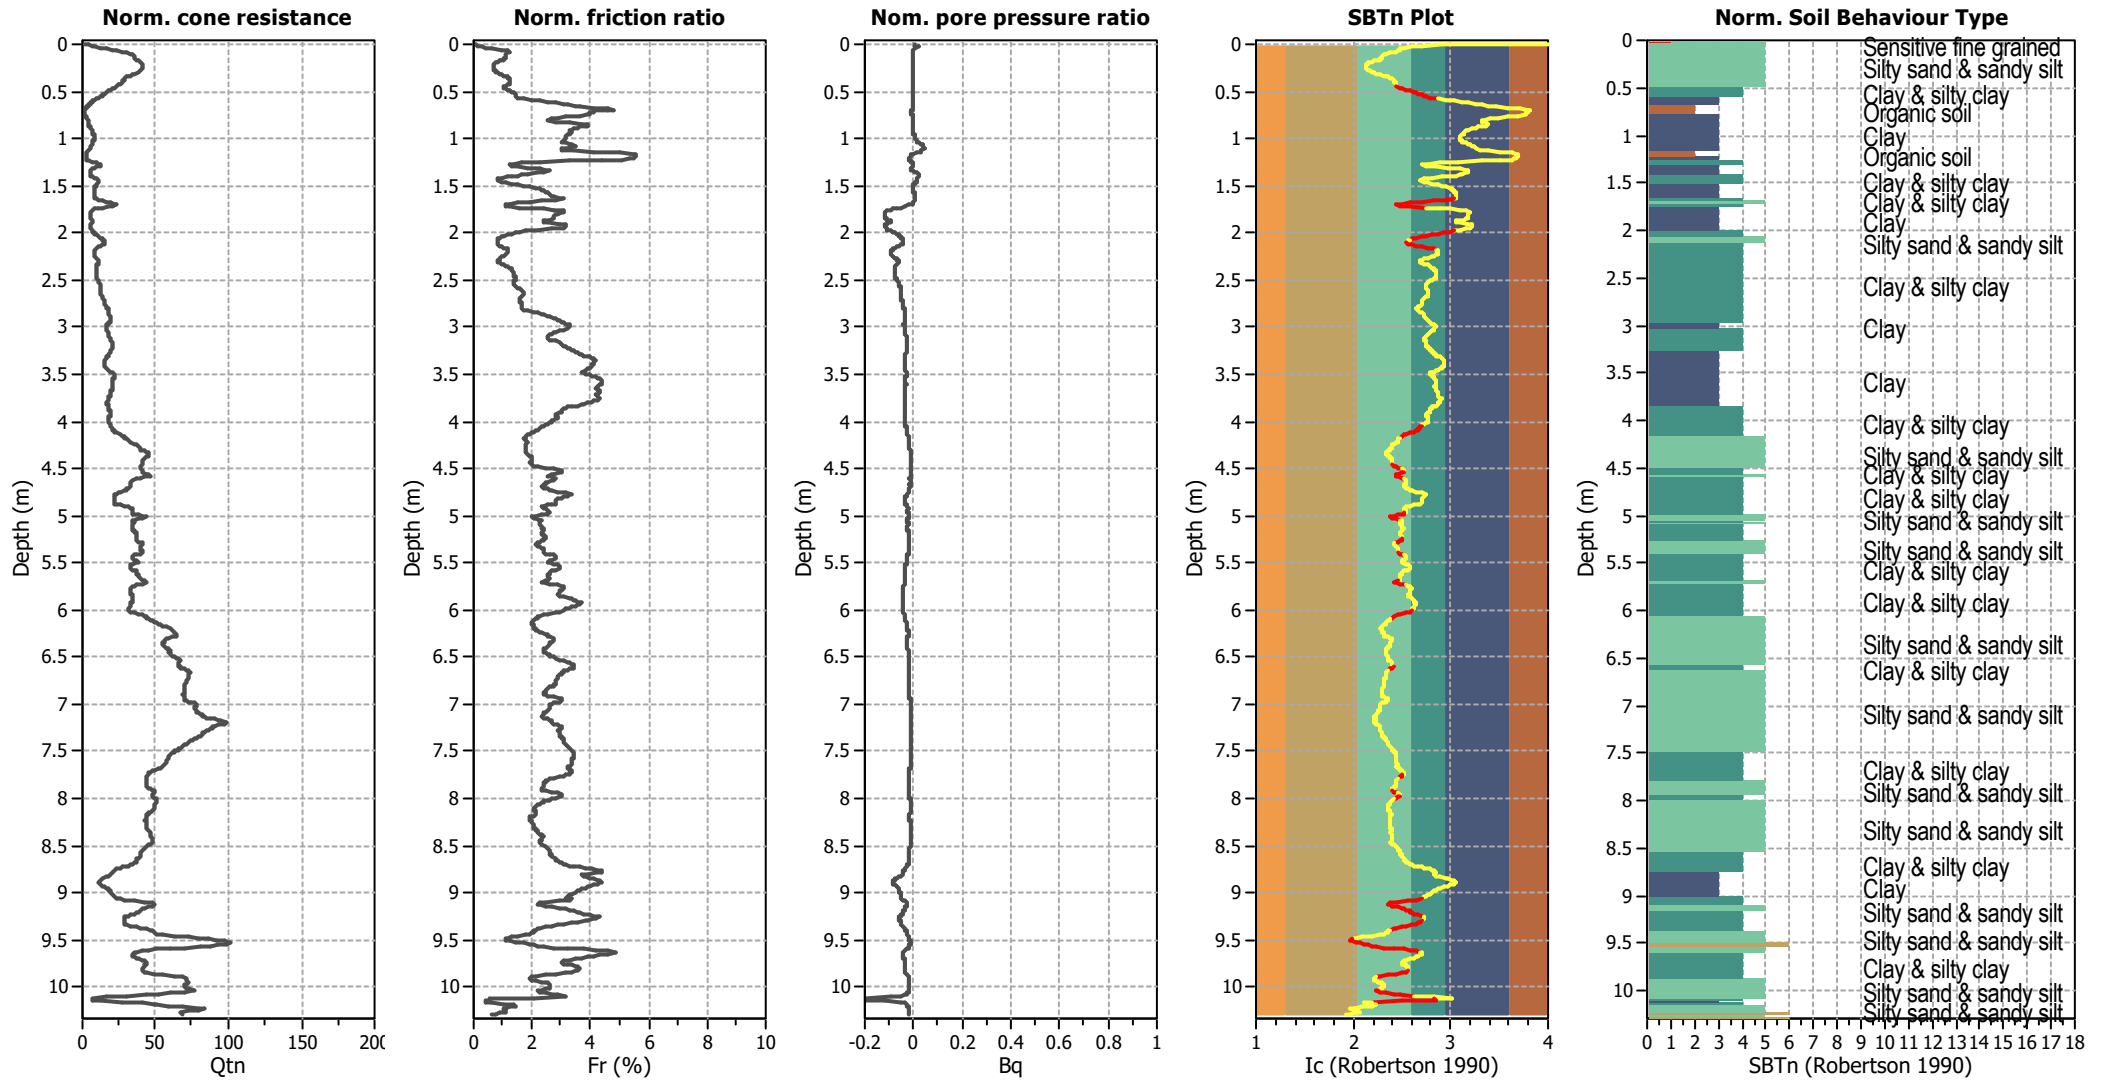


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

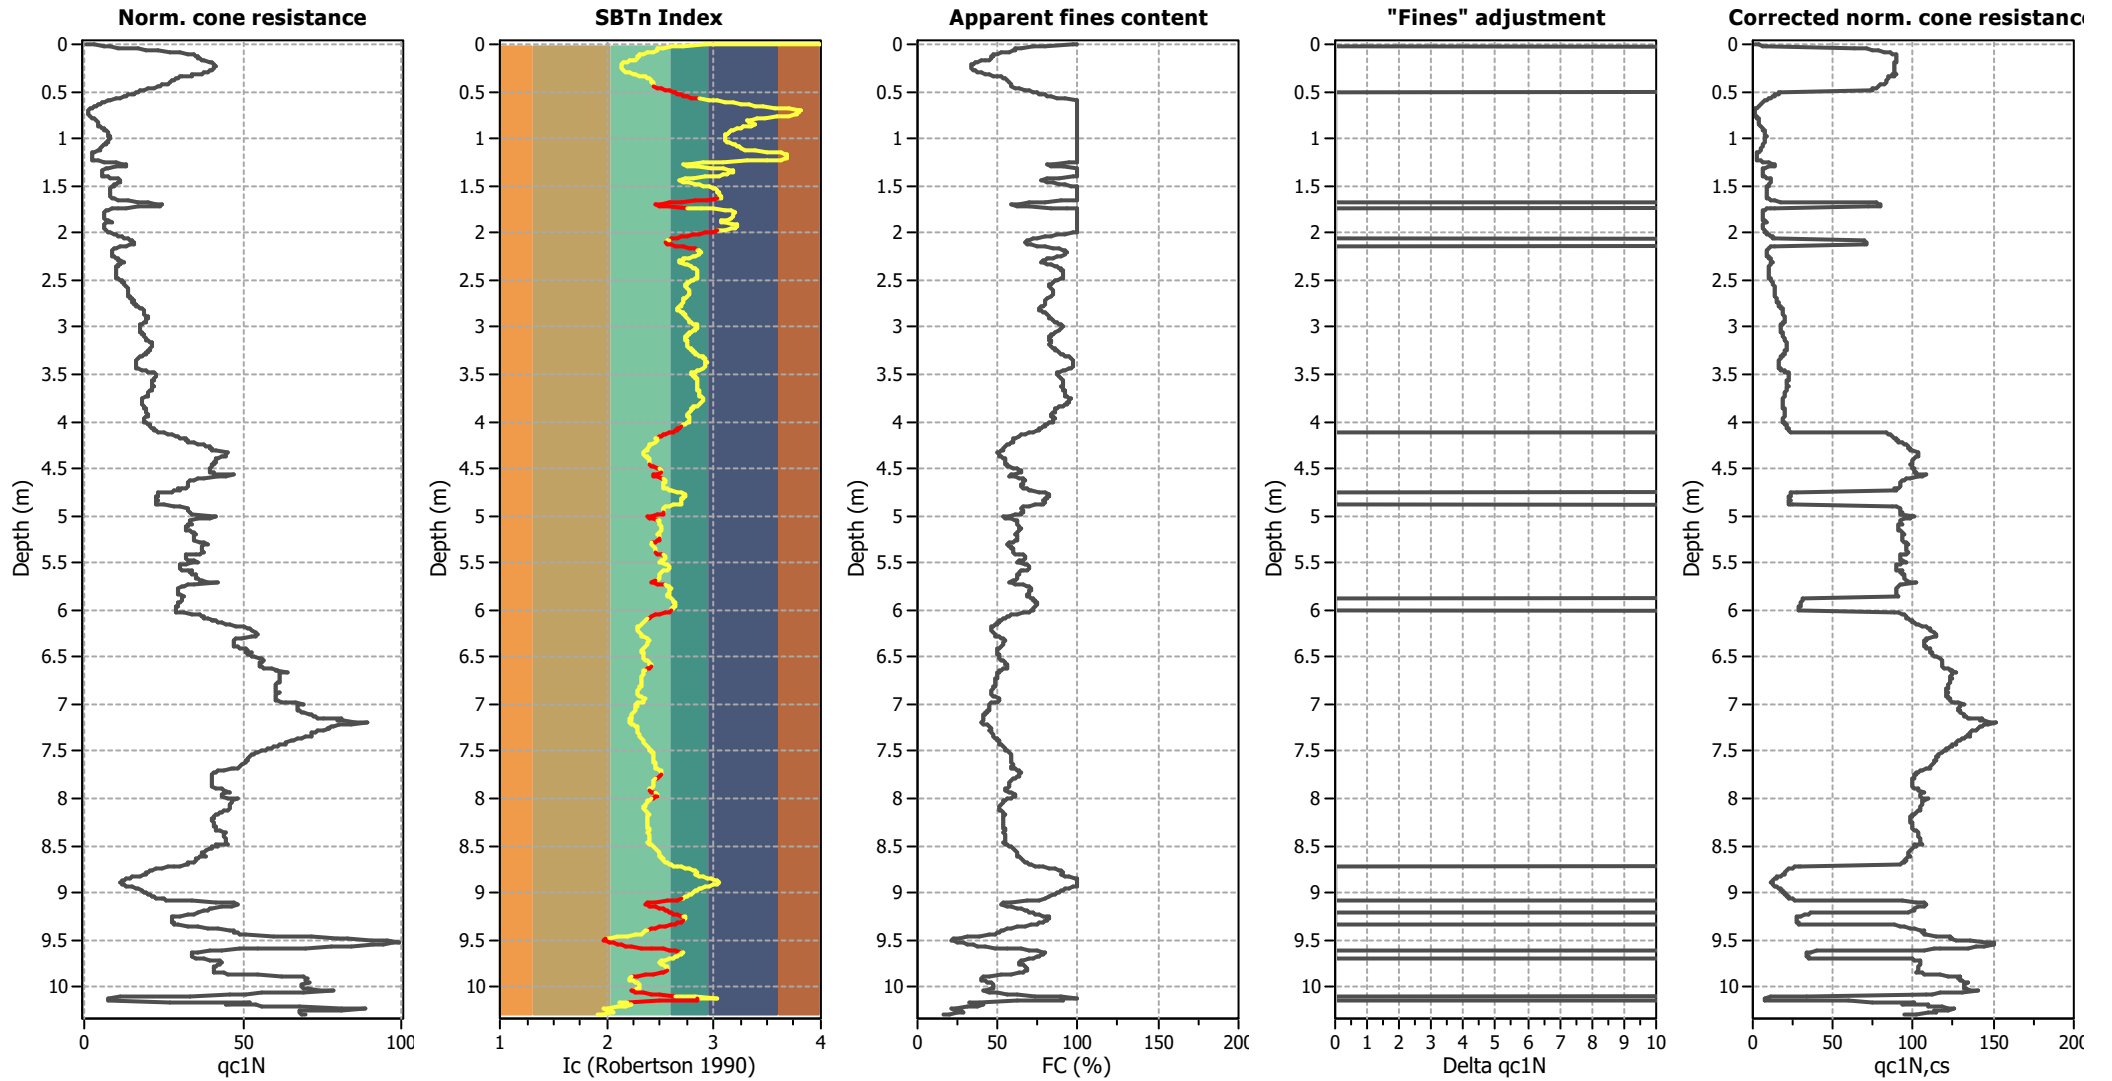

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

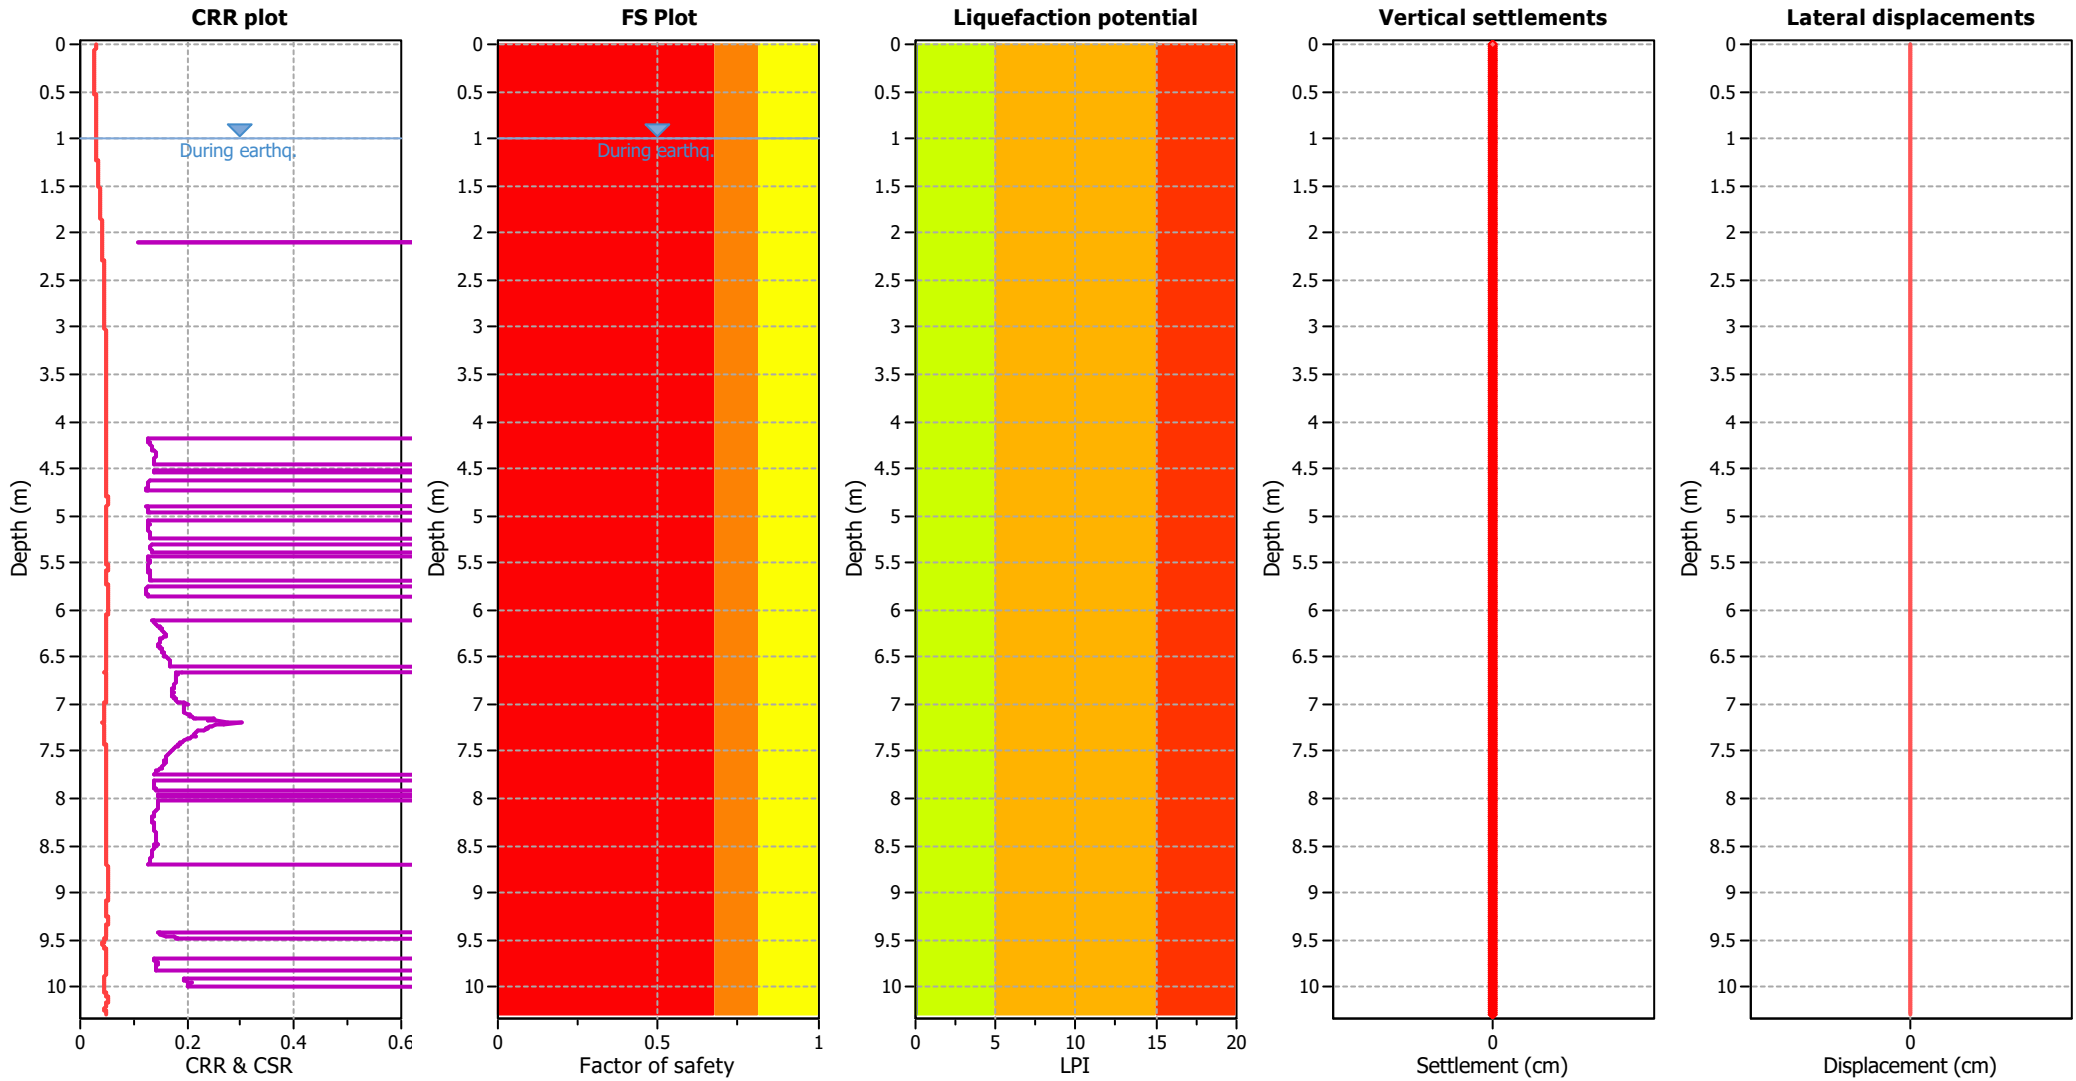

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

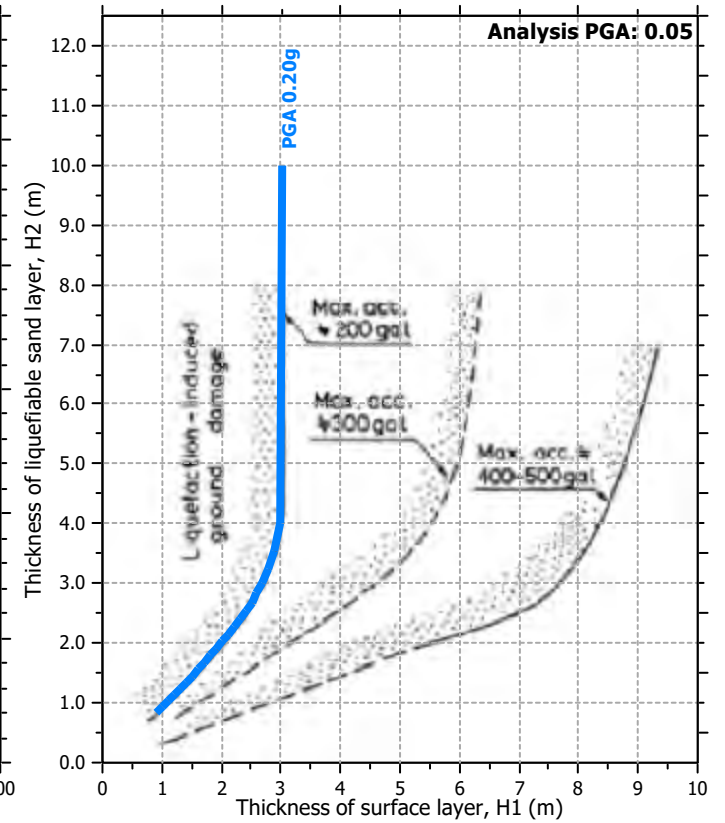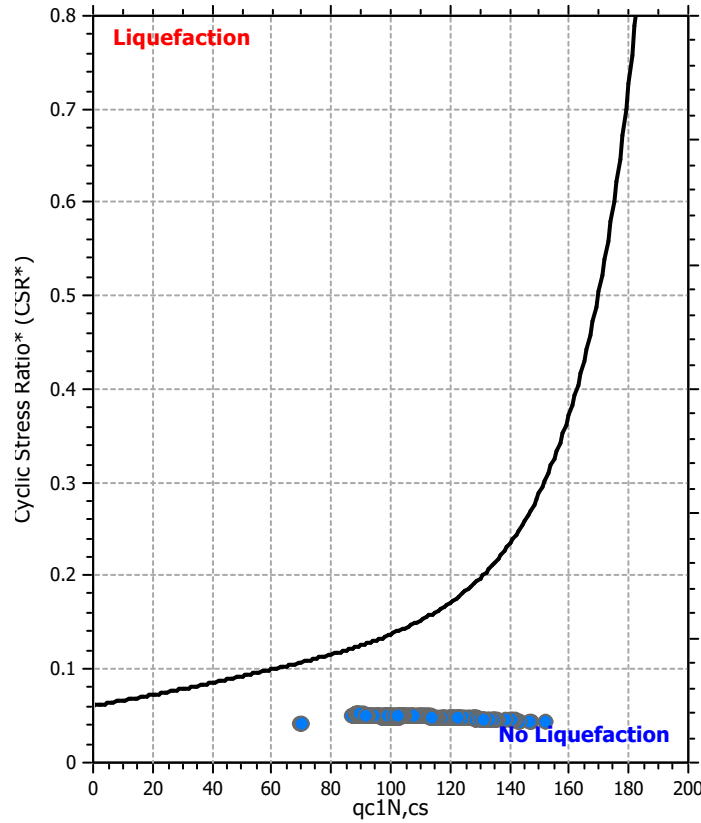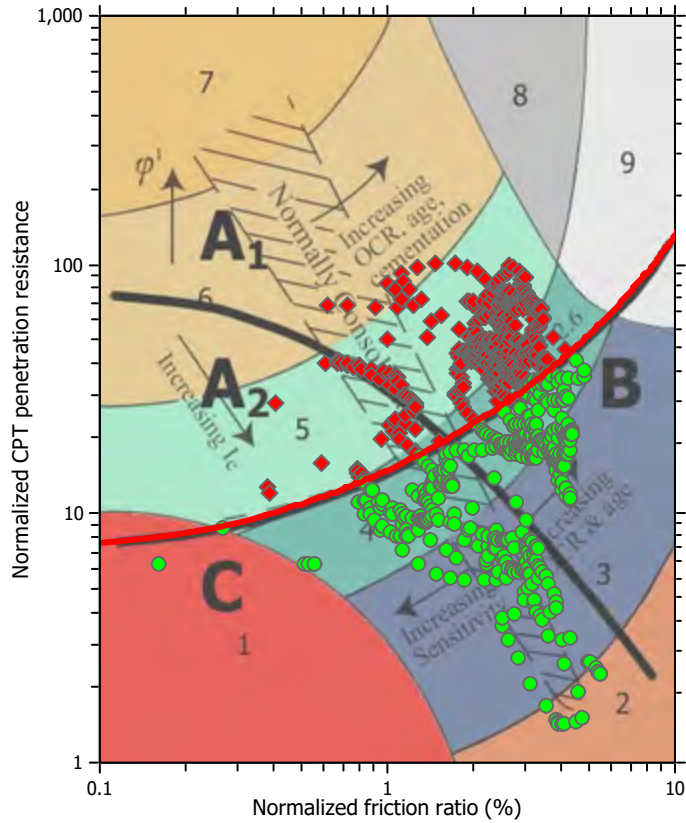

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

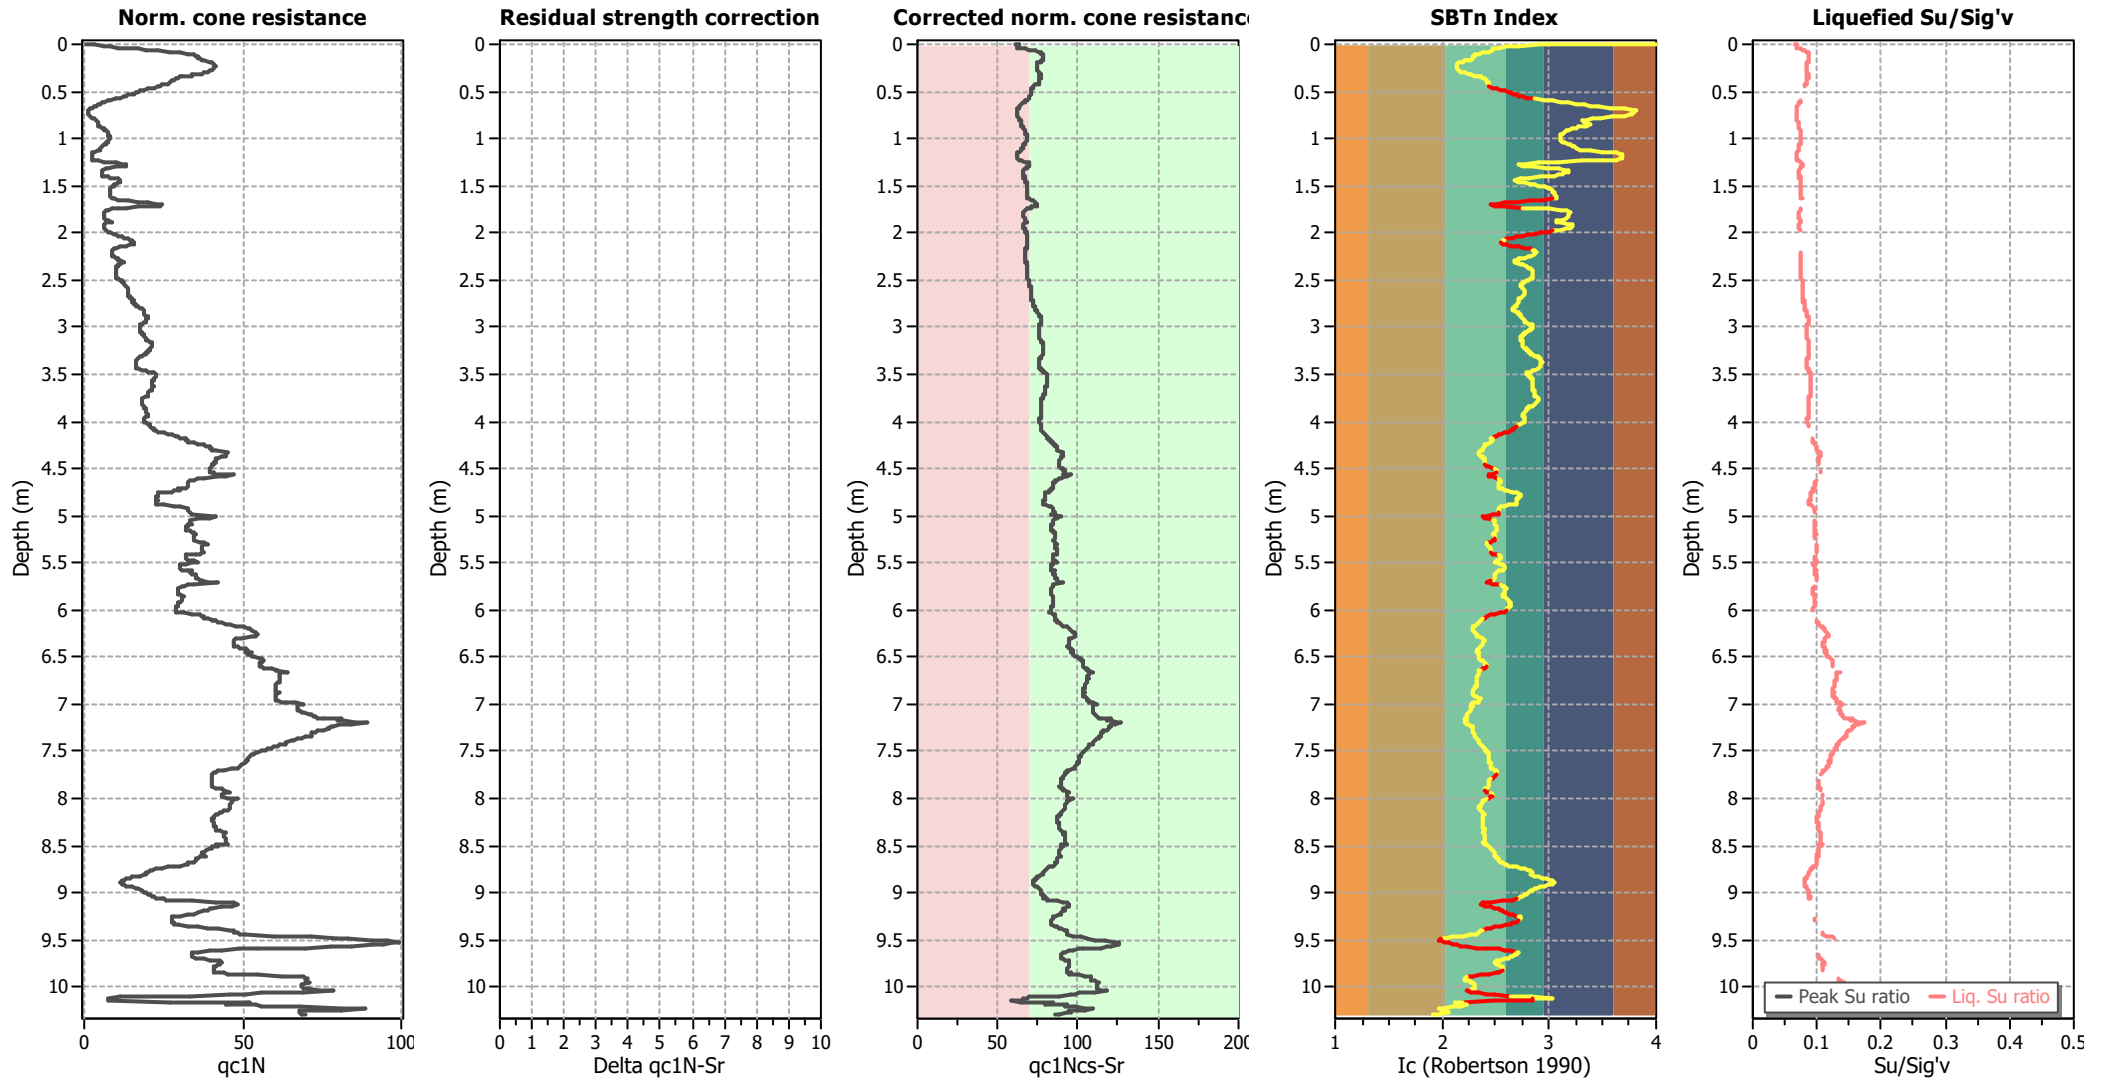

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

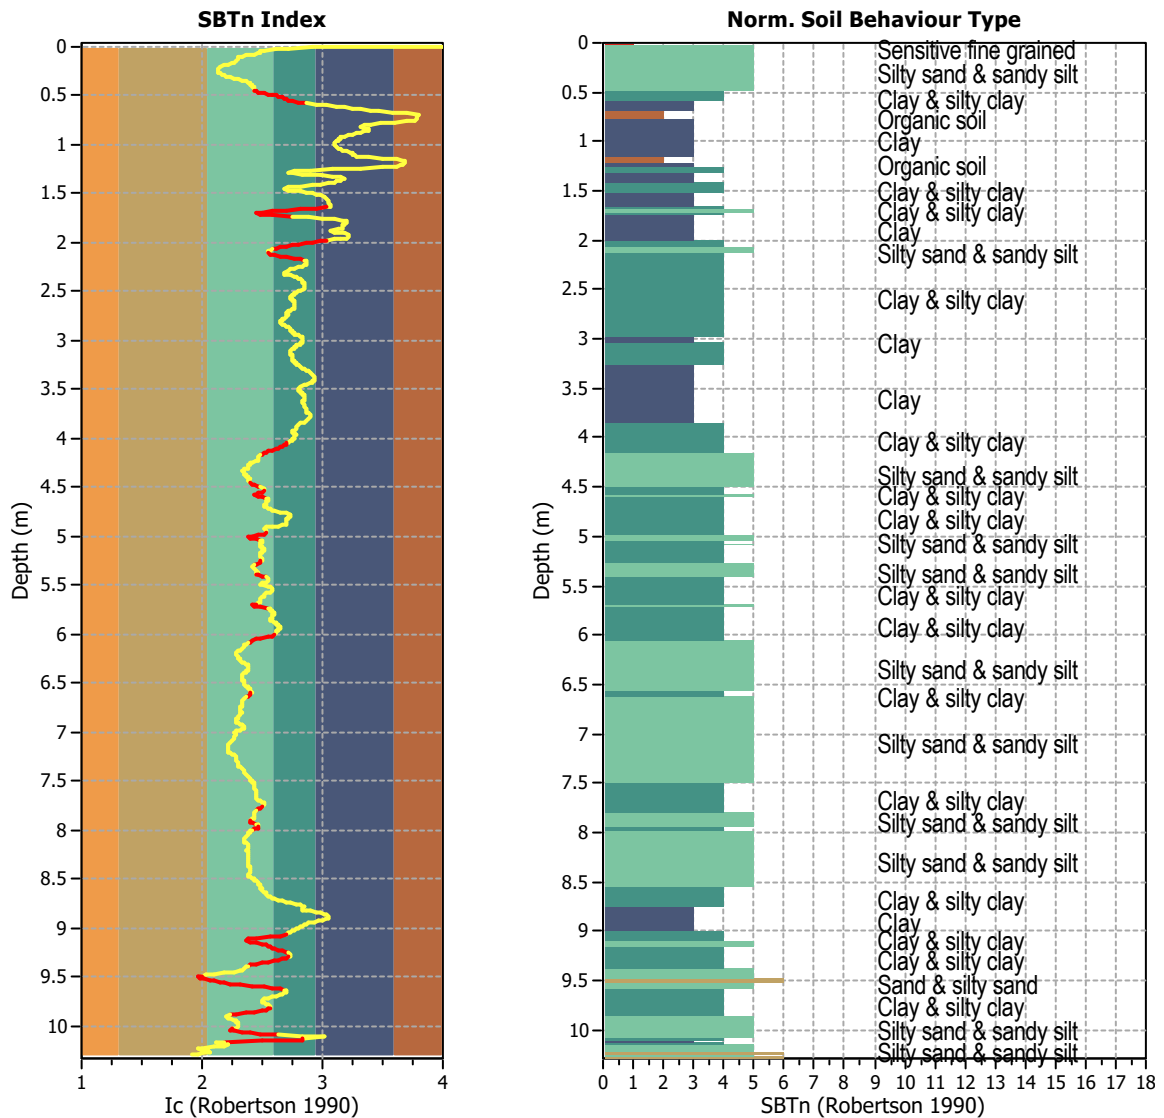


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1030
 Total points excluded: 190
 Exclusion percentage: 18.45%
 Number of layers detected: 26


Estimation of post-earthquake settlements

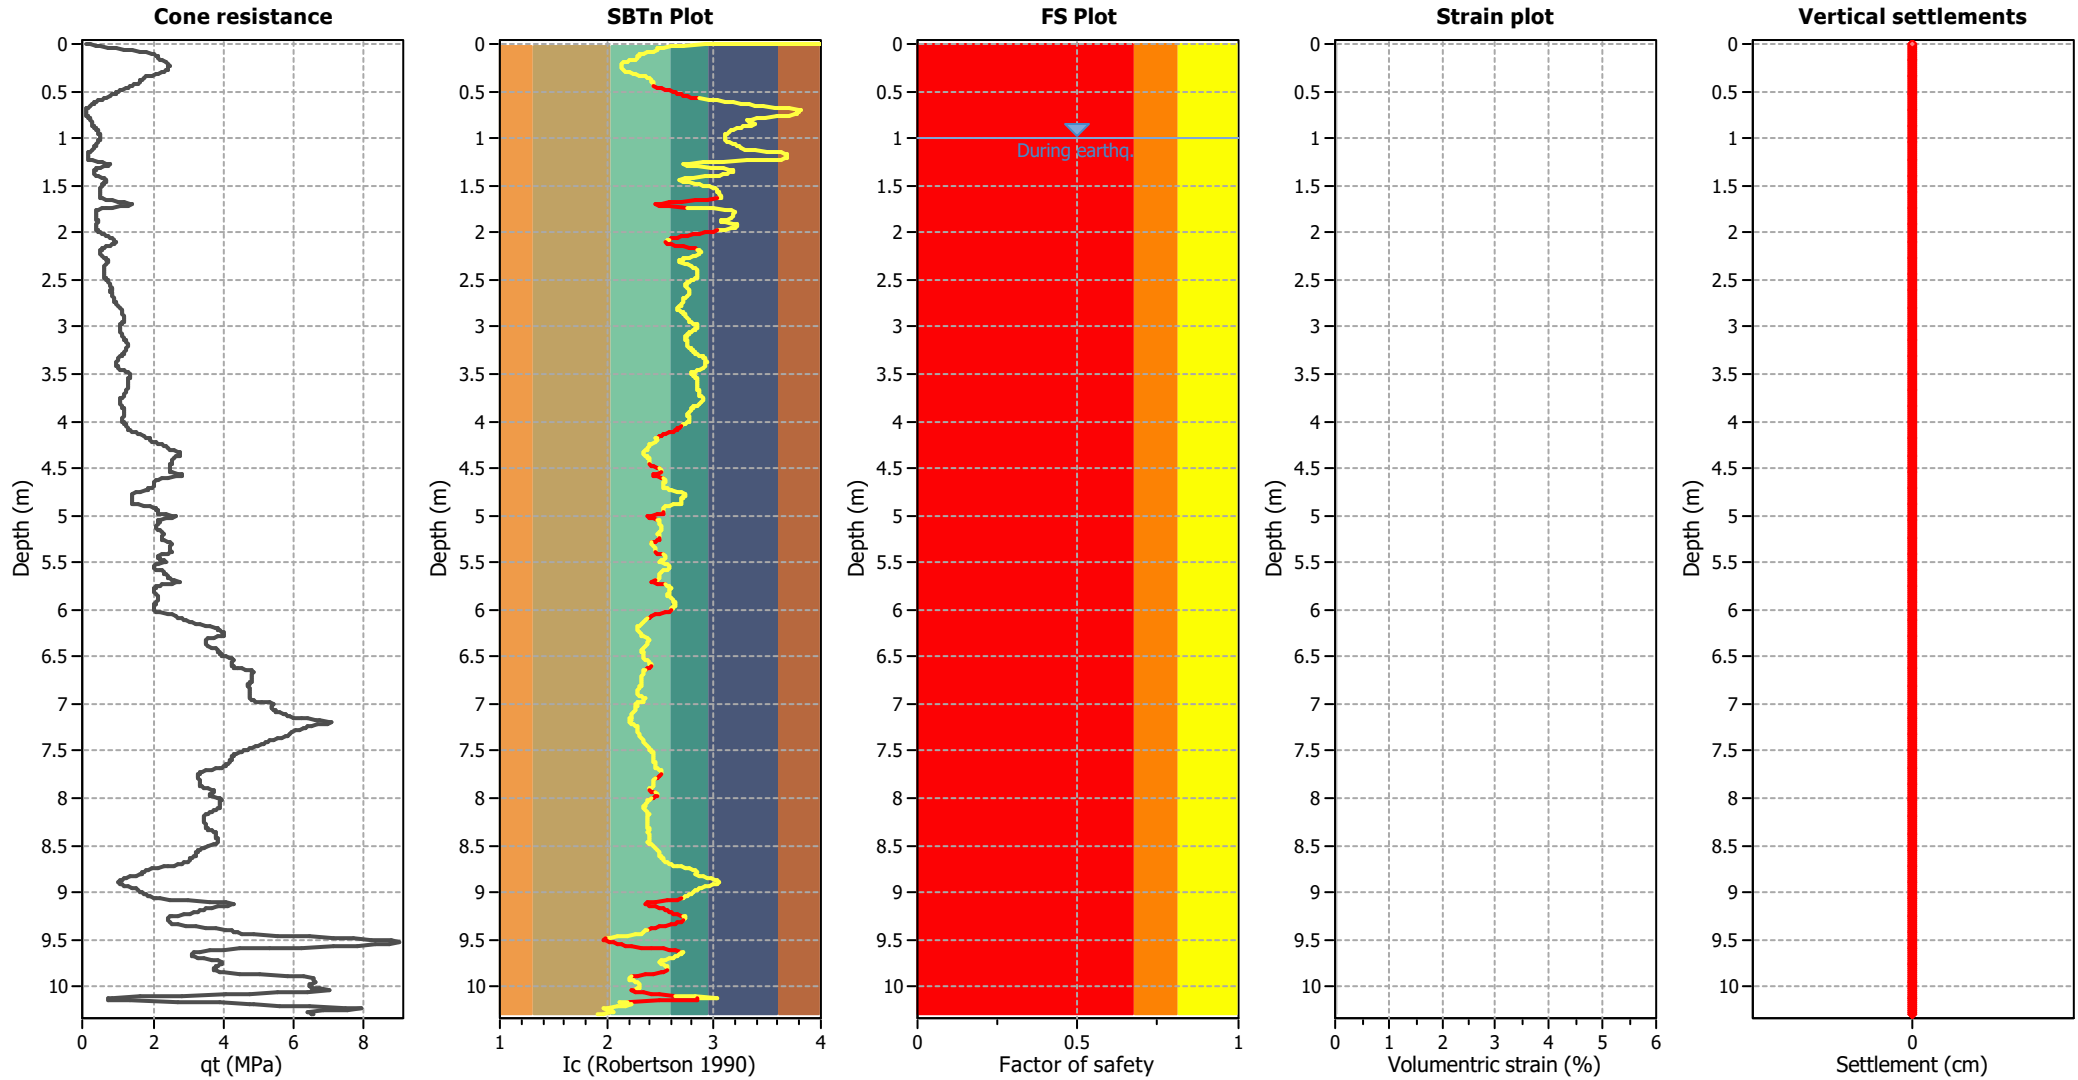

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

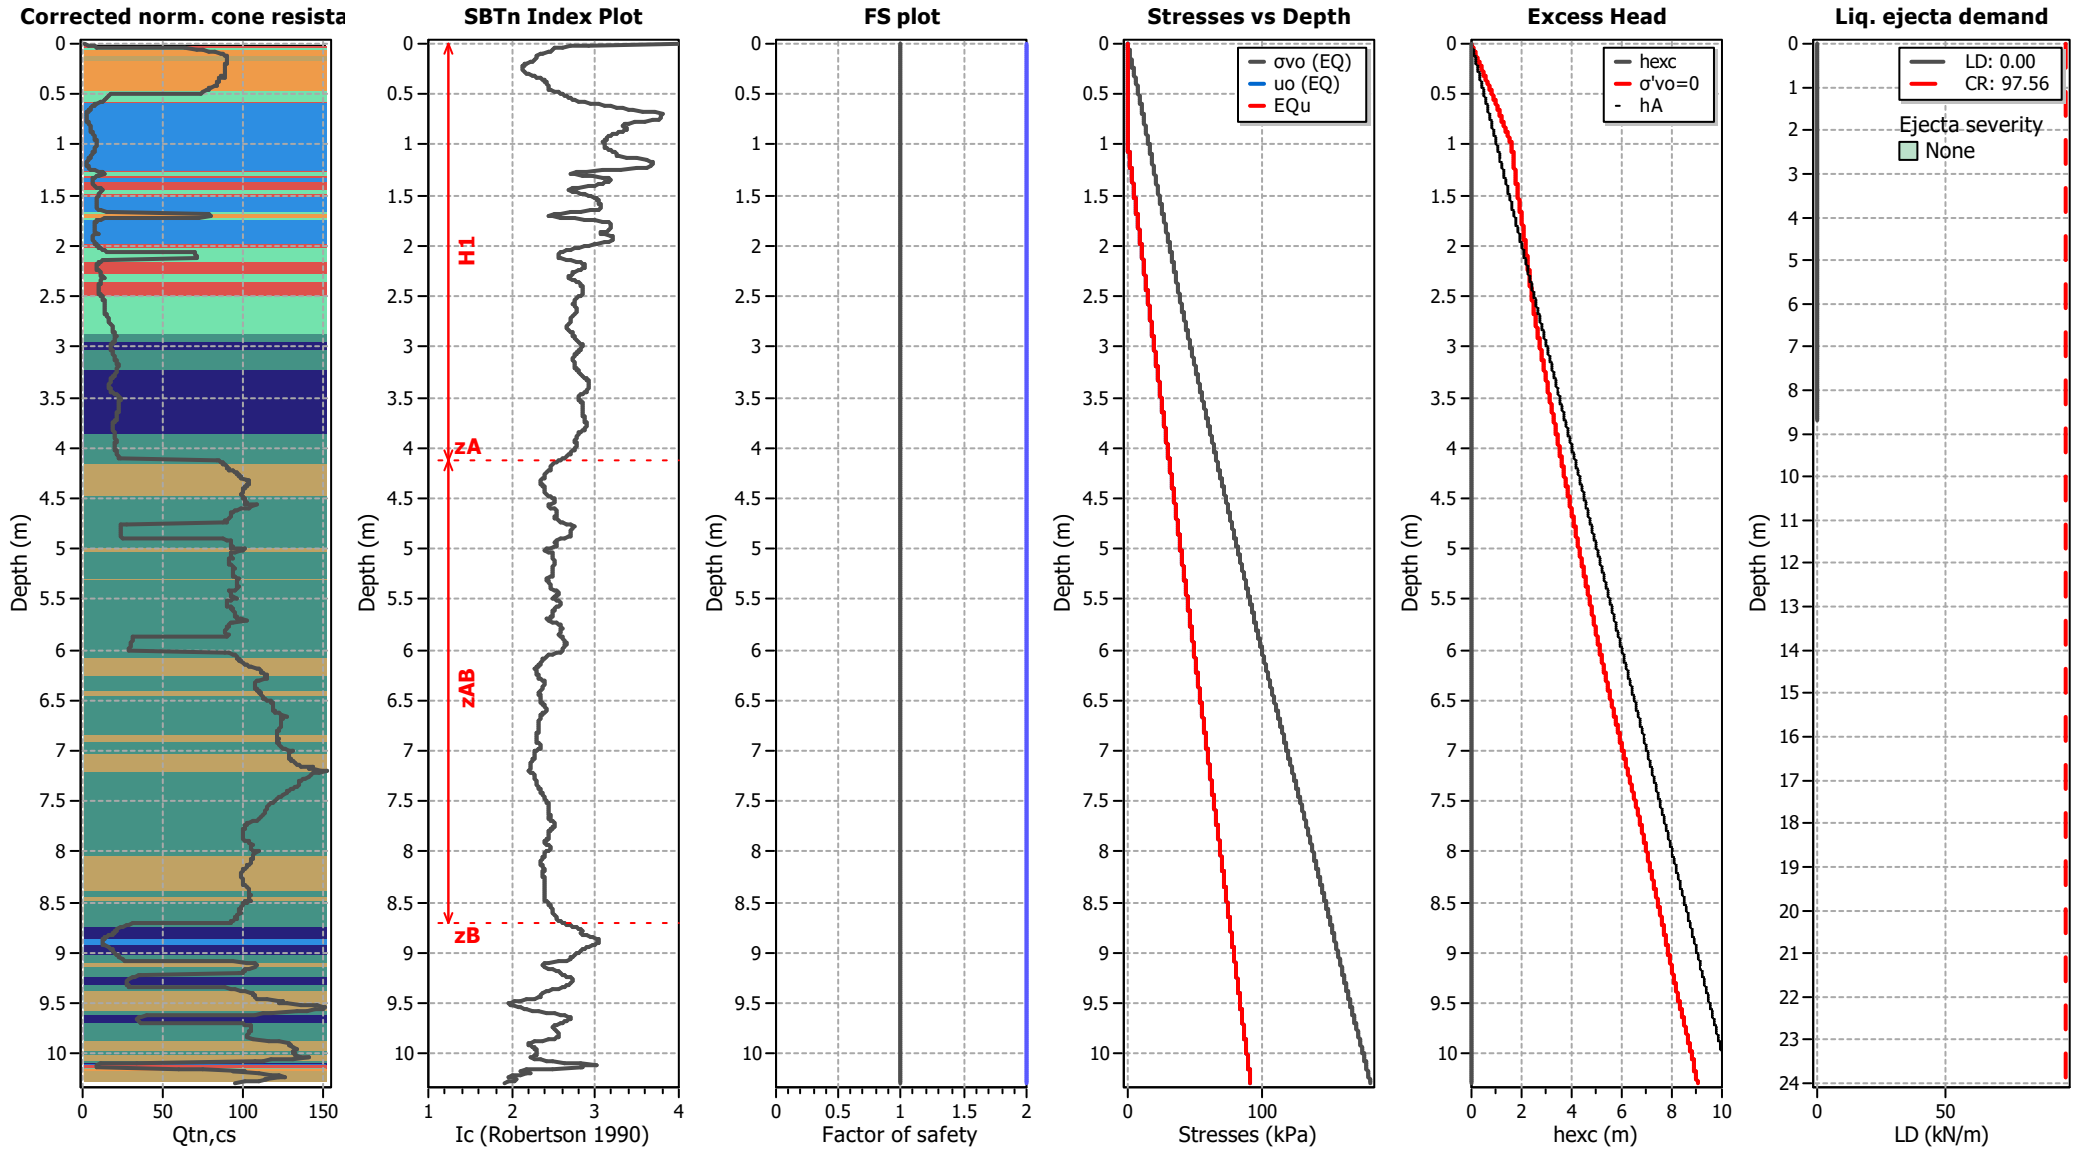

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT21A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_0 applied:	Yes	MSF method:	Method based

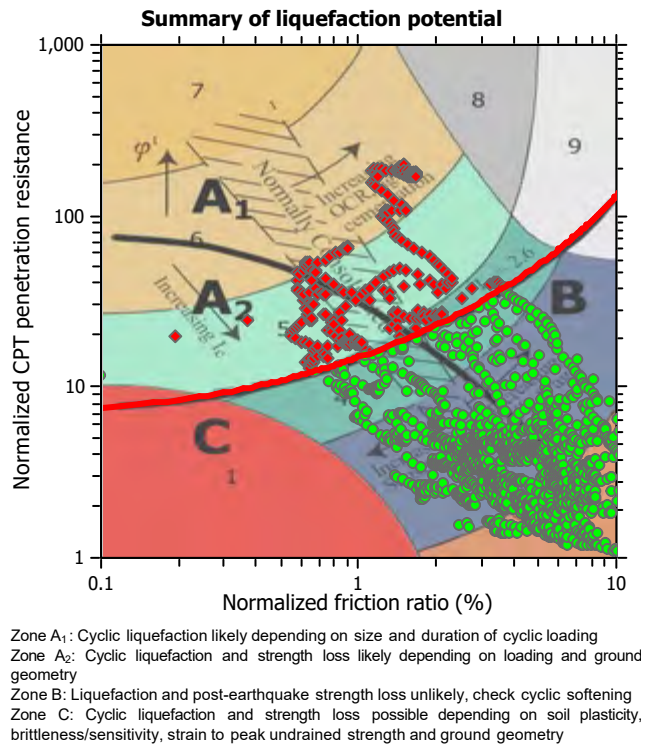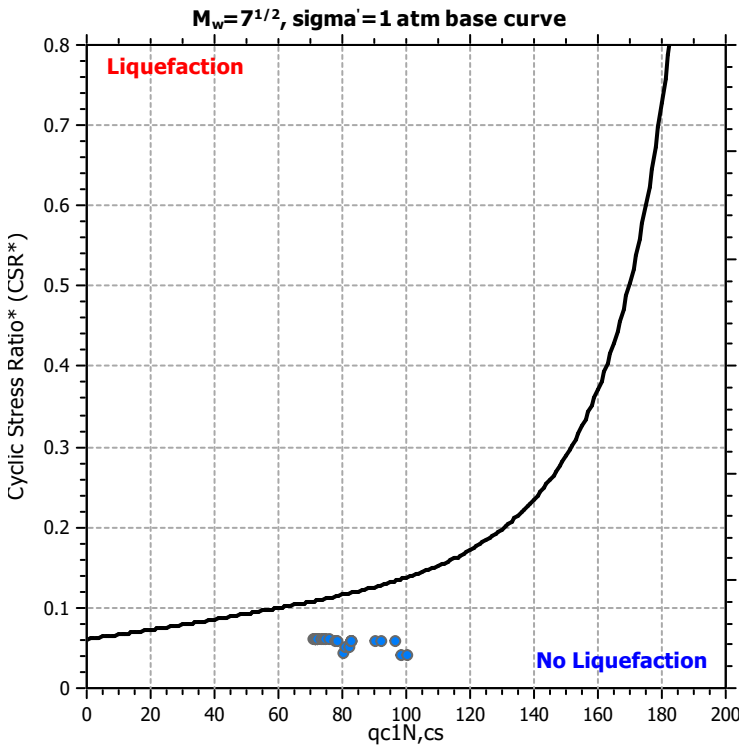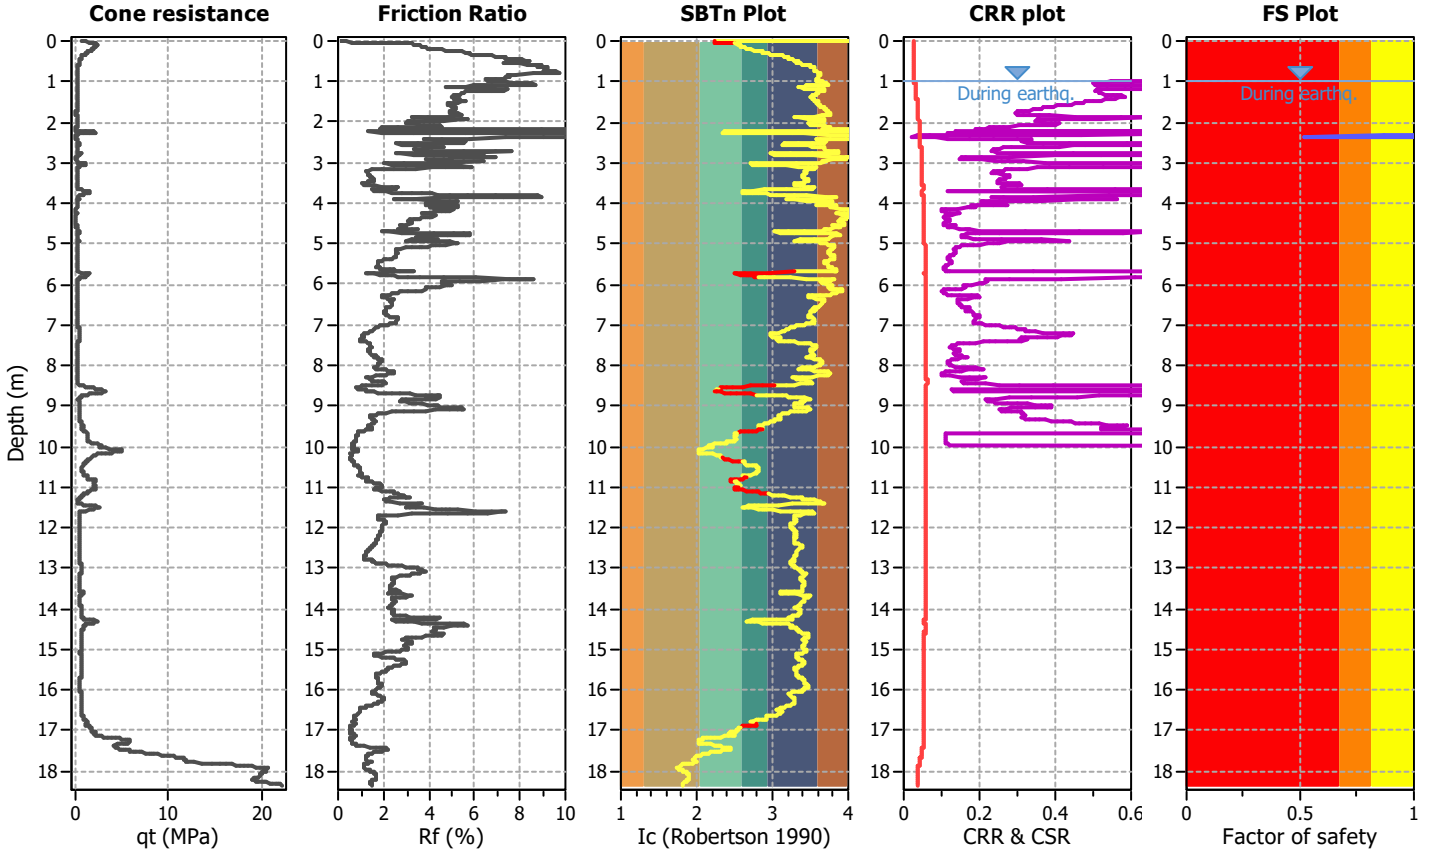

CPT basic interpretation plots

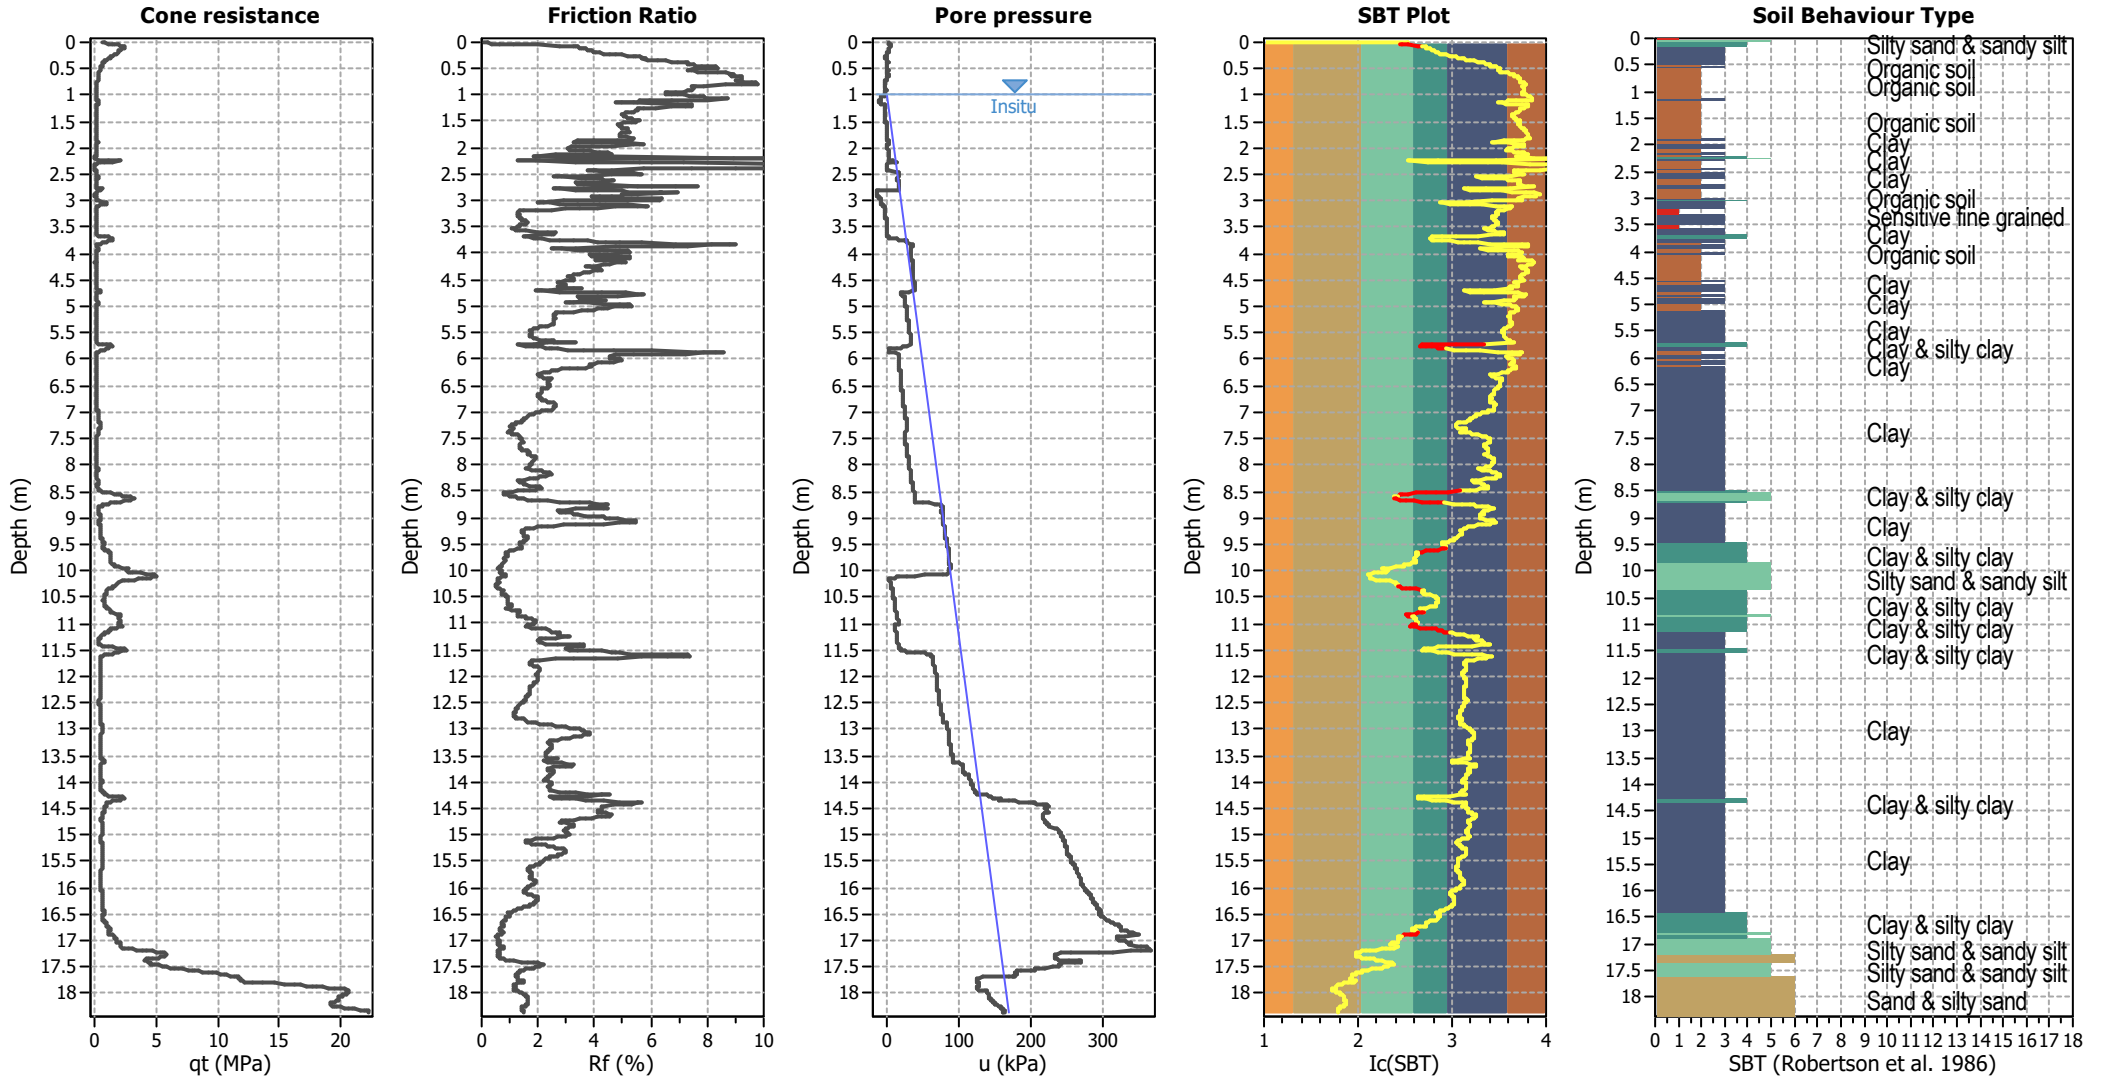


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

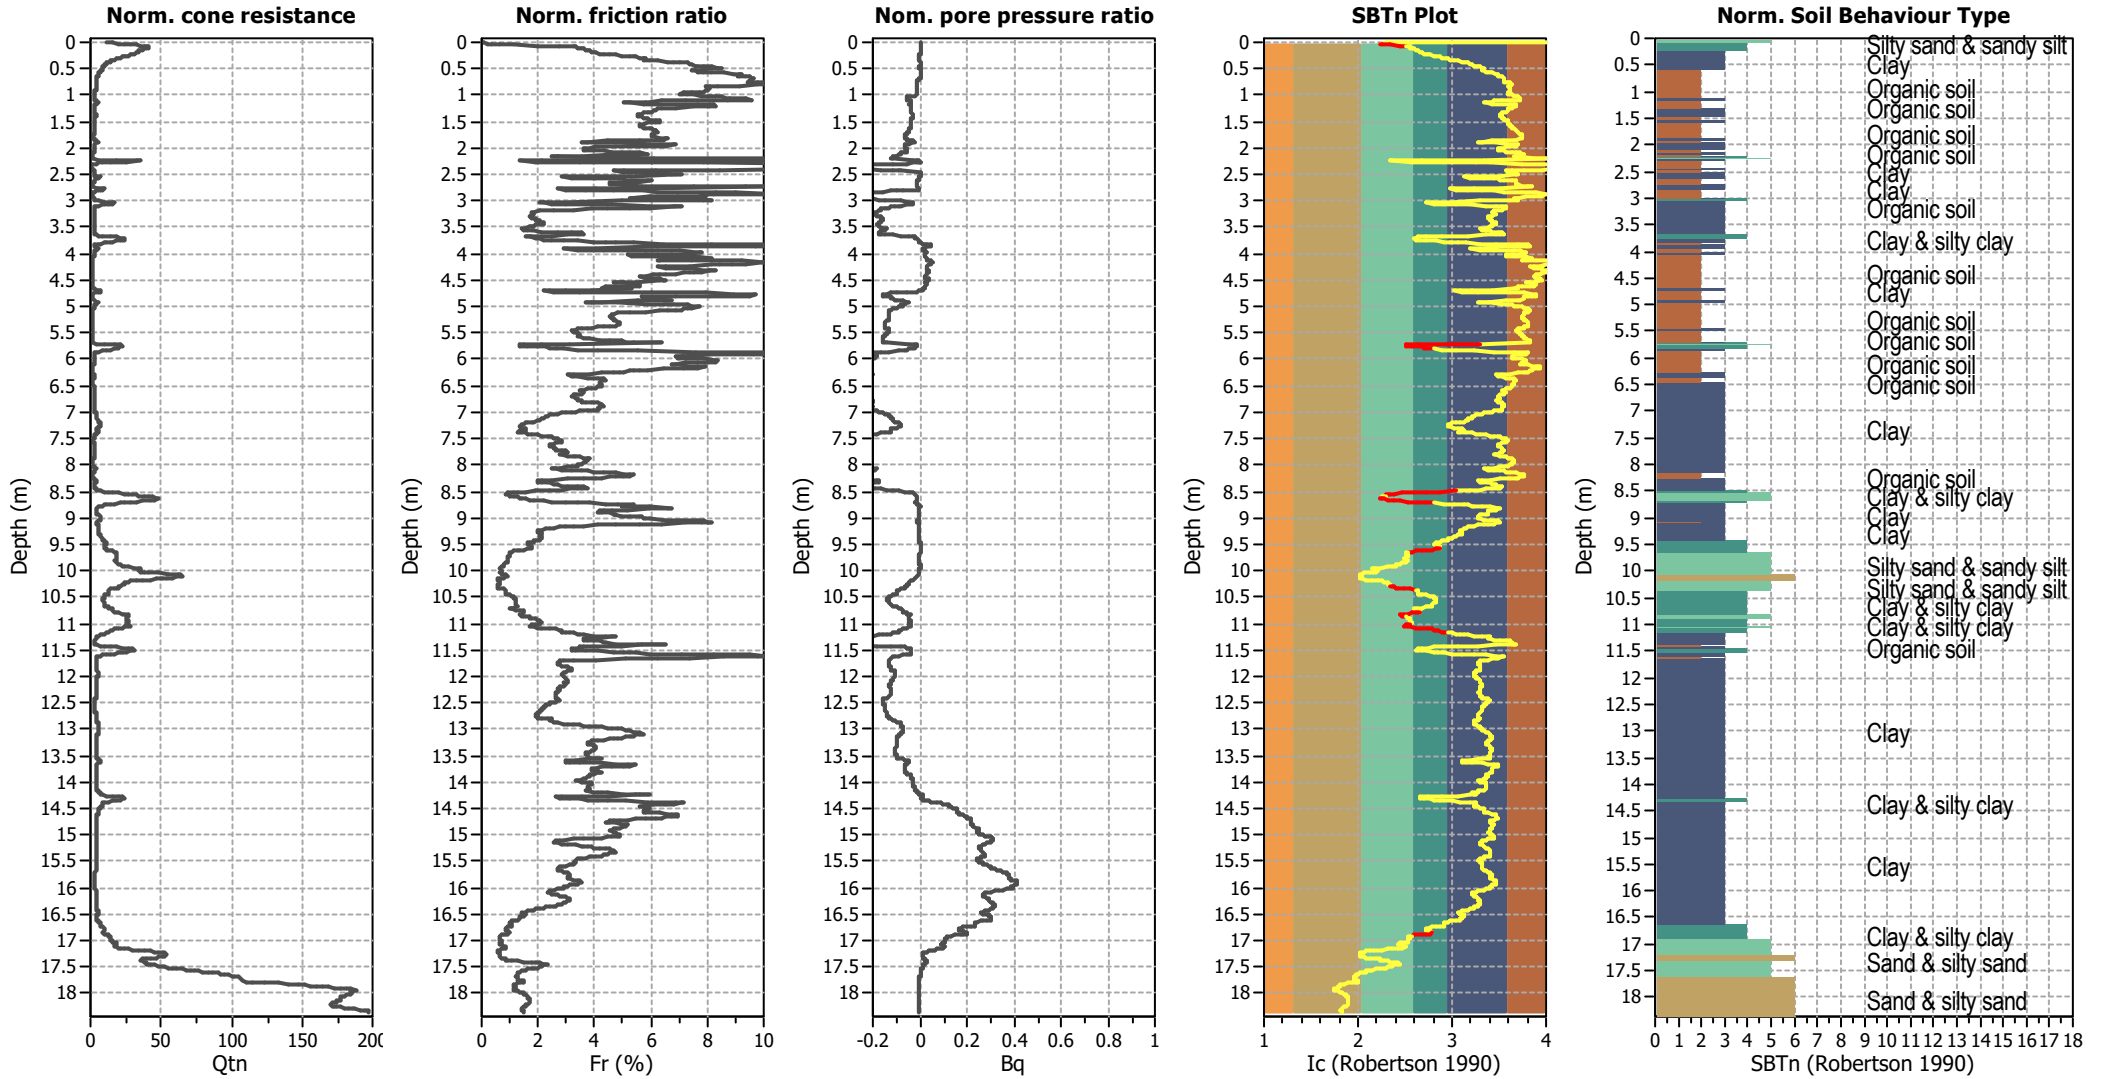


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

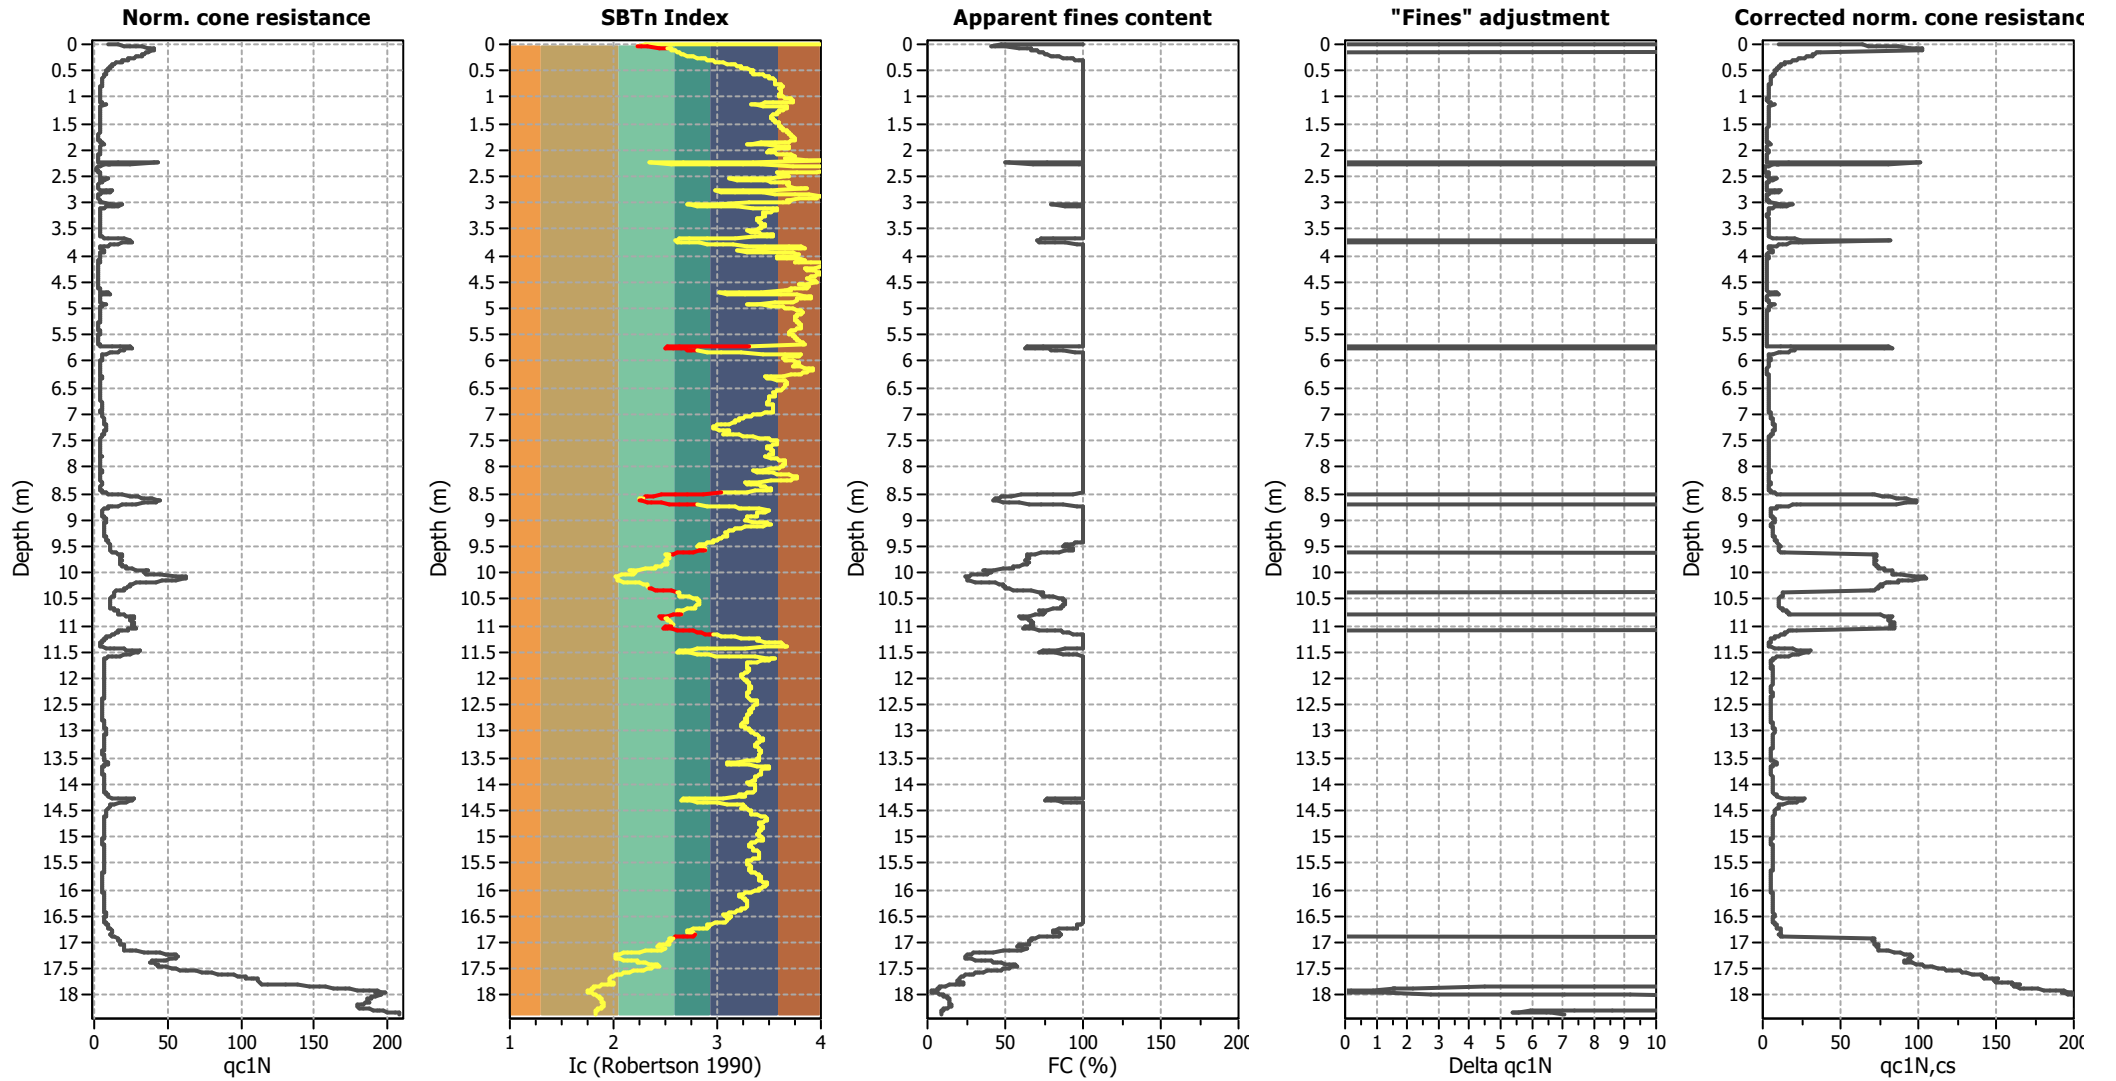

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

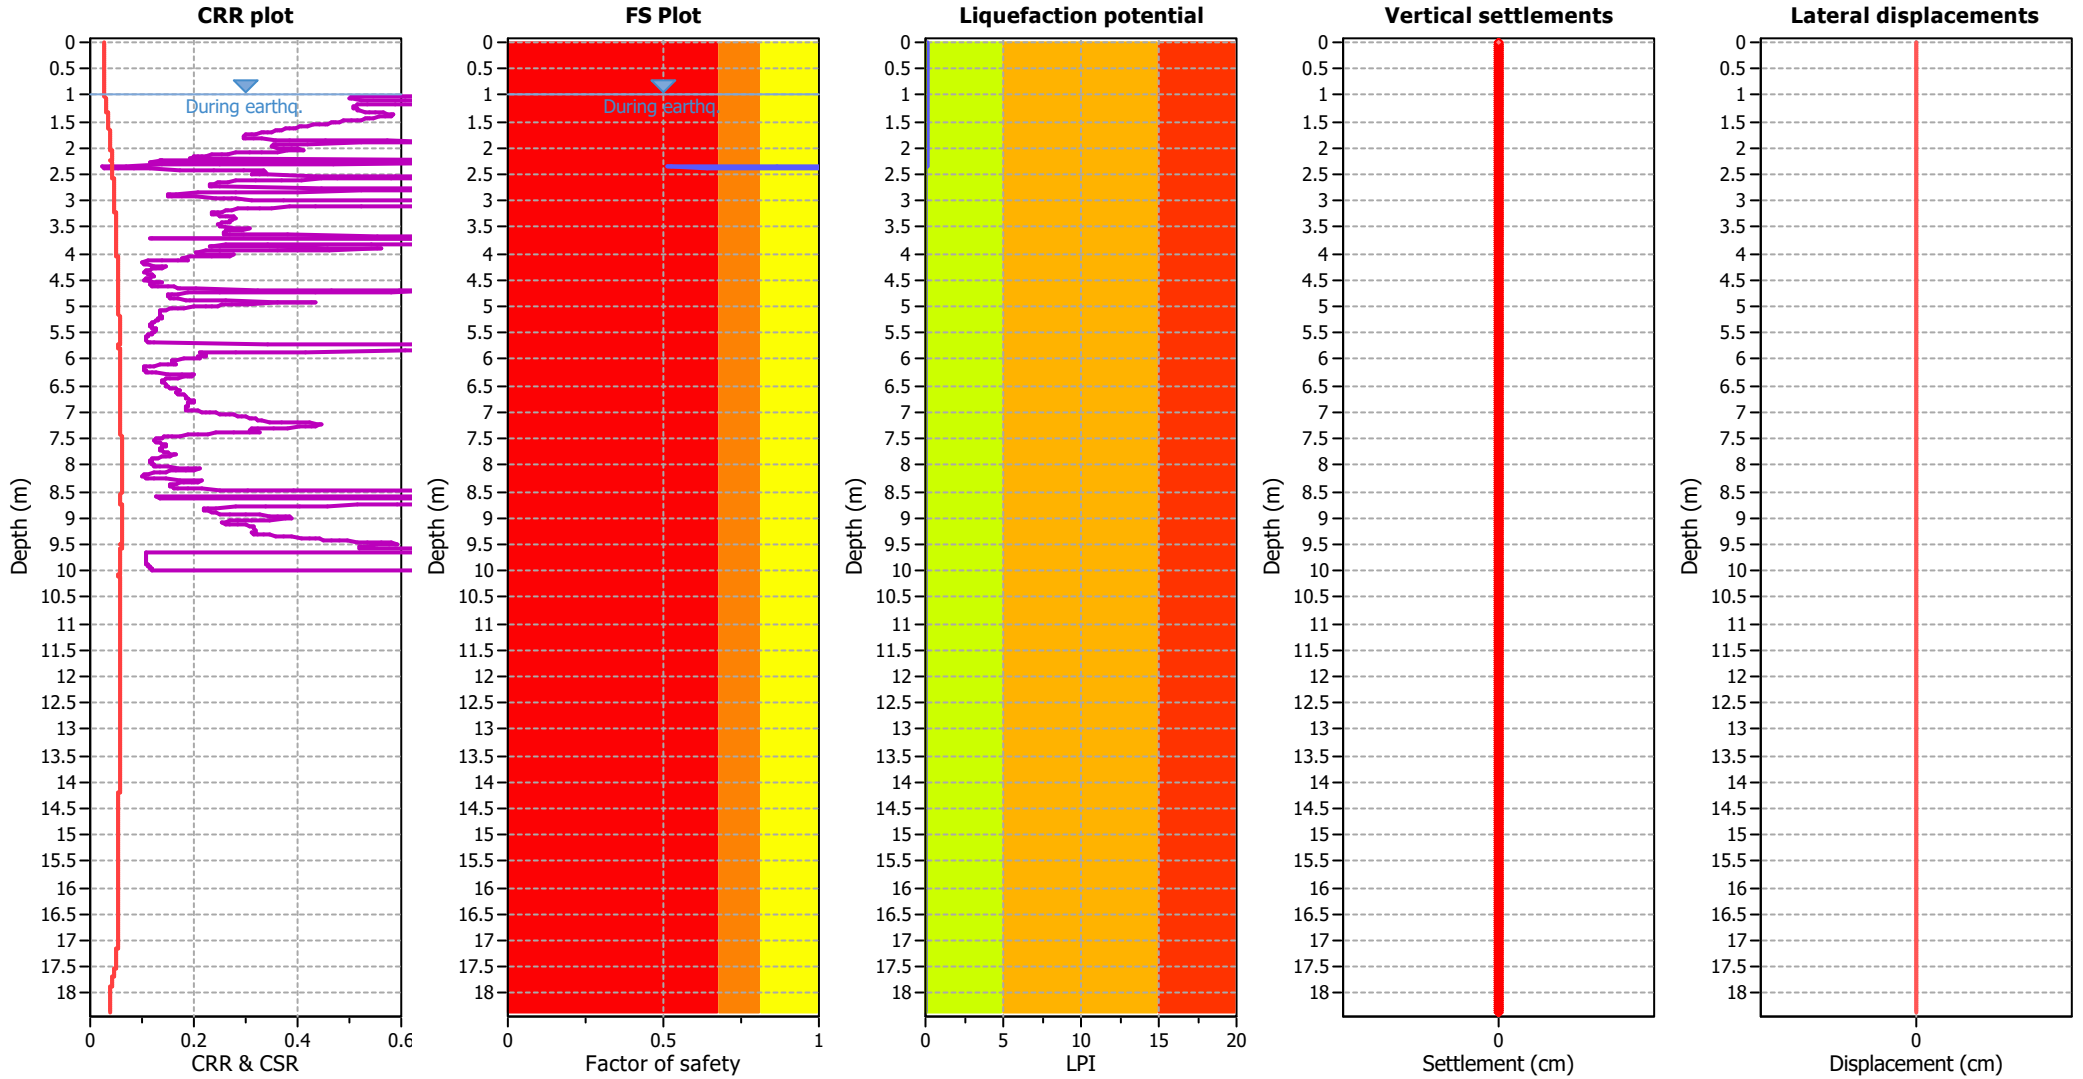

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

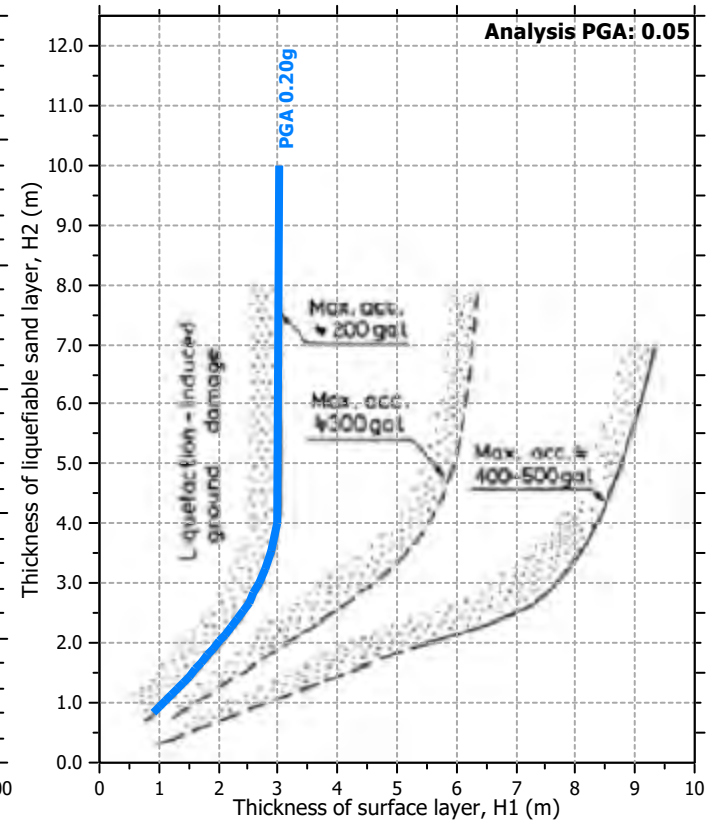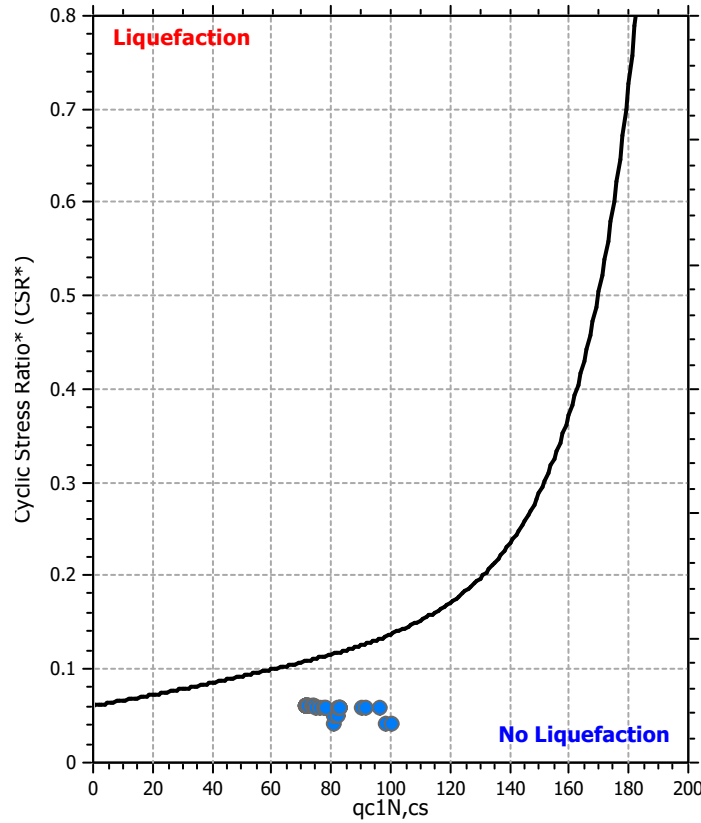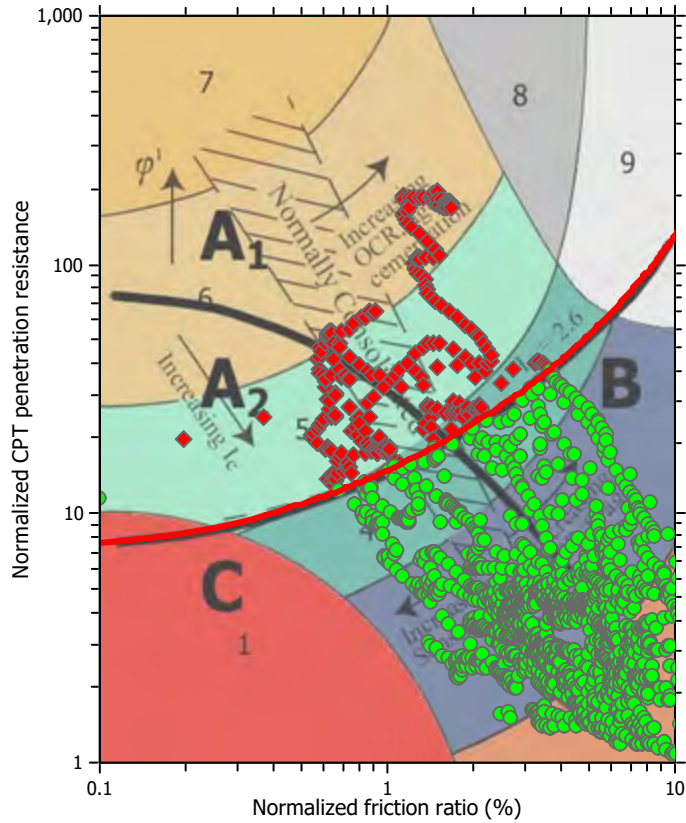

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

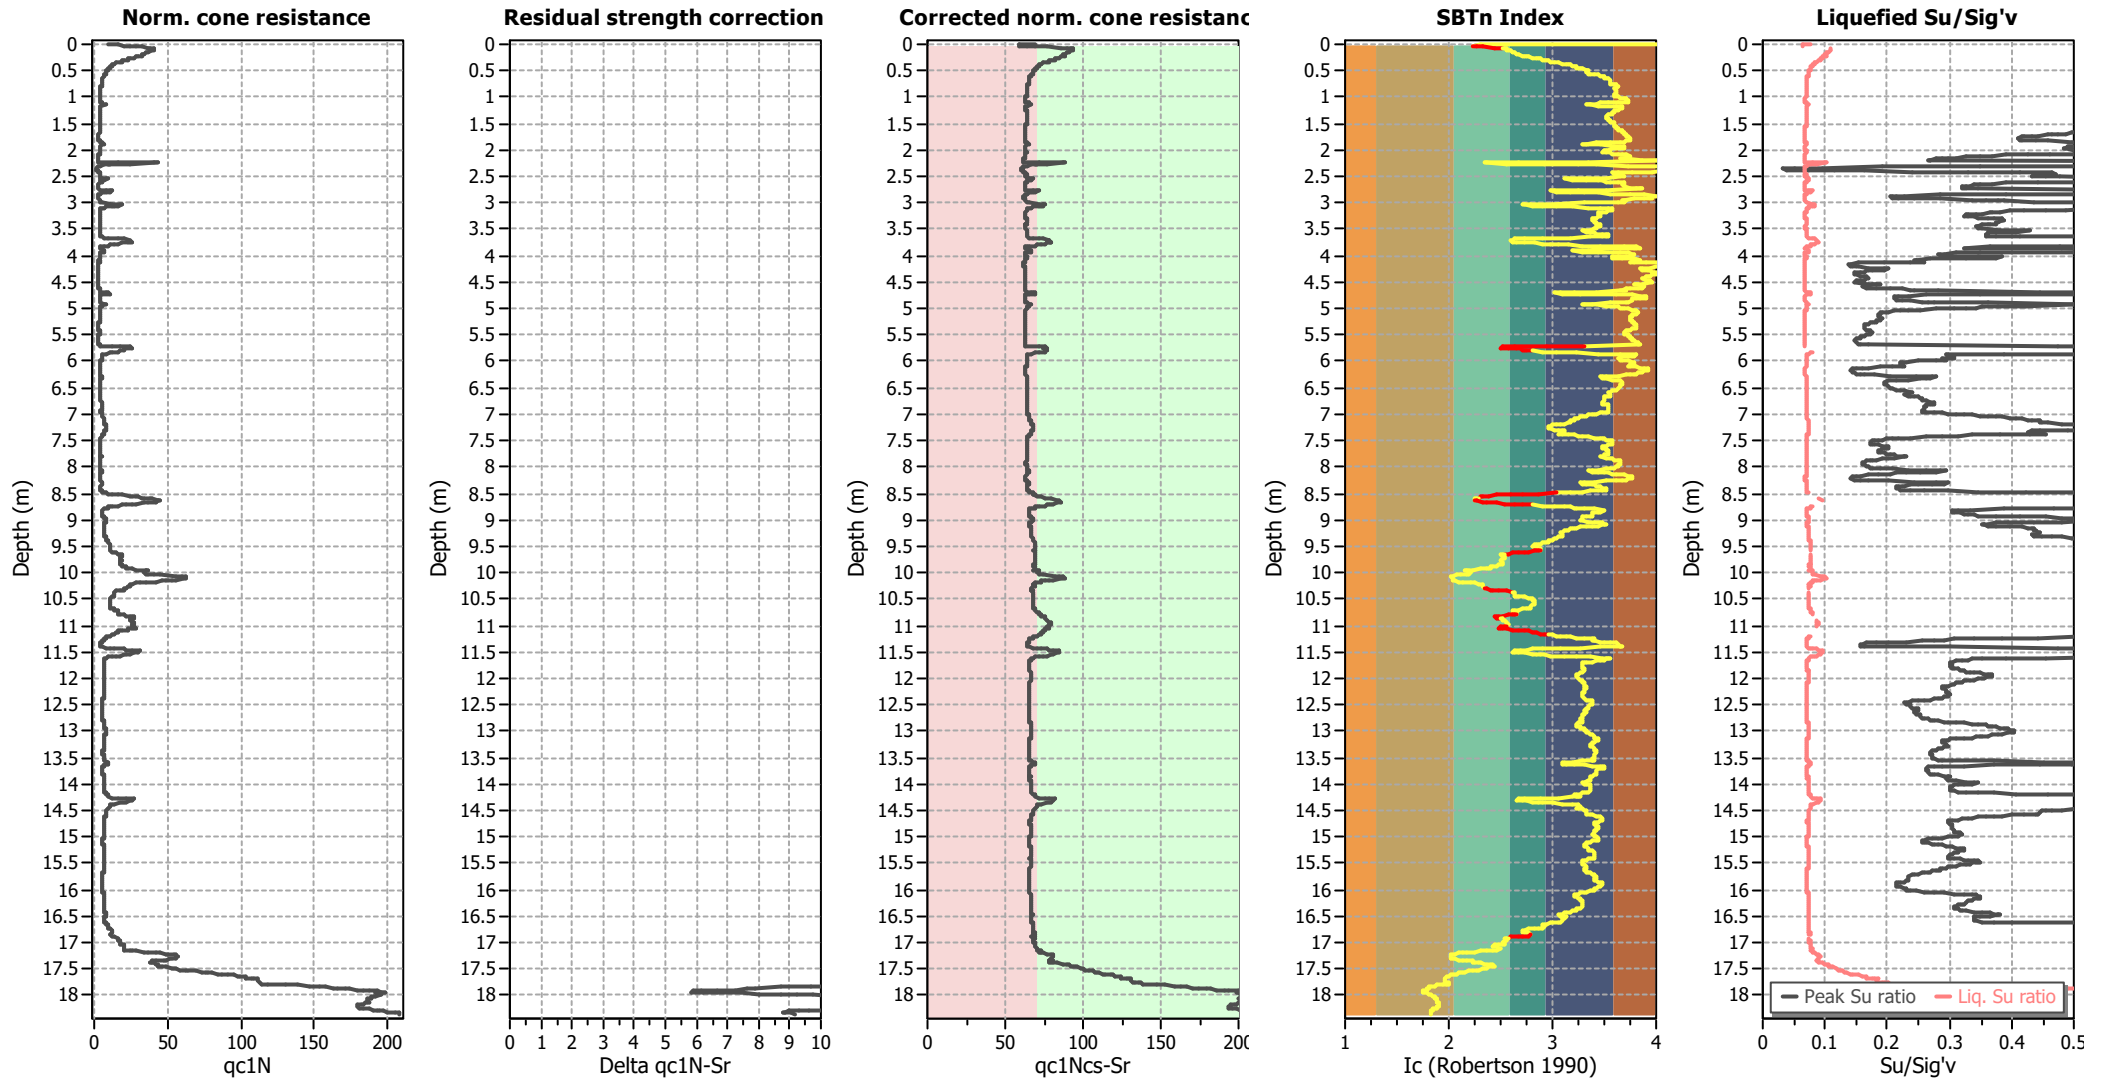

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

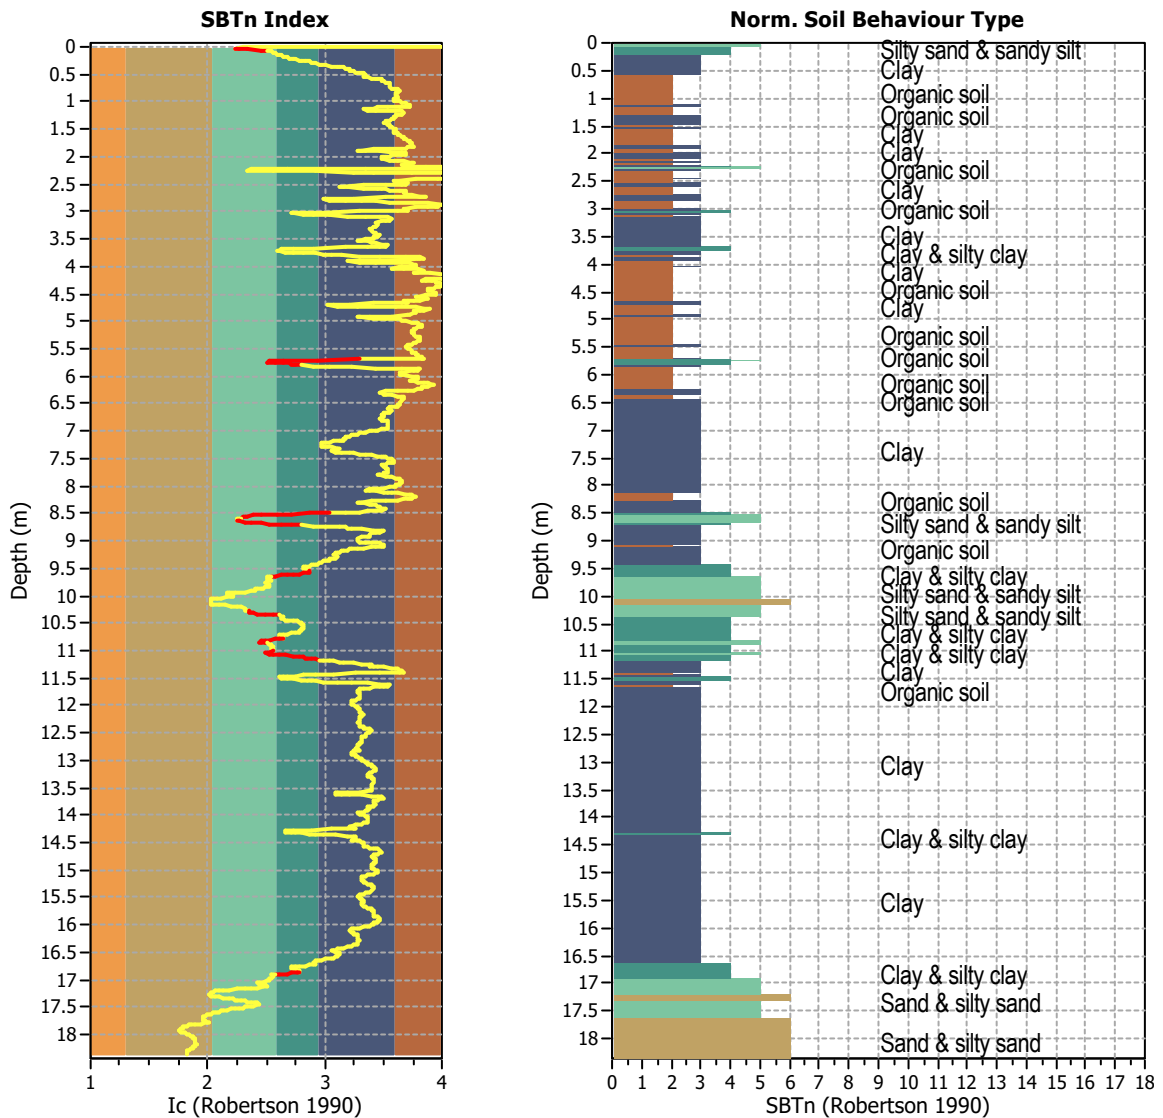


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1837
 Total points excluded: 95
 Exclusion percentage: 5.17%
 Number of layers detected: 12


Estimation of post-earthquake settlements

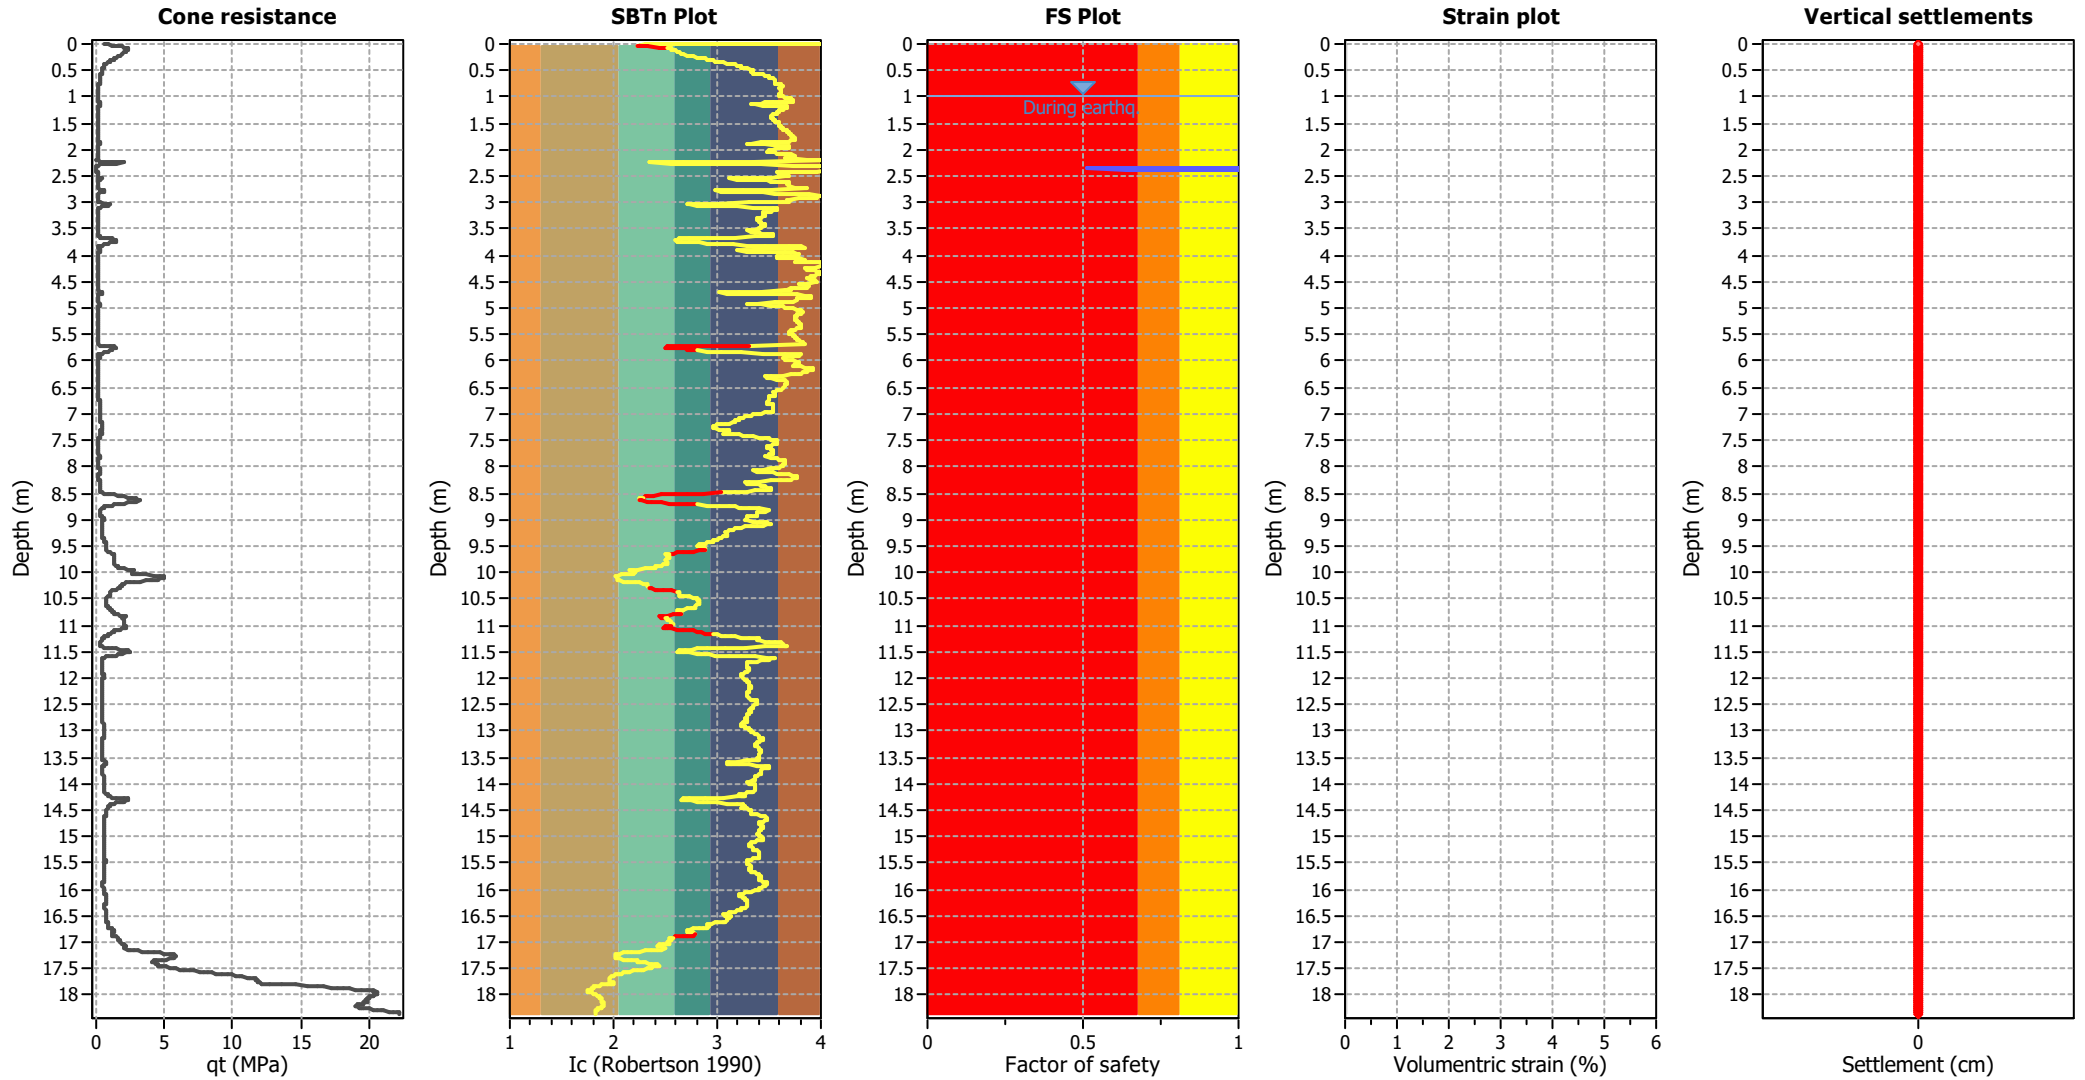

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

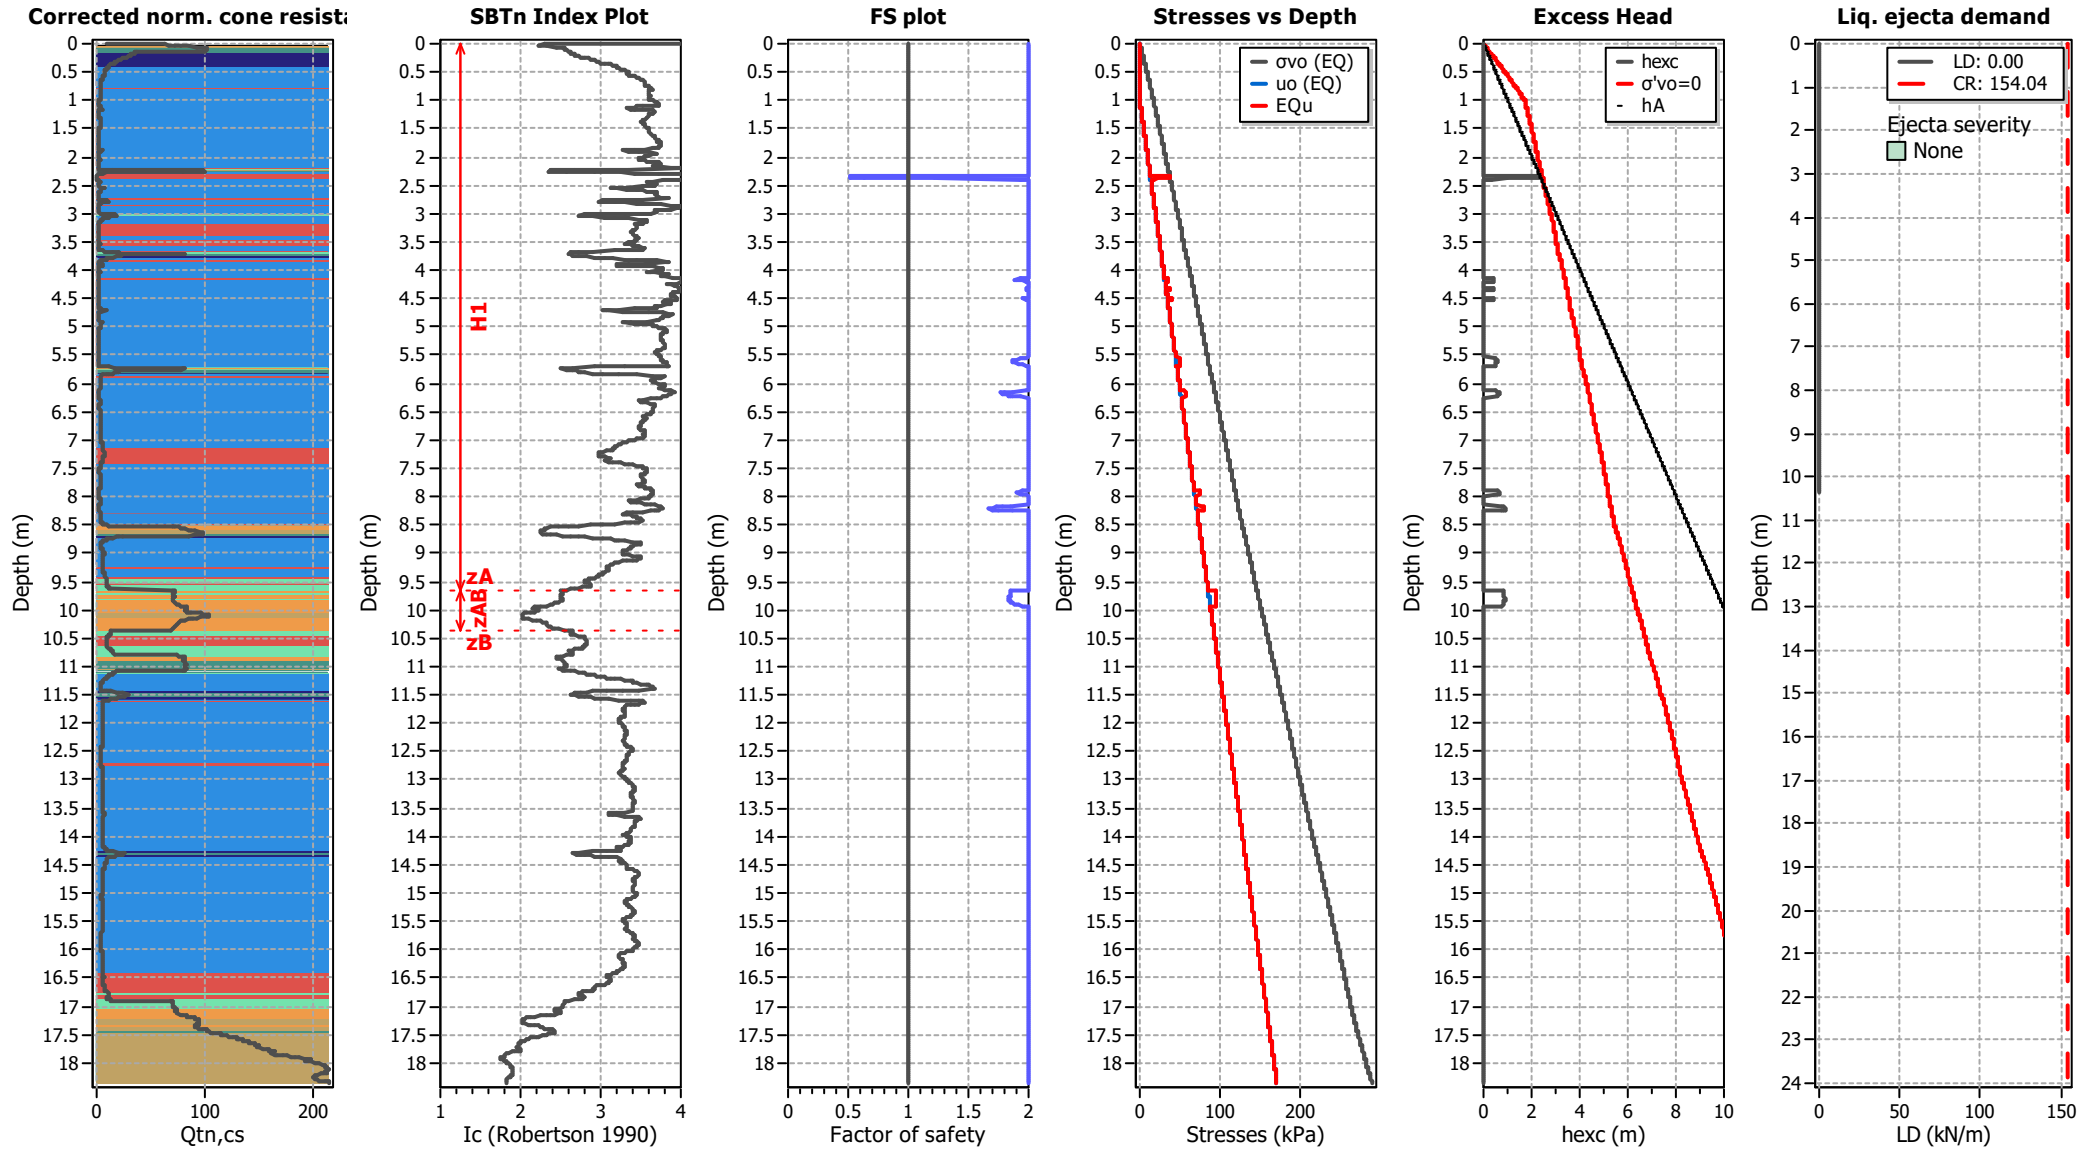

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT22

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_0 applied:	Yes	MSF method:	Method based

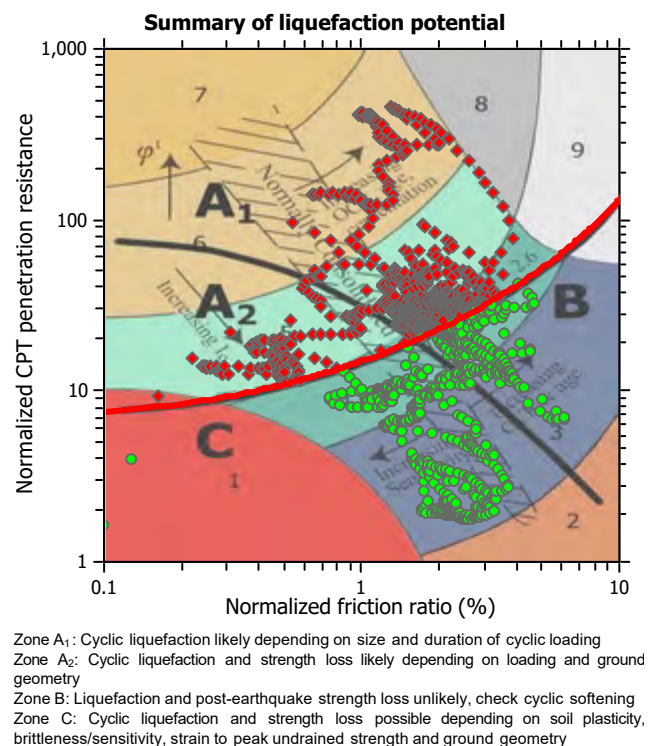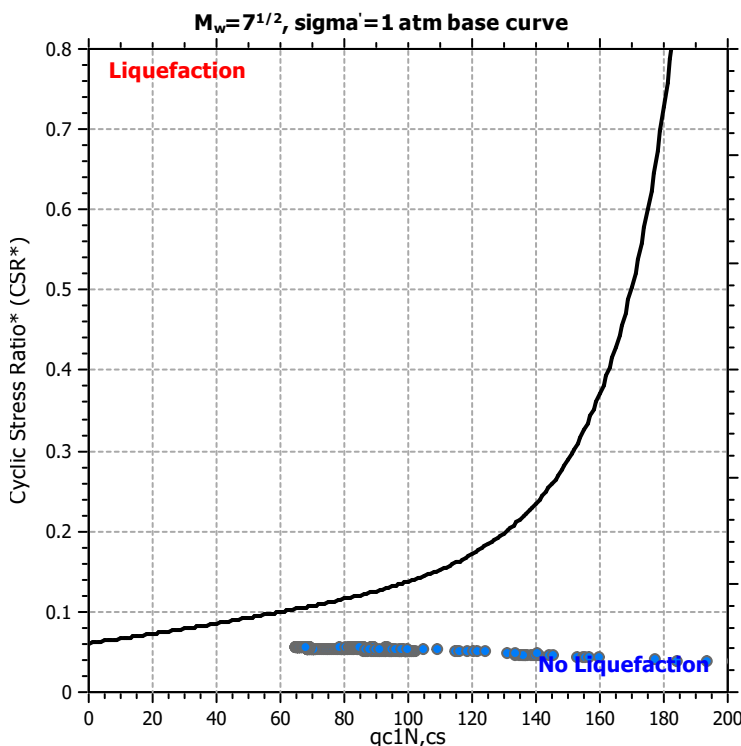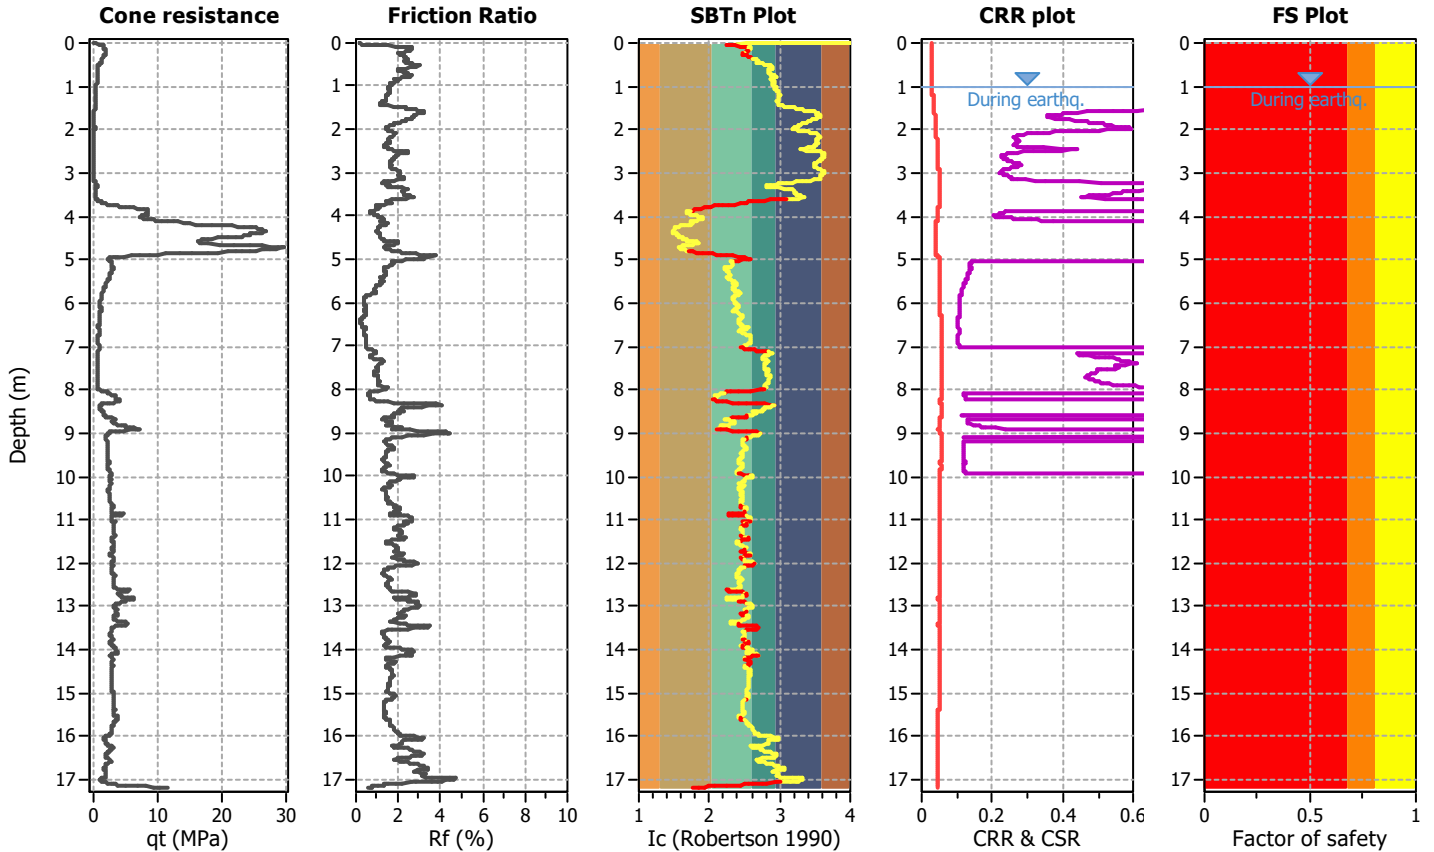

CPT basic interpretation plots

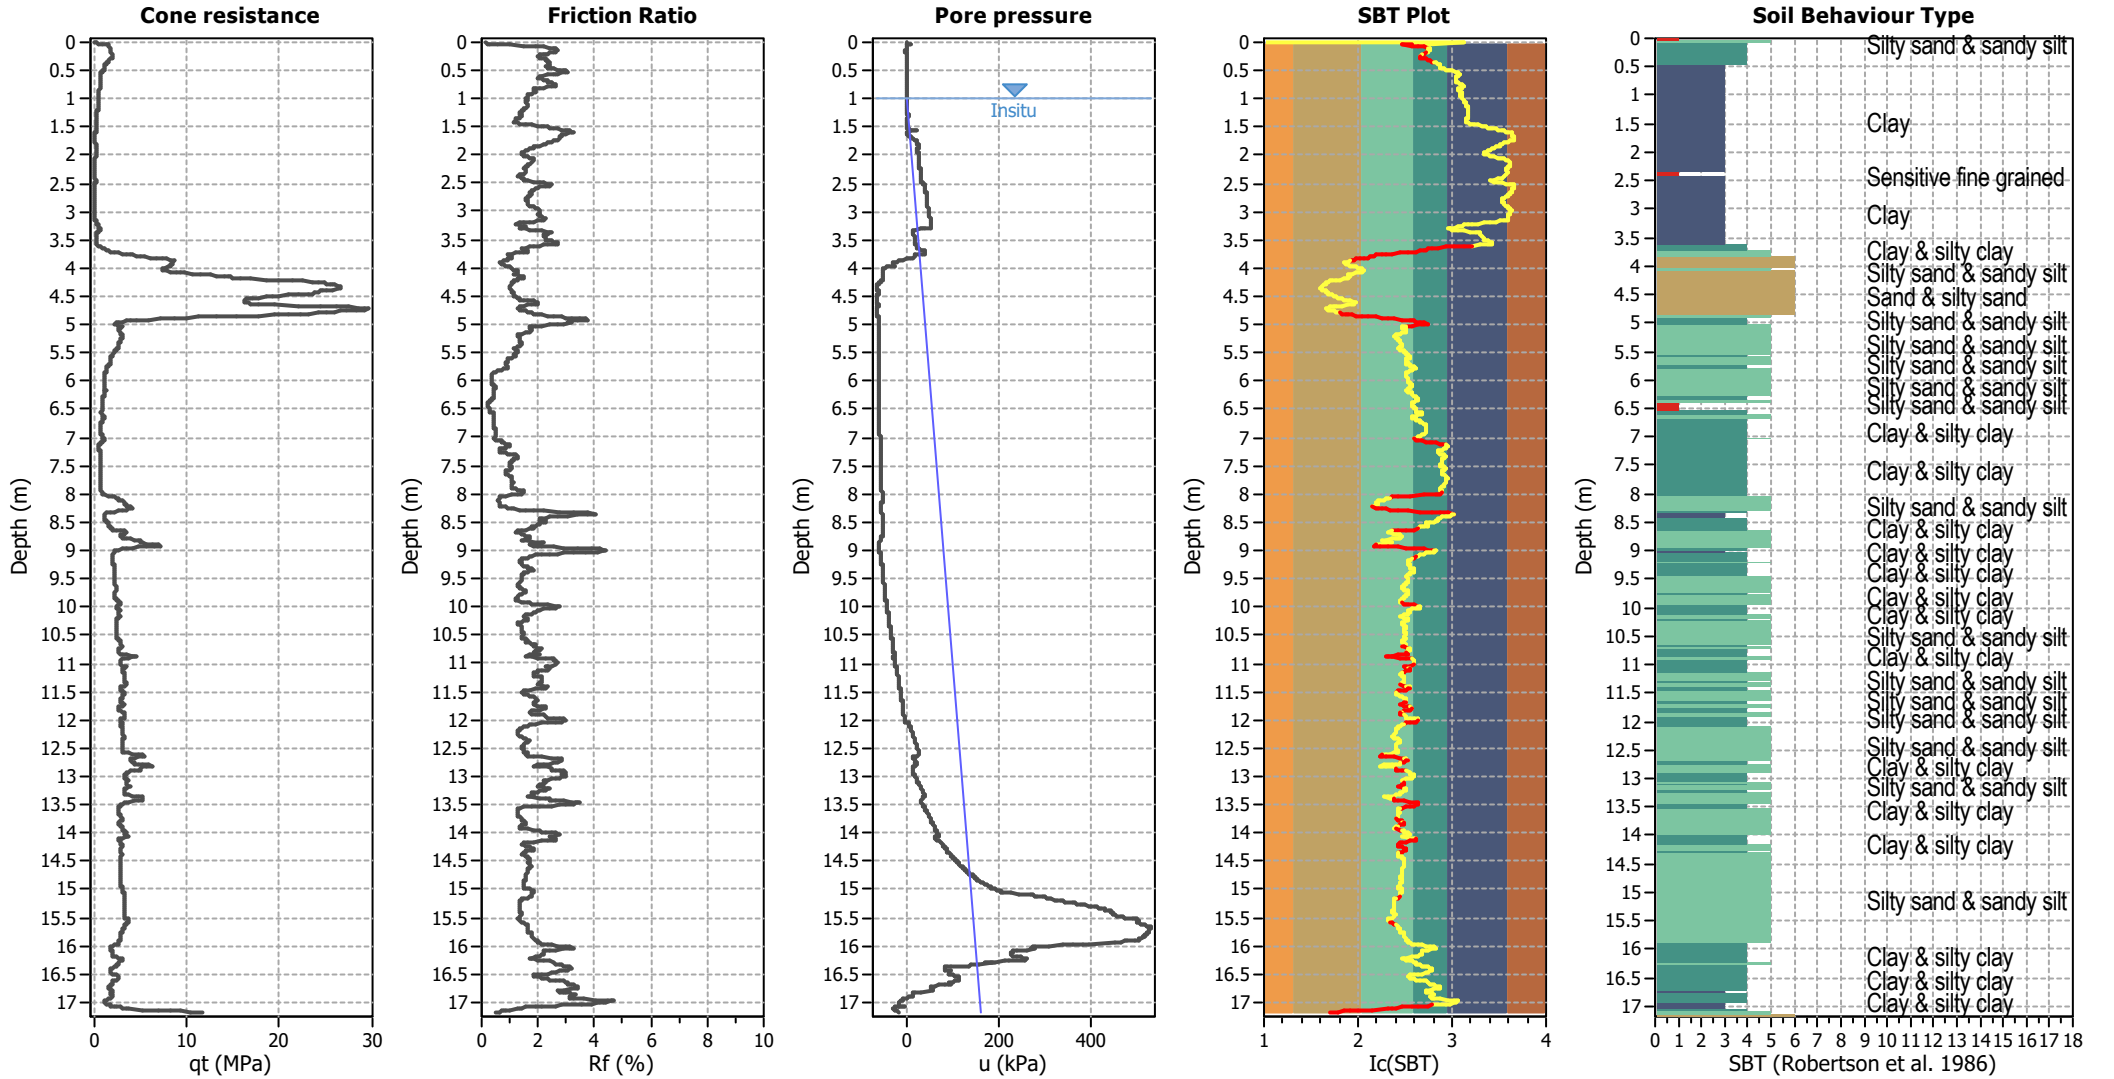


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

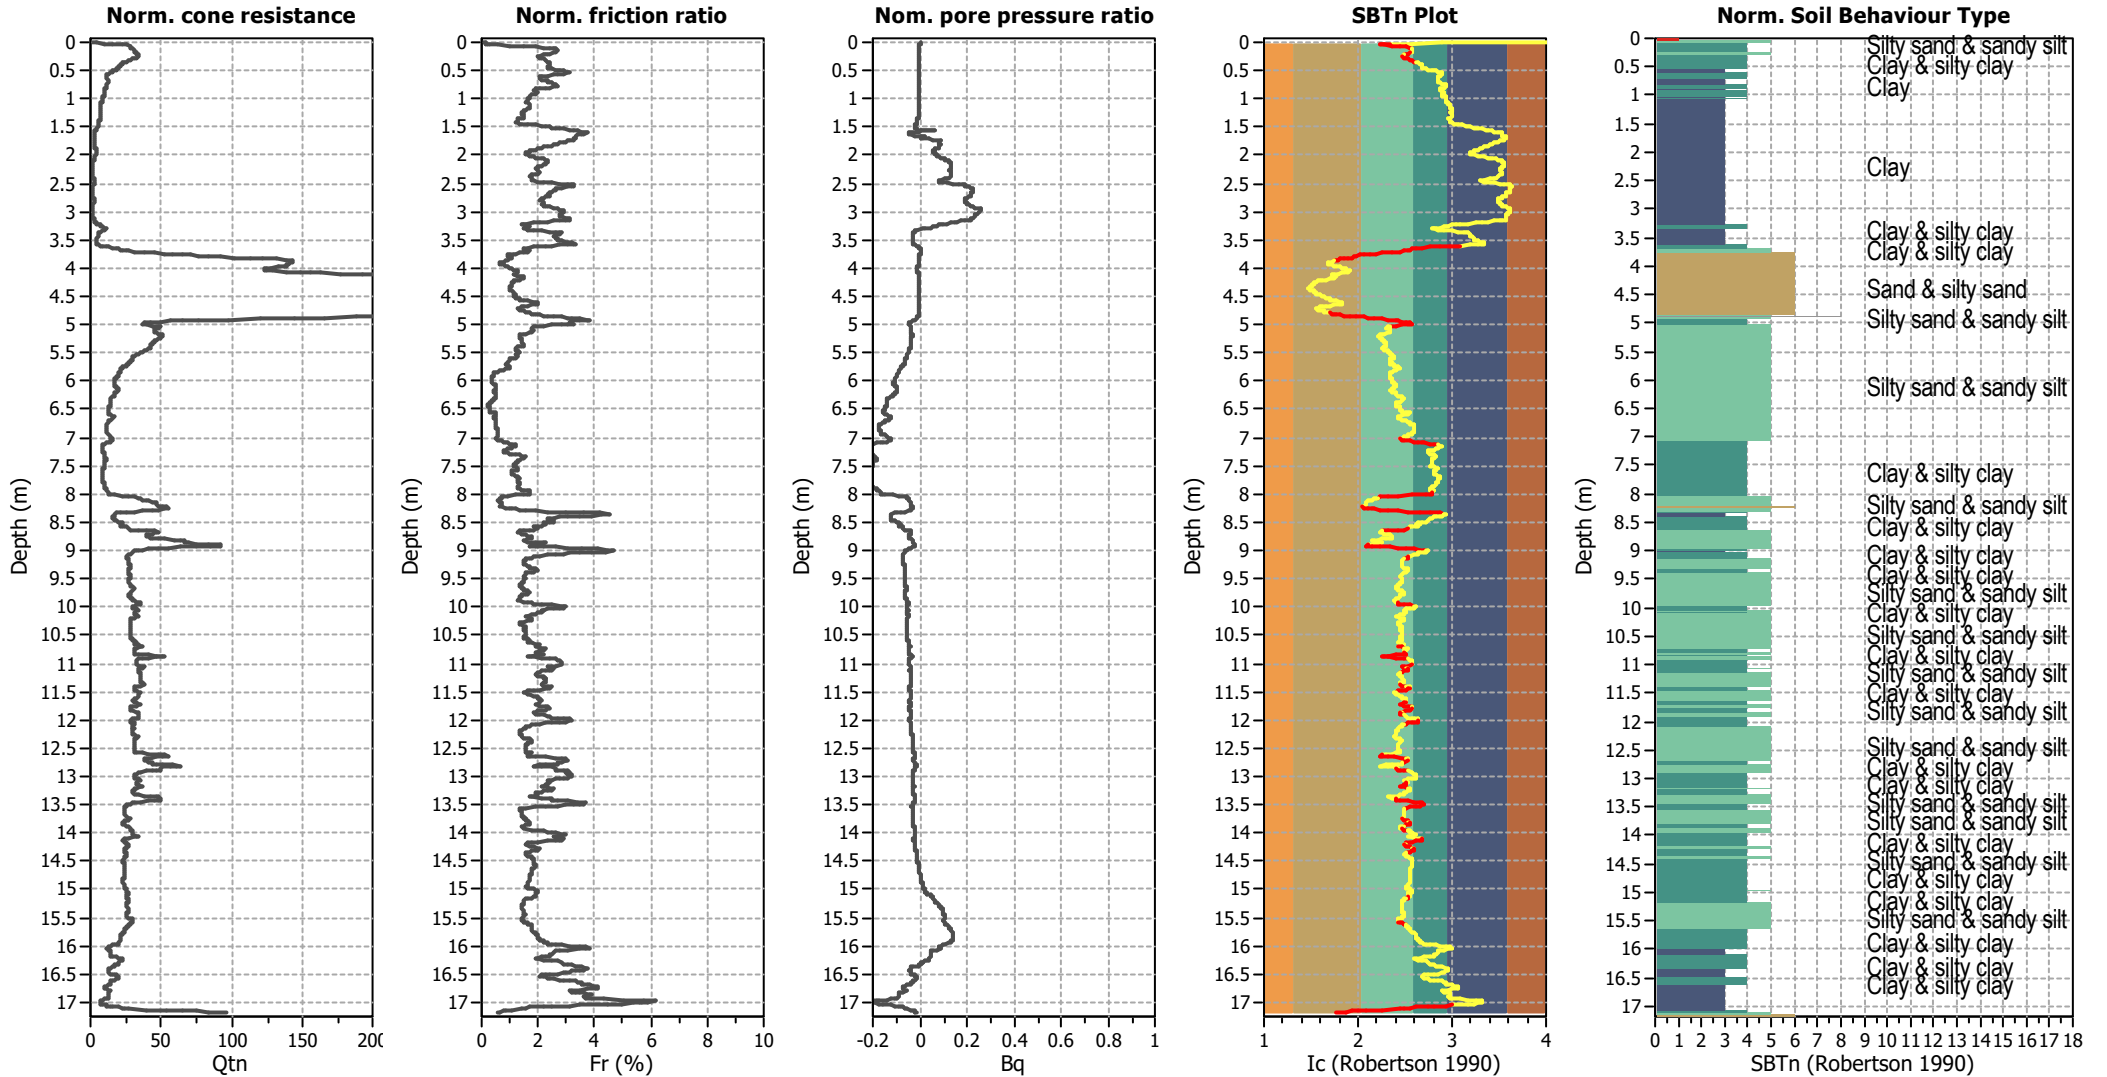


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

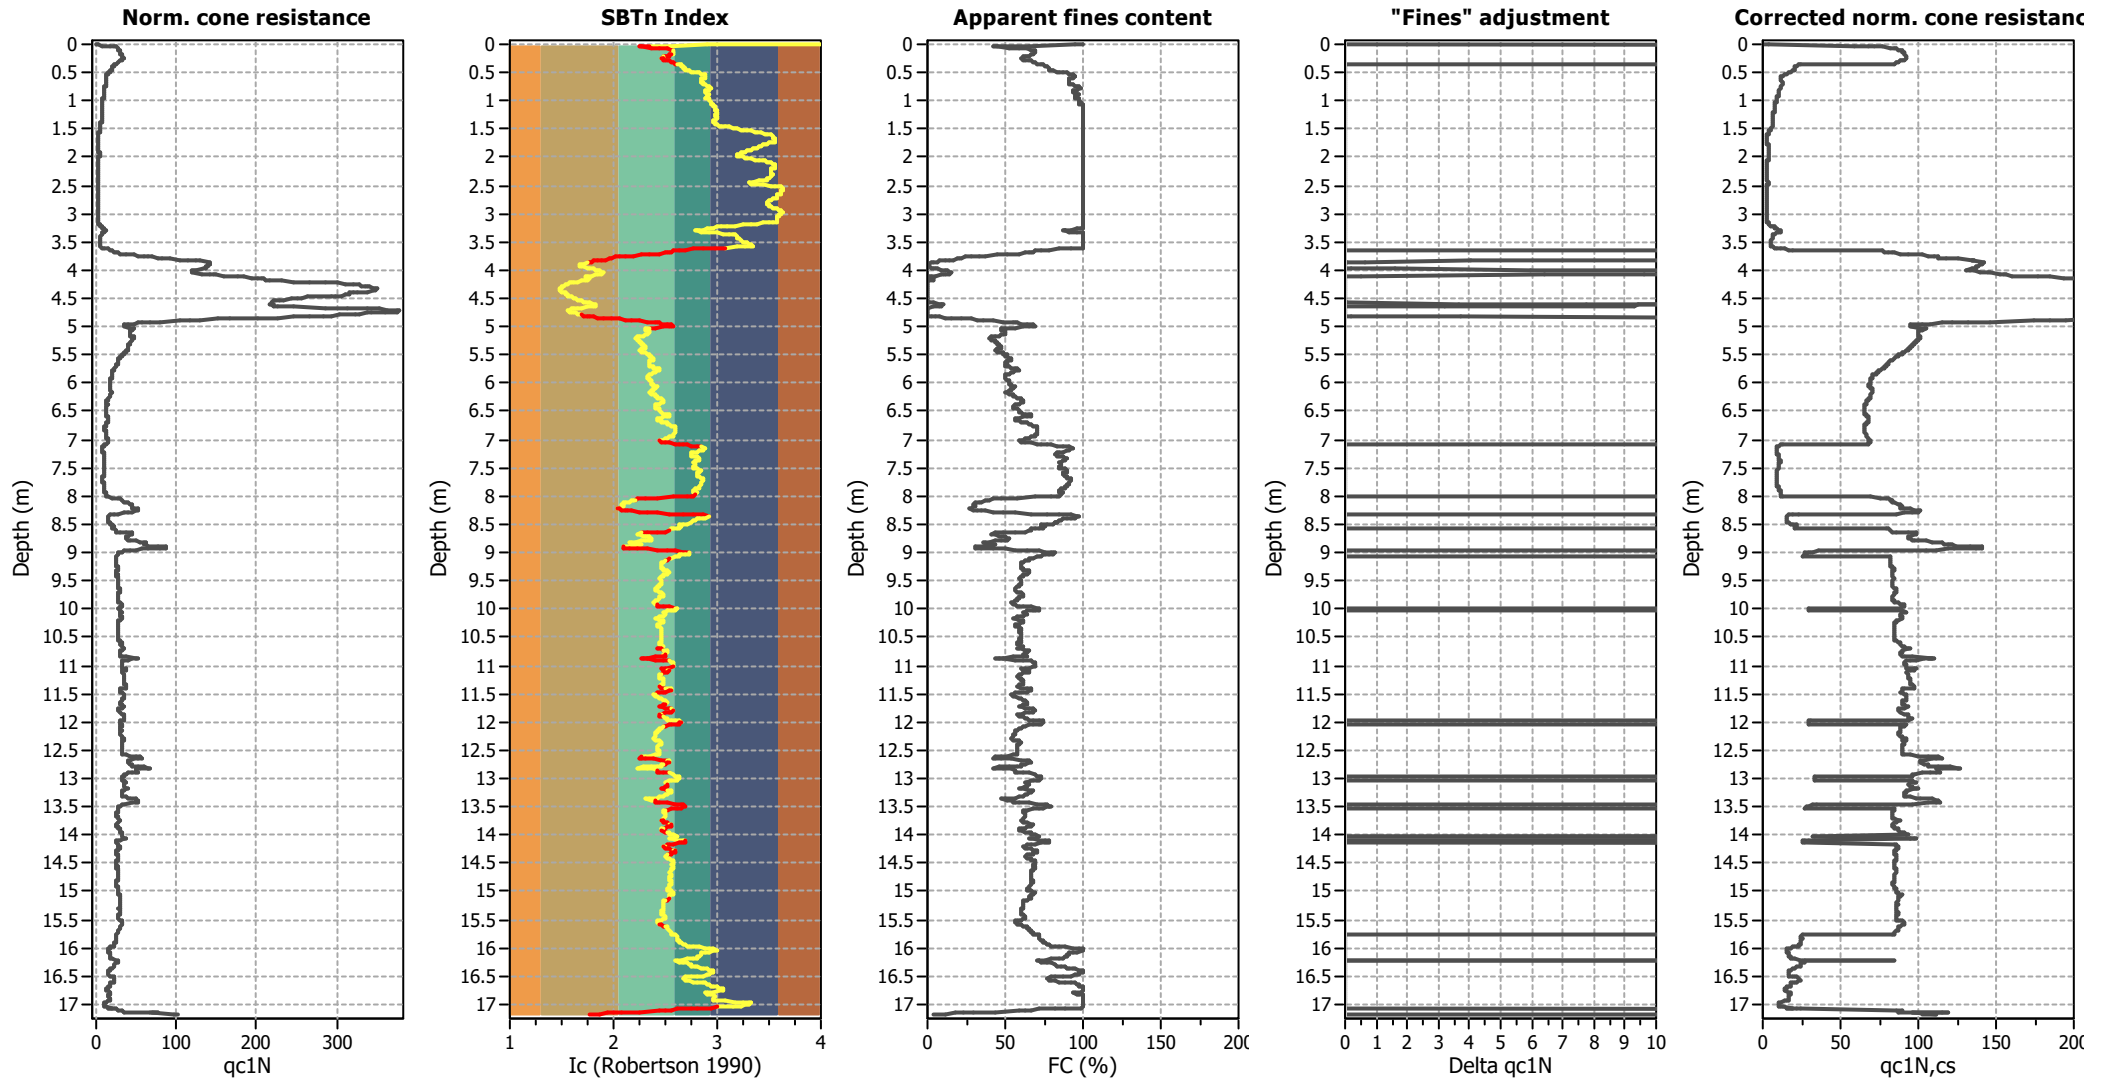

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

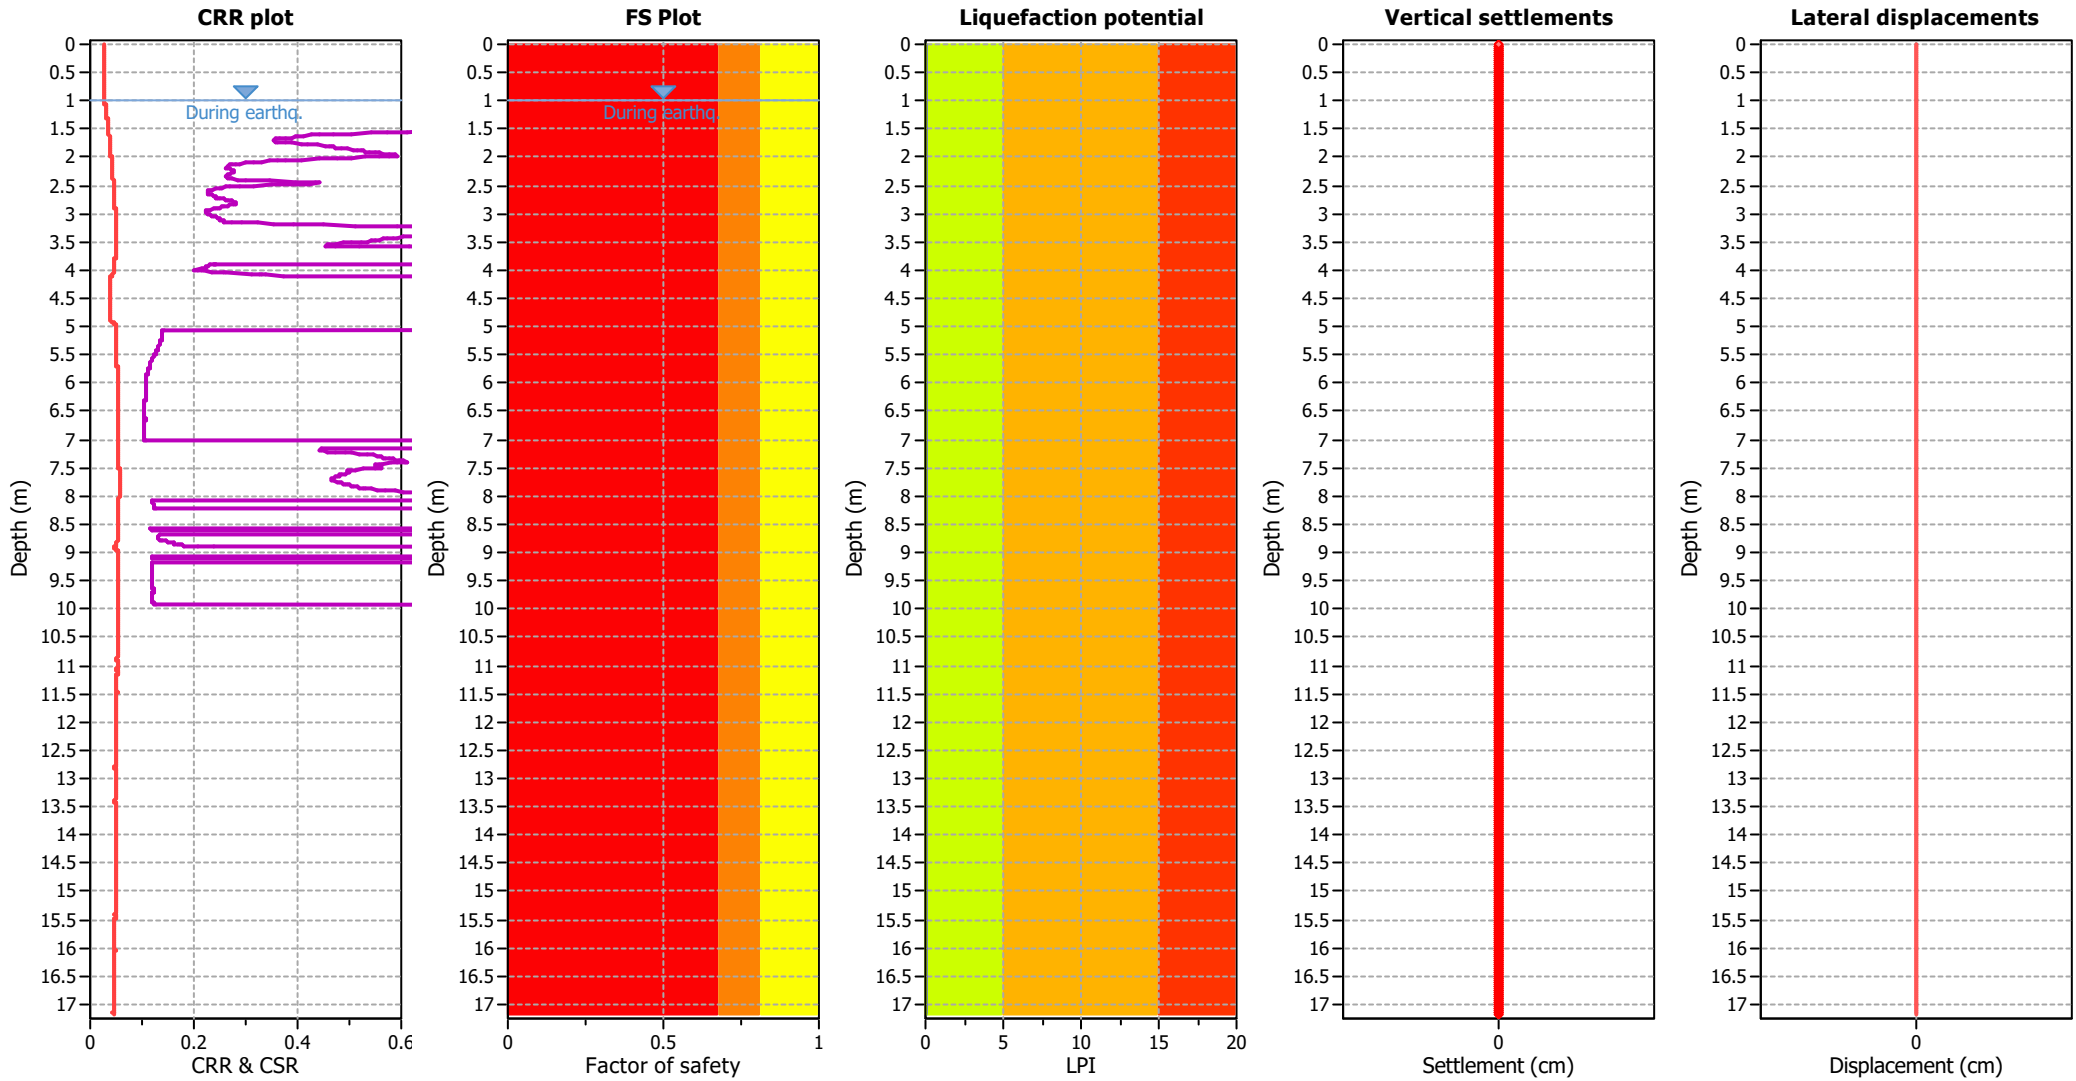

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

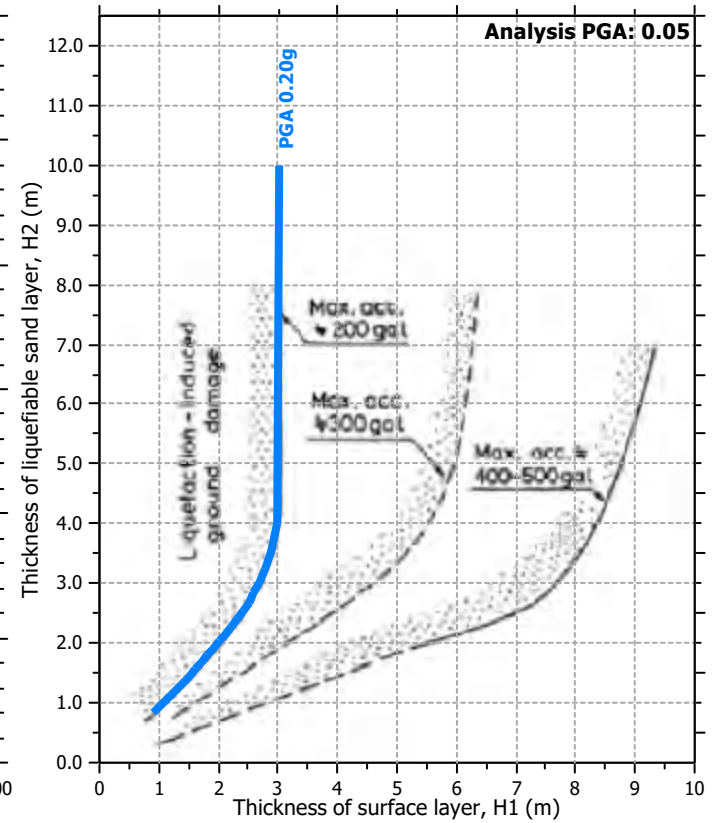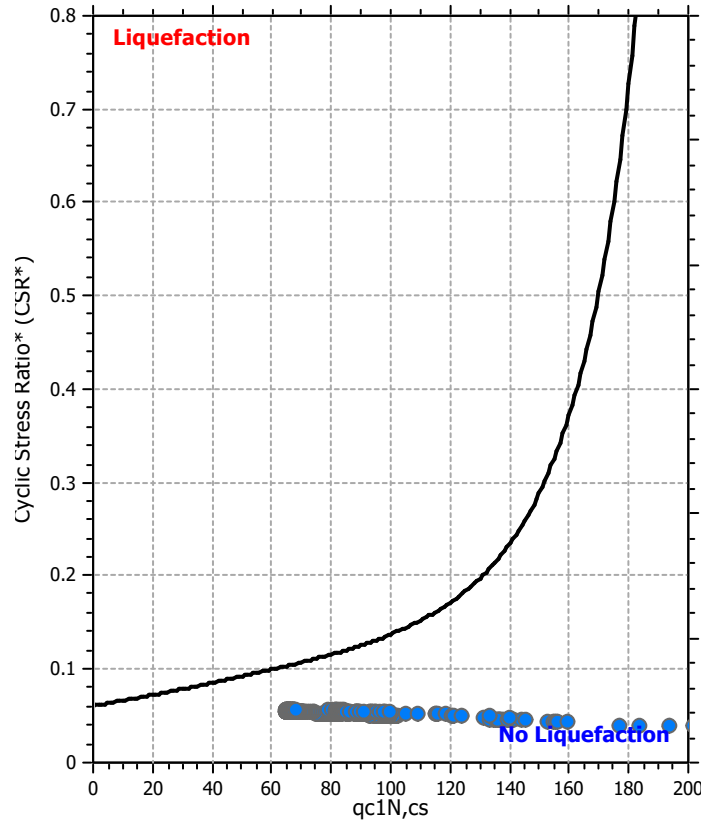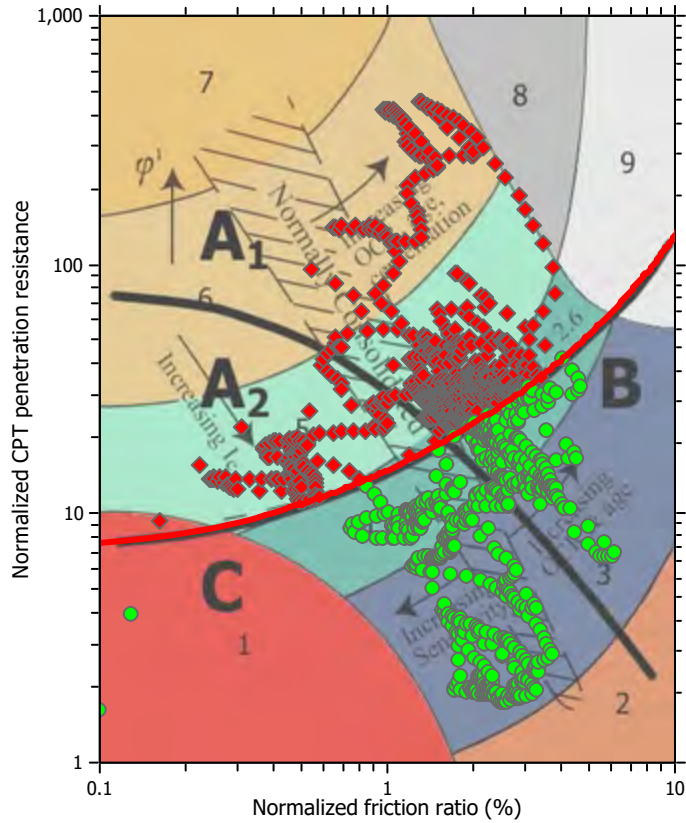

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

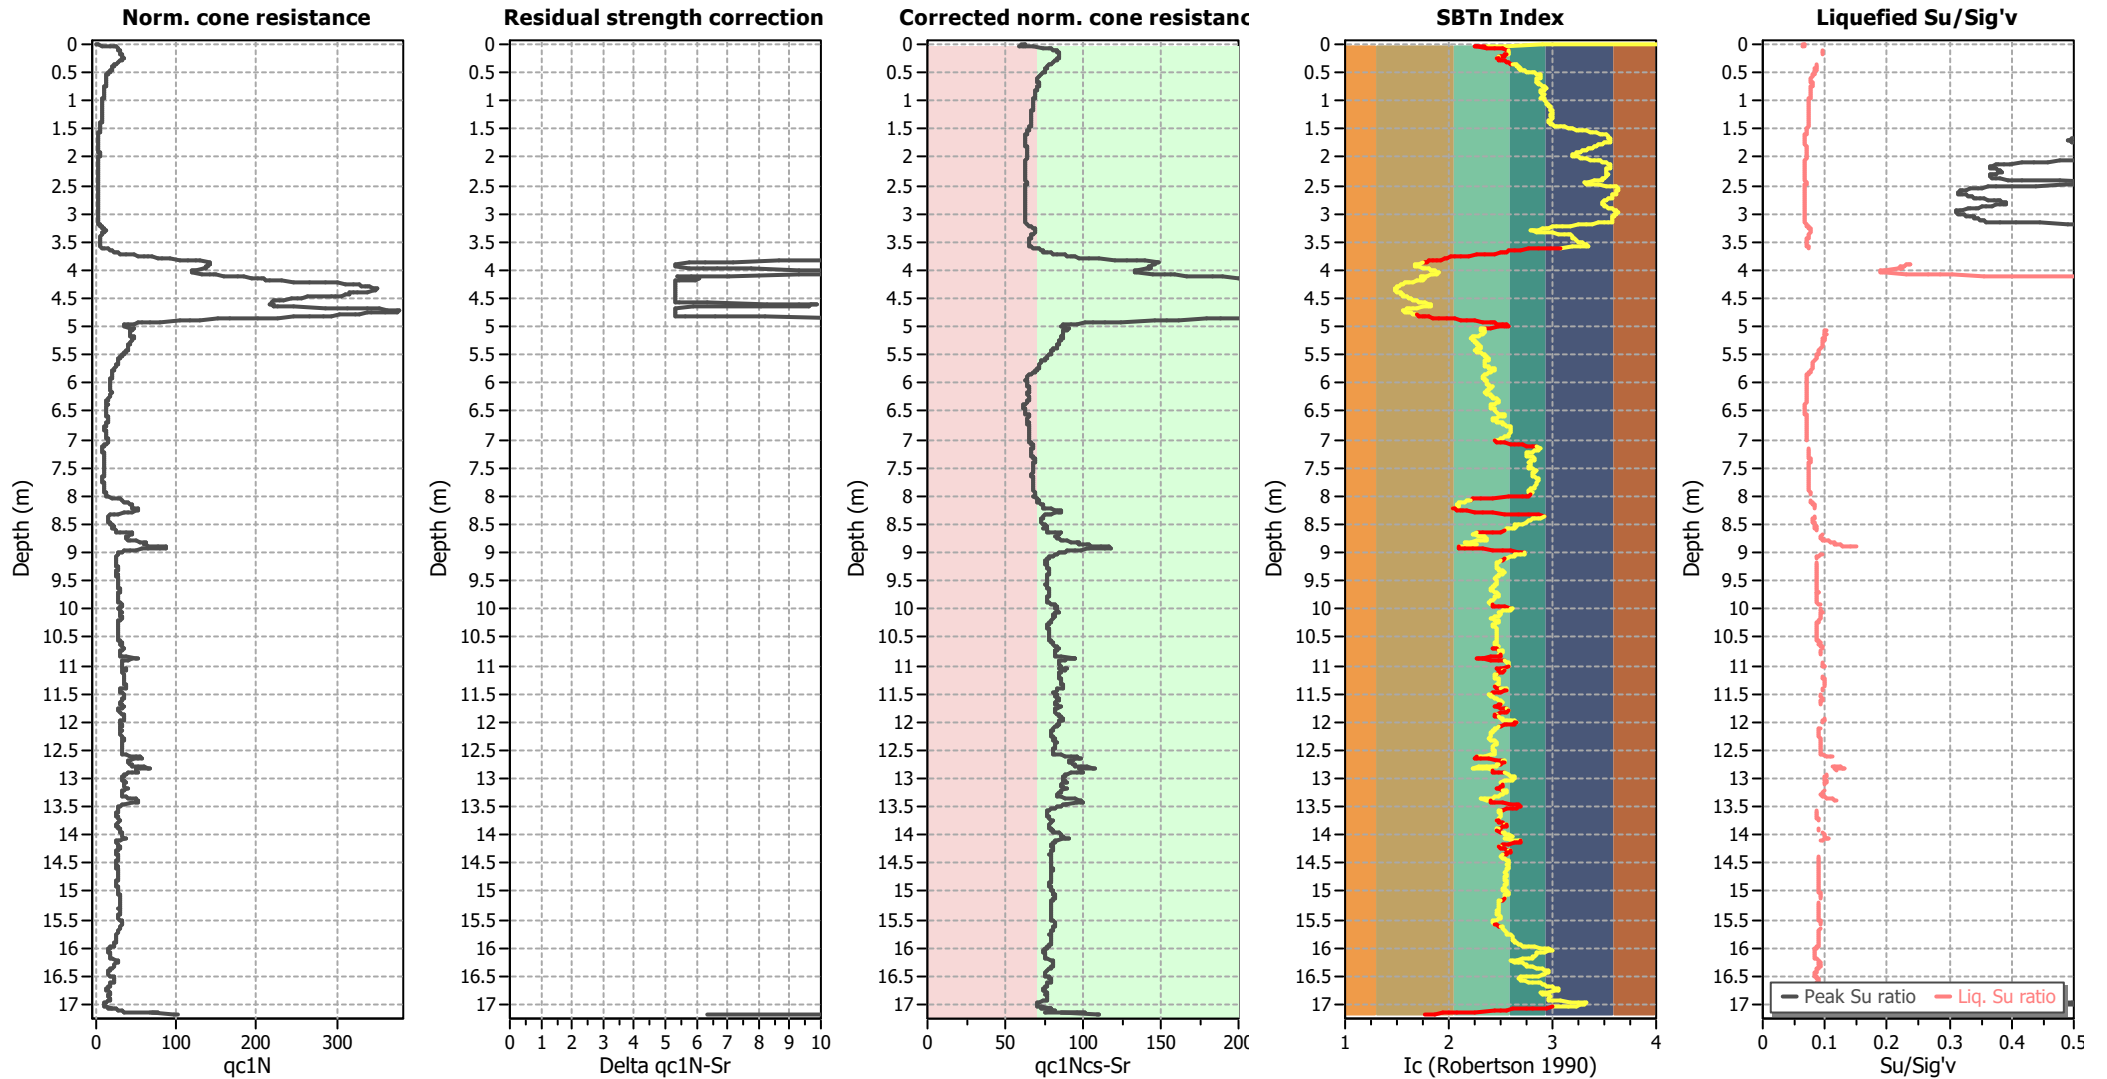

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

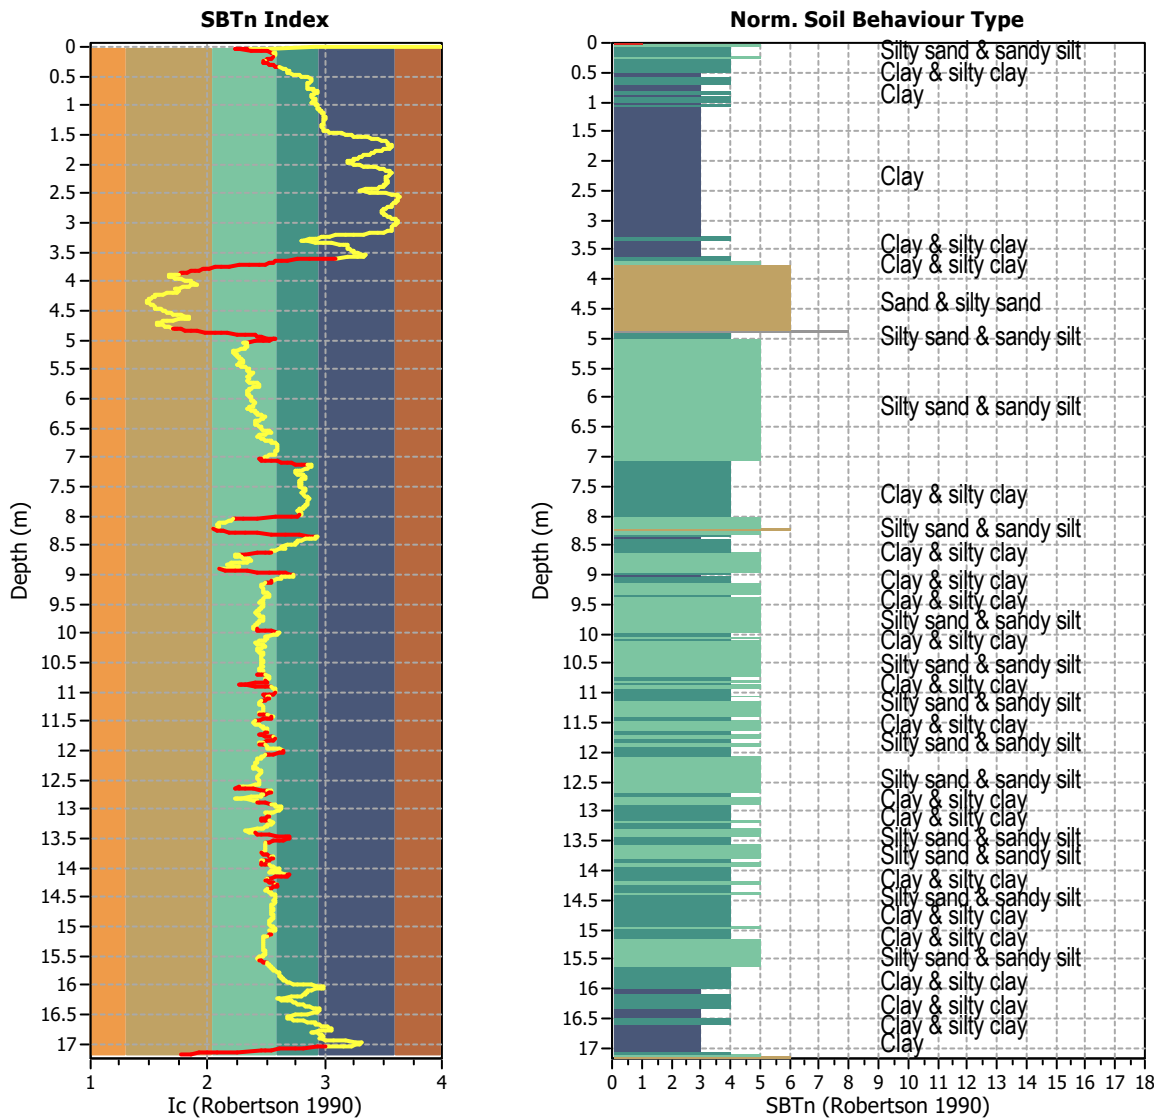

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	1719
I_c maximum check value:	3.00	Total points excluded:	319
I_c change ratio value:	0.0100	Exclusion percentage:	18.56%
Minimum number of points in layer:	4	Number of layers detected:	42


Estimation of post-earthquake settlements

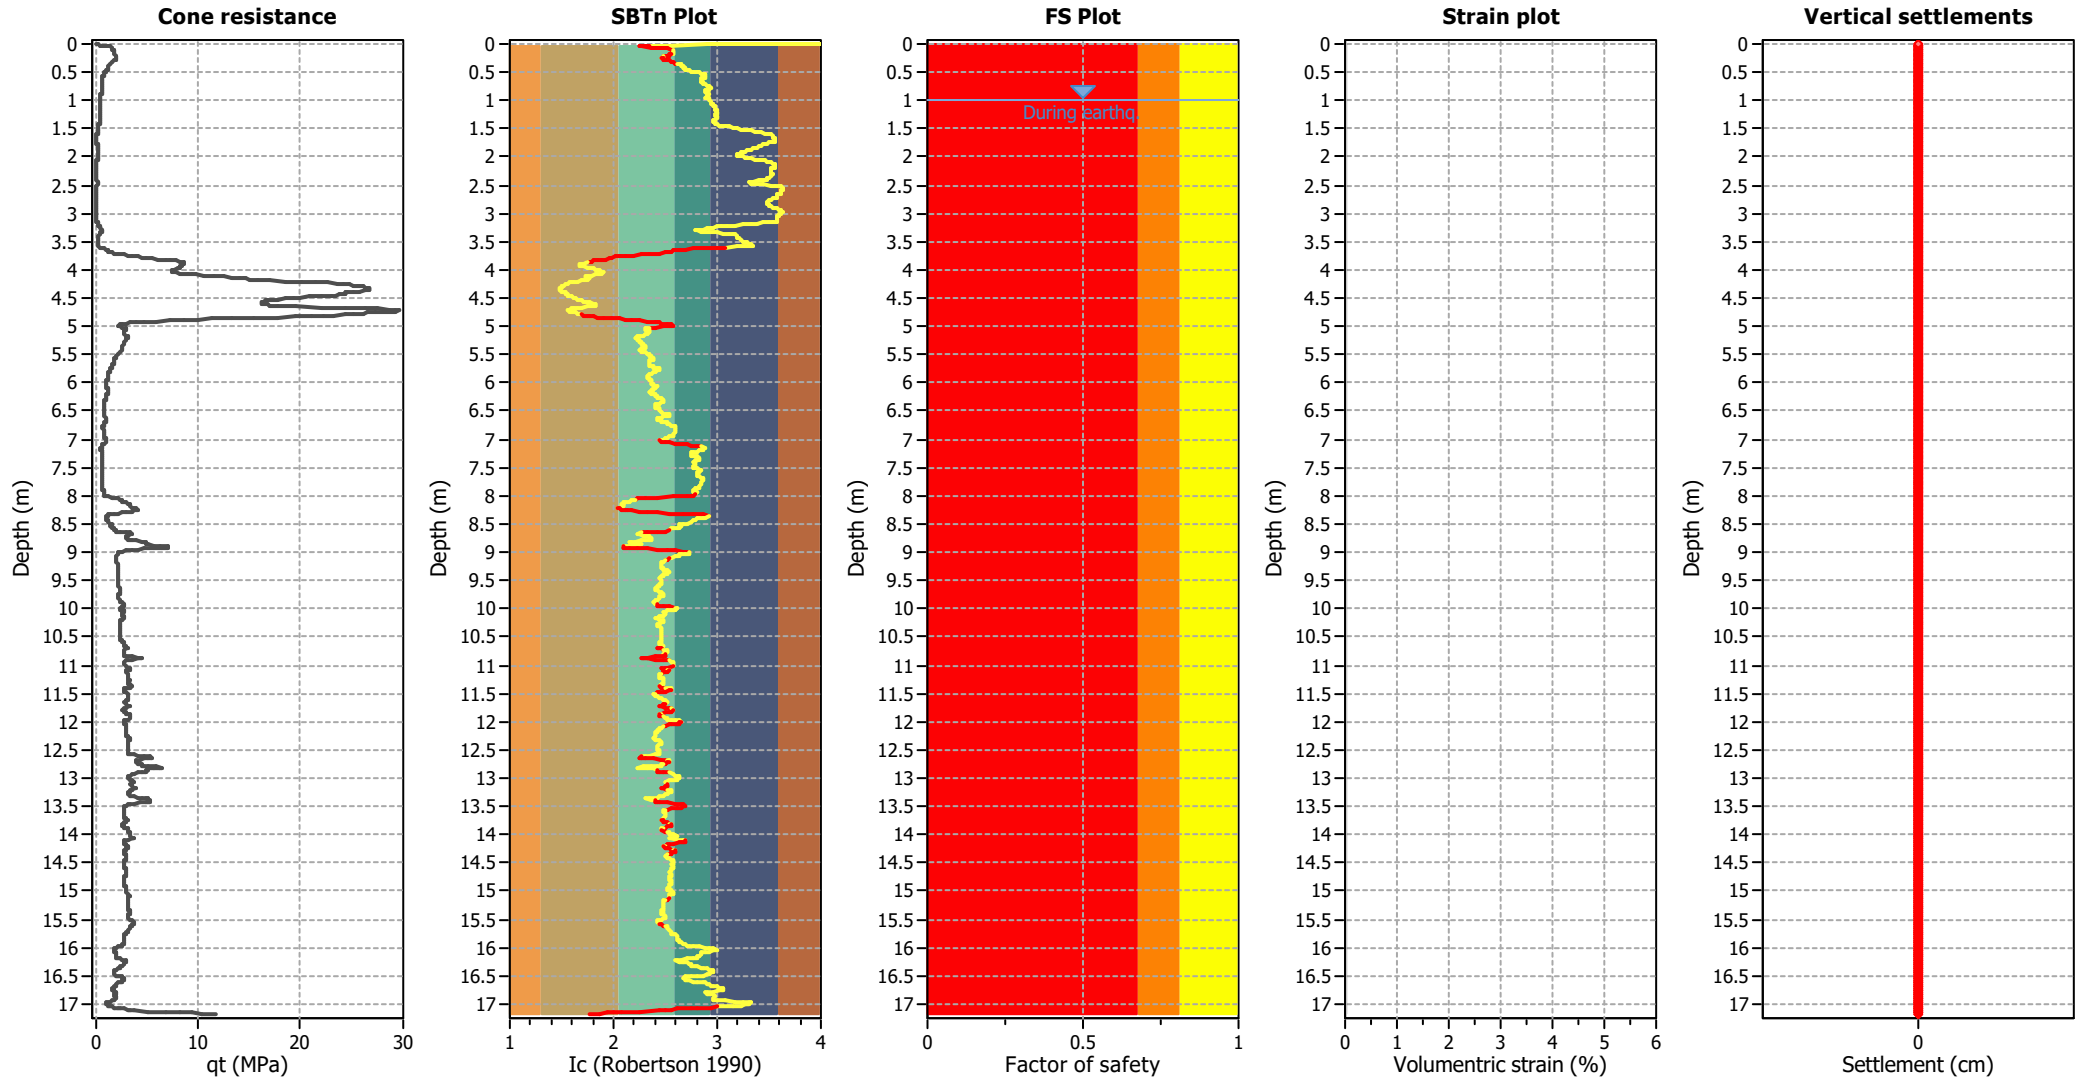

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

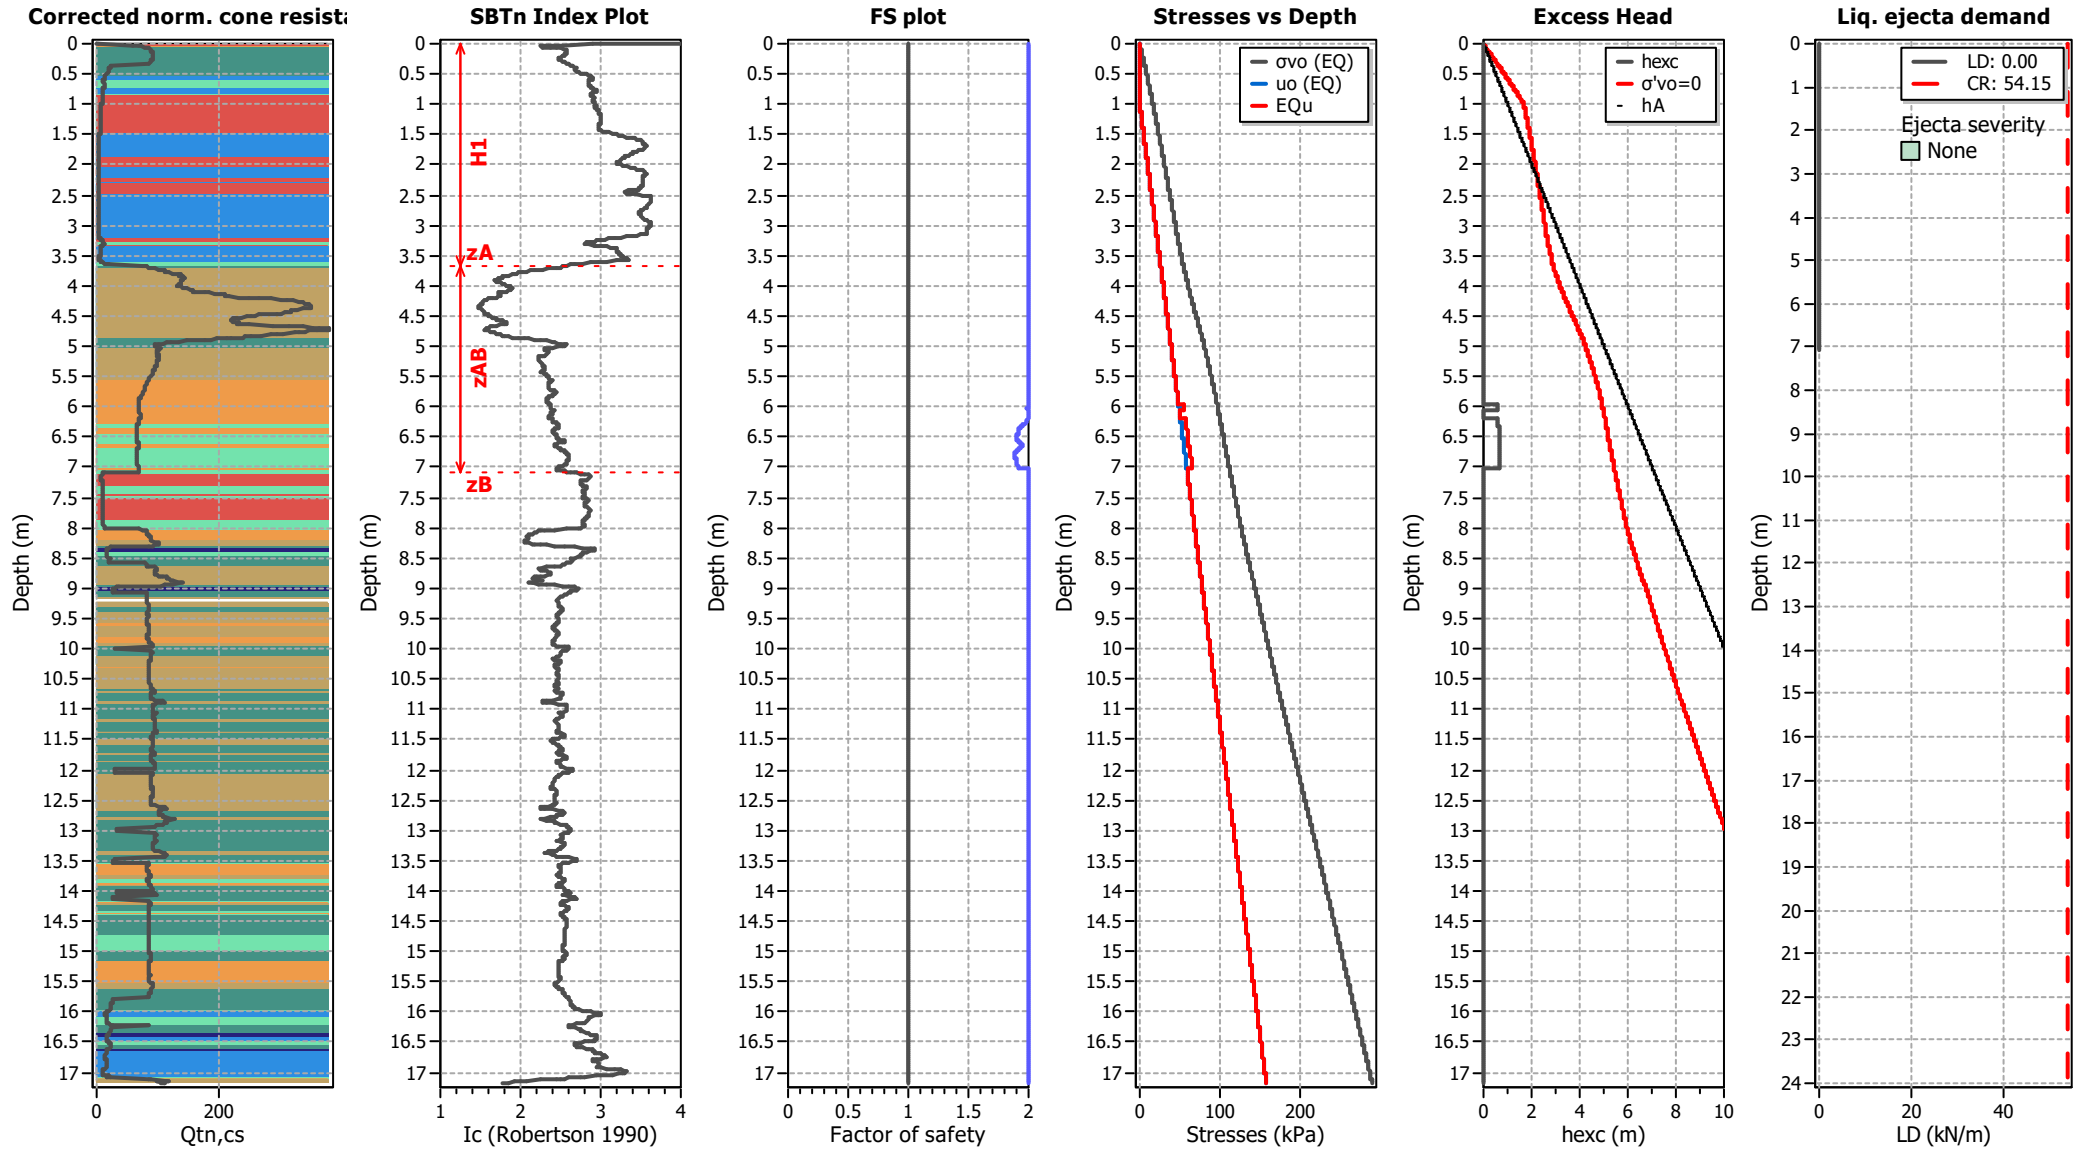

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT401

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

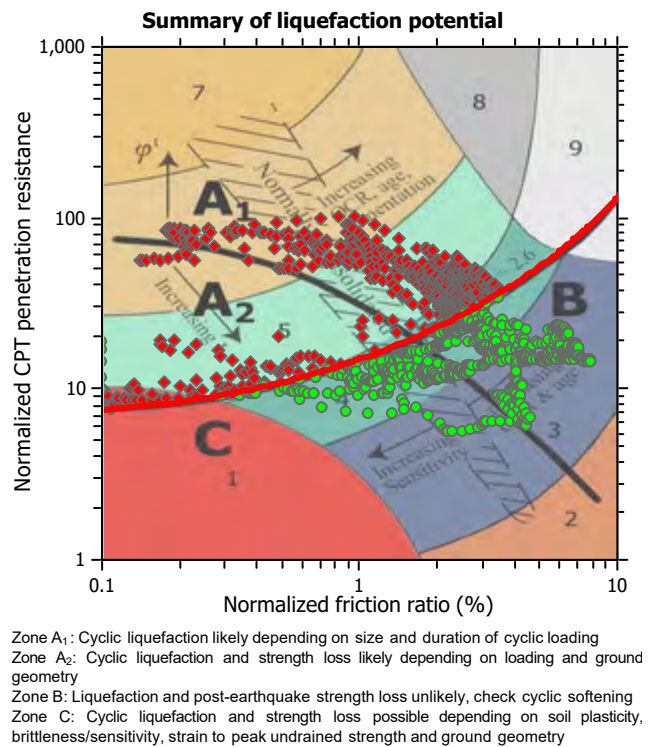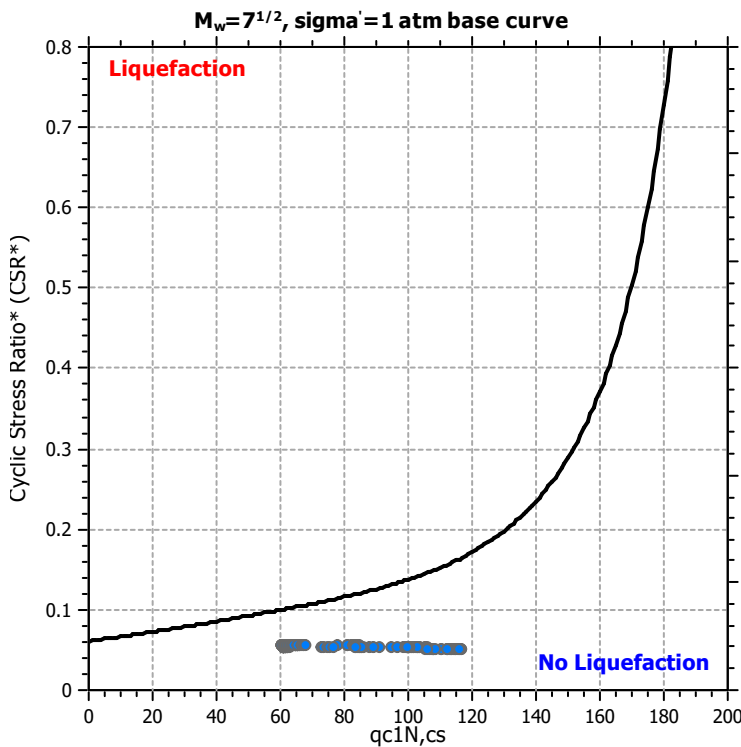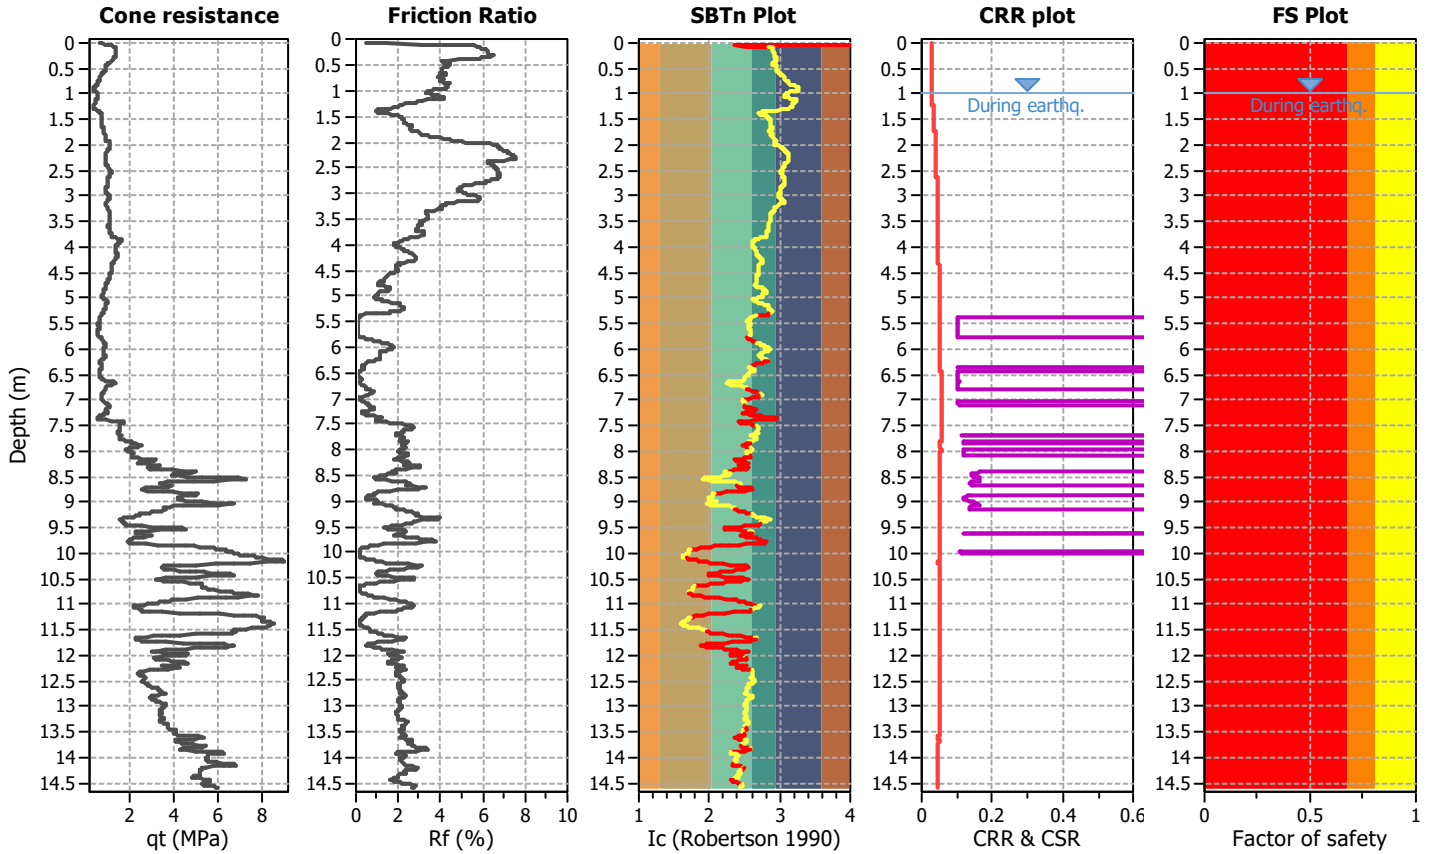

CPT basic interpretation plots

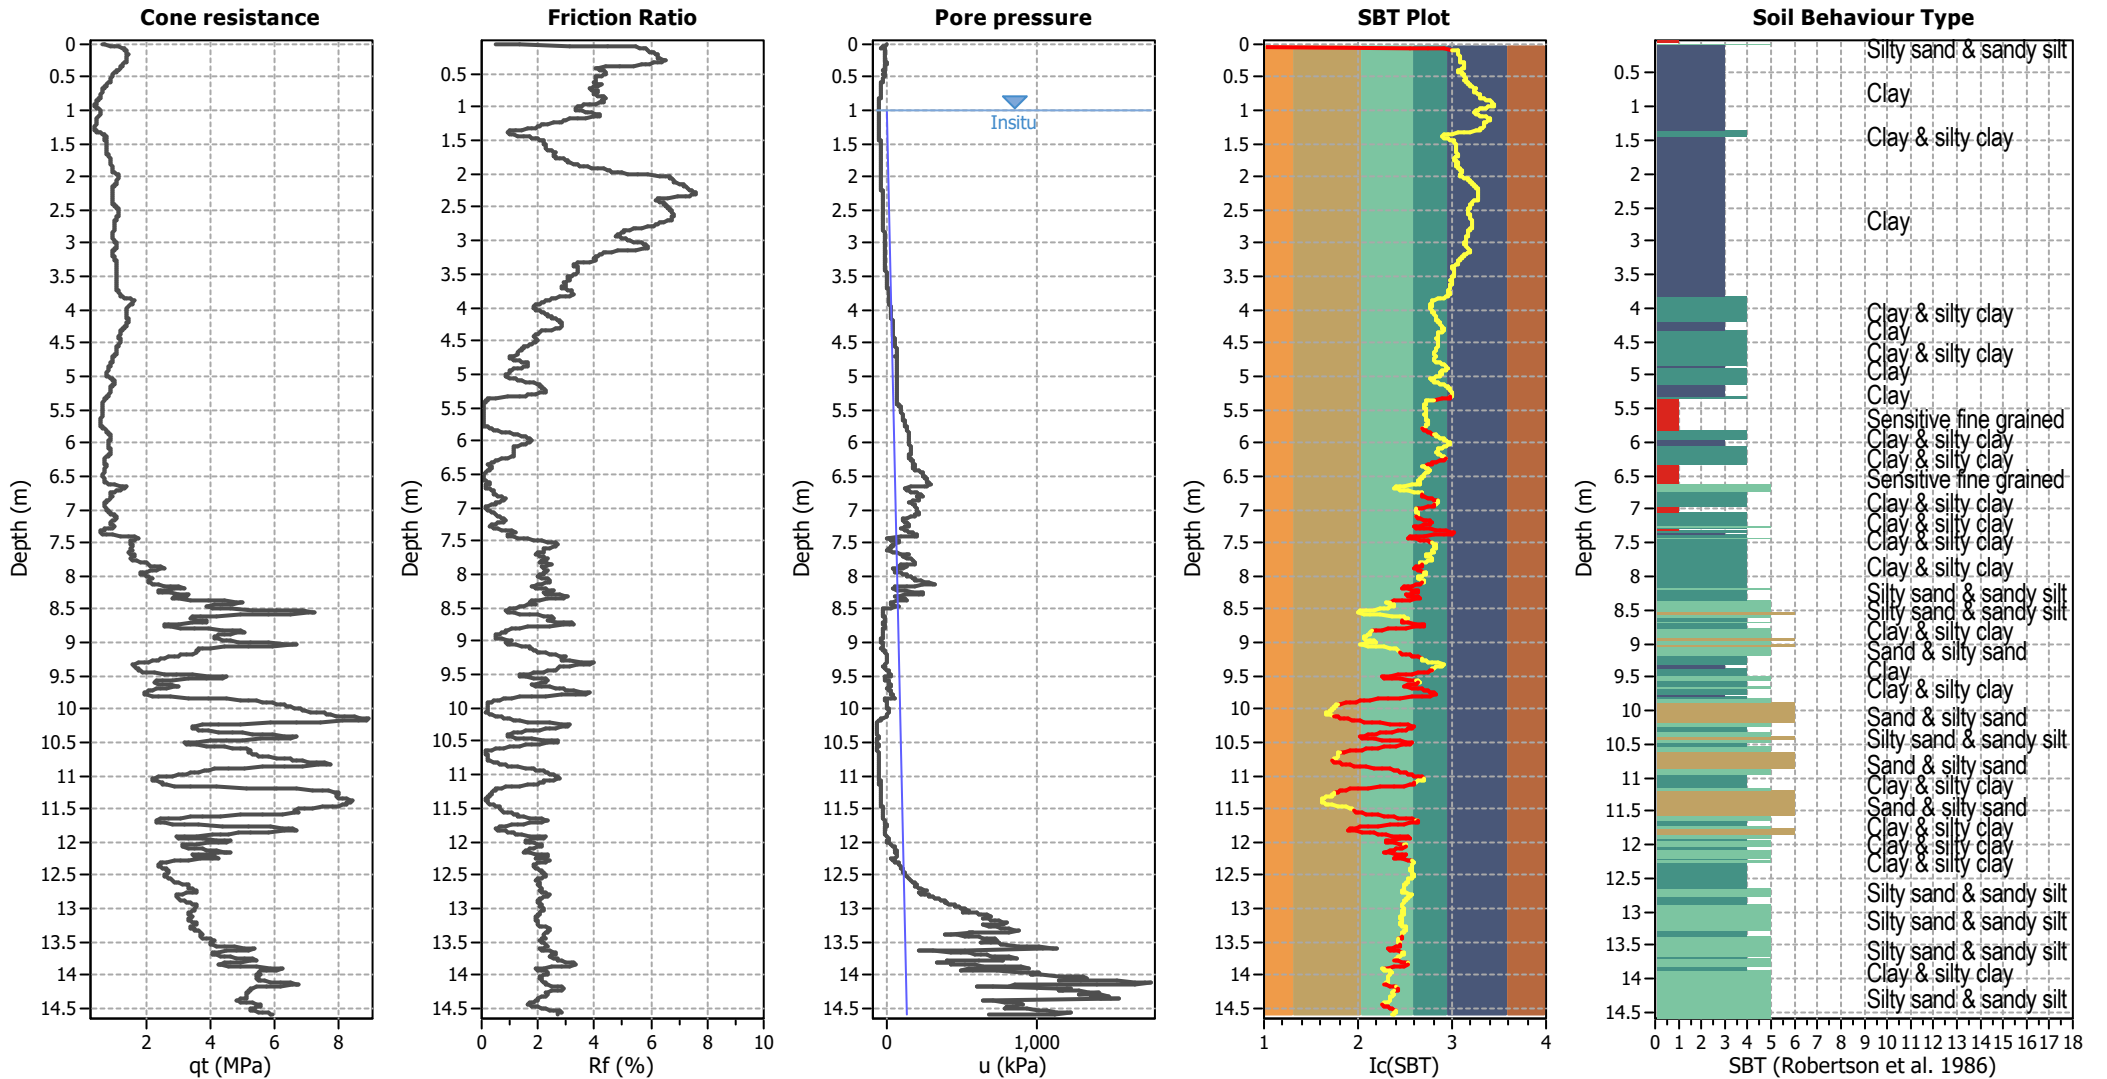


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

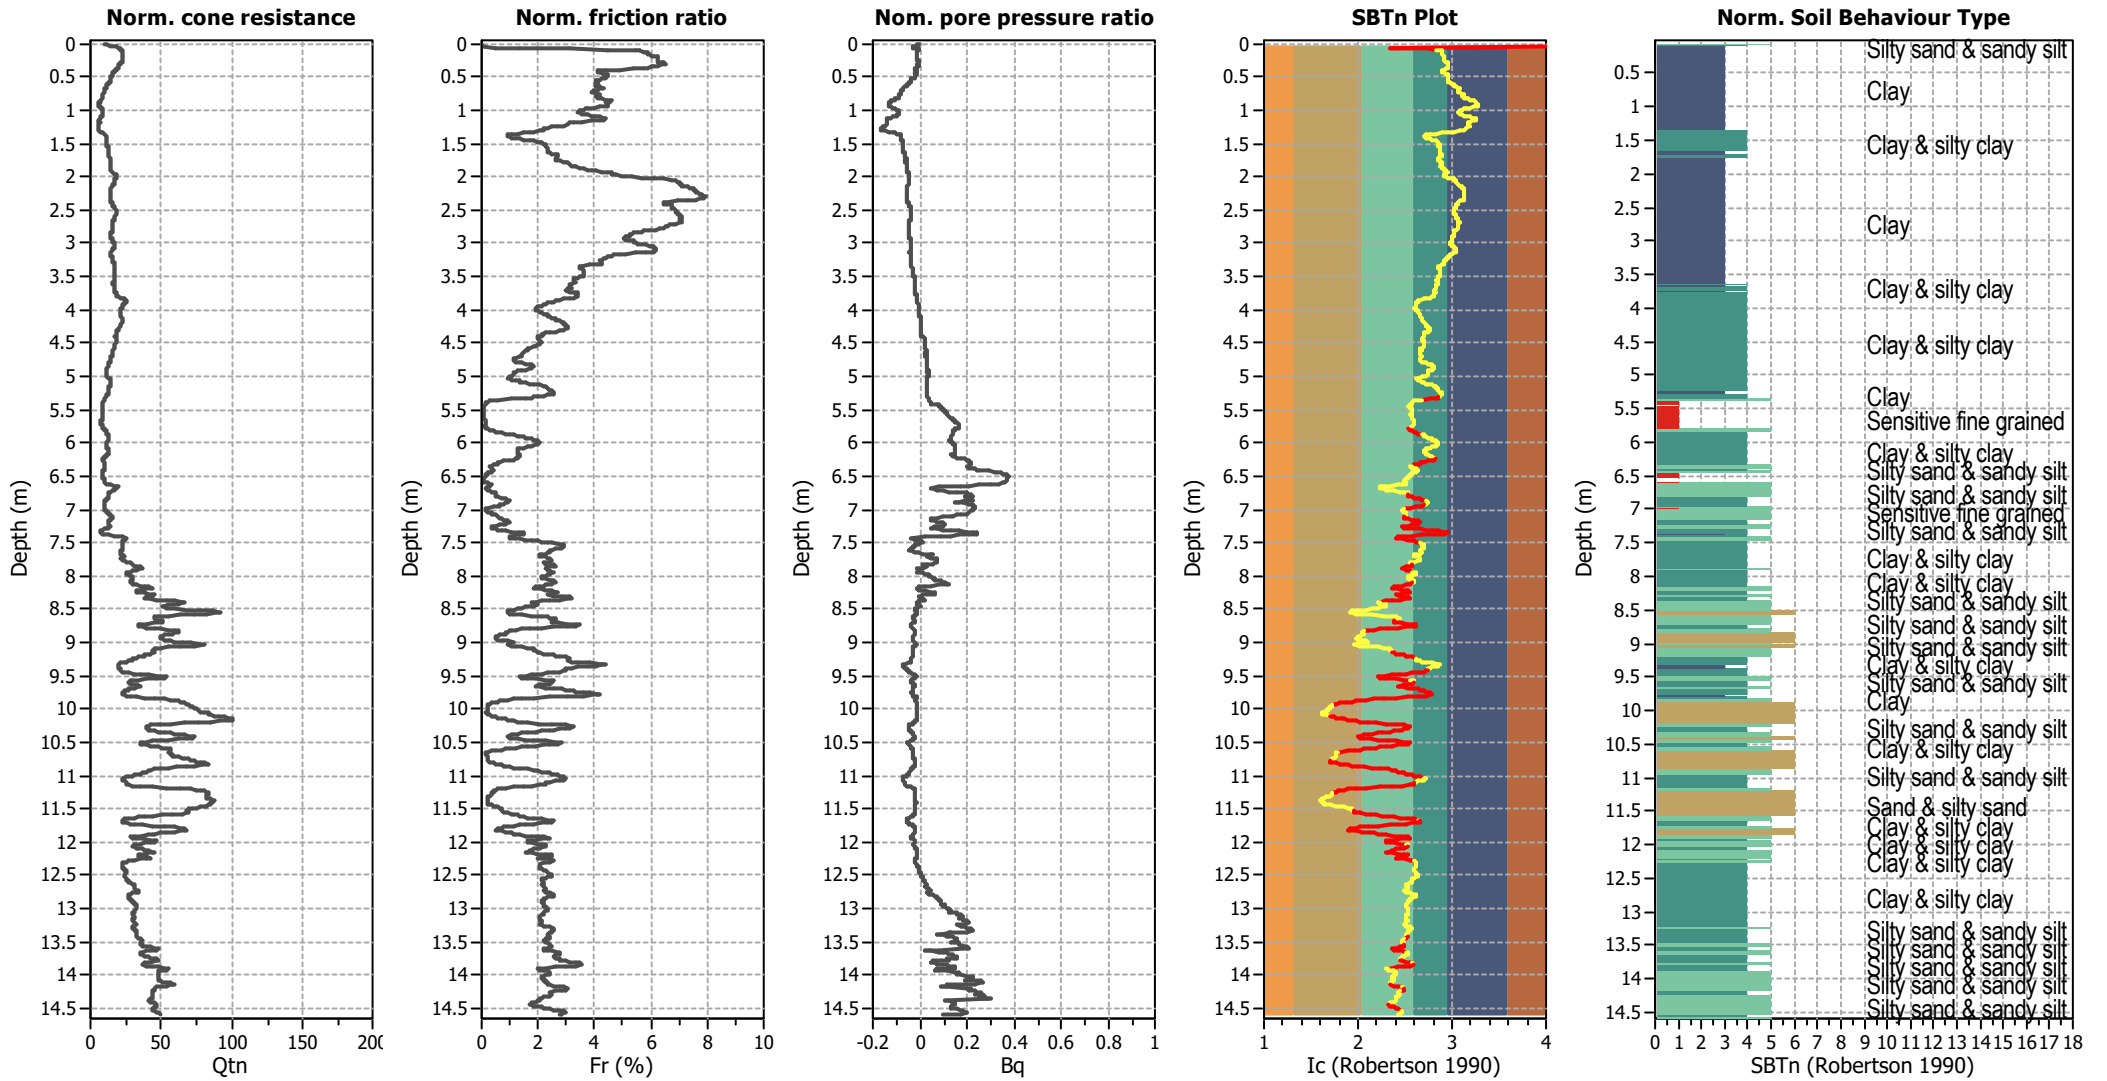


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

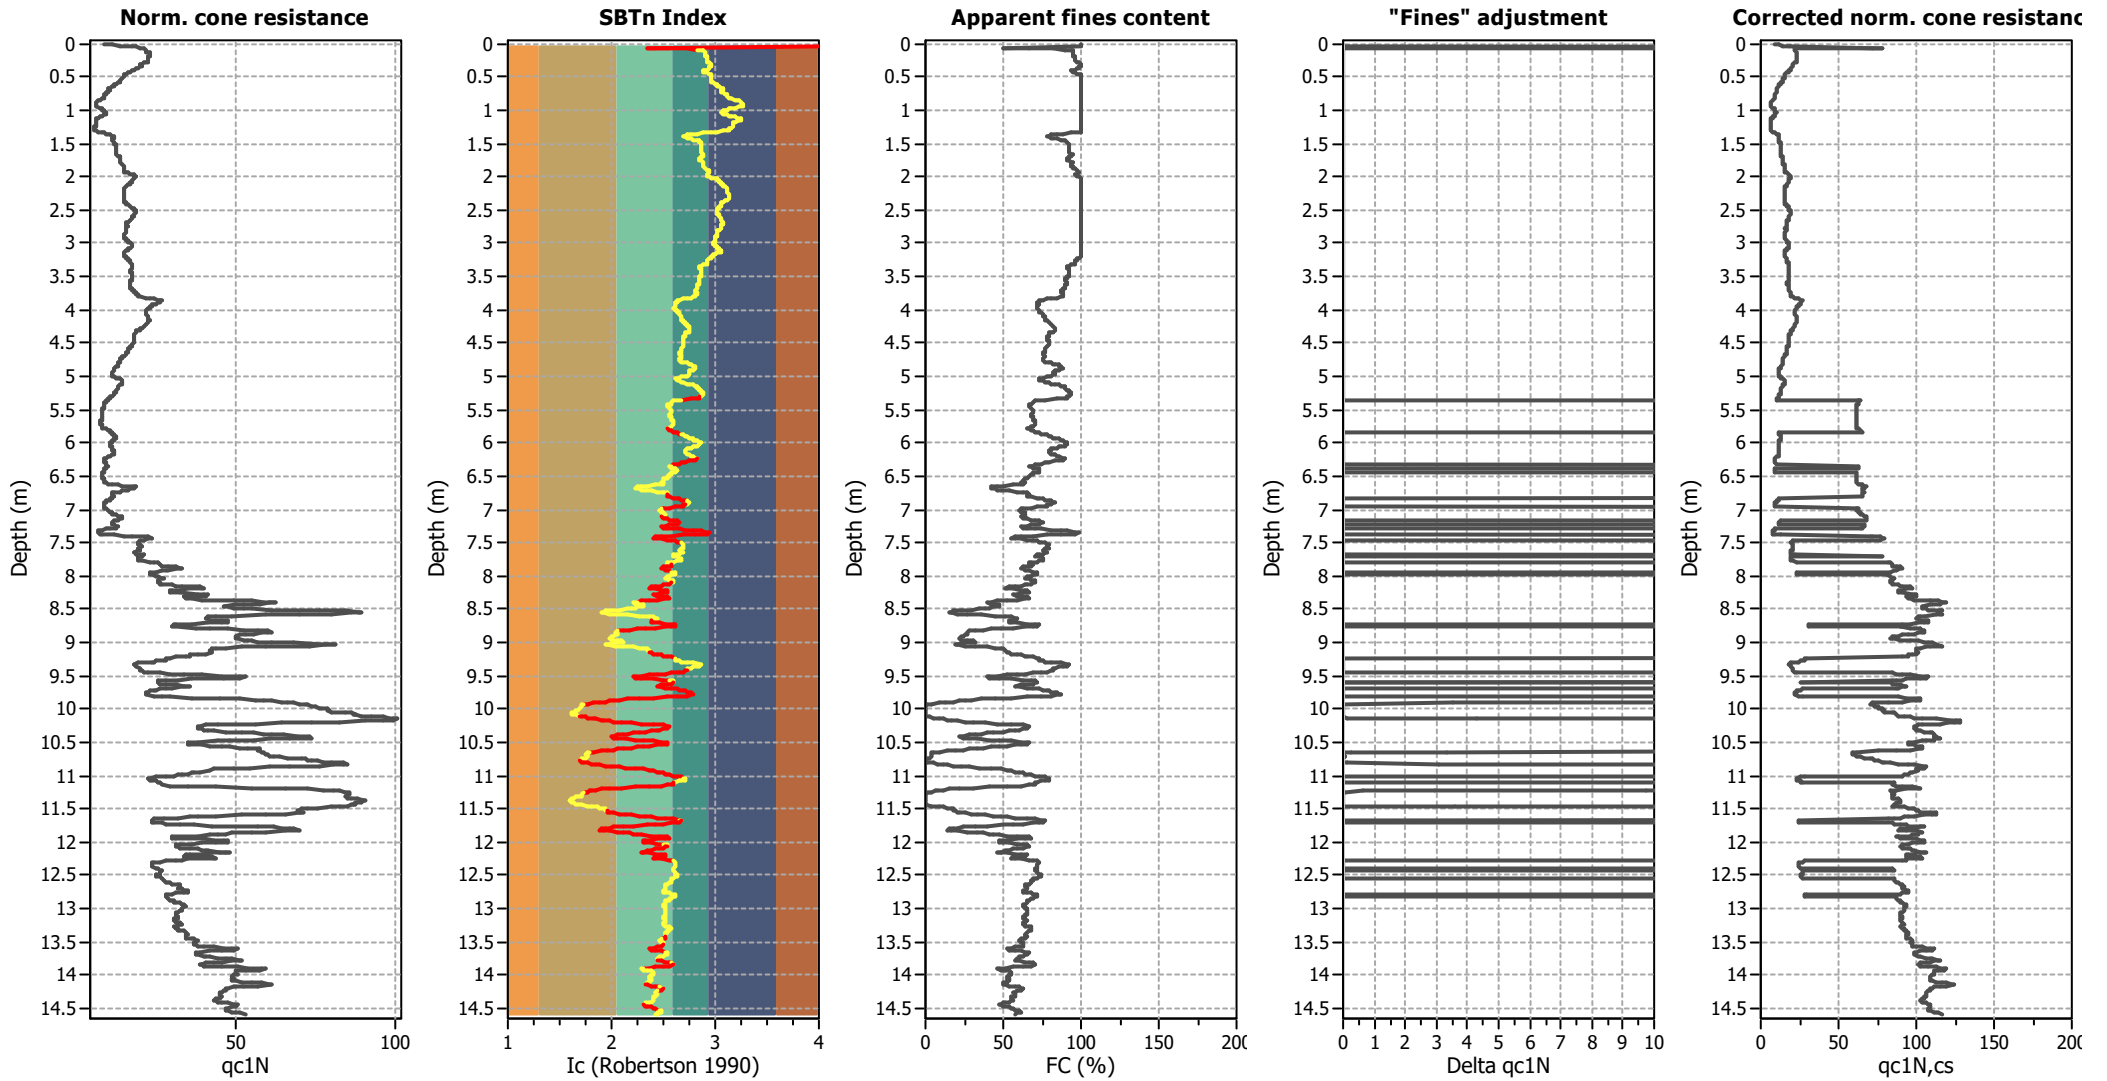

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

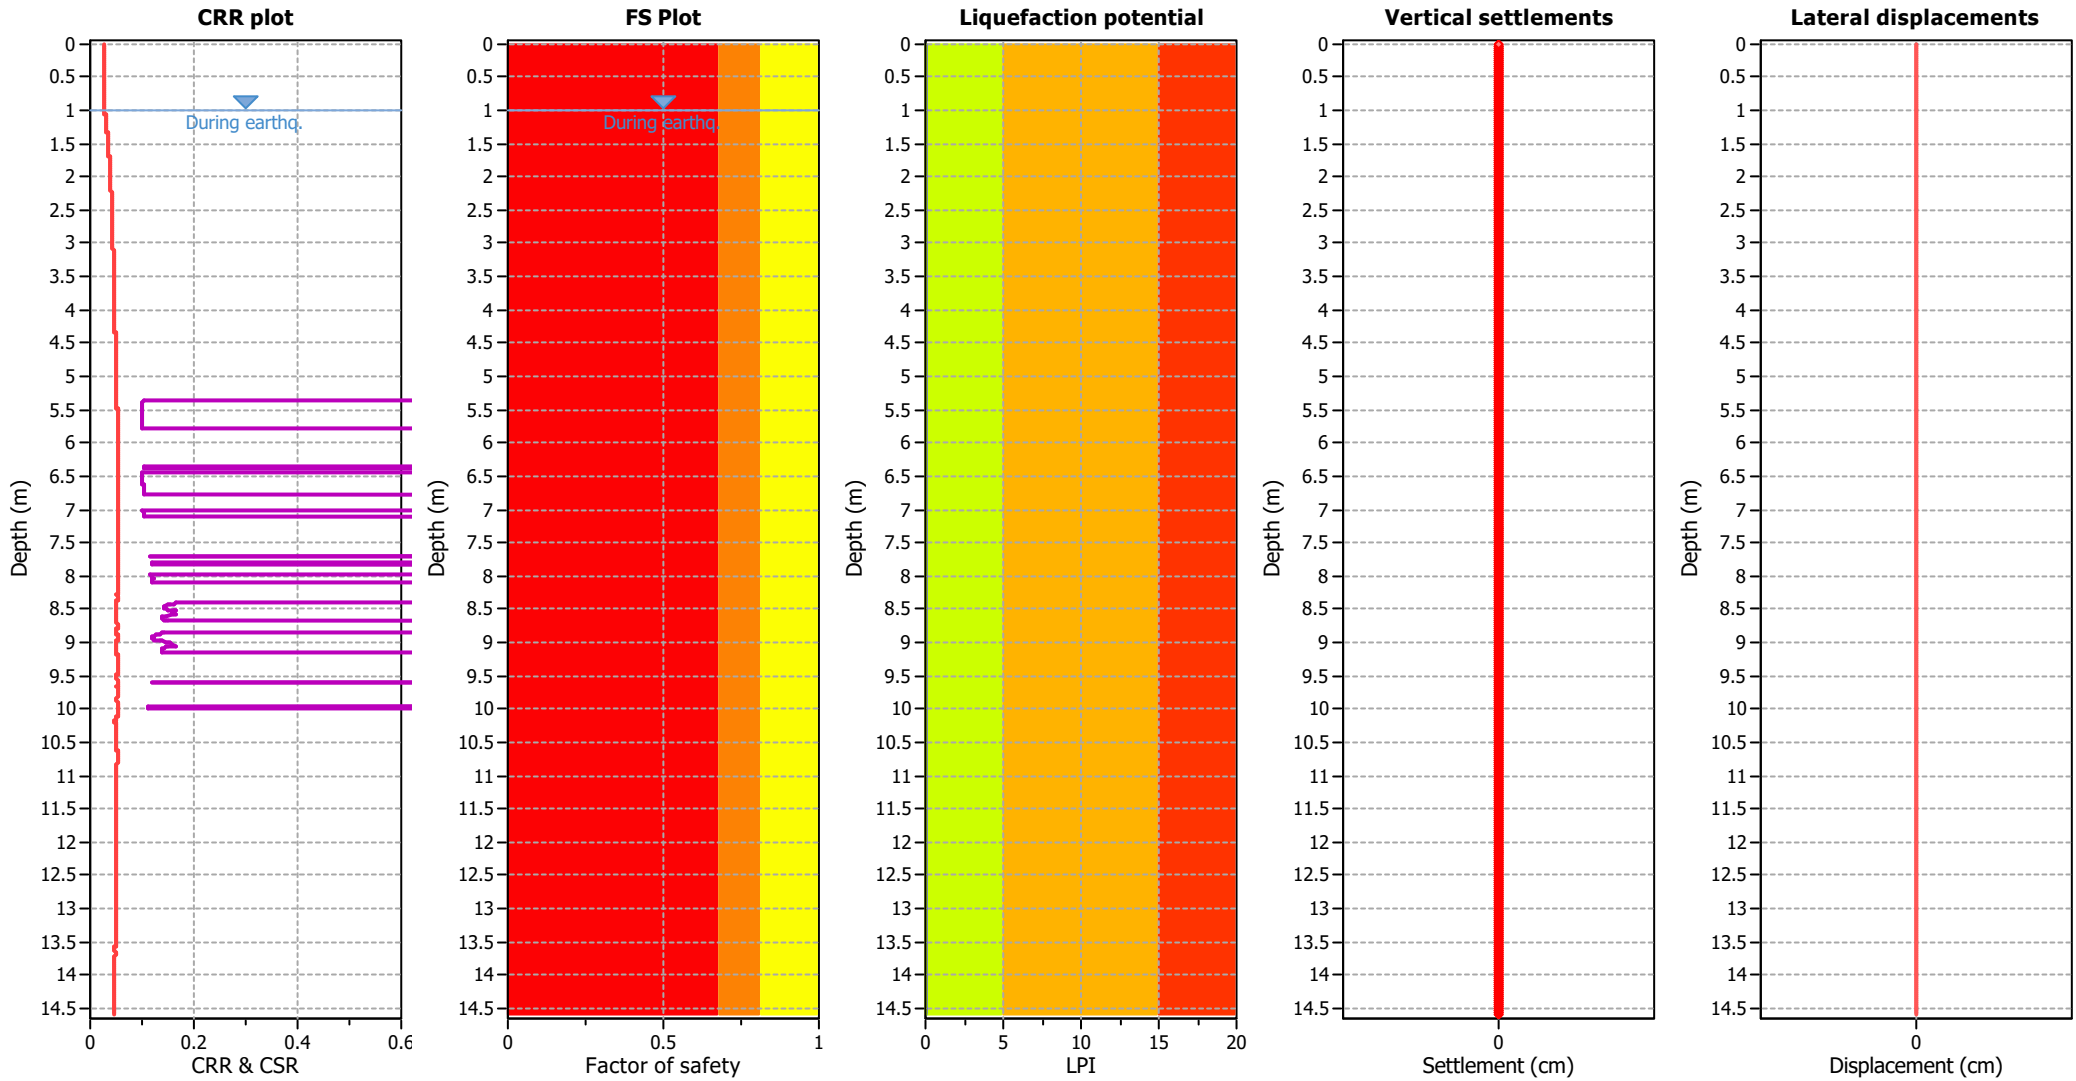

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

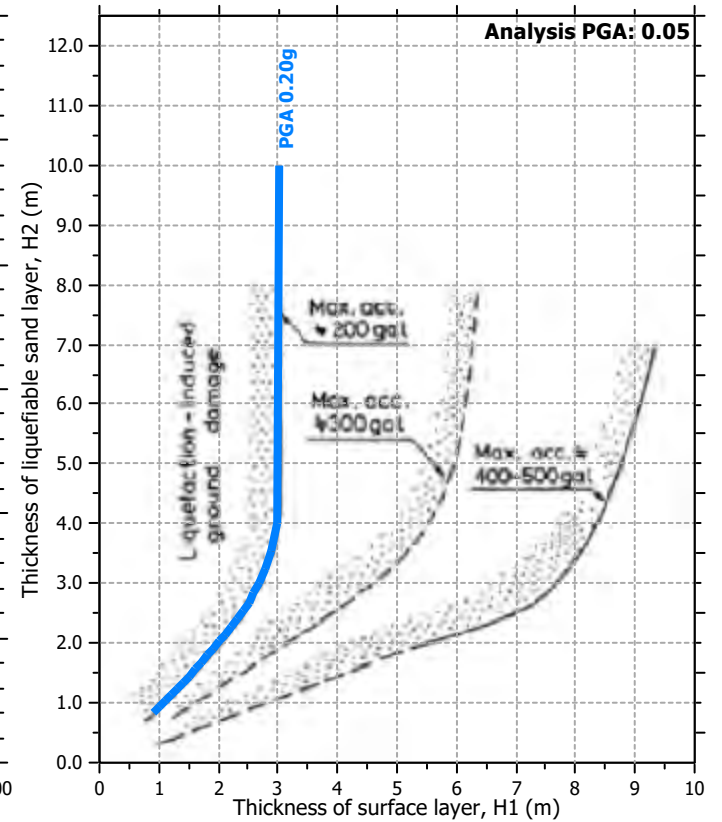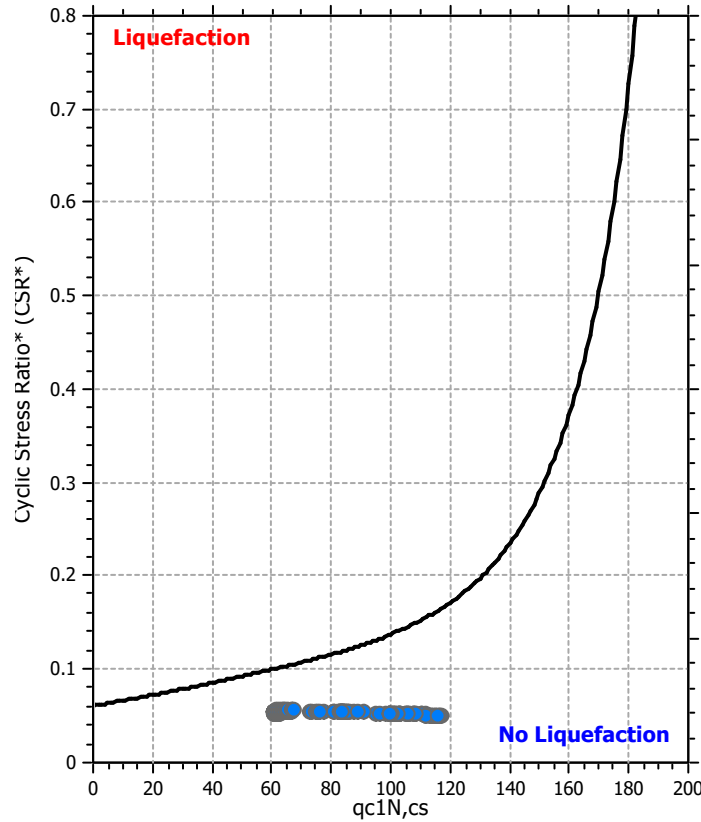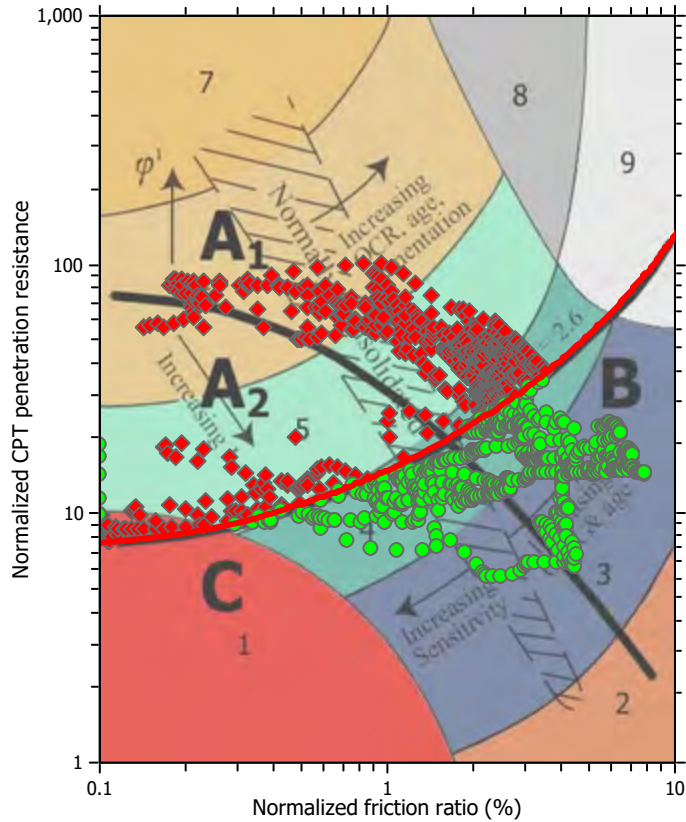

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

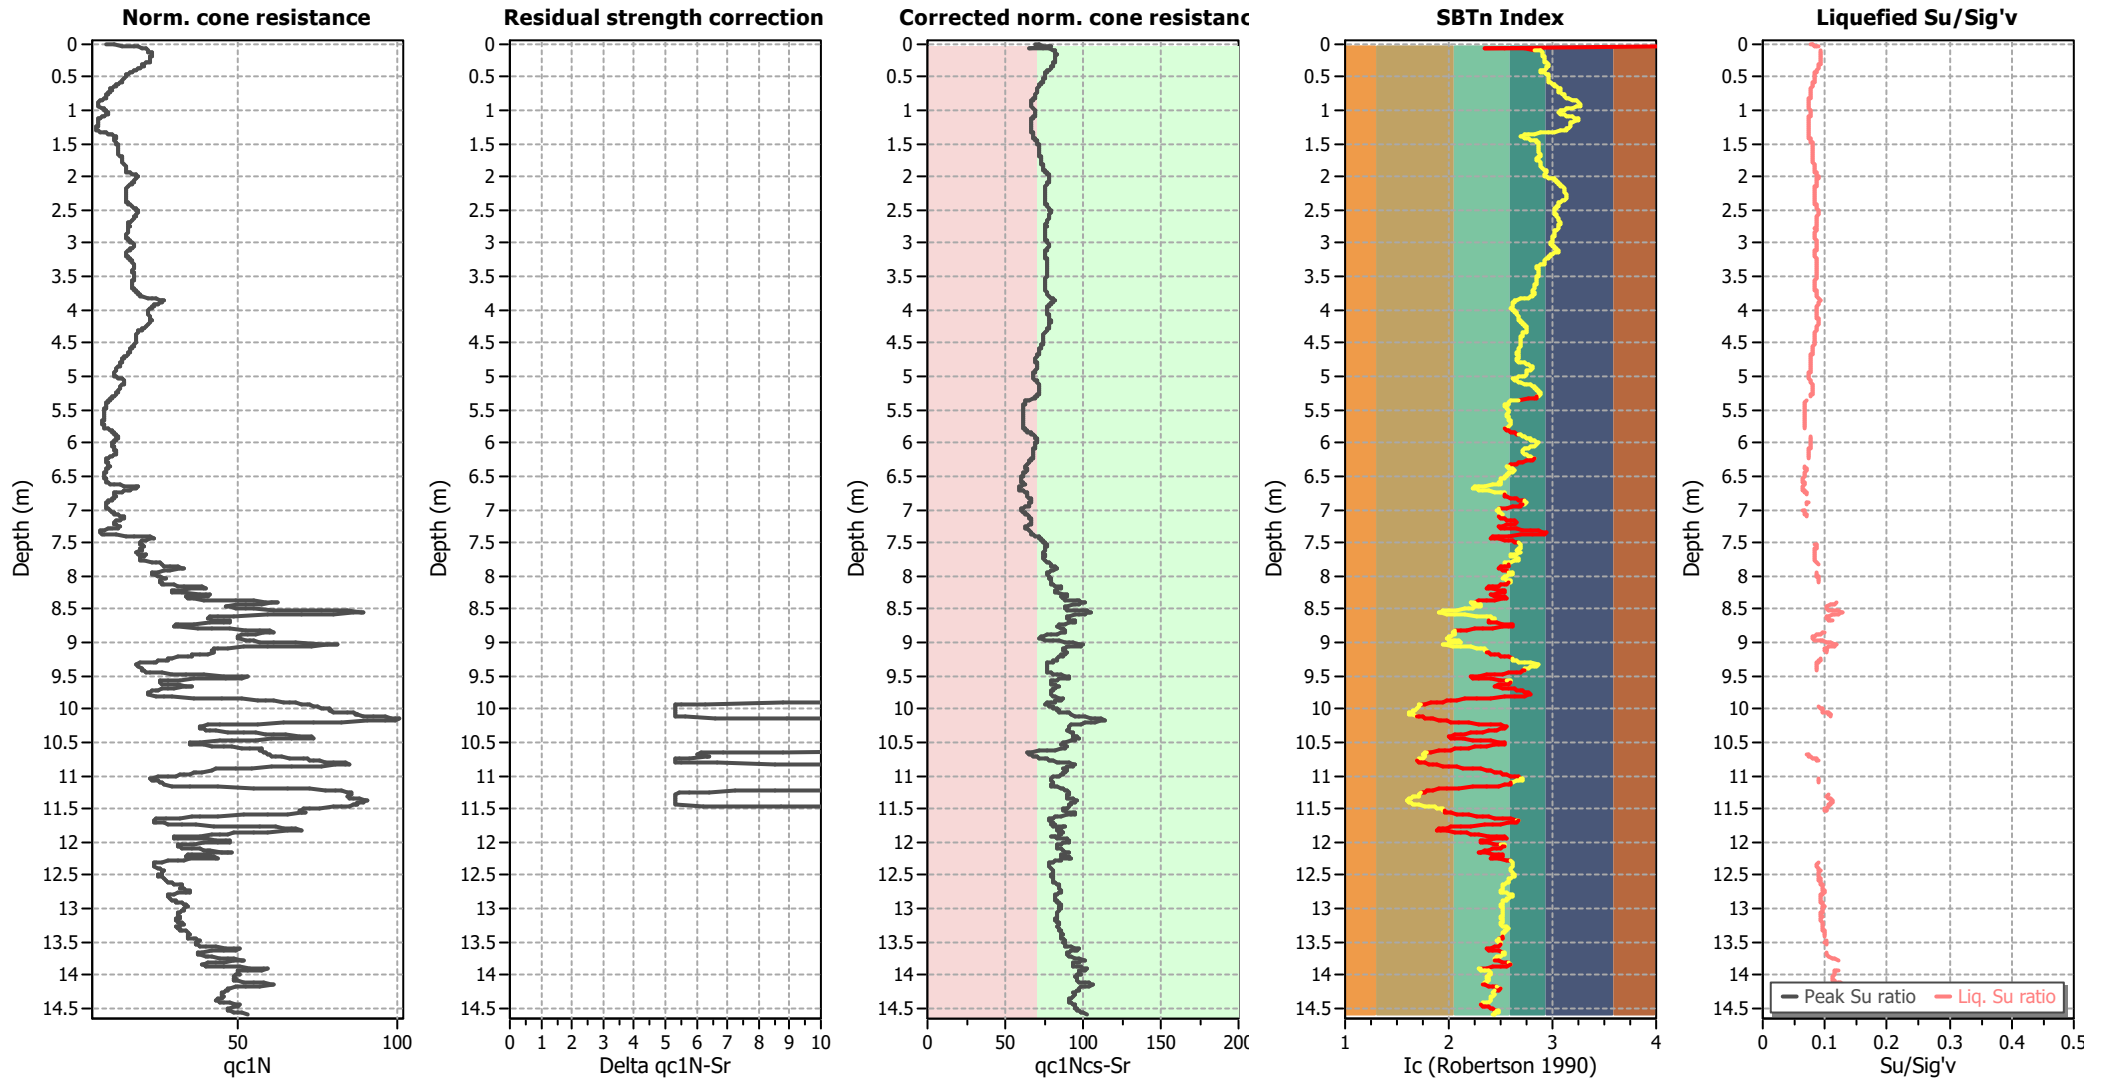

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

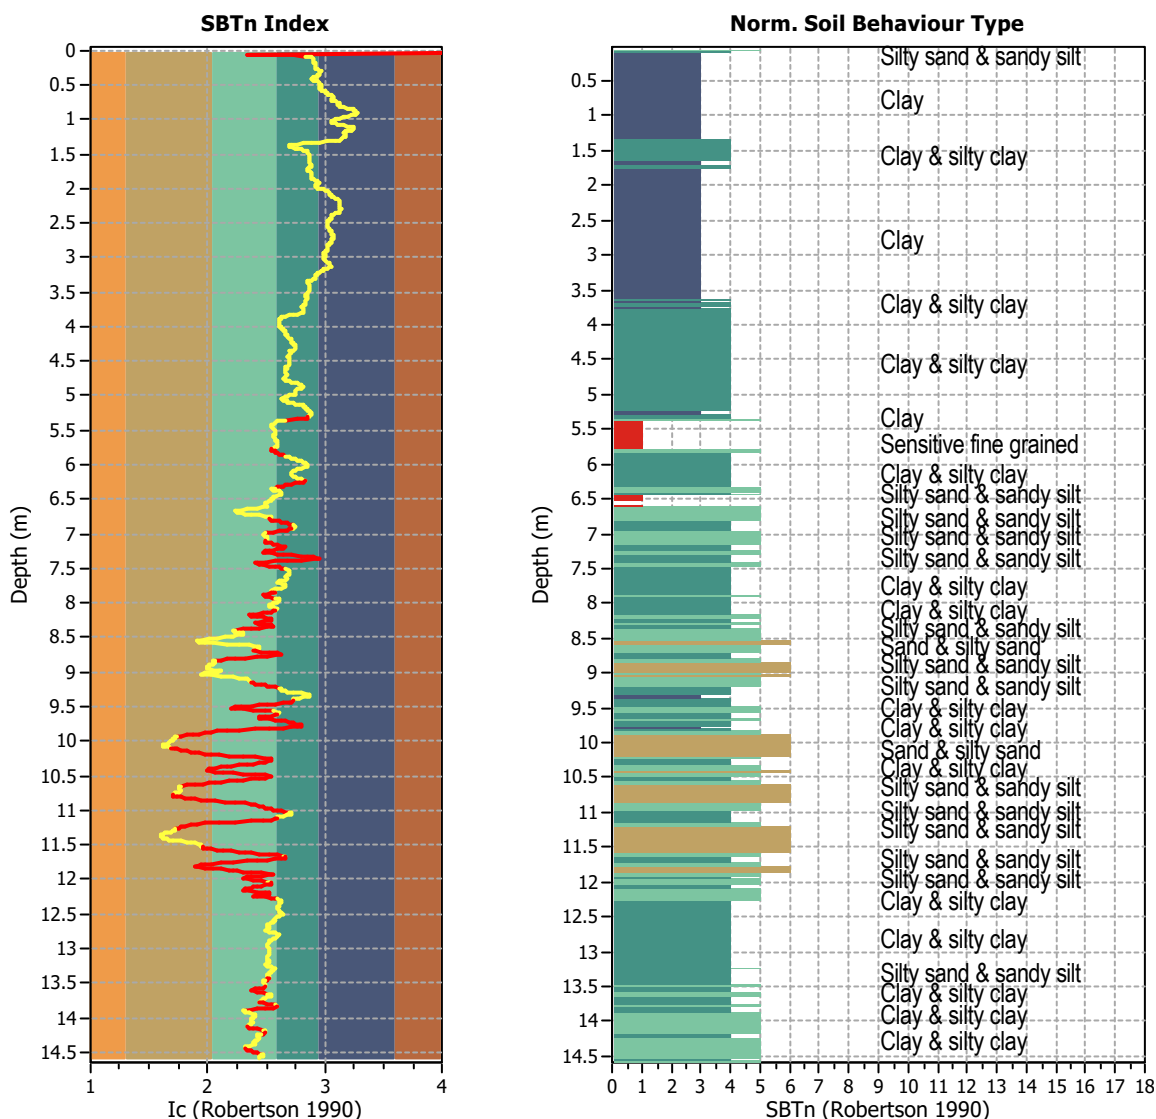


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1459
 Total points excluded: 439
 Exclusion percentage: 30.09%
 Number of layers detected: 49


Estimation of post-earthquake settlements

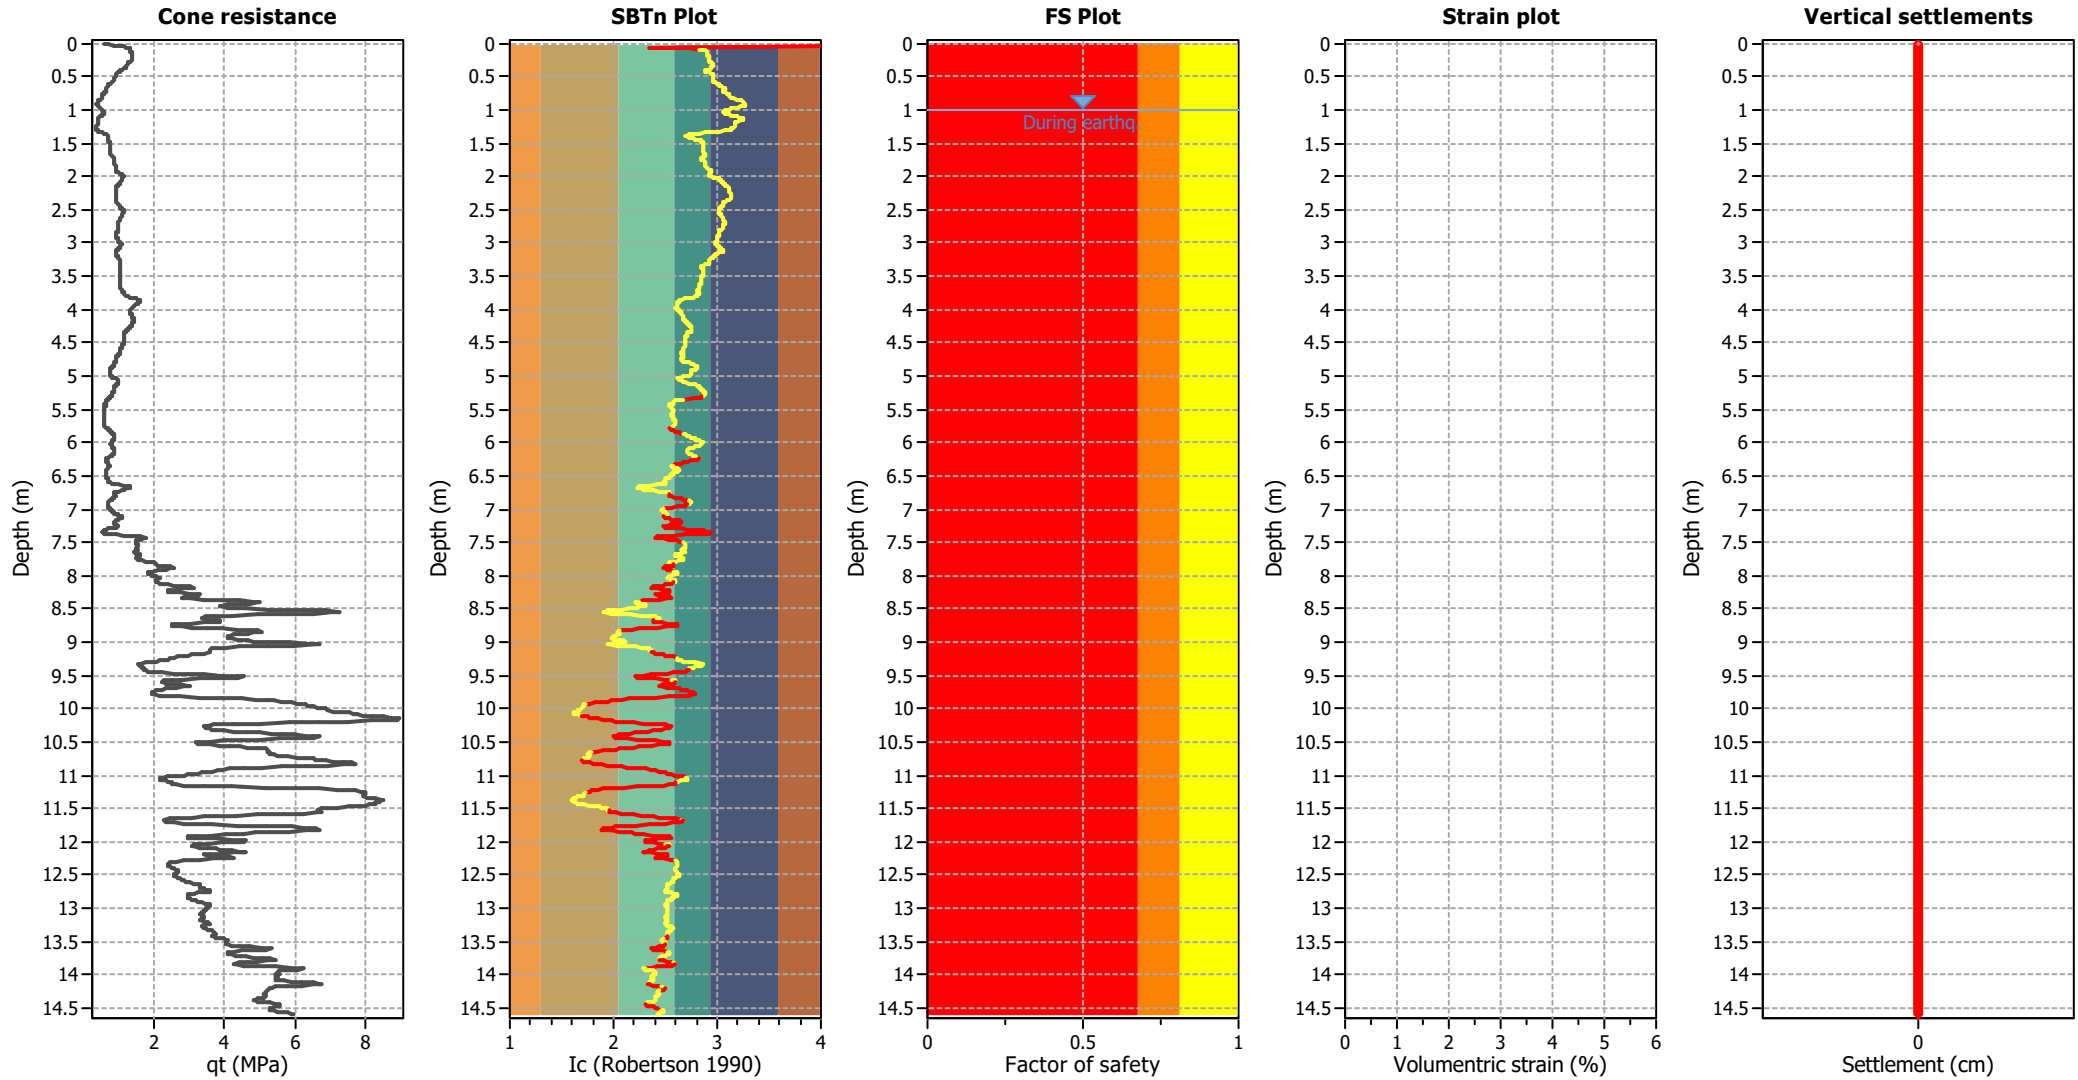

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

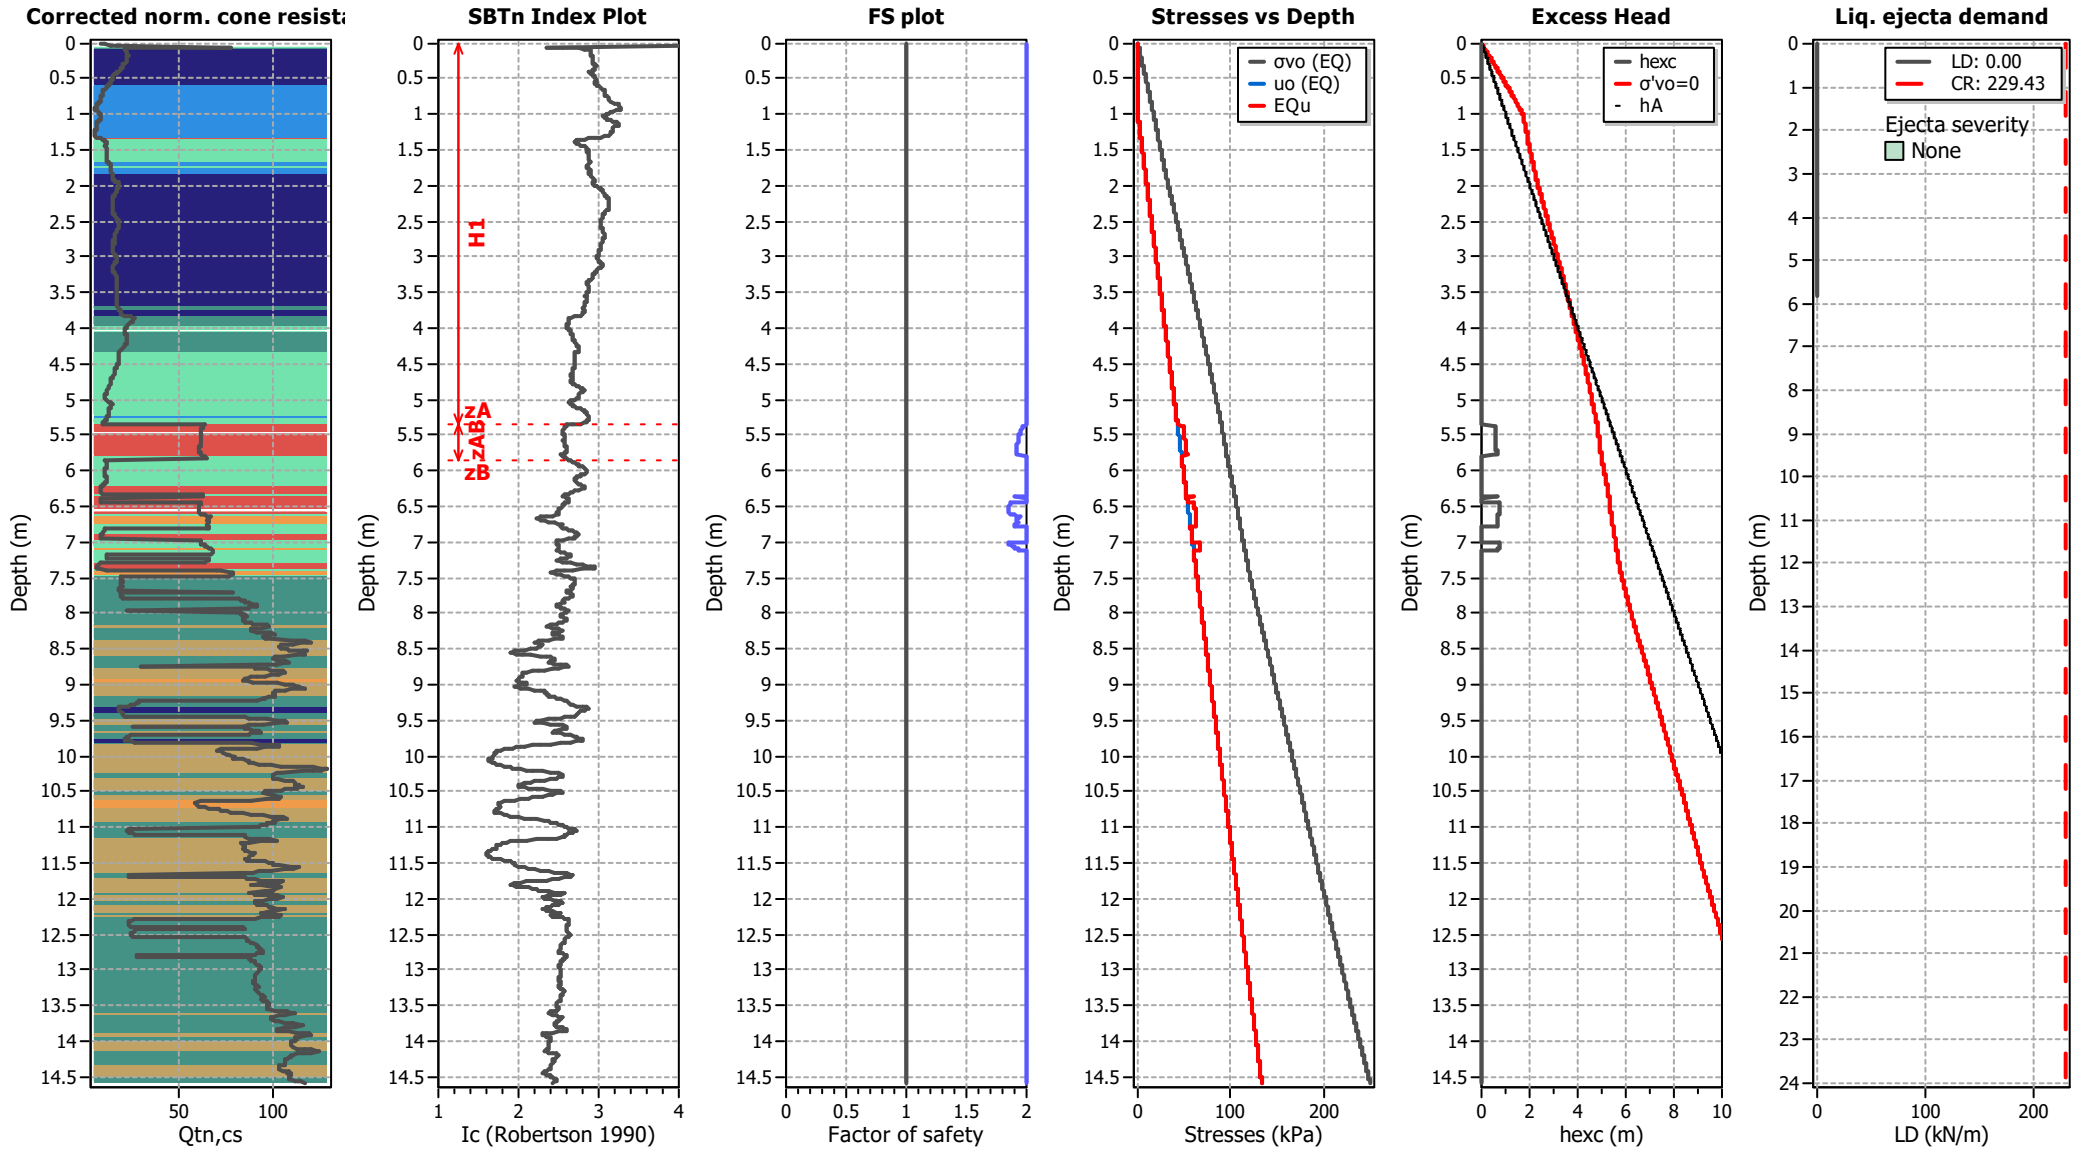

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT402

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

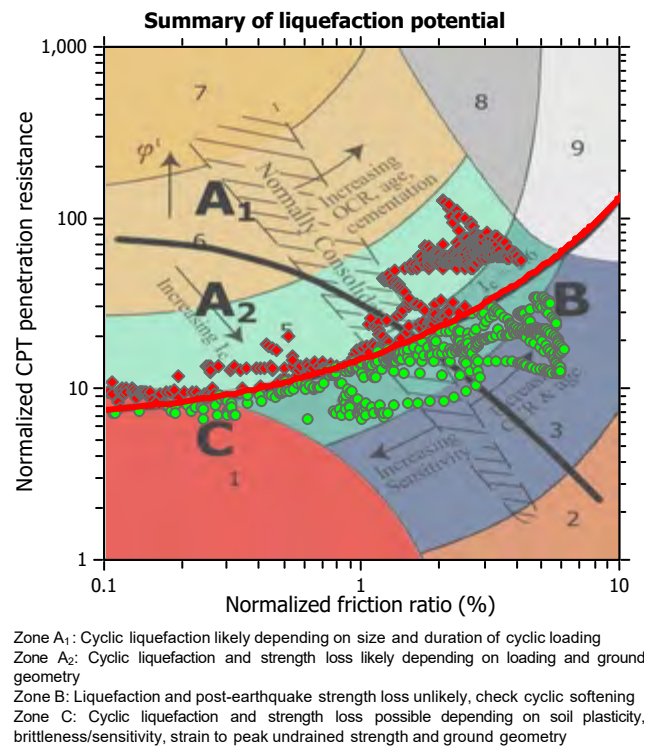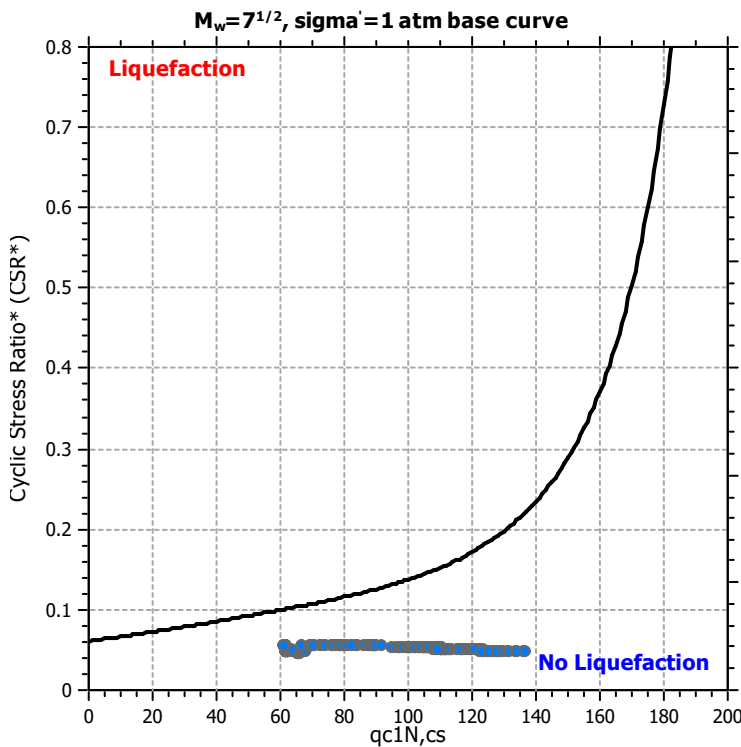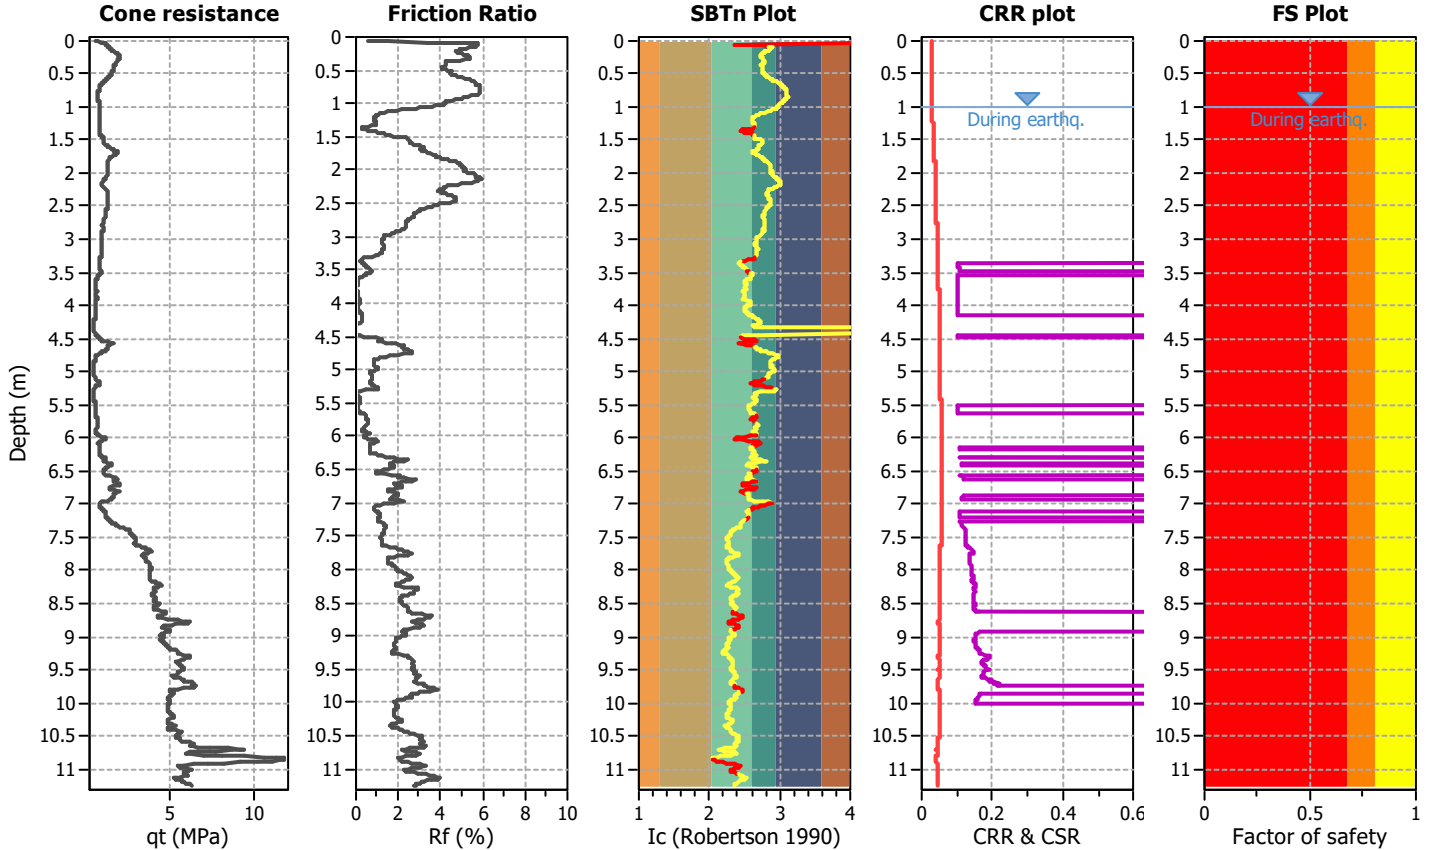

CPT basic interpretation plots

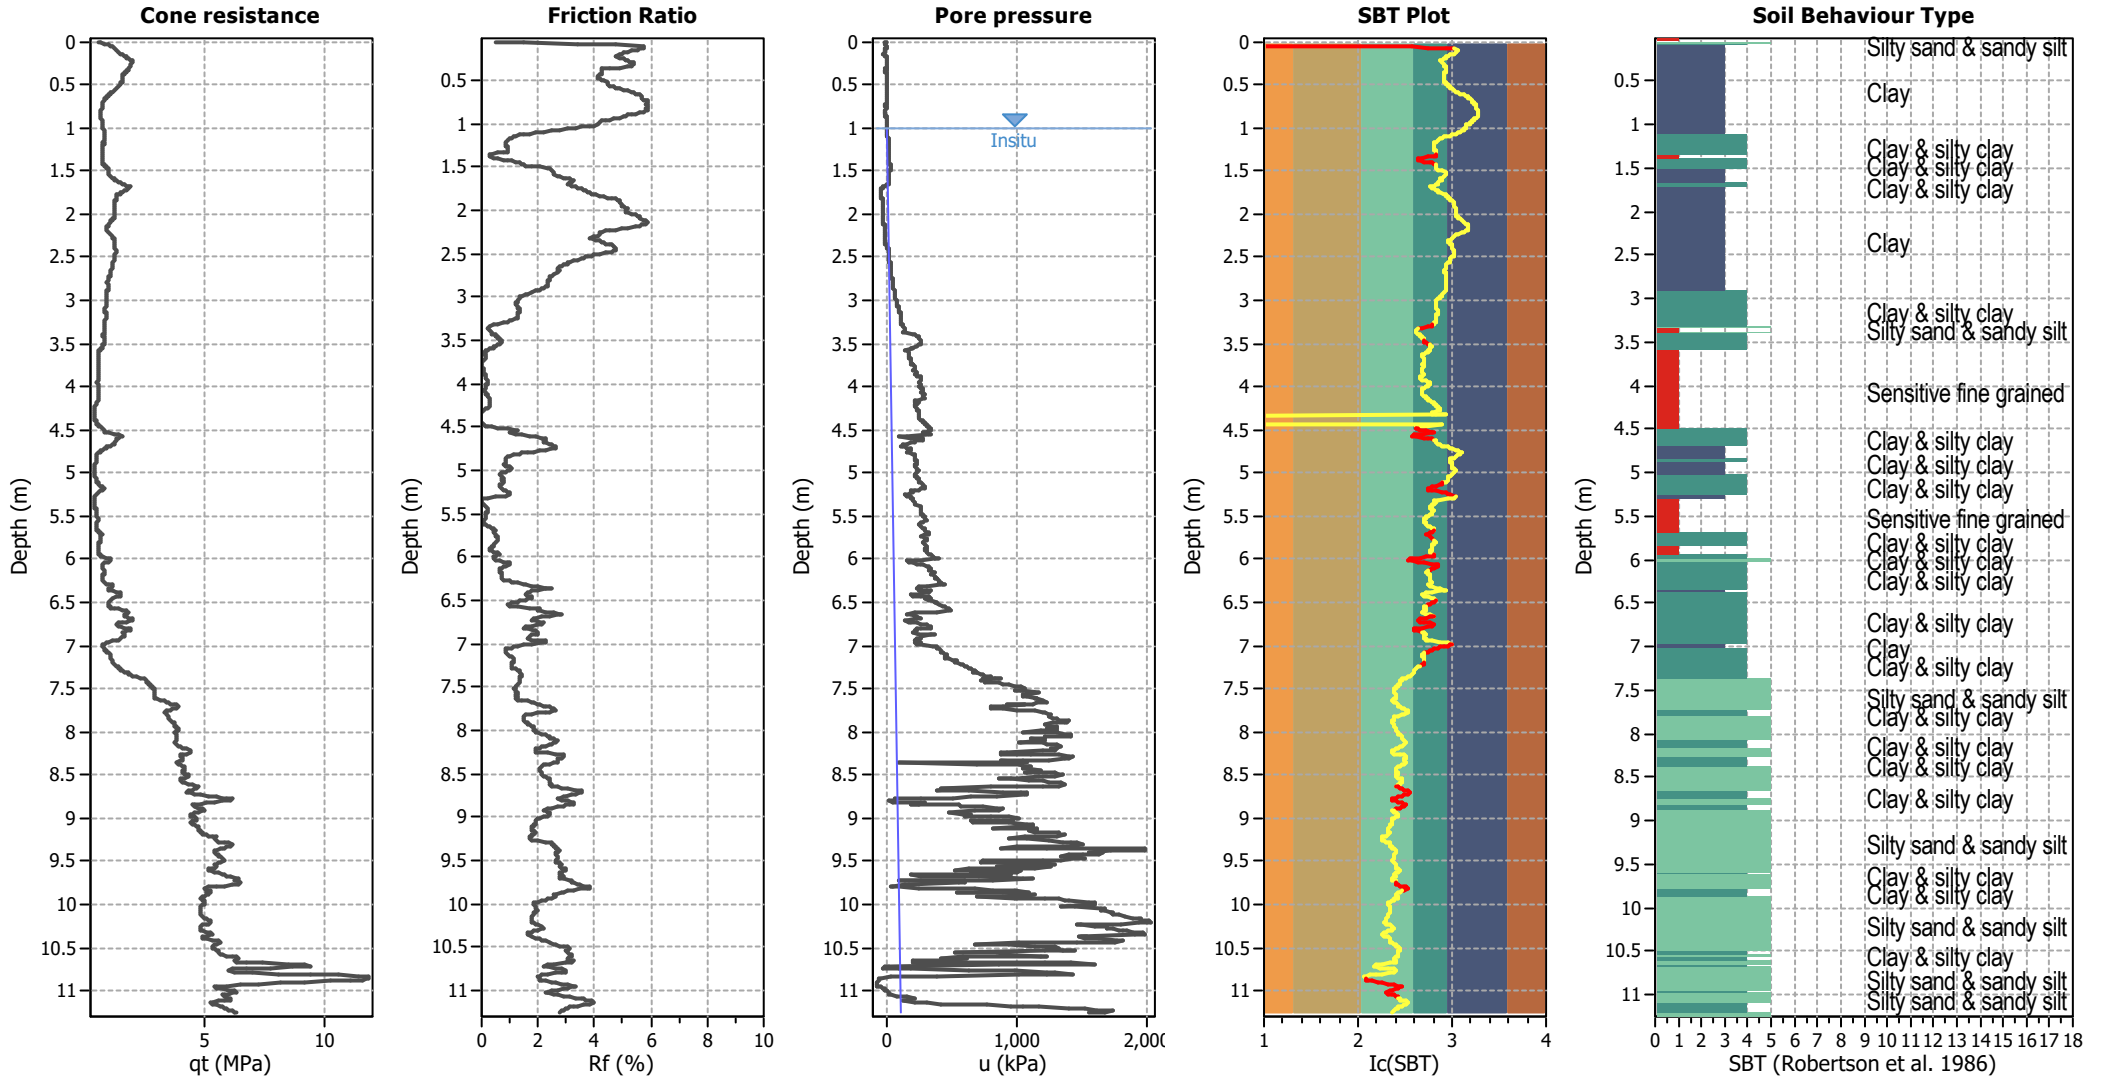


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

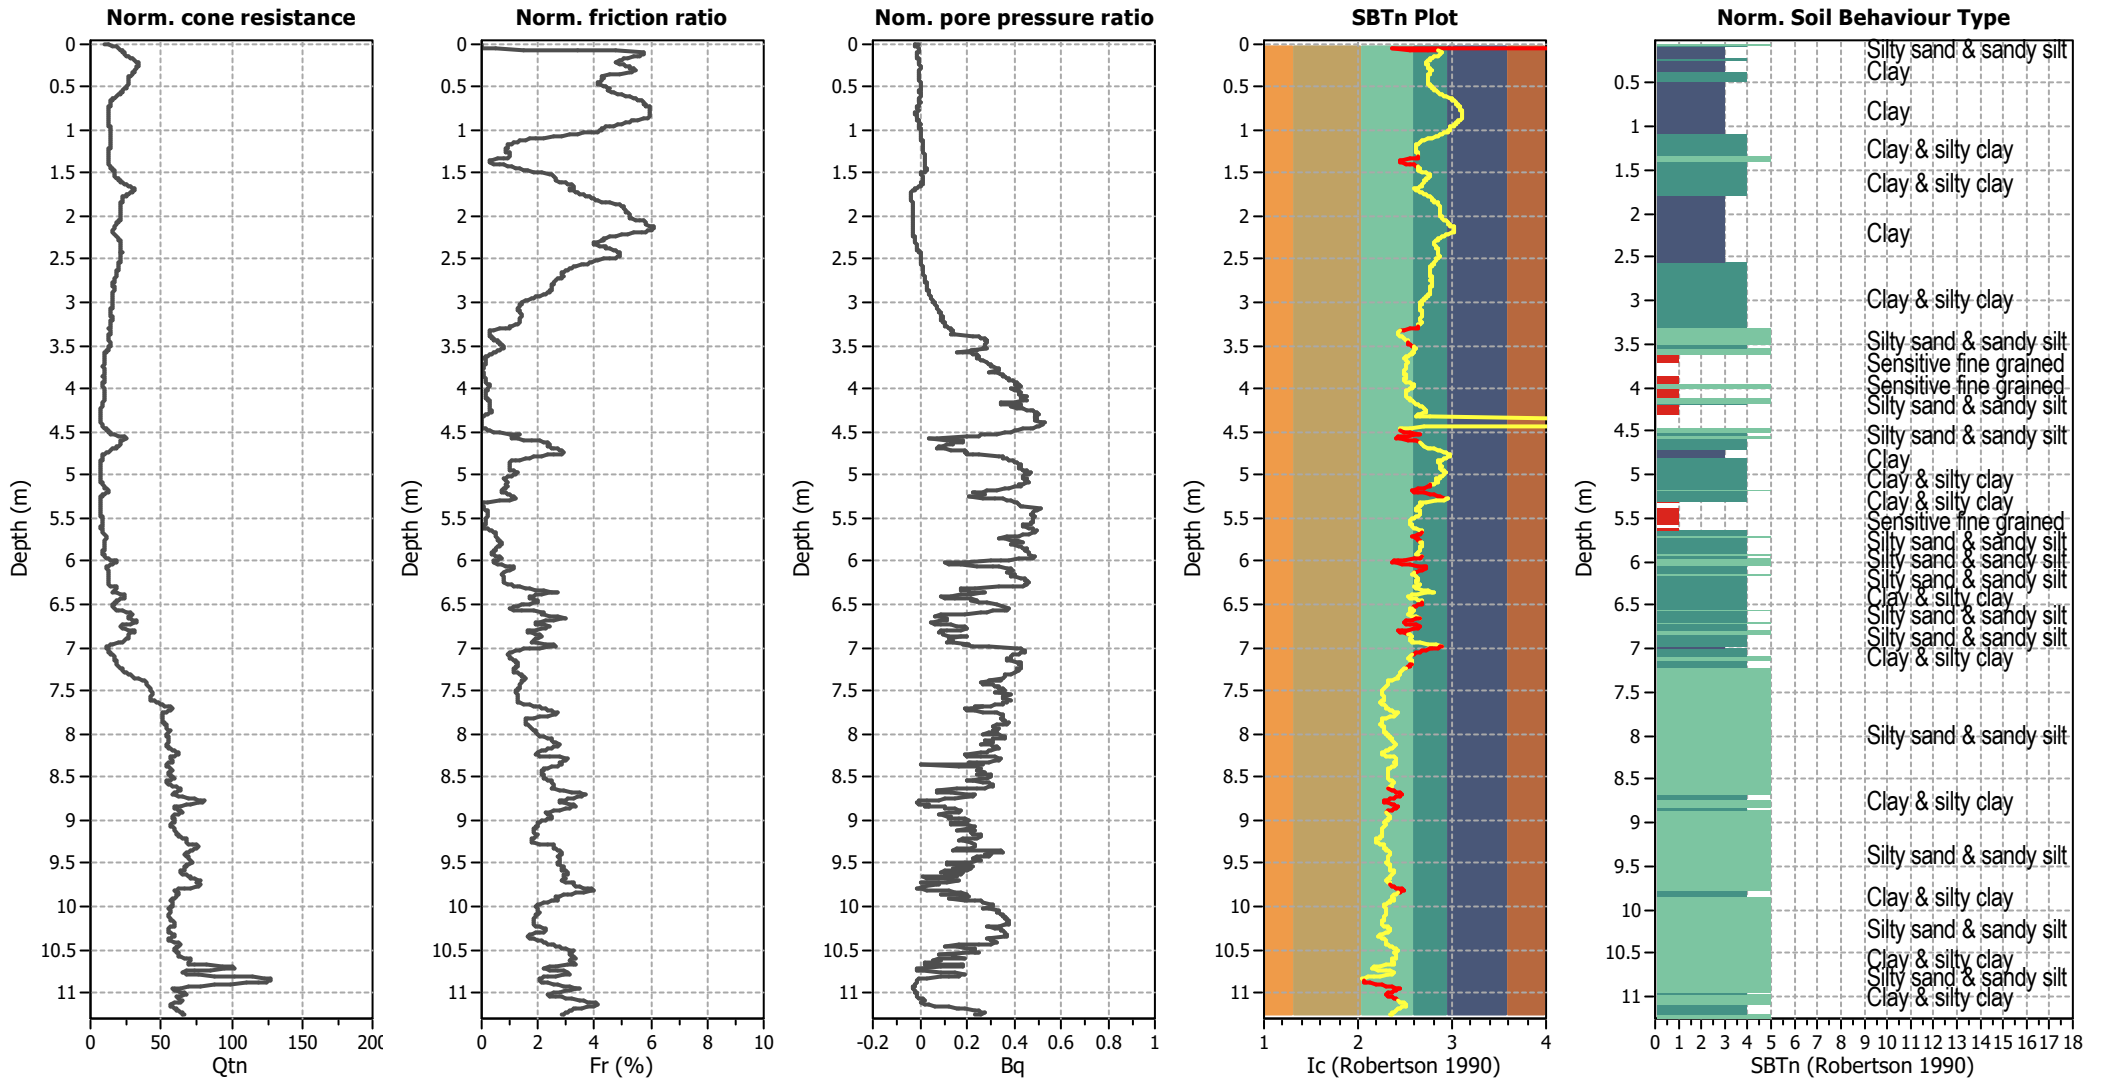


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

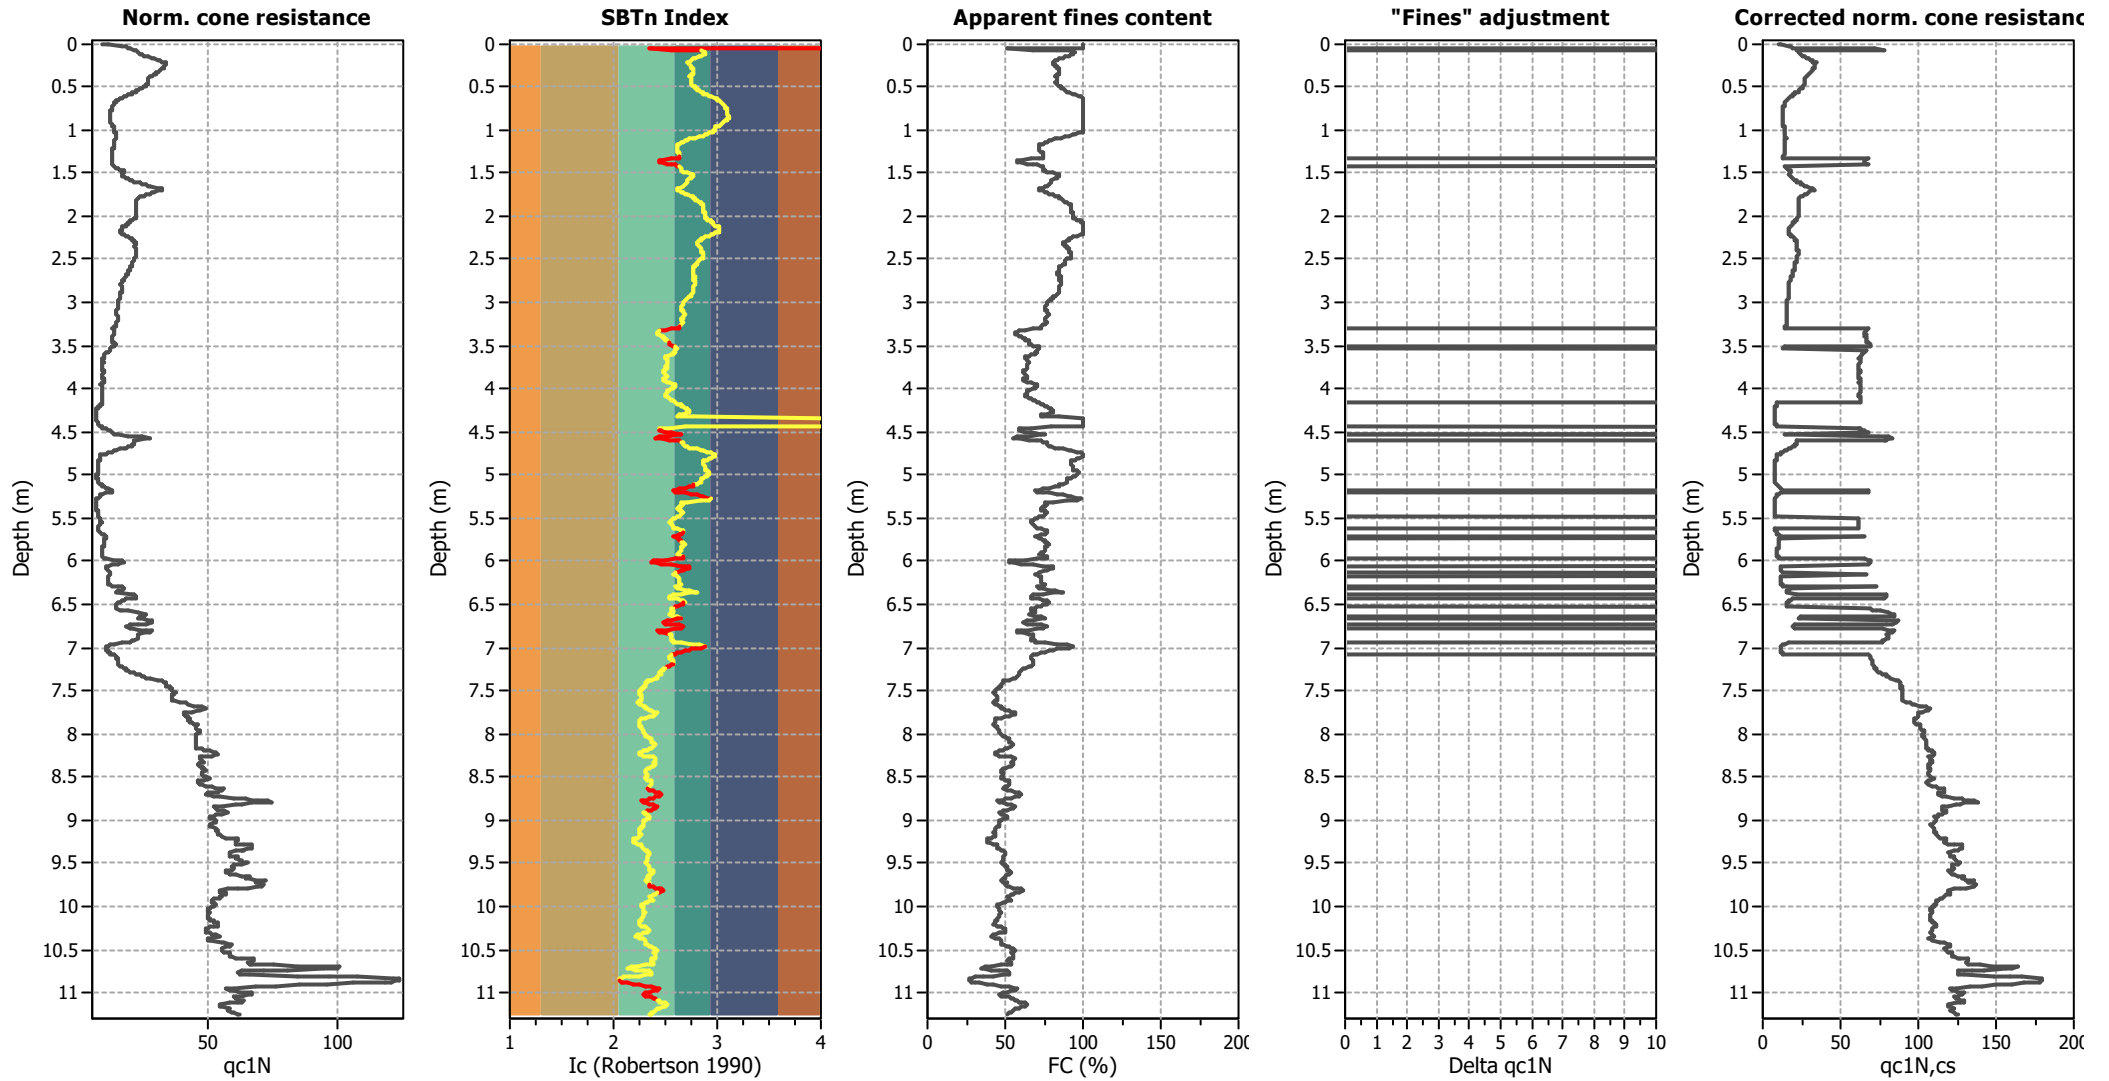

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

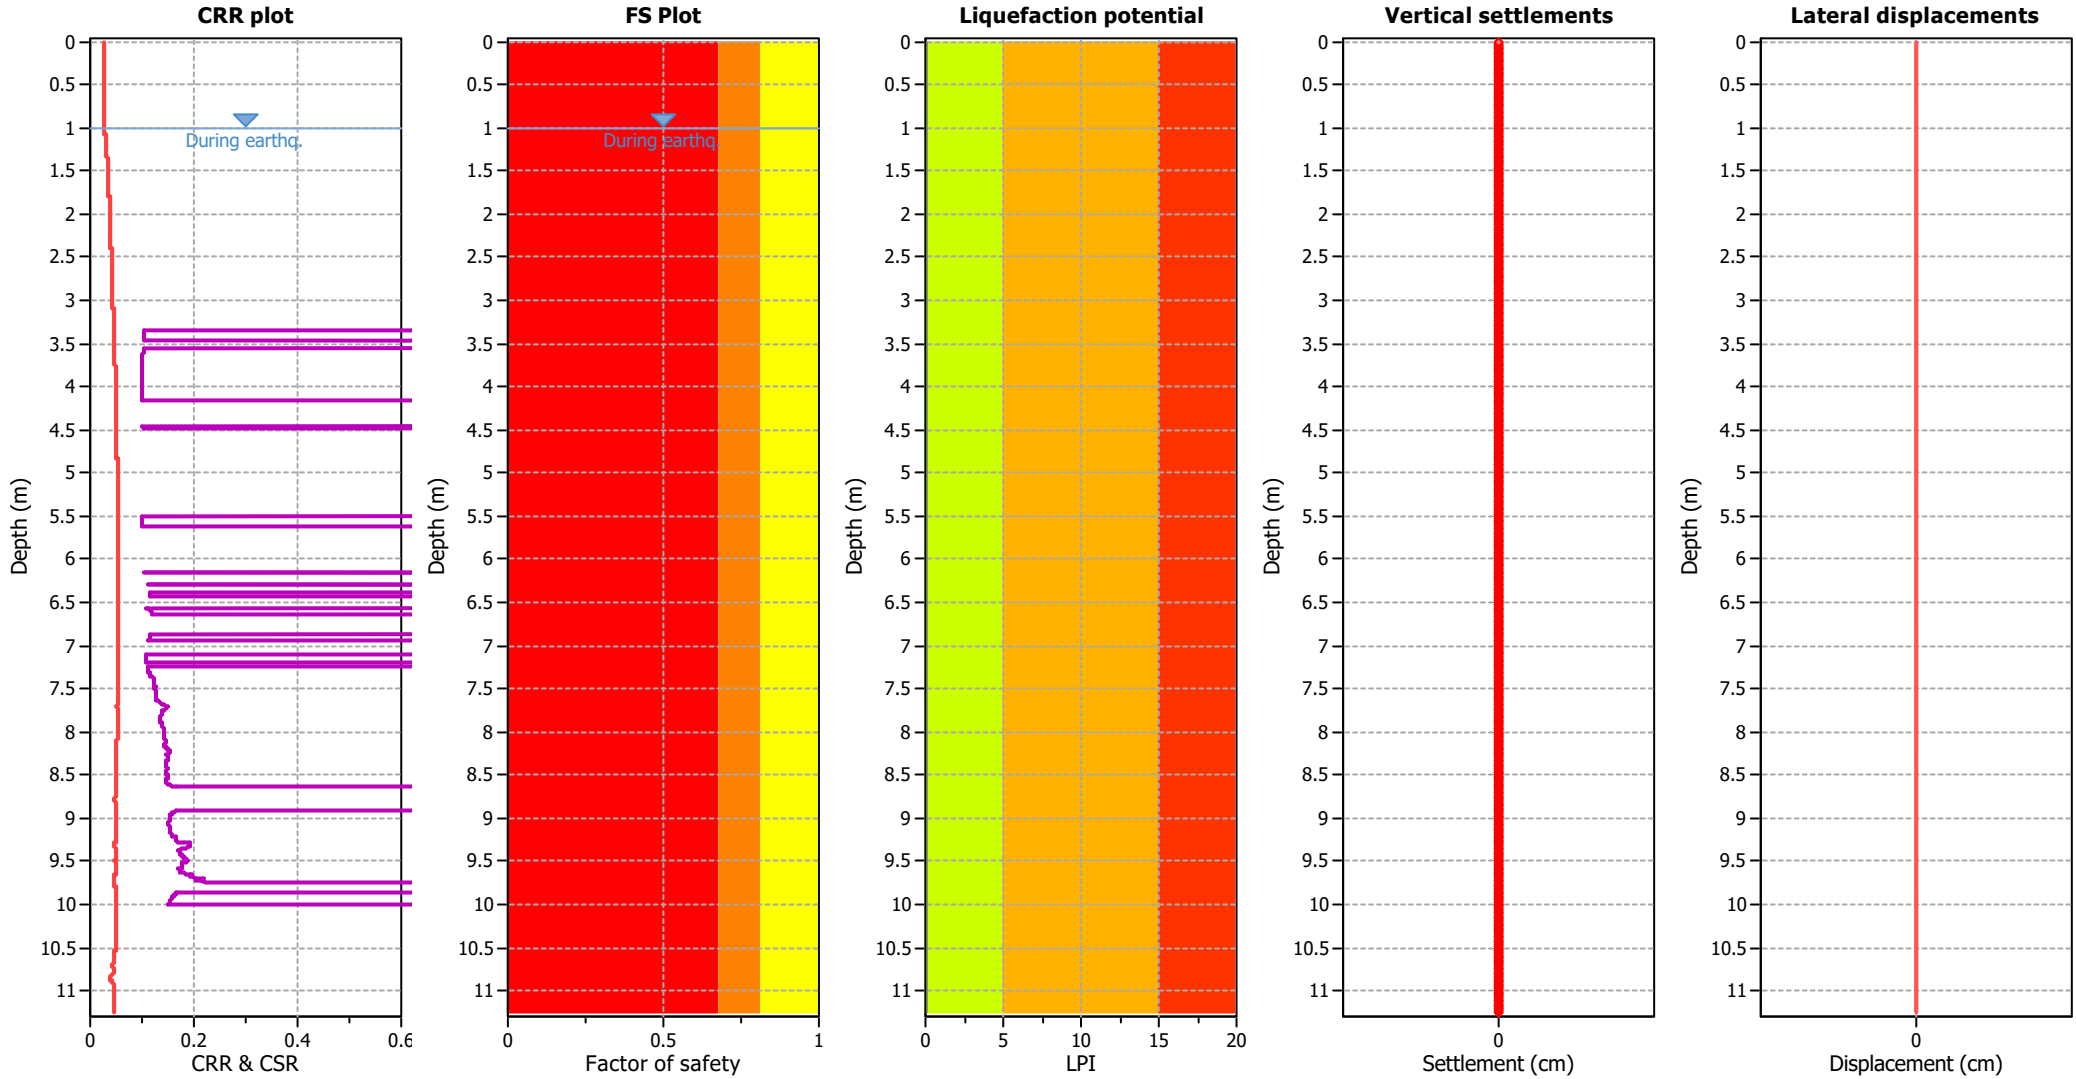

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

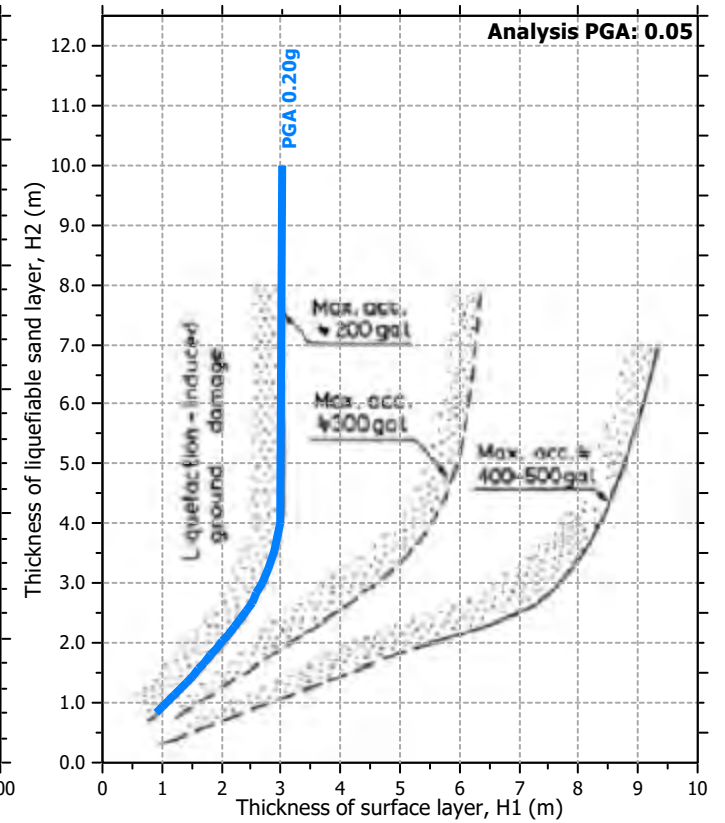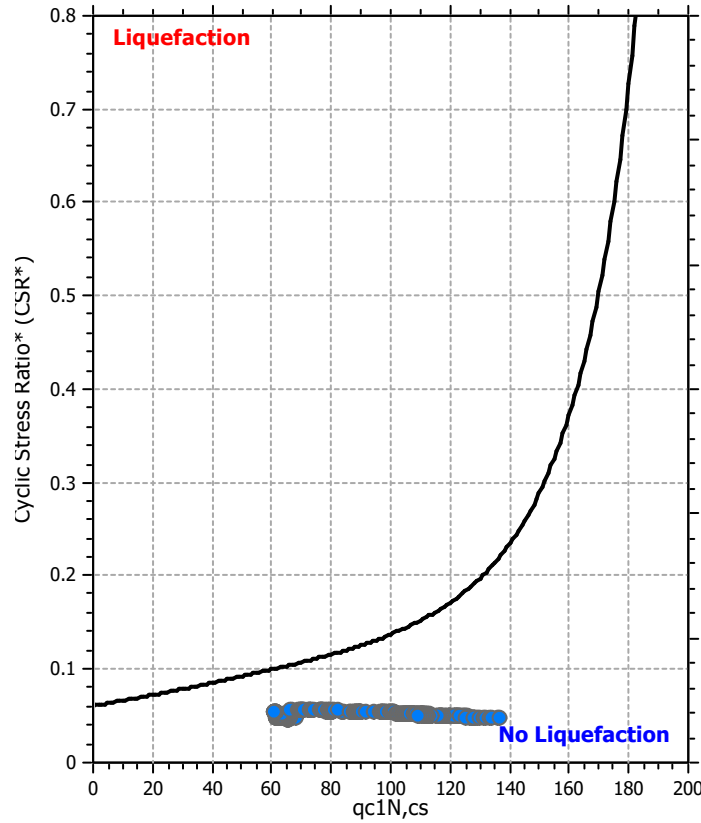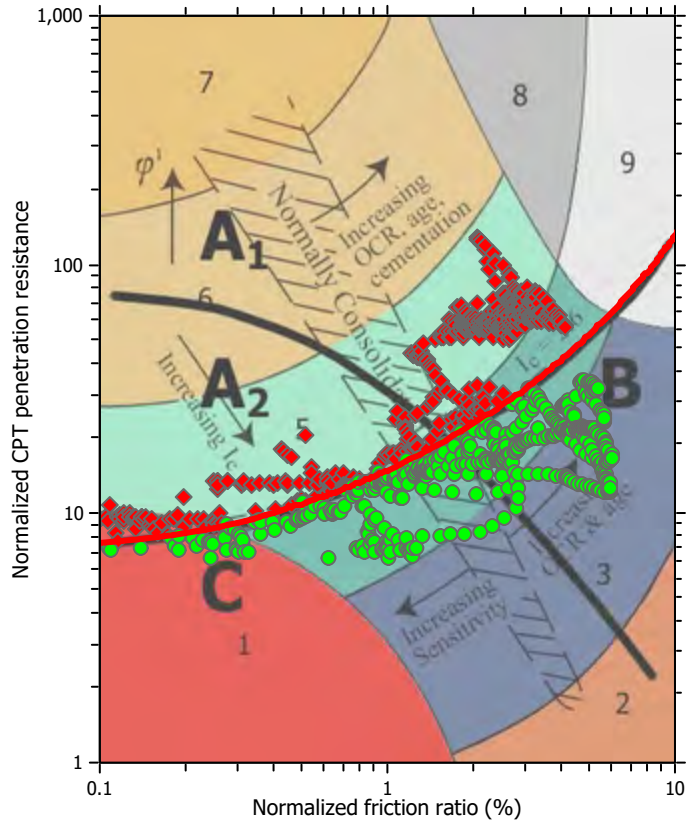

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

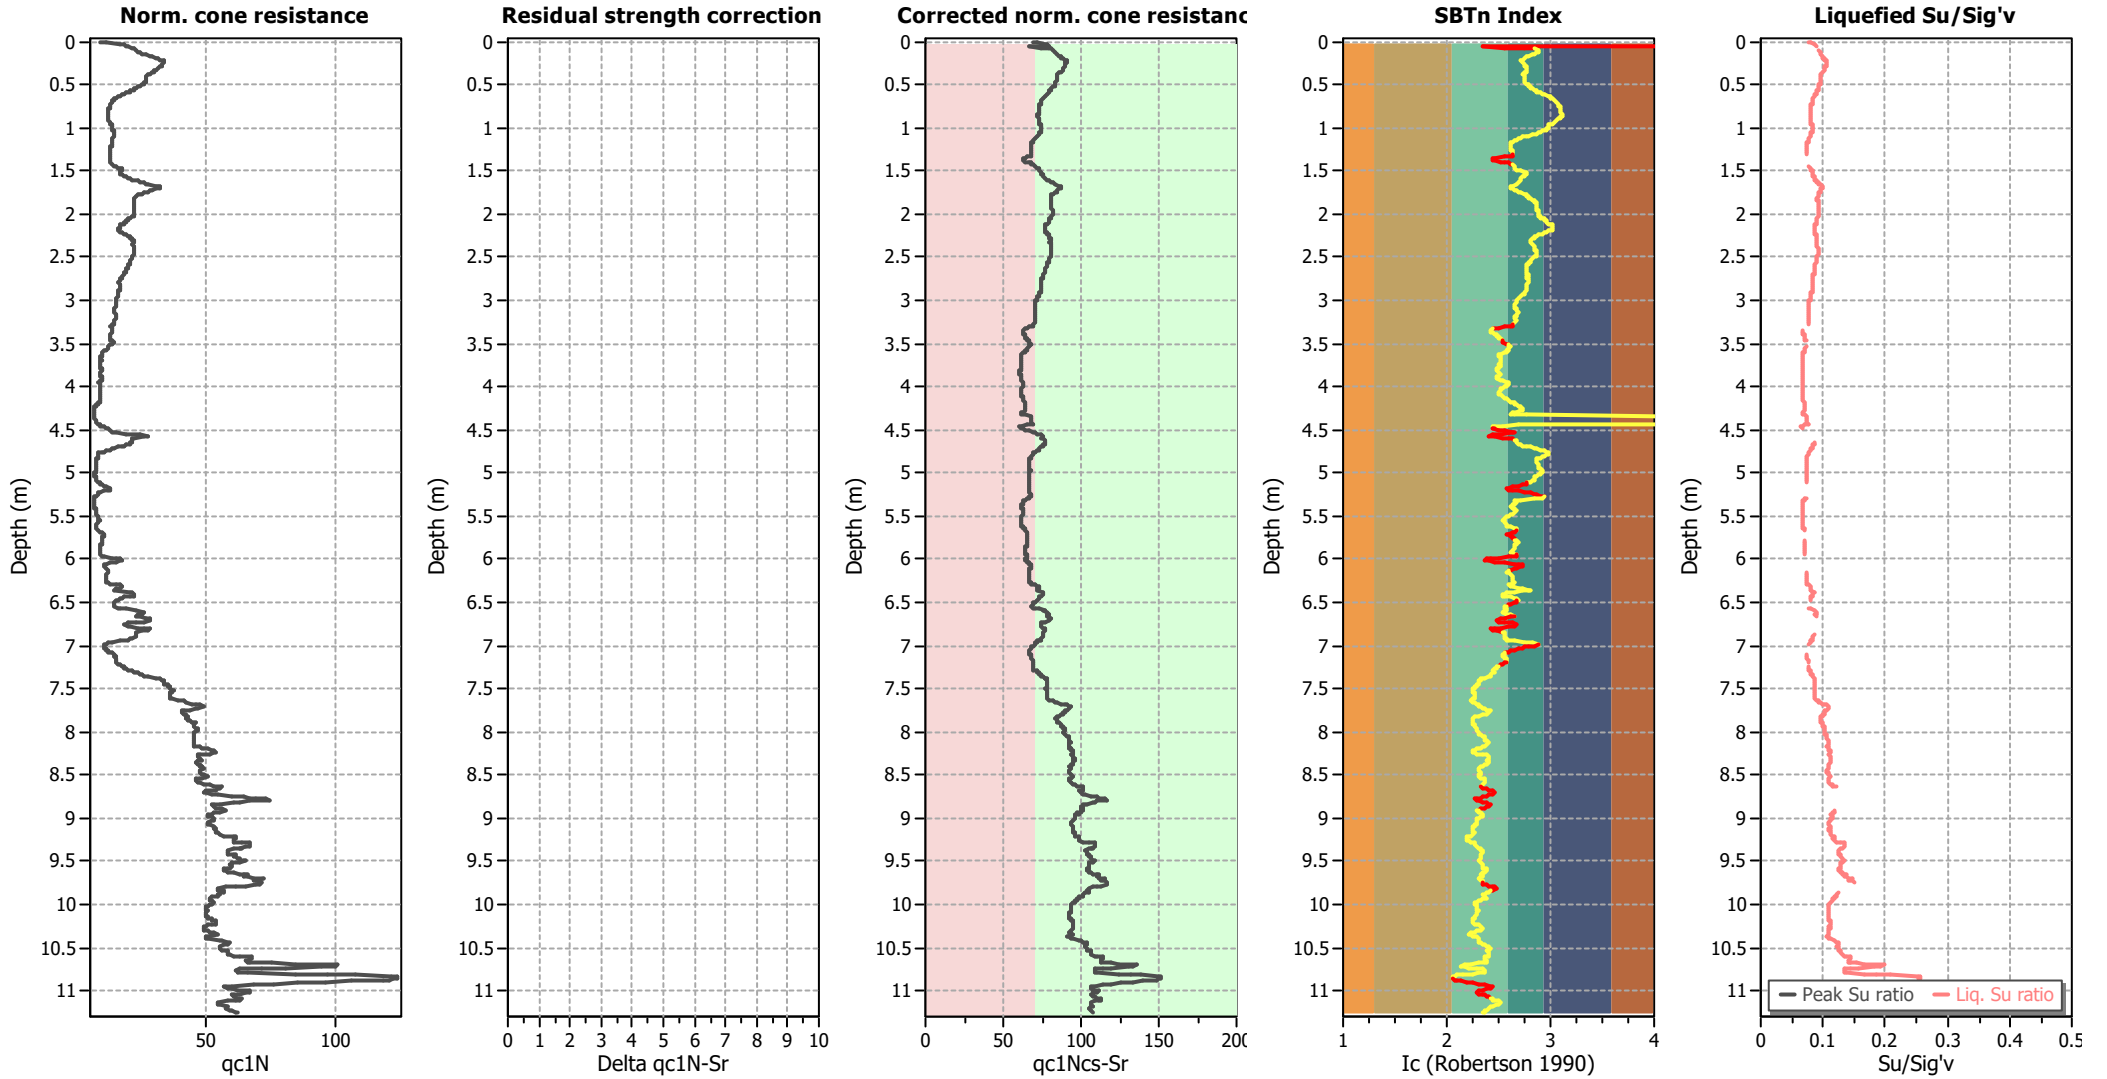

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

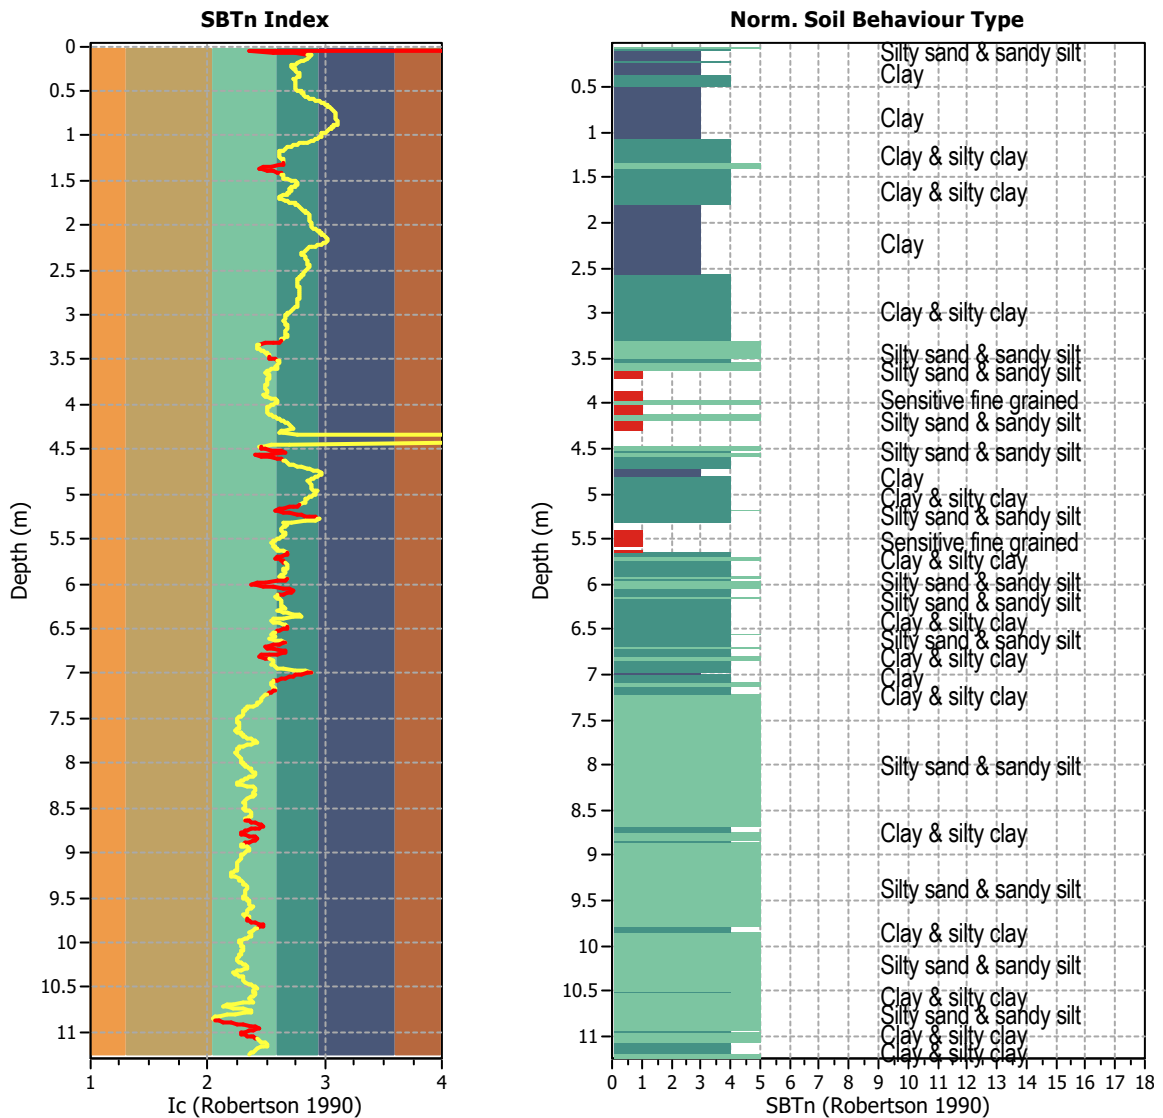


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1125
 Total points excluded: 201
 Exclusion percentage: 17.87%
 Number of layers detected: 31


Estimation of post-earthquake settlements

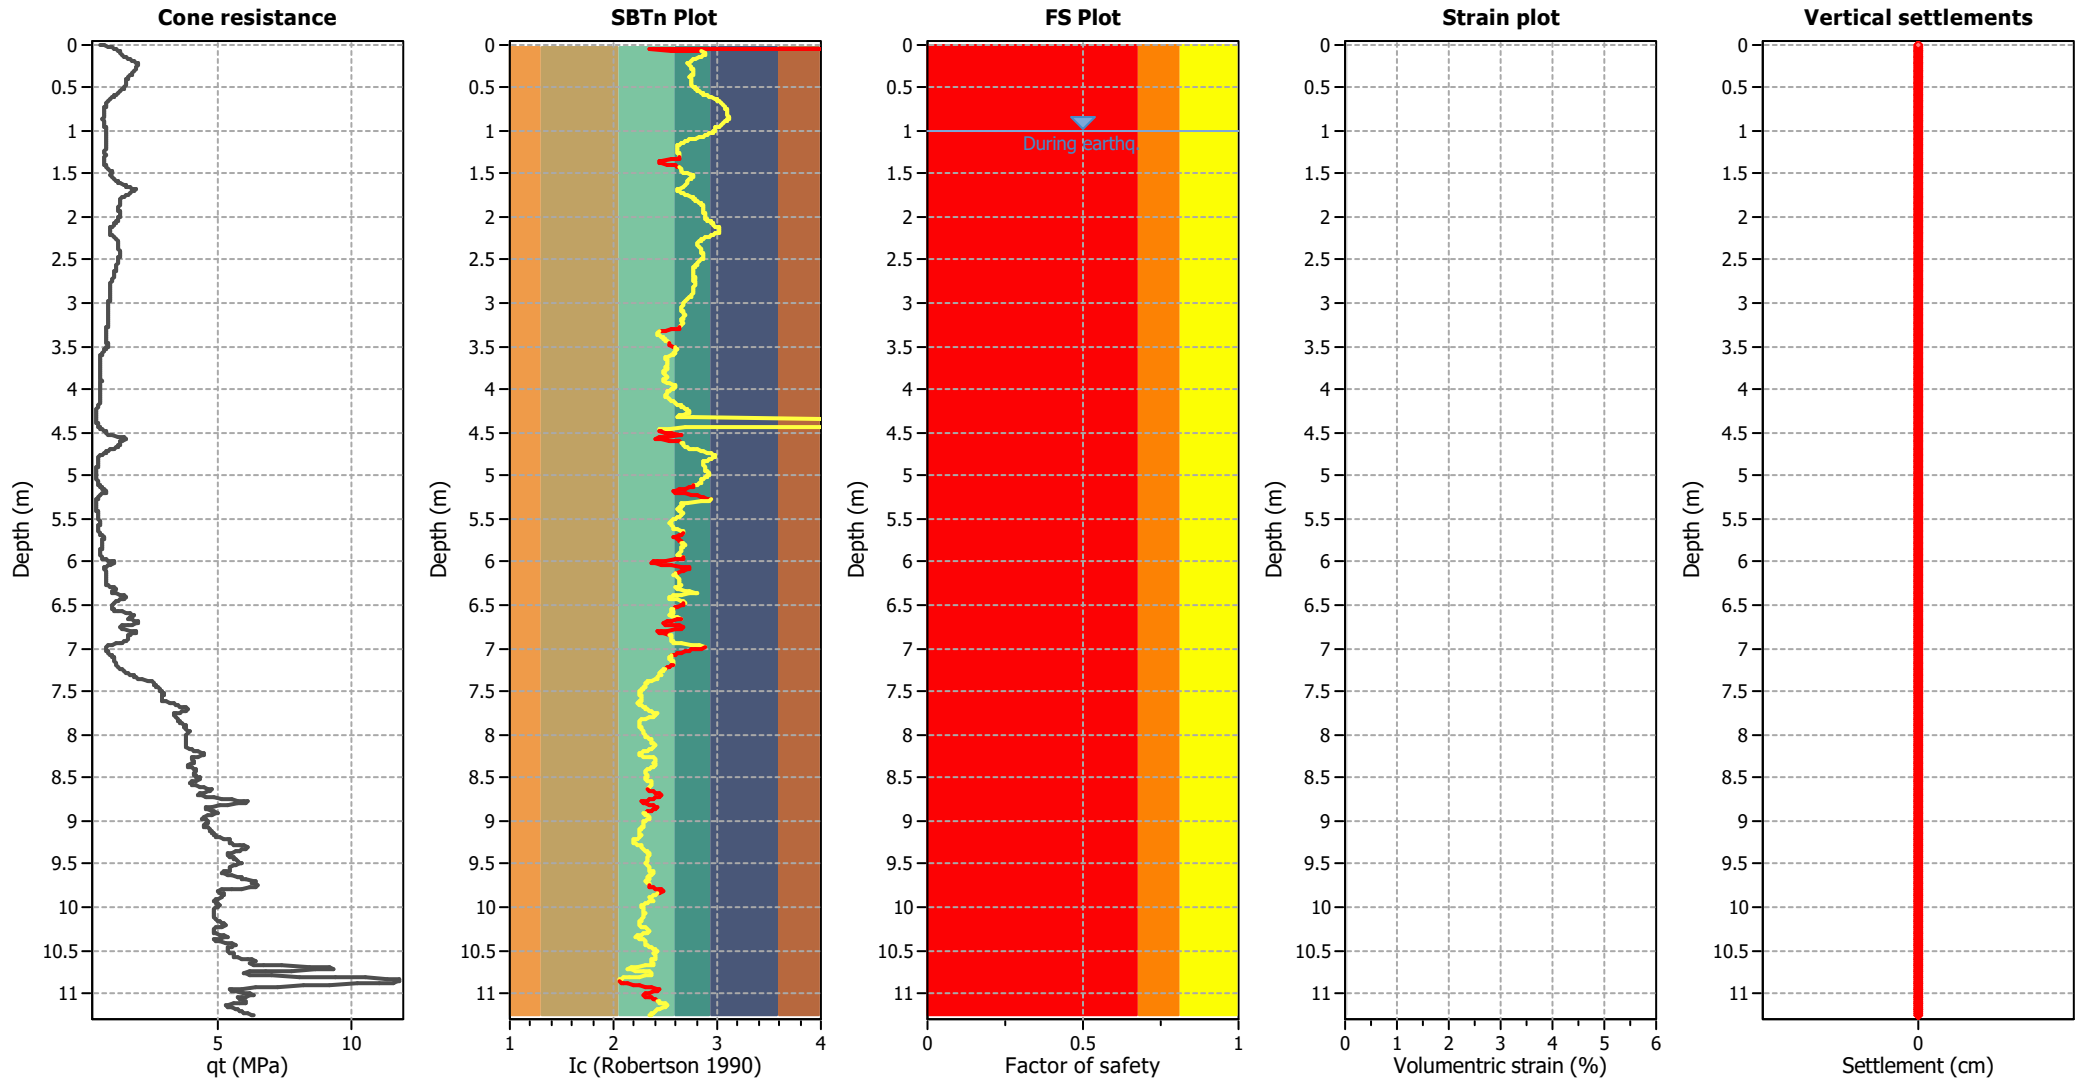

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

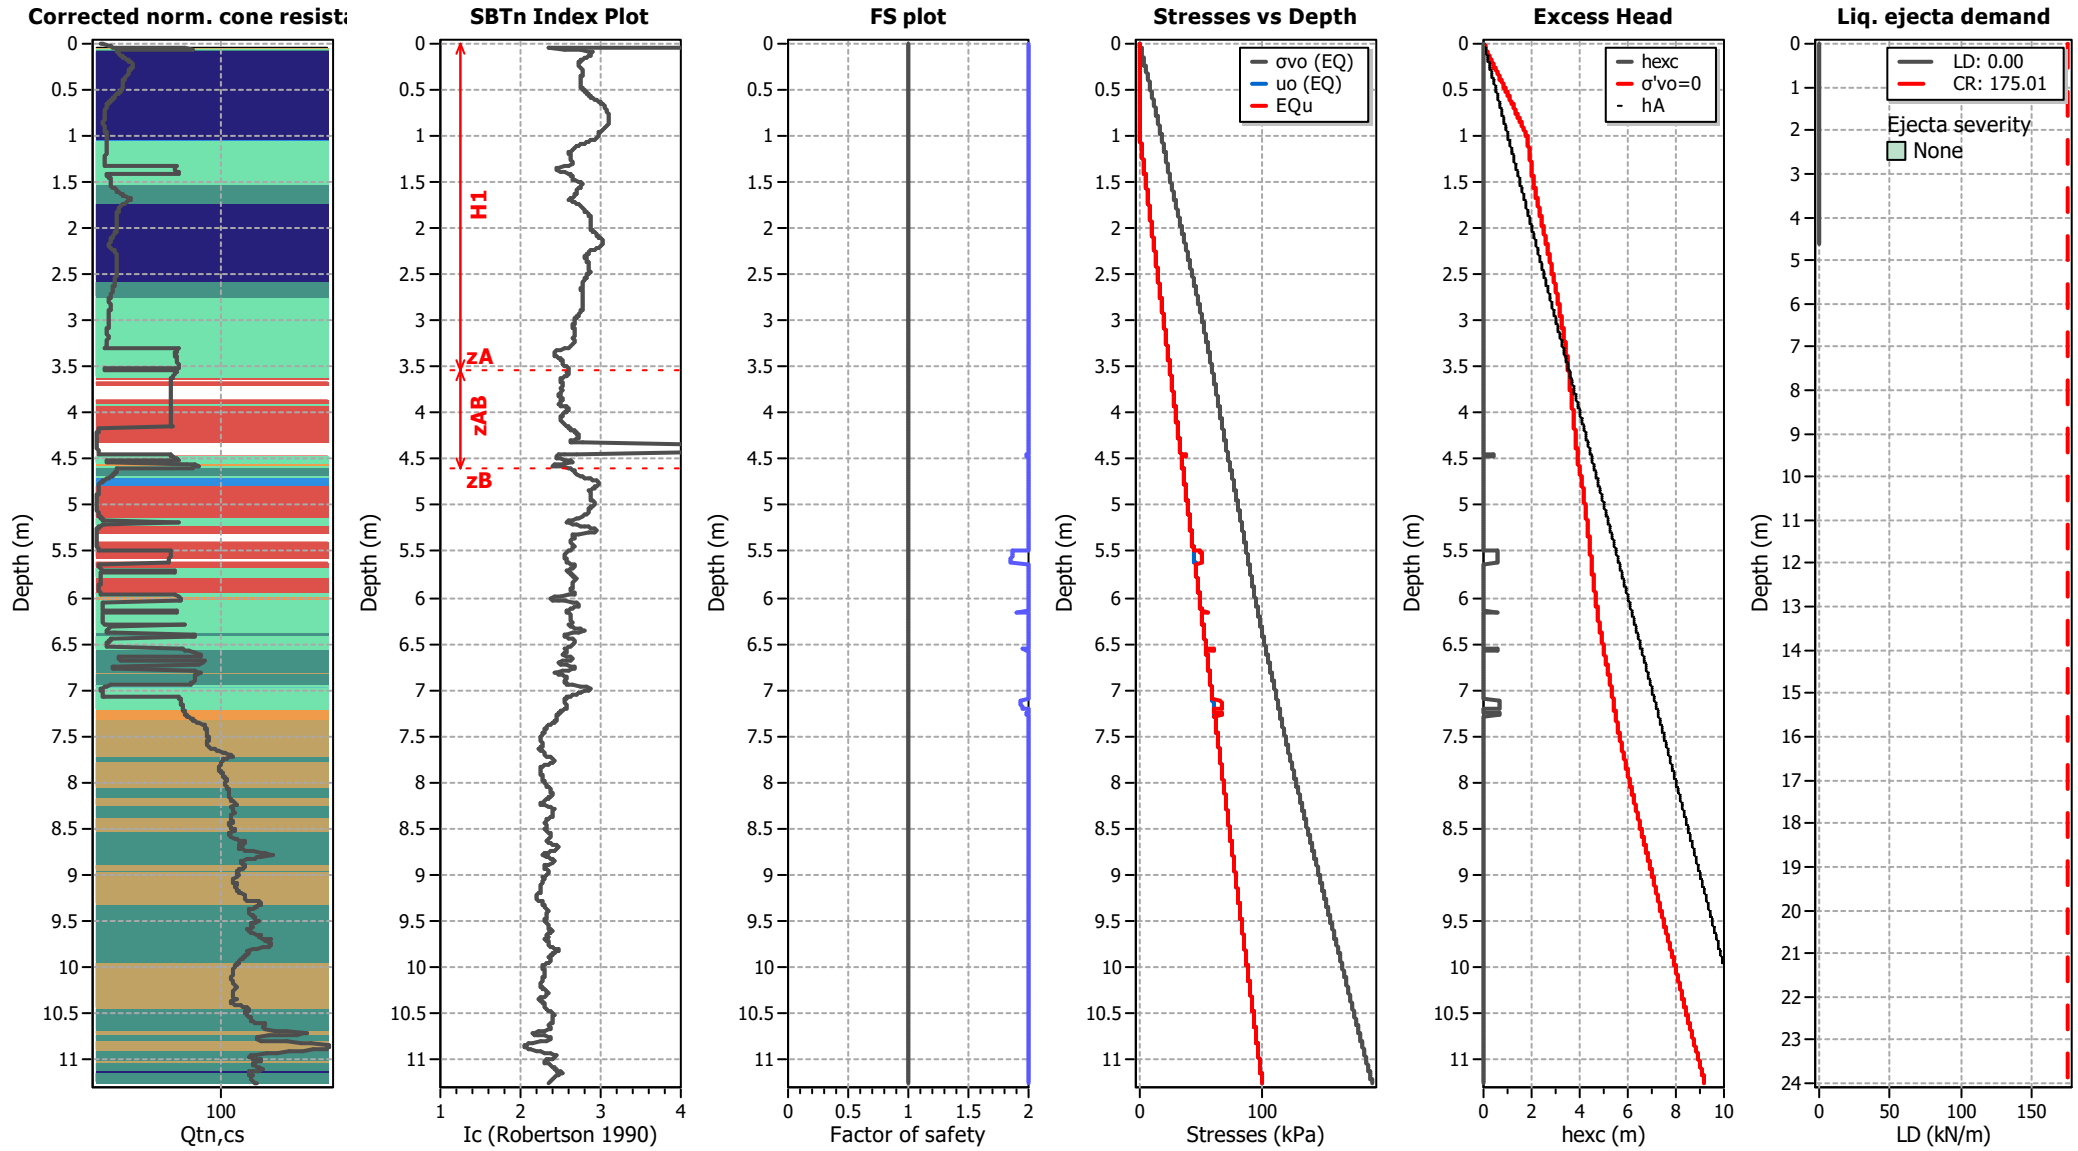

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT403

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

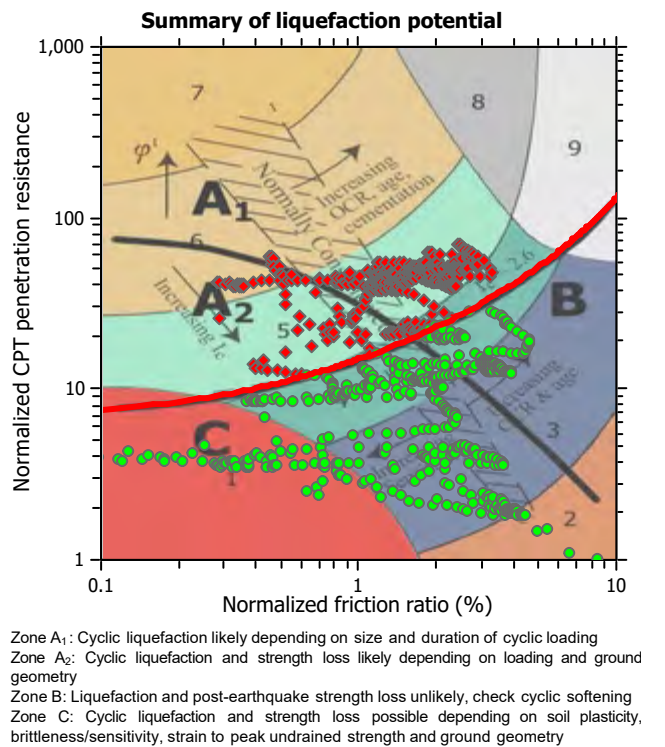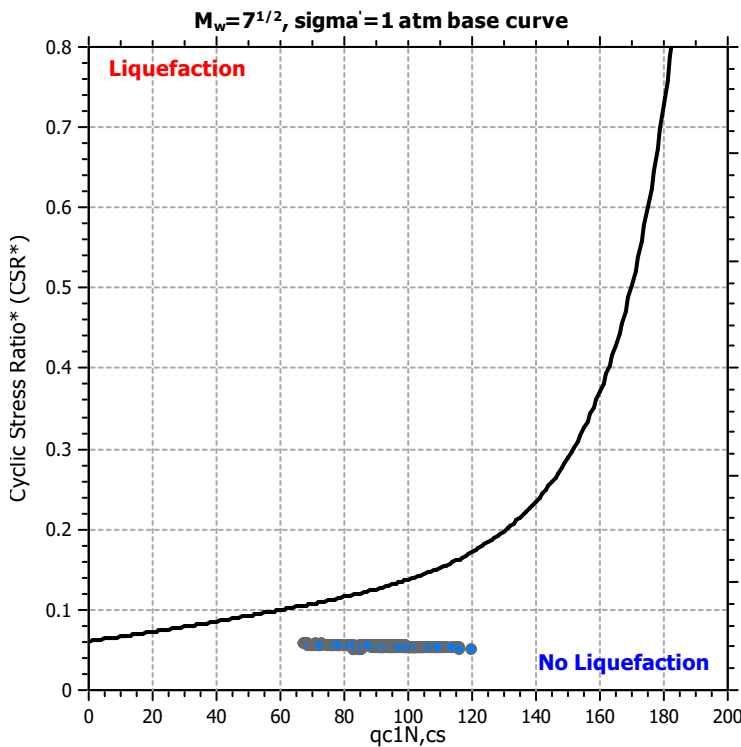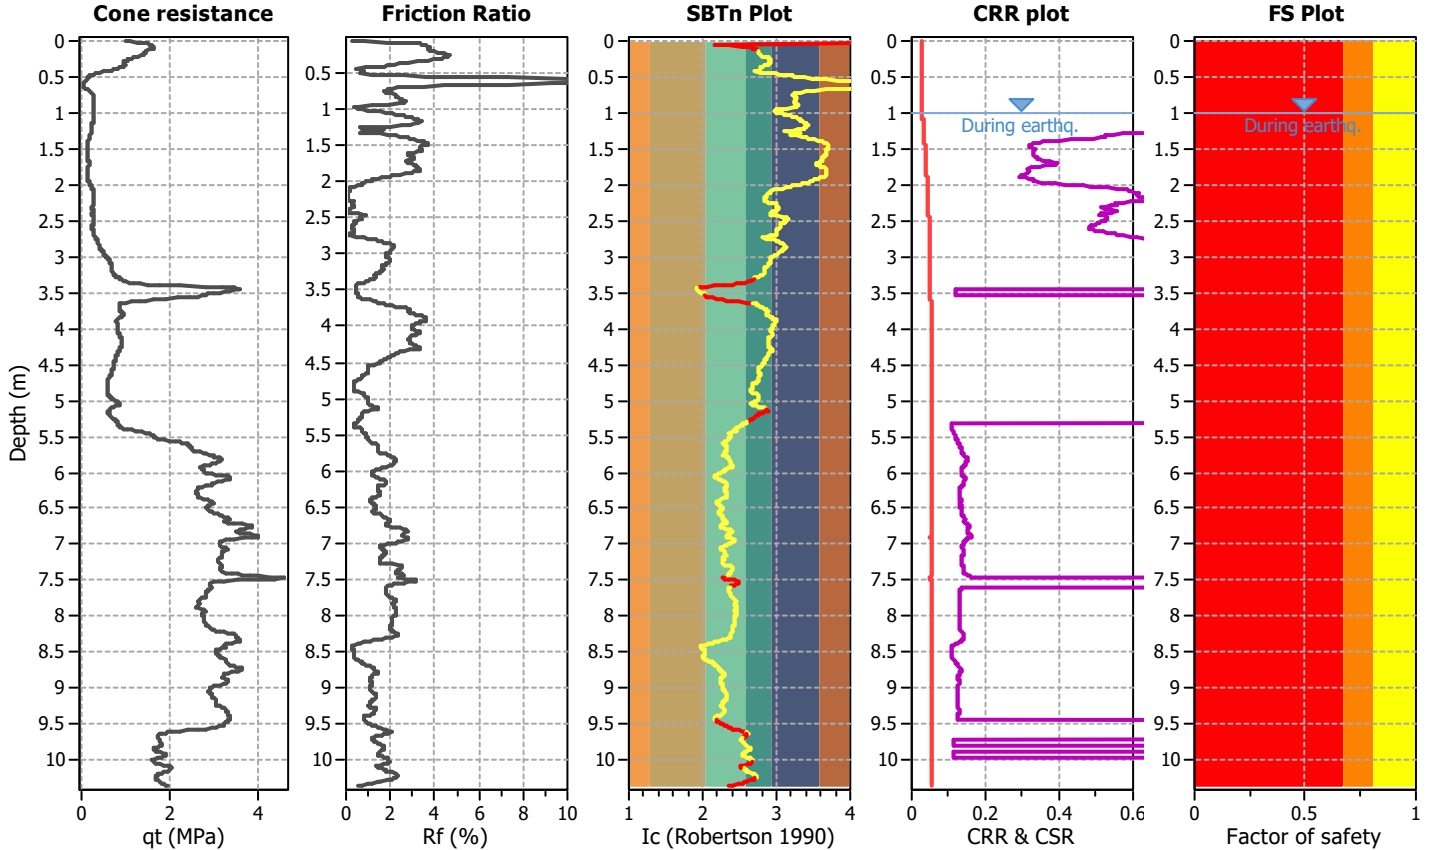

CPT basic interpretation plots

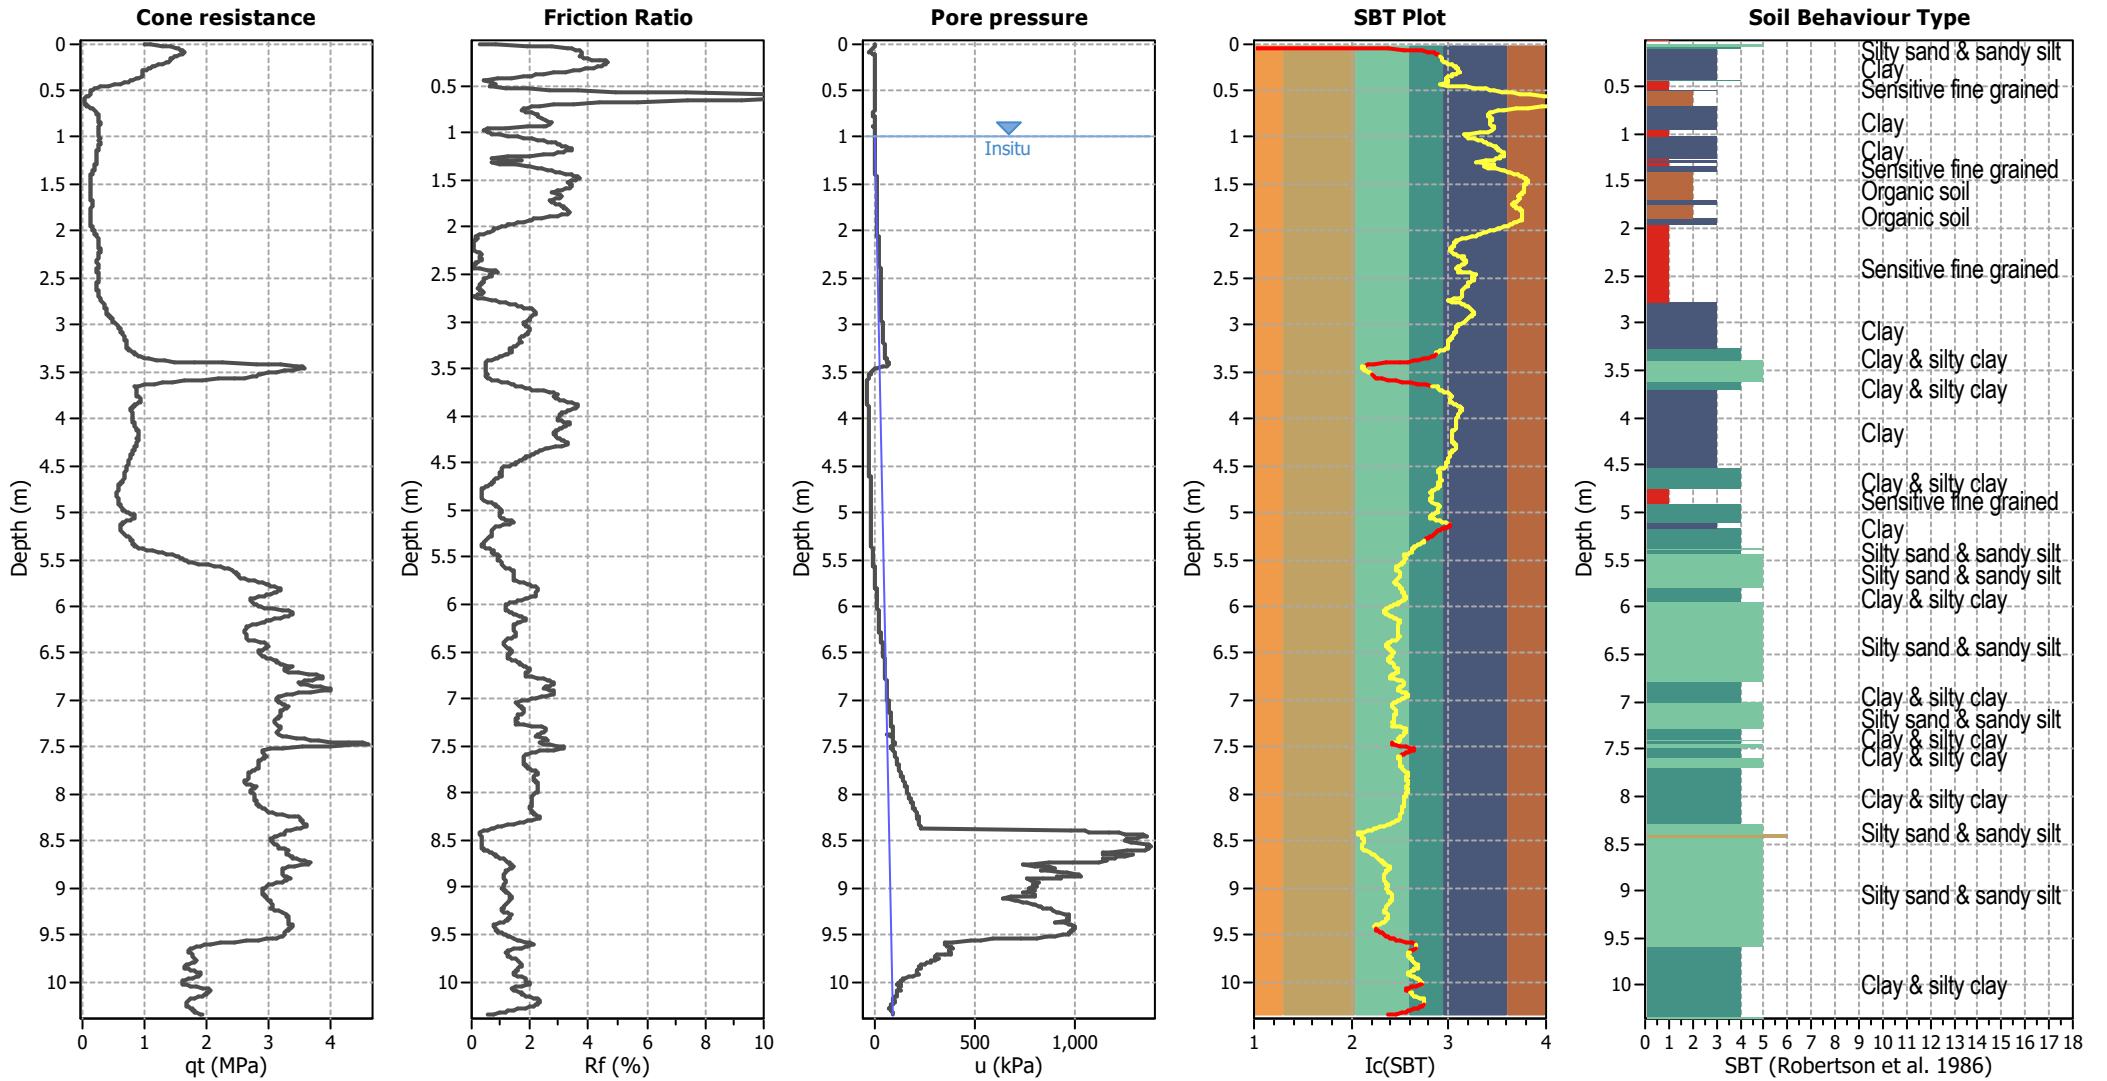


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

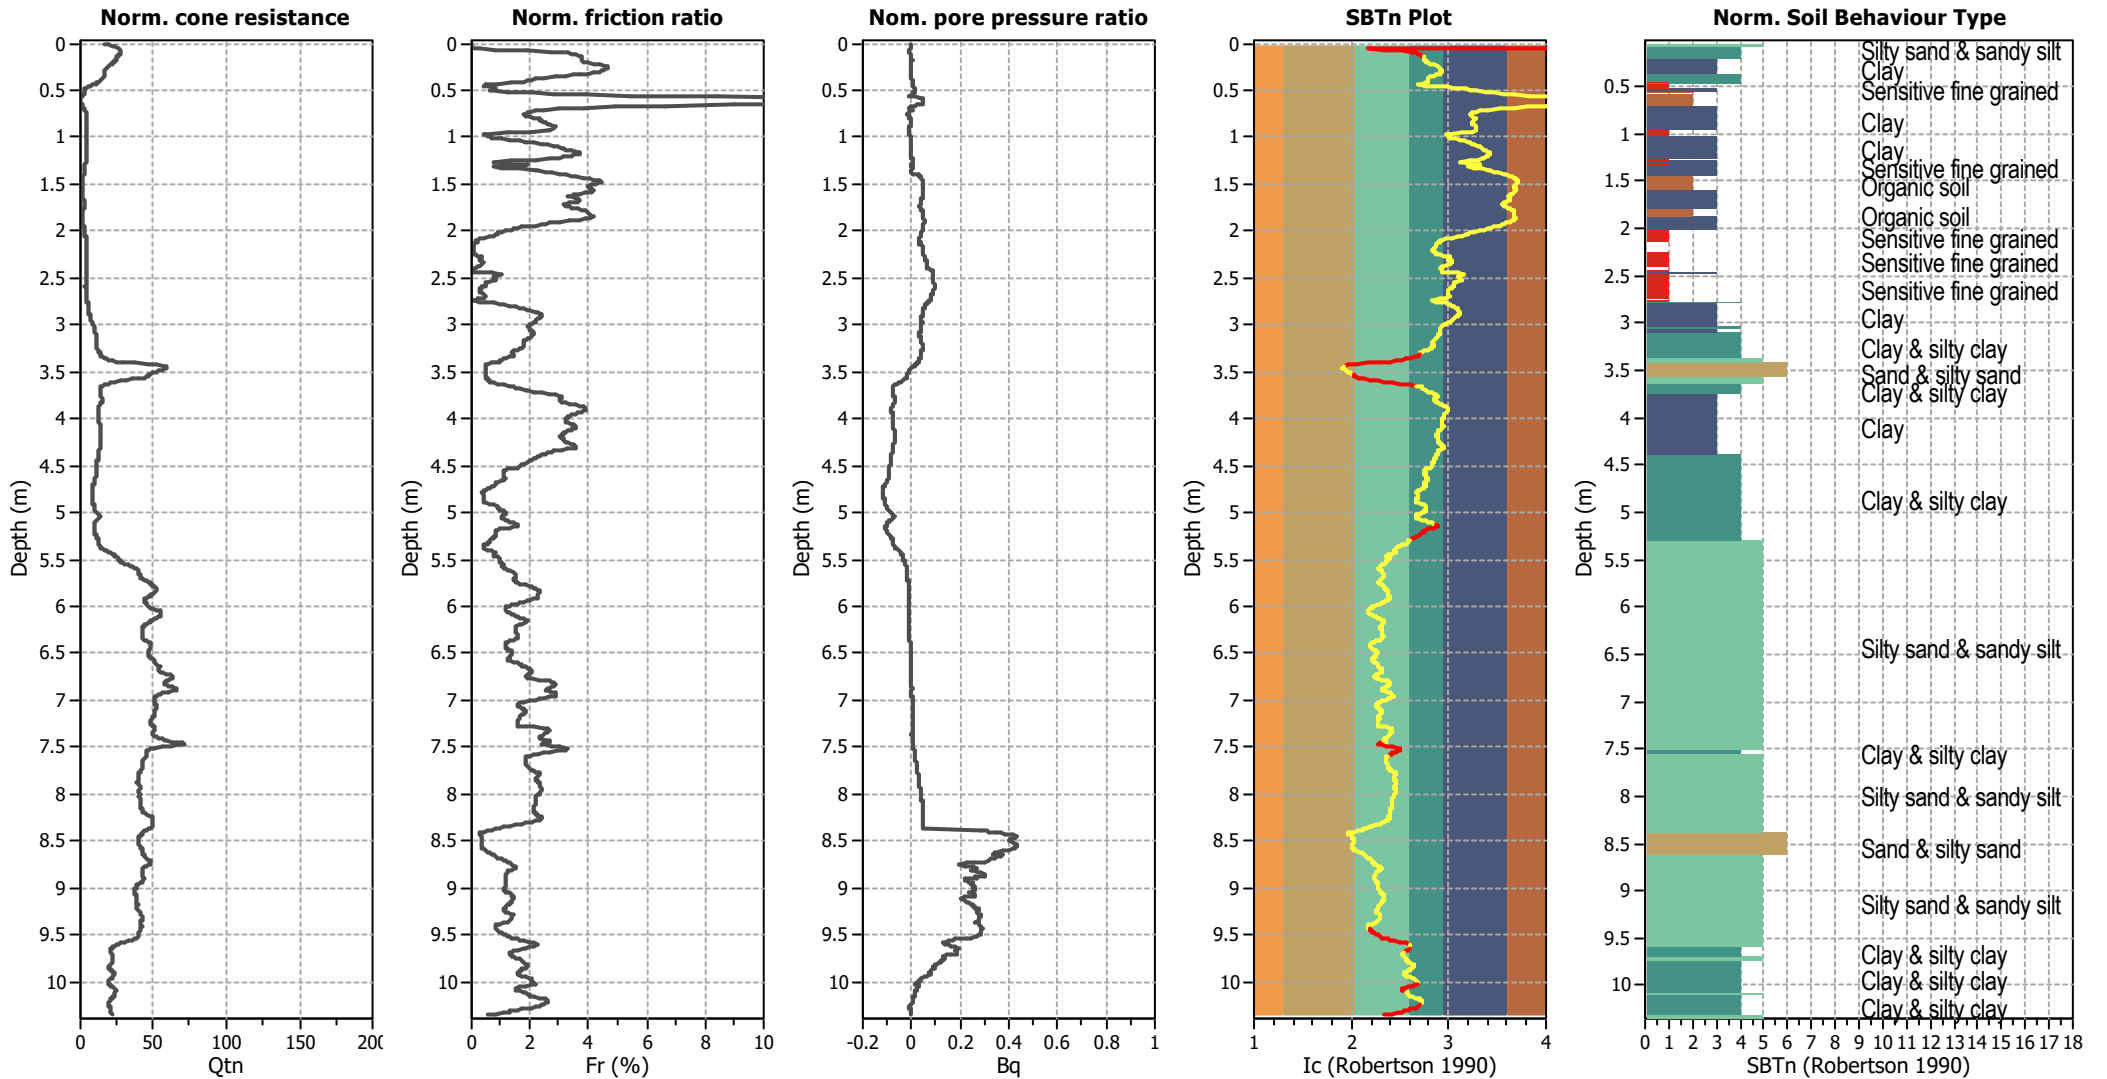


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

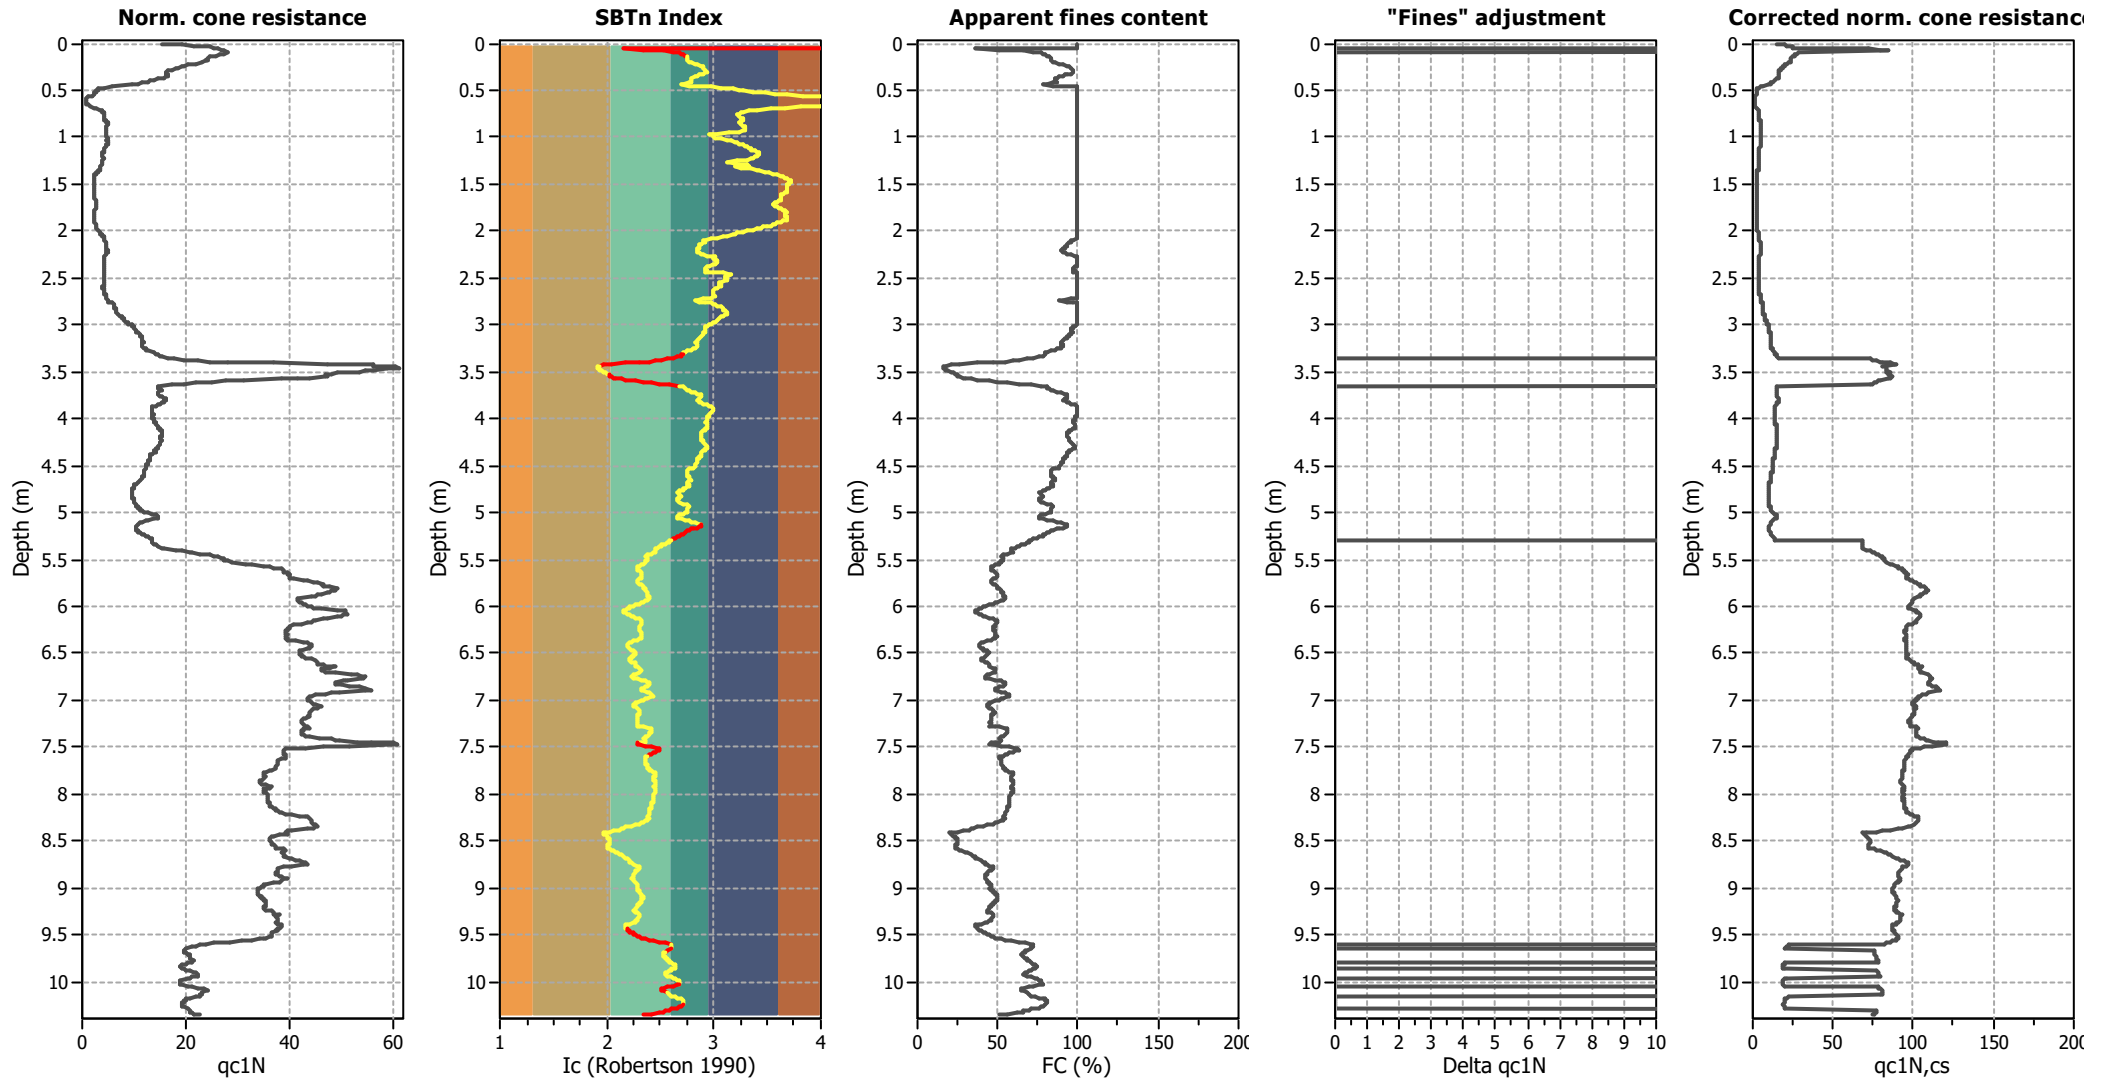

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

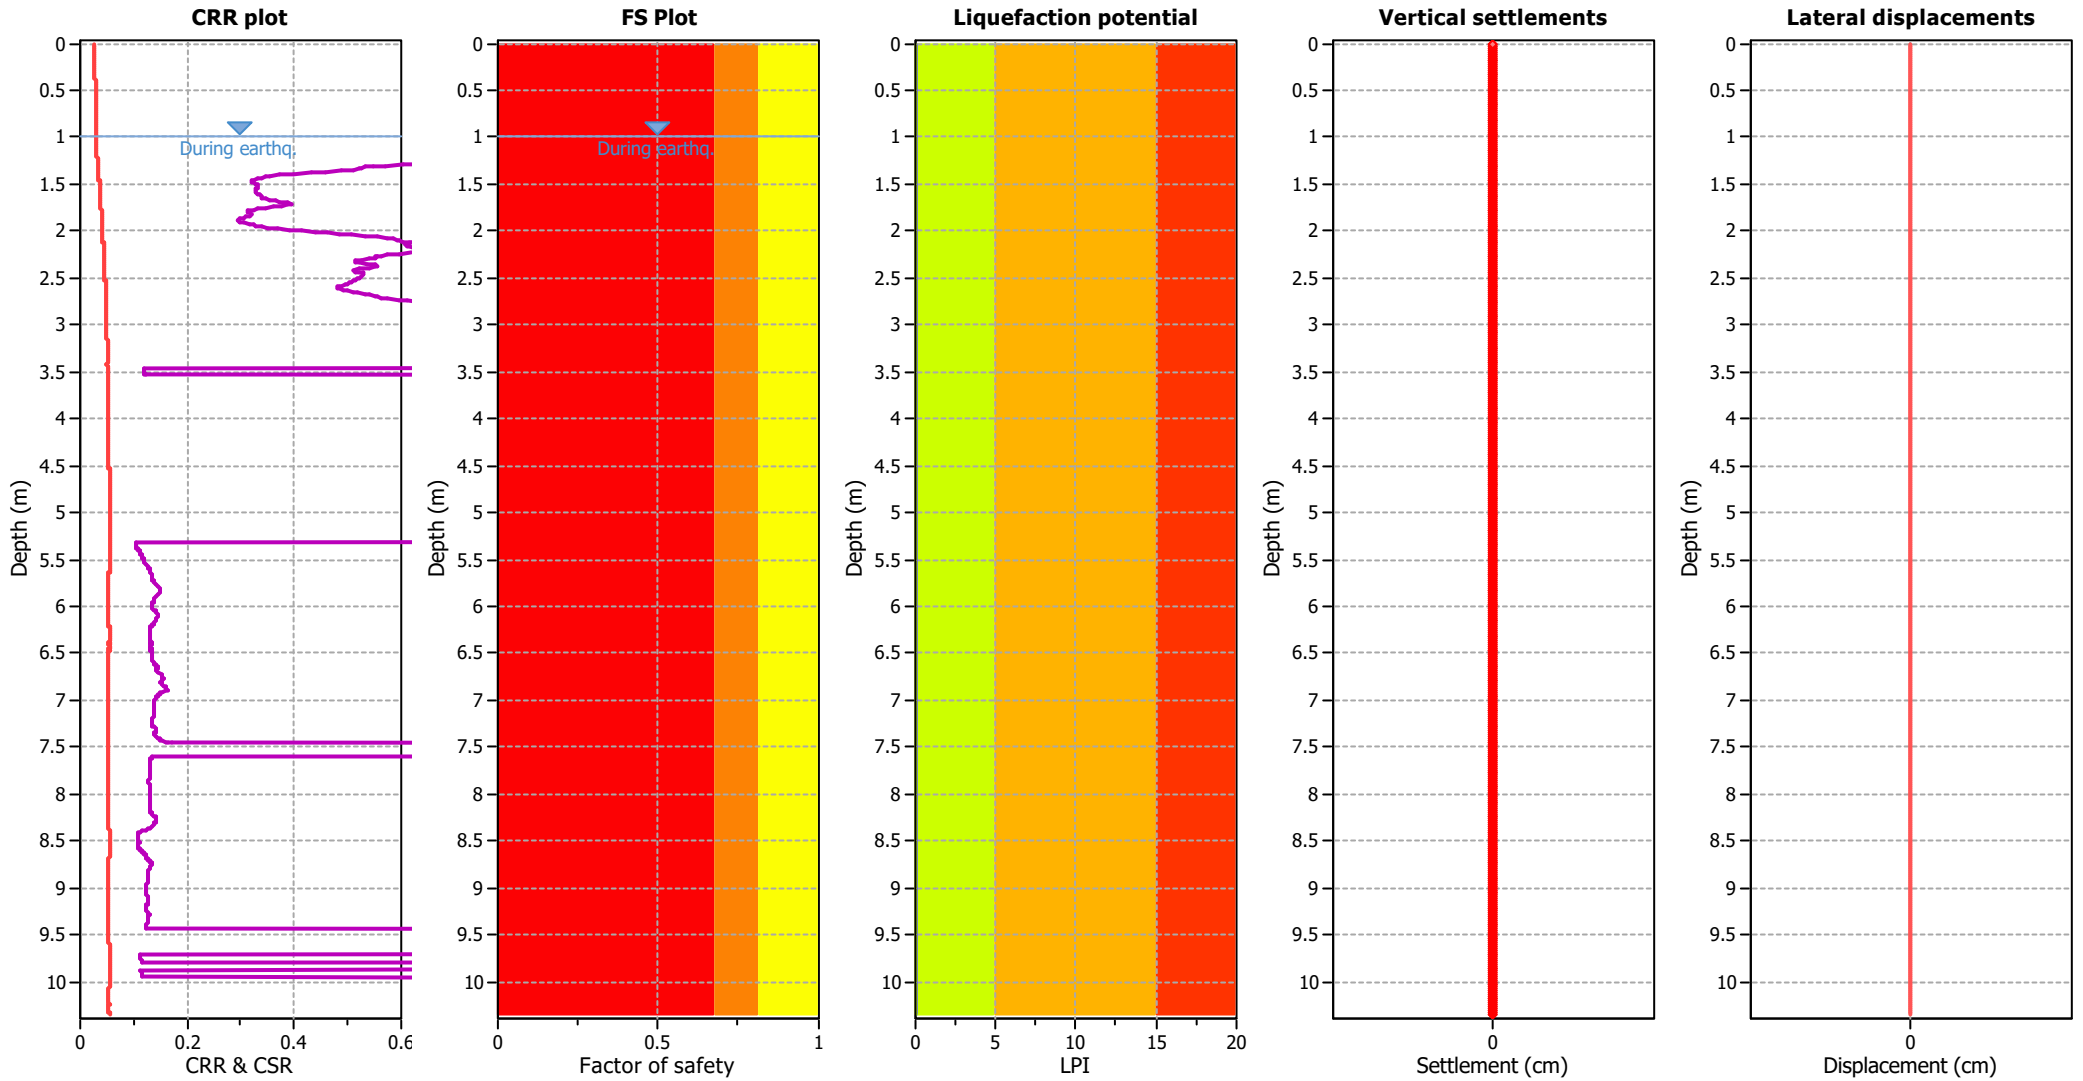

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

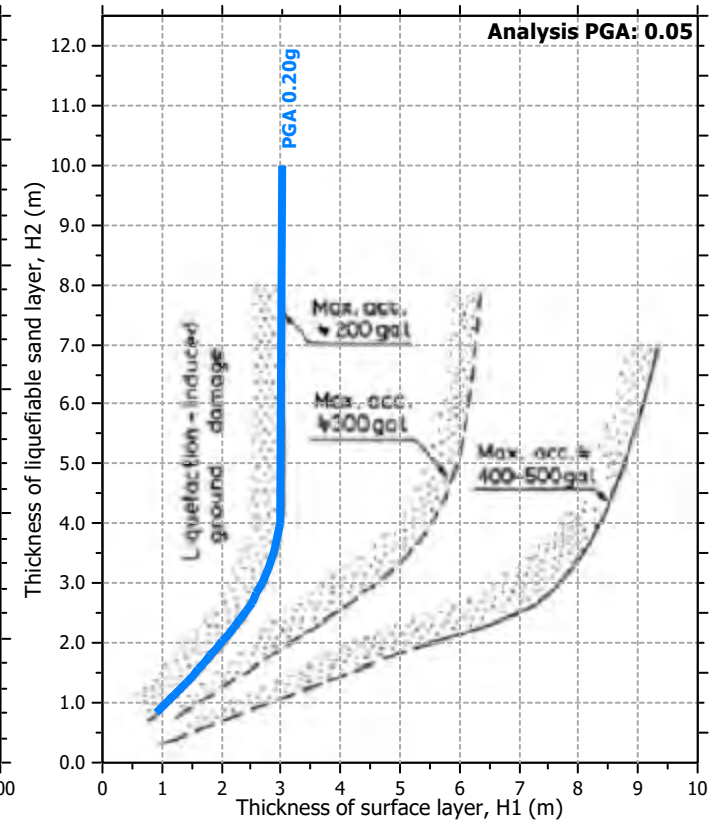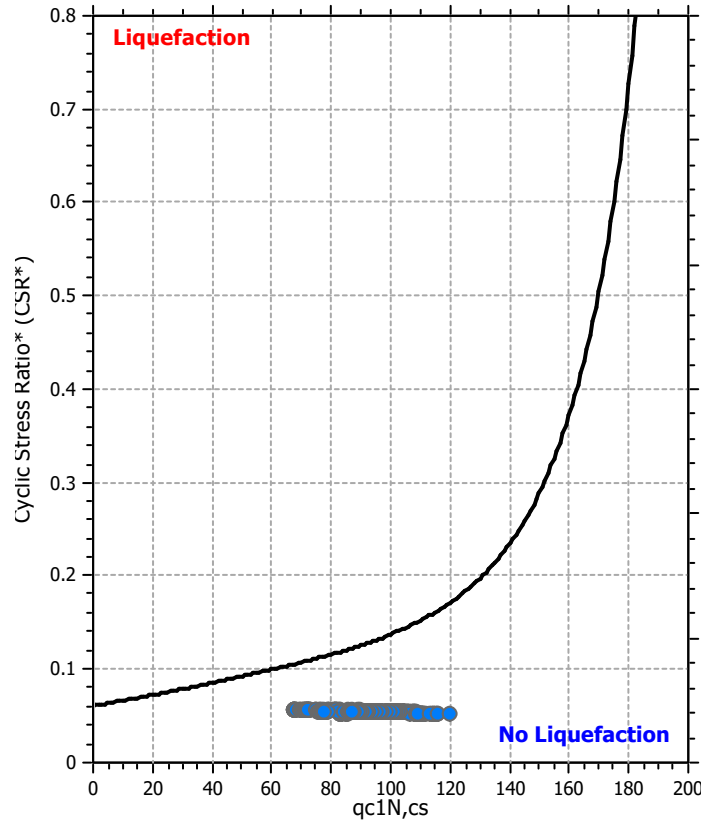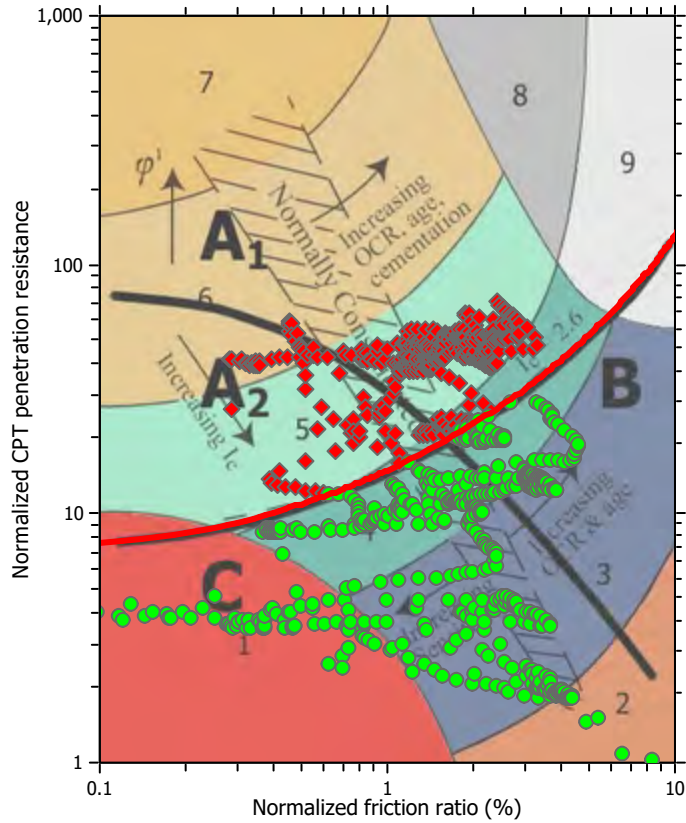

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

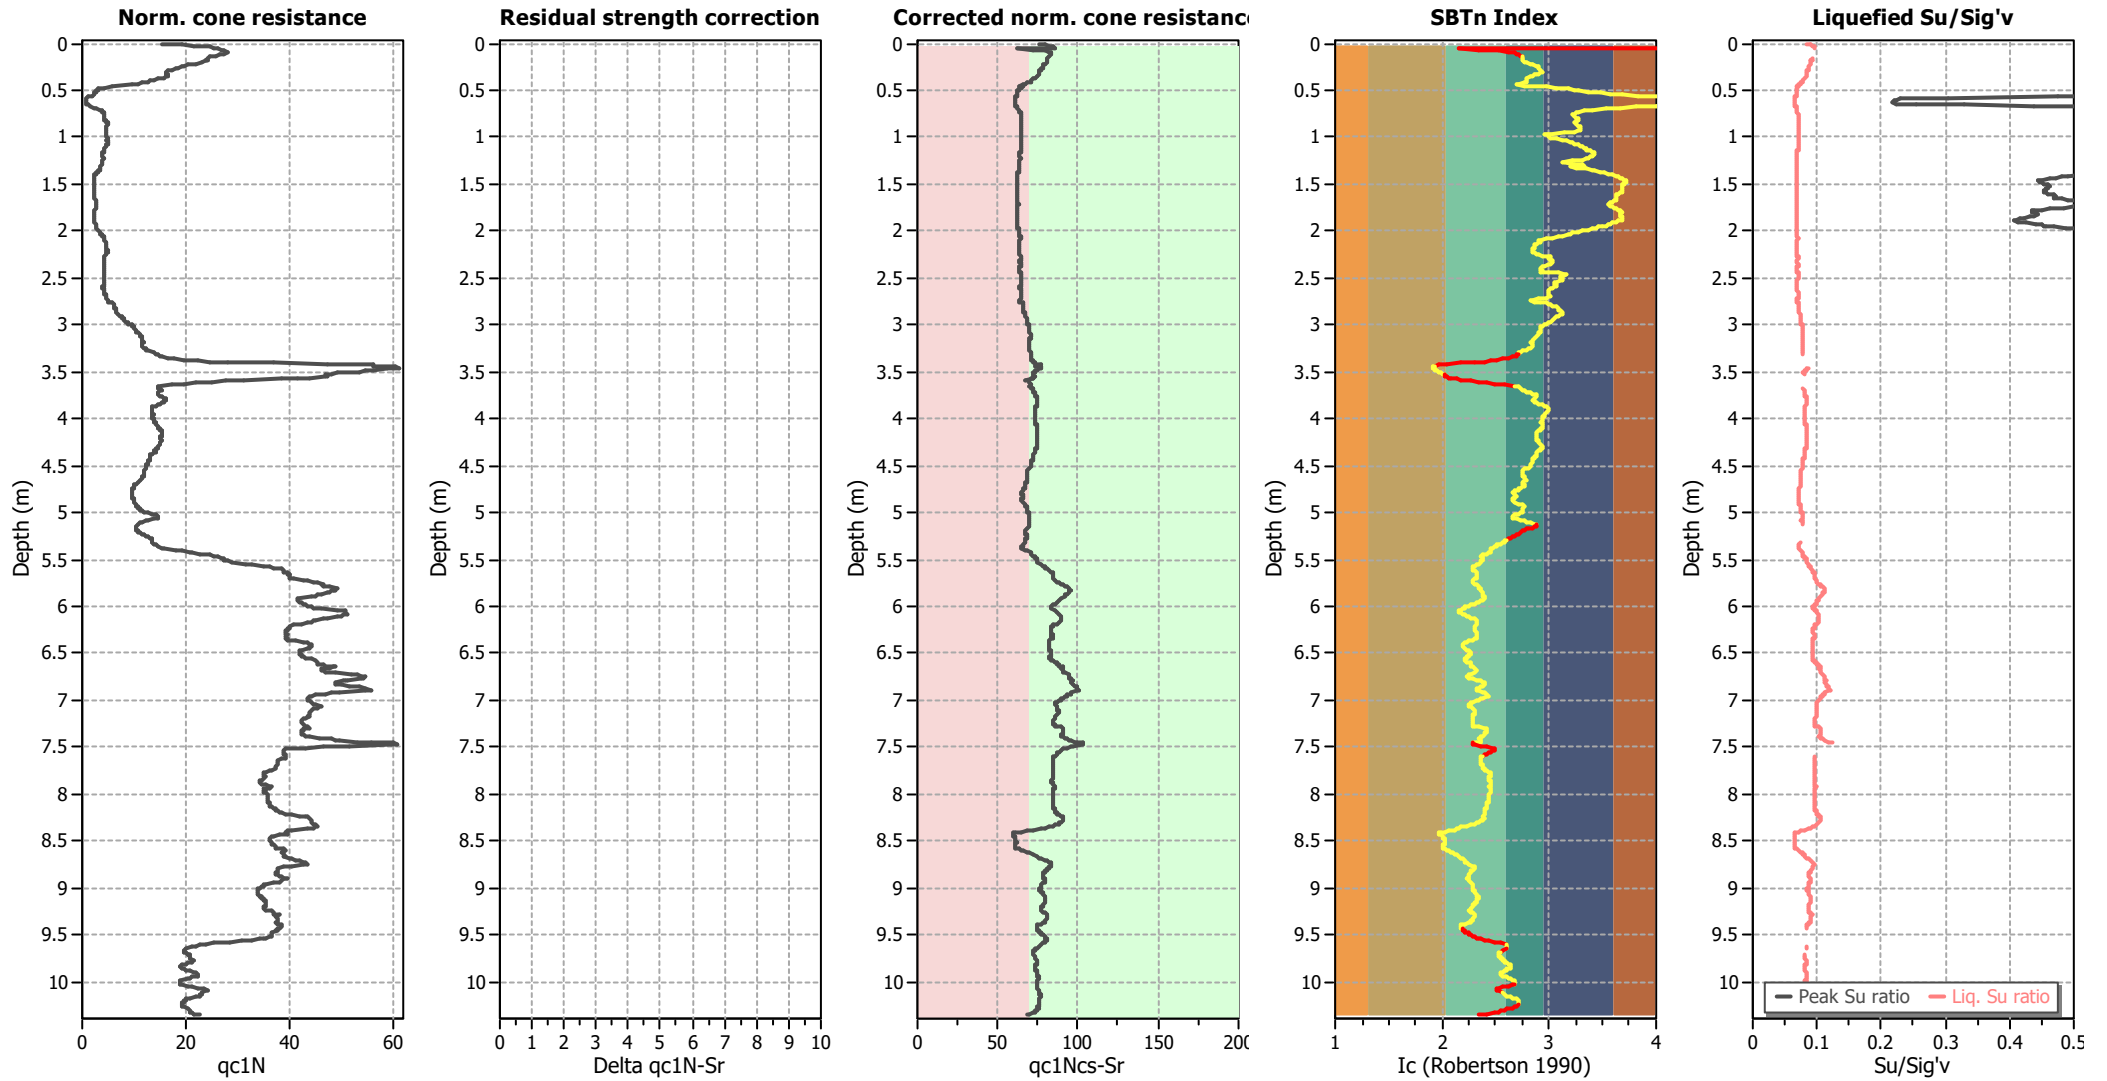

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

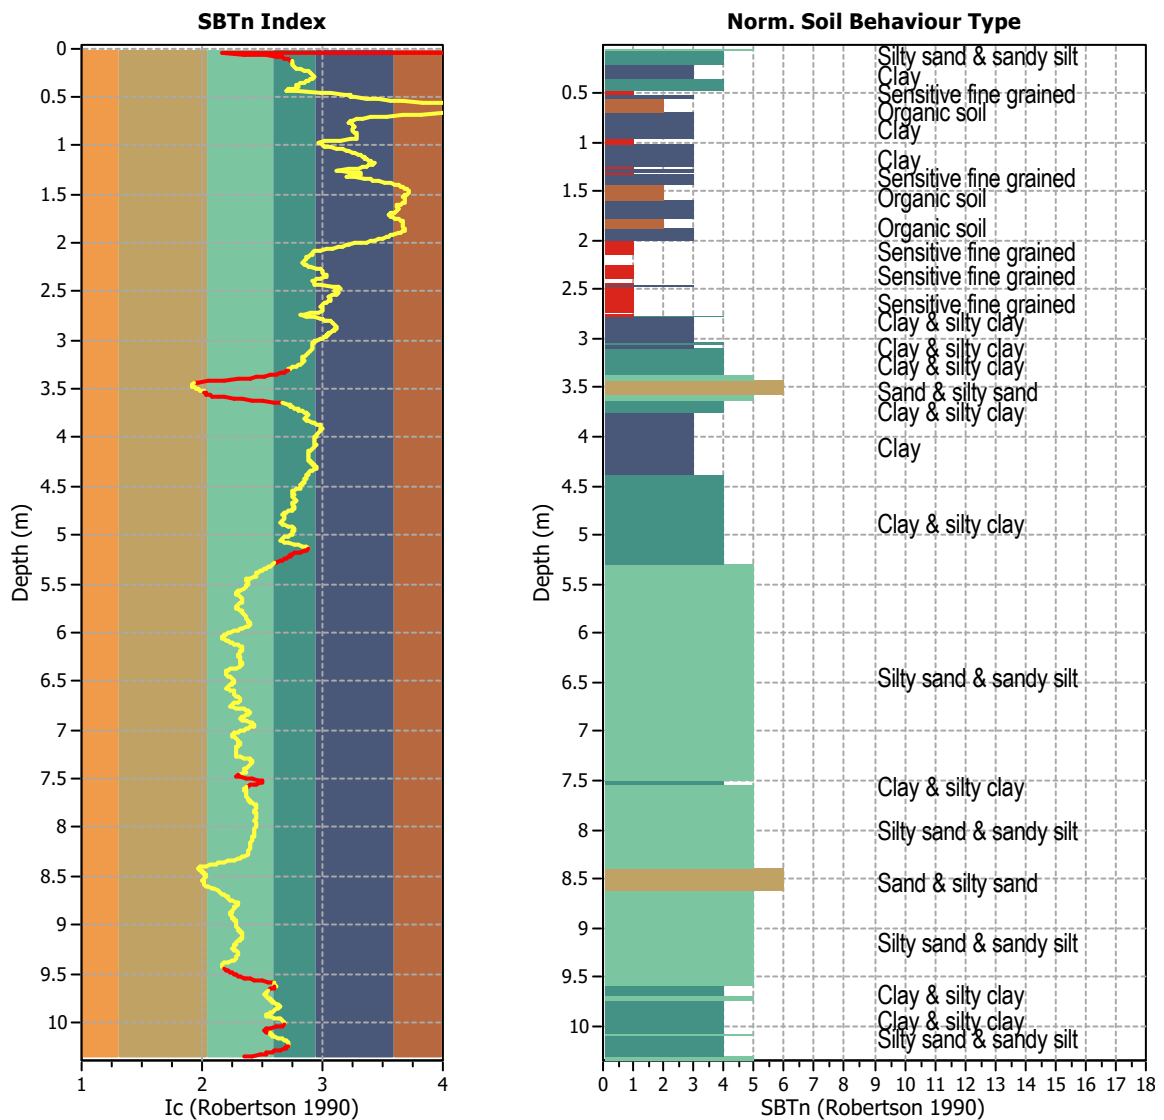


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1035
 Total points excluded: 111
 Exclusion percentage: 10.72%
 Number of layers detected: 11


Estimation of post-earthquake settlements

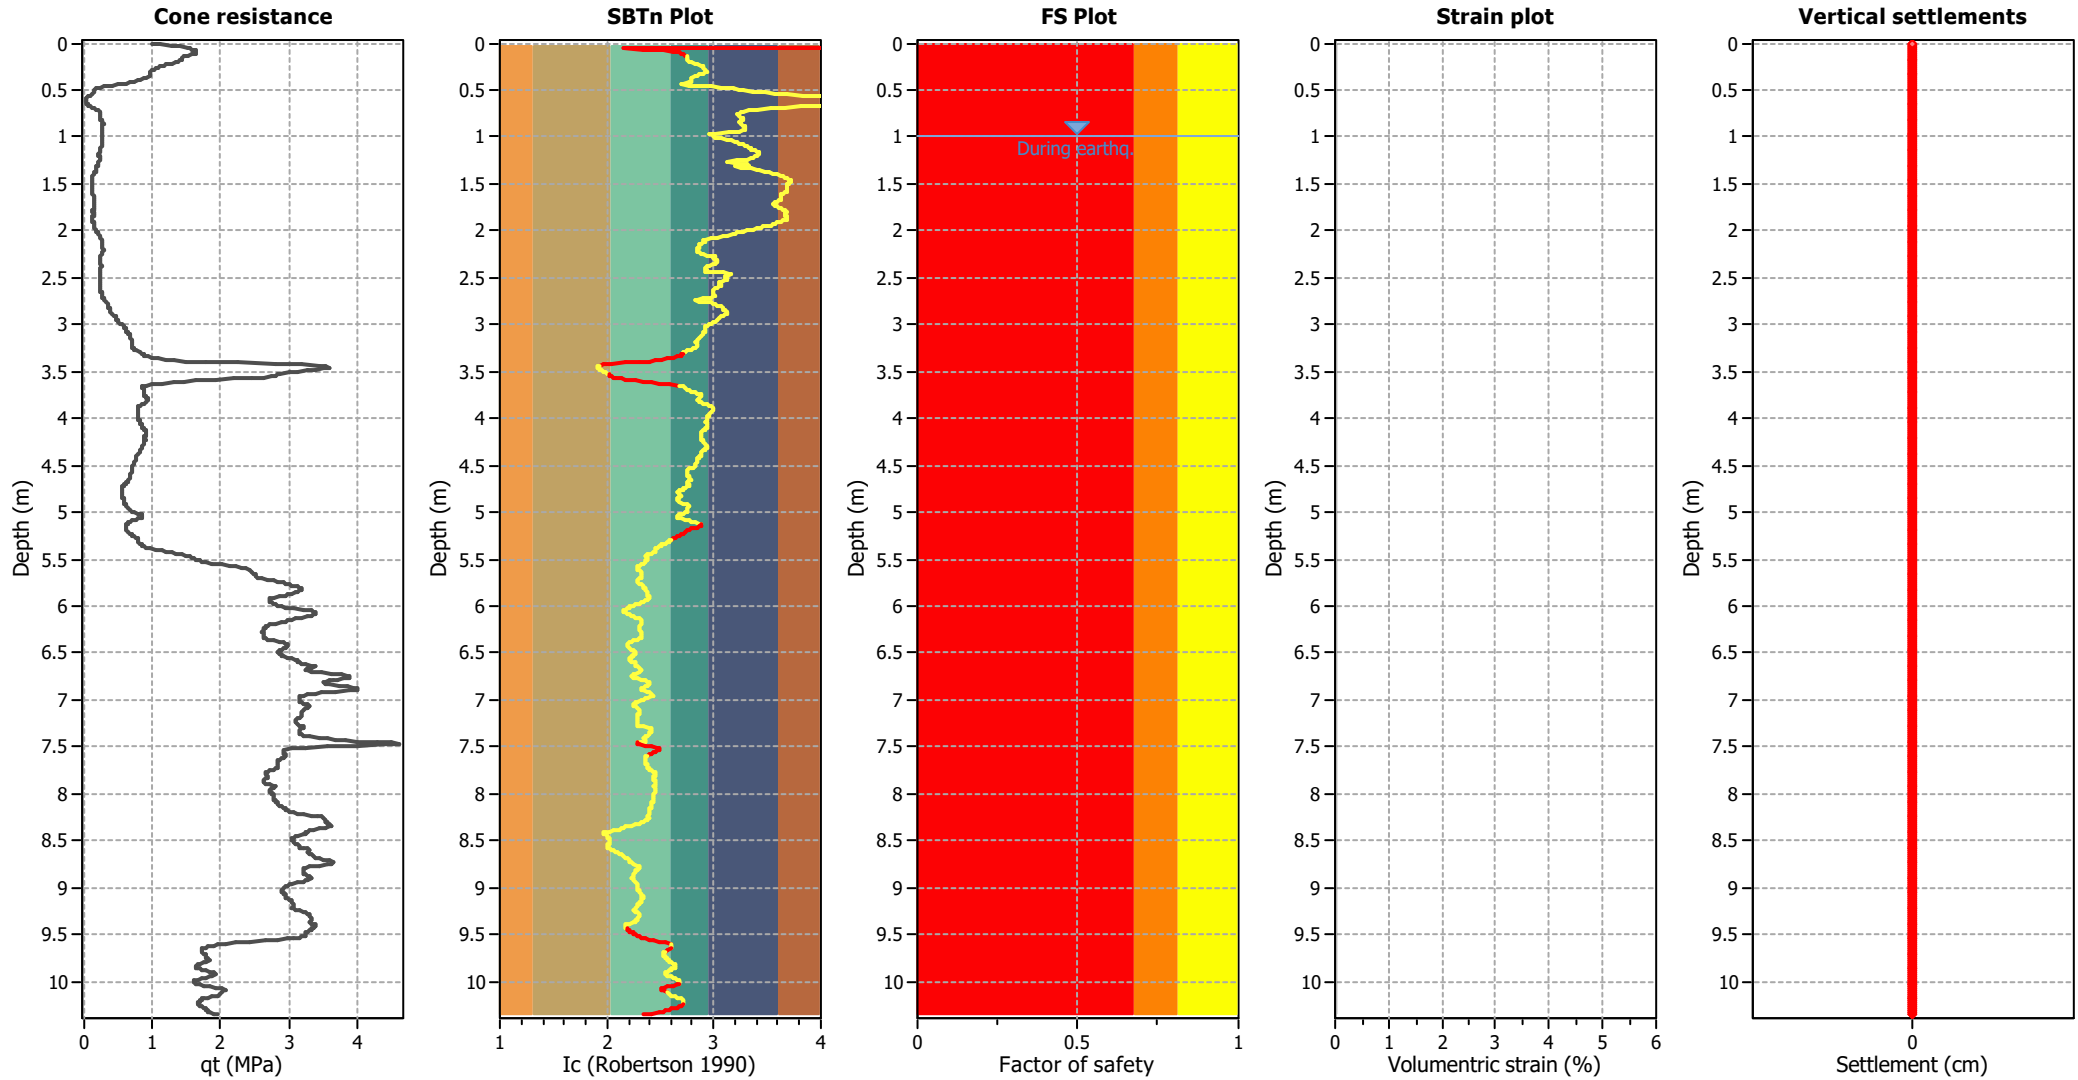

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

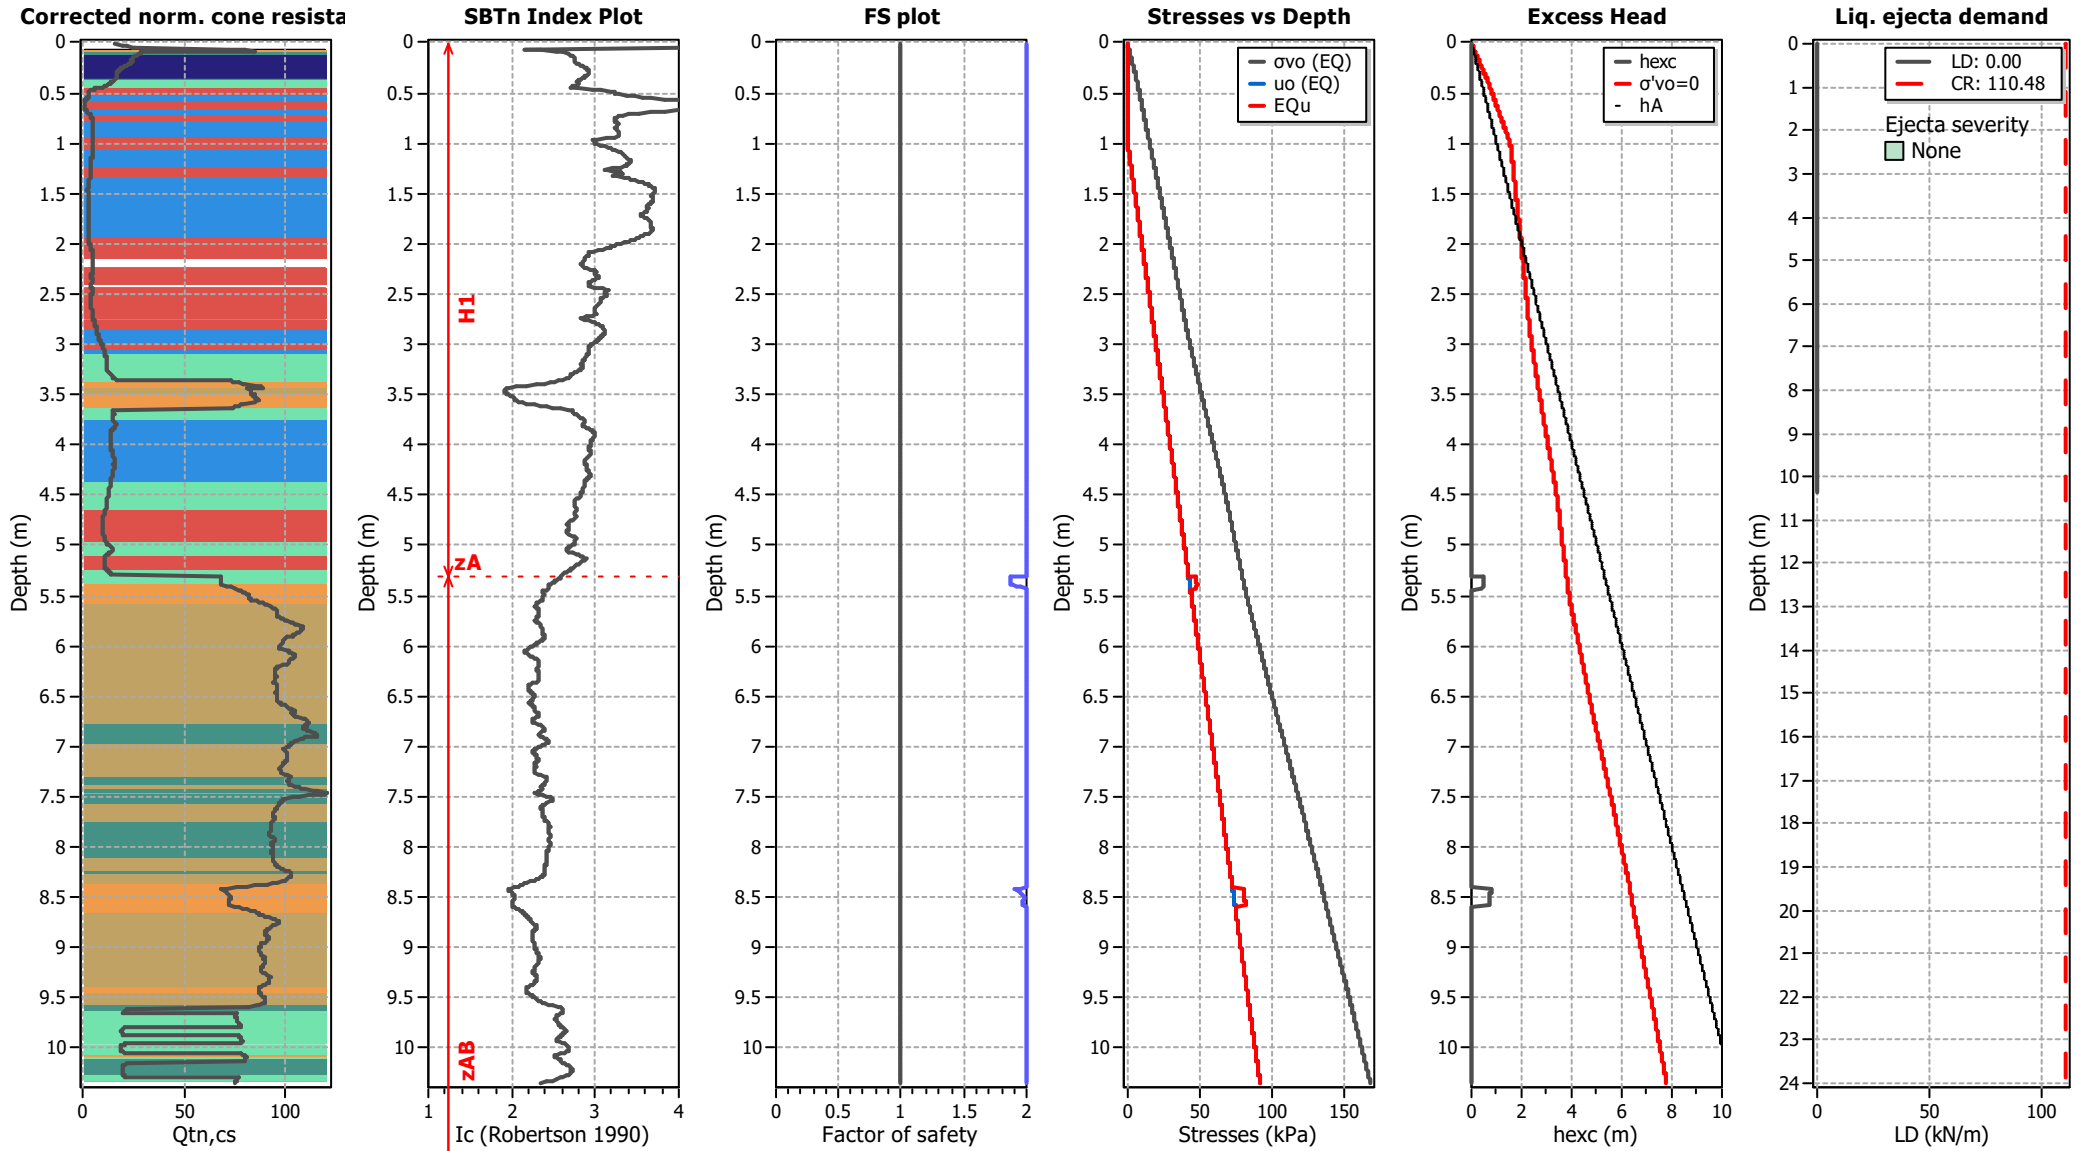

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT404

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

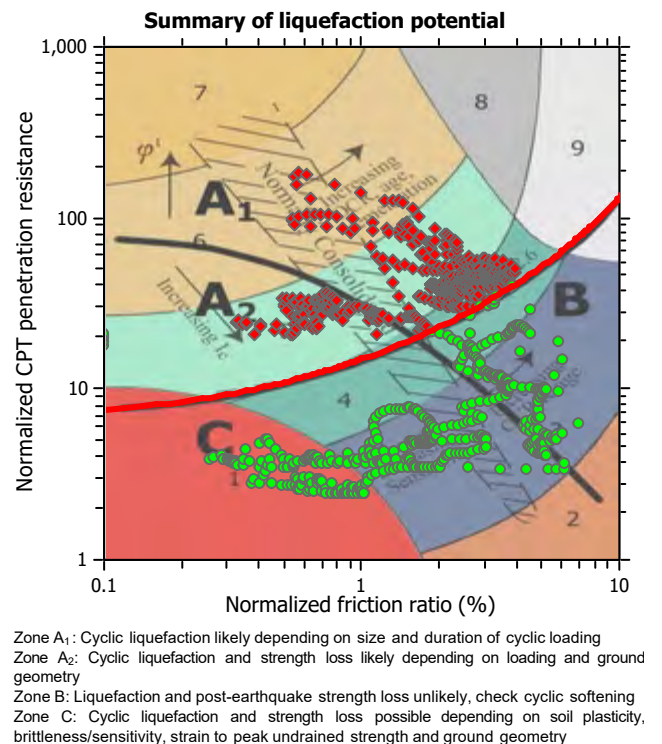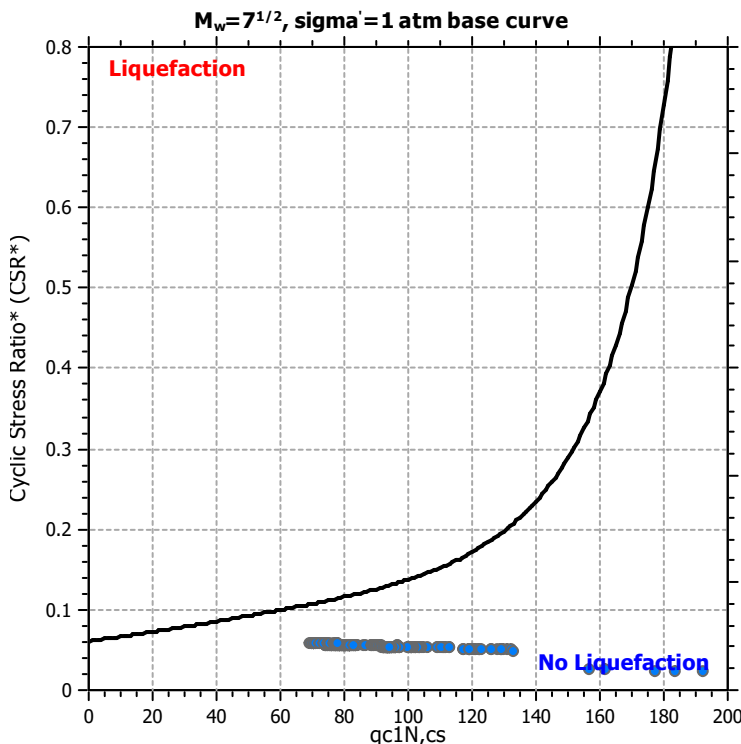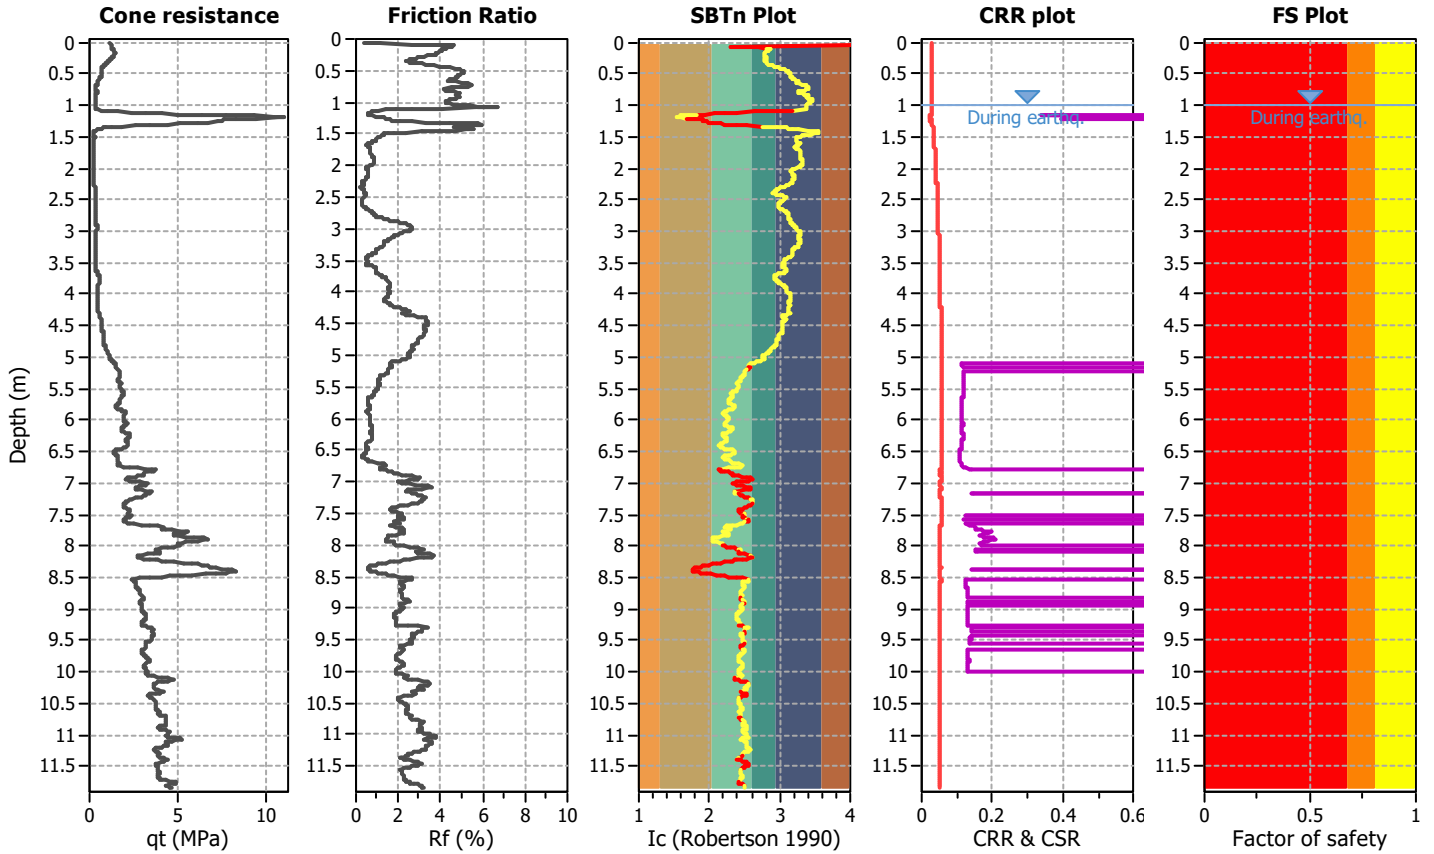

CPT basic interpretation plots

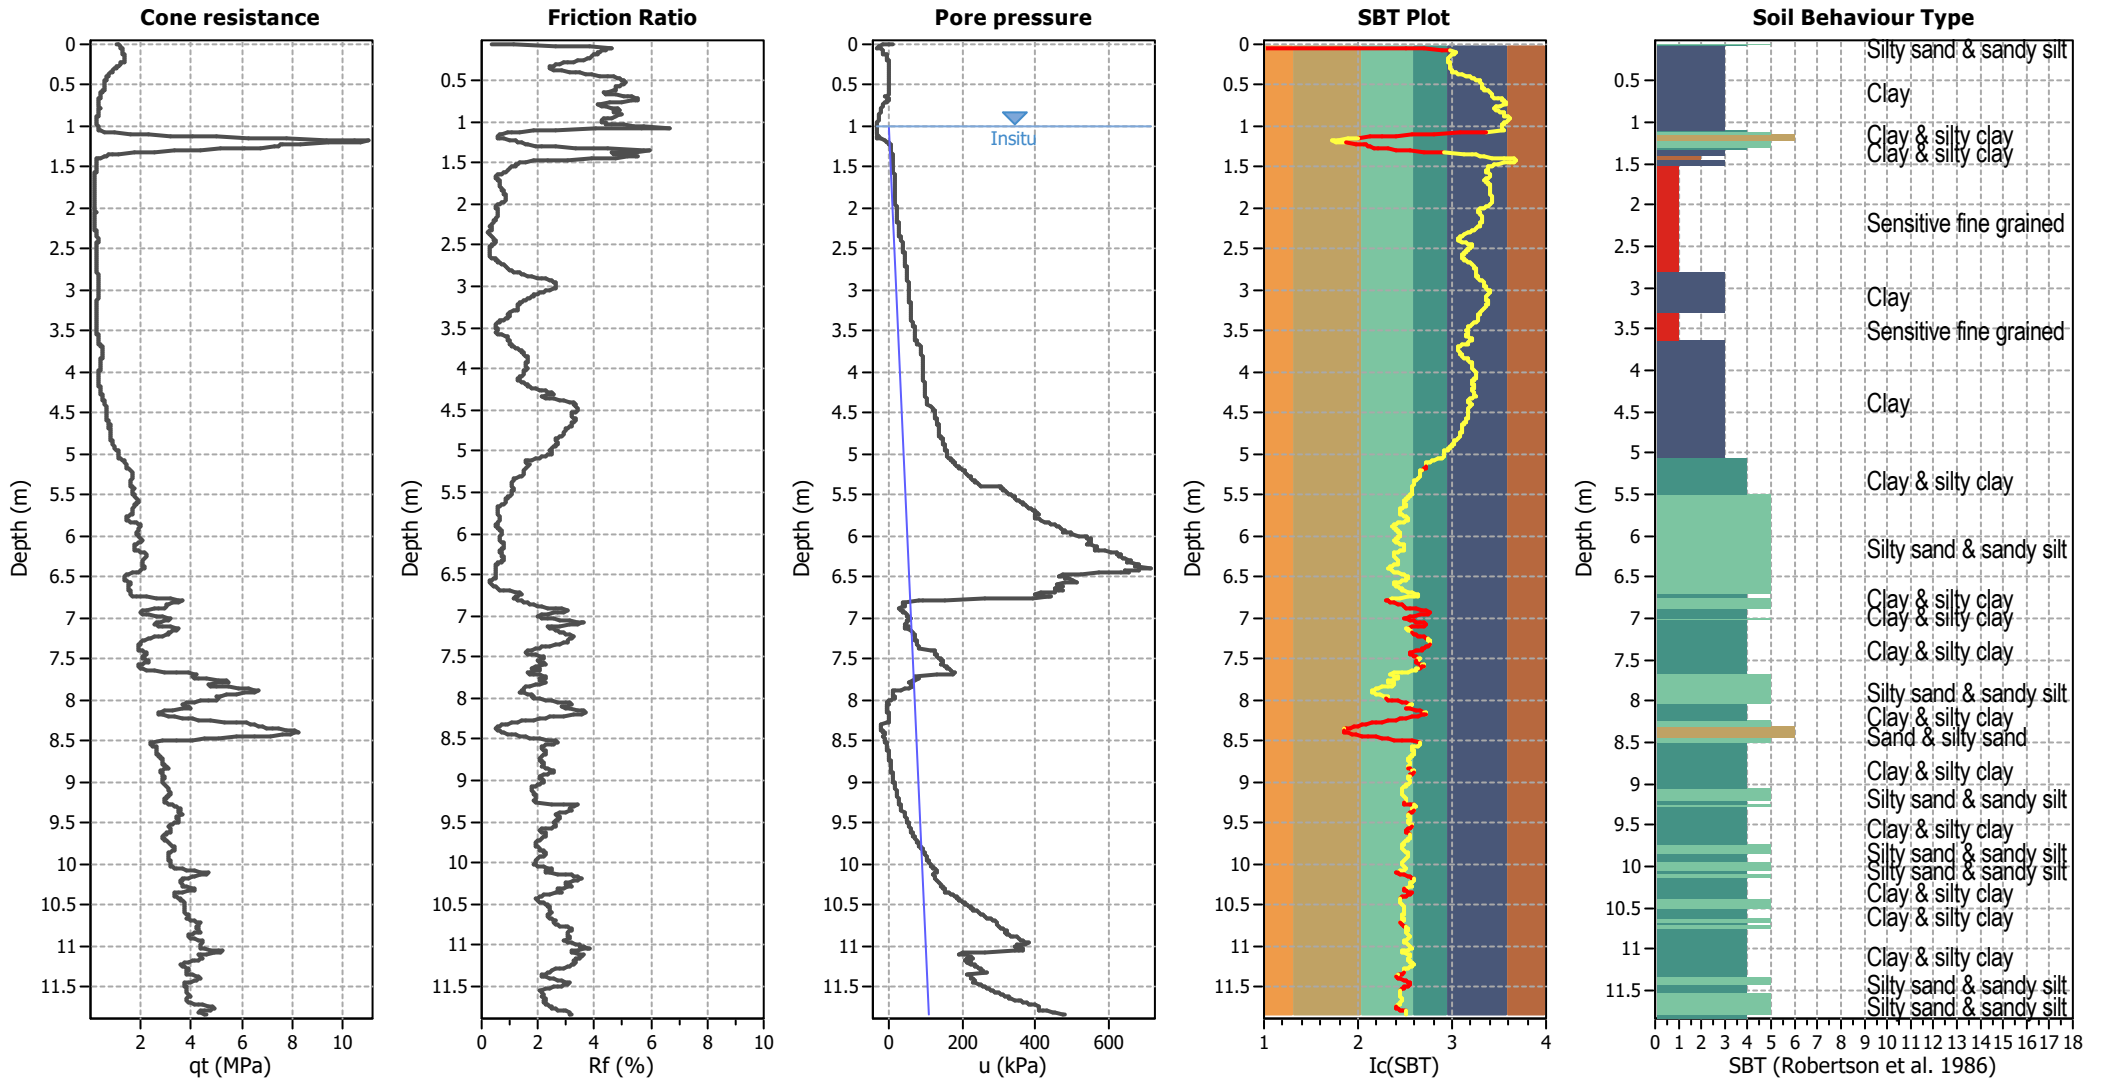


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

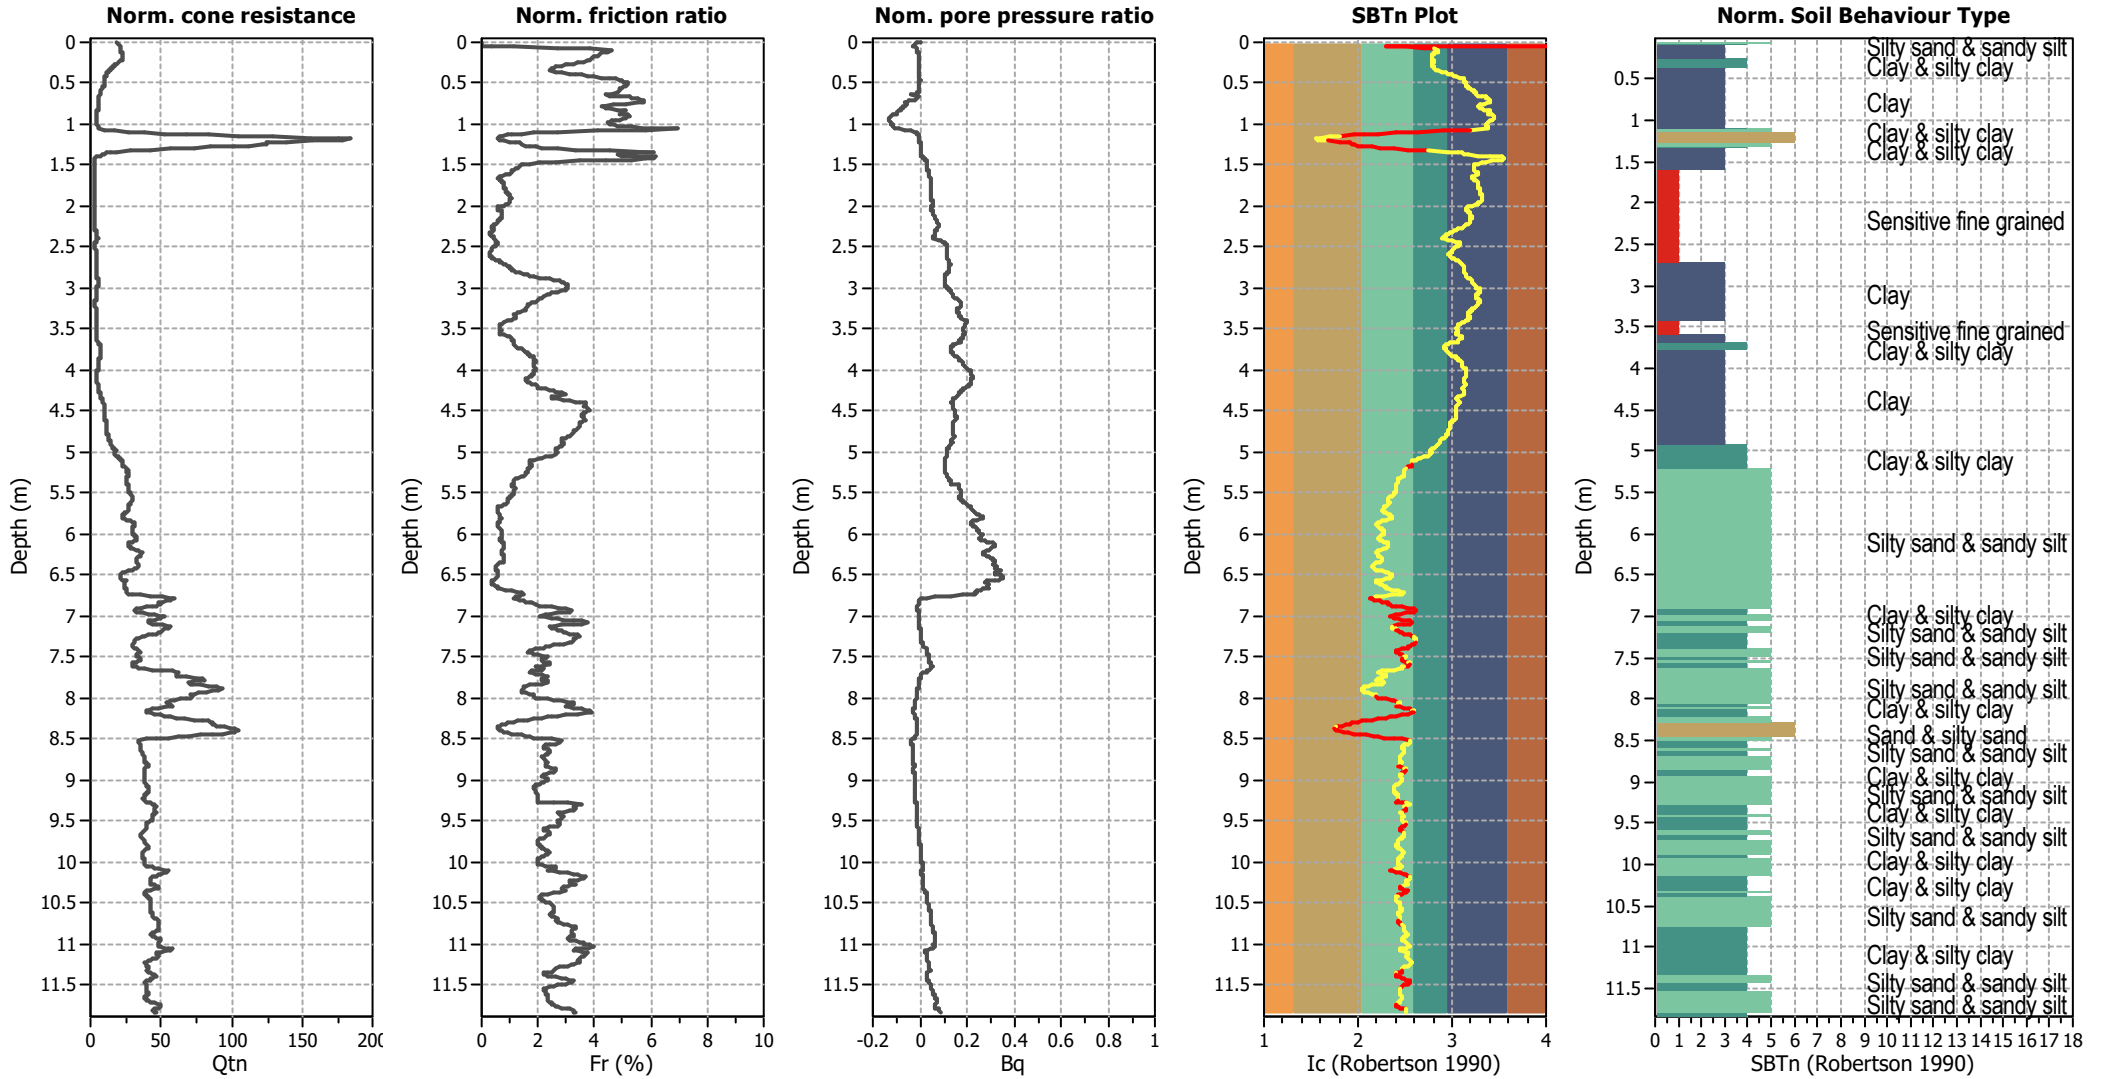


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

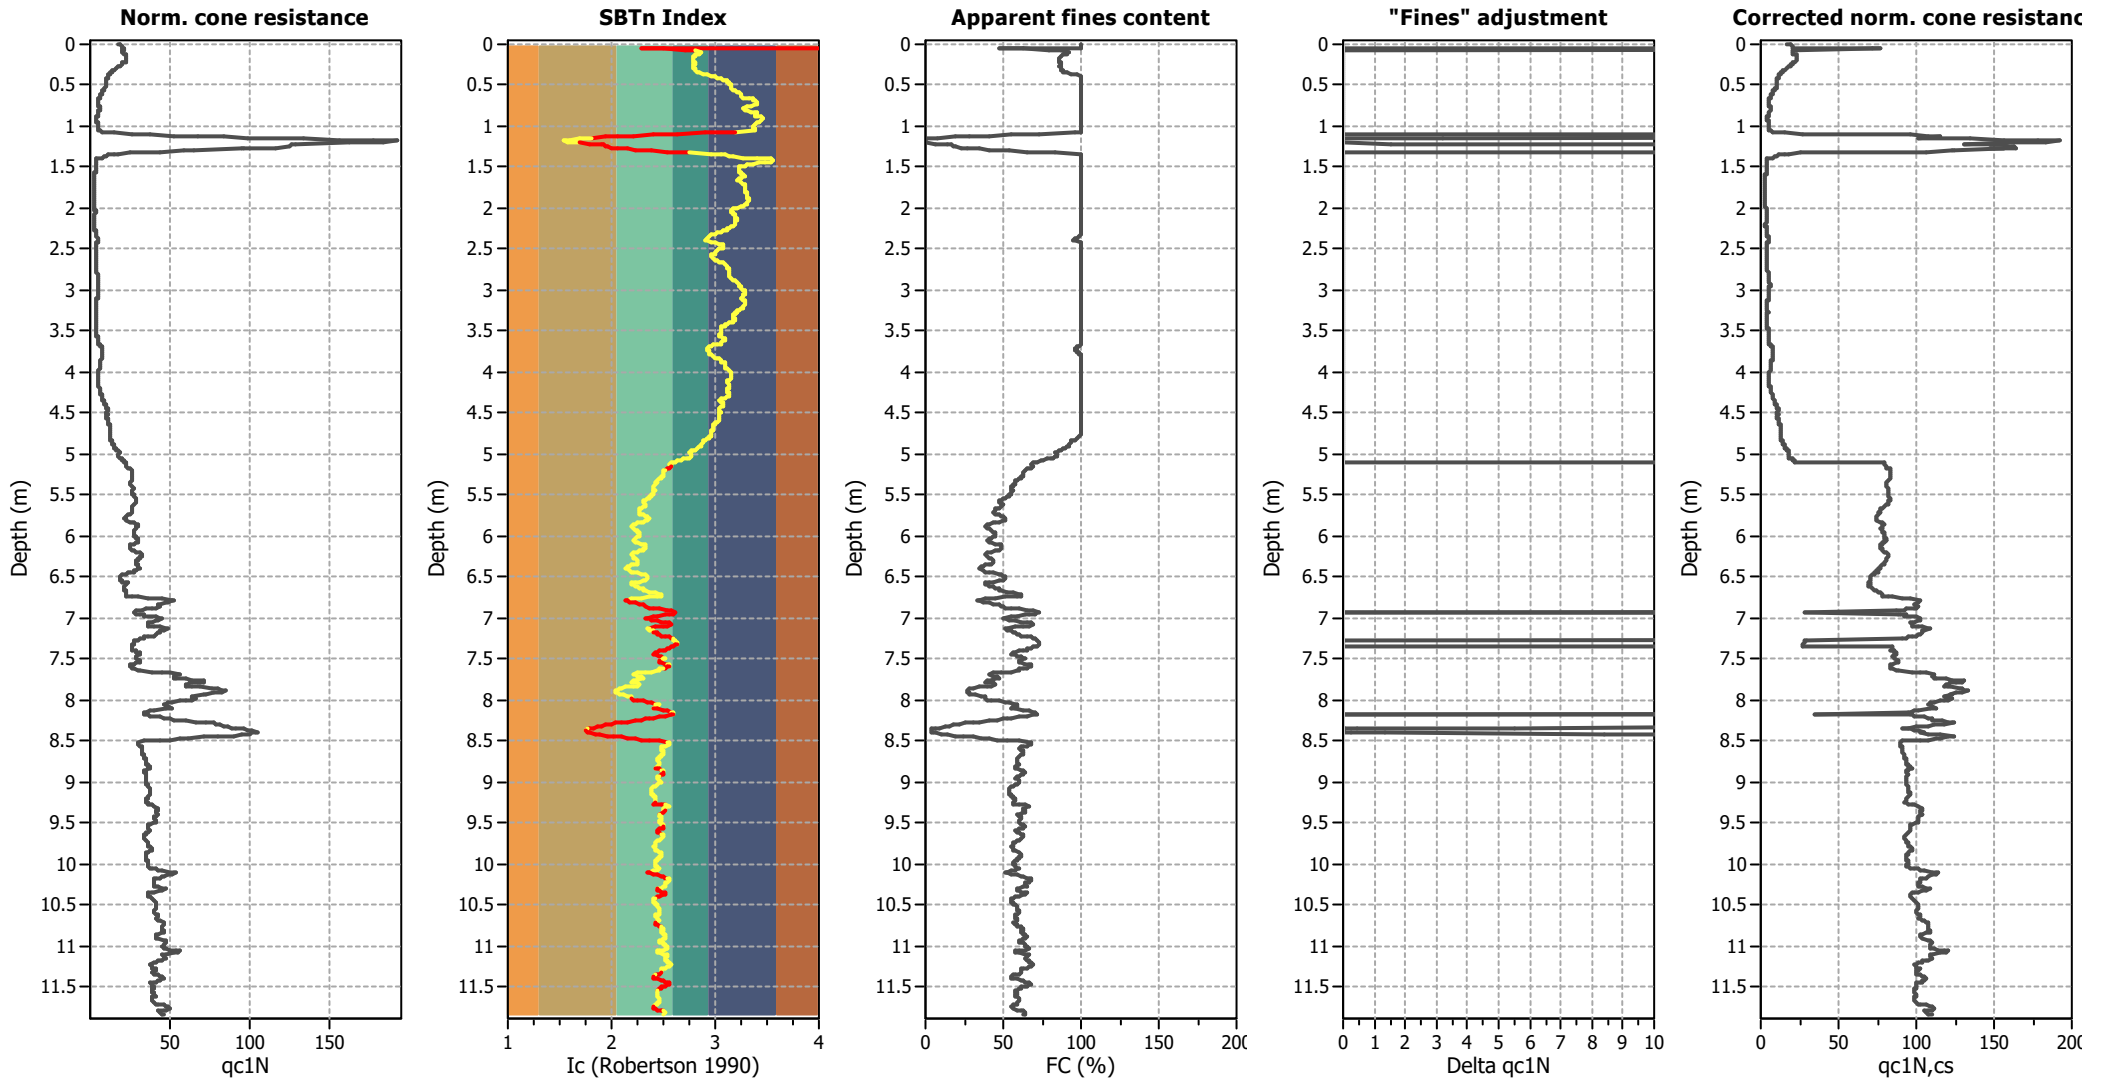

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

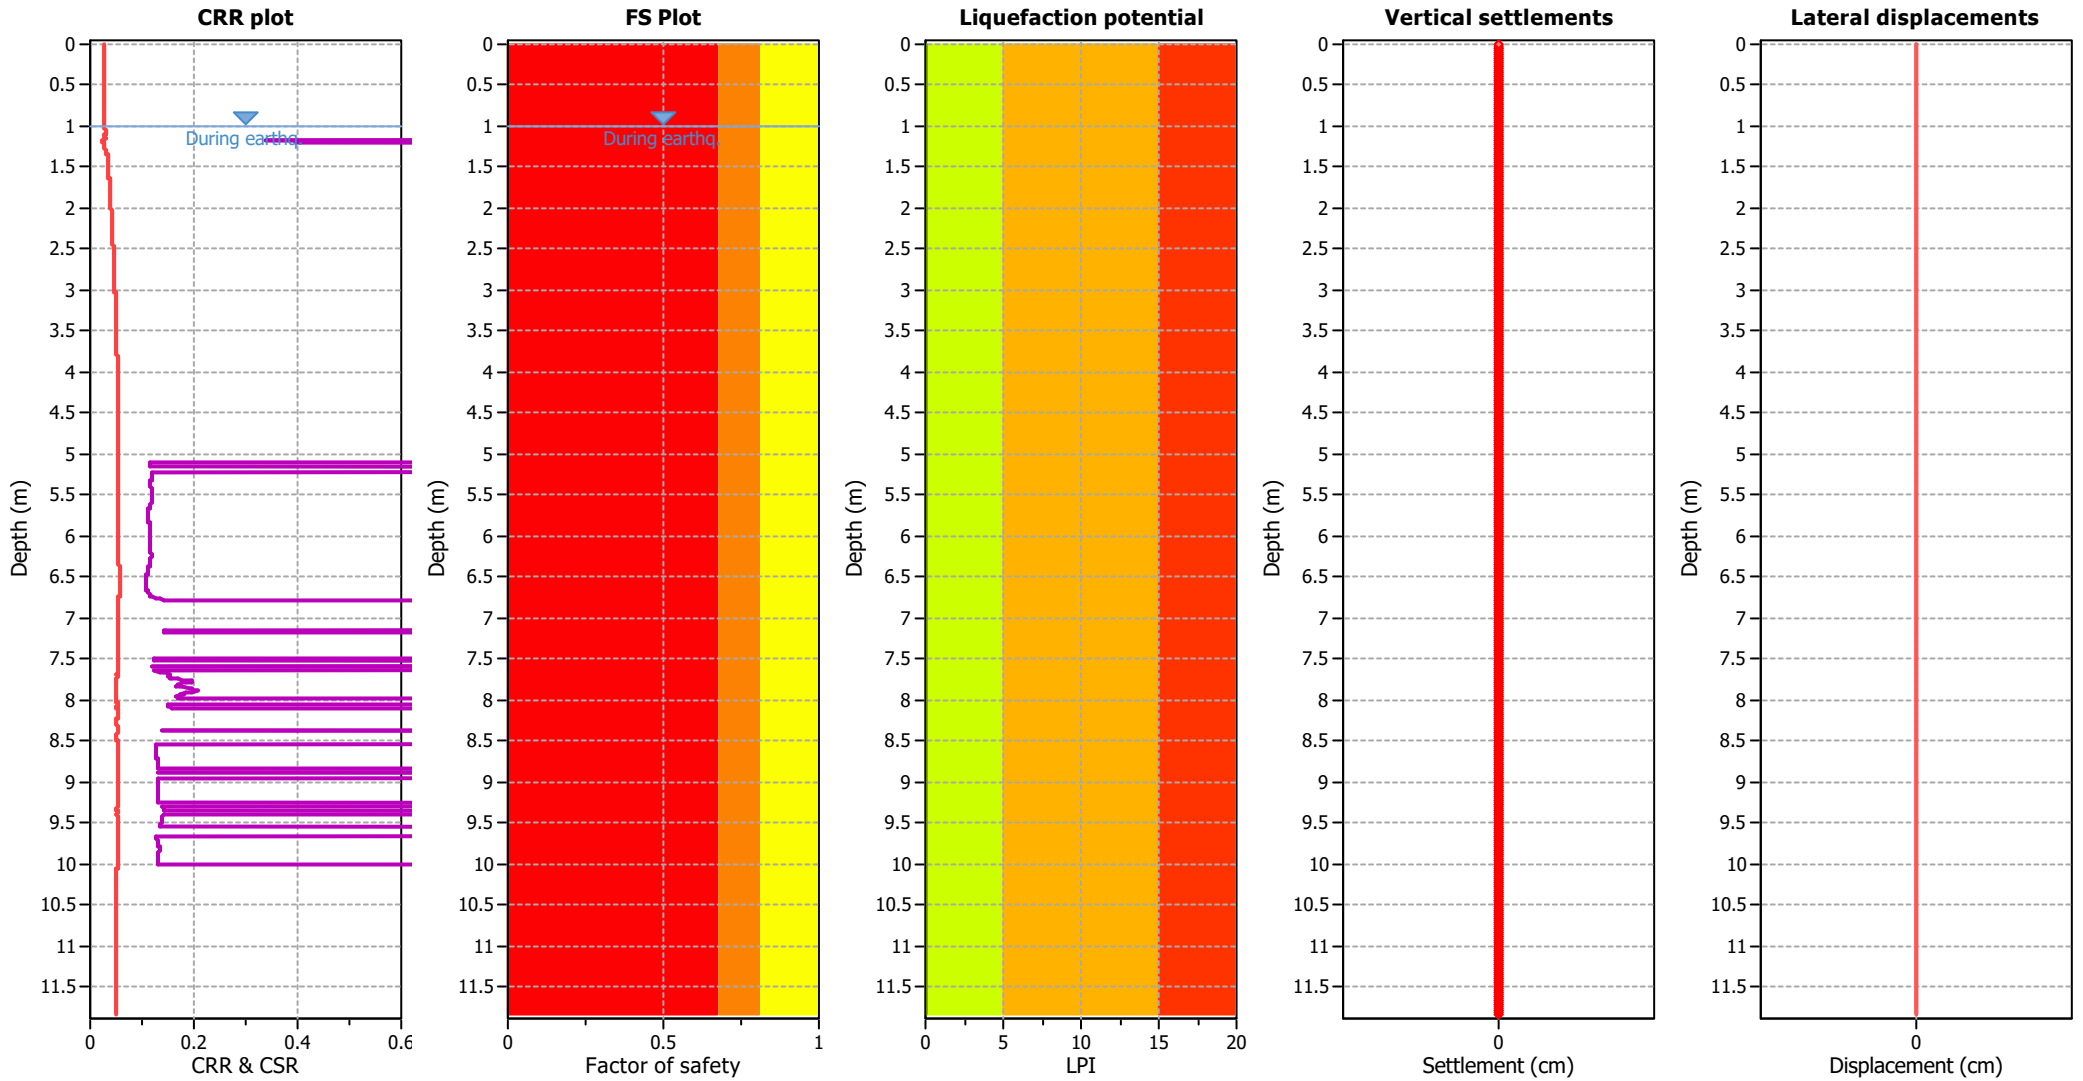

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

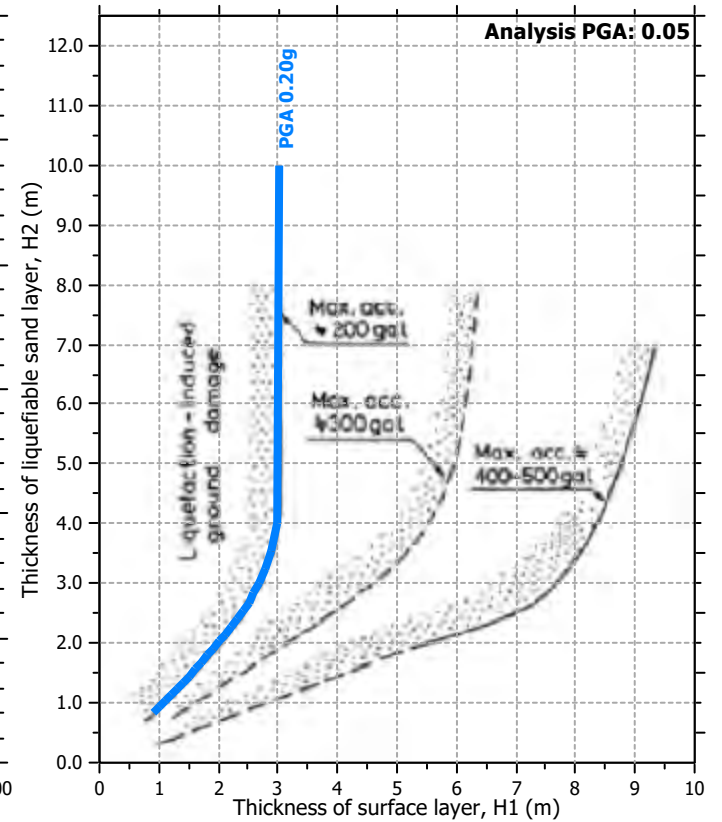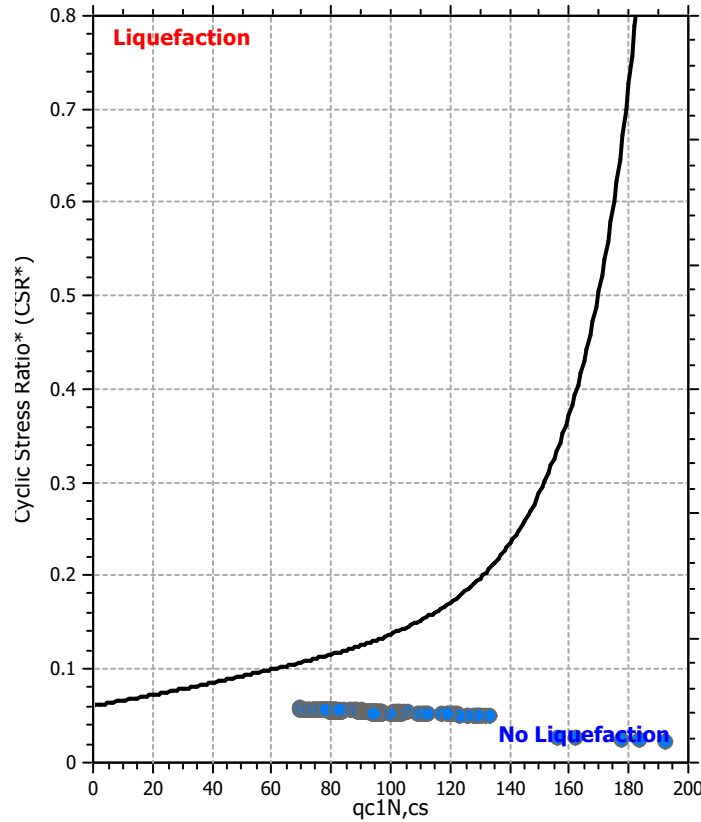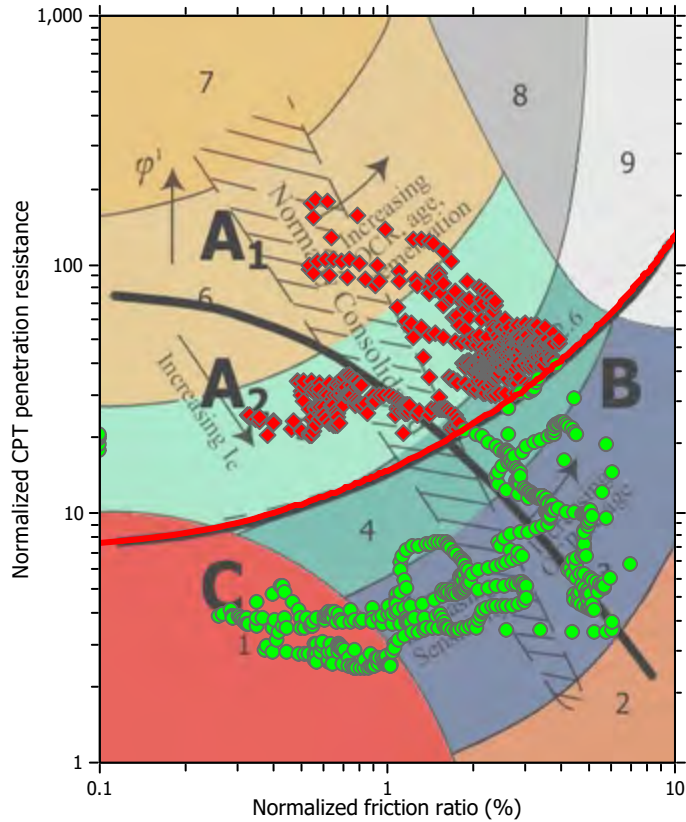

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

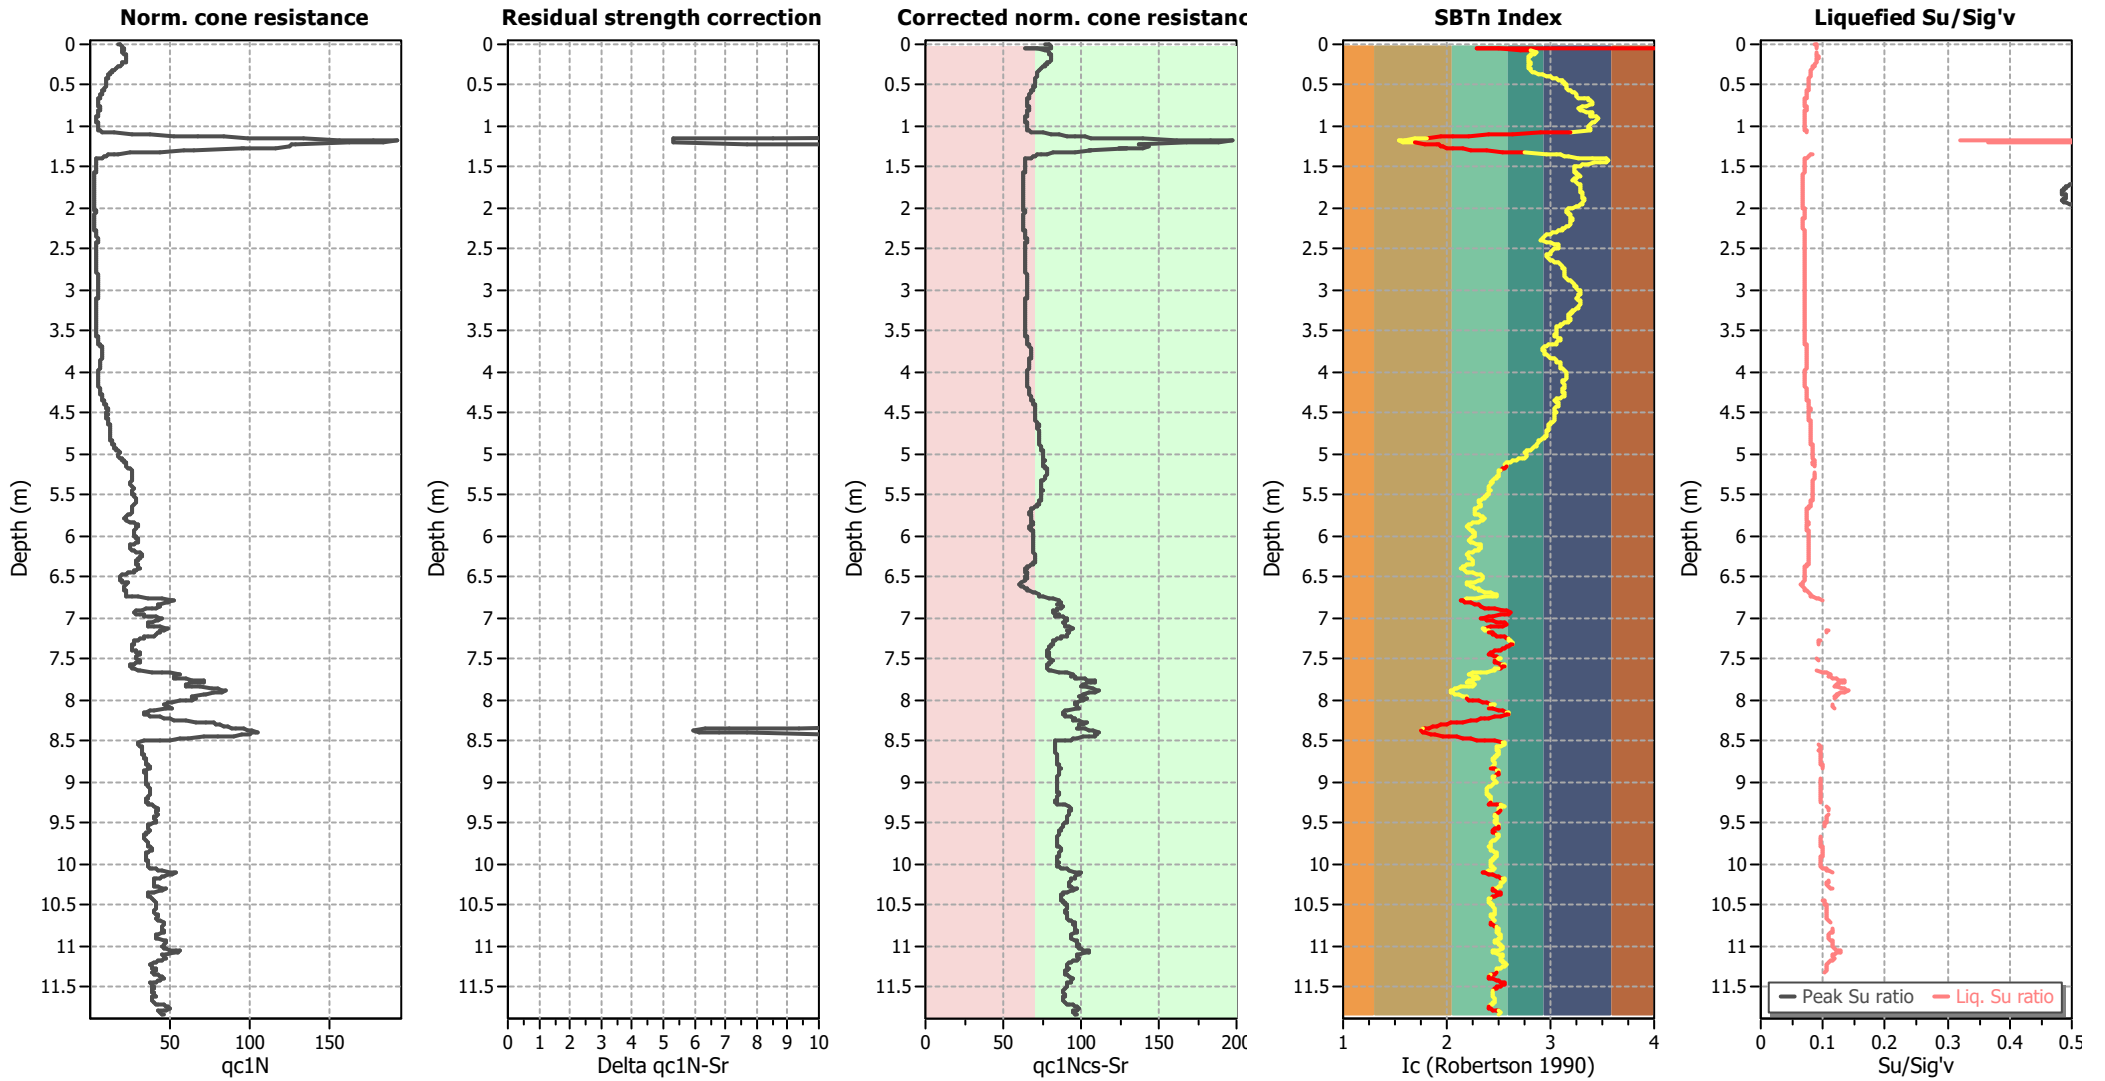

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

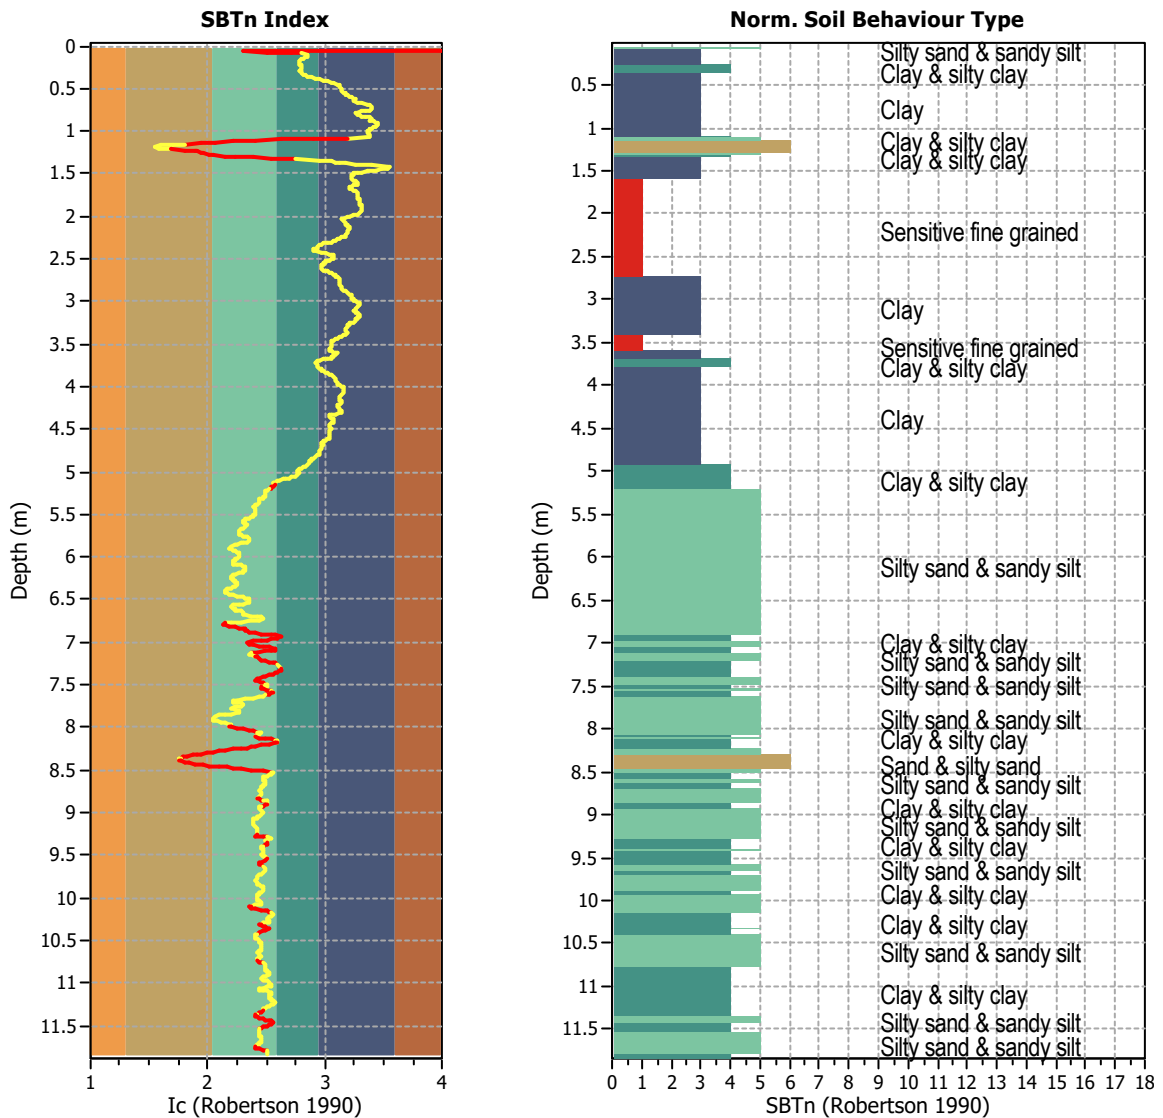


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1184
 Total points excluded: 233
 Exclusion percentage: 19.68%
 Number of layers detected: 31


Estimation of post-earthquake settlements

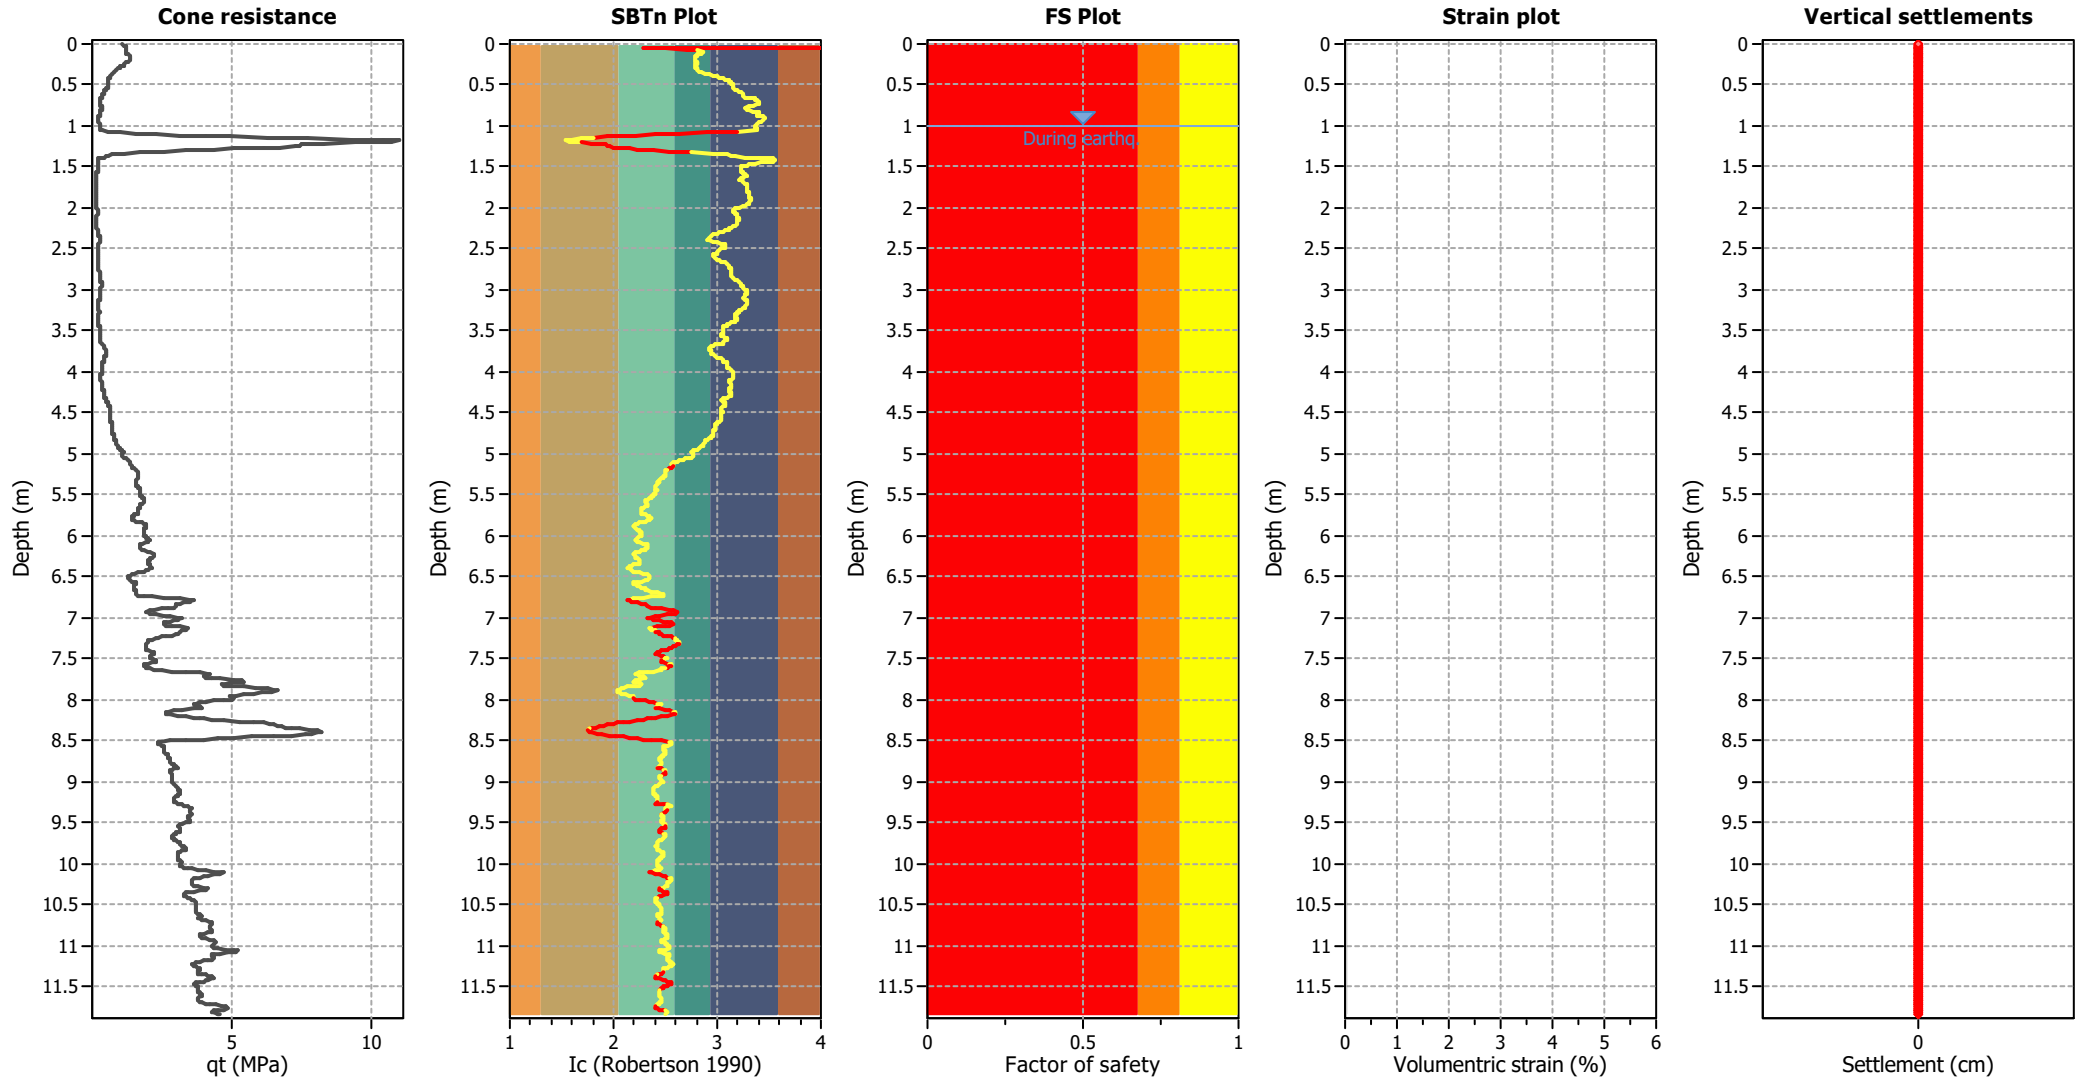

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

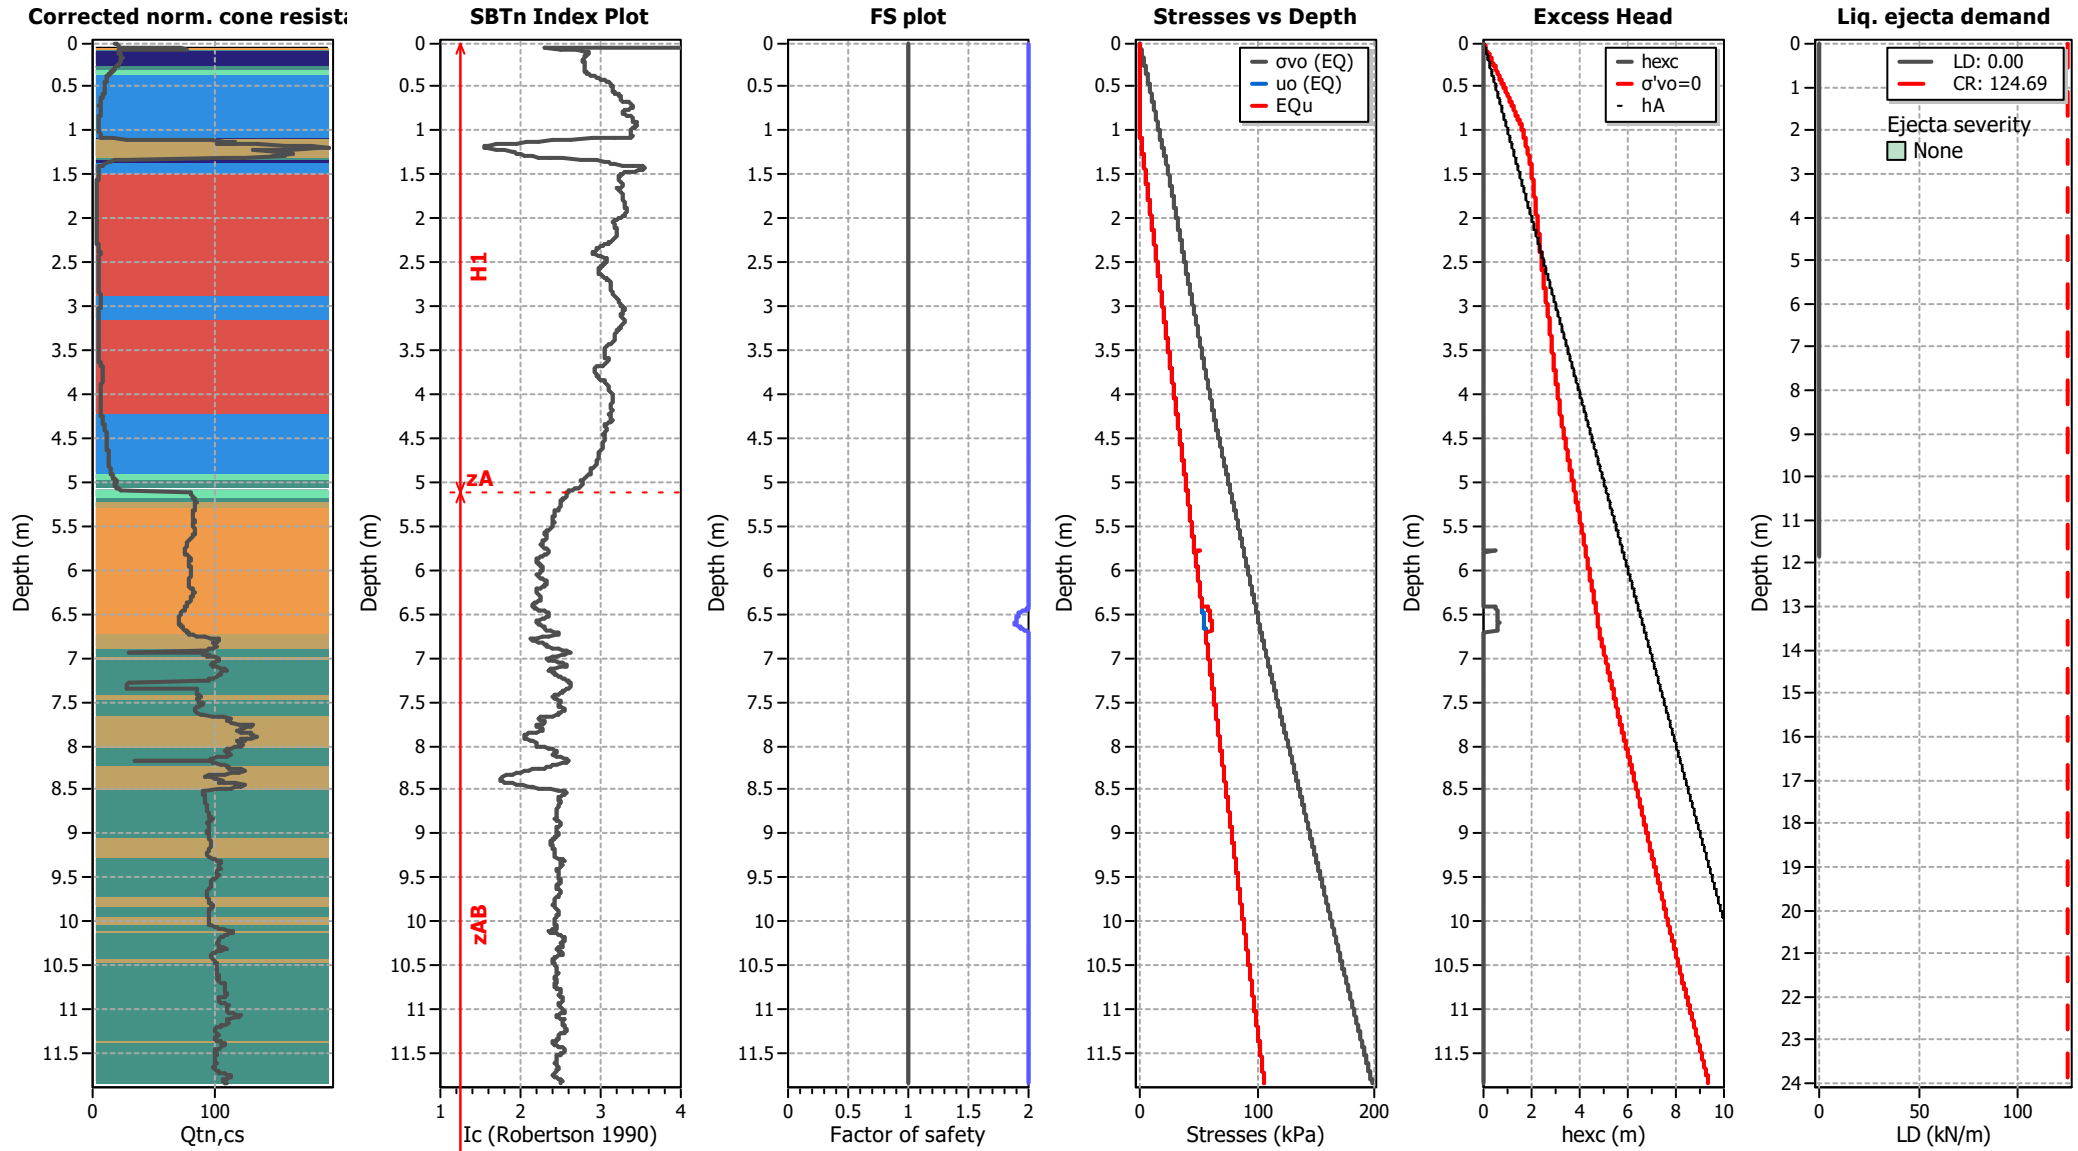

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT405

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

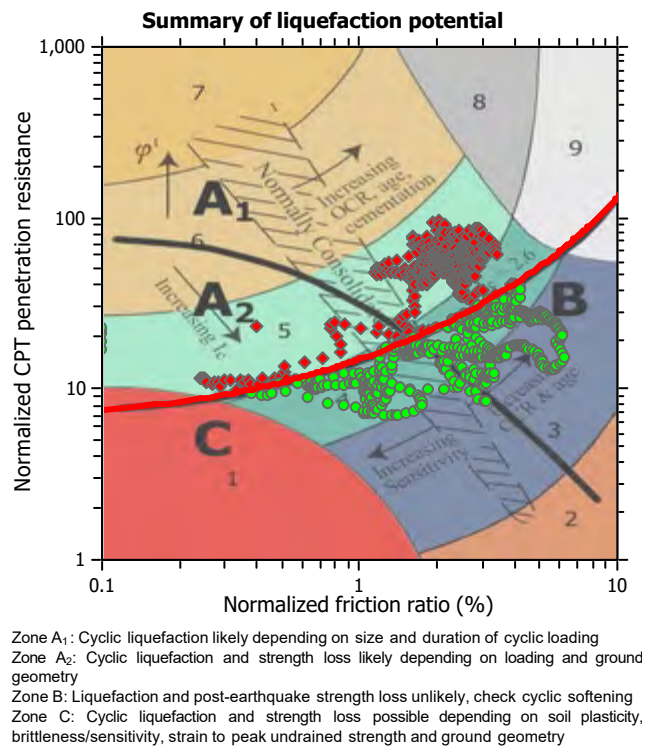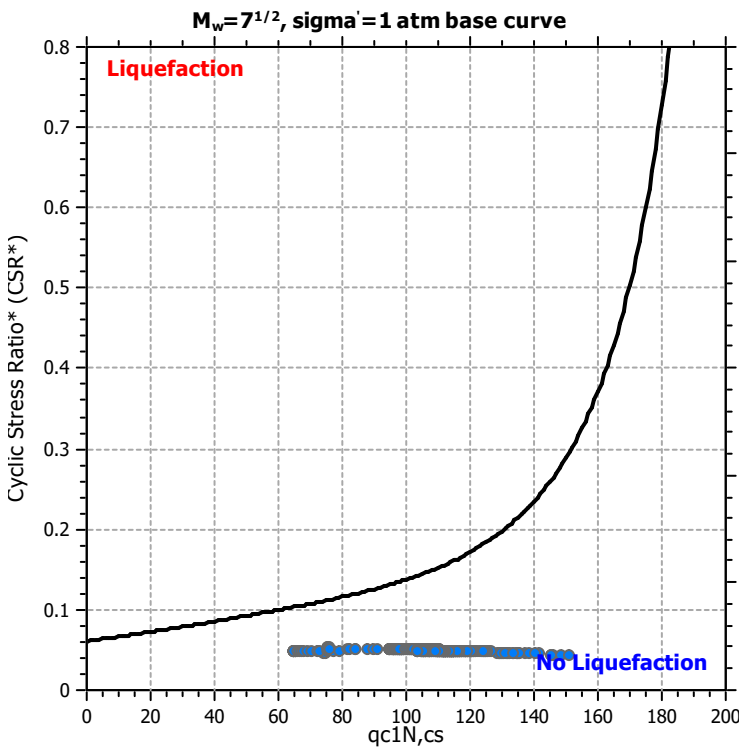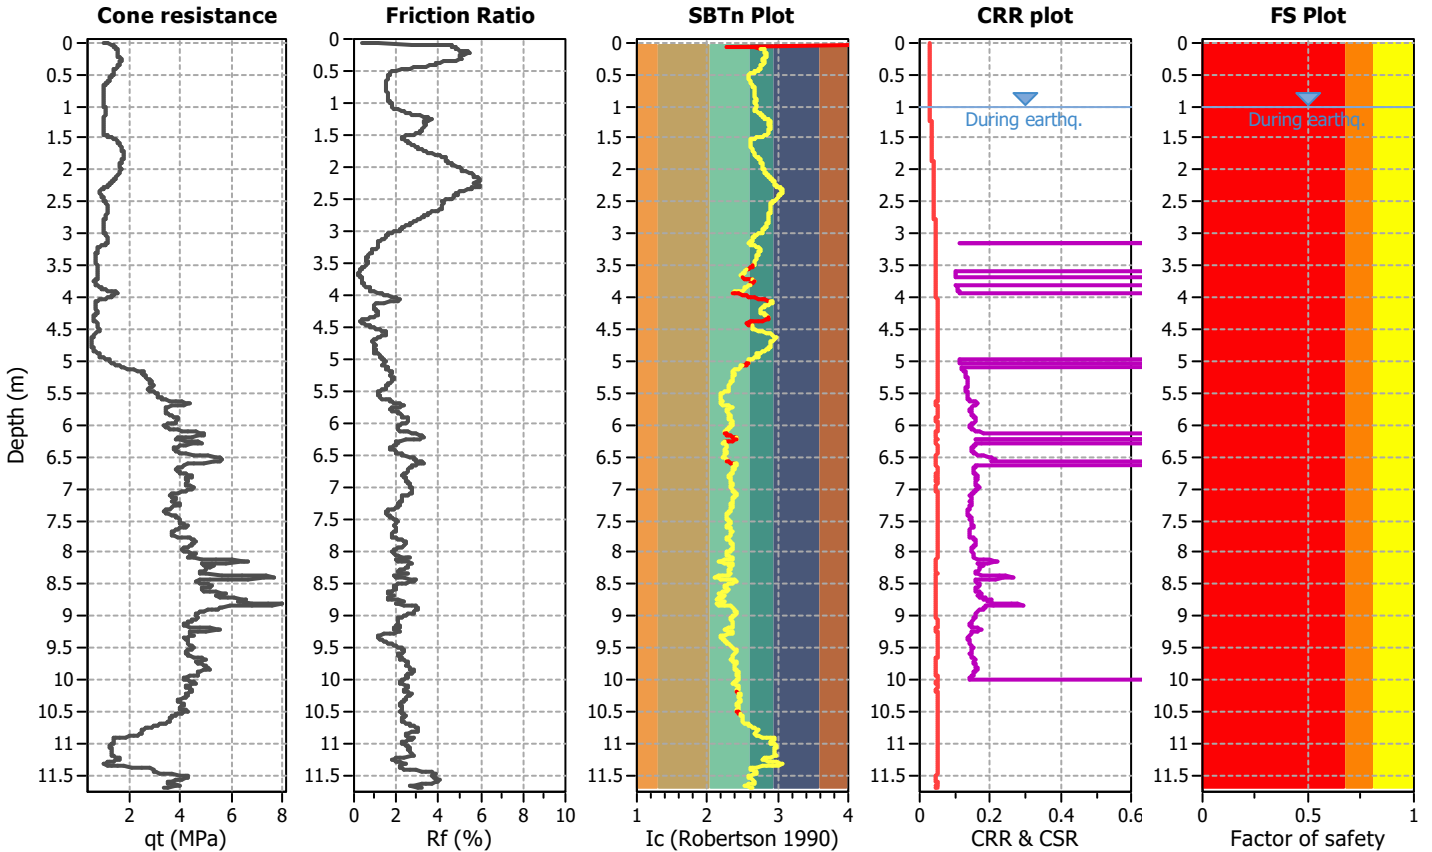

CPT basic interpretation plots

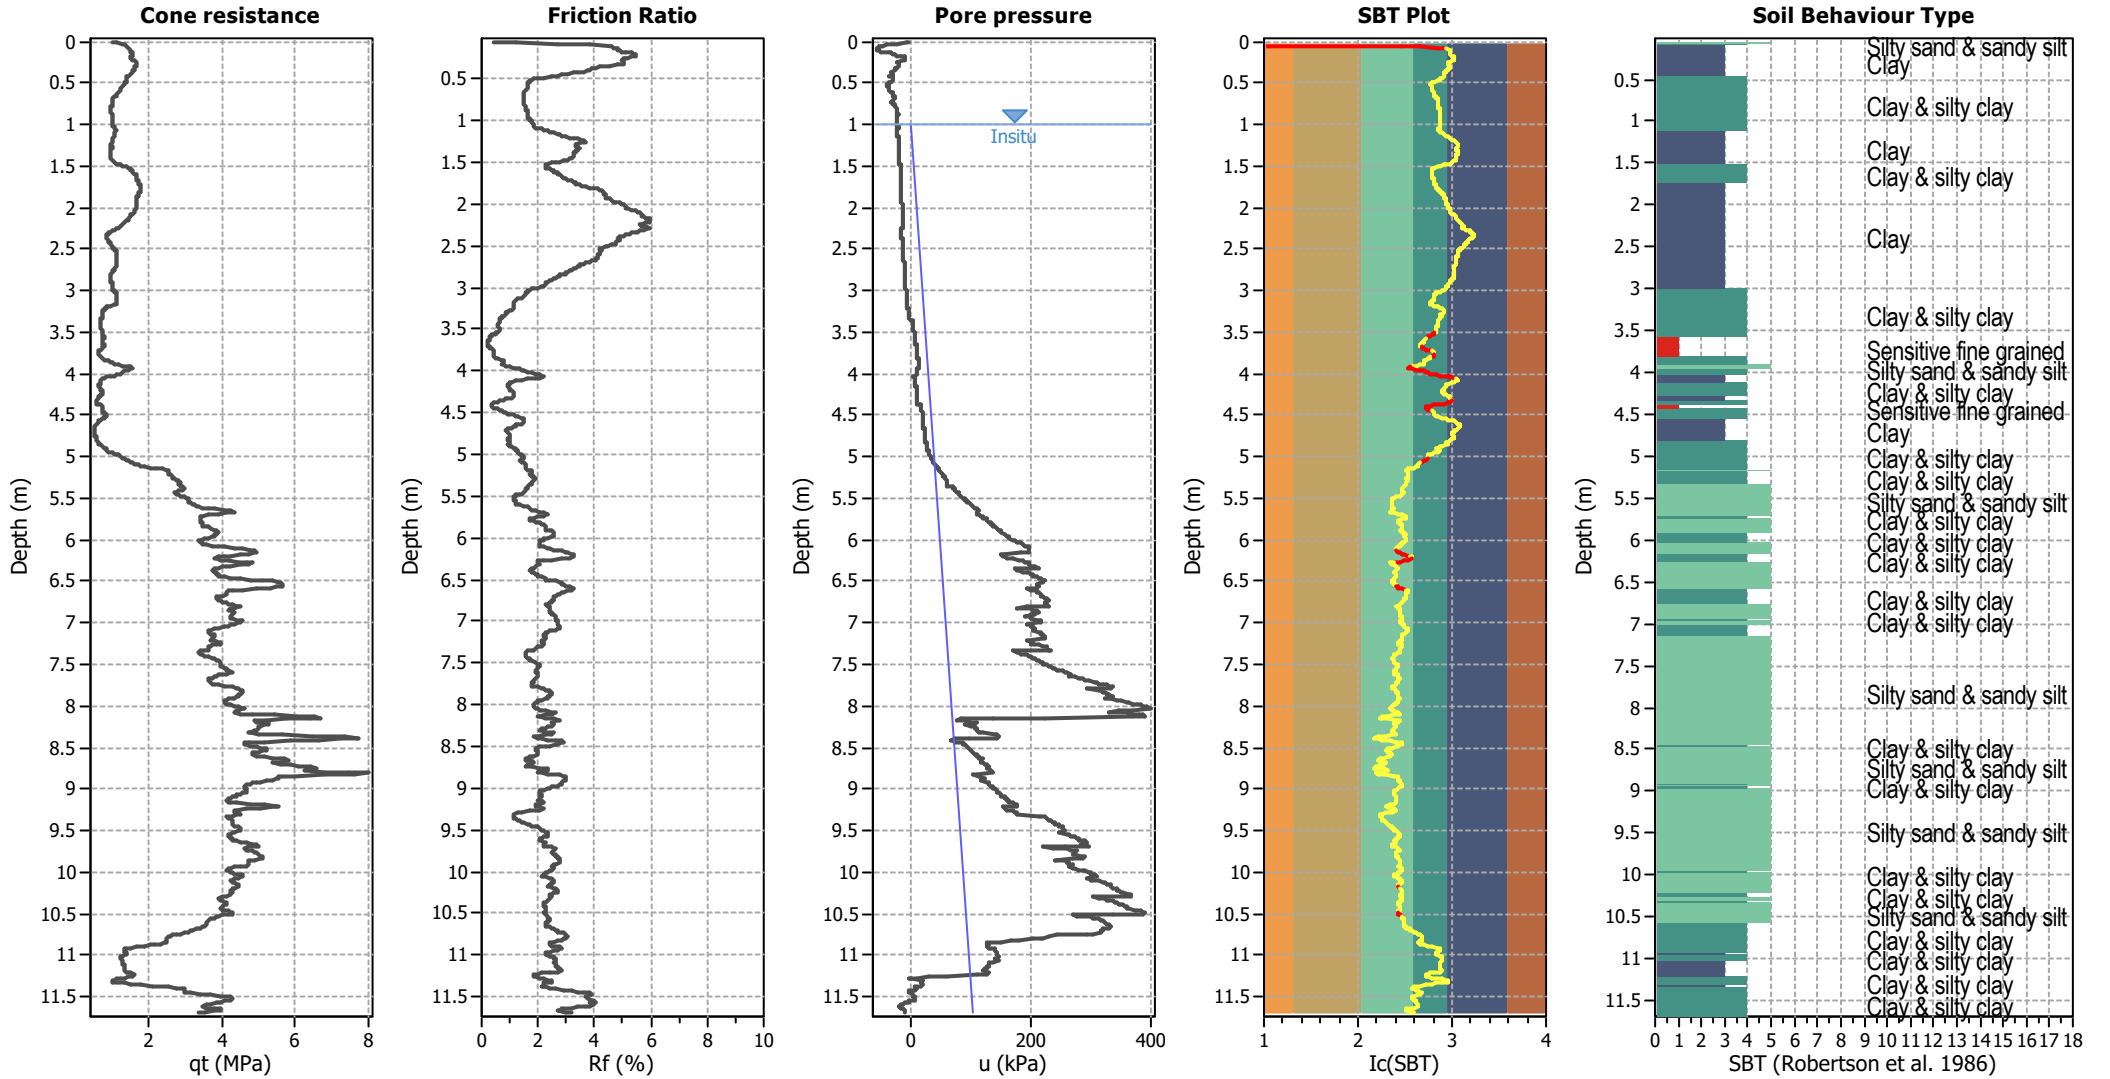


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

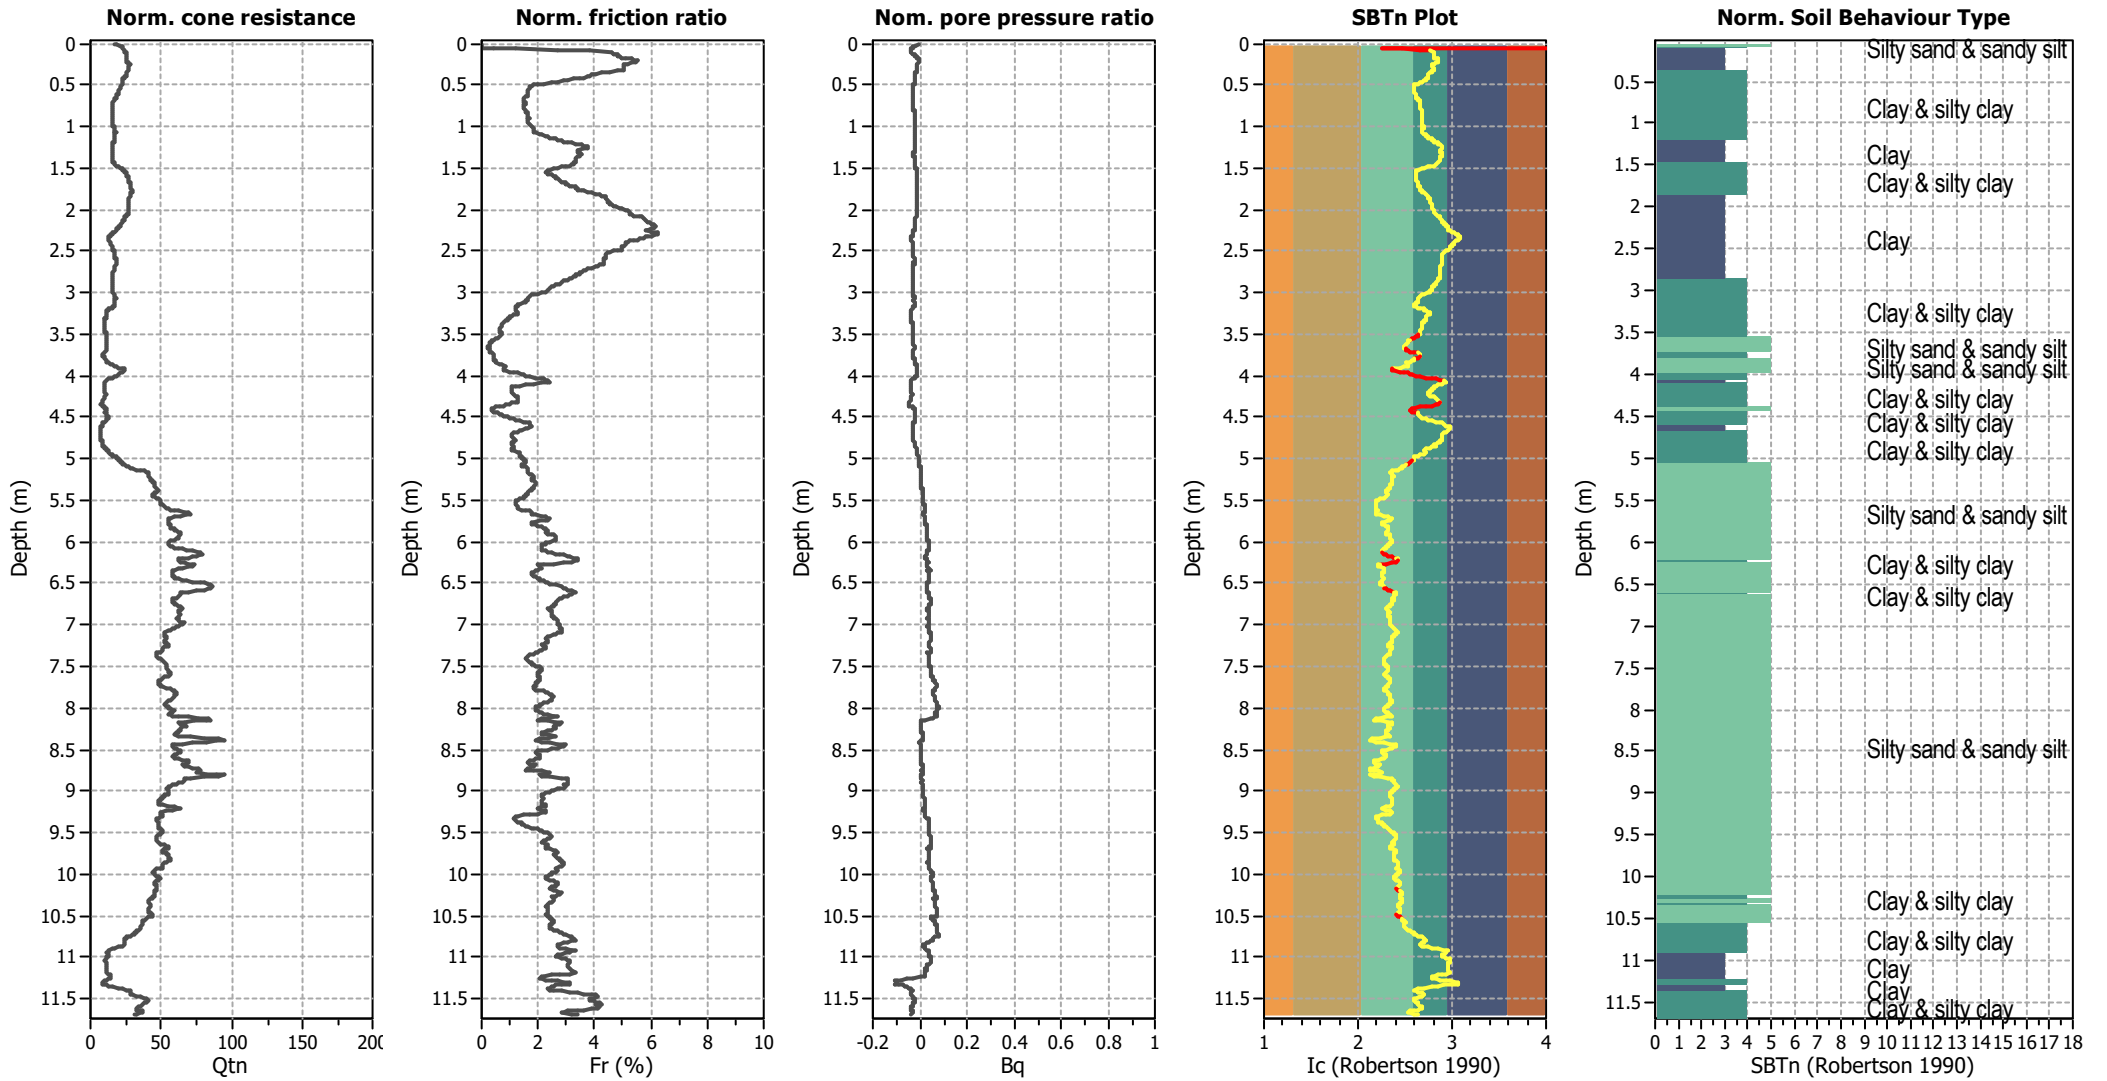


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

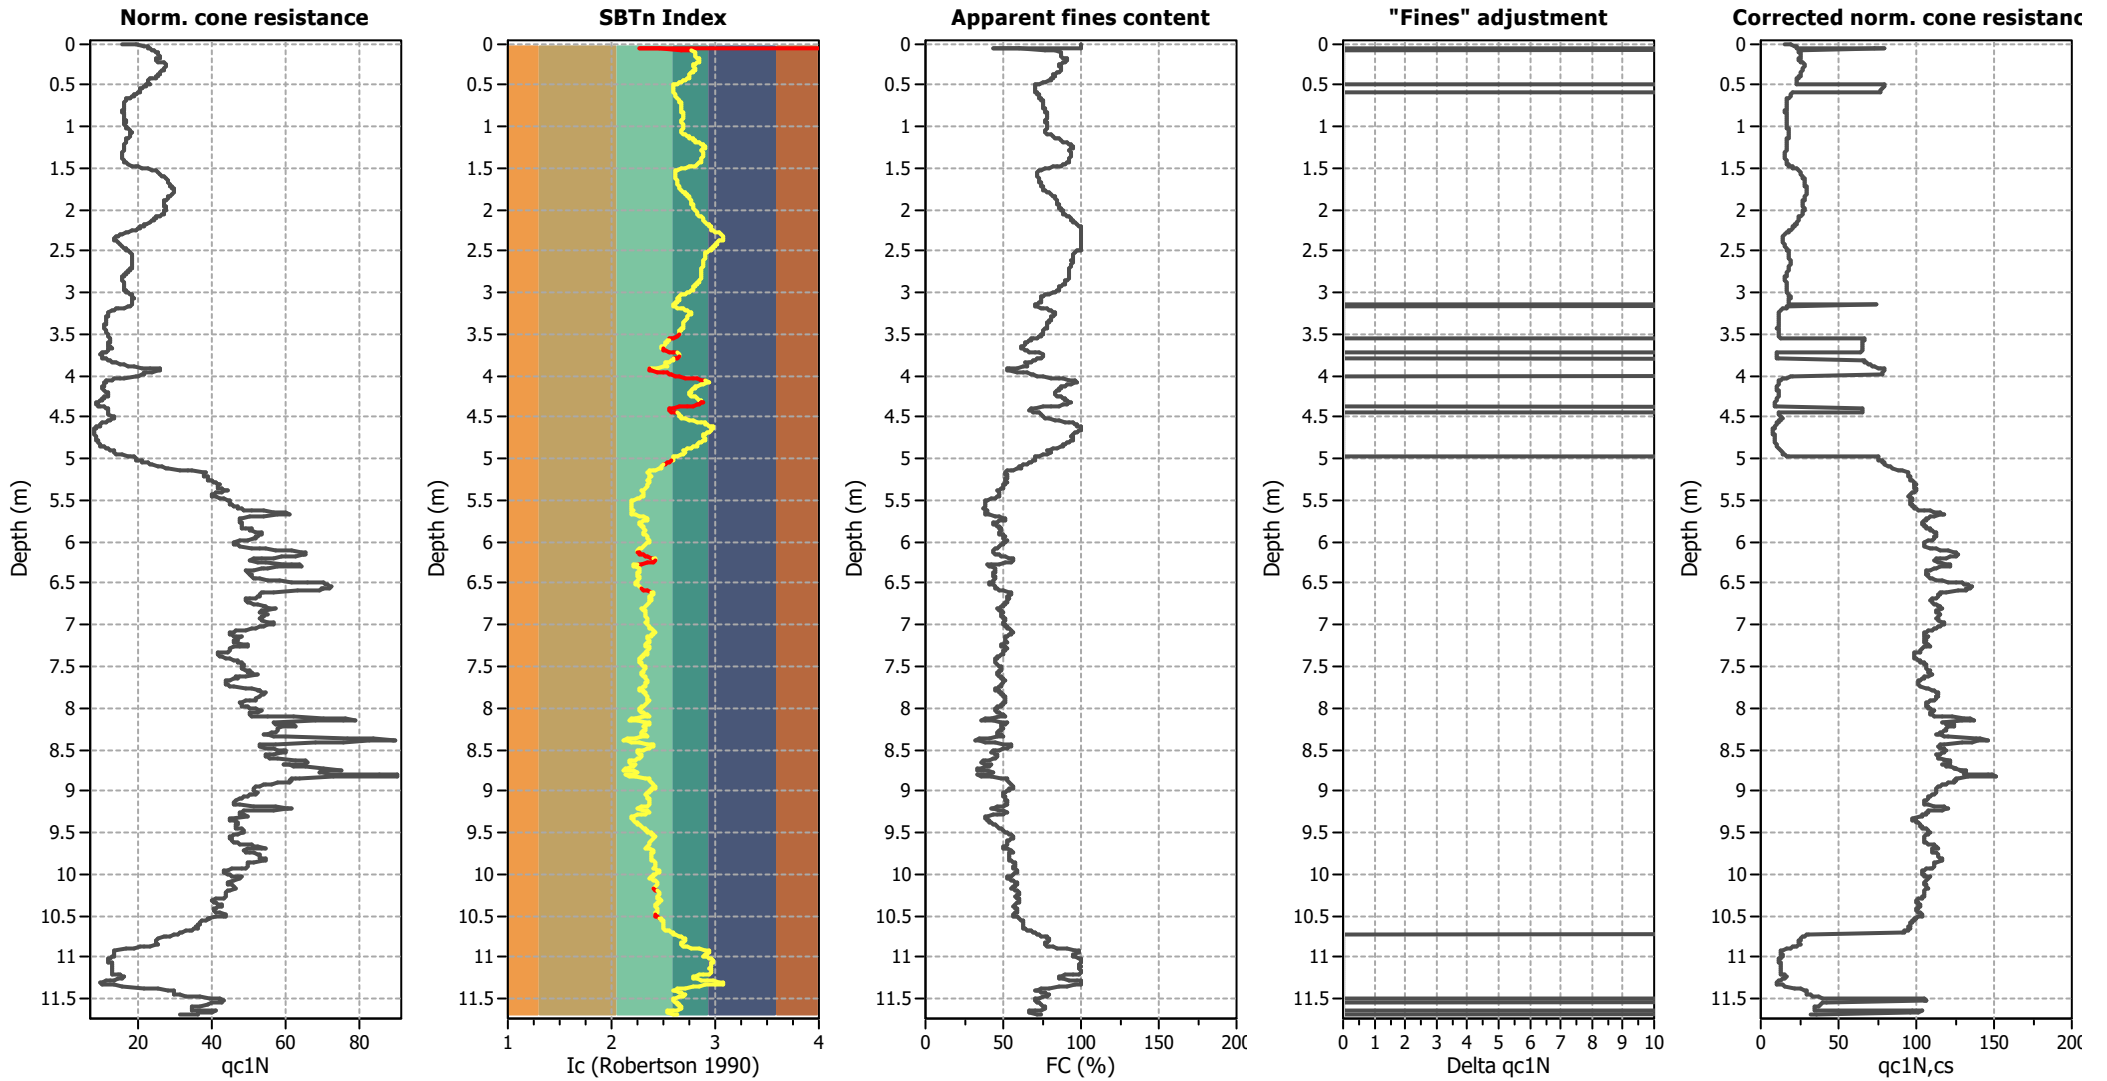

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

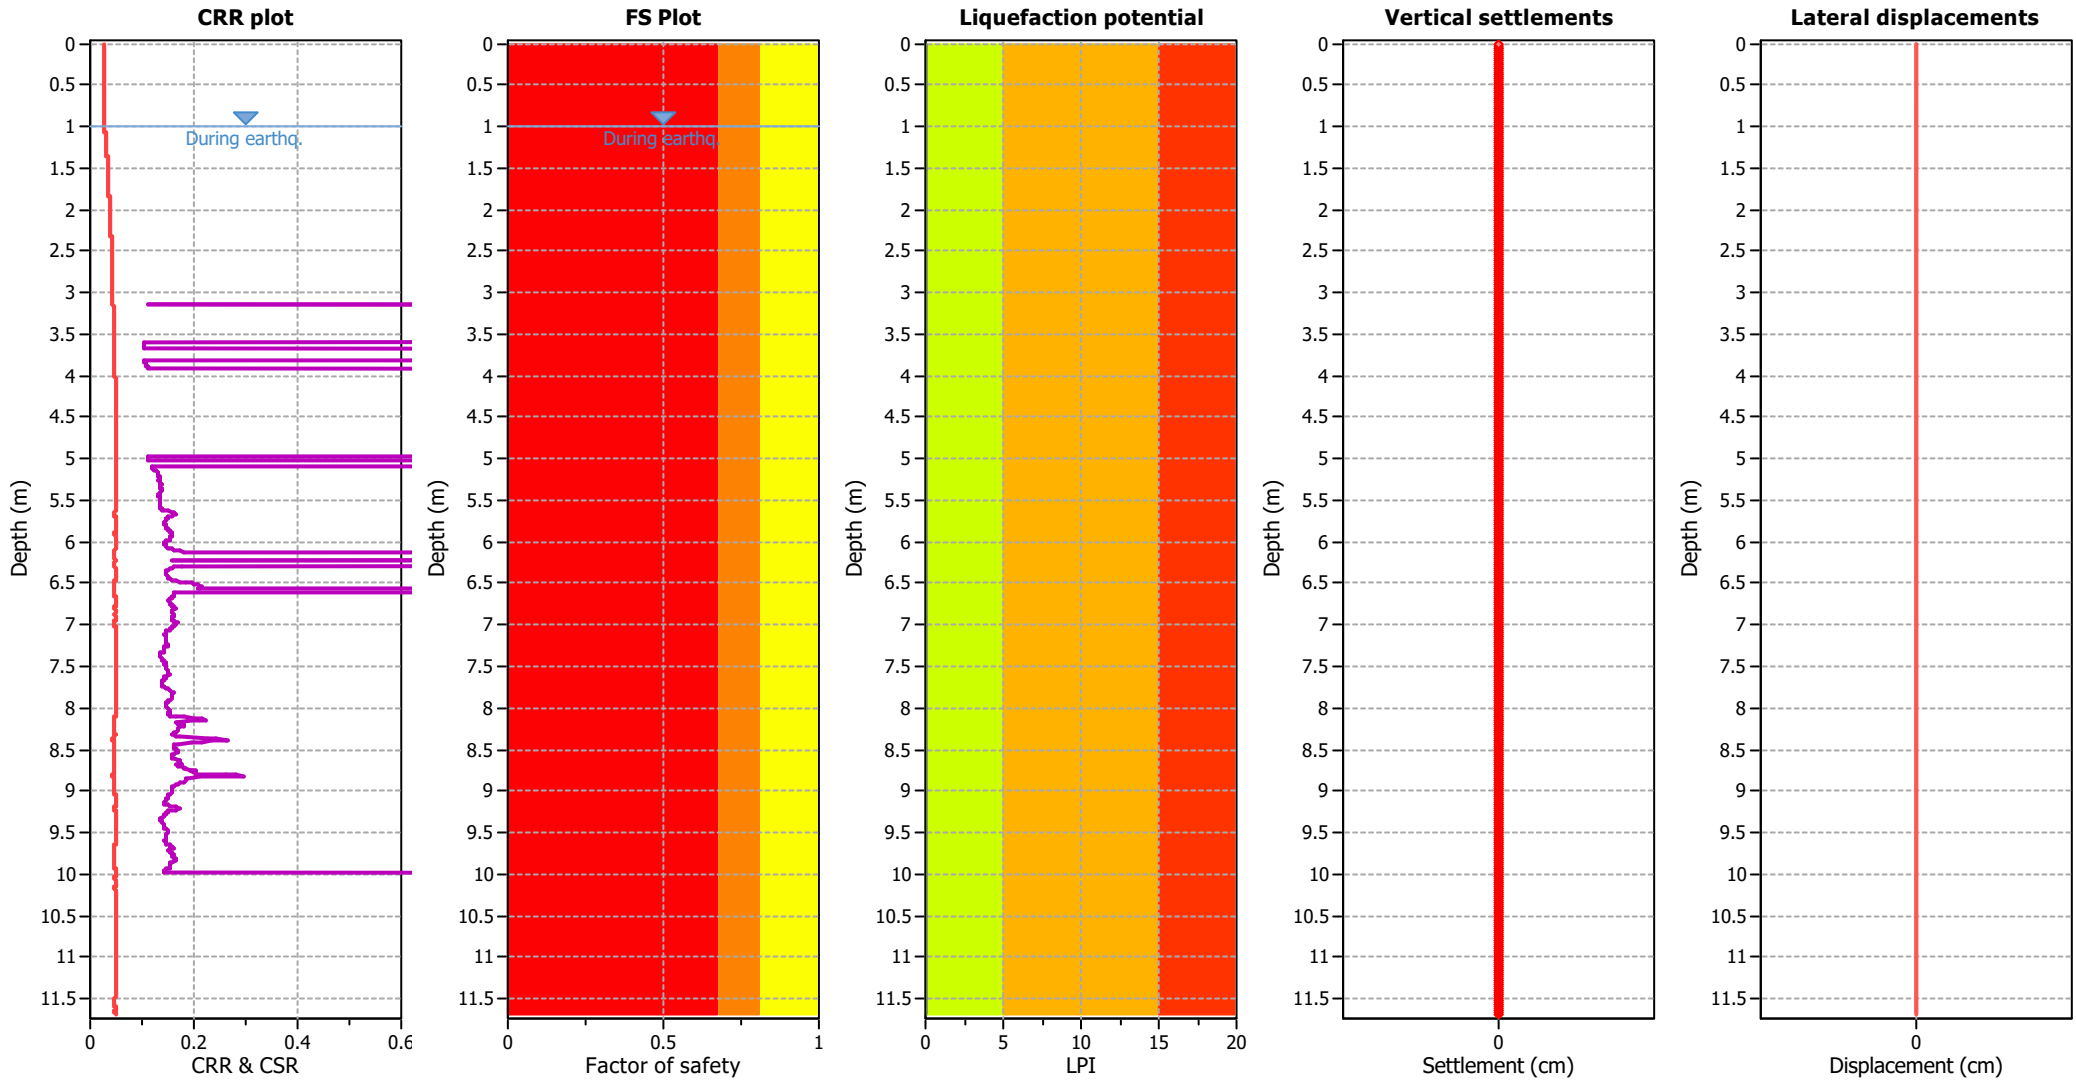

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

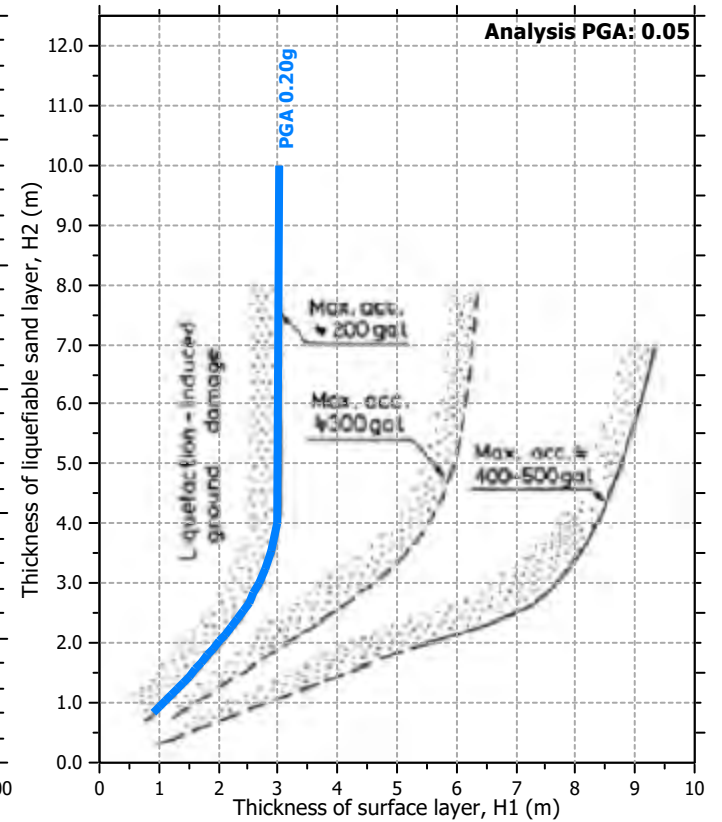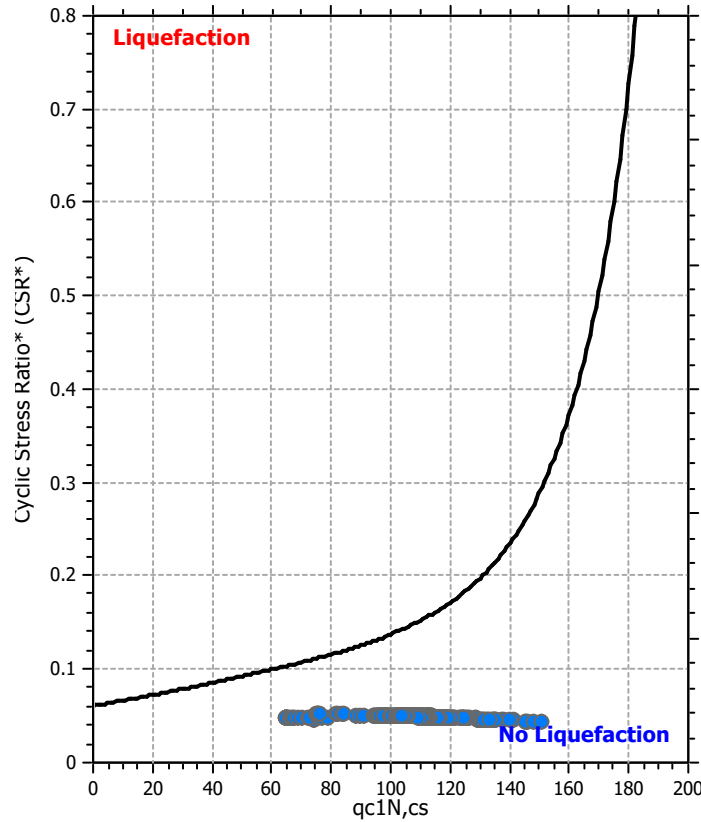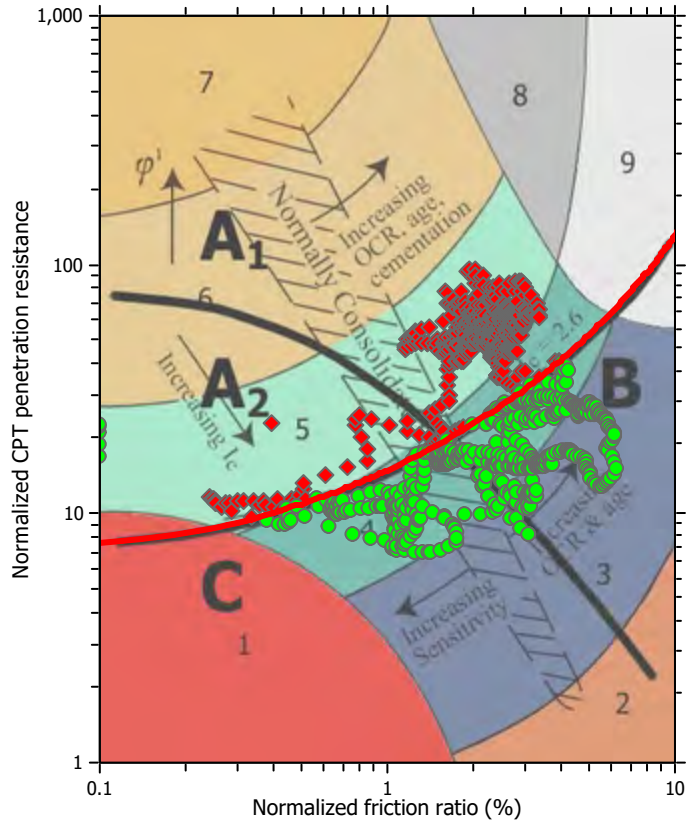

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

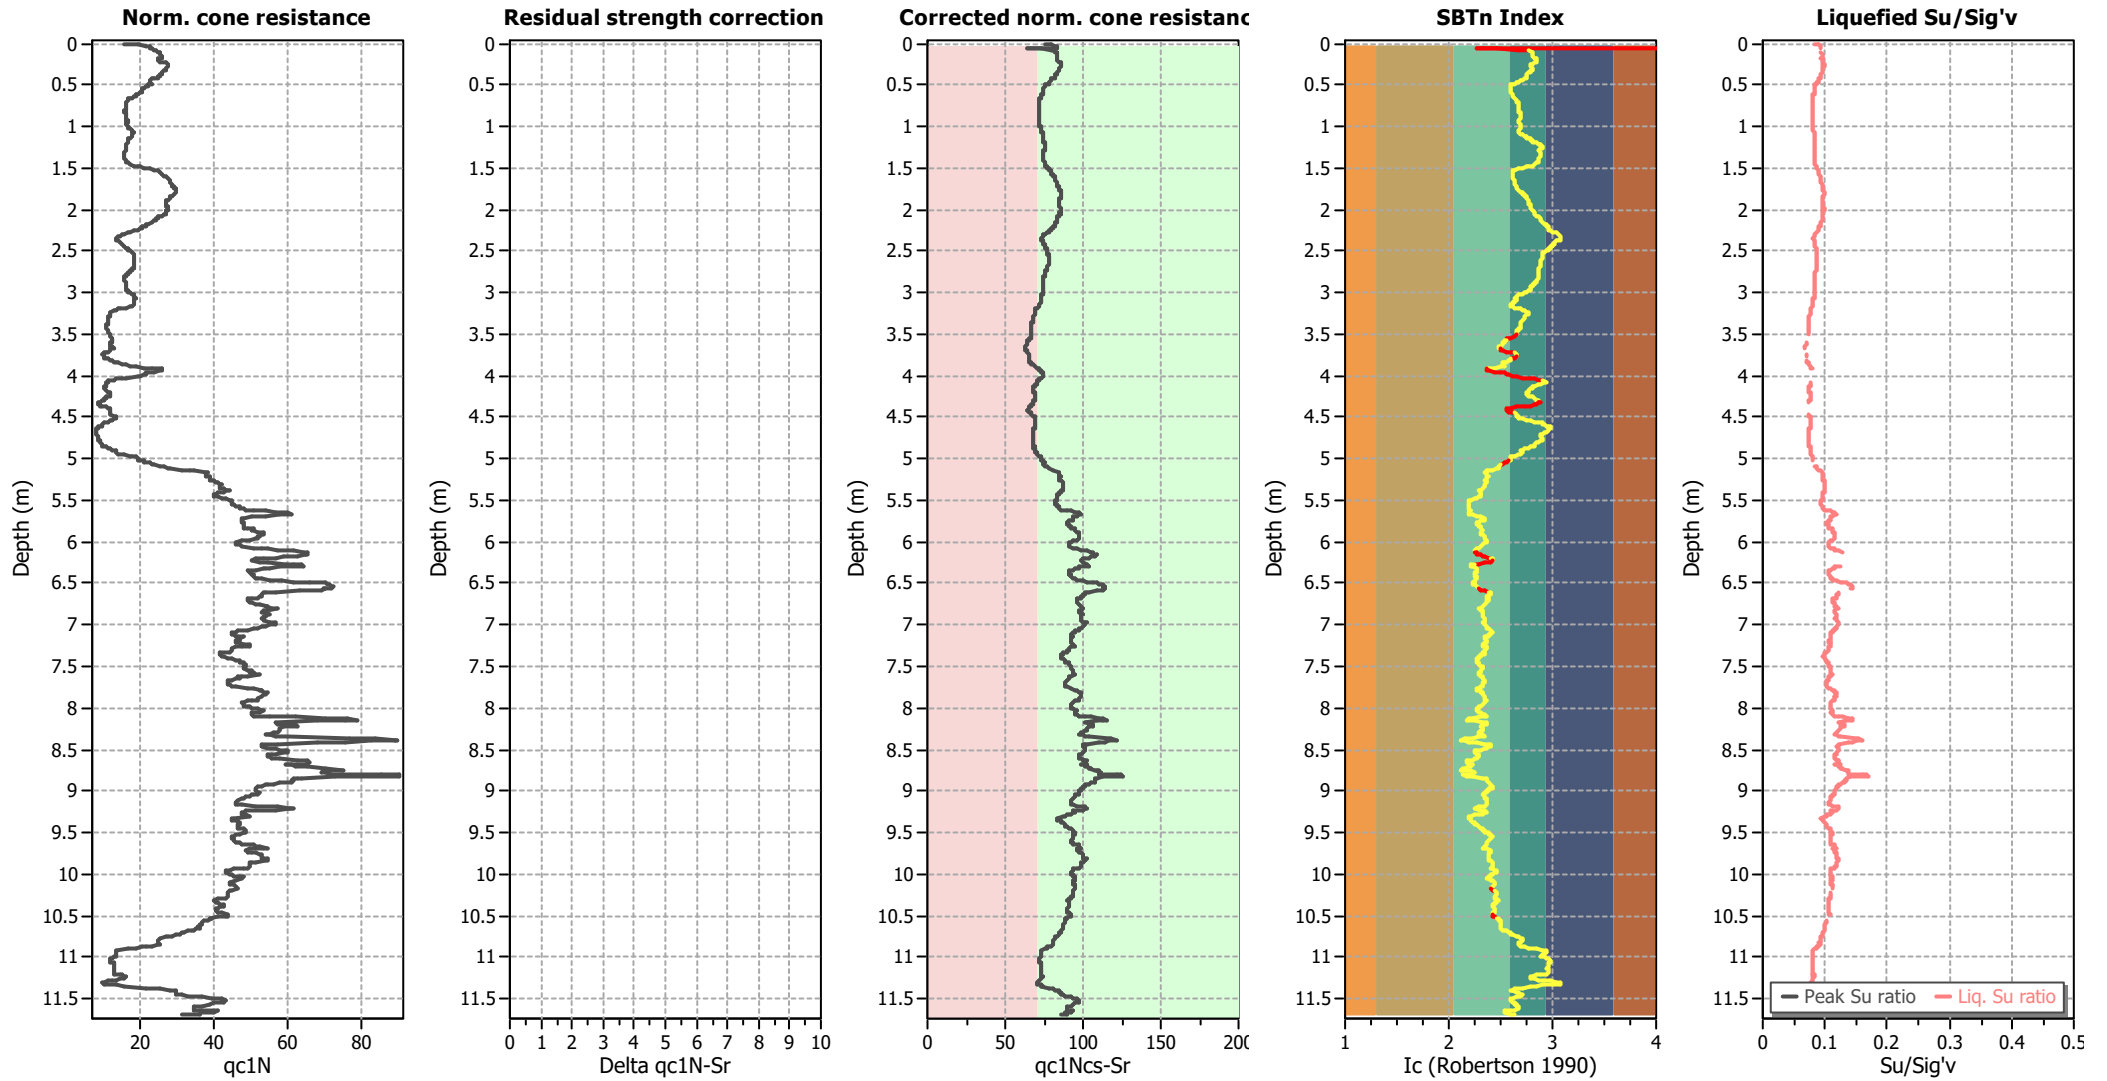

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

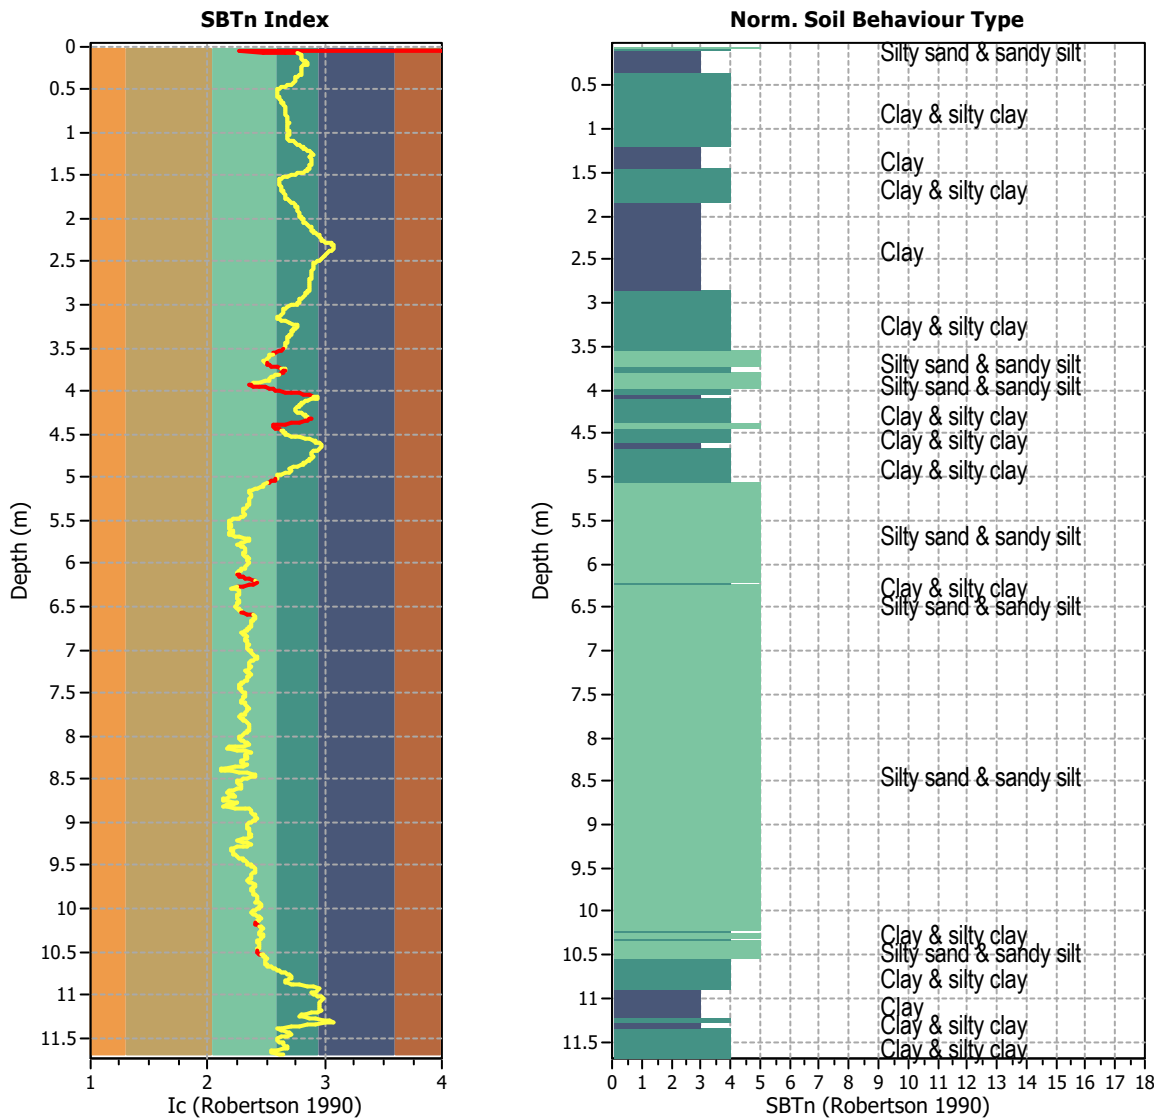


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1169
 Total points excluded: 88
 Exclusion percentage: 7.53%
 Number of layers detected: 13


Estimation of post-earthquake settlements

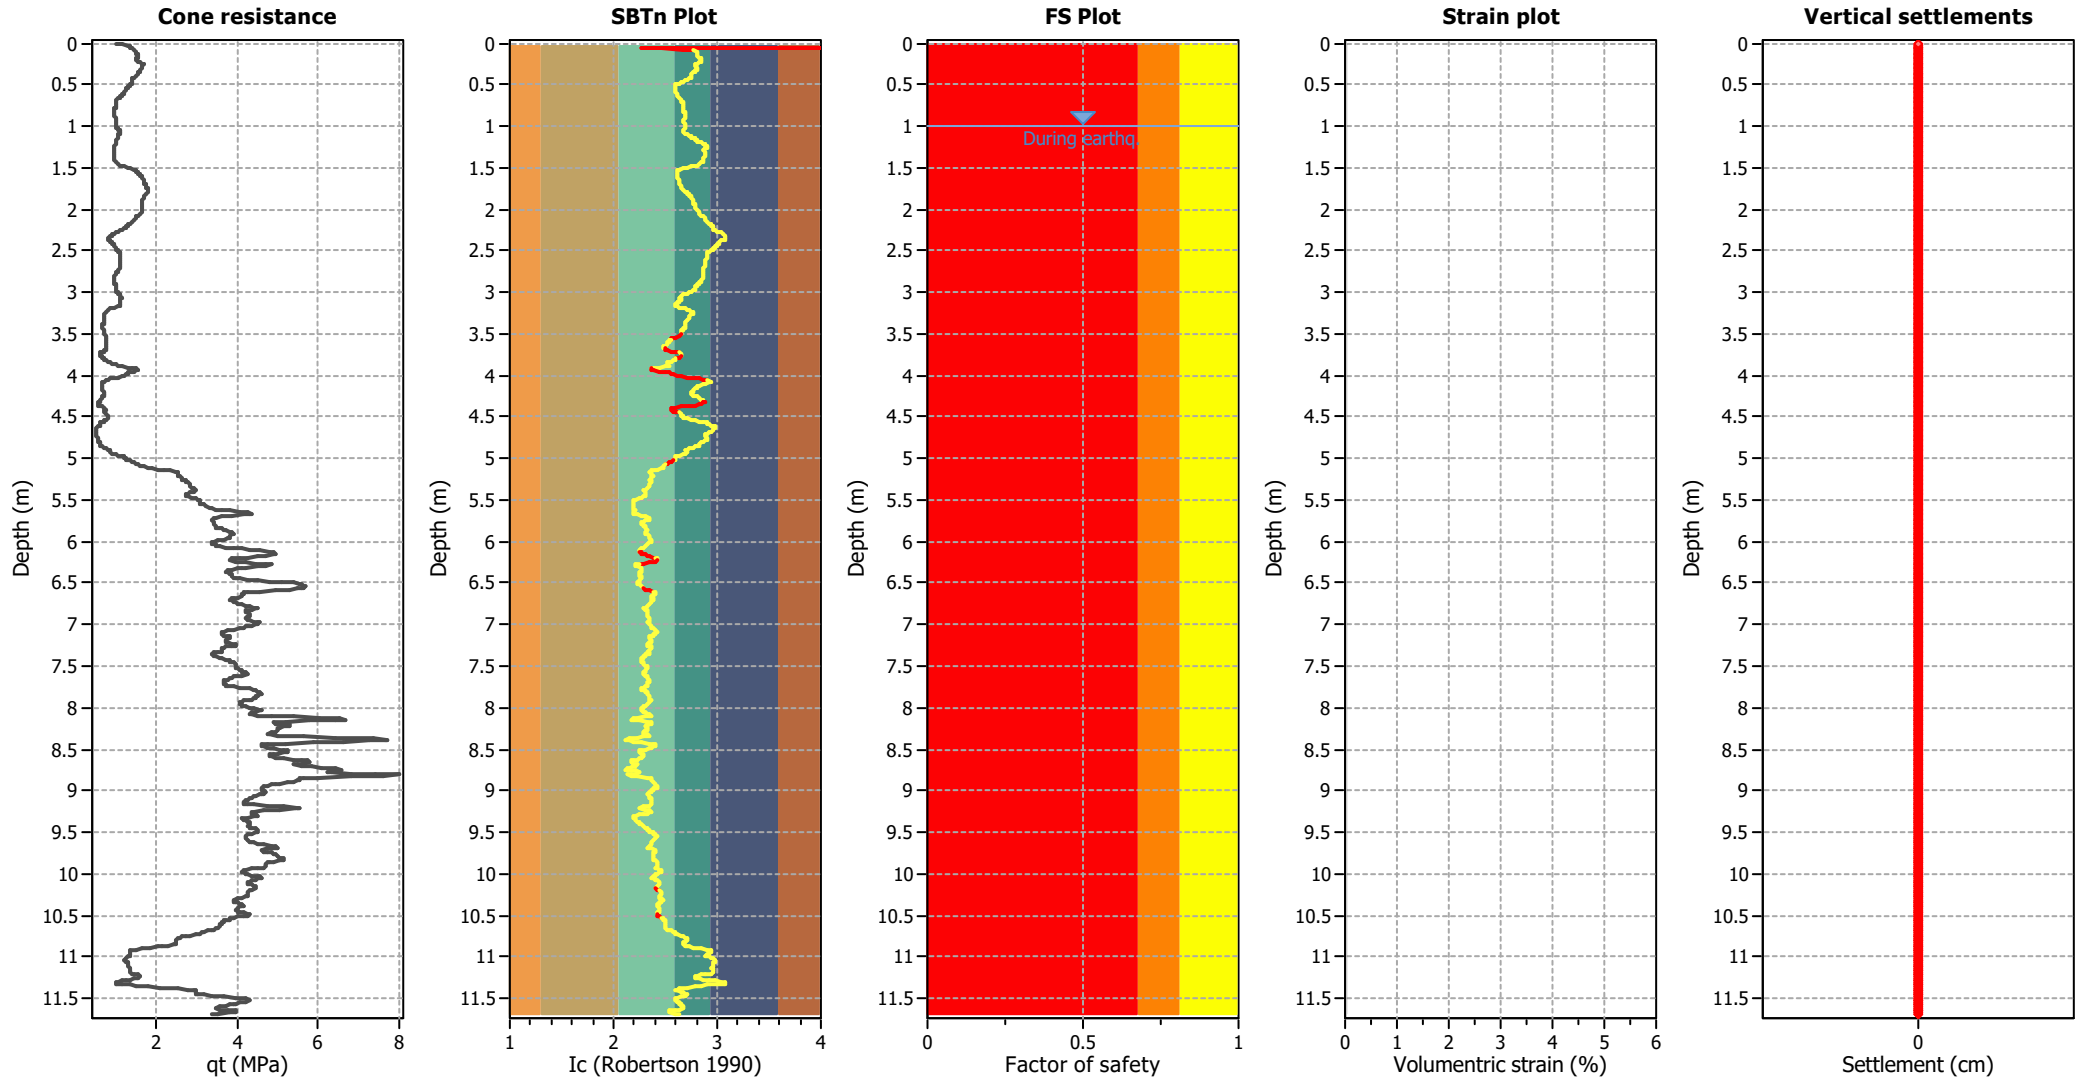

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

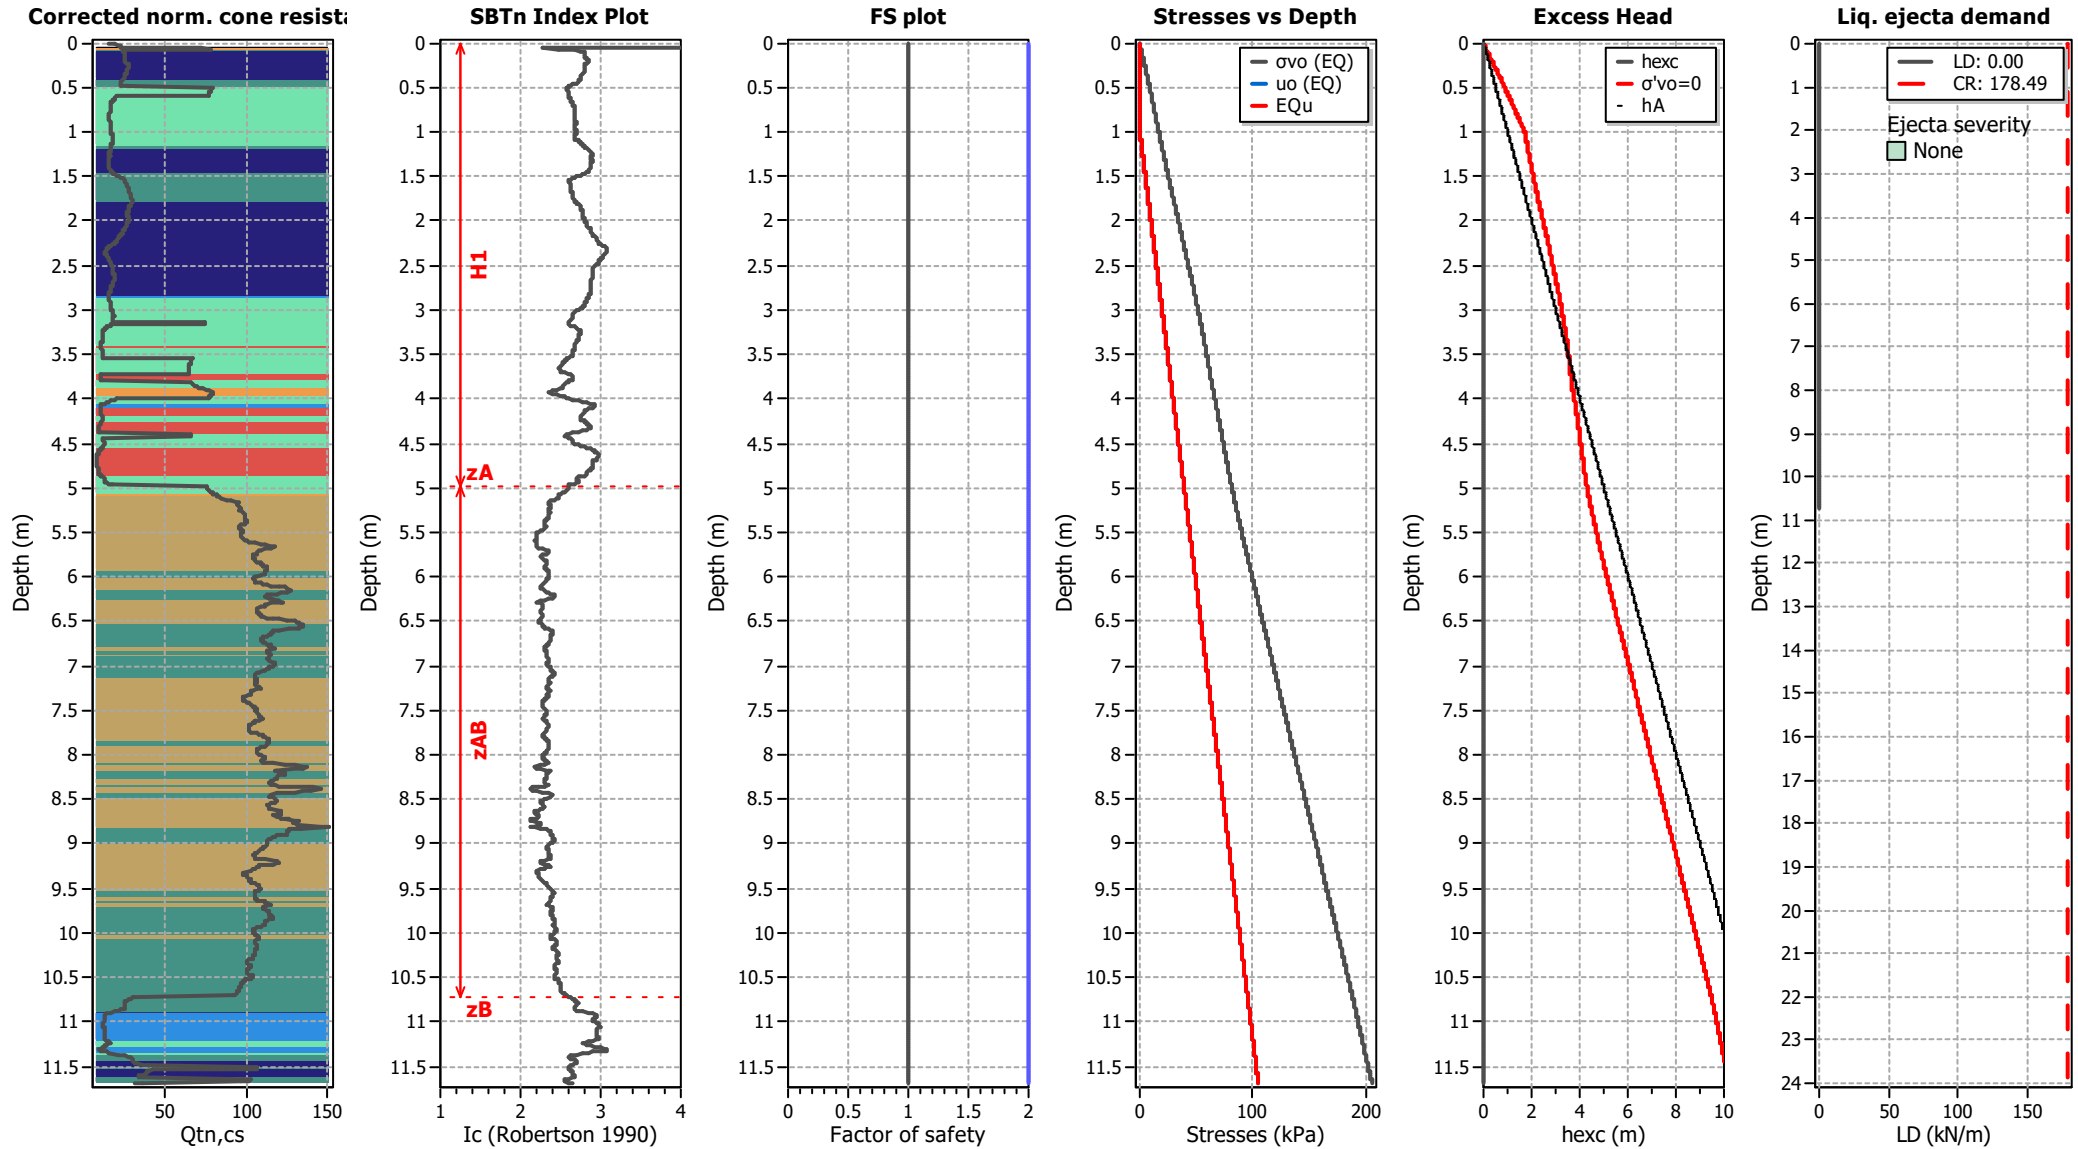

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT406

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

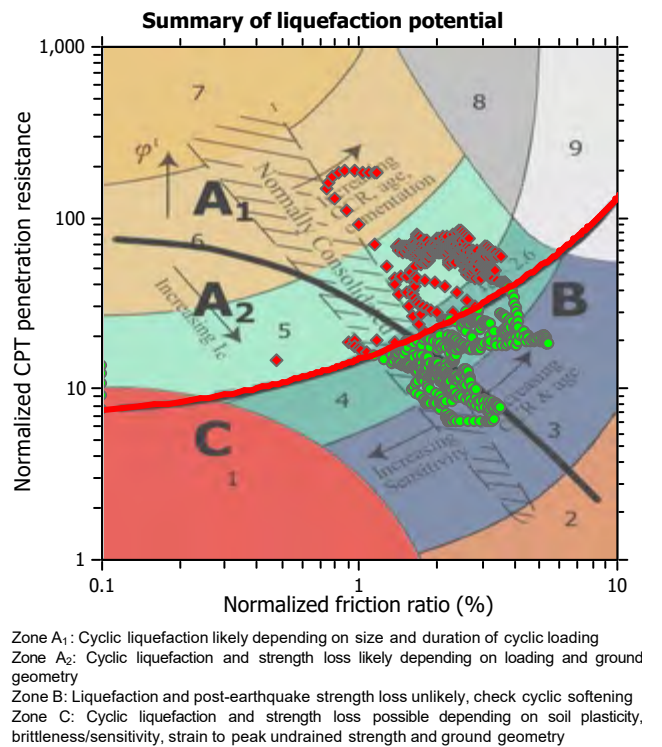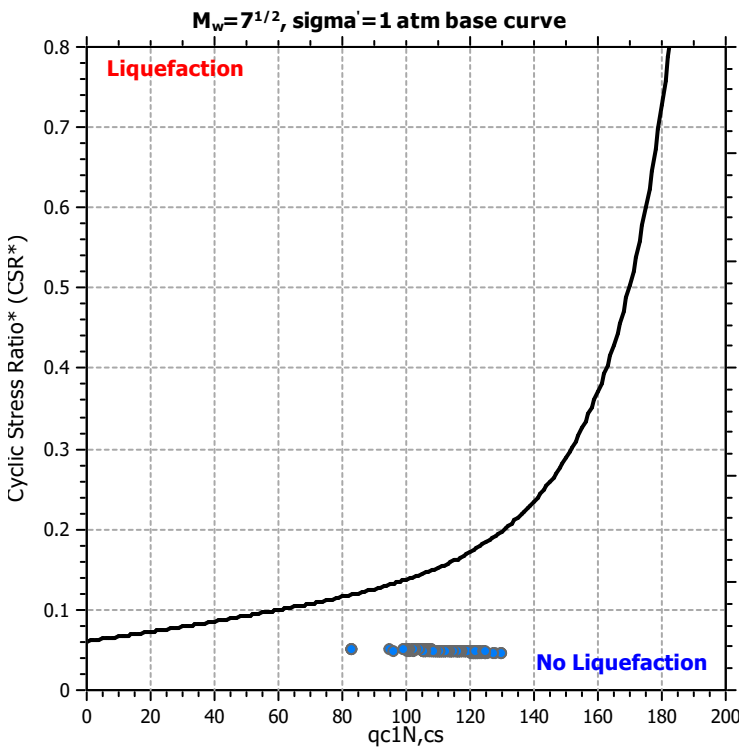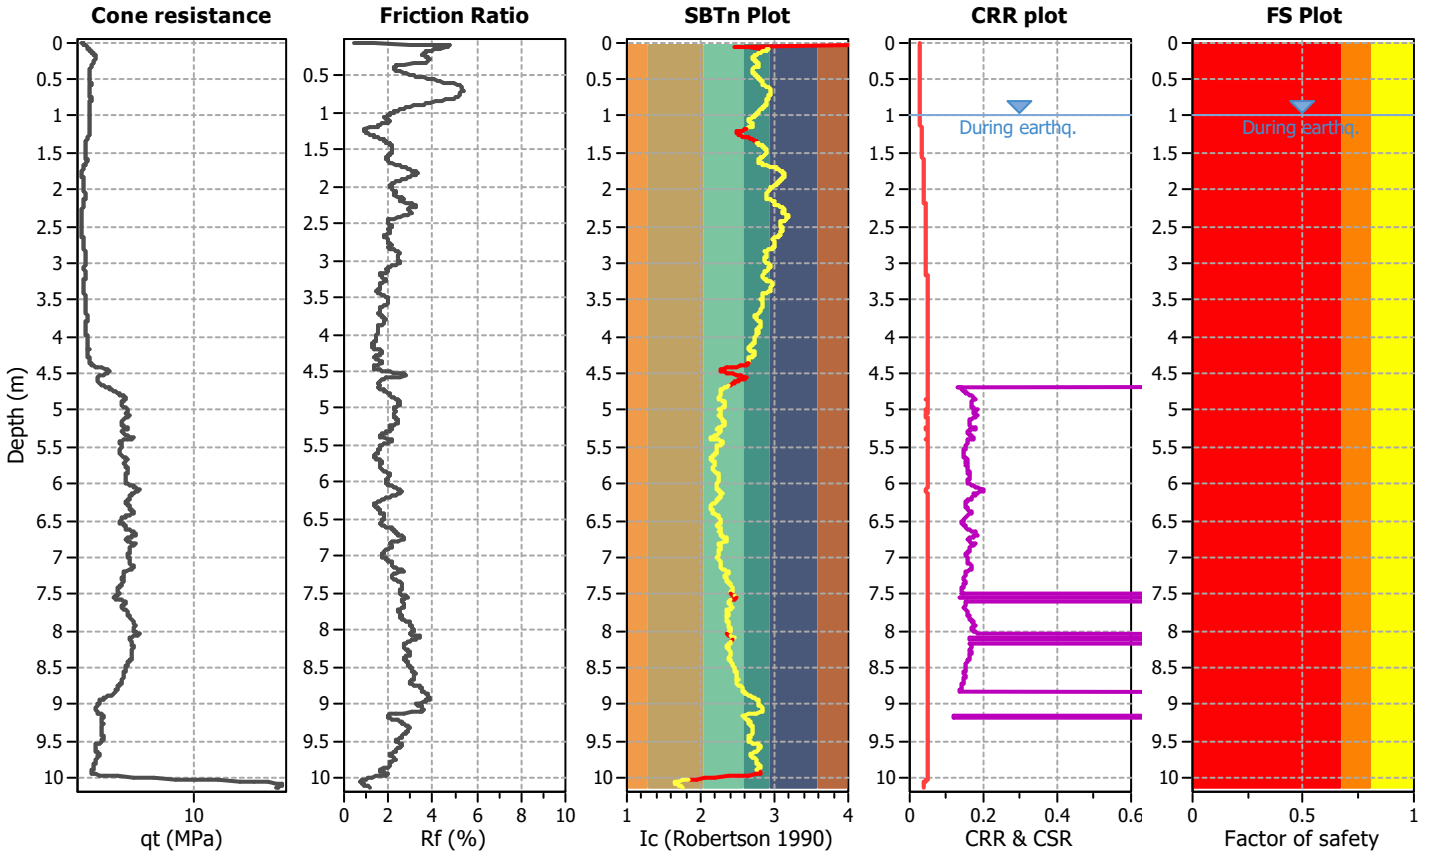

CPT basic interpretation plots

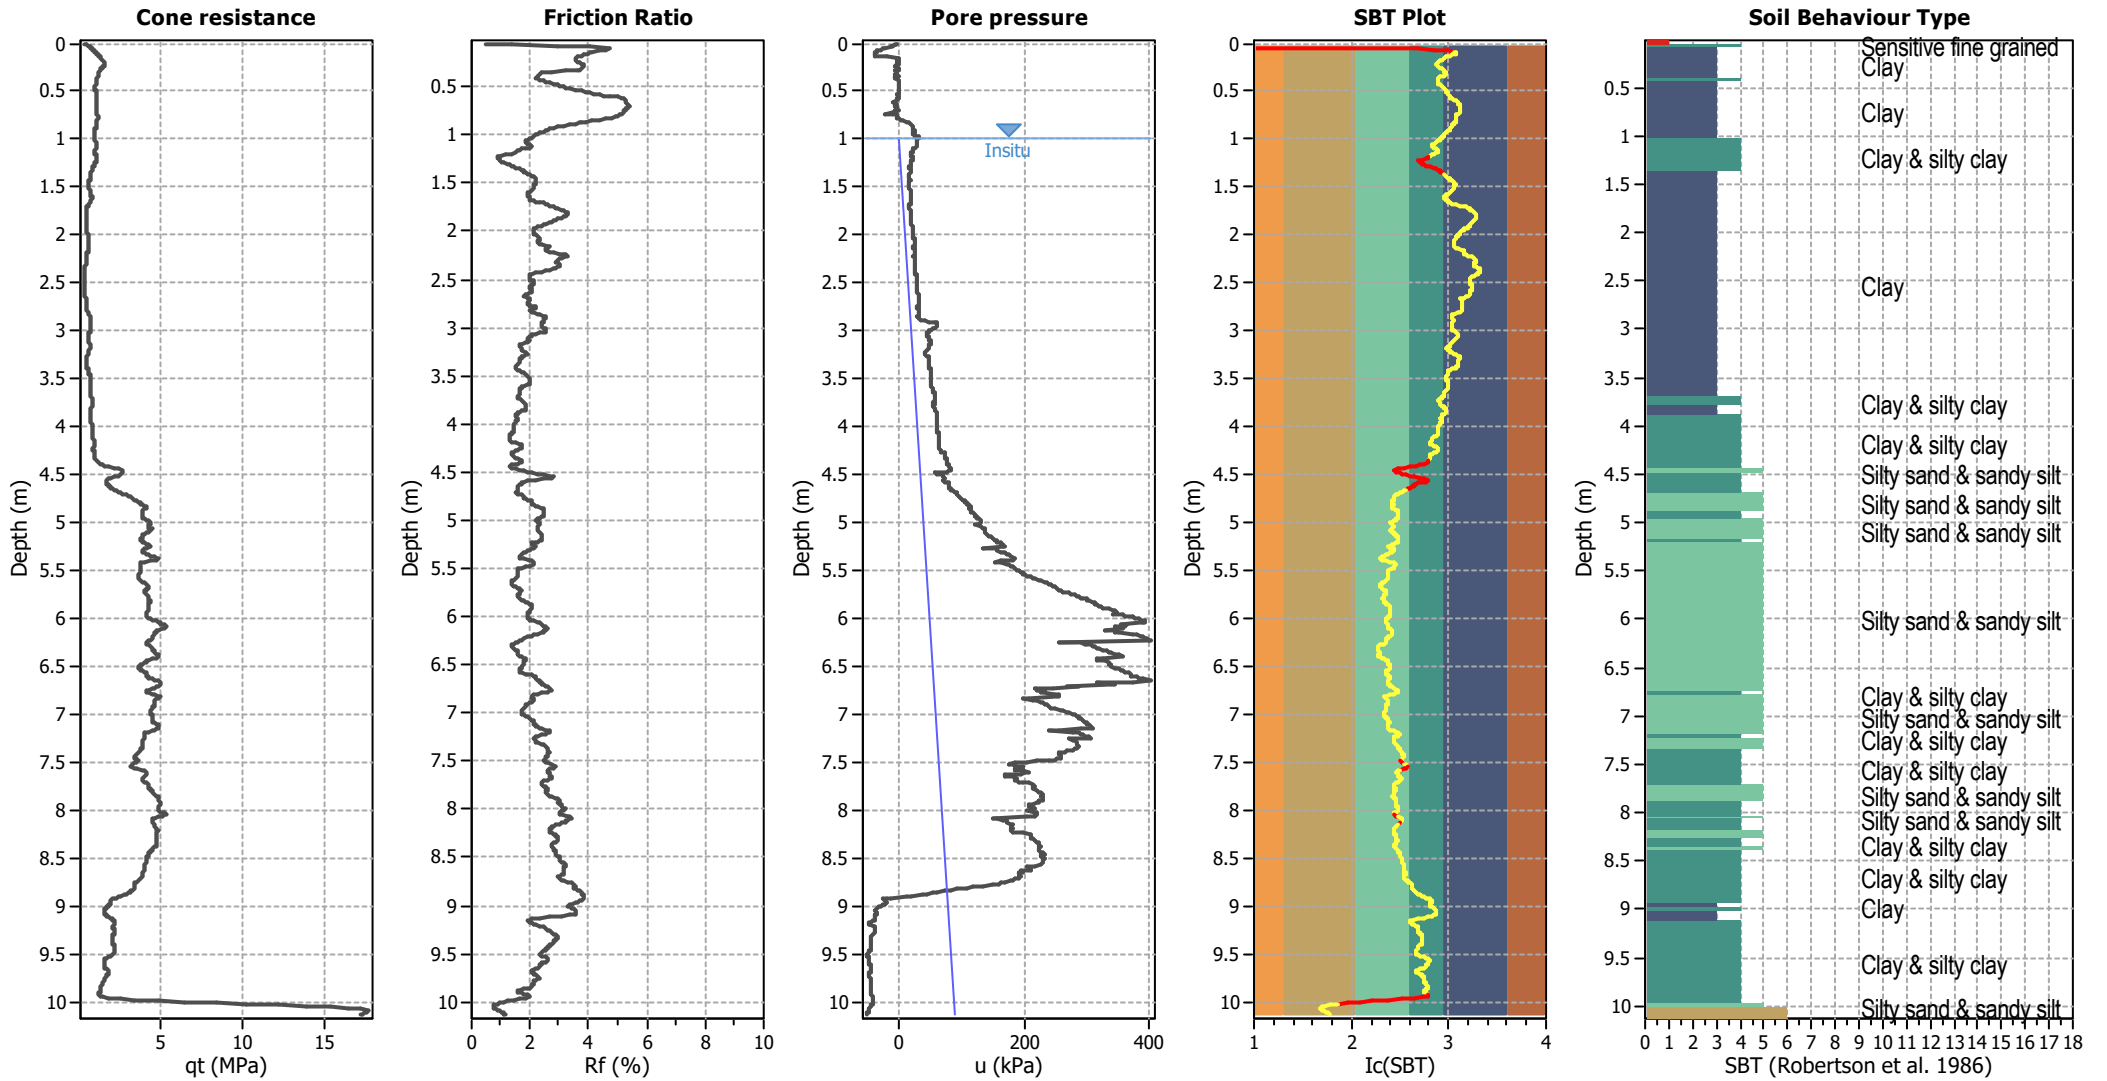


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

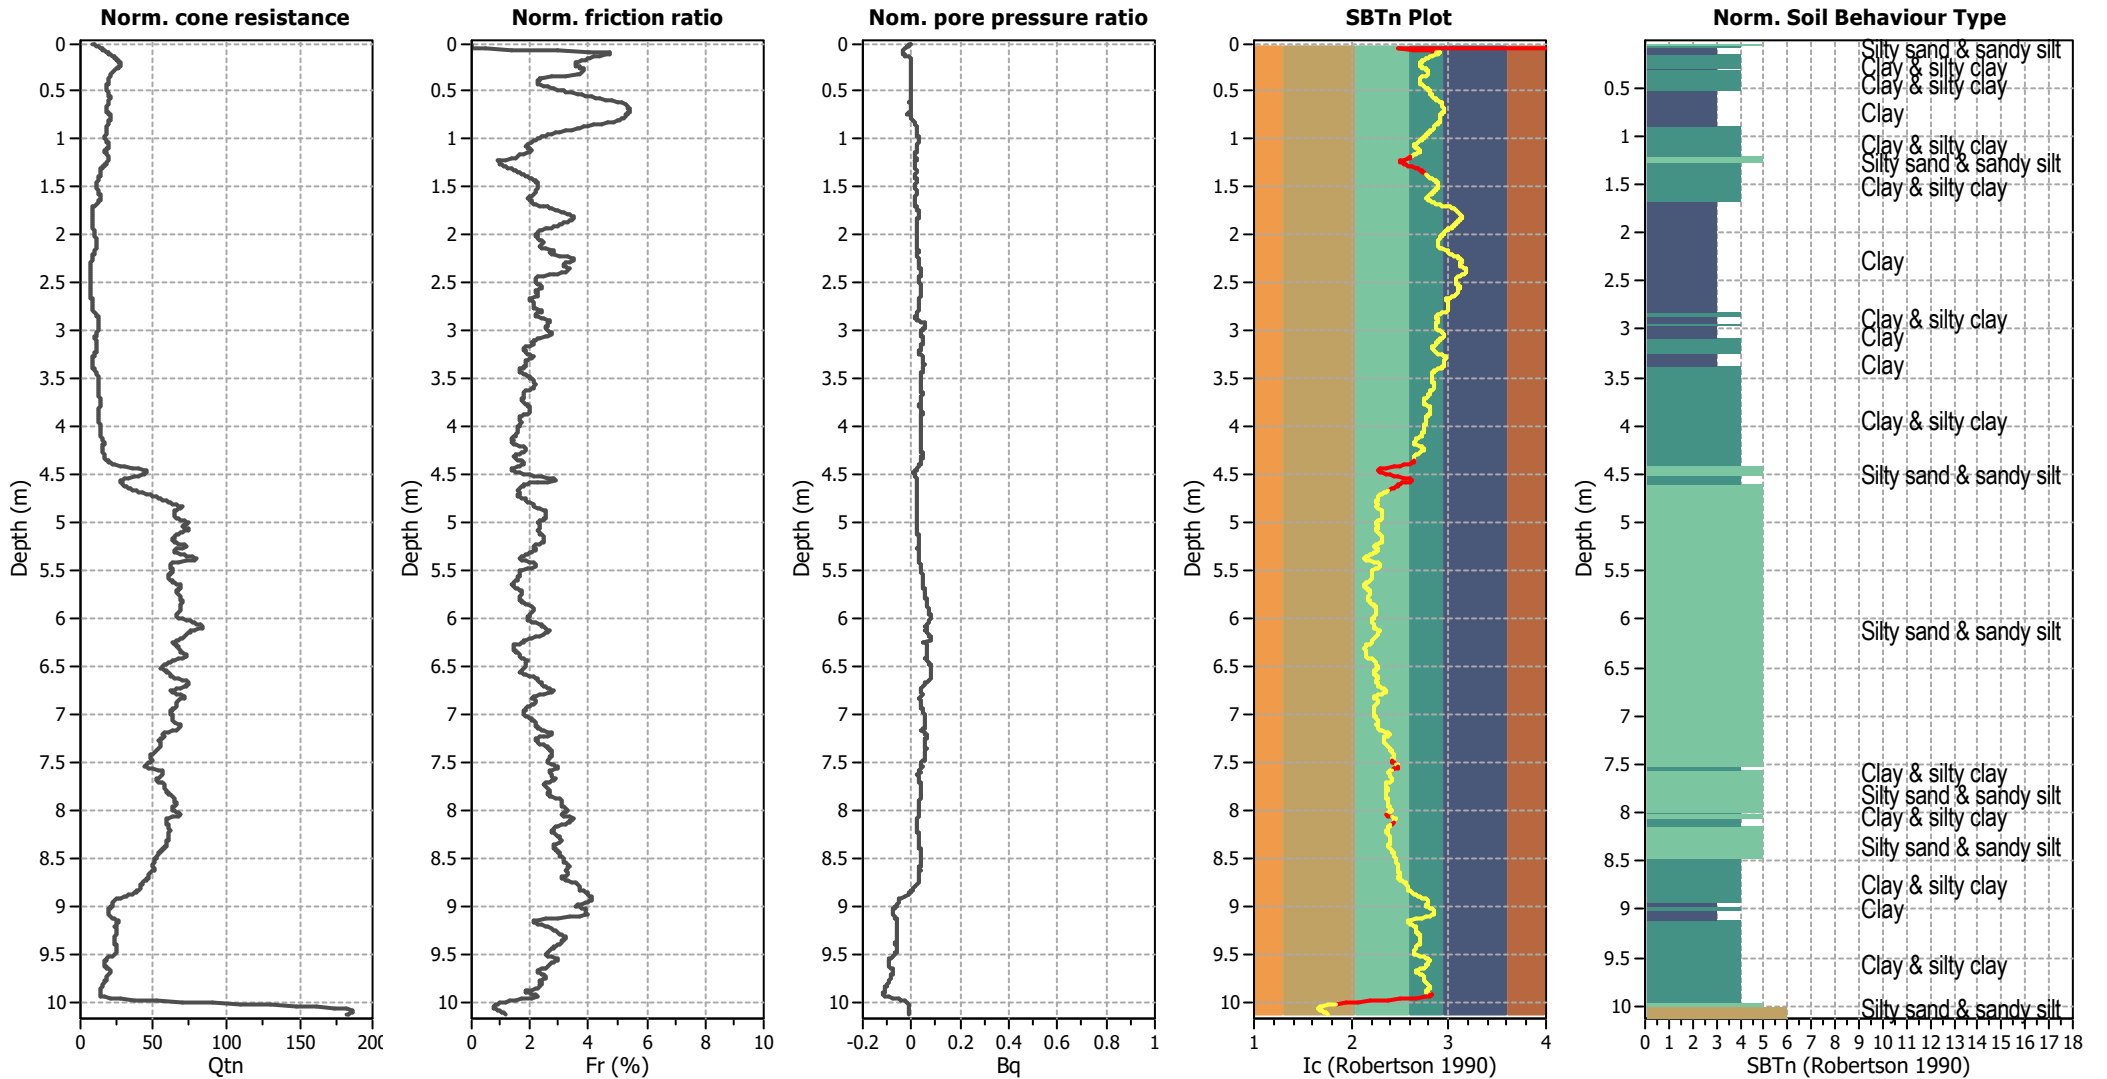


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

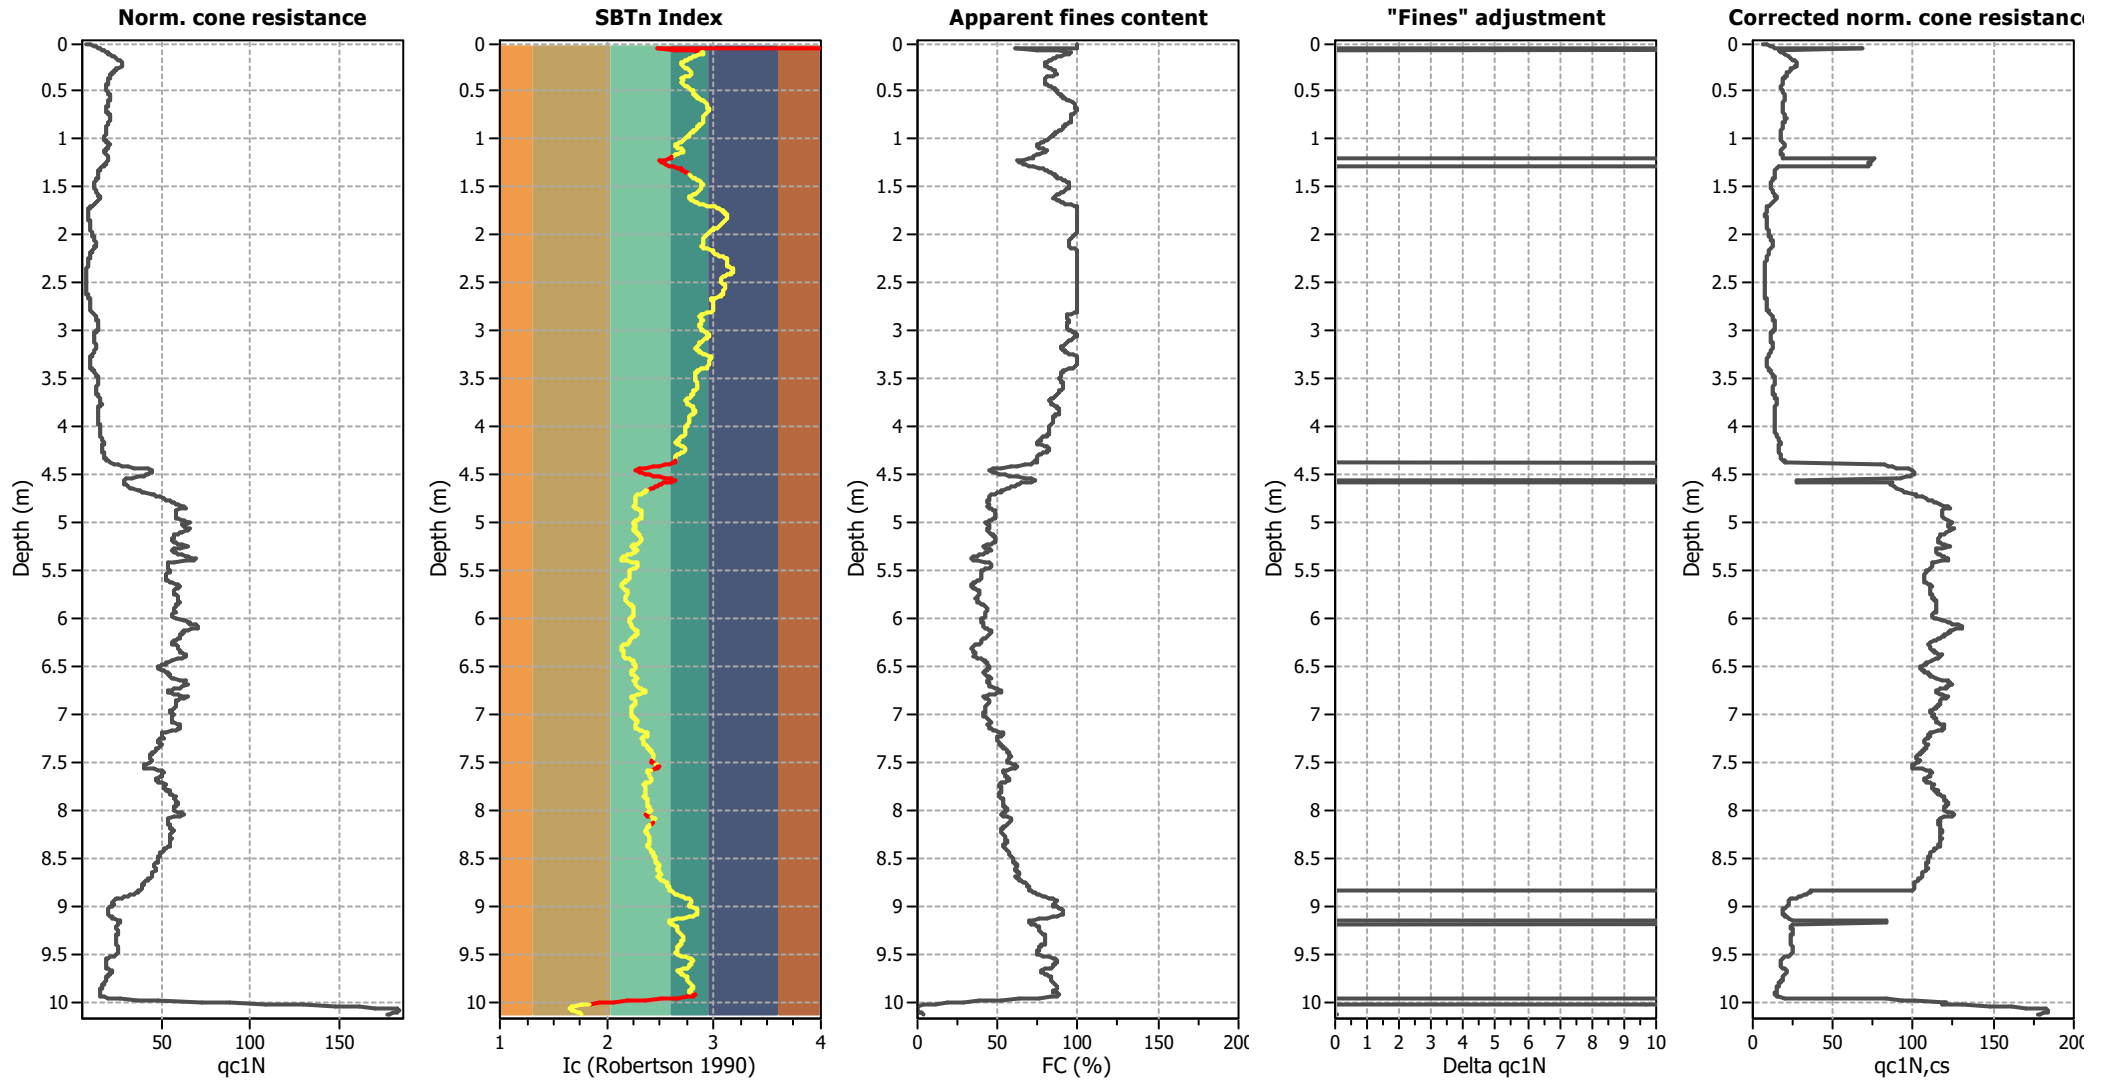

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

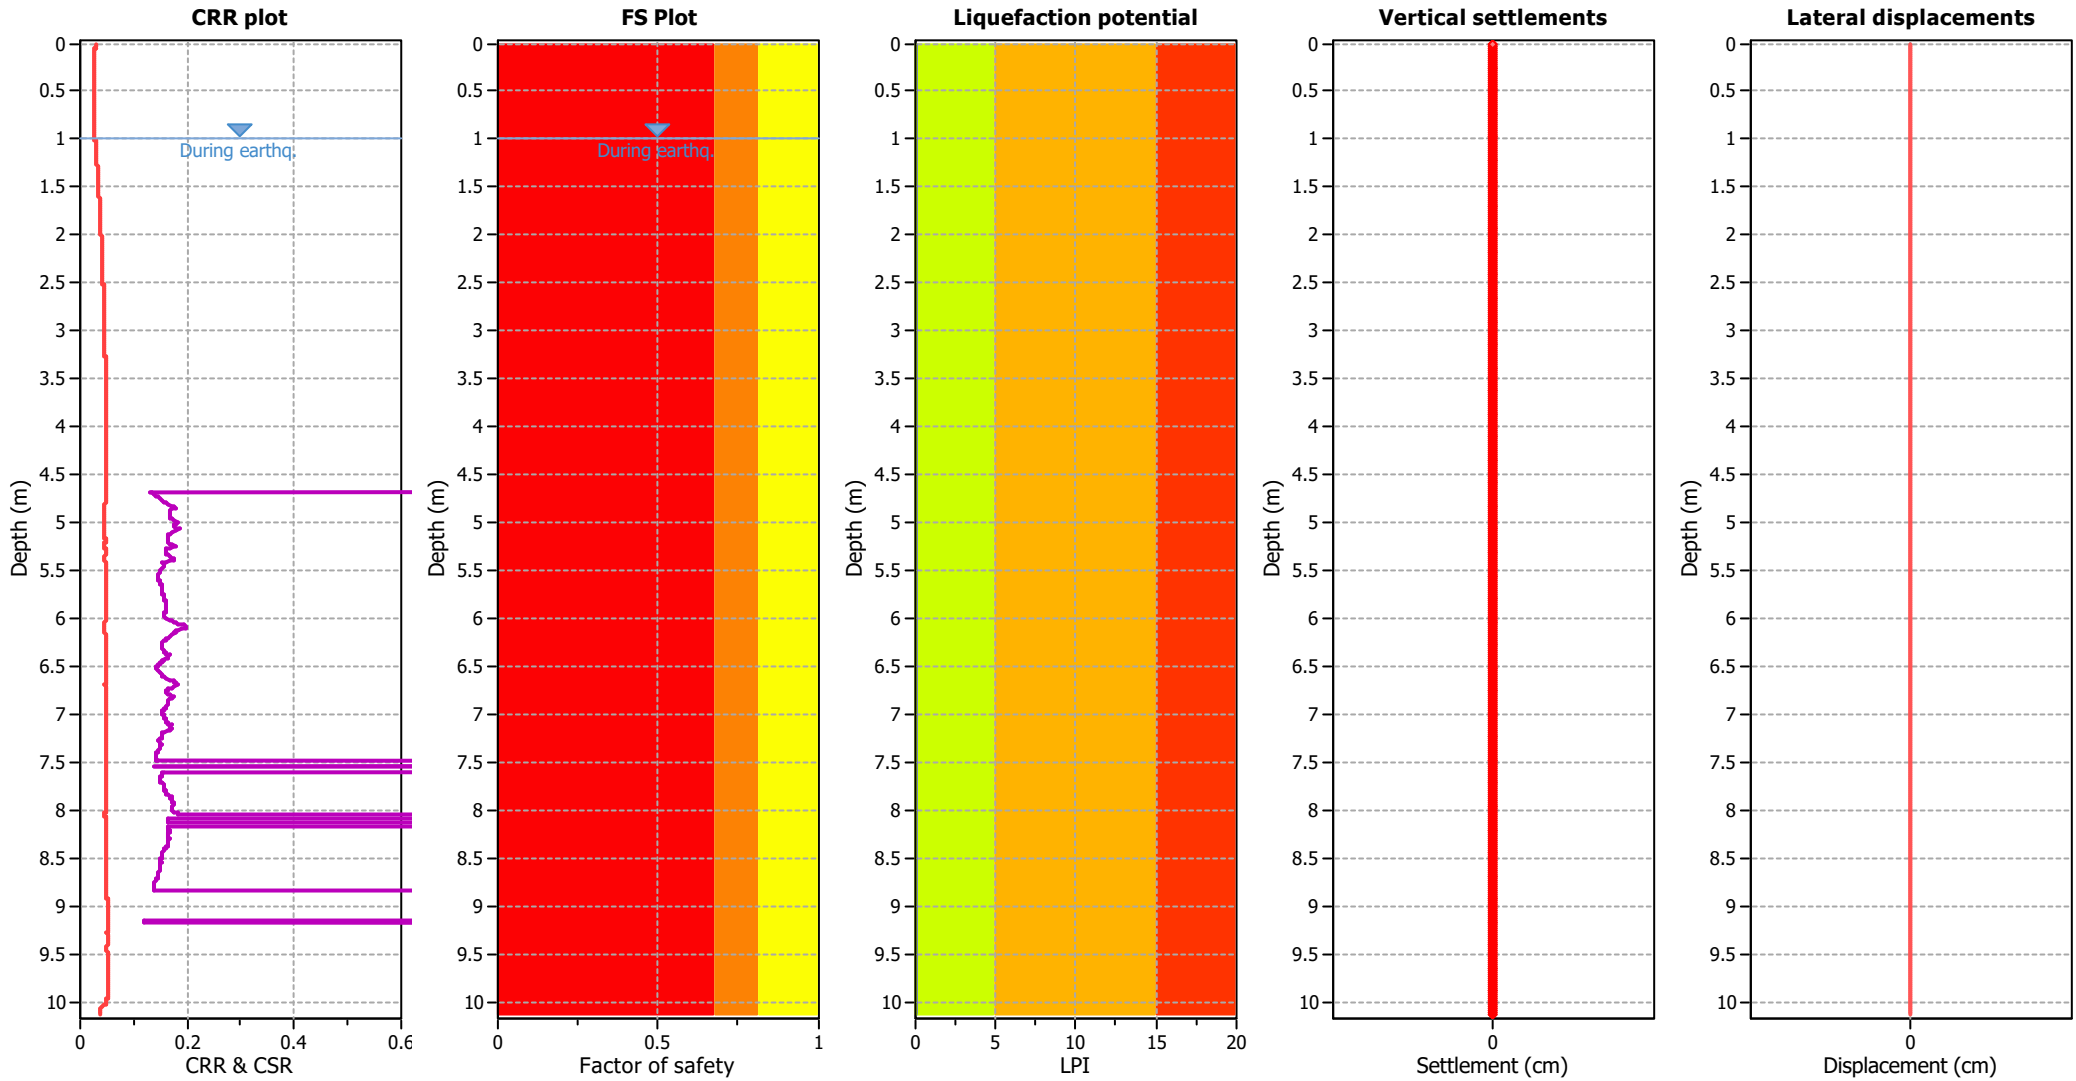

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

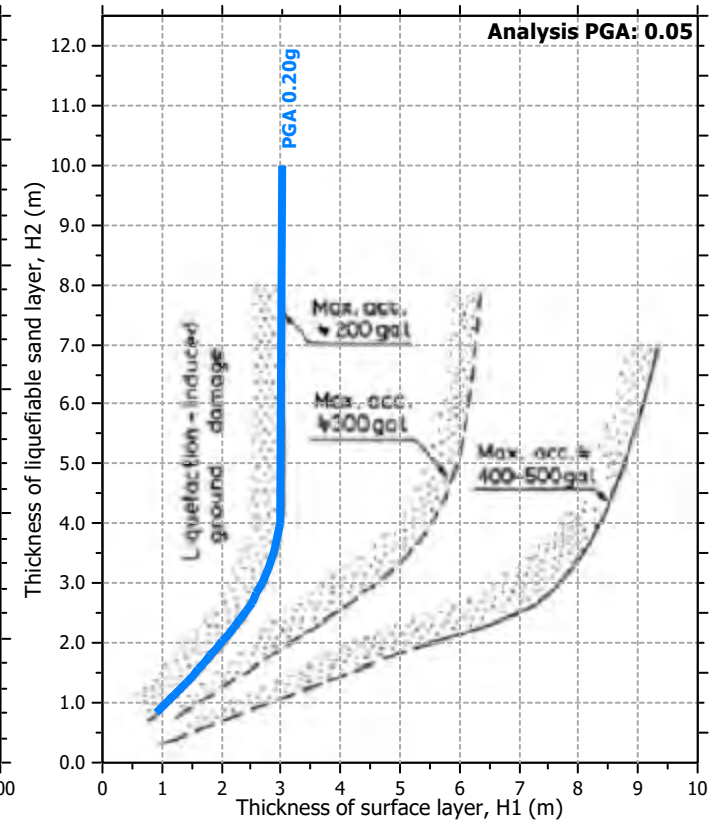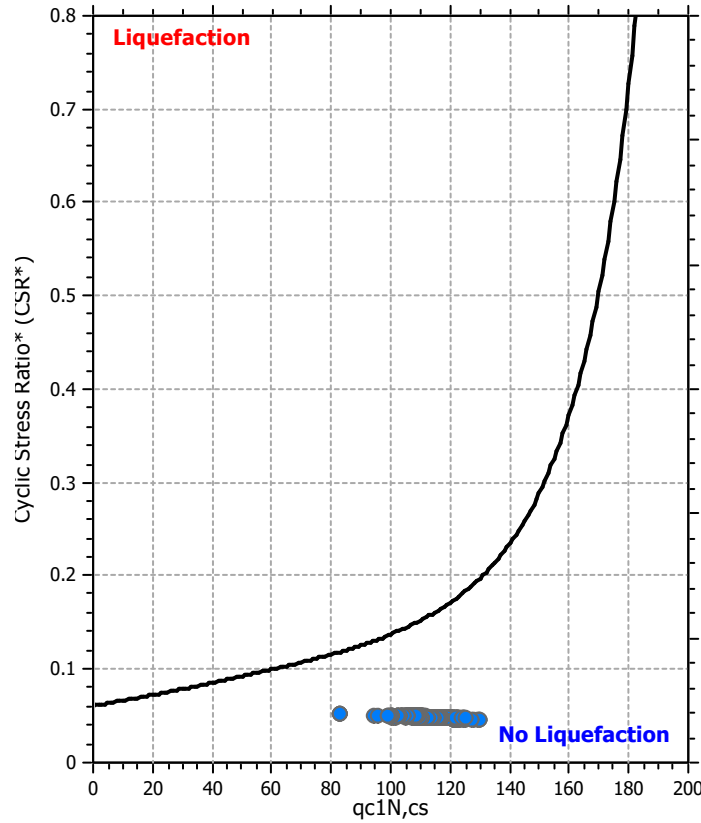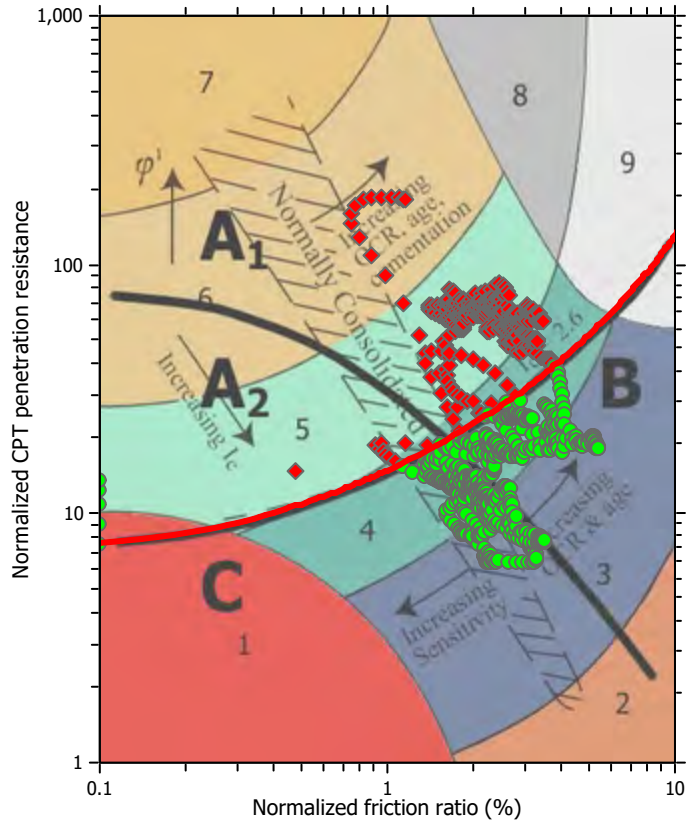

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

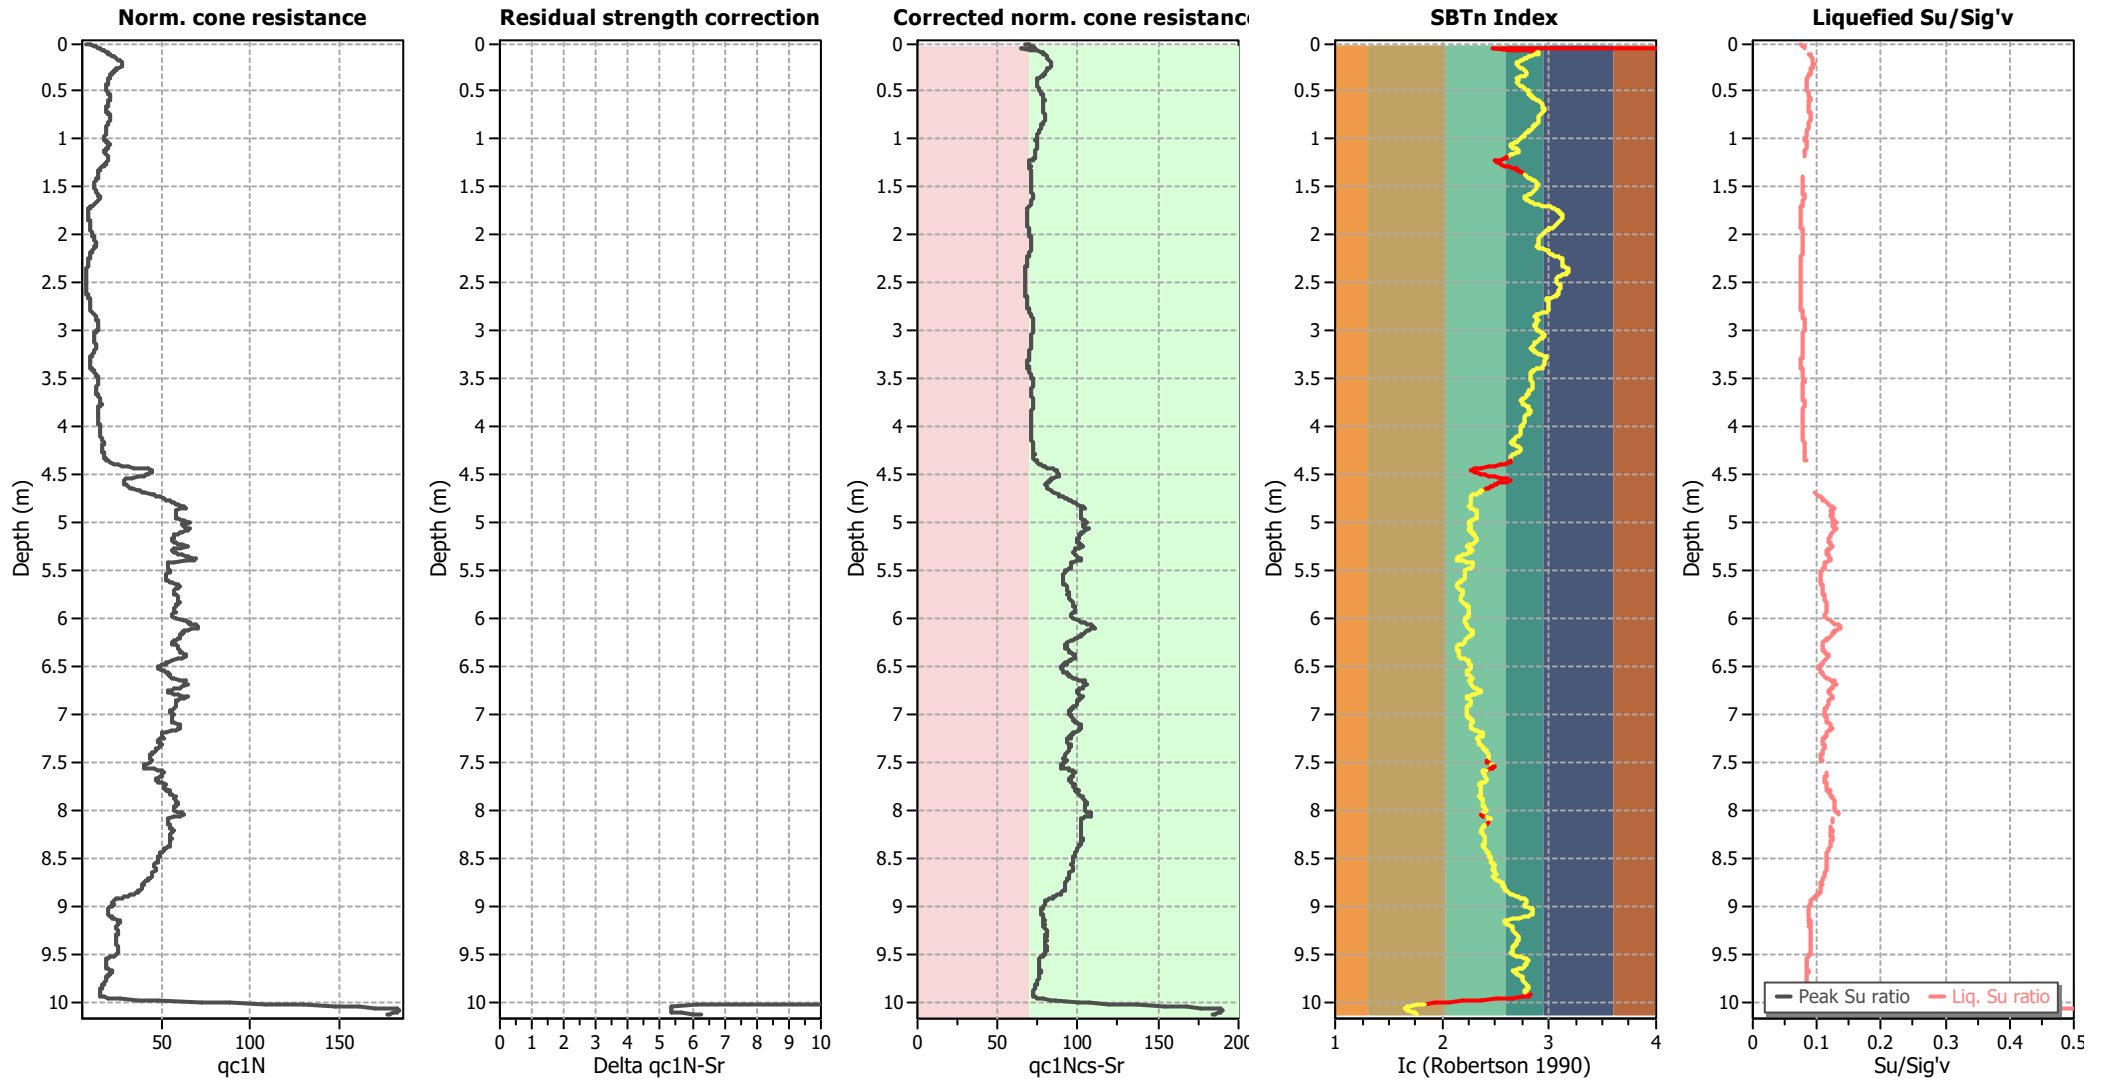

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

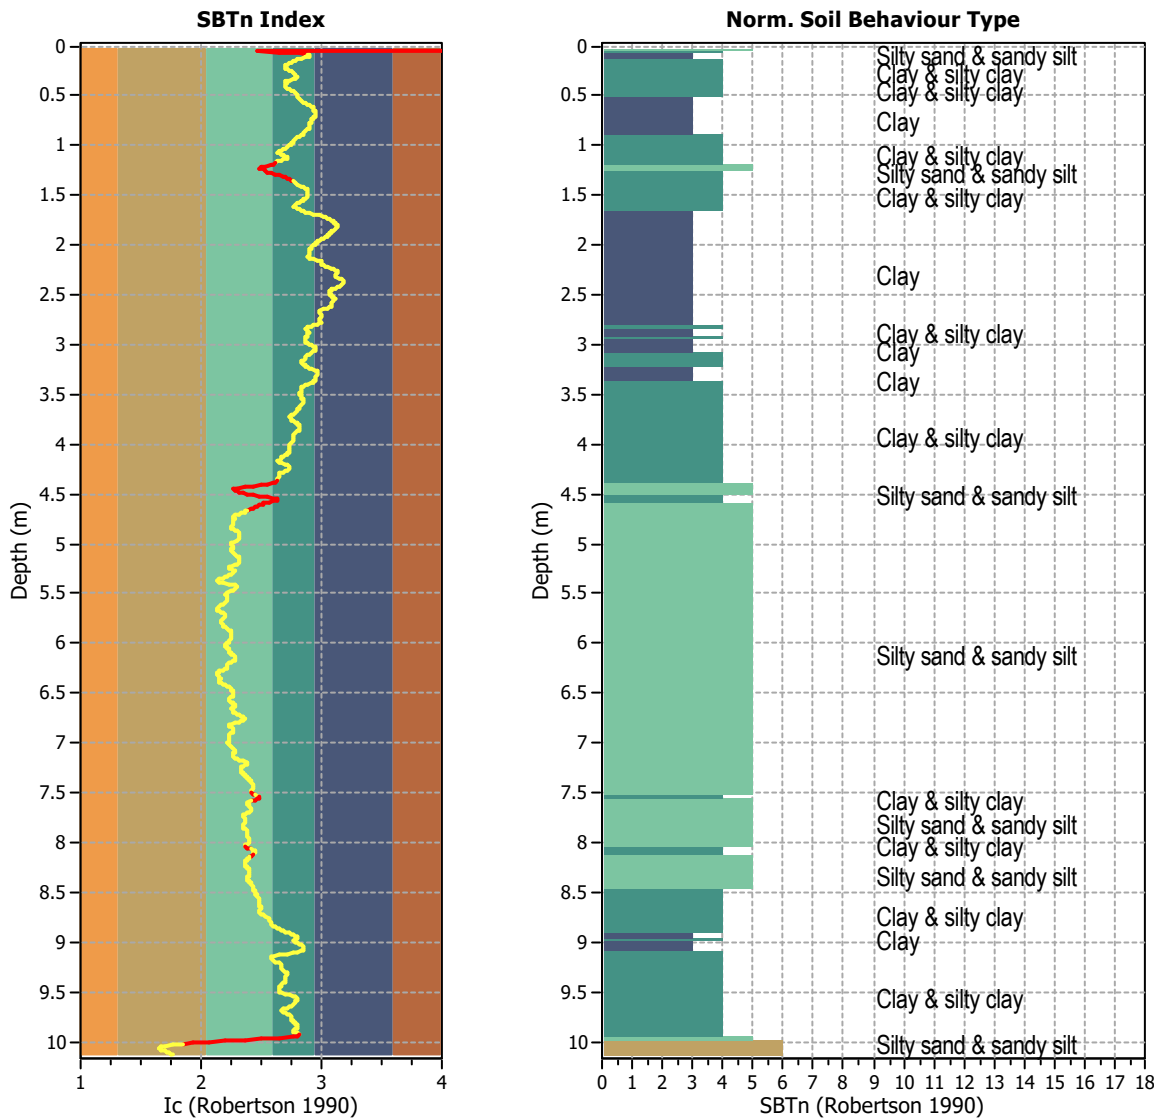


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1013
 Total points excluded: 83
 Exclusion percentage: 8.19%
 Number of layers detected: 11


Estimation of post-earthquake settlements

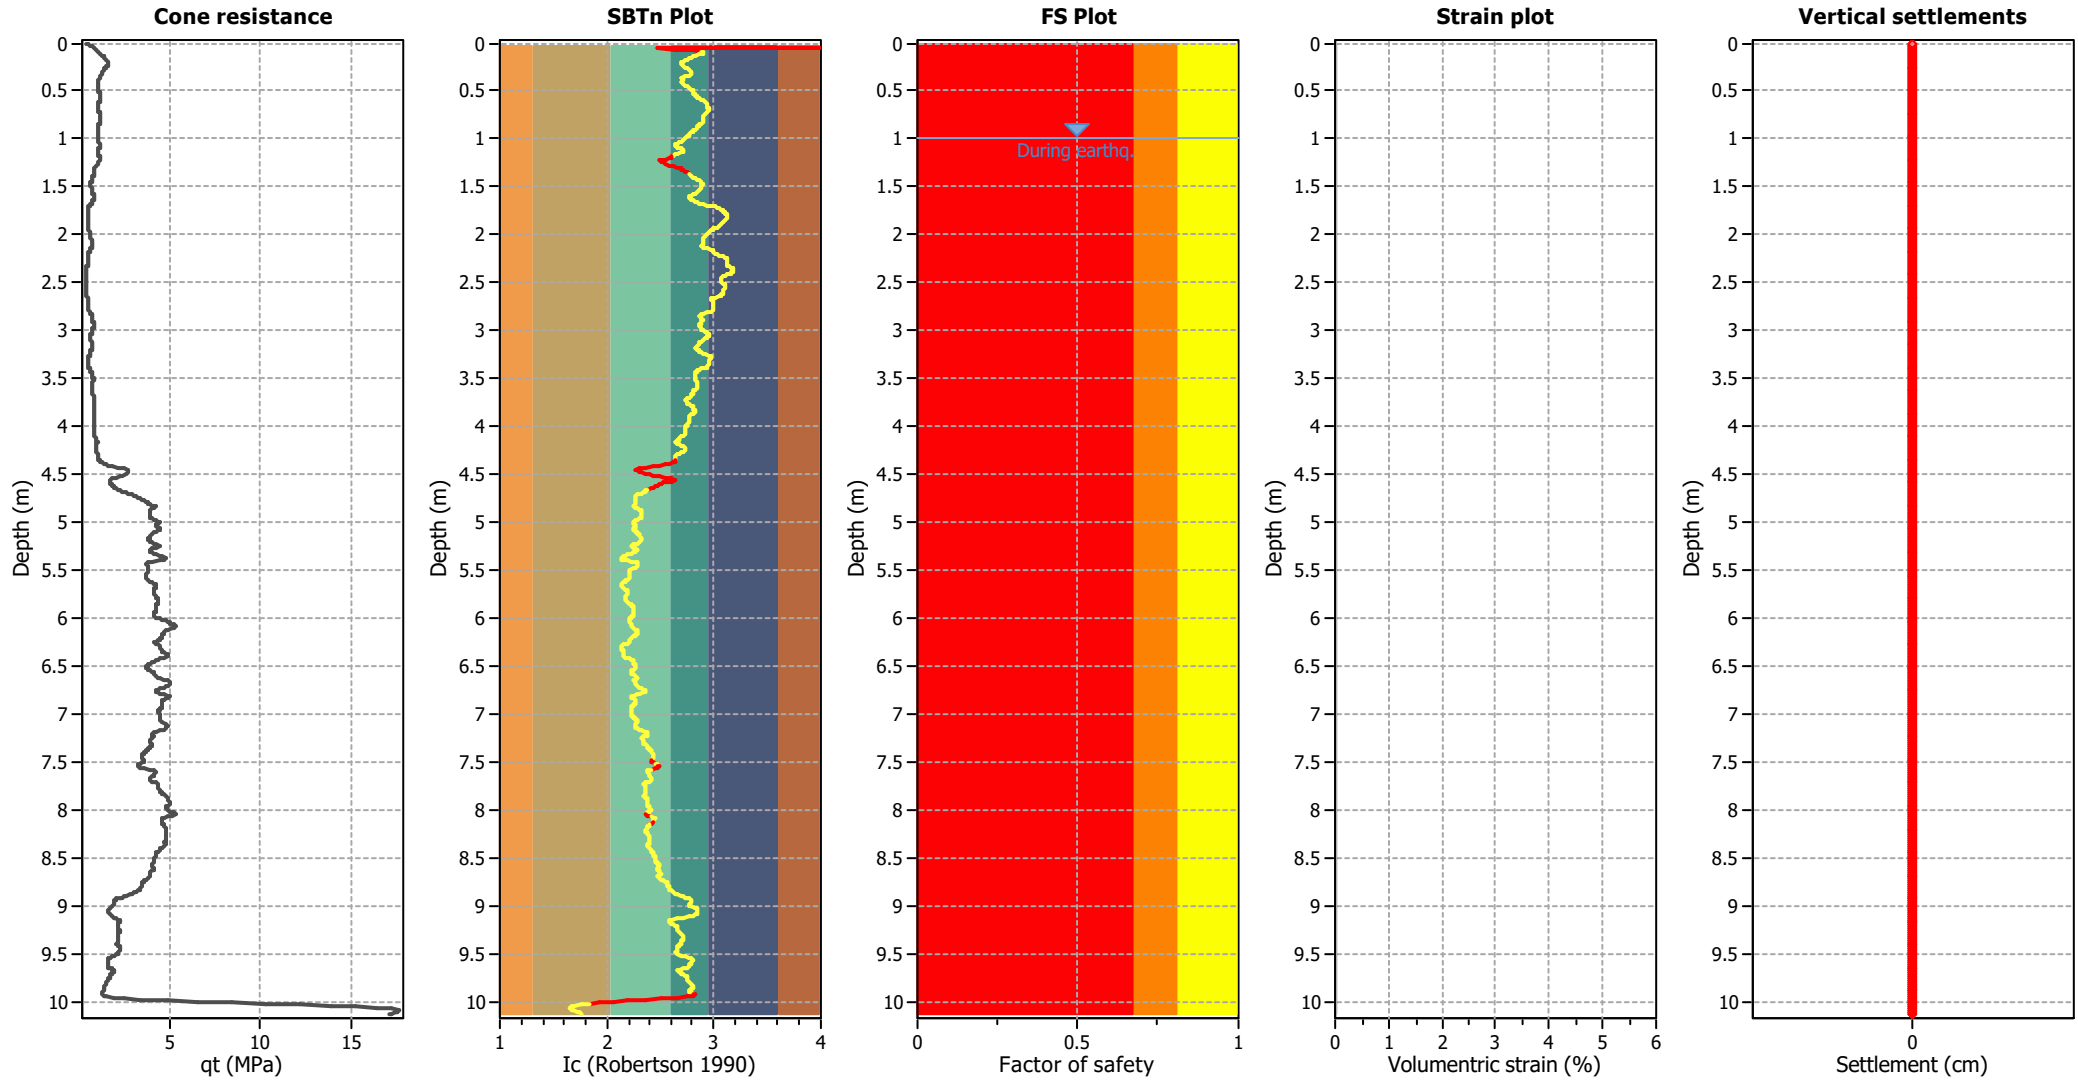

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

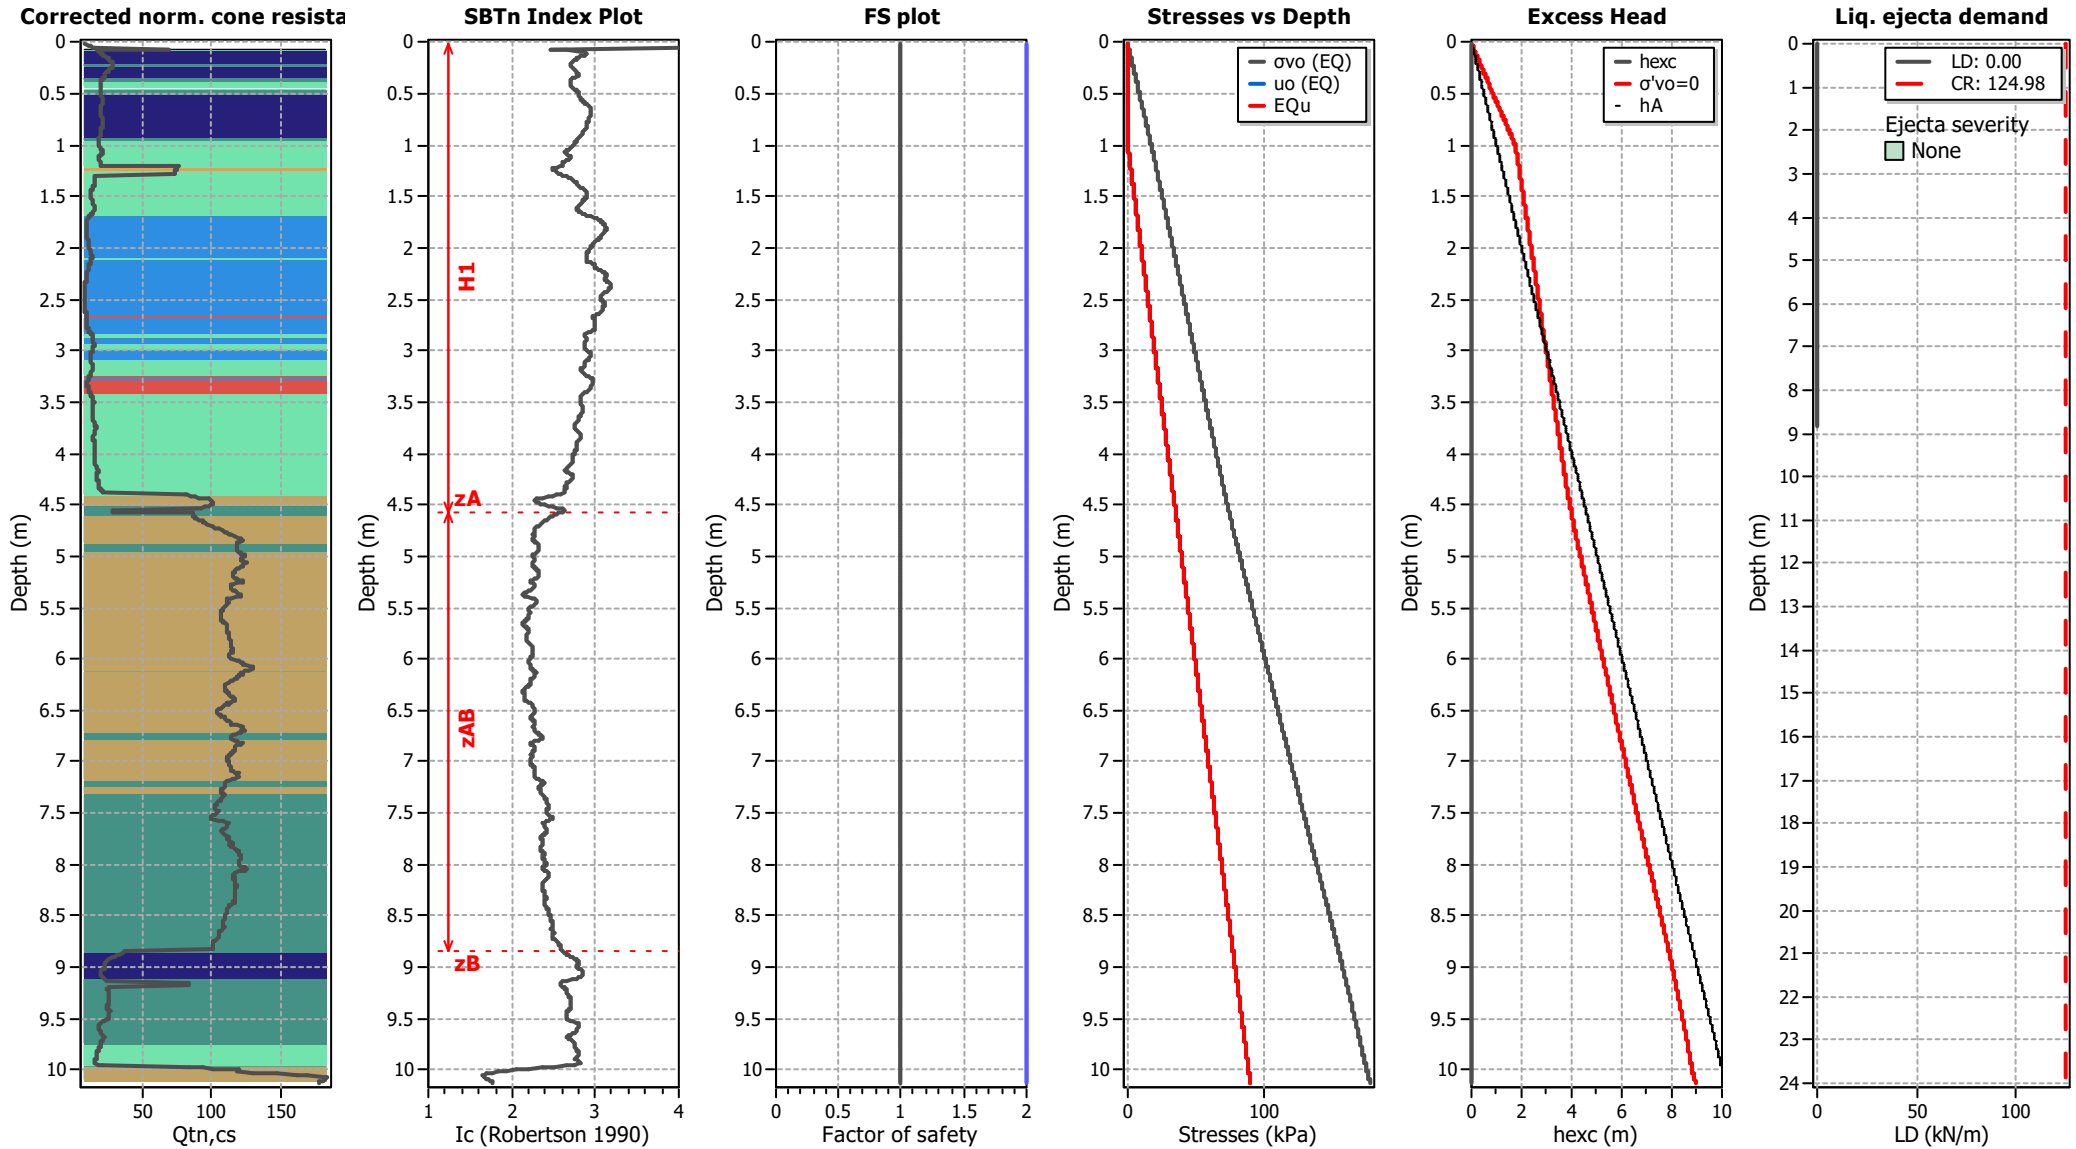

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT407

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

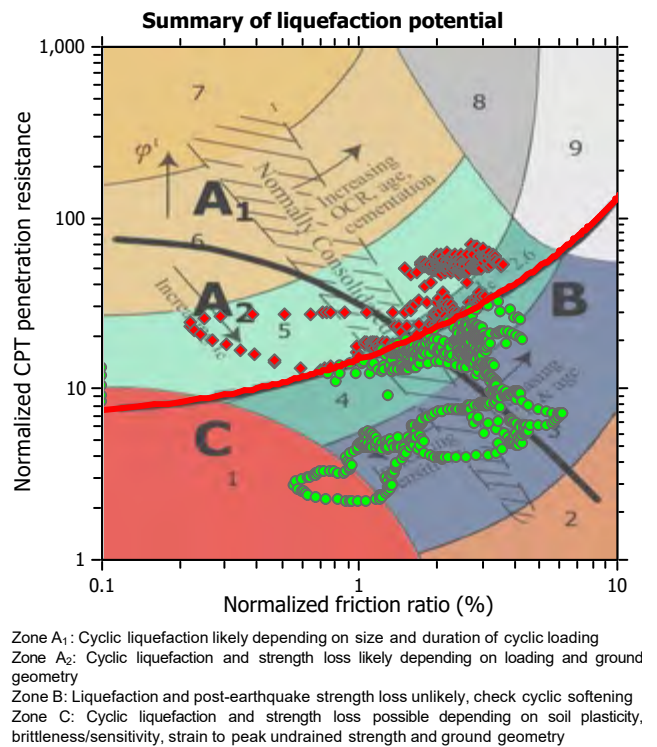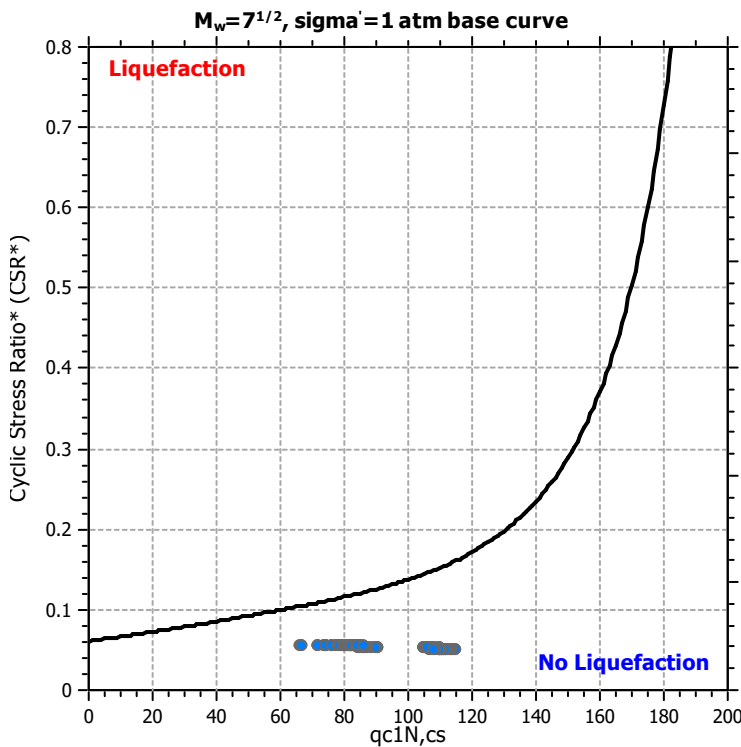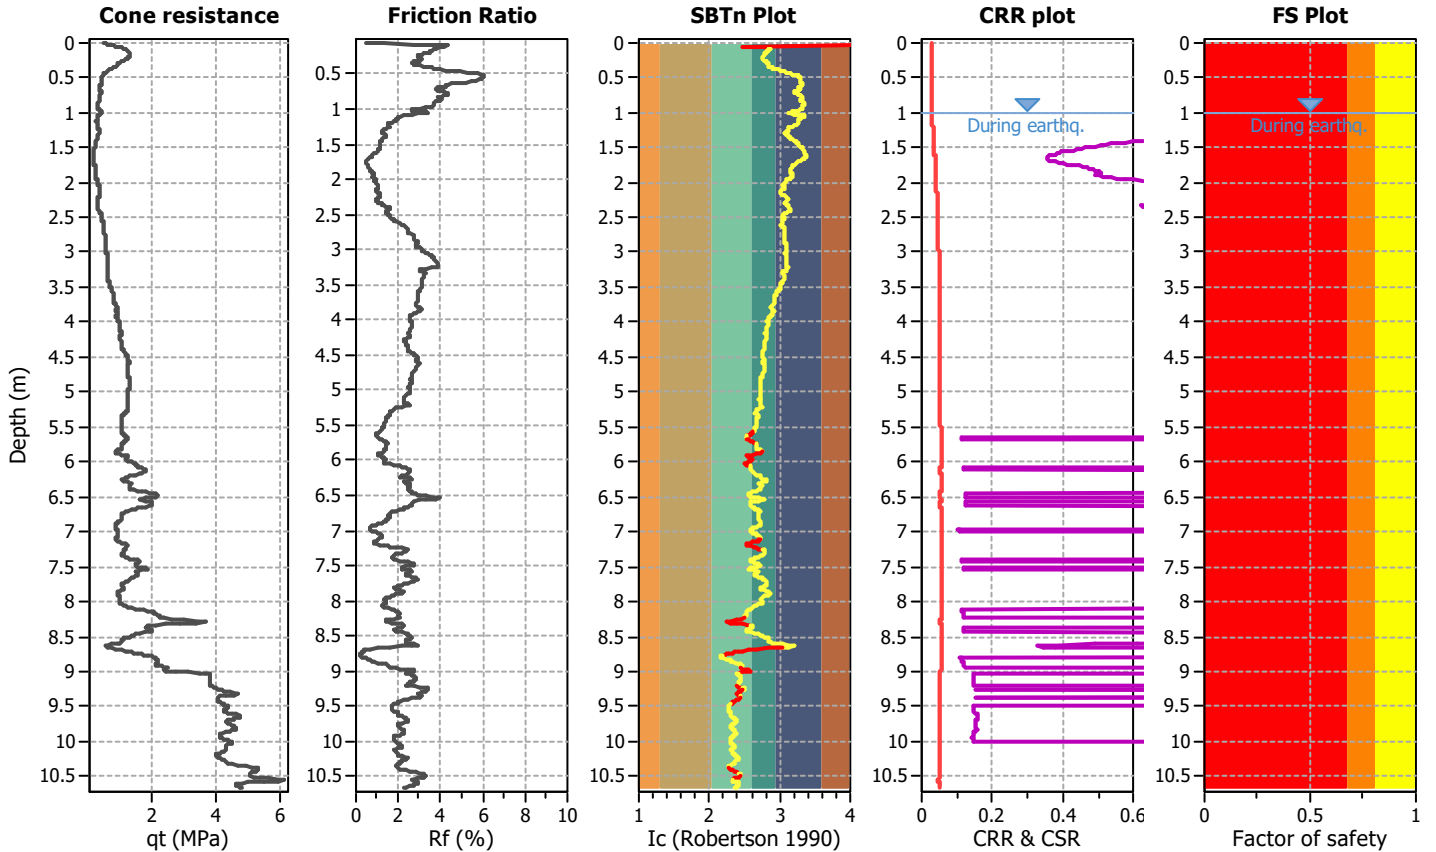

CPT basic interpretation plots

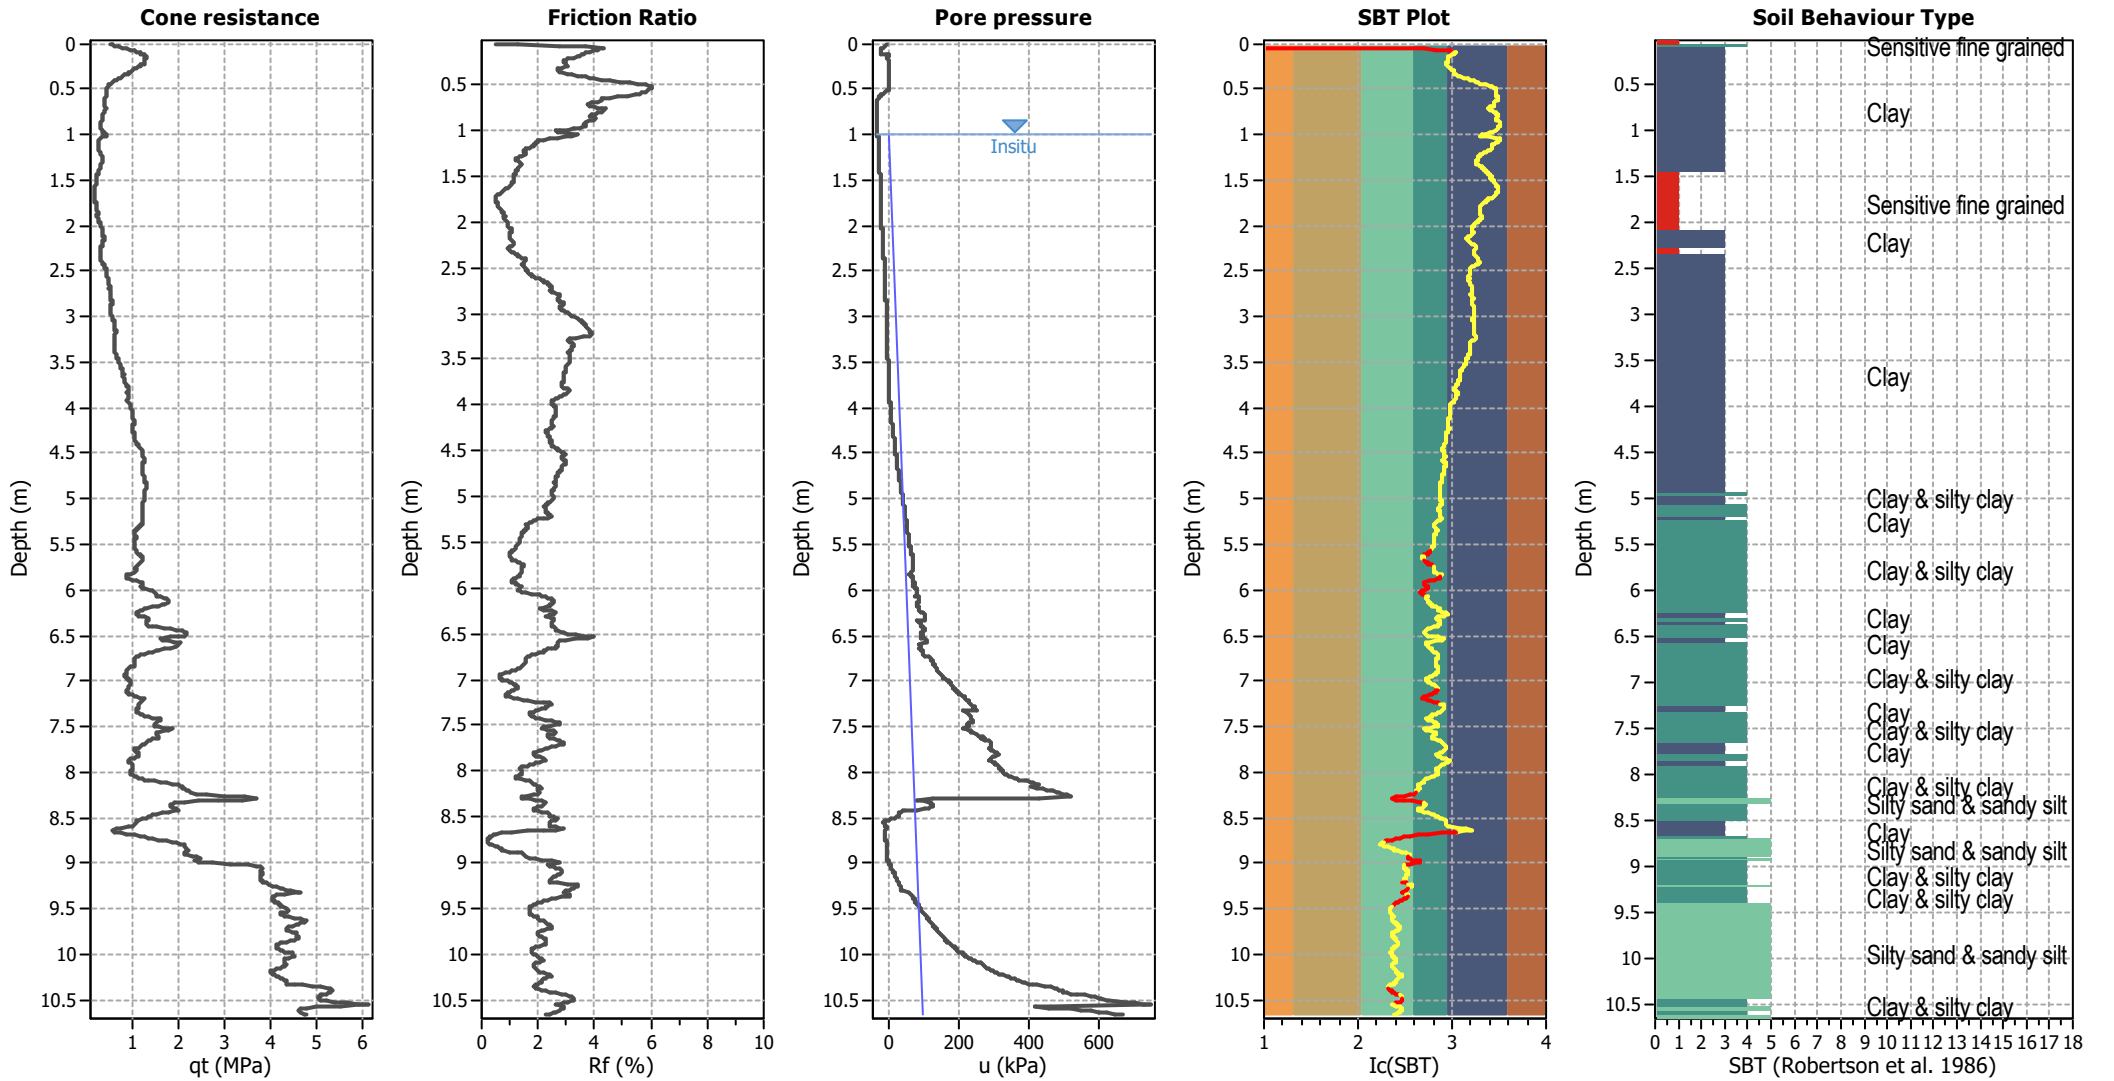


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

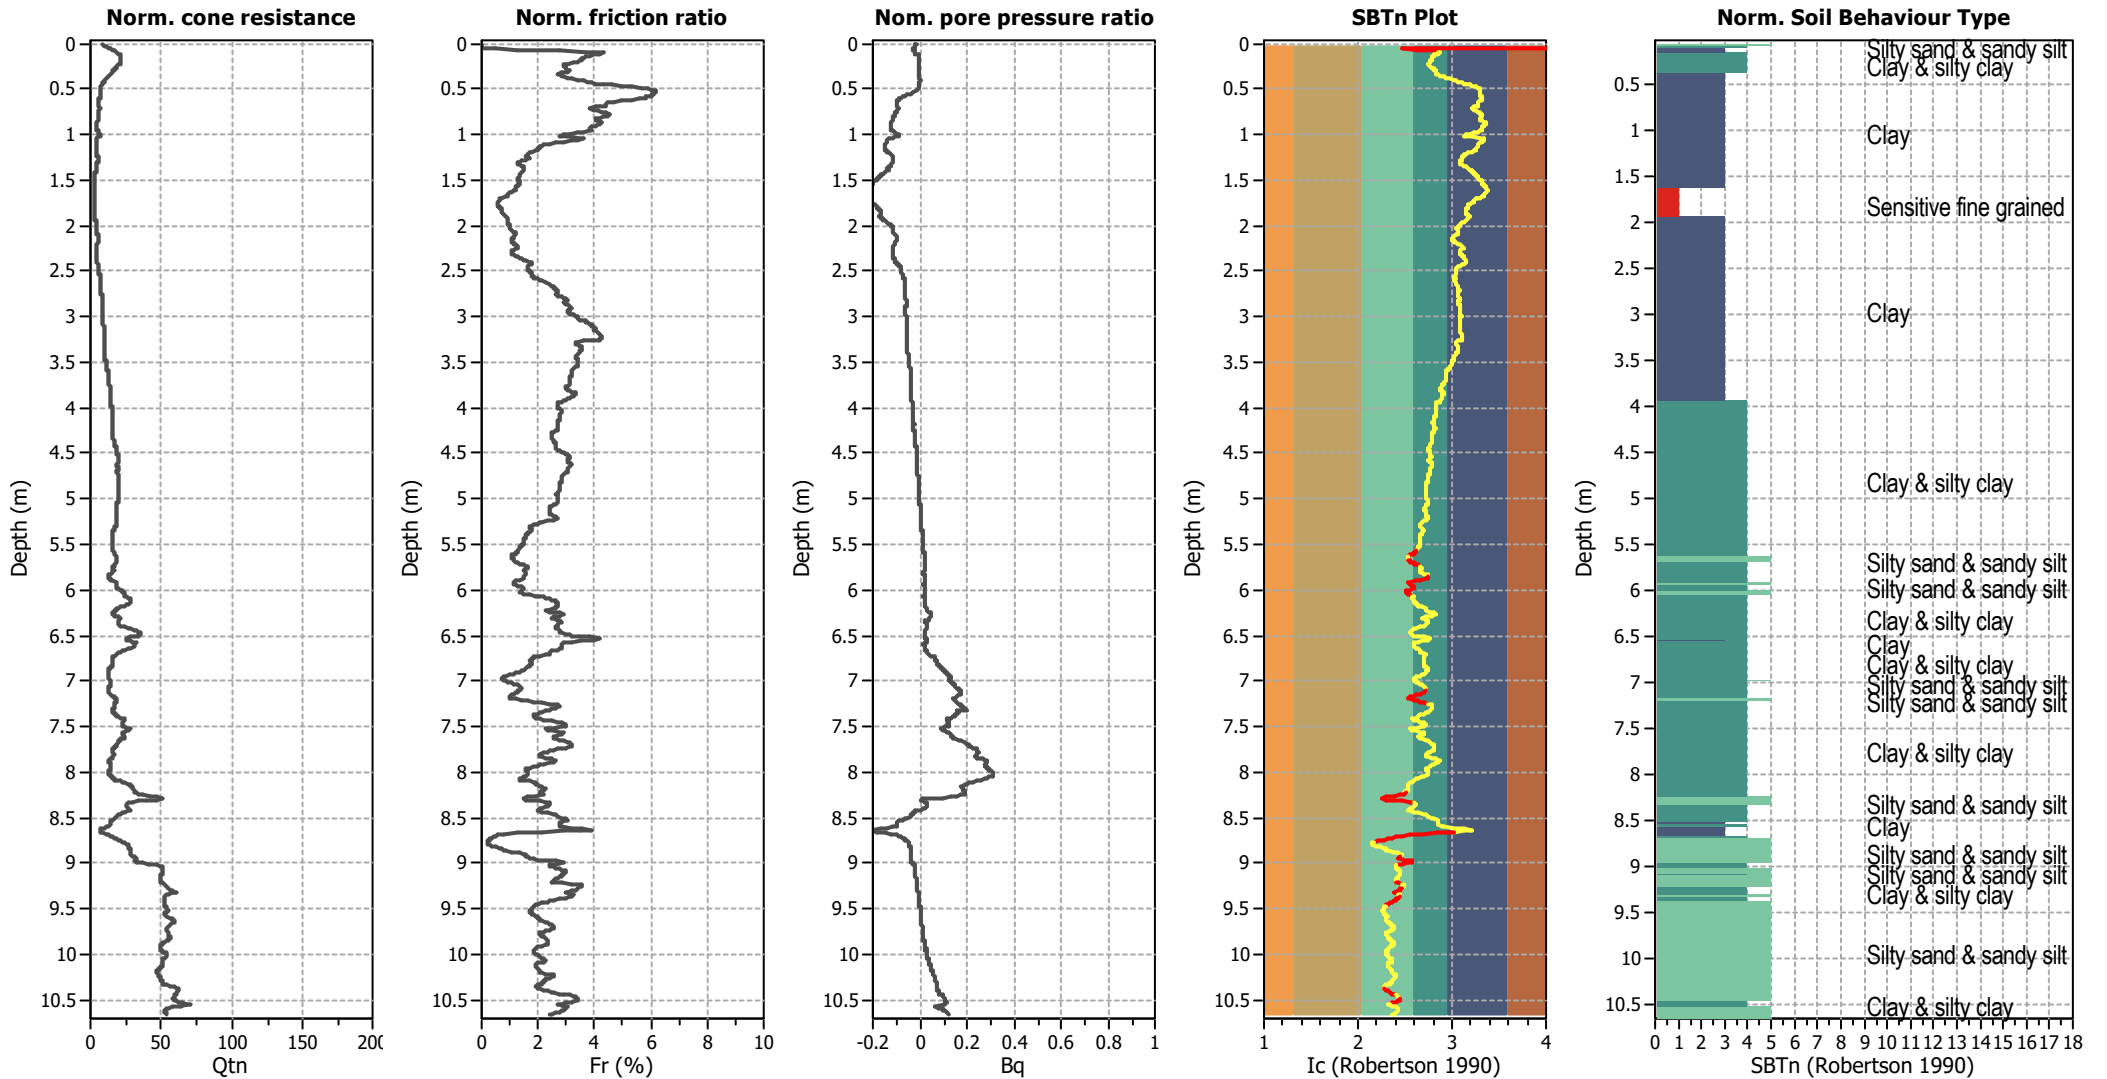


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

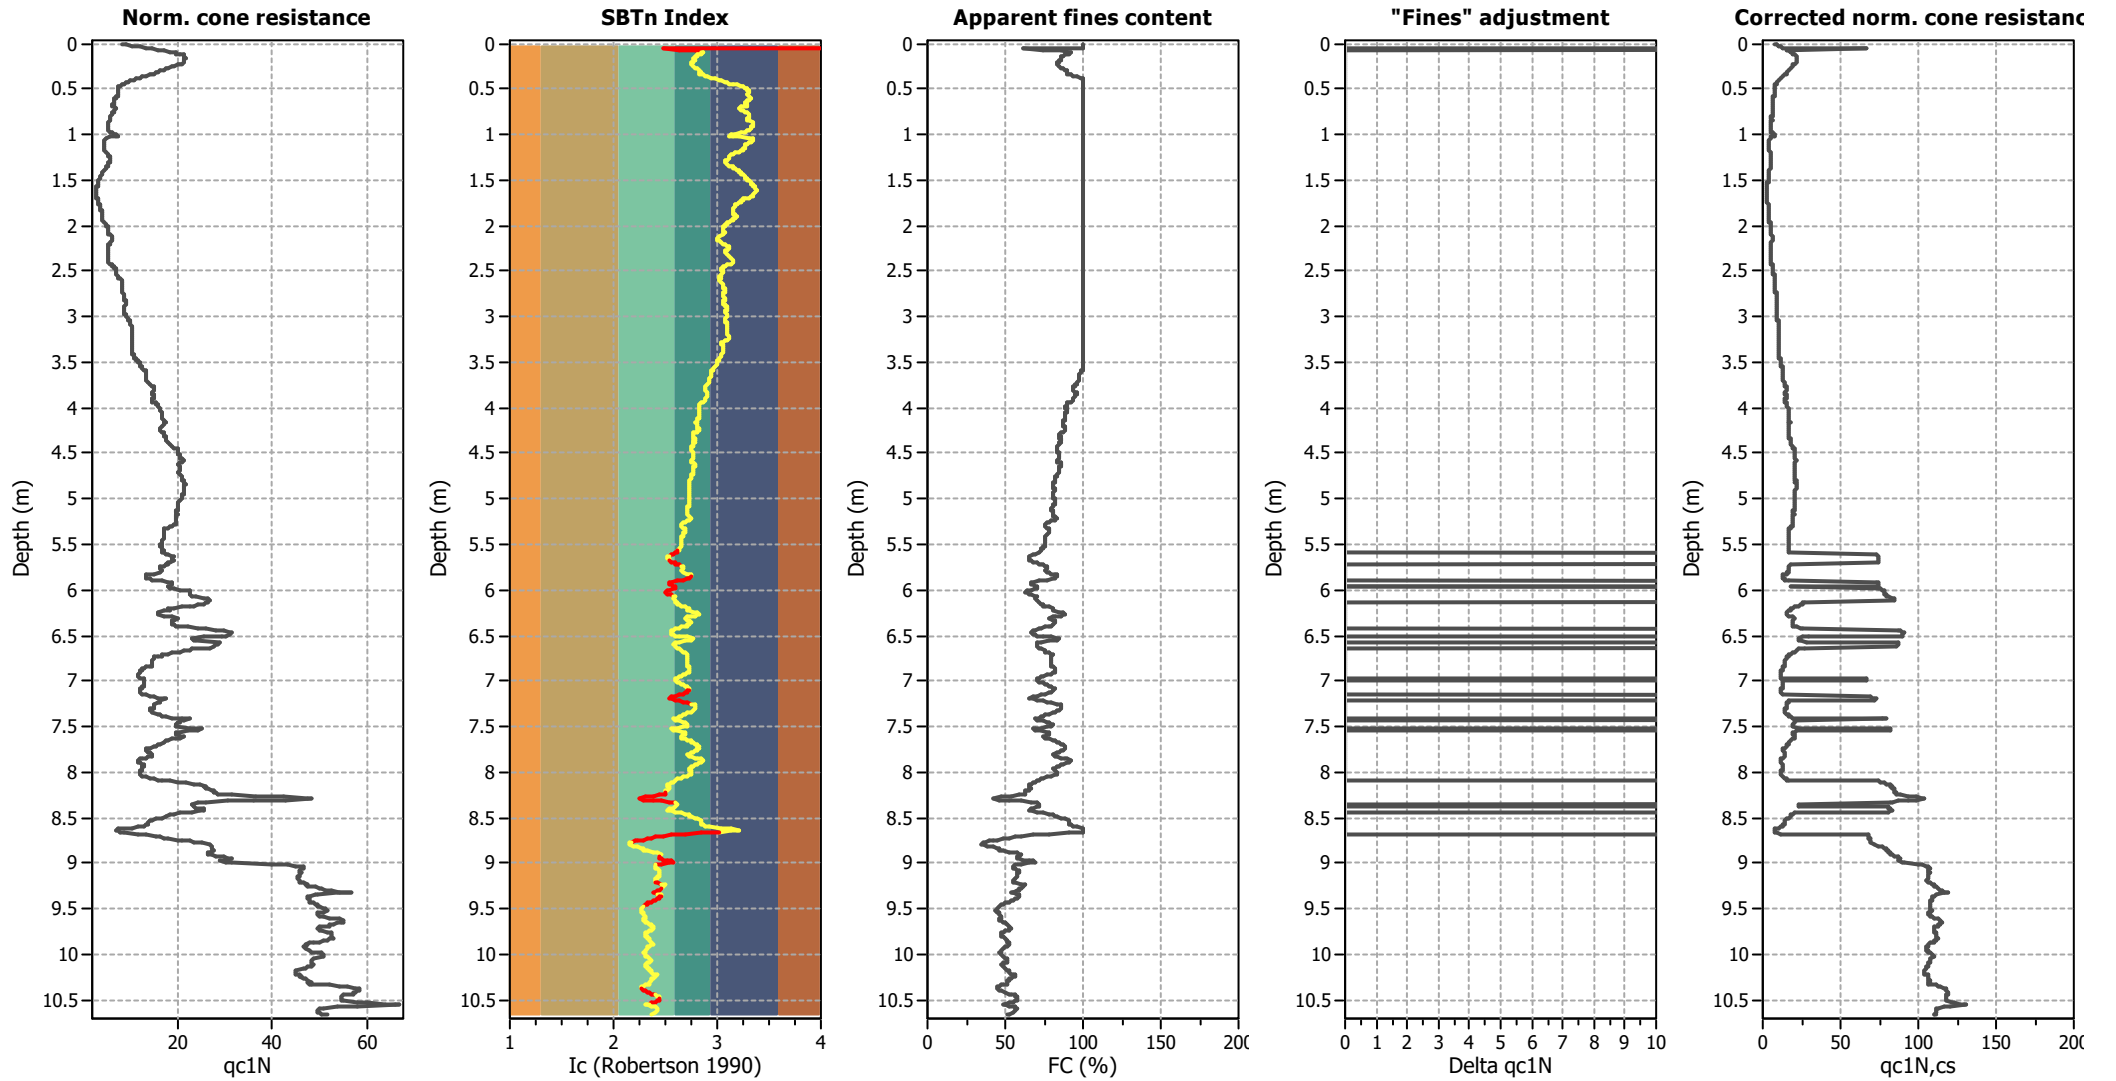

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

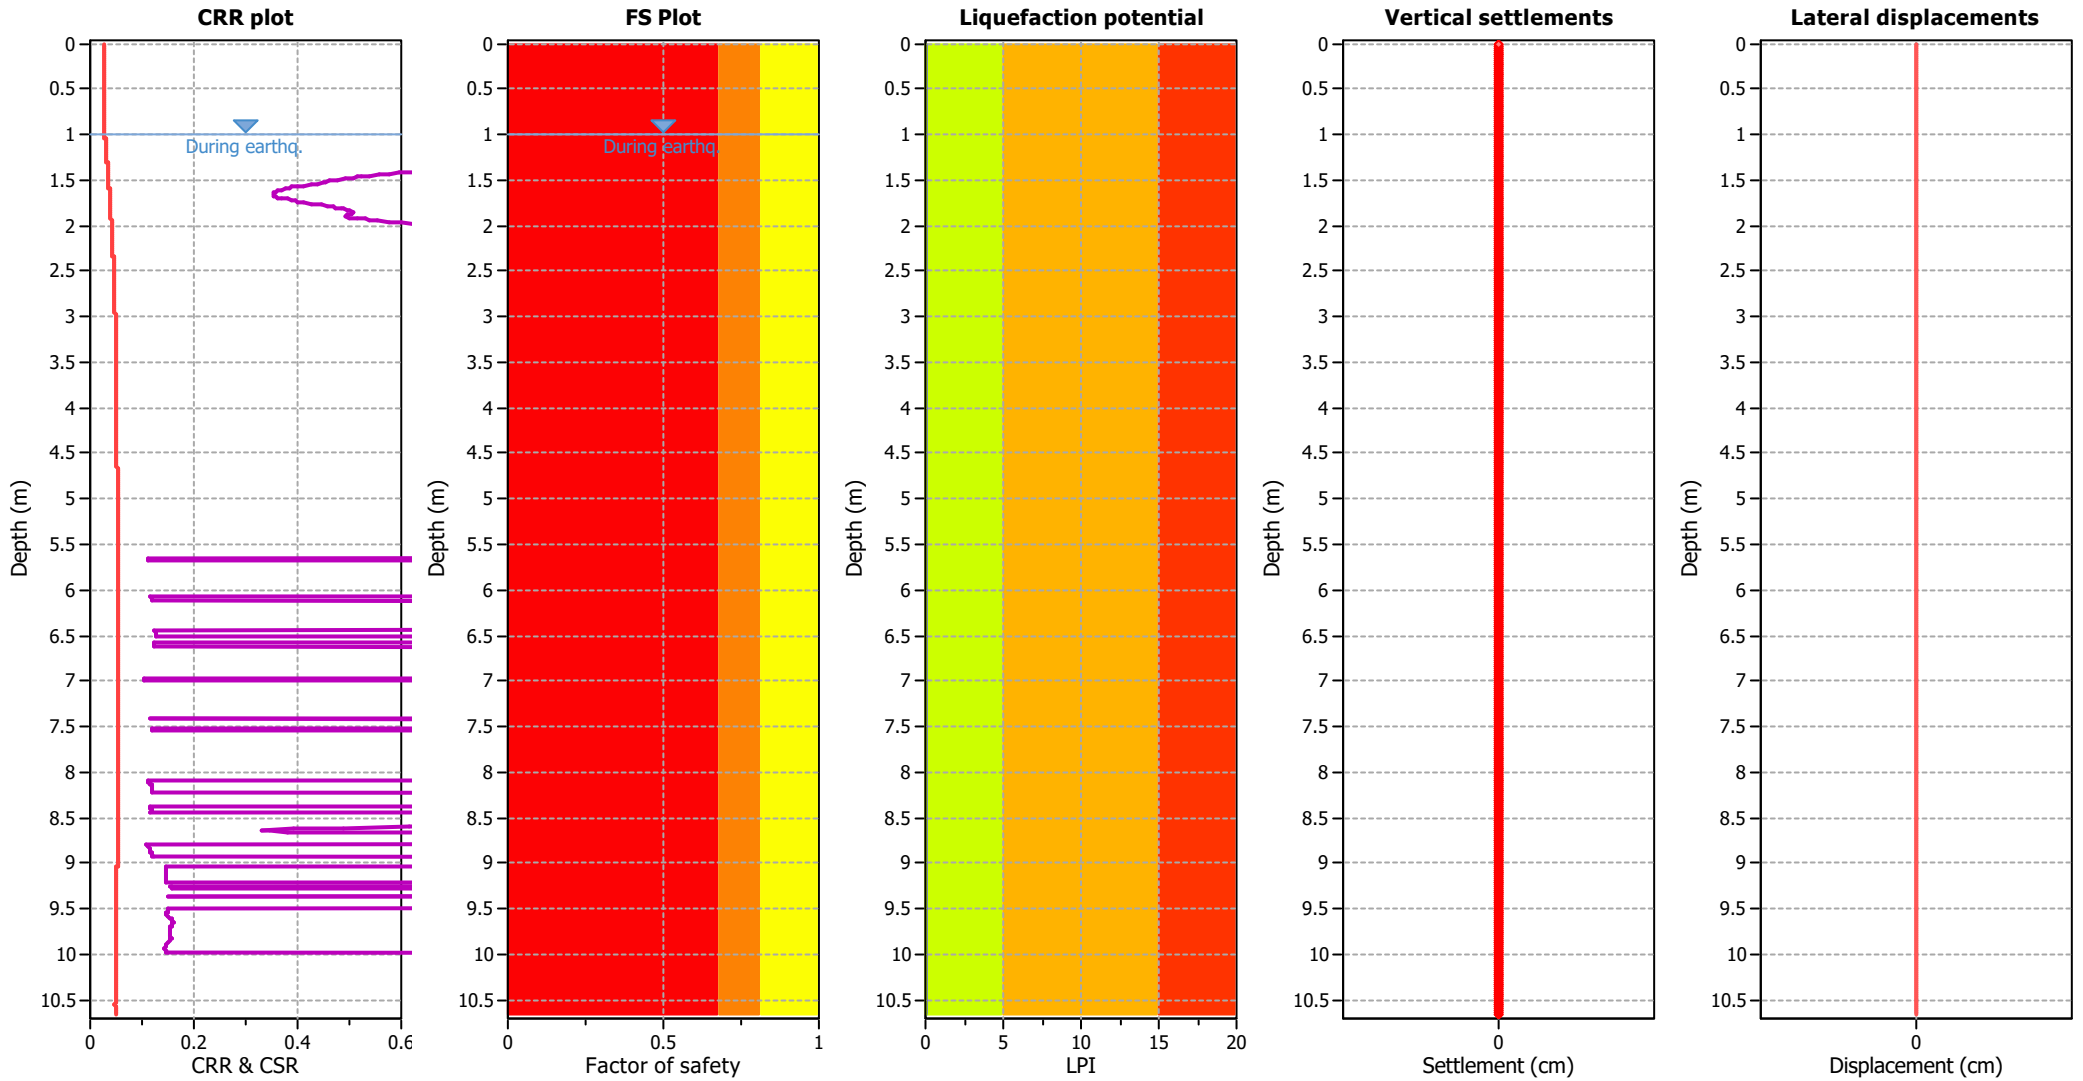

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

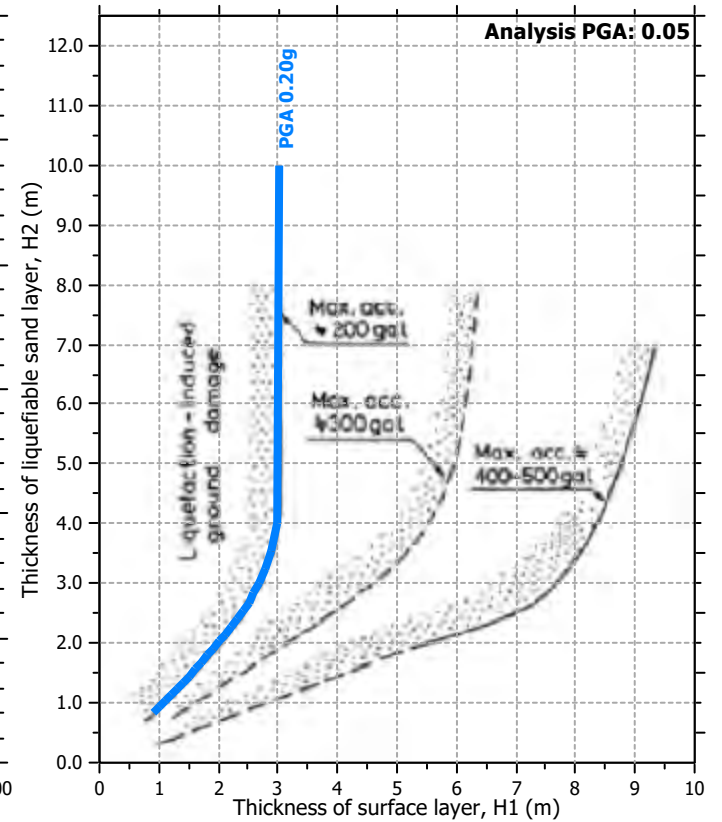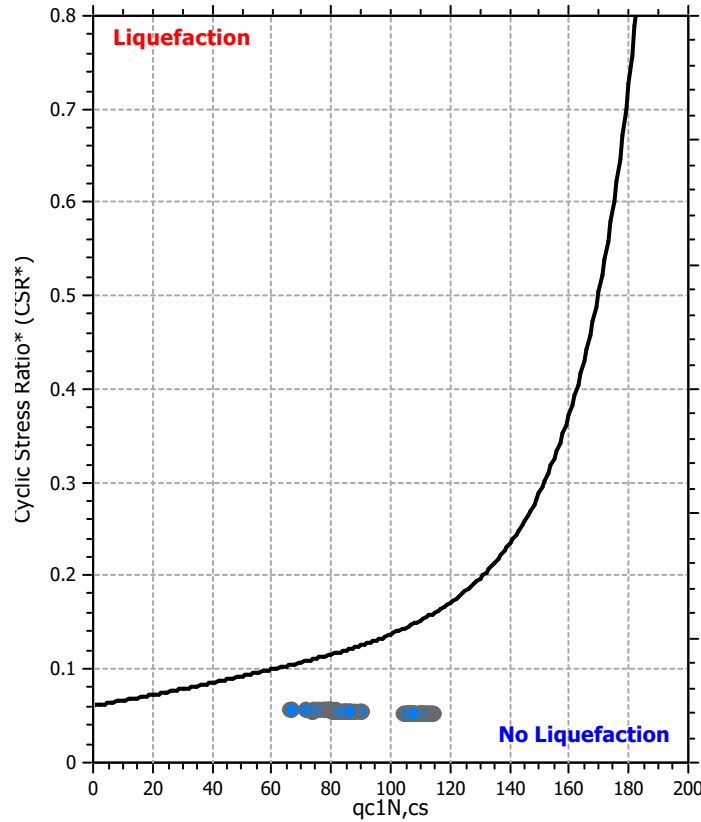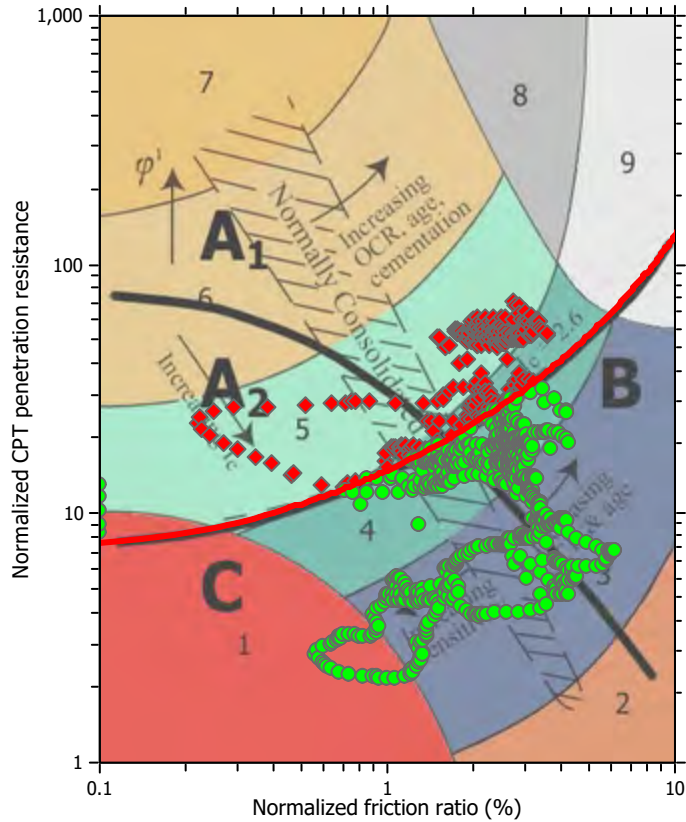

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

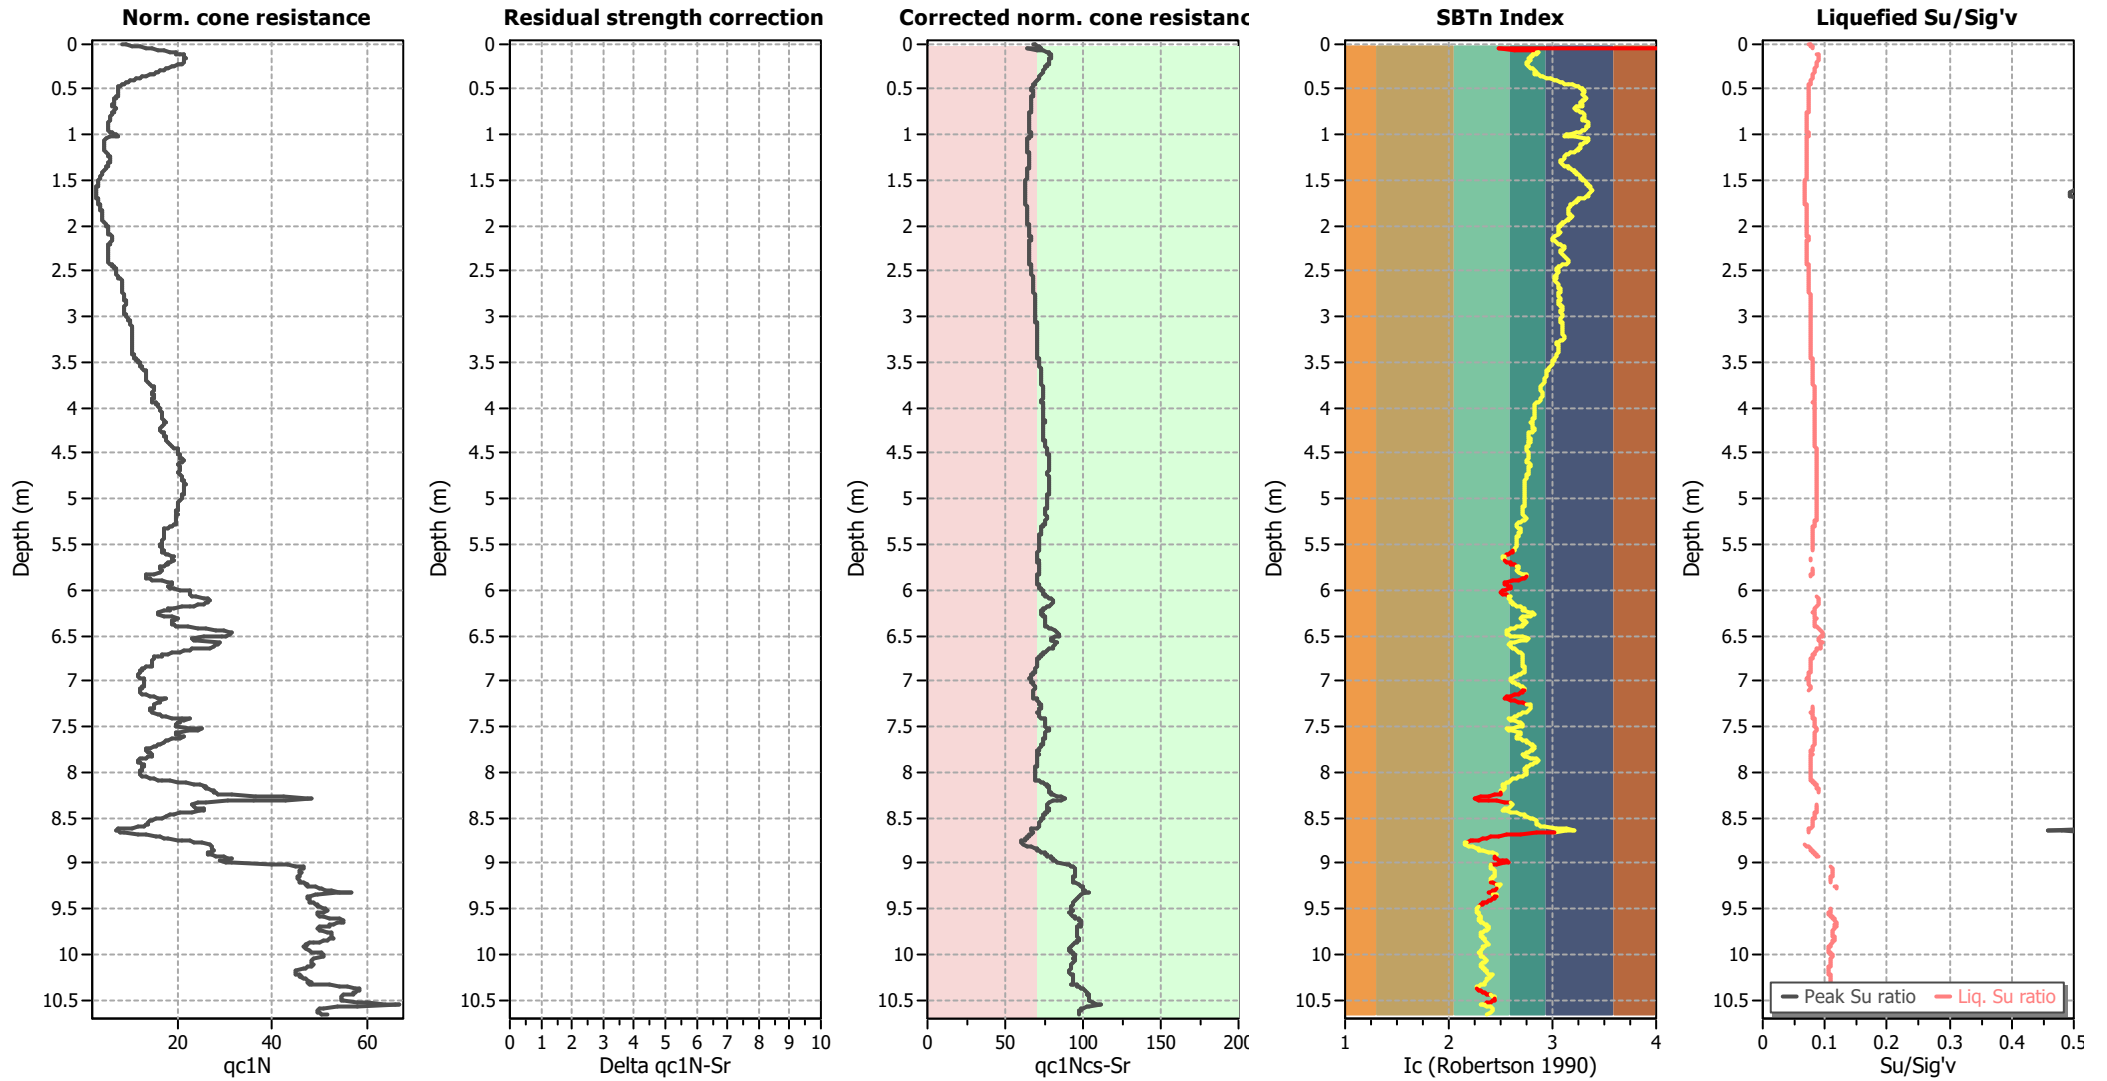

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

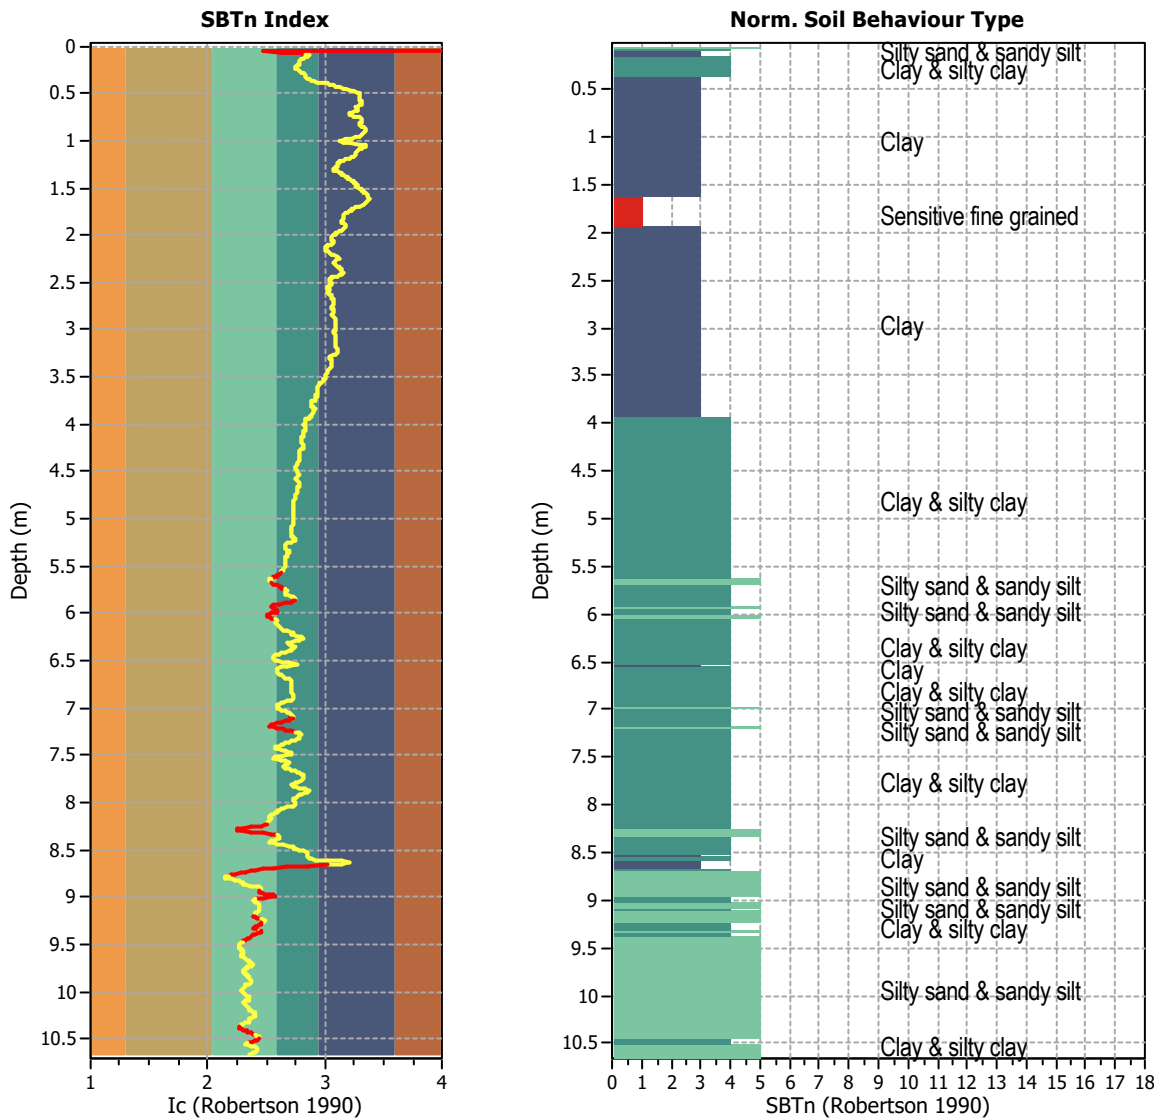


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1066
 Total points excluded: 131
 Exclusion percentage: 12.29%
 Number of layers detected: 20


Estimation of post-earthquake settlements

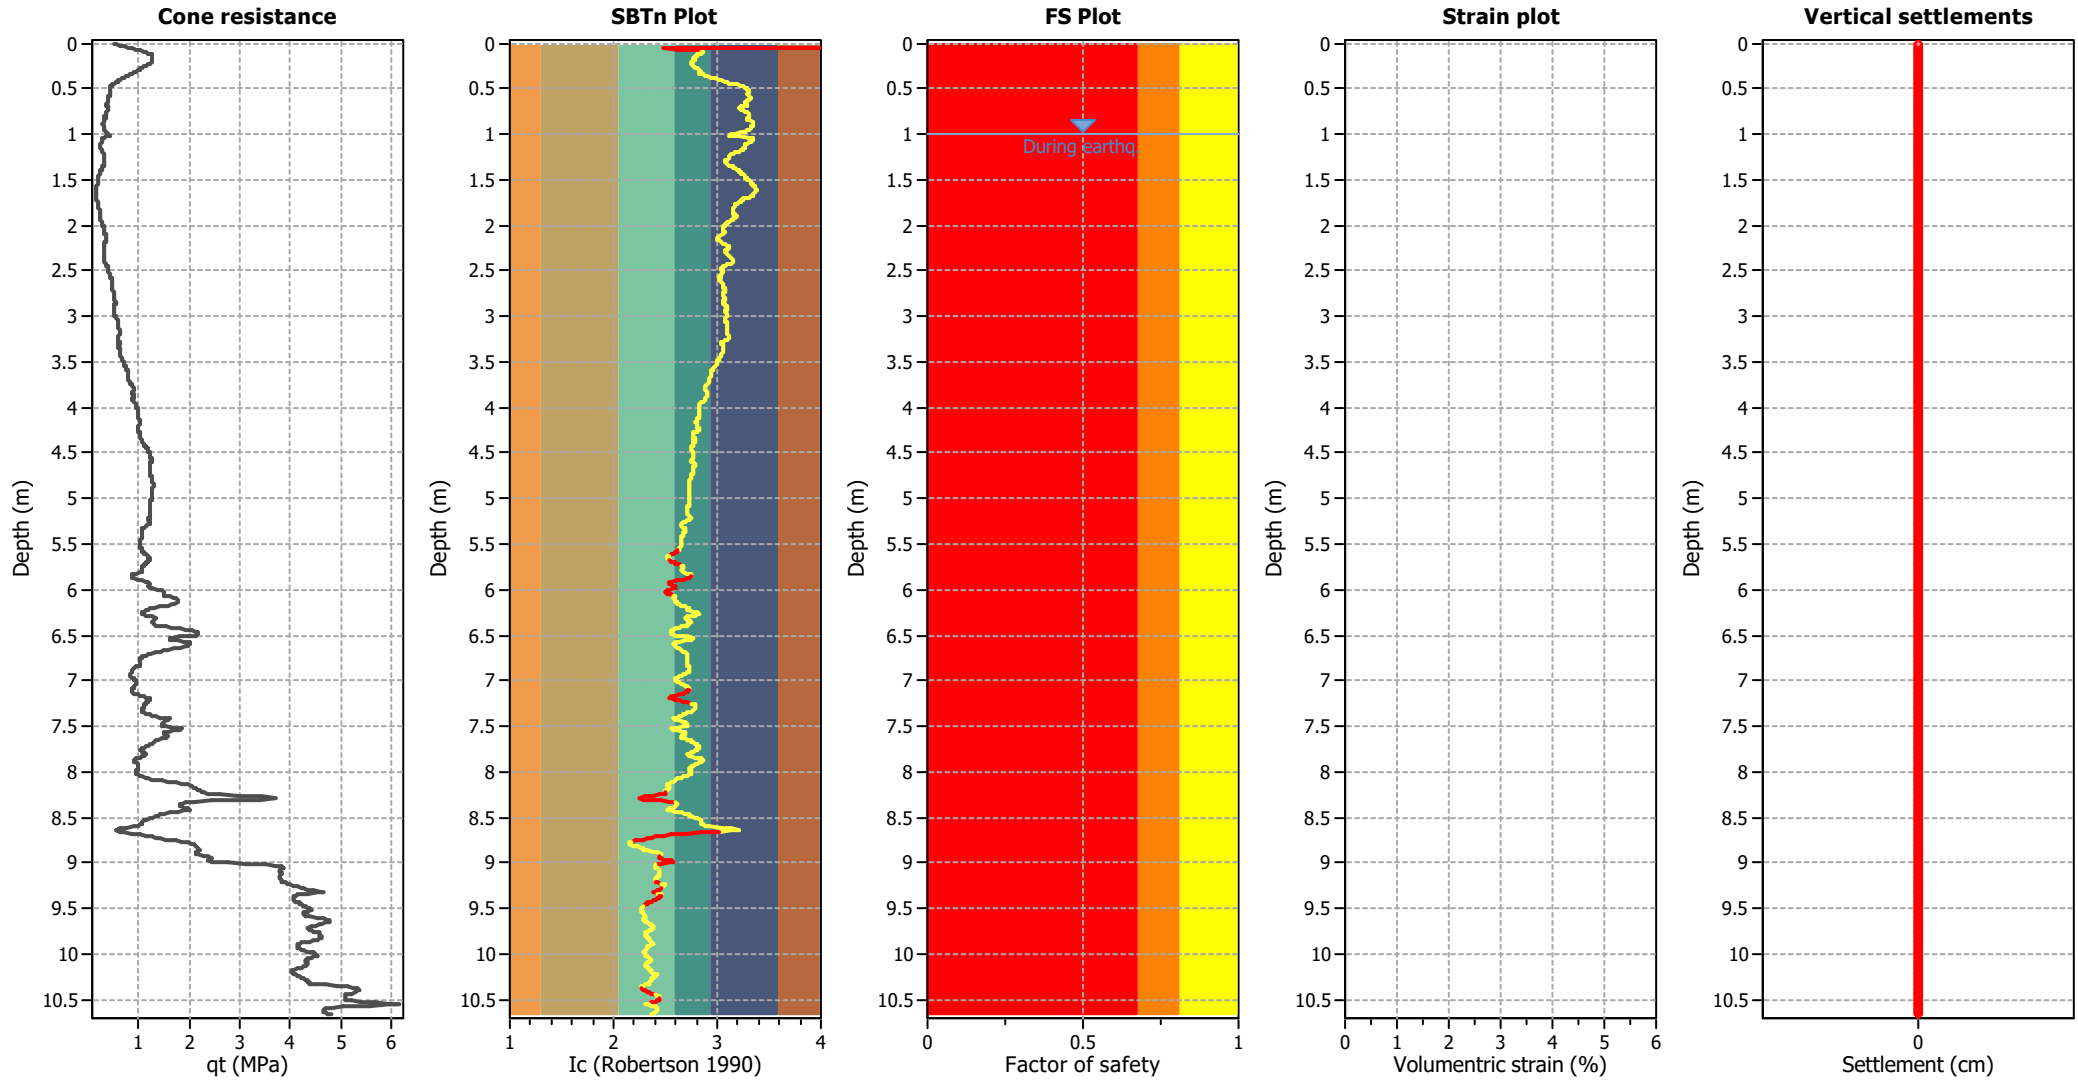

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

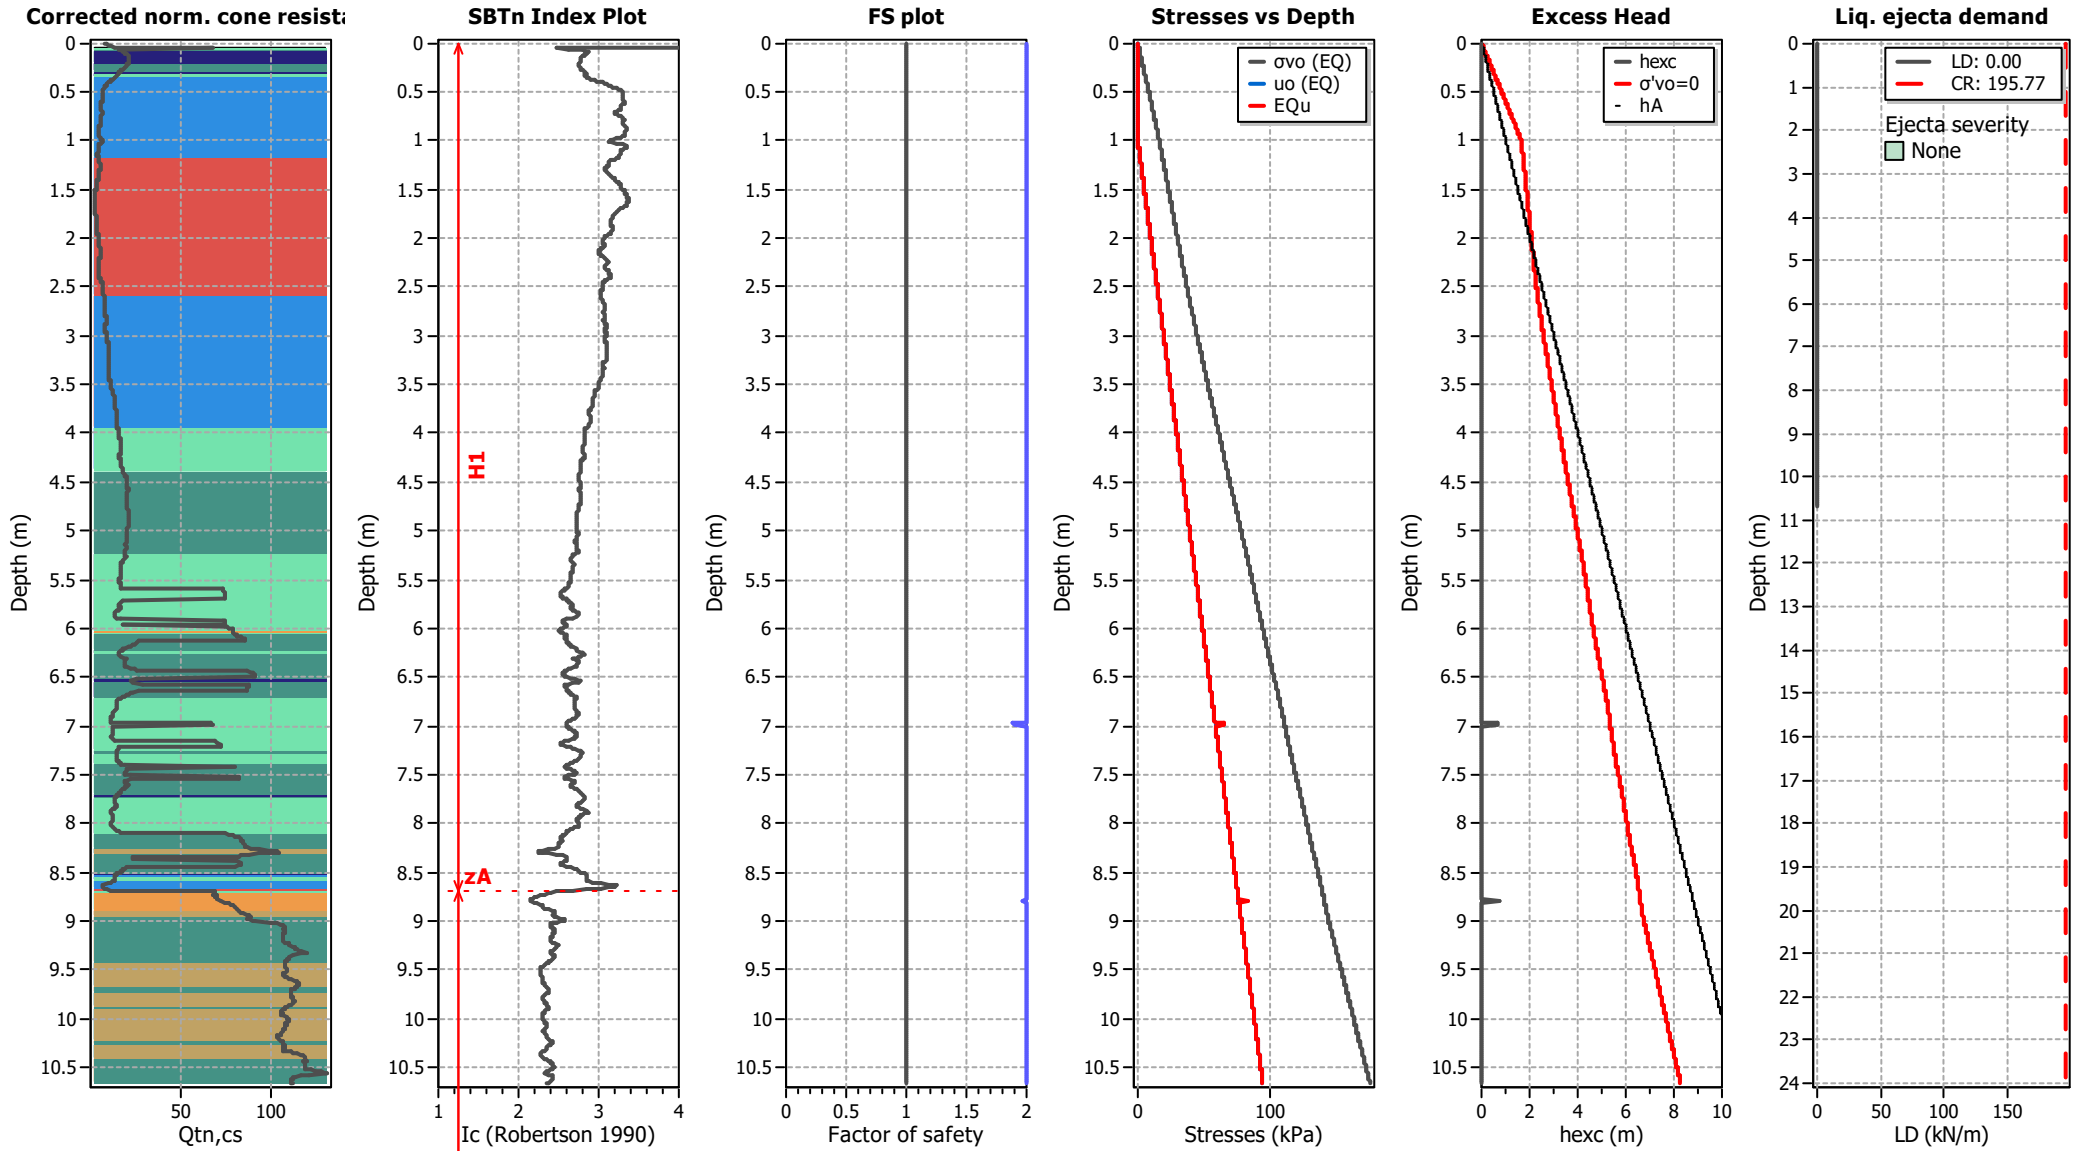

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT408

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

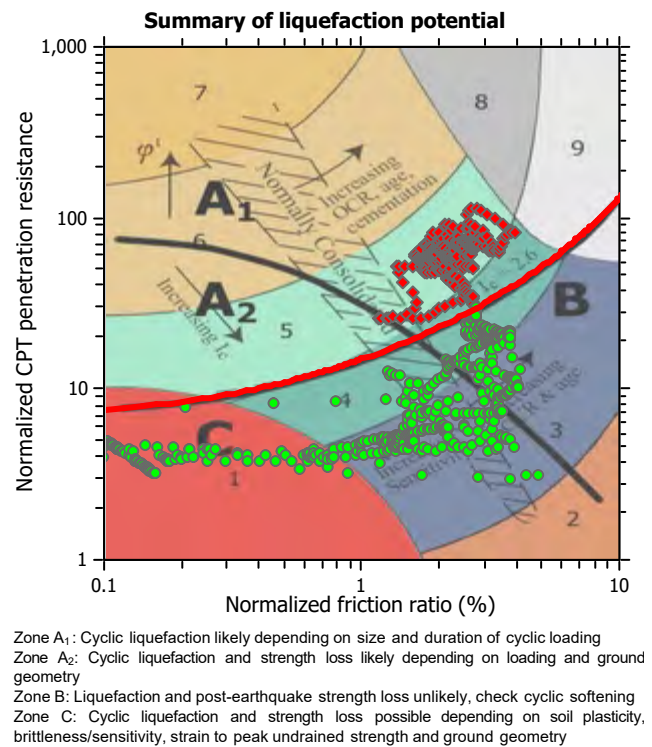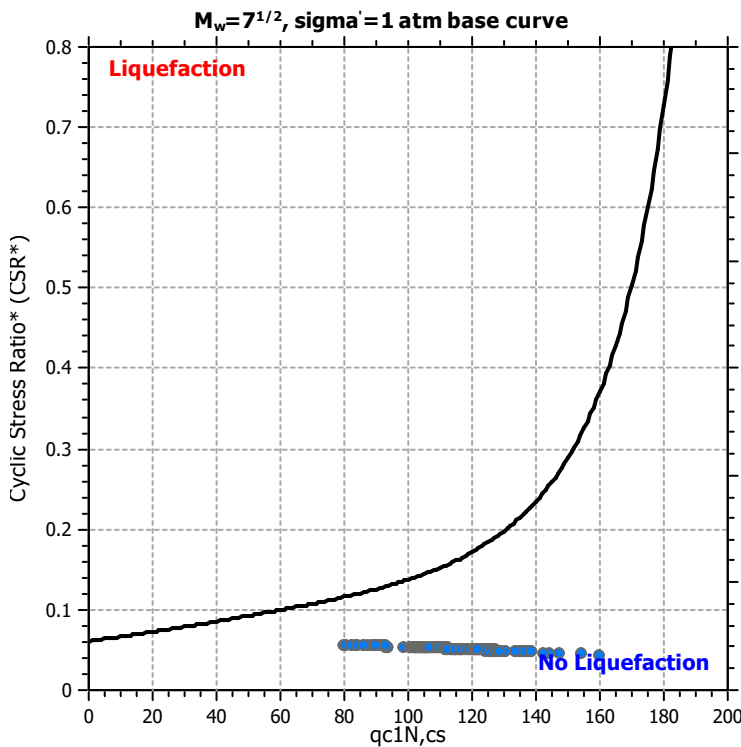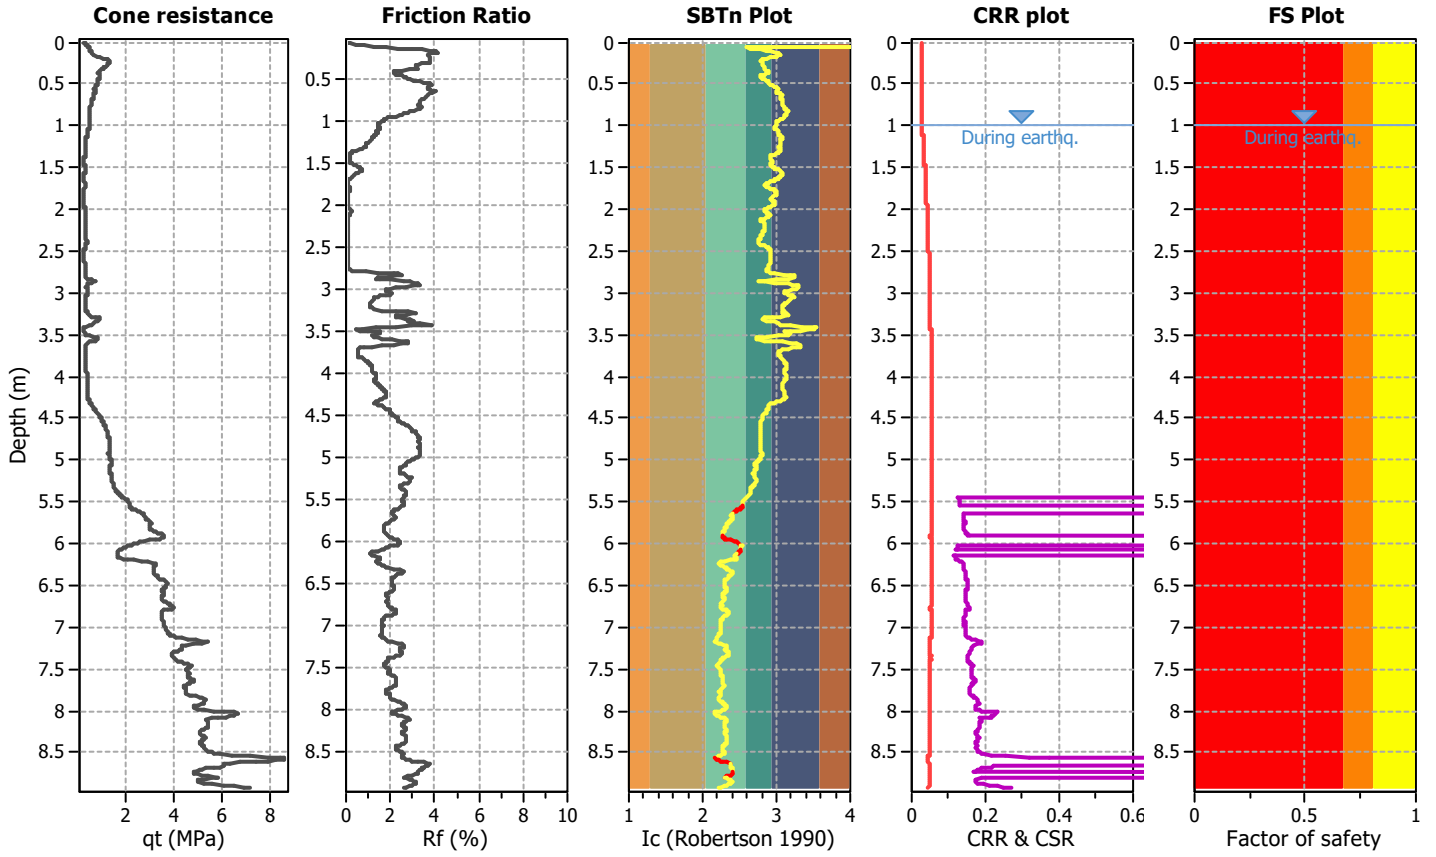

CPT basic interpretation plots

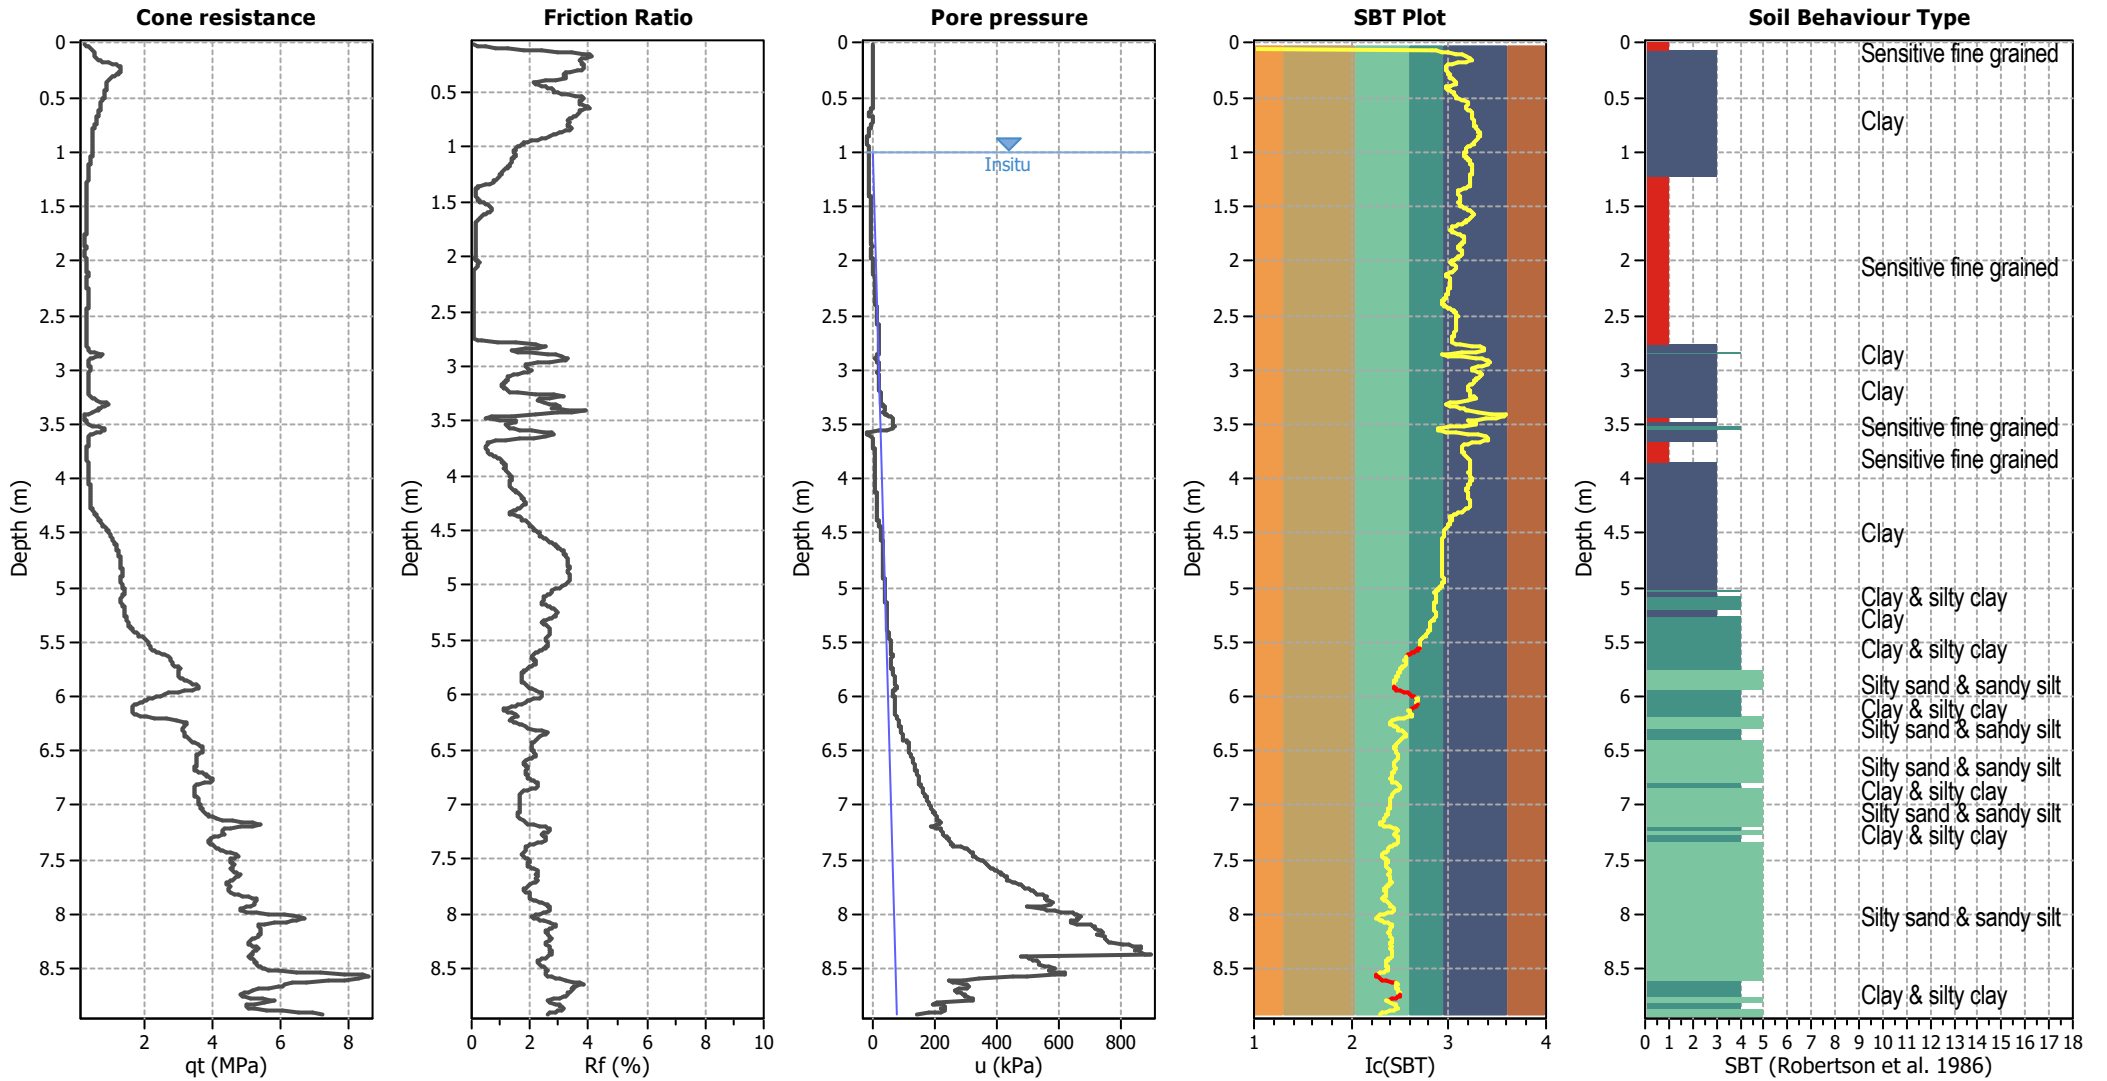


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained

CPT basic interpretation plots (normalized)

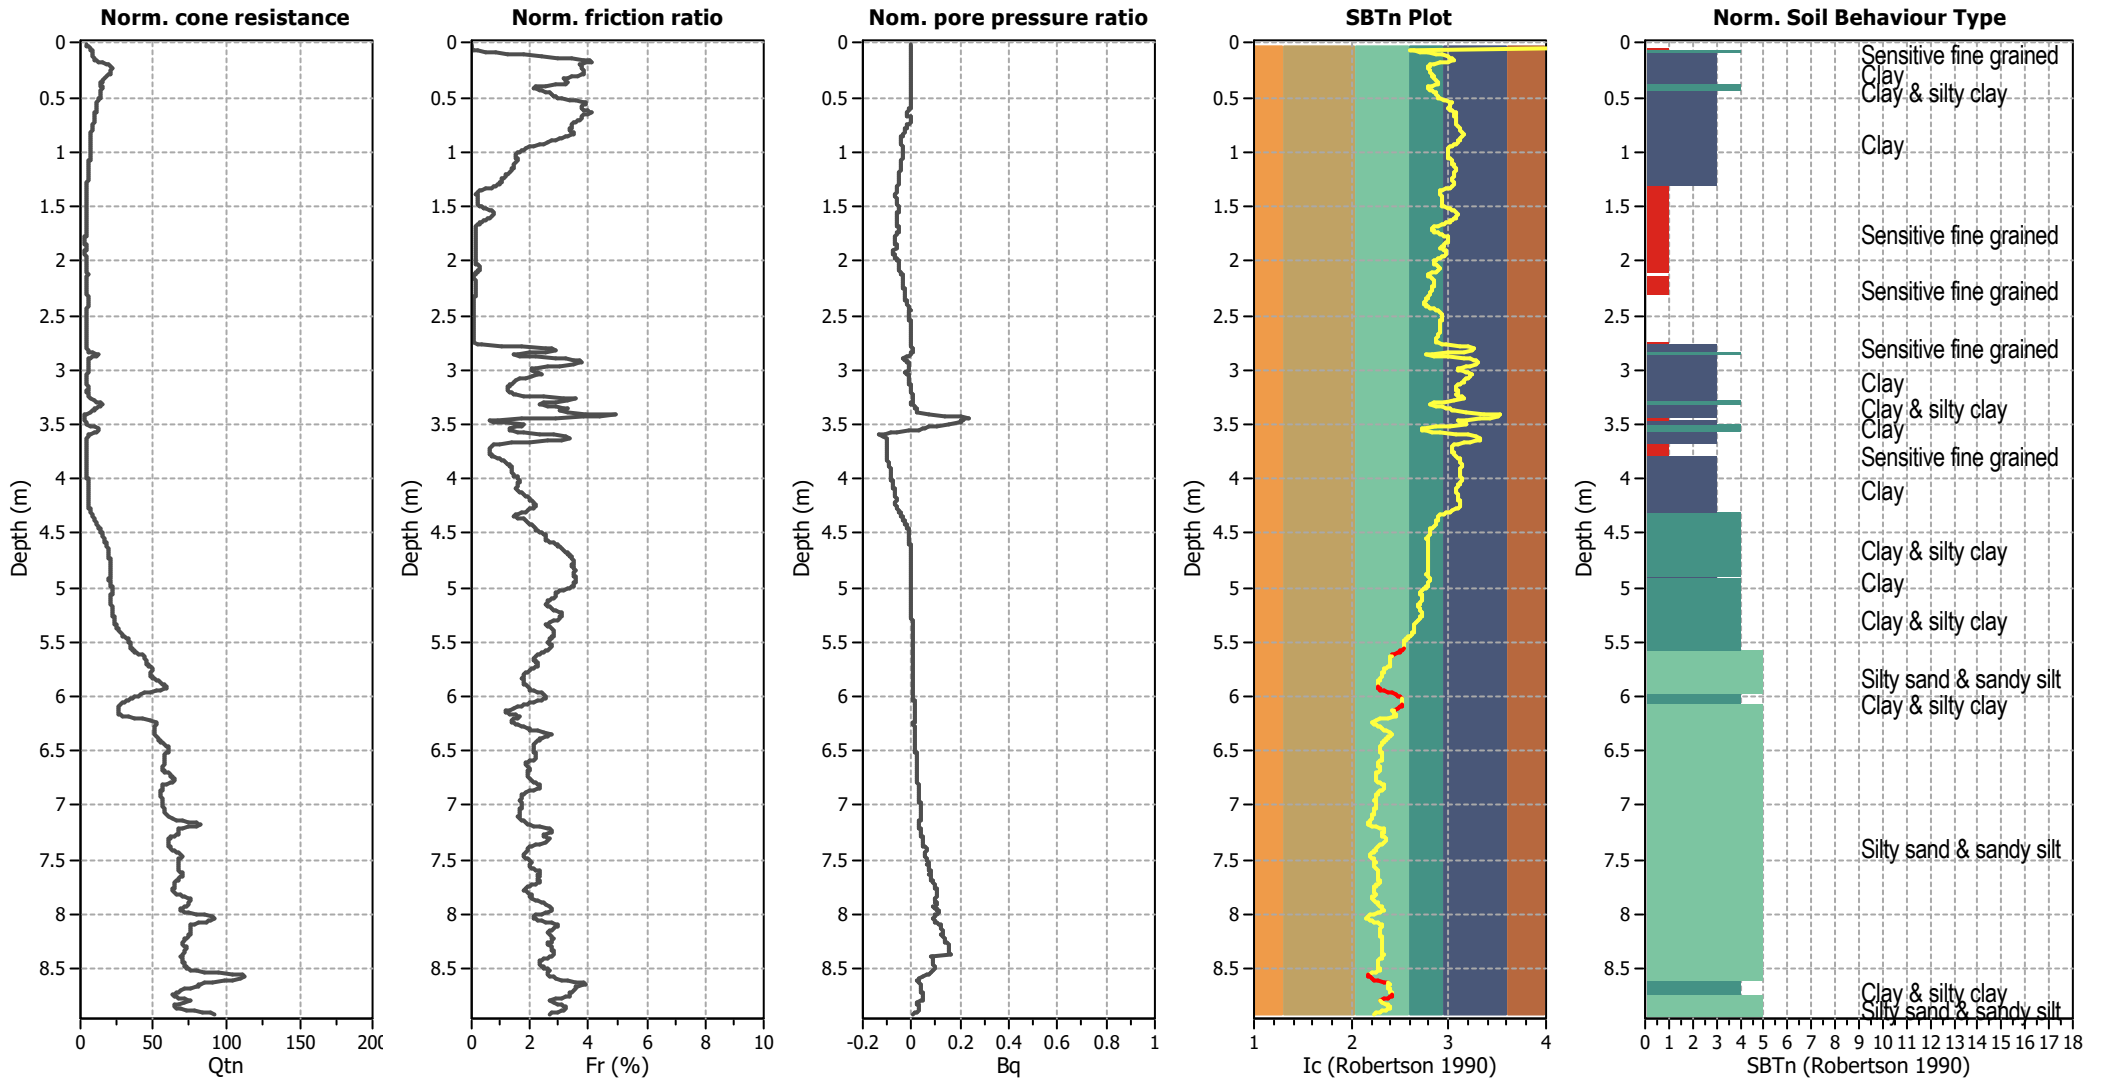


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

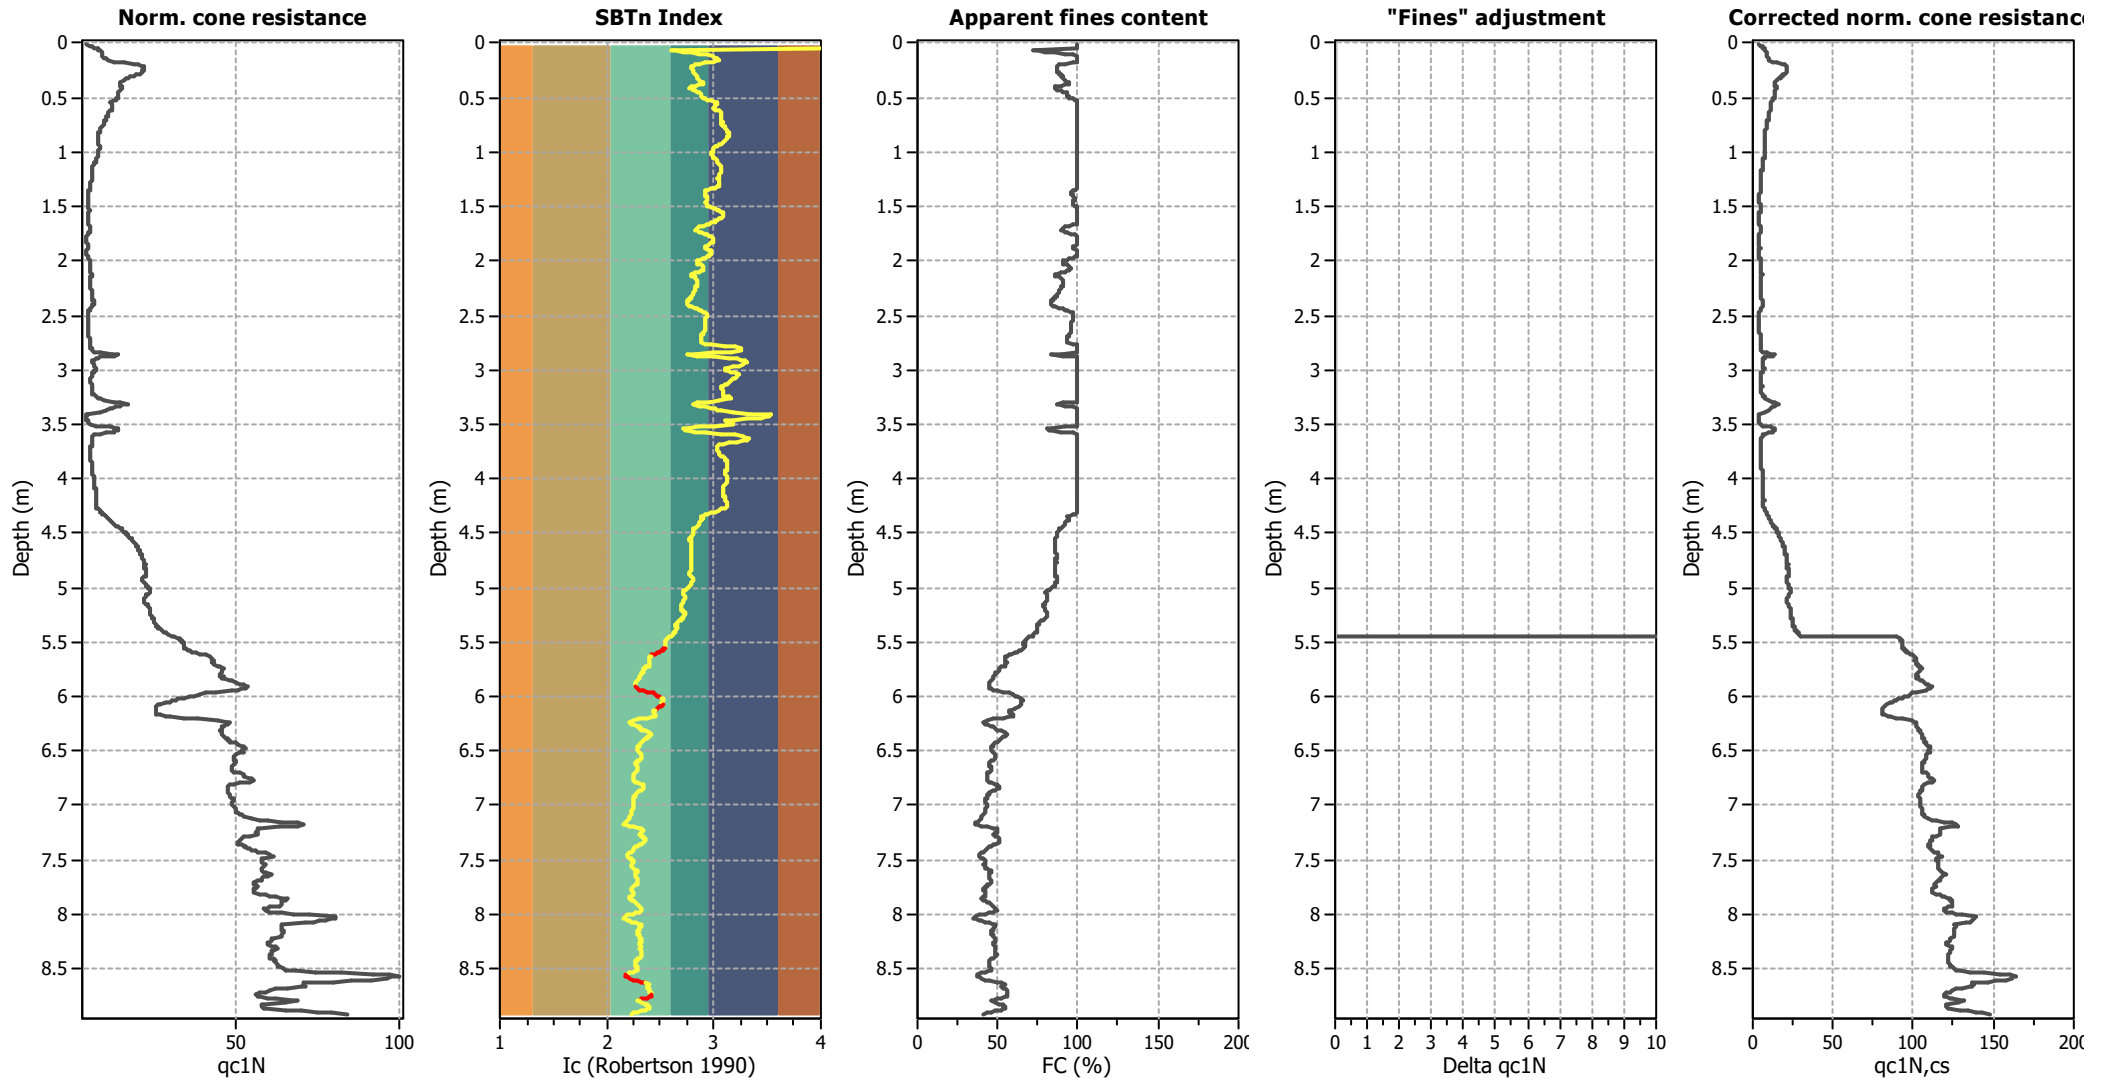

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

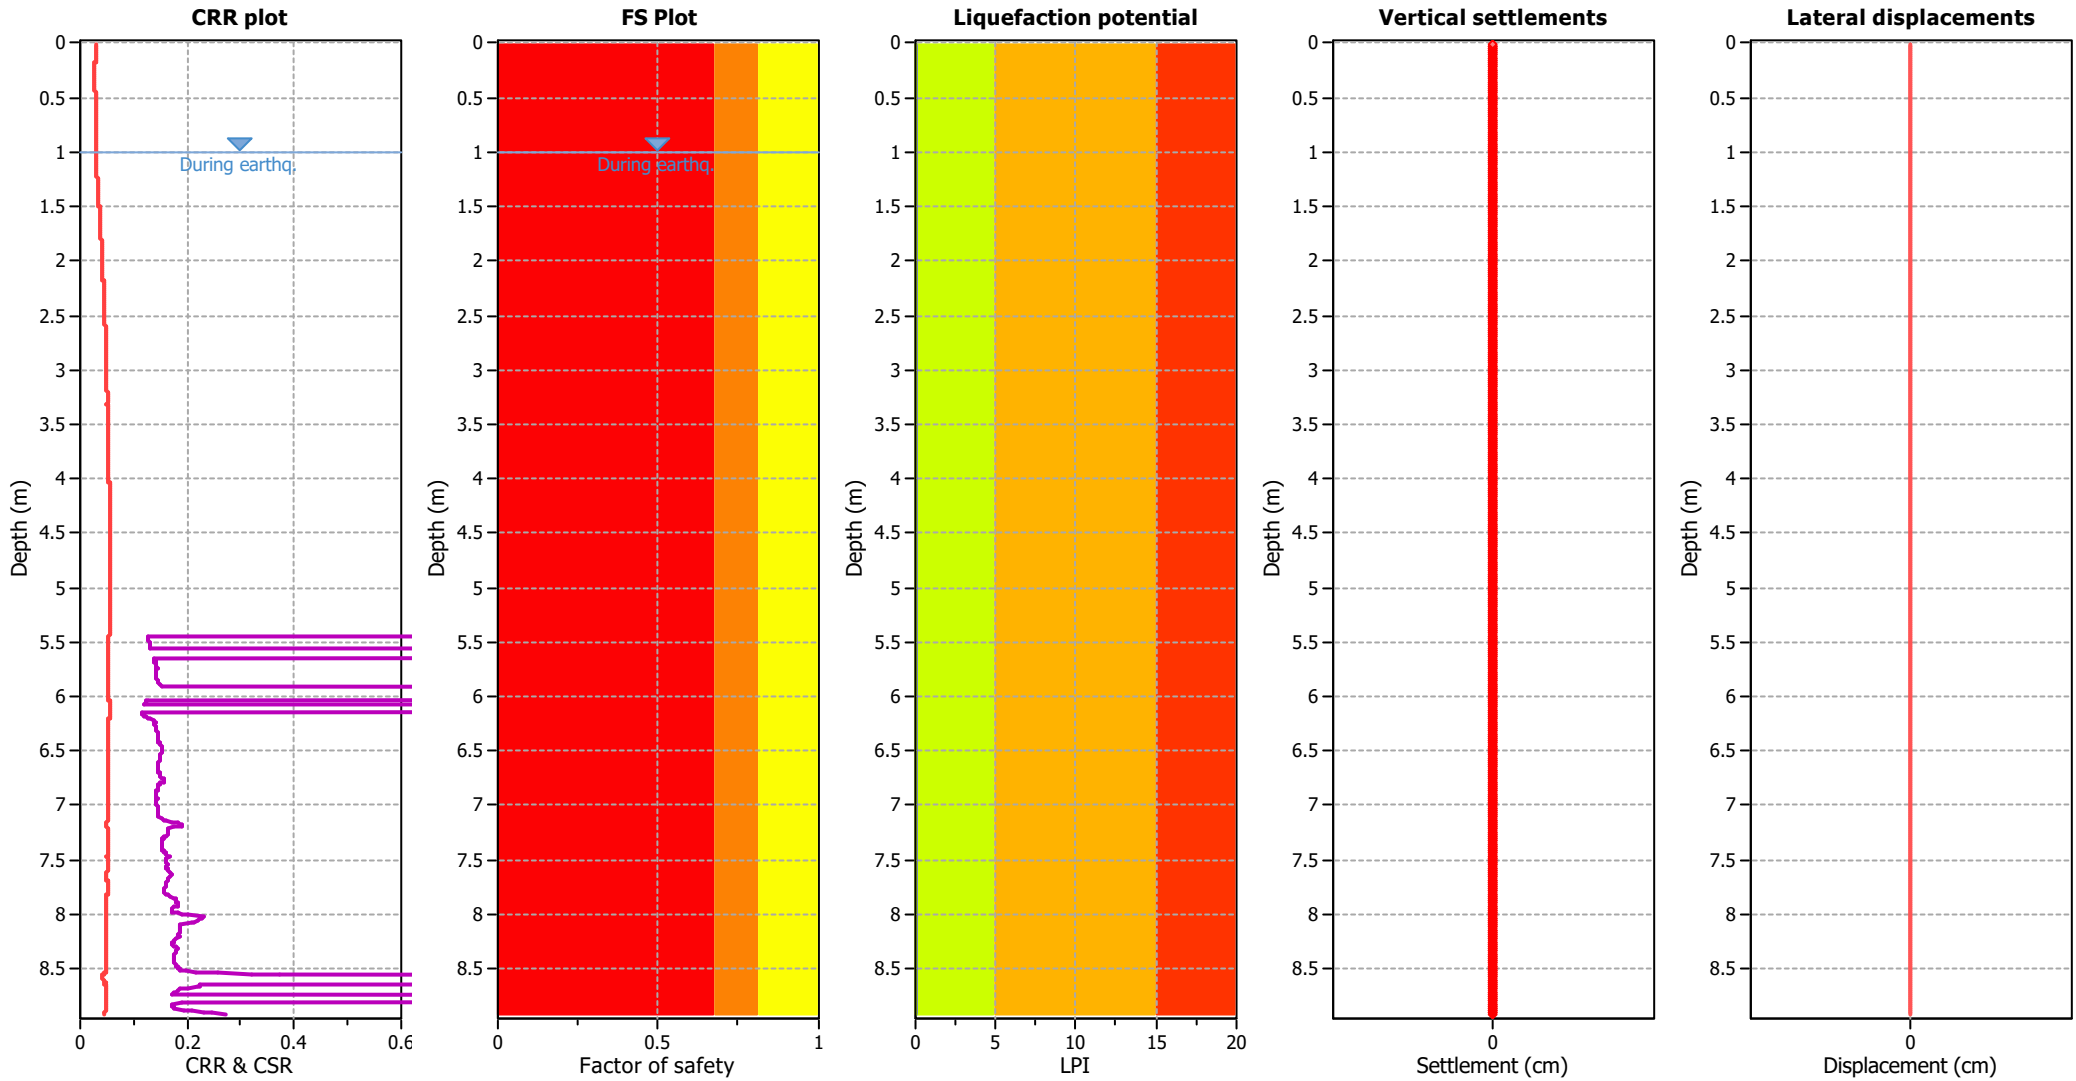

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

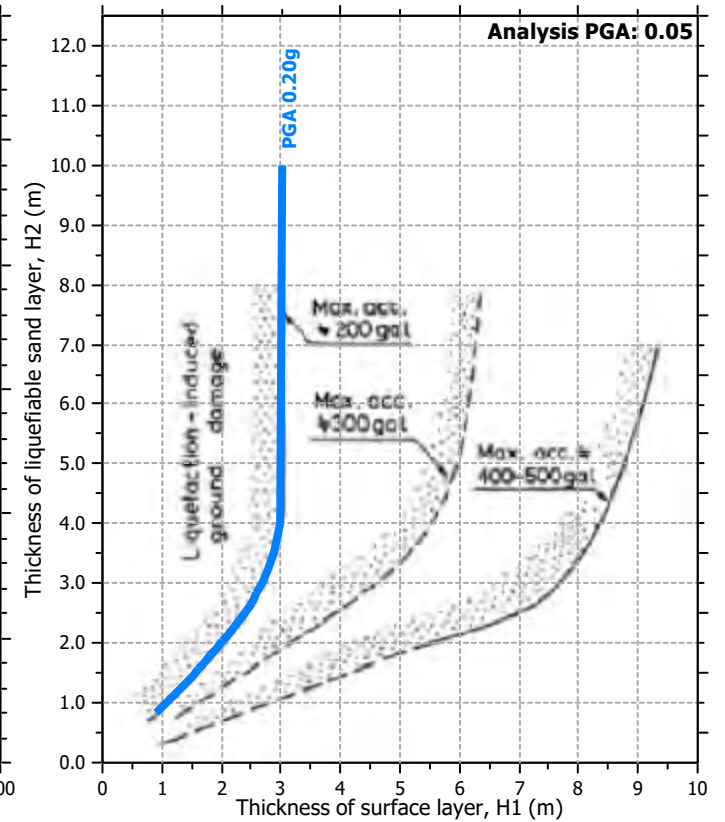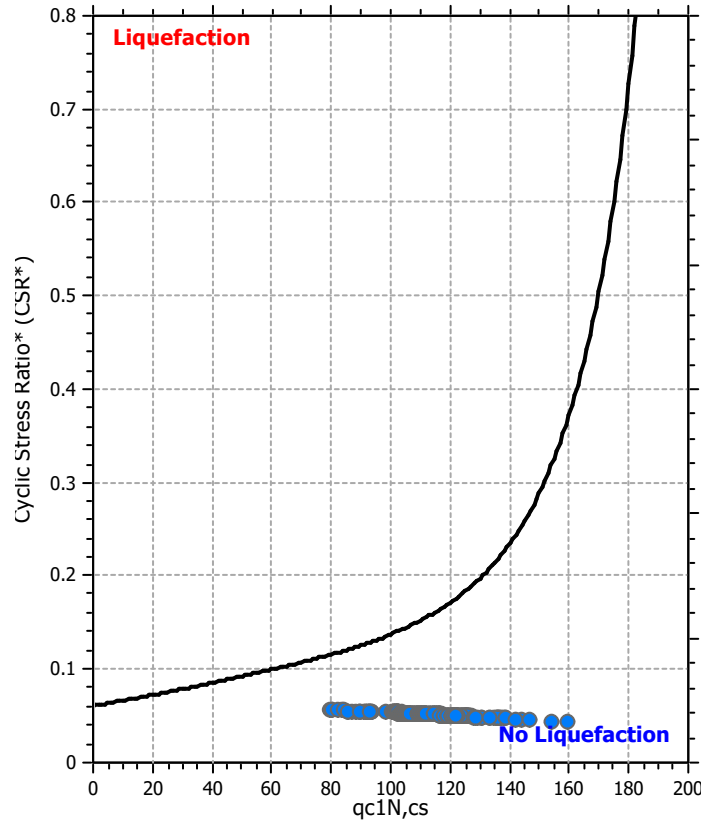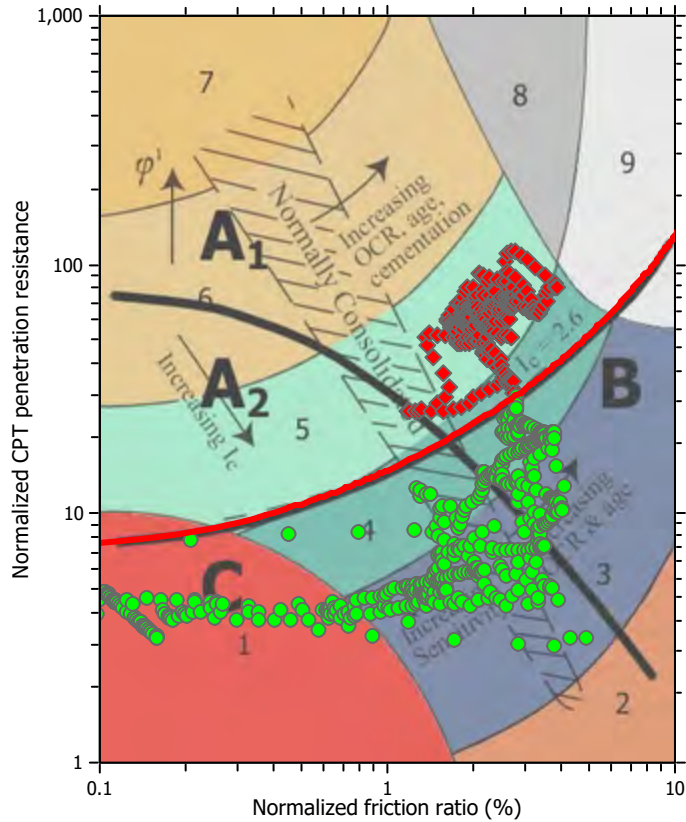

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

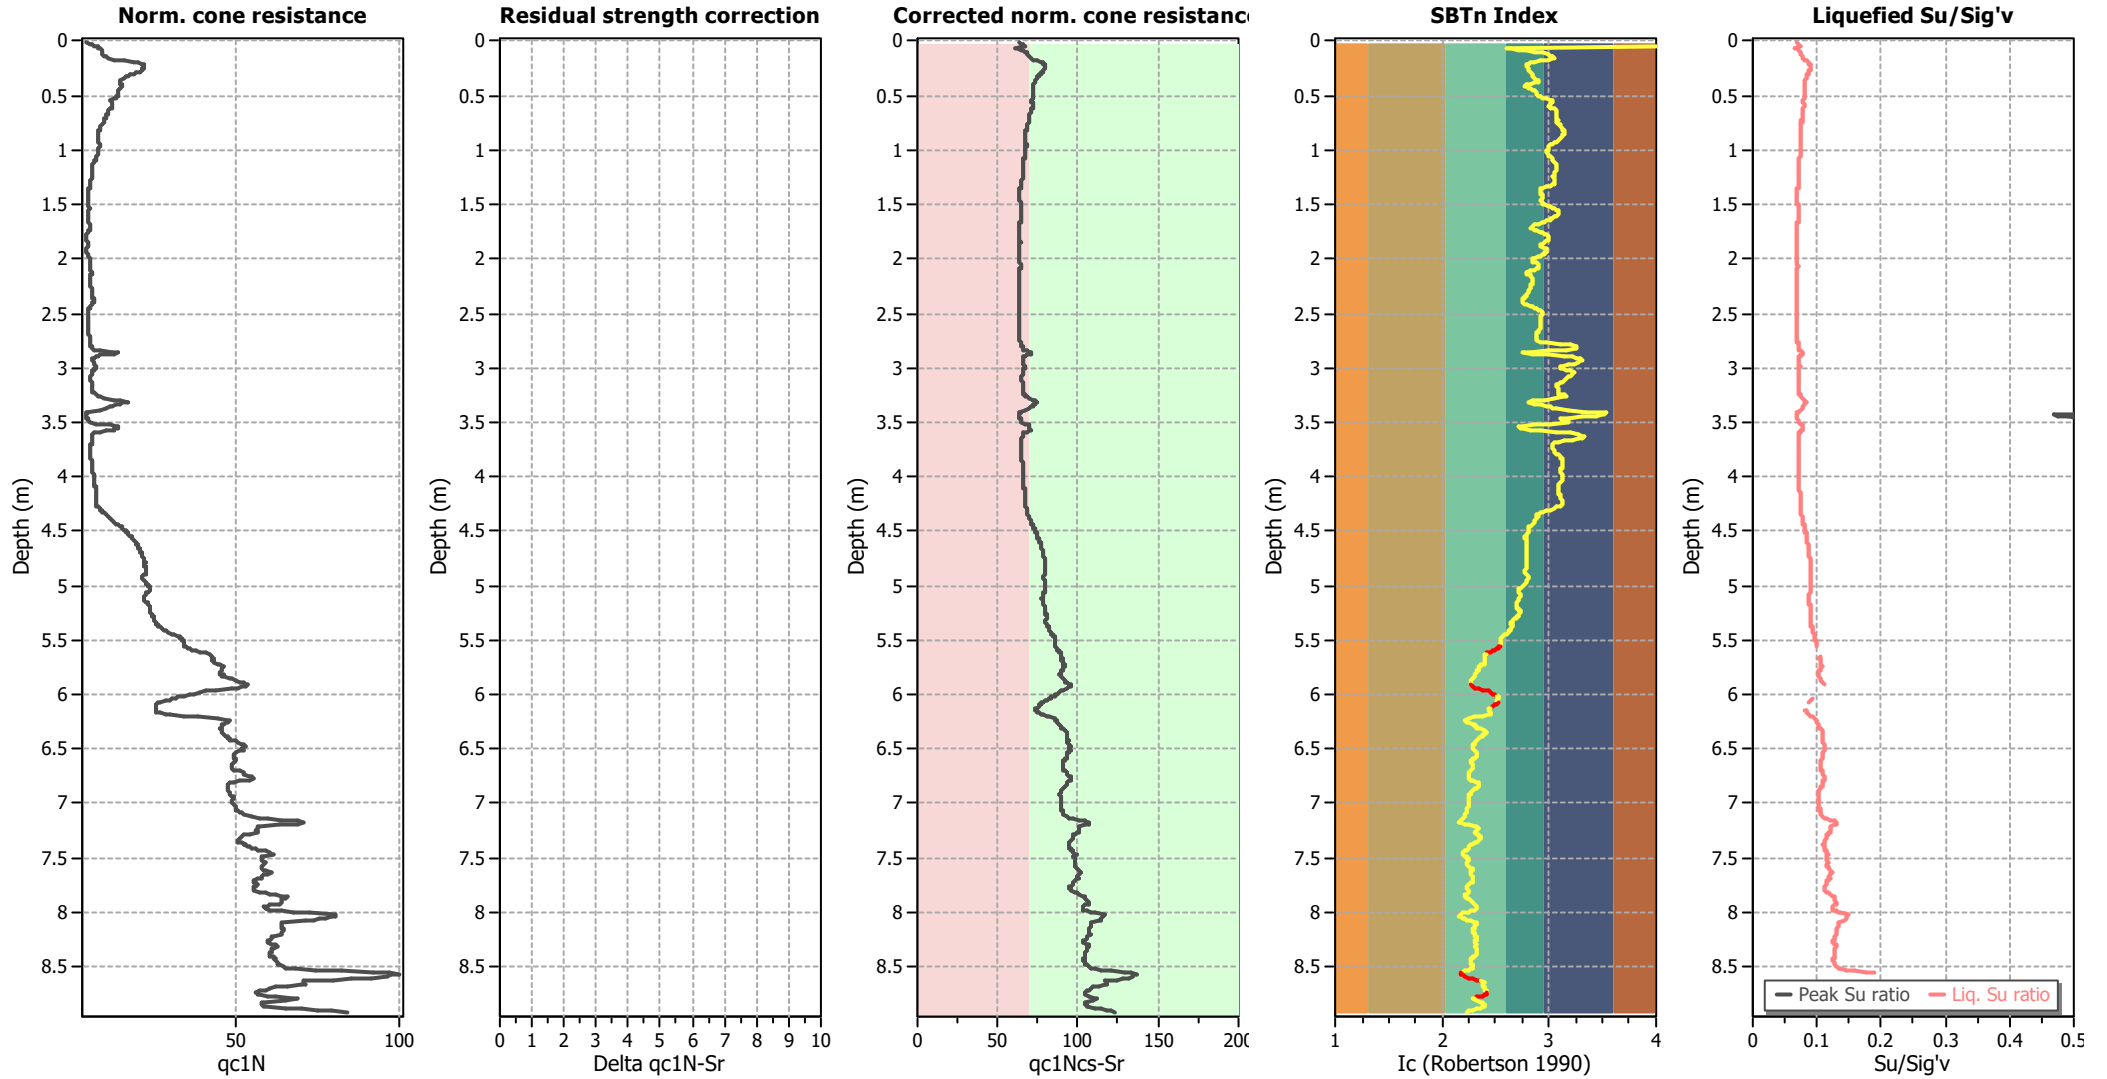

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

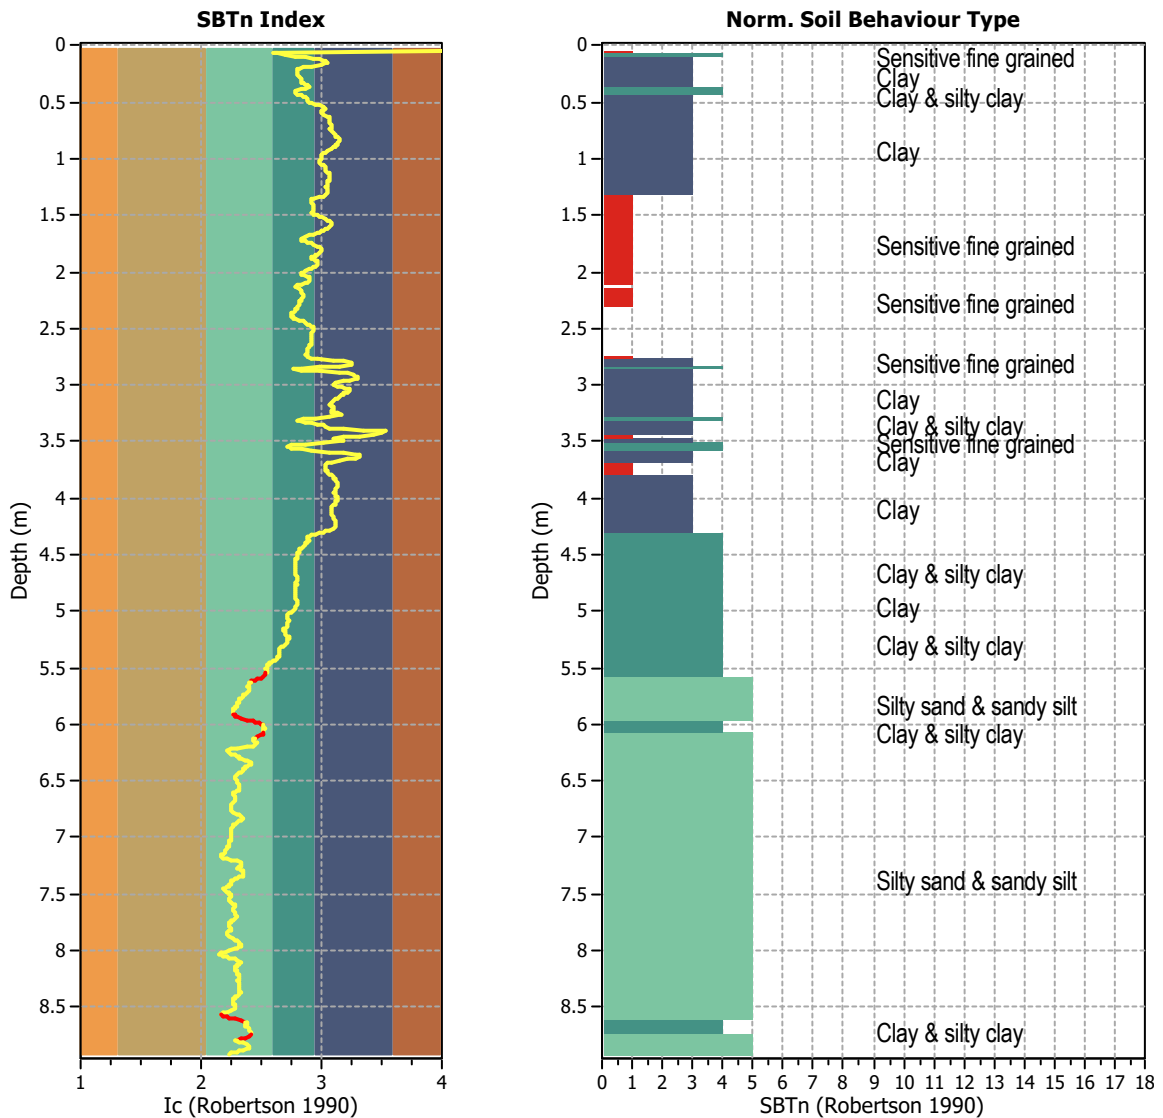


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 892
 Total points excluded: 40
 Exclusion percentage: 4.48%
 Number of layers detected: 5


Estimation of post-earthquake settlements

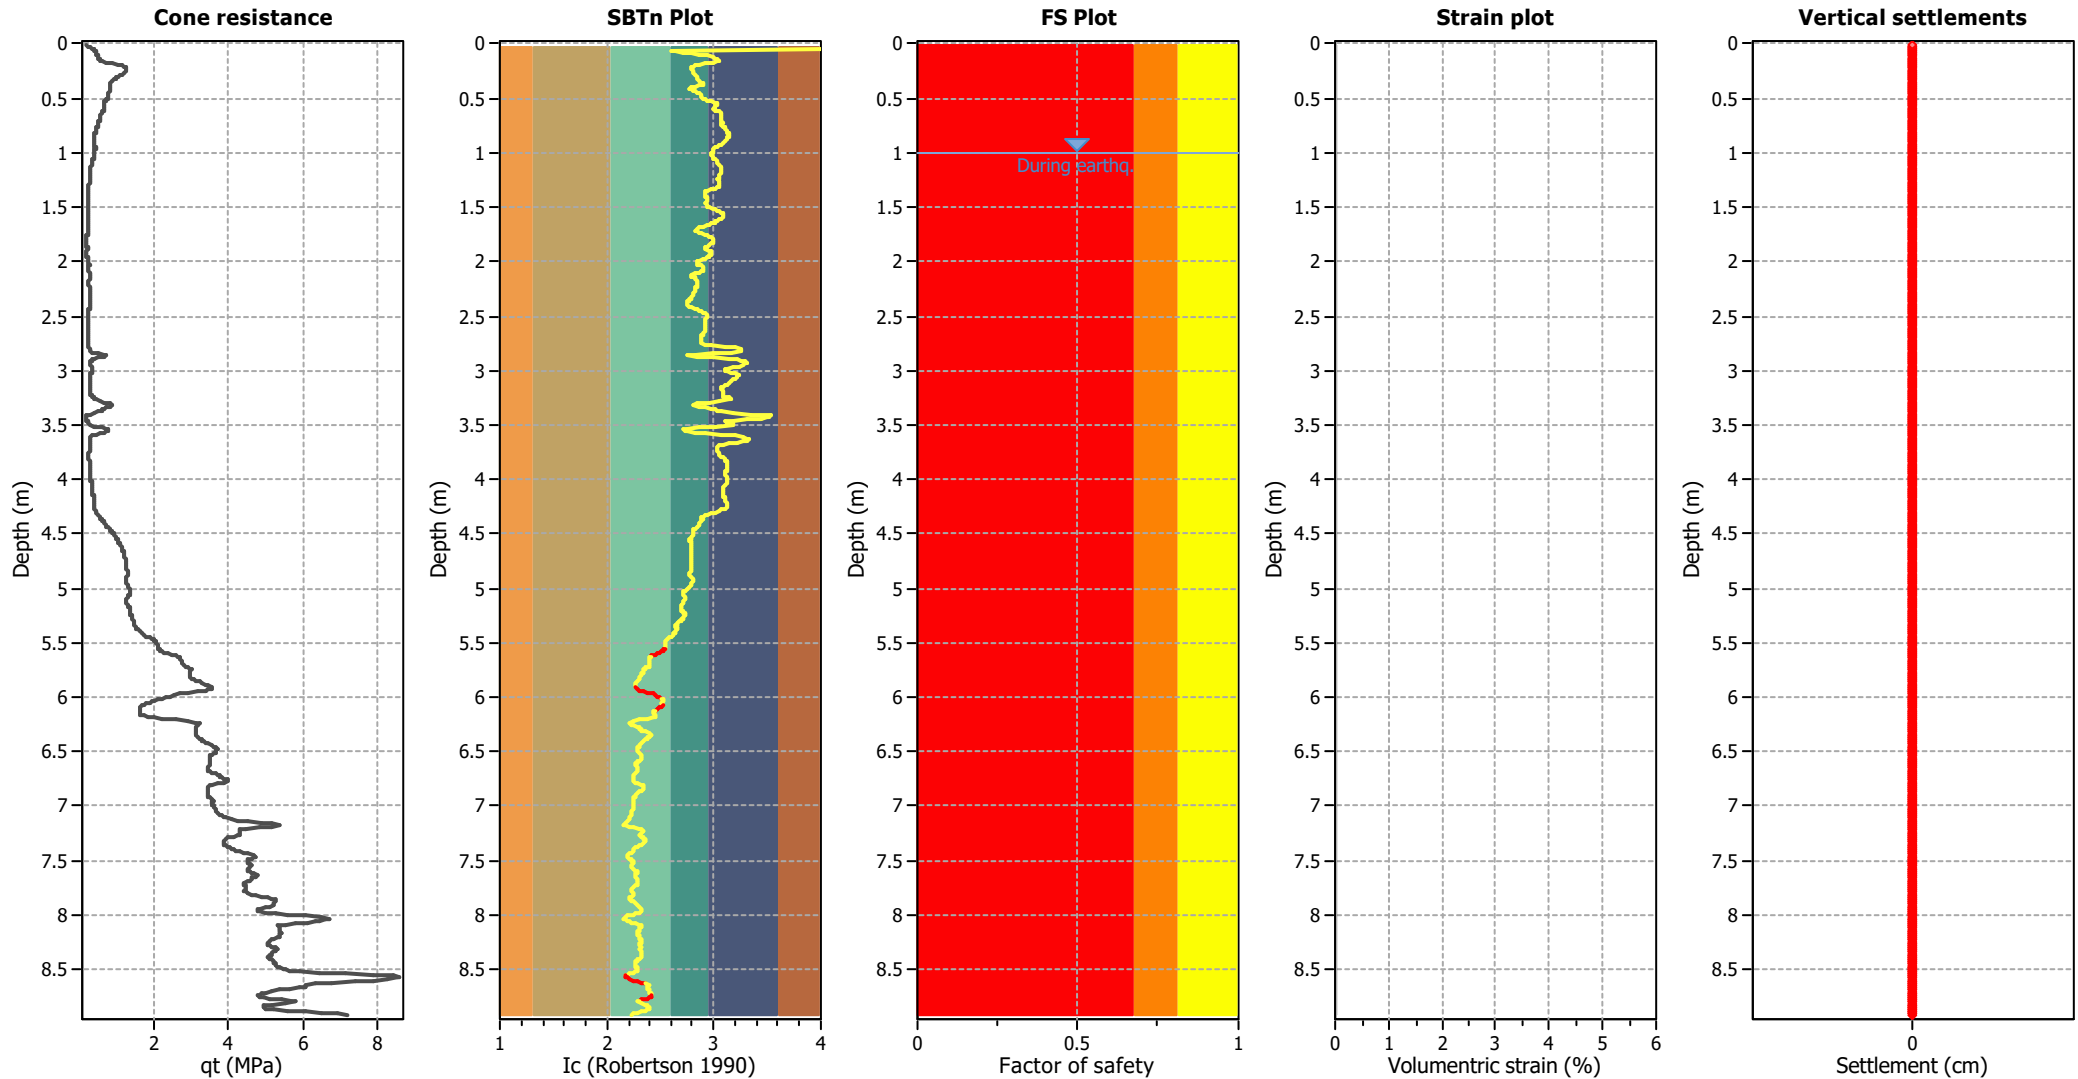

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

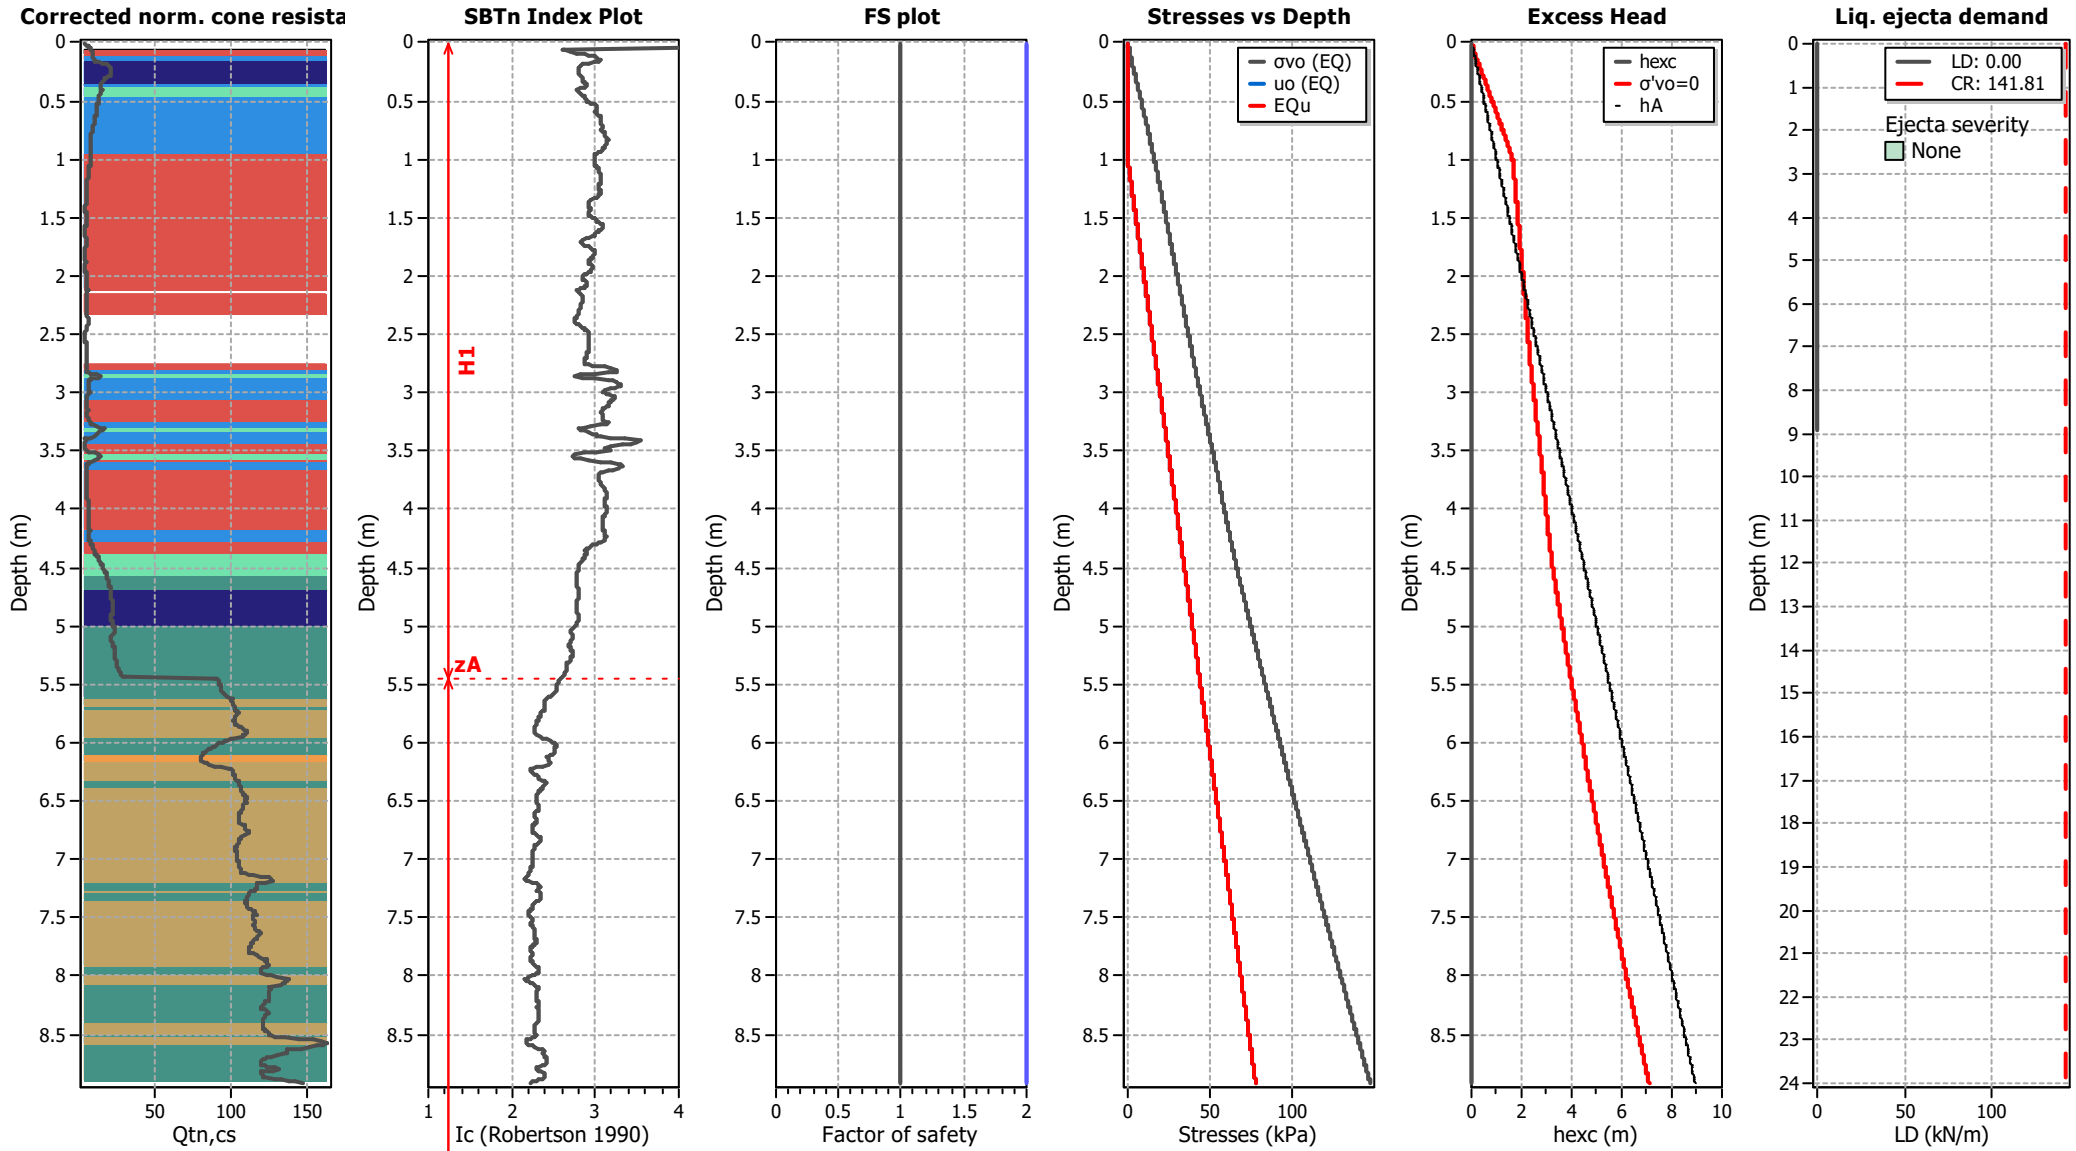

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT409

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

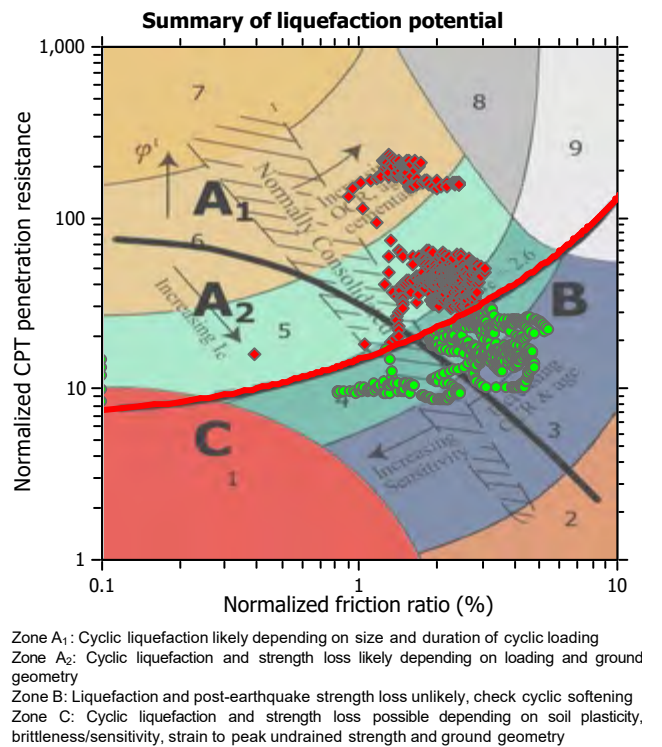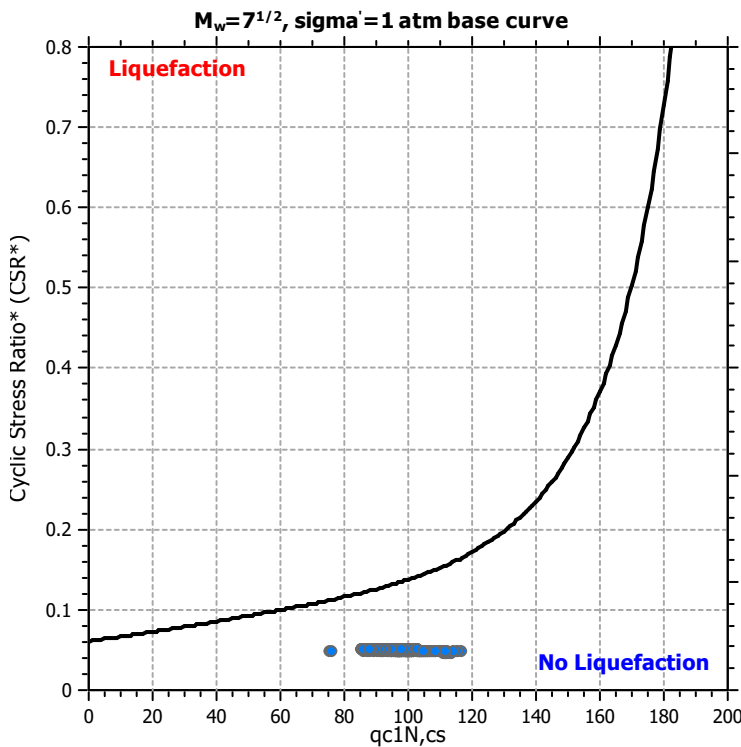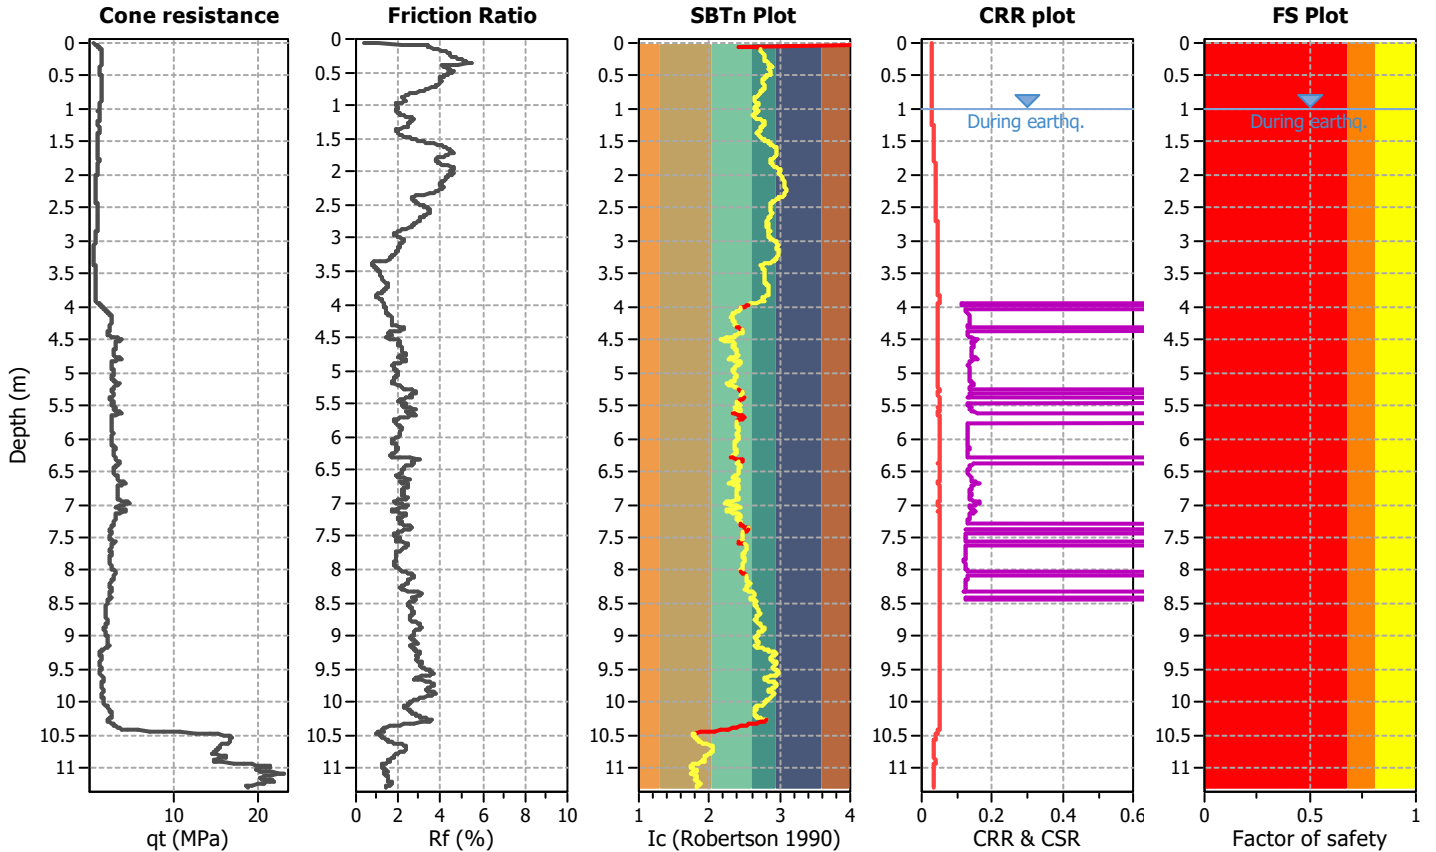

CPT basic interpretation plots

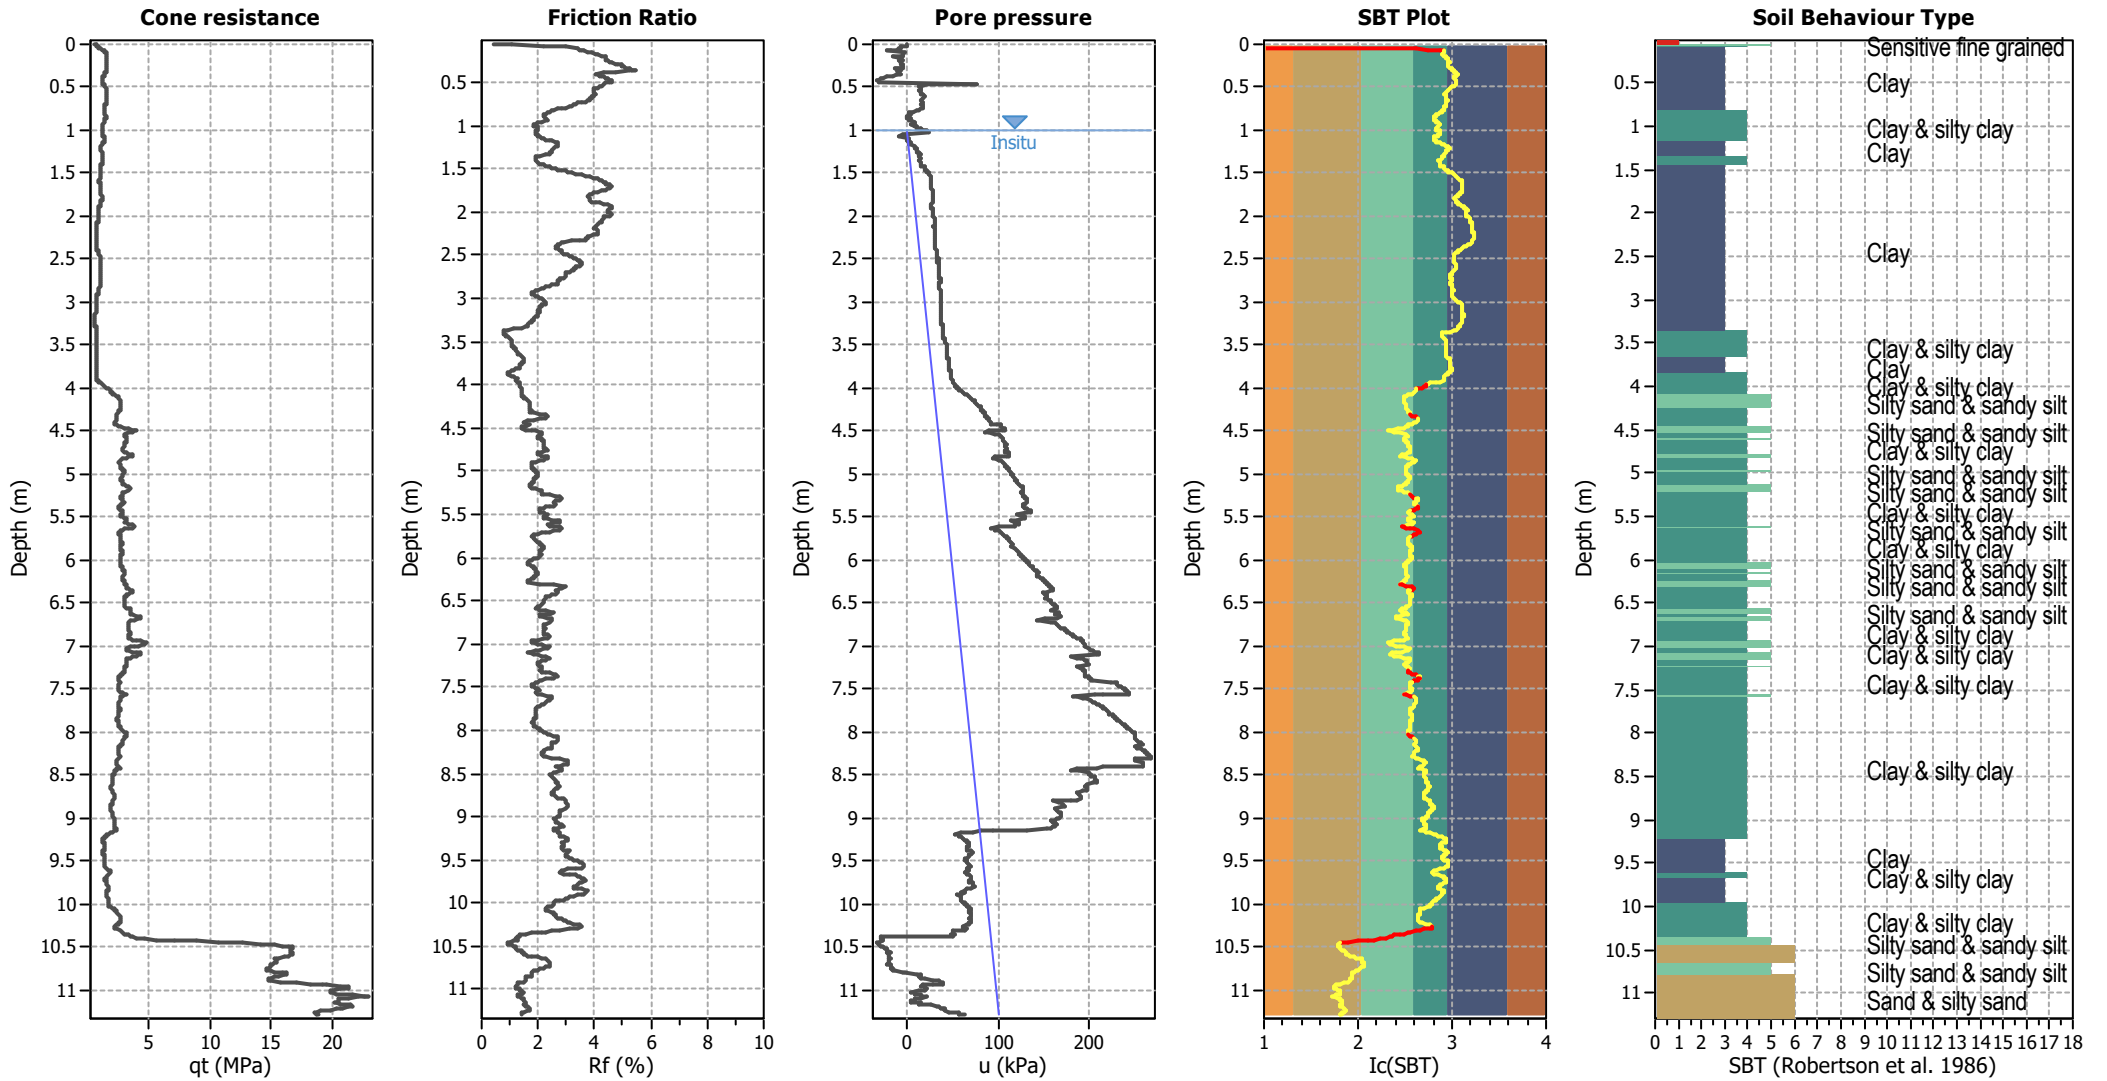


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

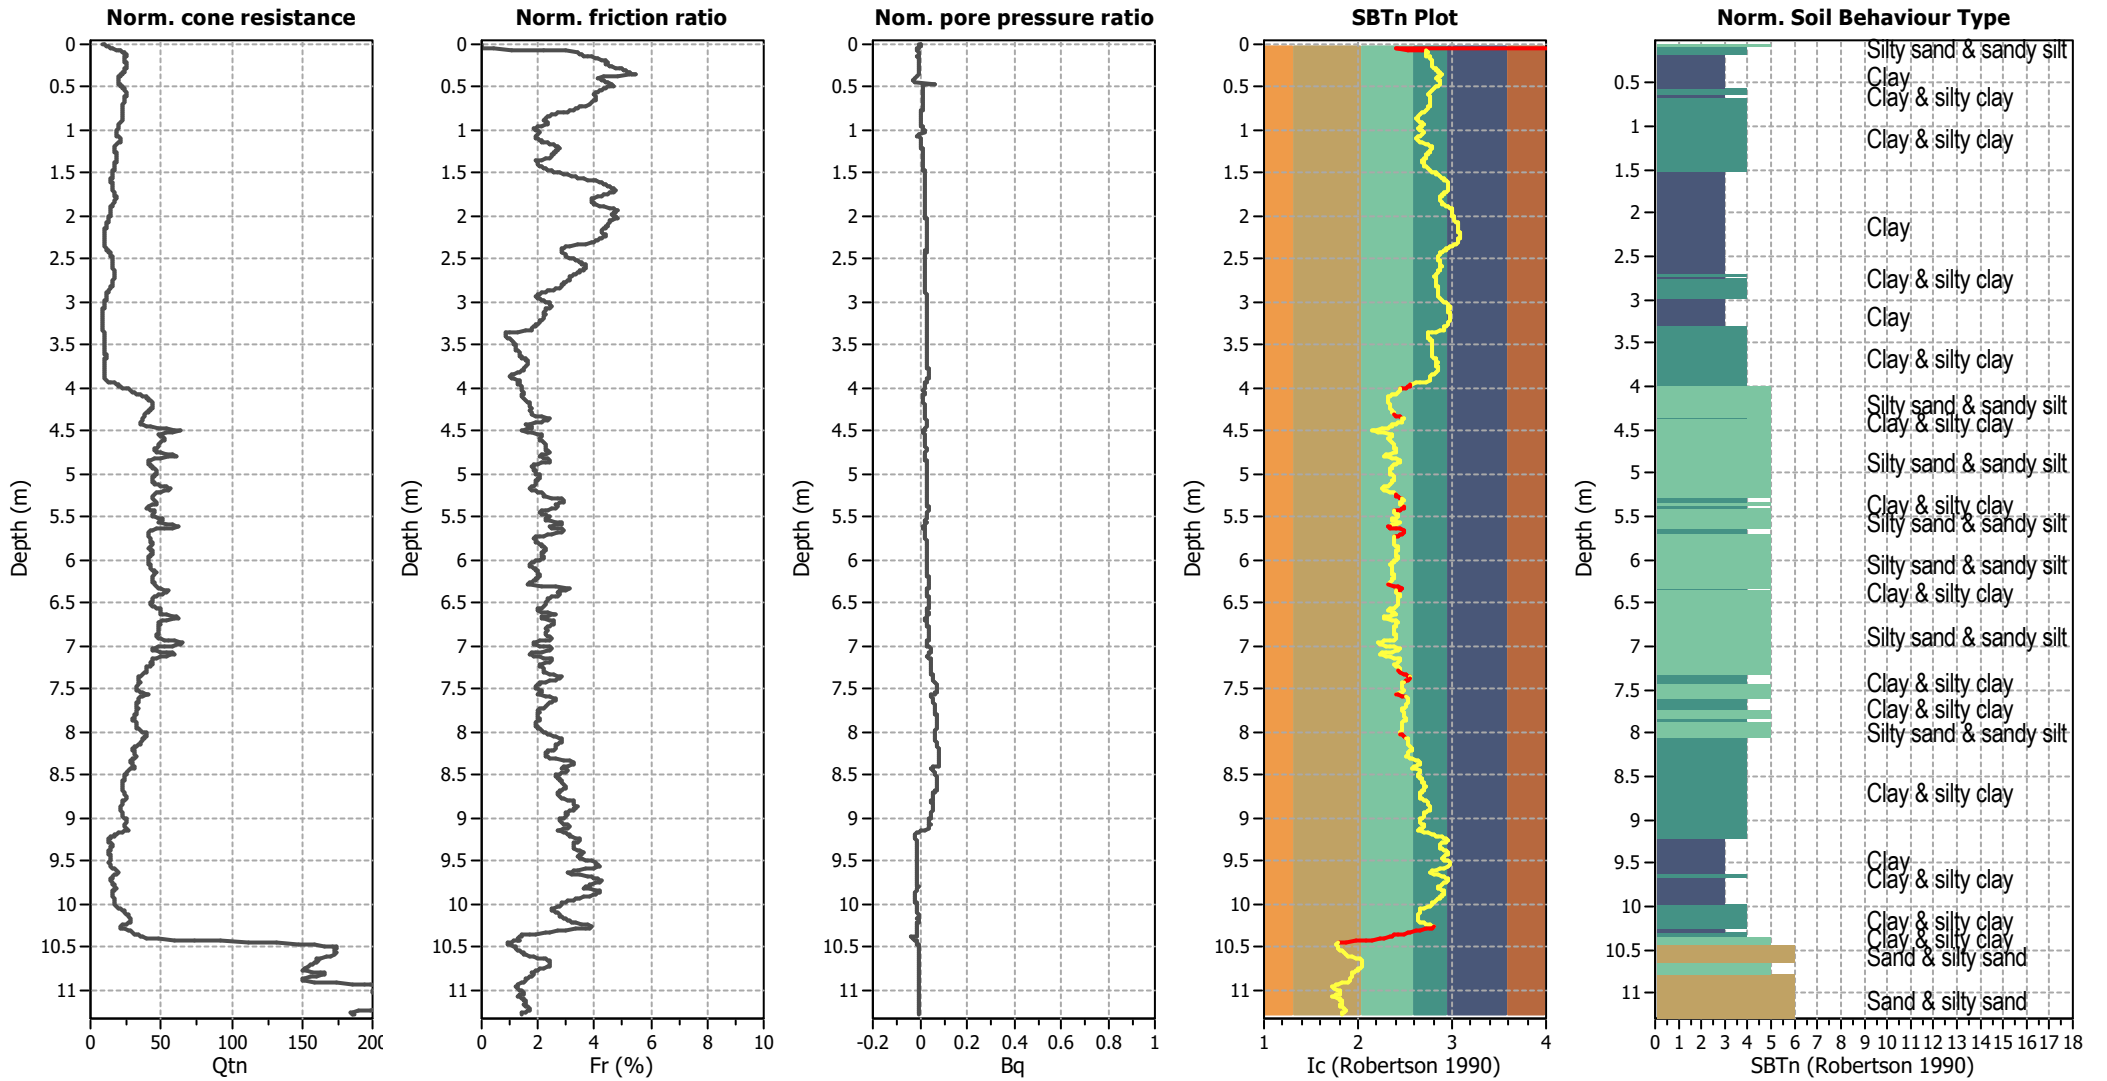


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

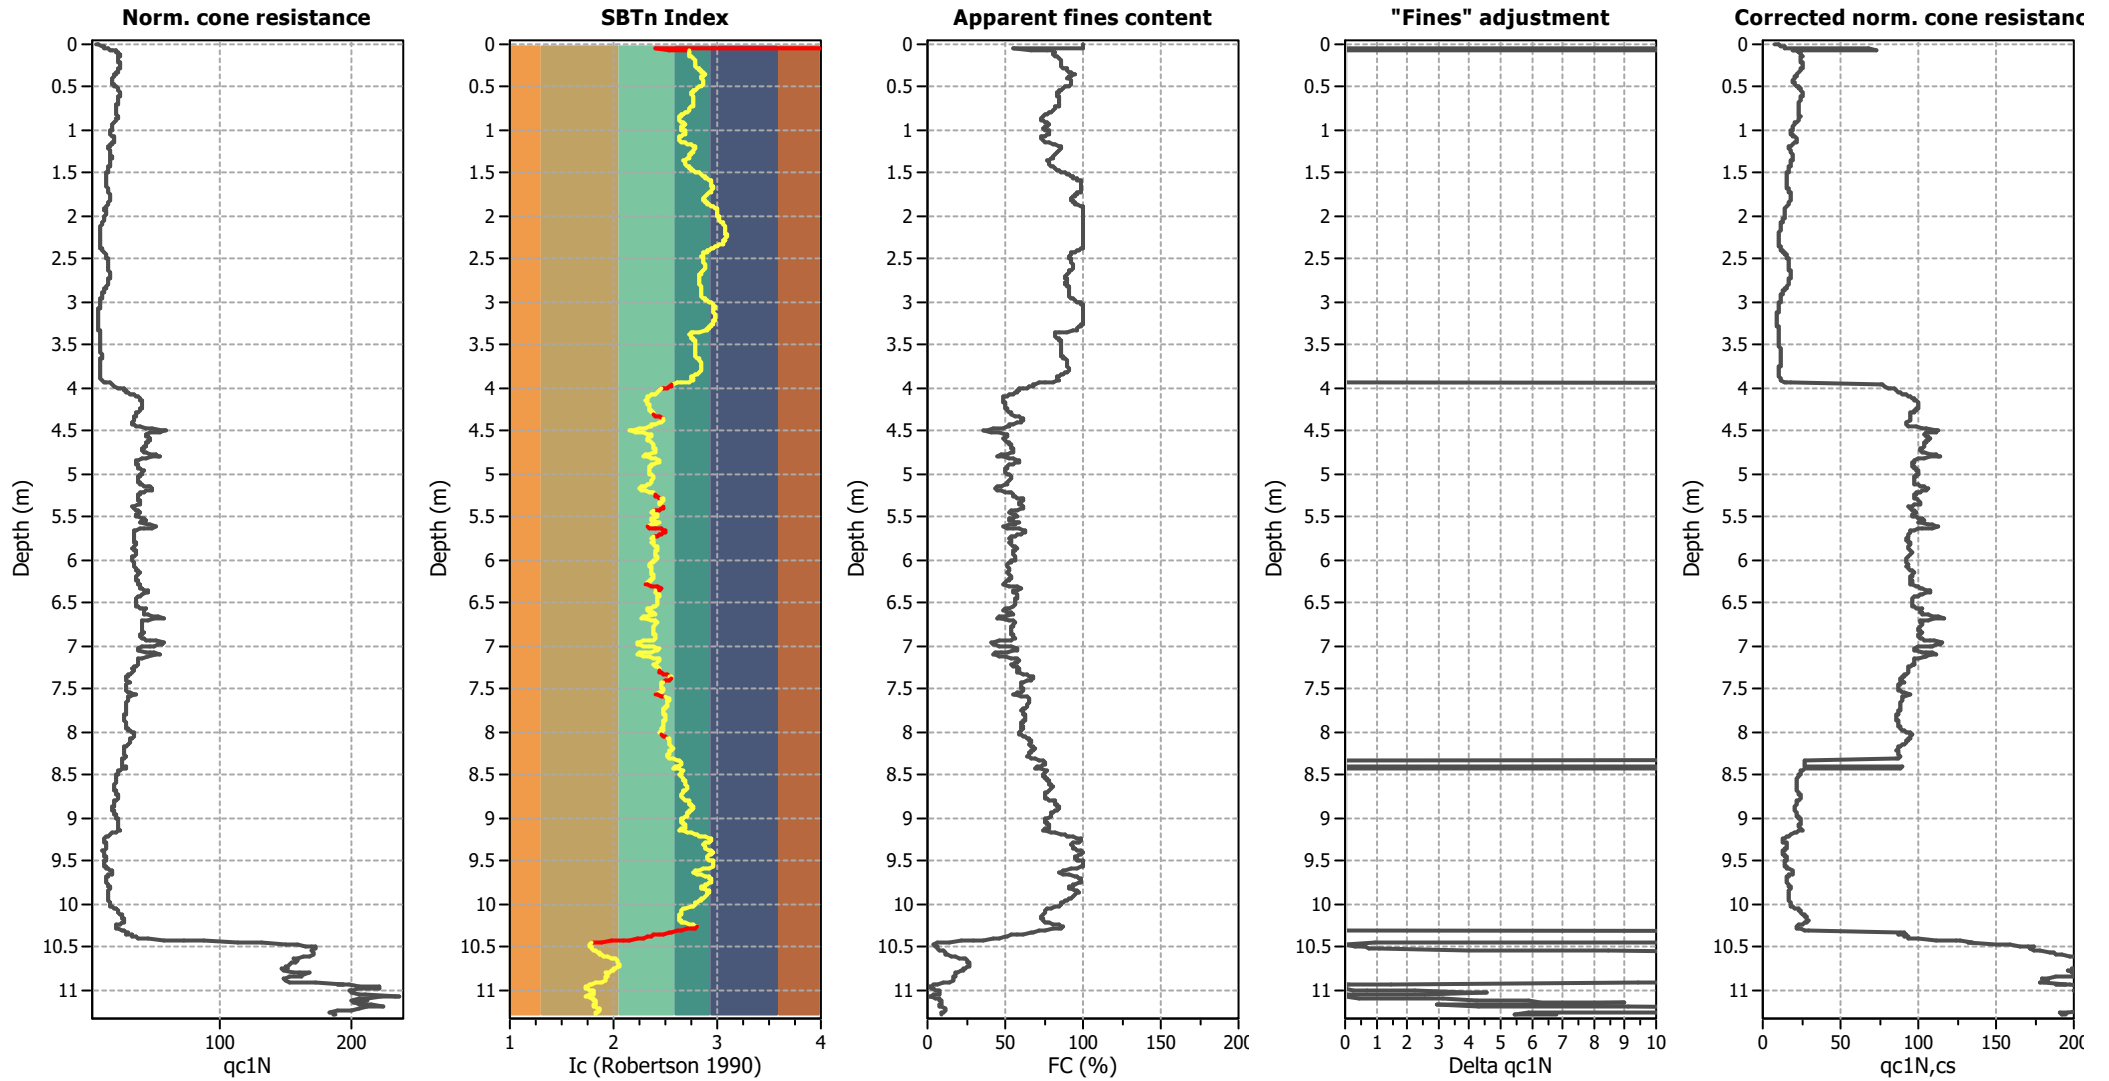

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

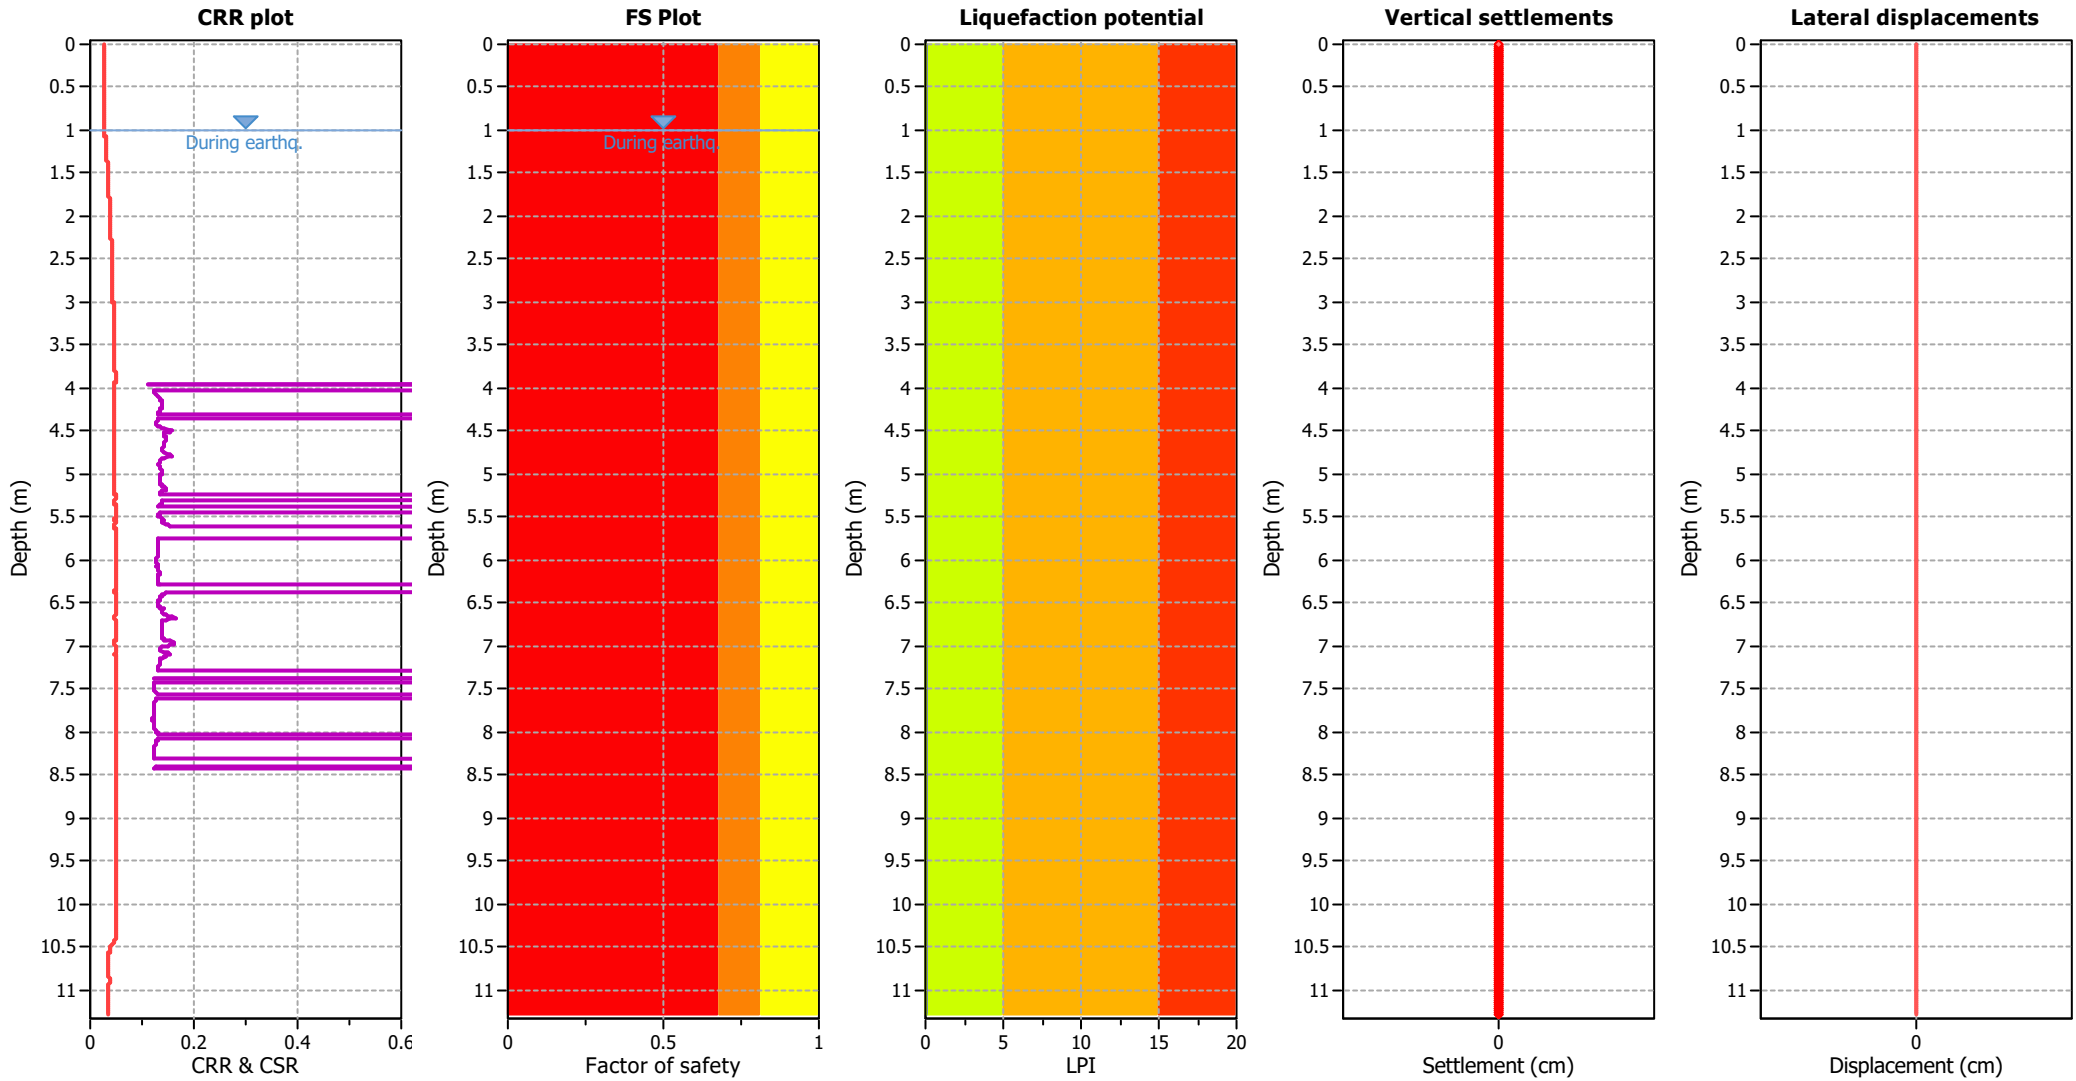

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

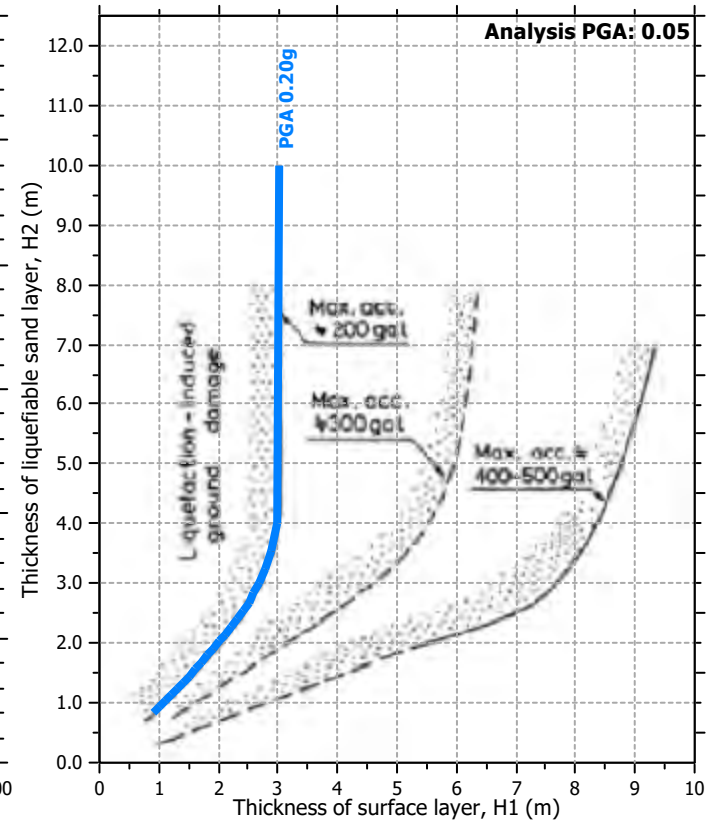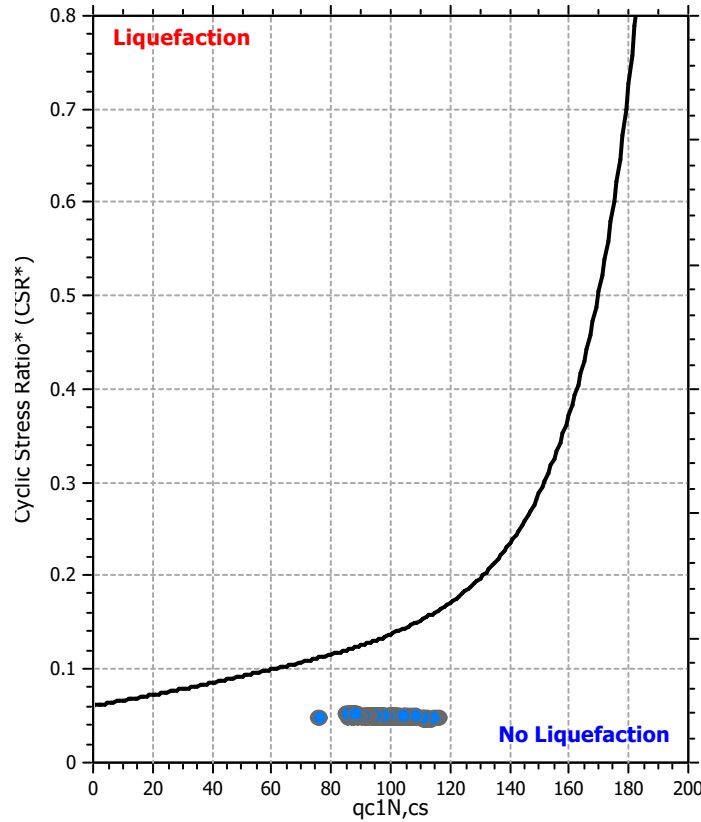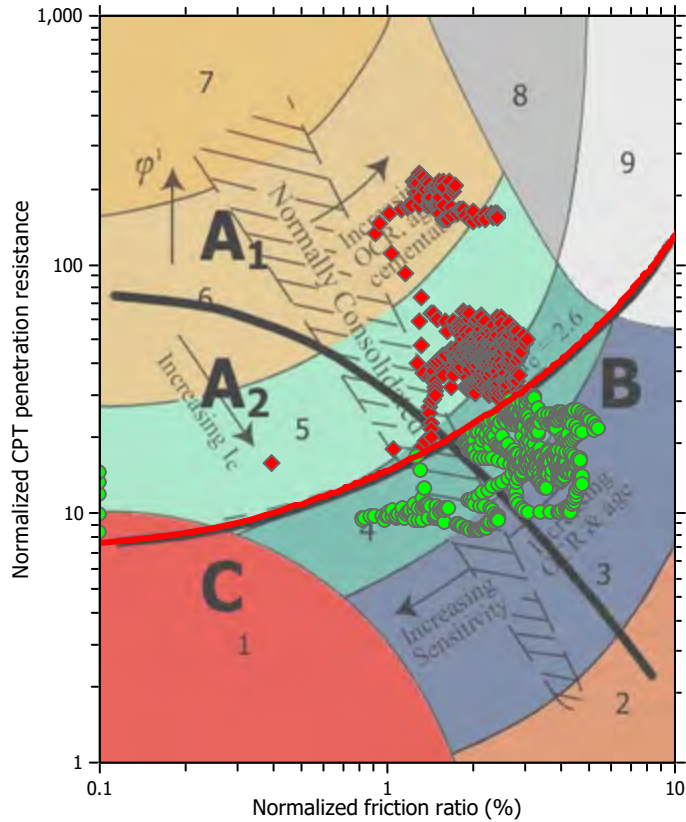

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

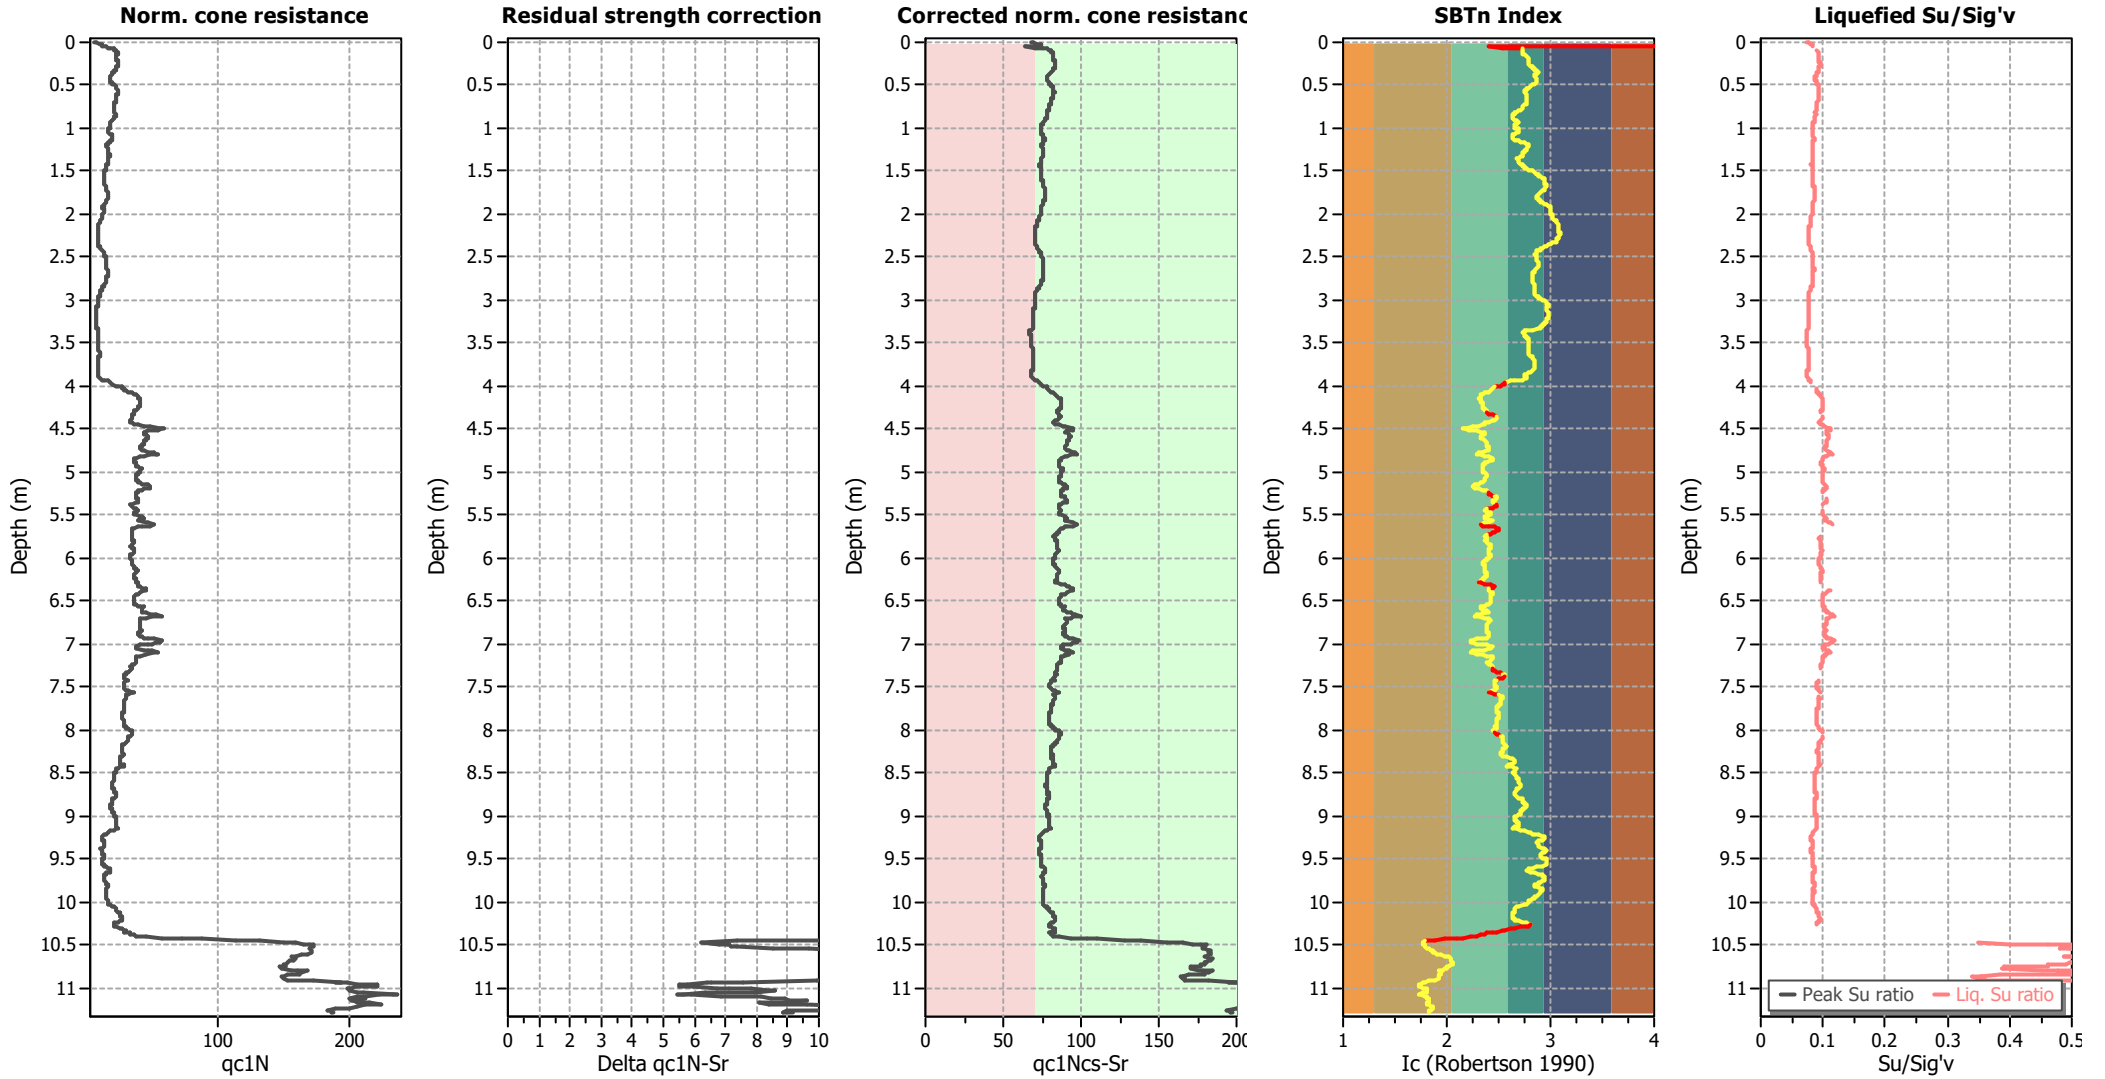

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

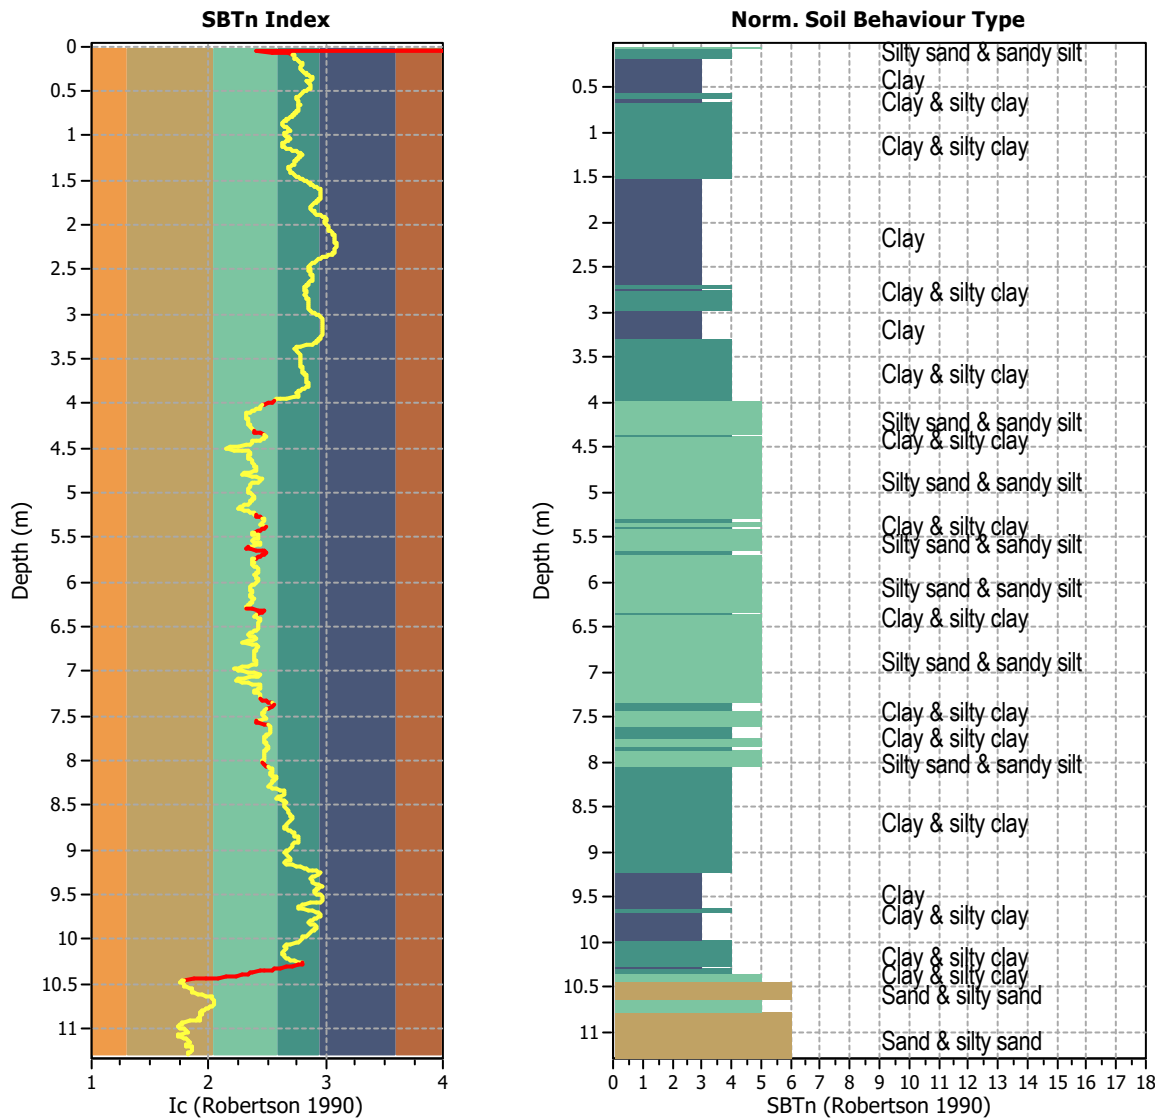


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1129
 Total points excluded: 91
 Exclusion percentage: 8.06%
 Number of layers detected: 14


Estimation of post-earthquake settlements

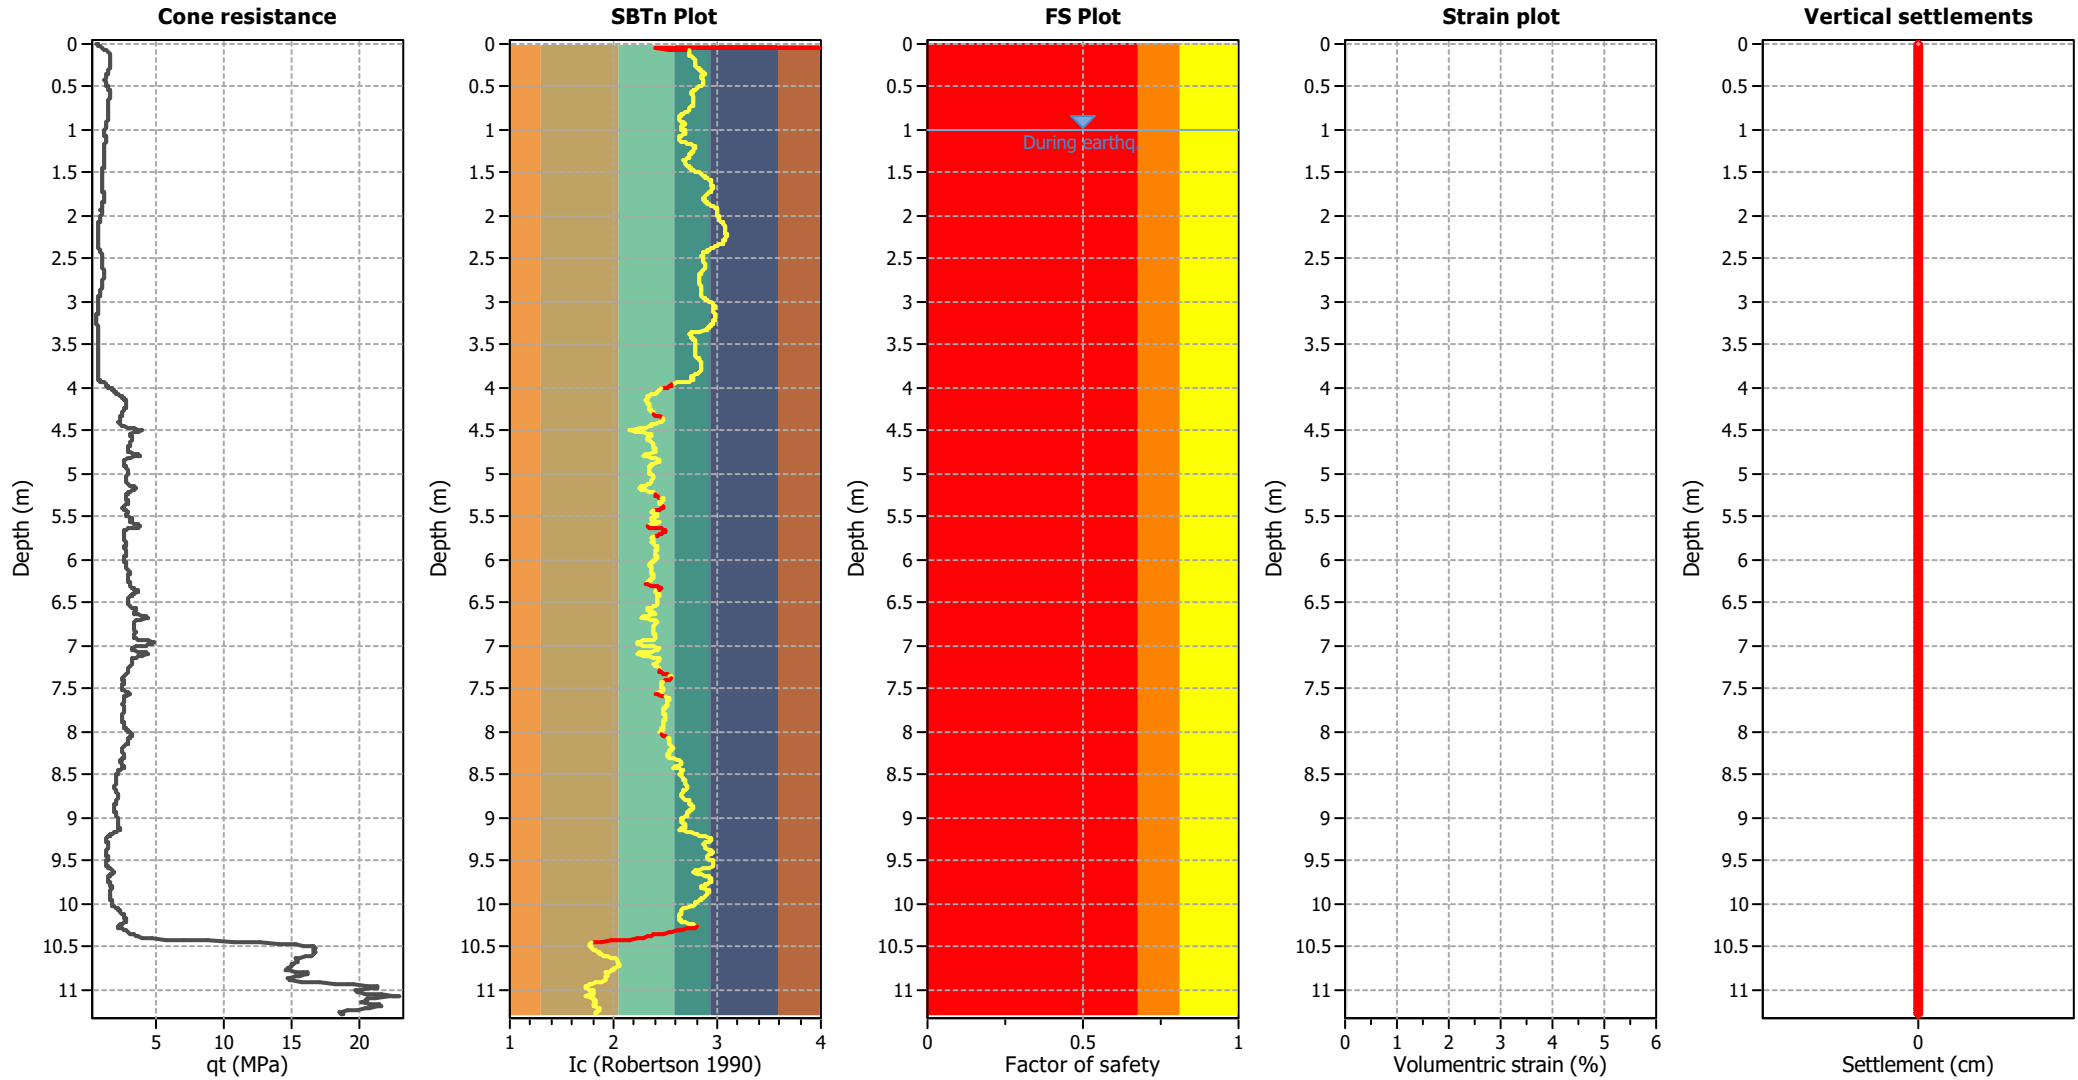

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

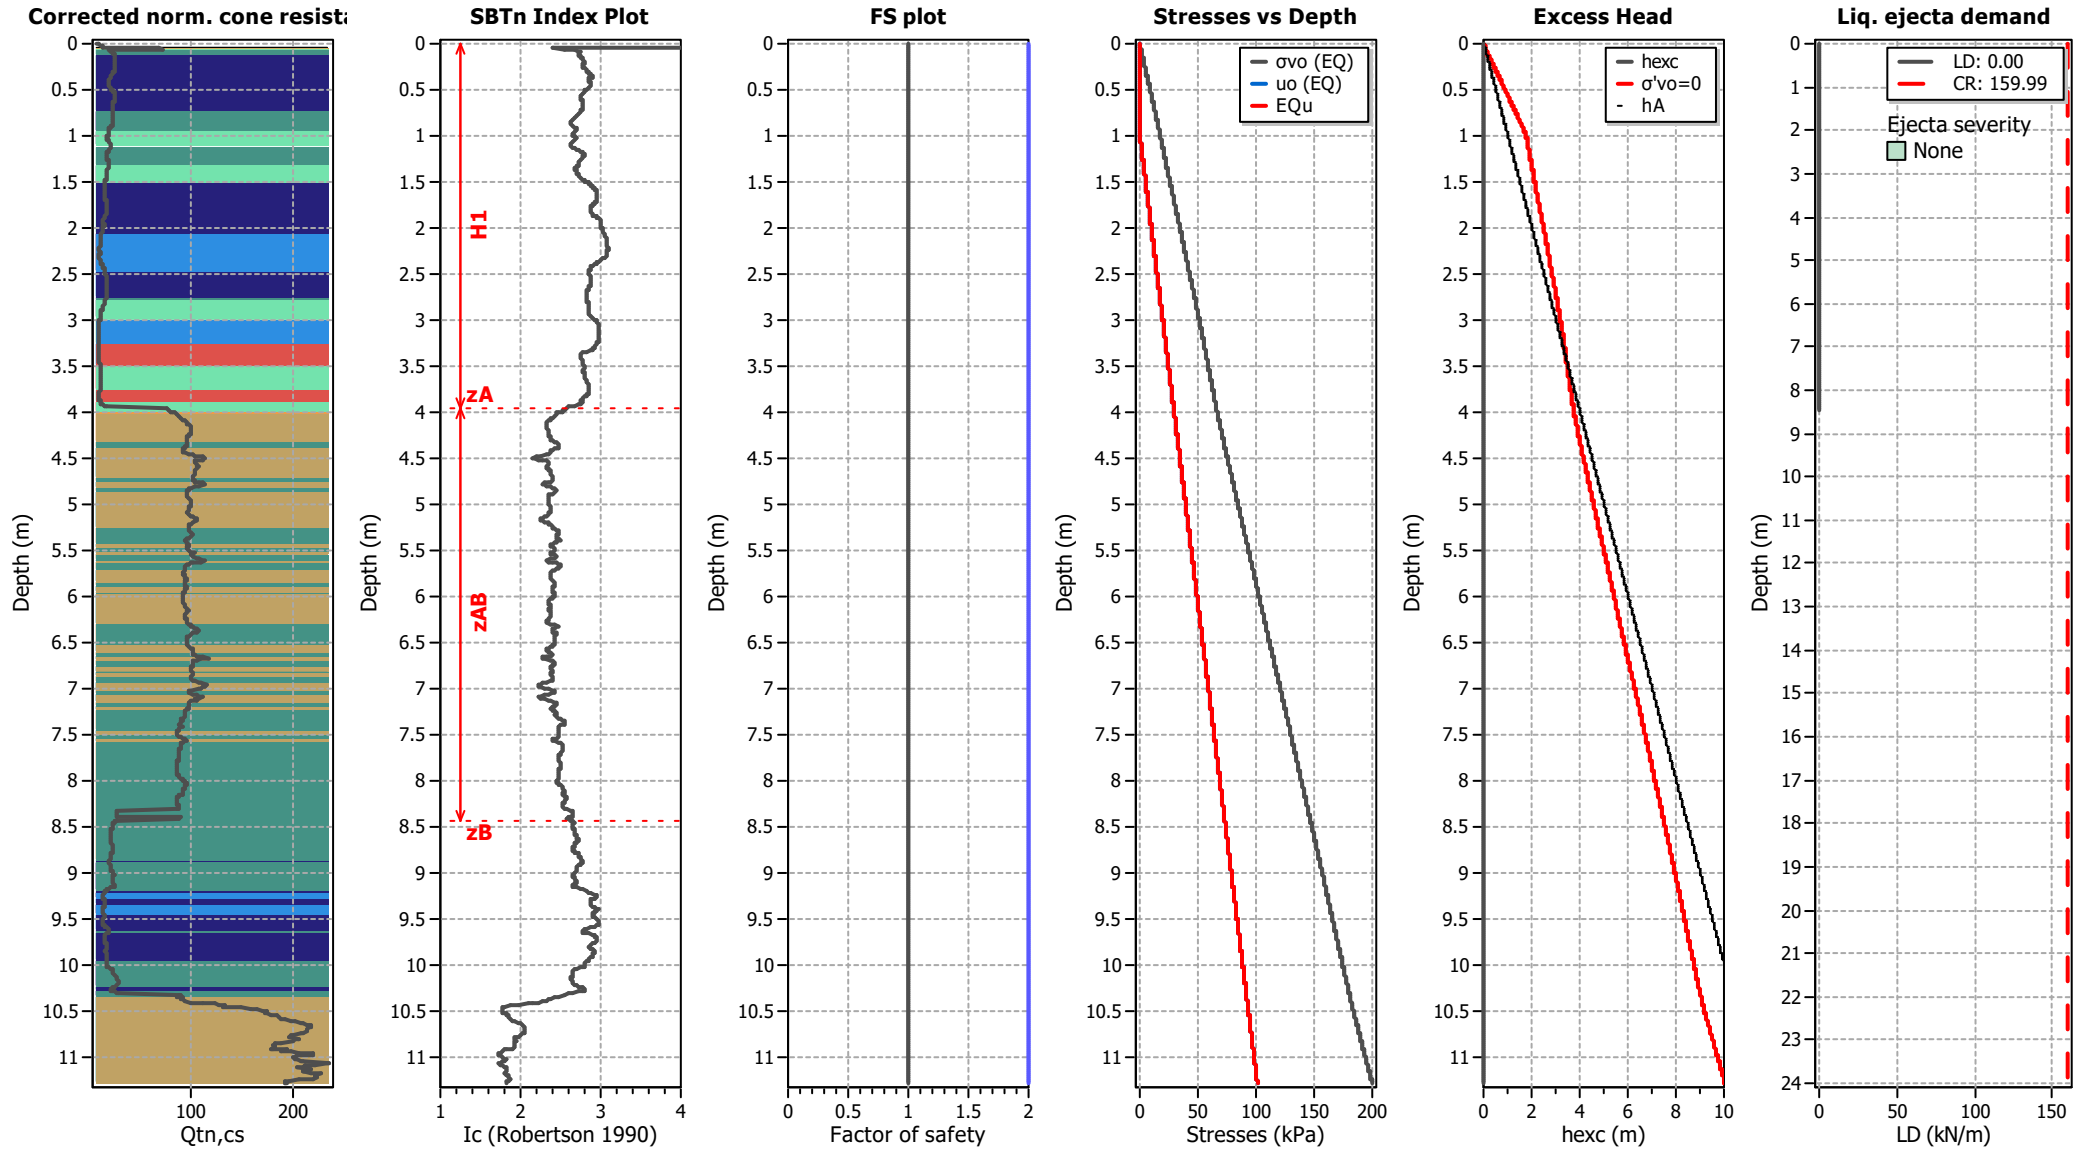

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT410

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

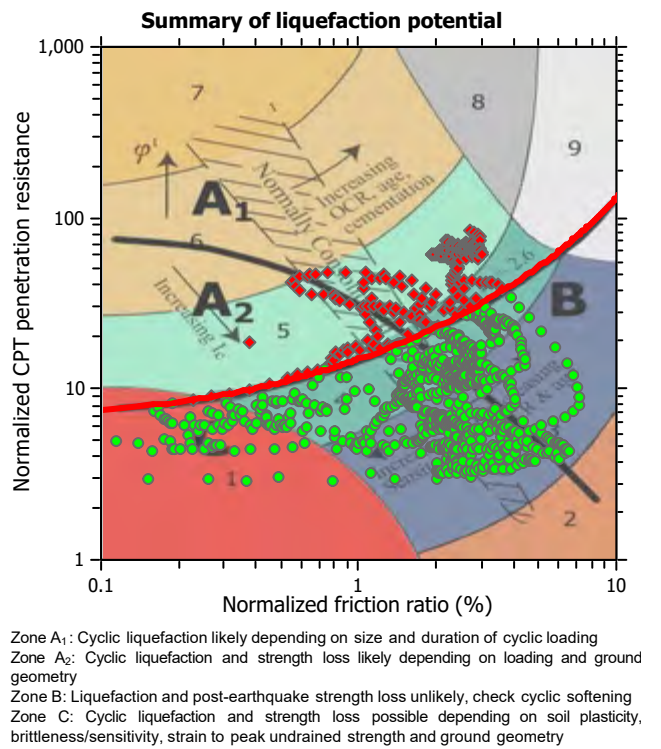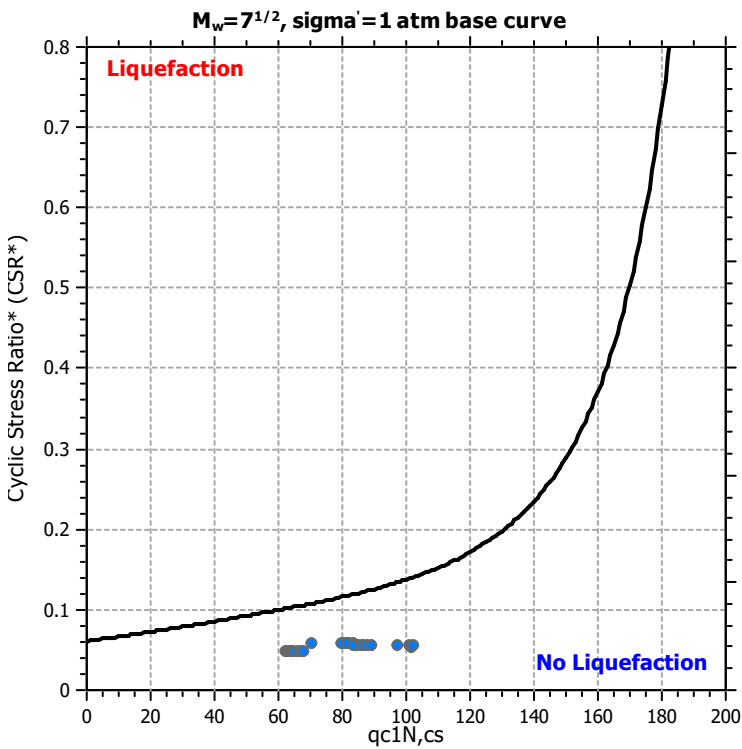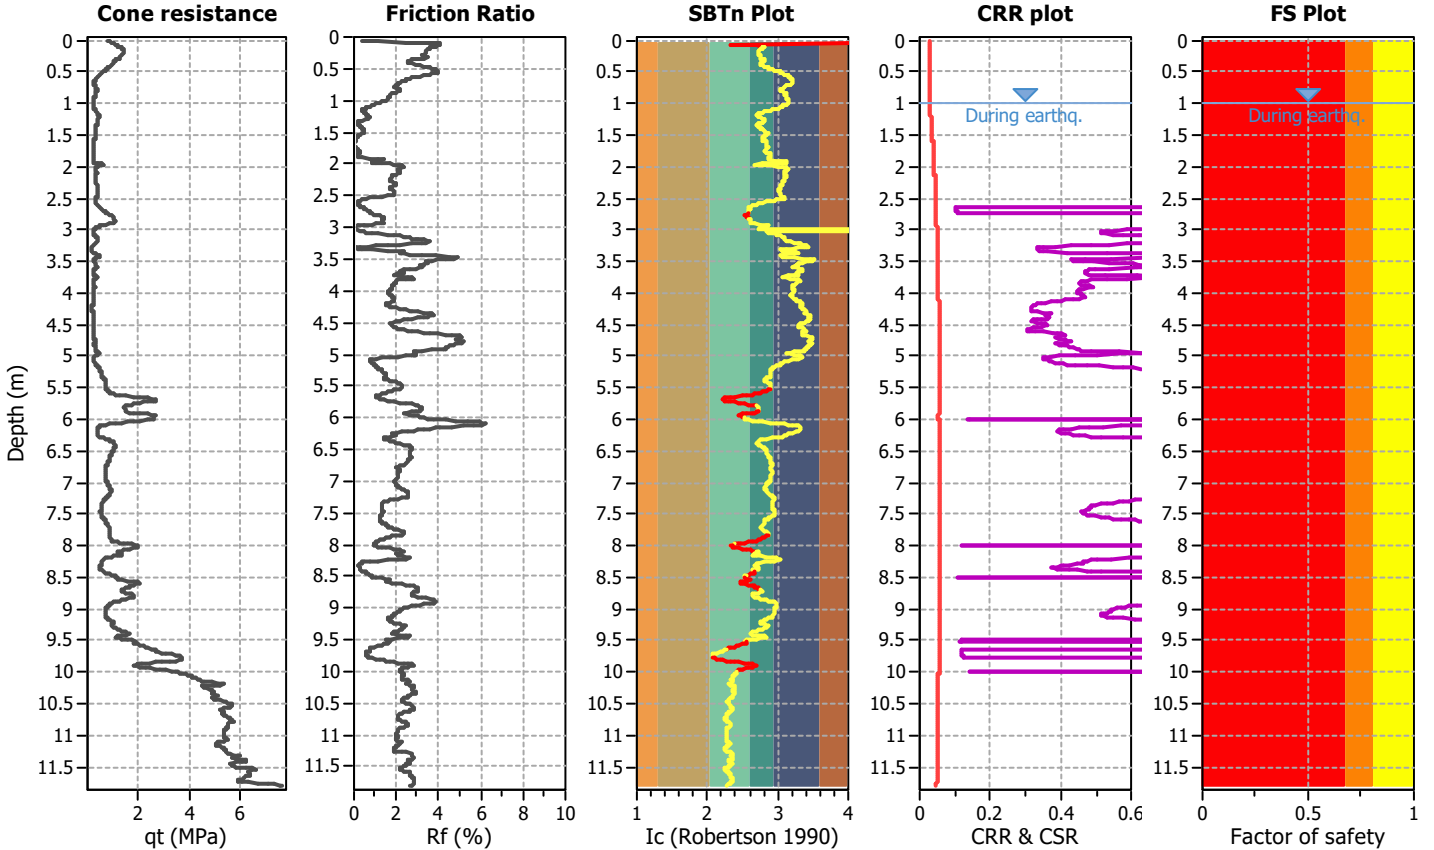

CPT basic interpretation plots

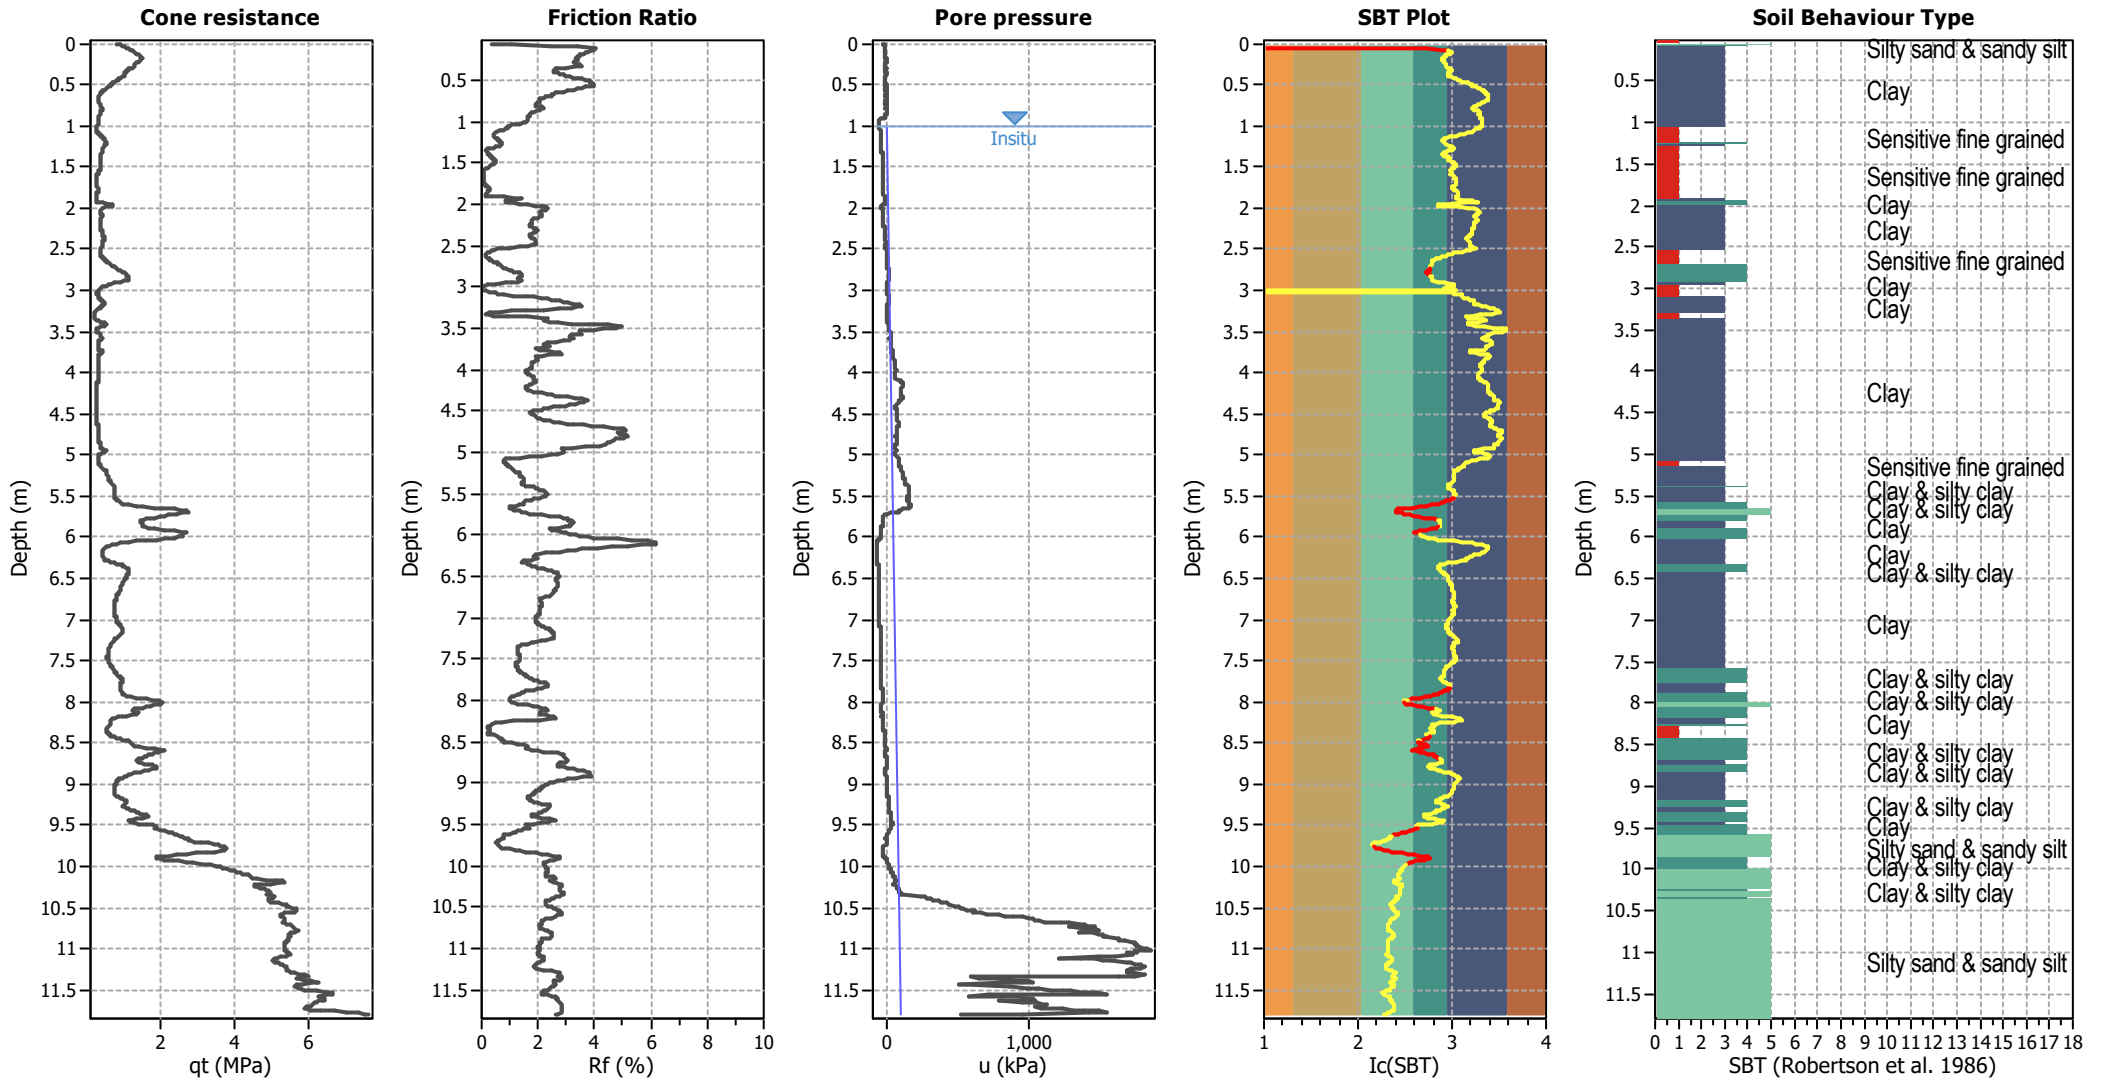


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

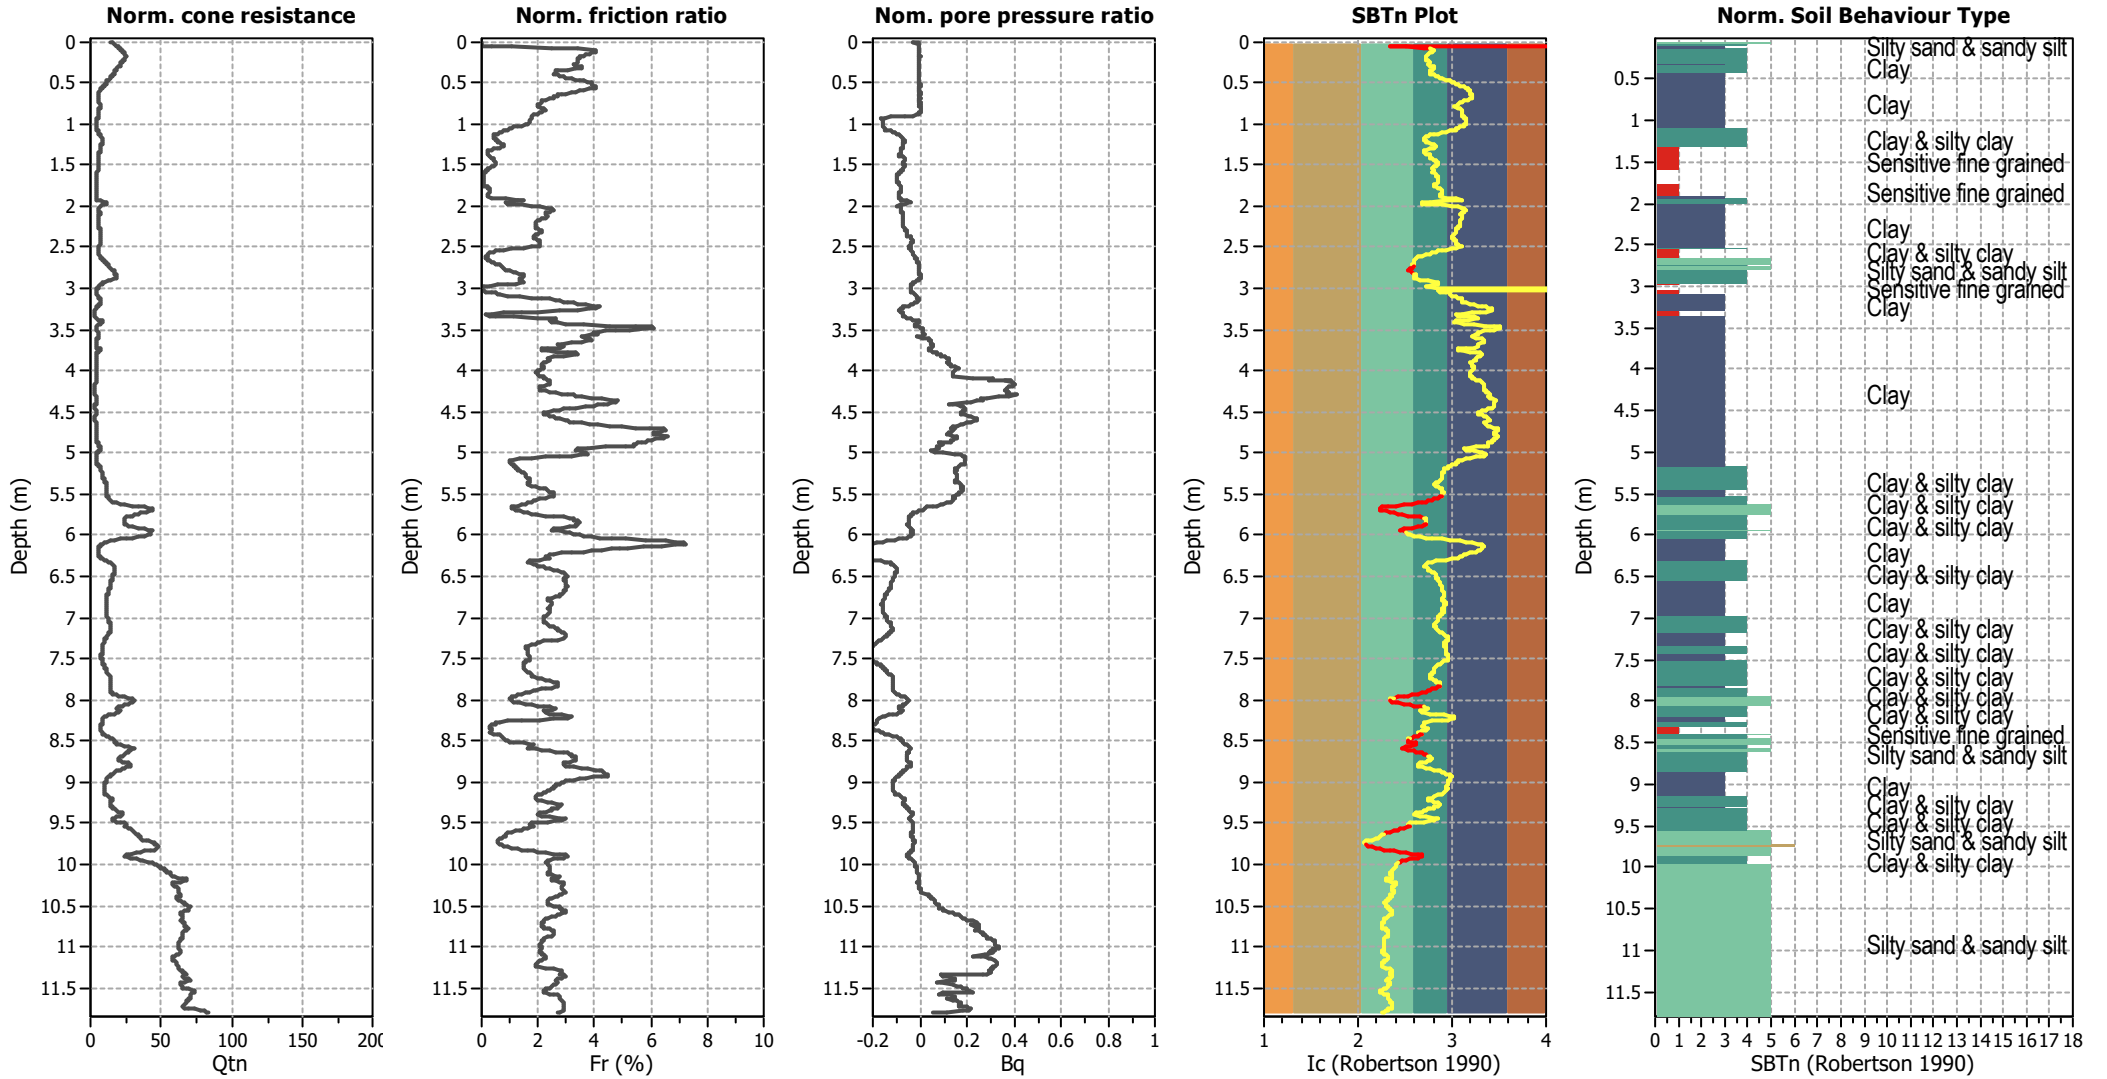


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

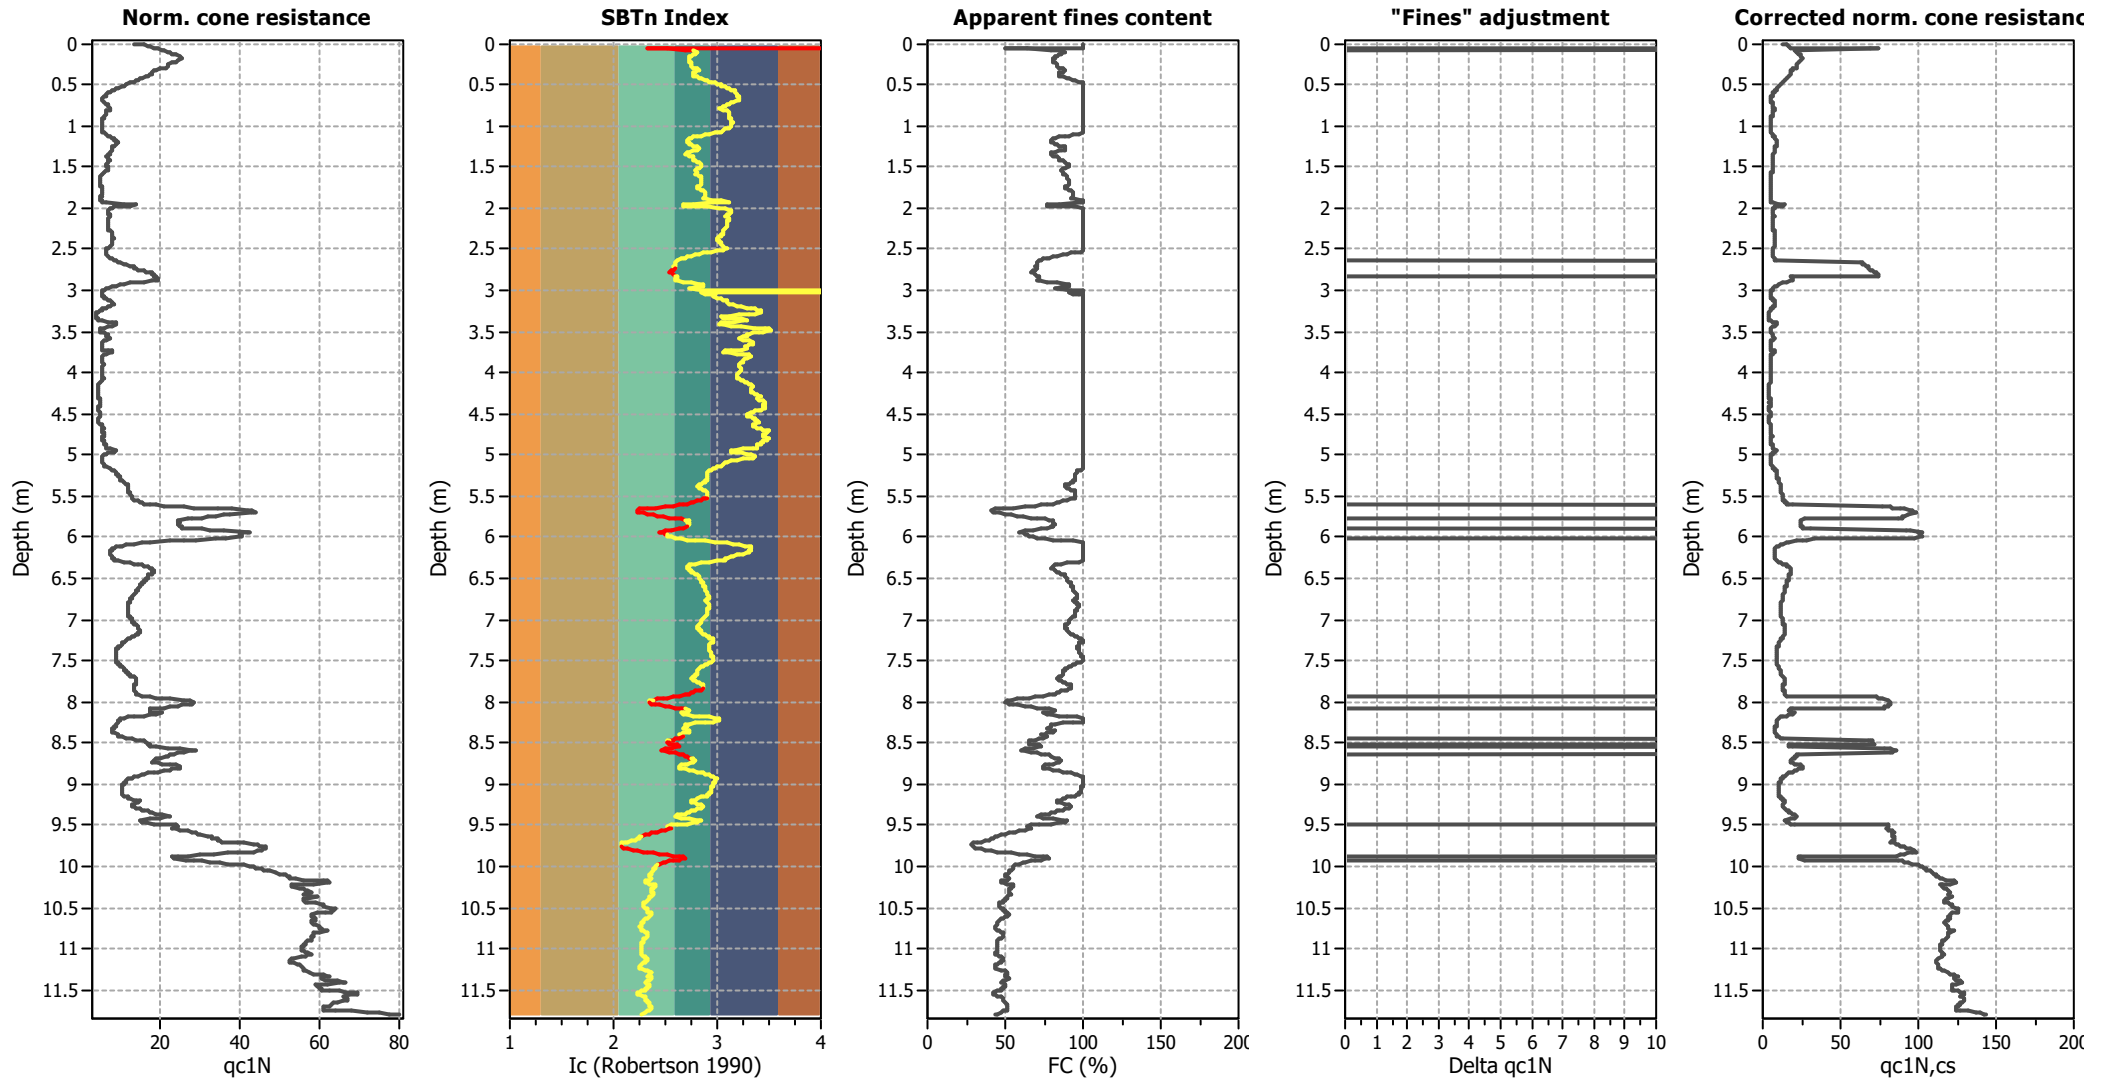

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

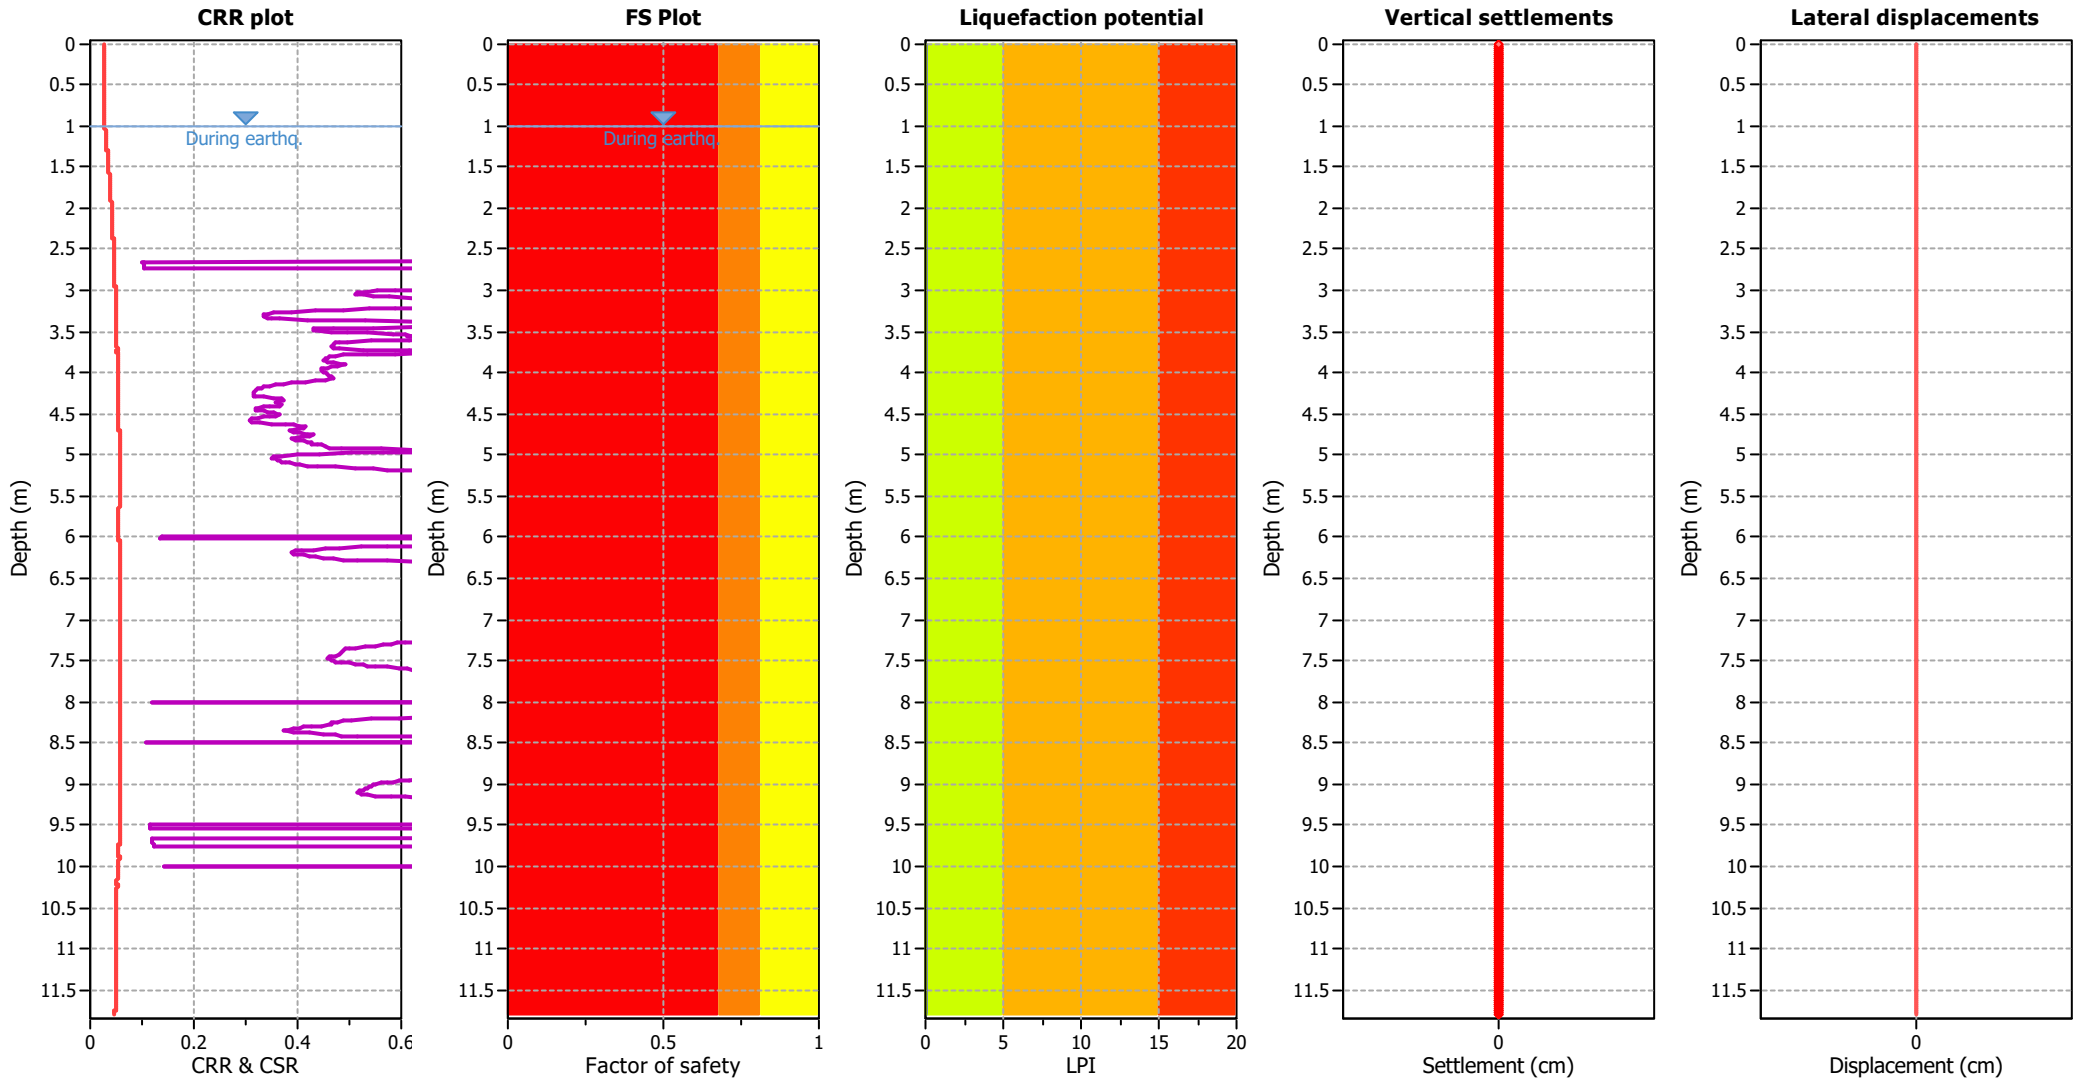

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

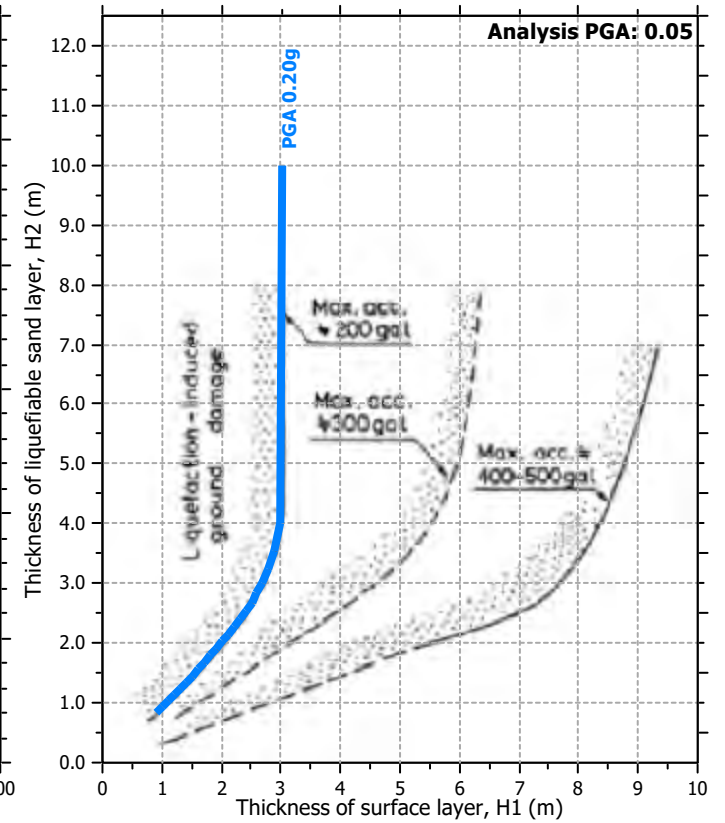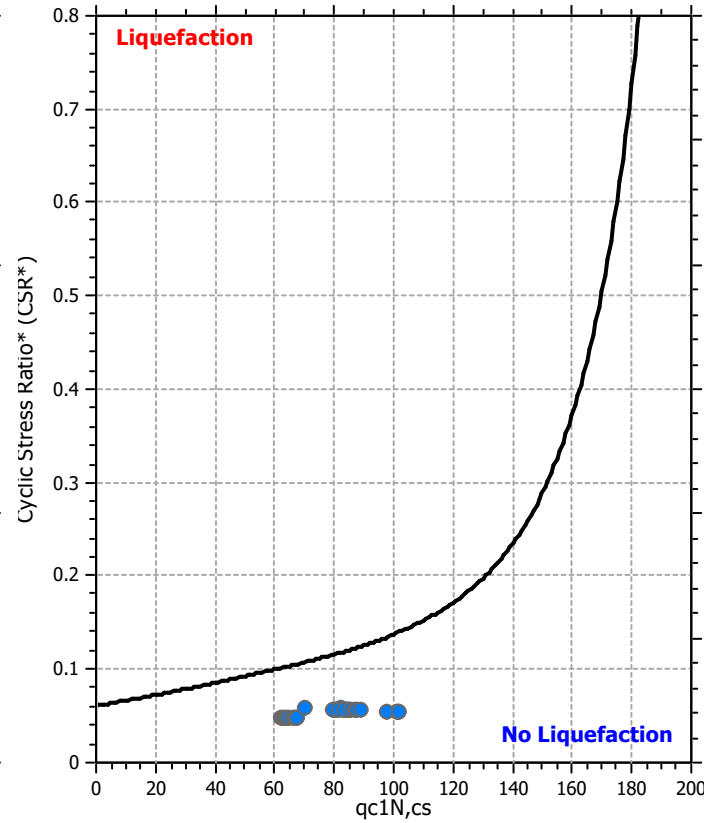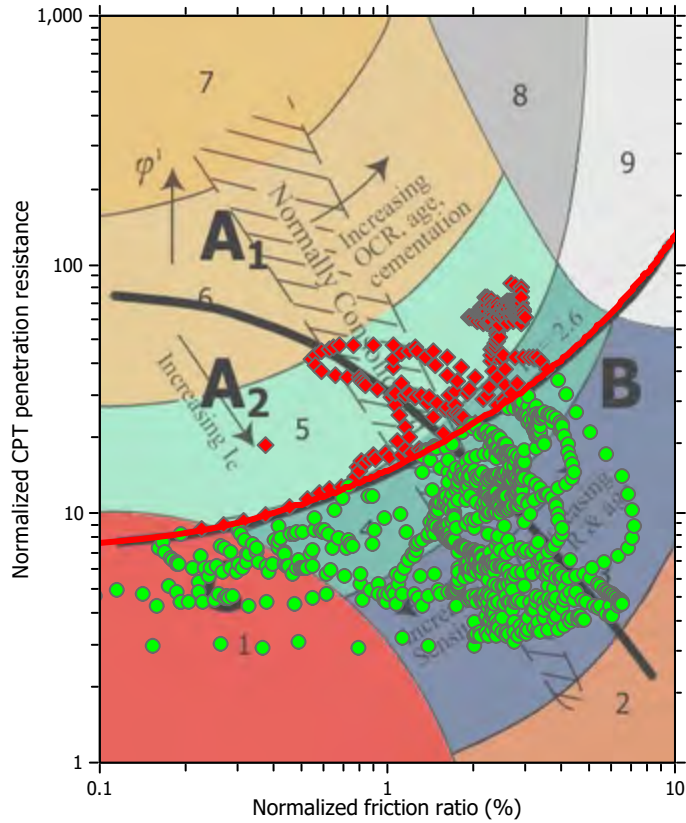

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

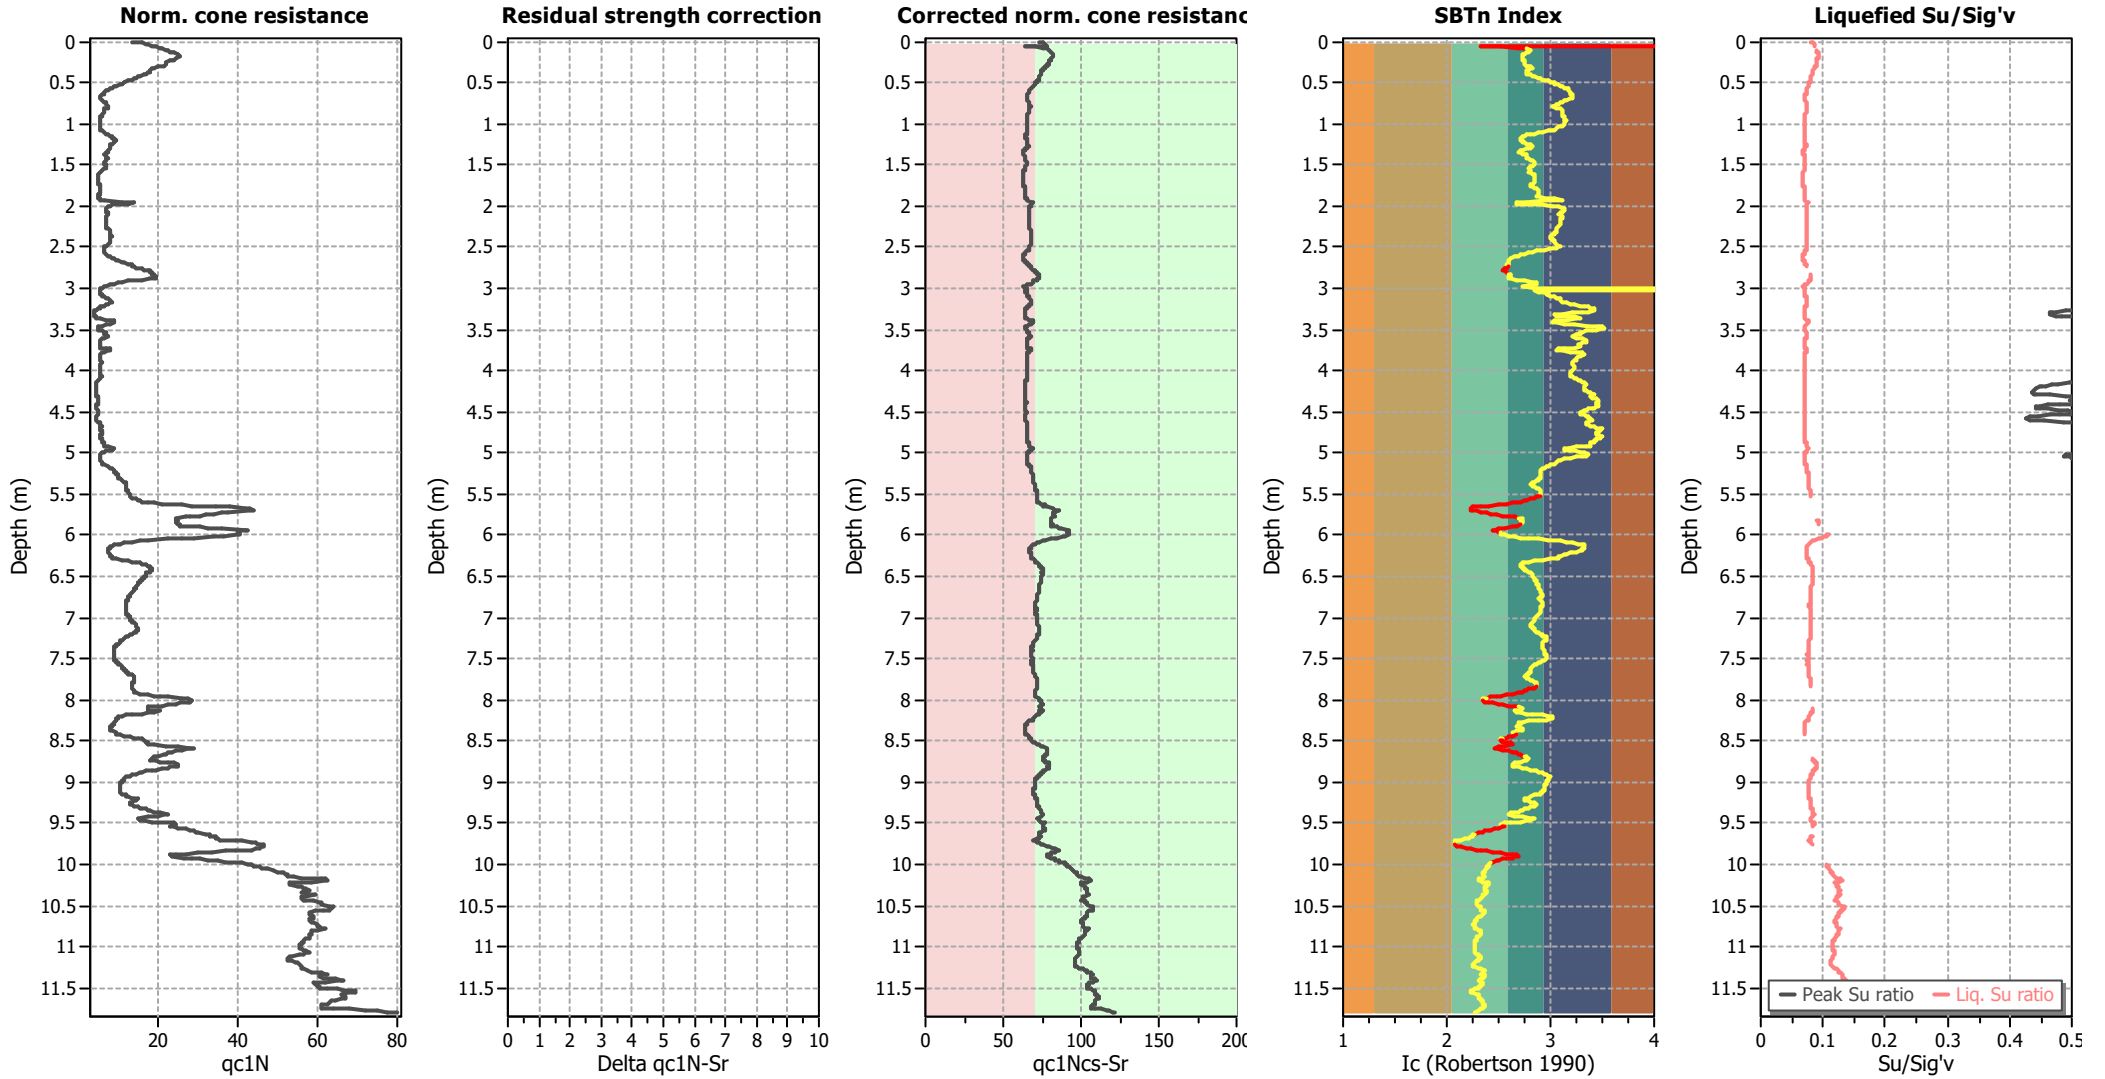

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

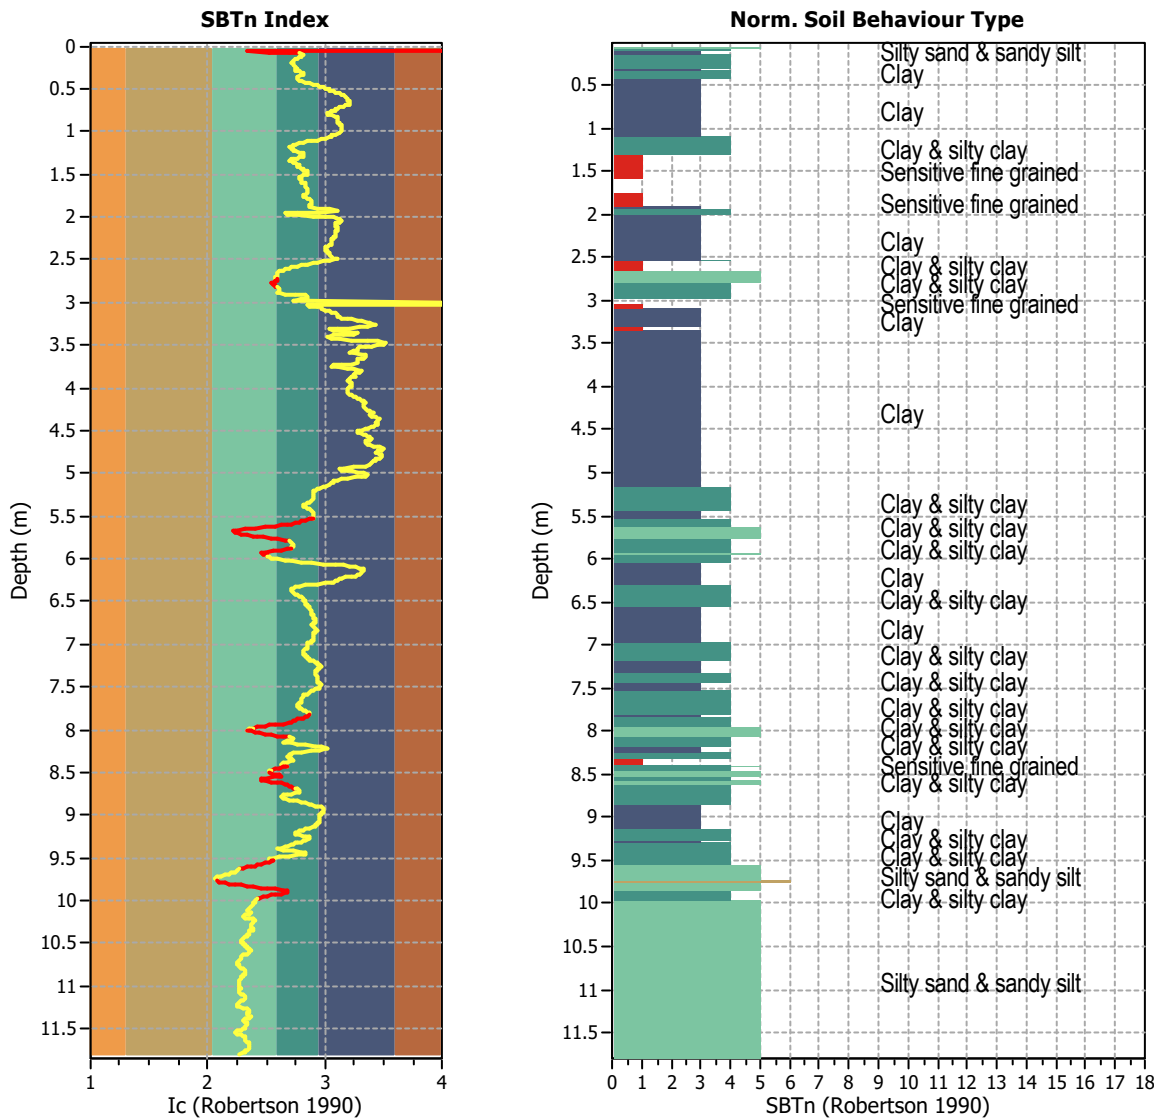

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	1180
I_c maximum check value:	3.00	Total points excluded:	143
I_c change ratio value:	0.0100	Exclusion percentage:	12.12%
Minimum number of points in layer:	4	Number of layers detected:	16


Estimation of post-earthquake settlements

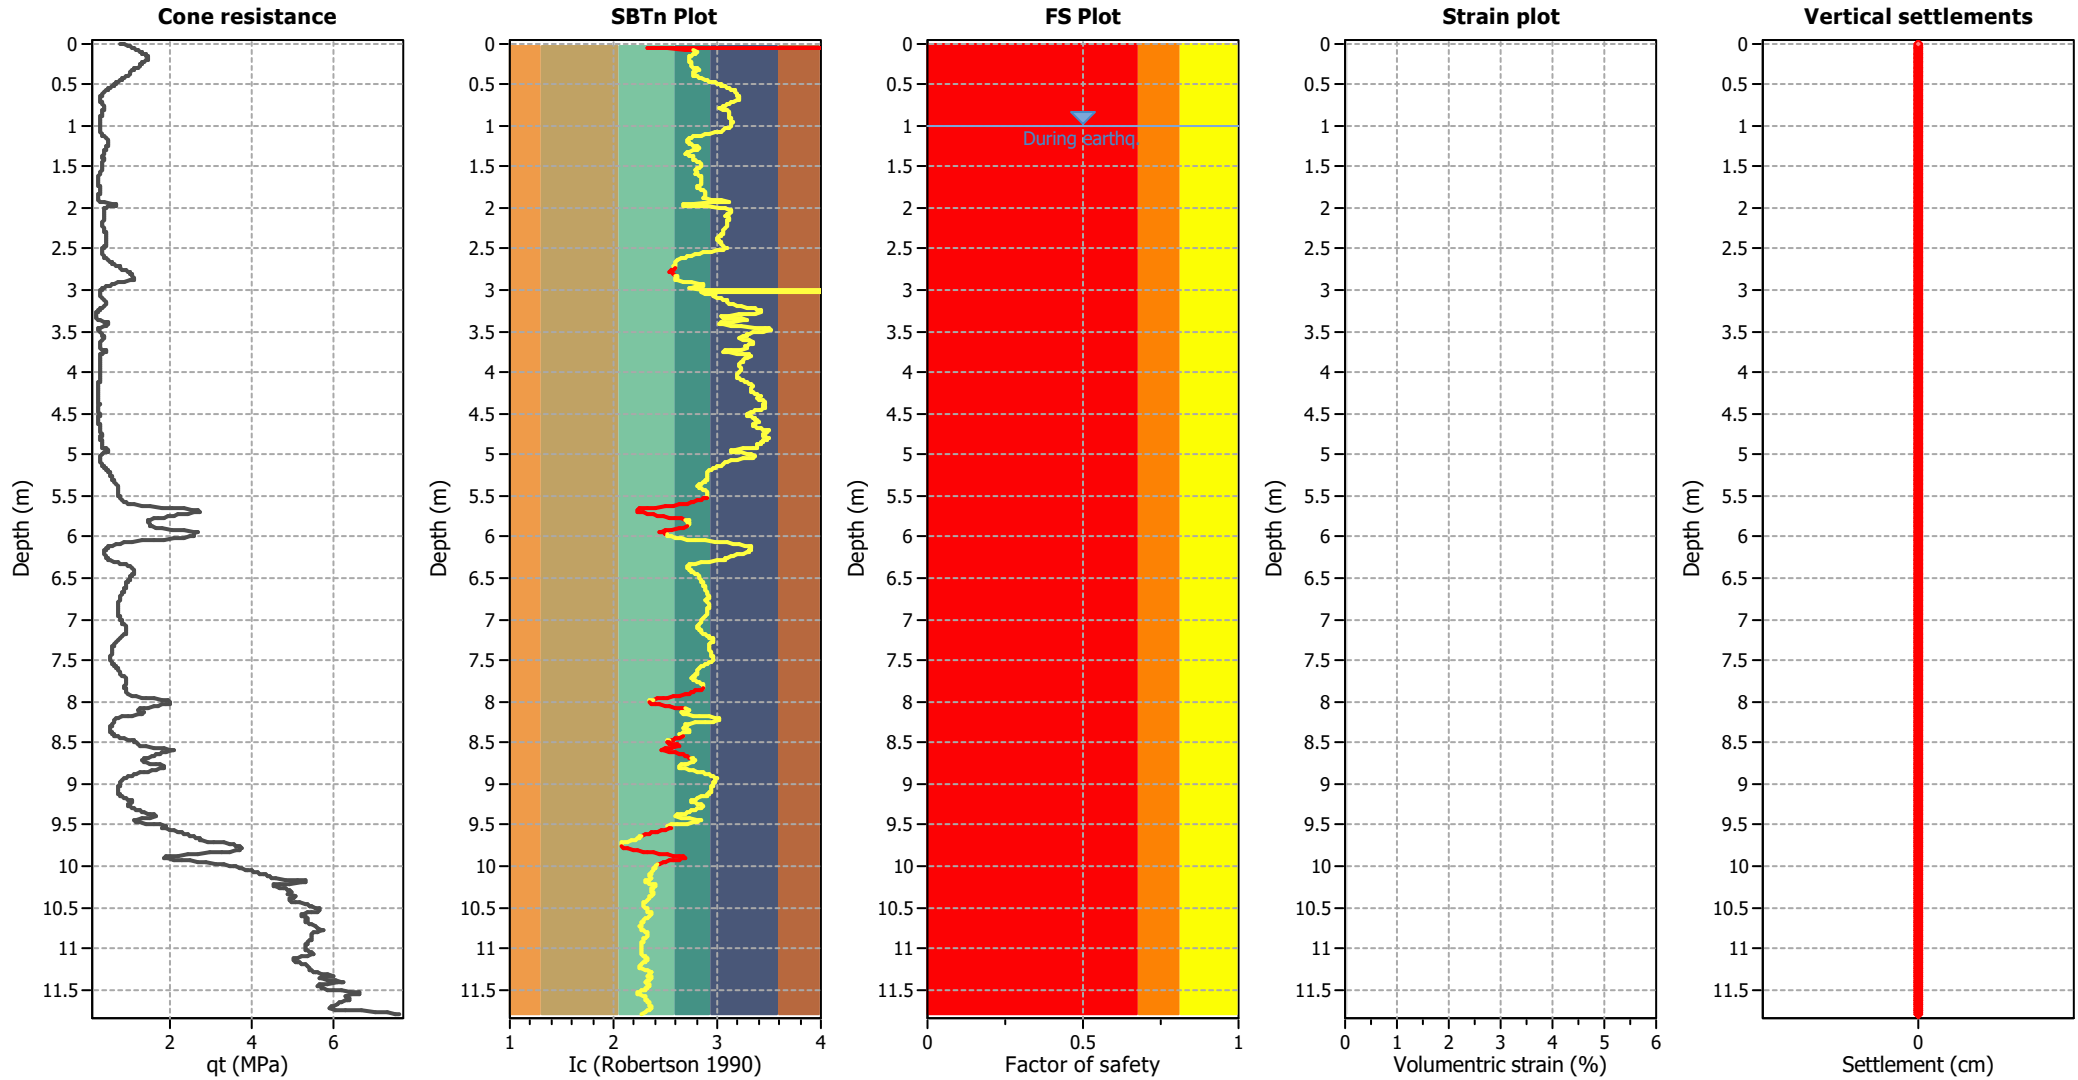

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

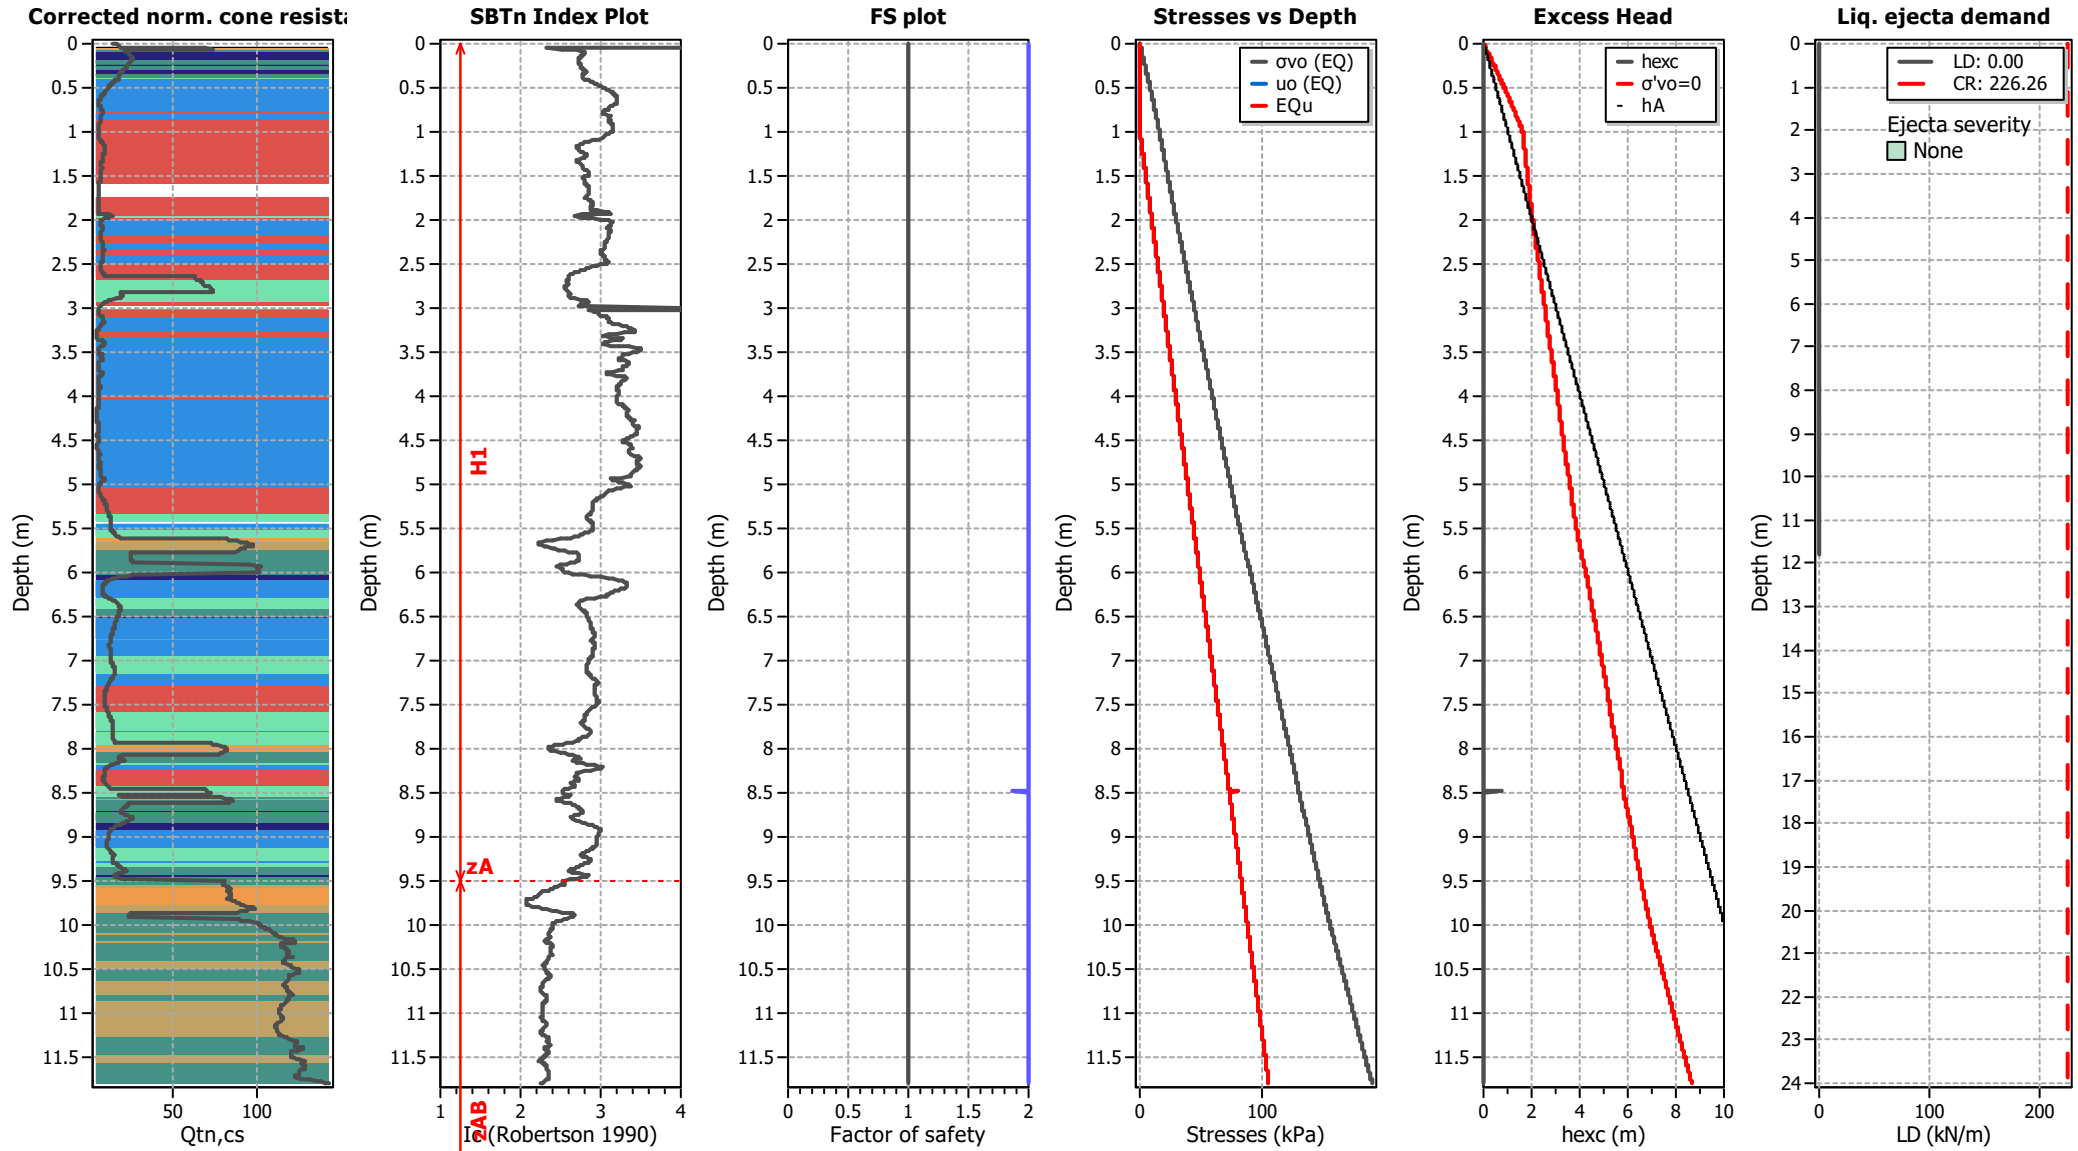

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT411

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

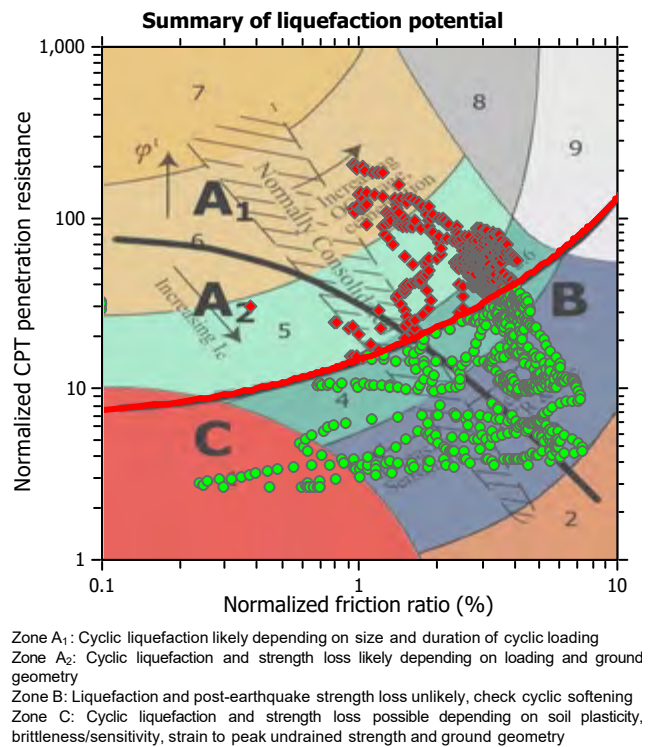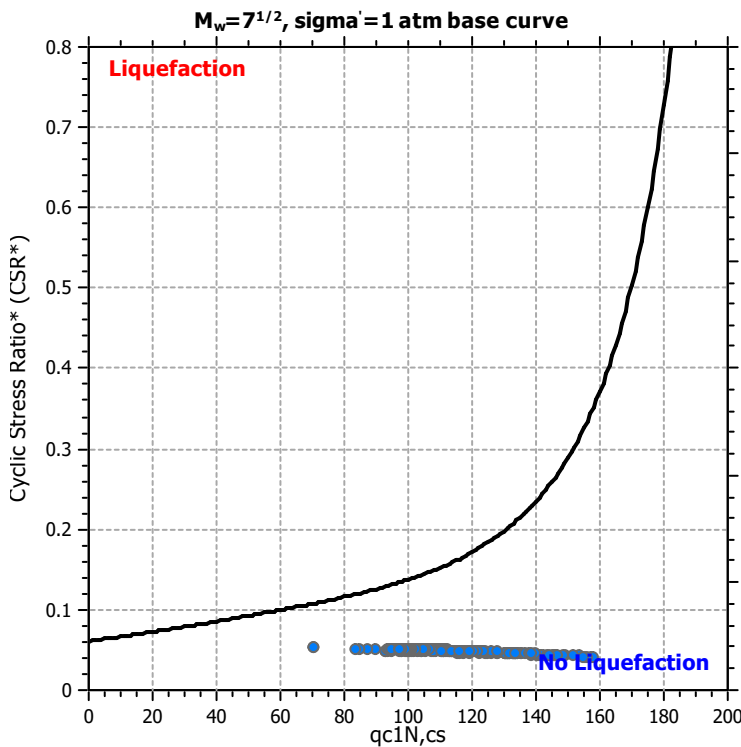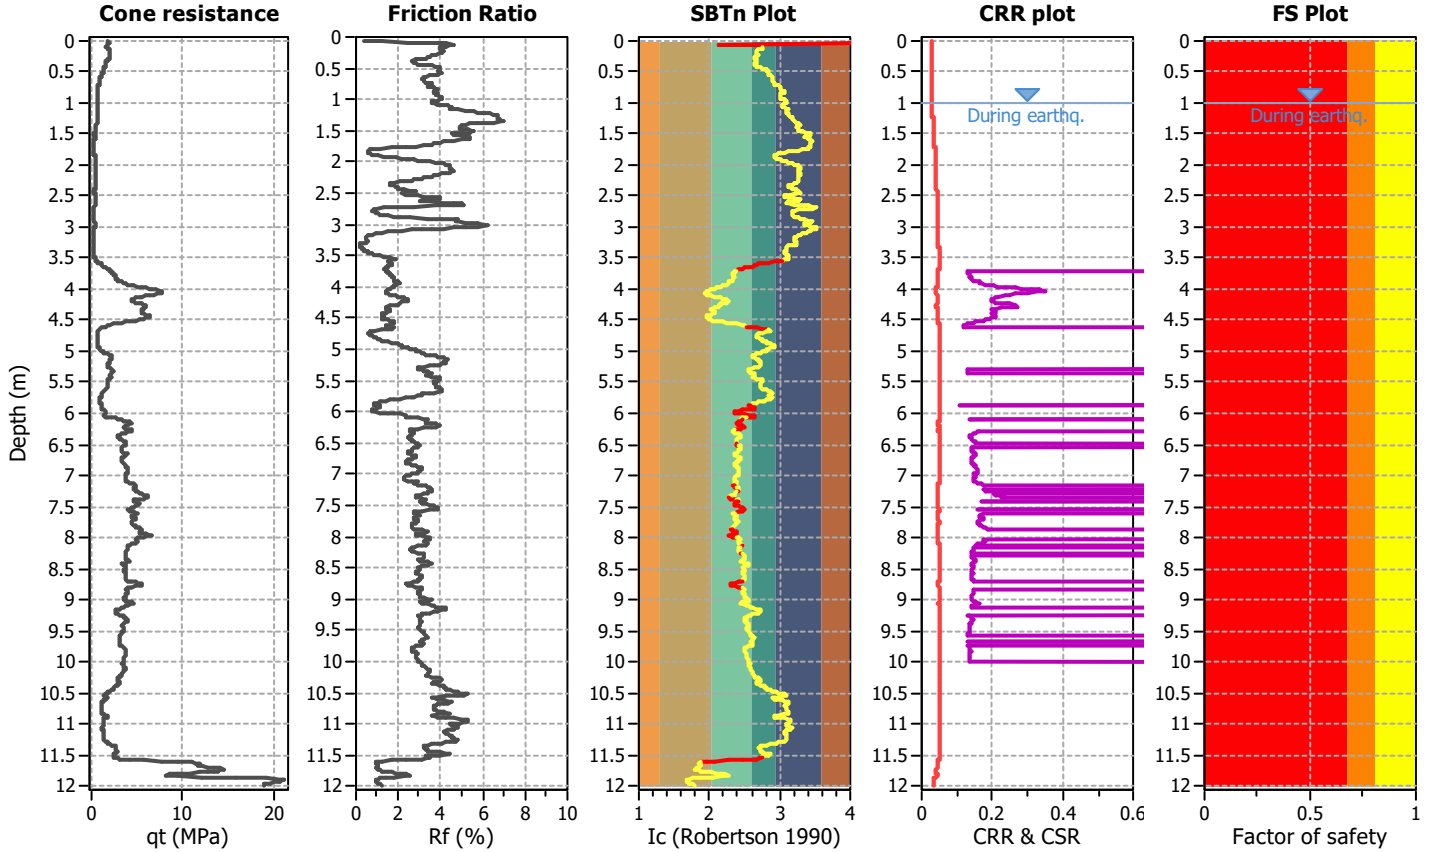

CPT basic interpretation plots

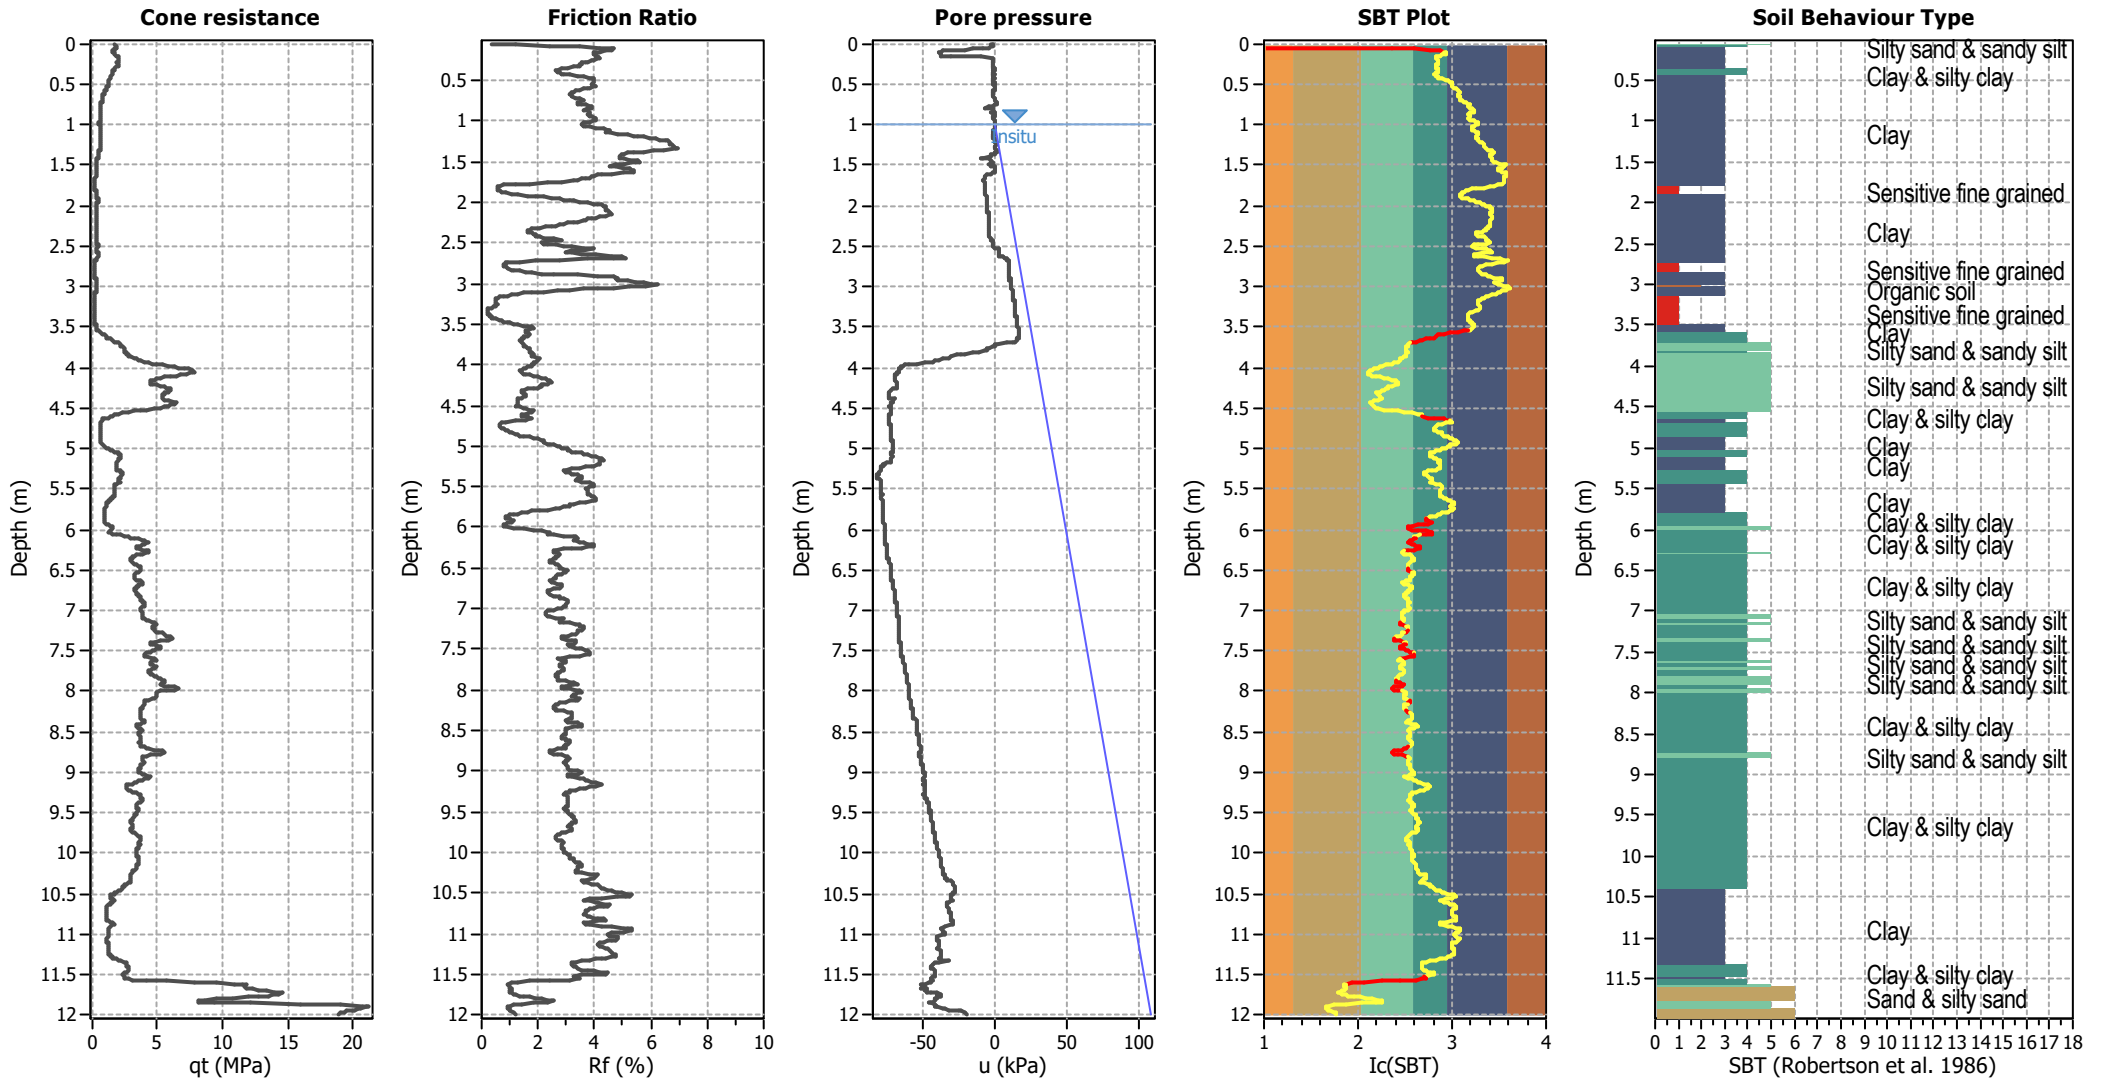


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

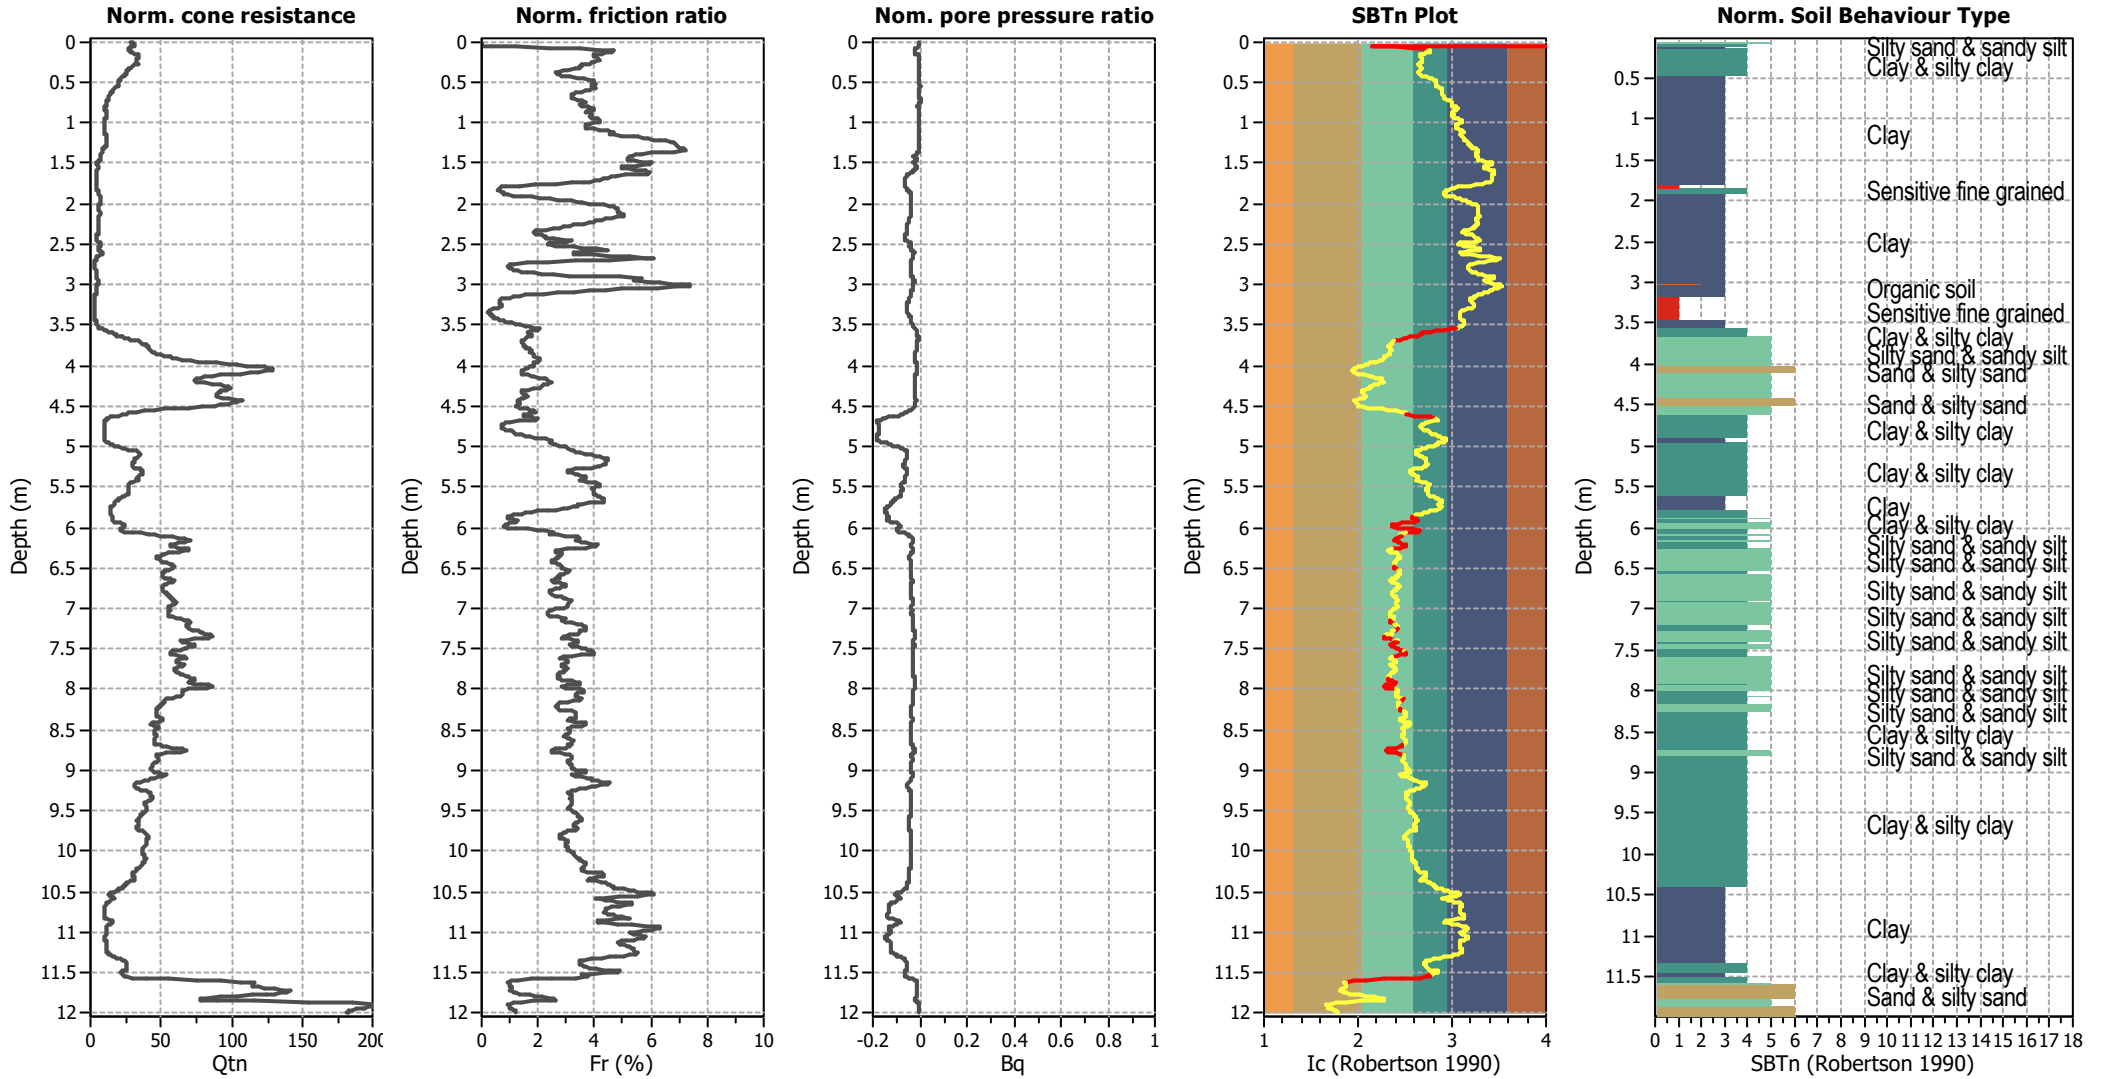


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

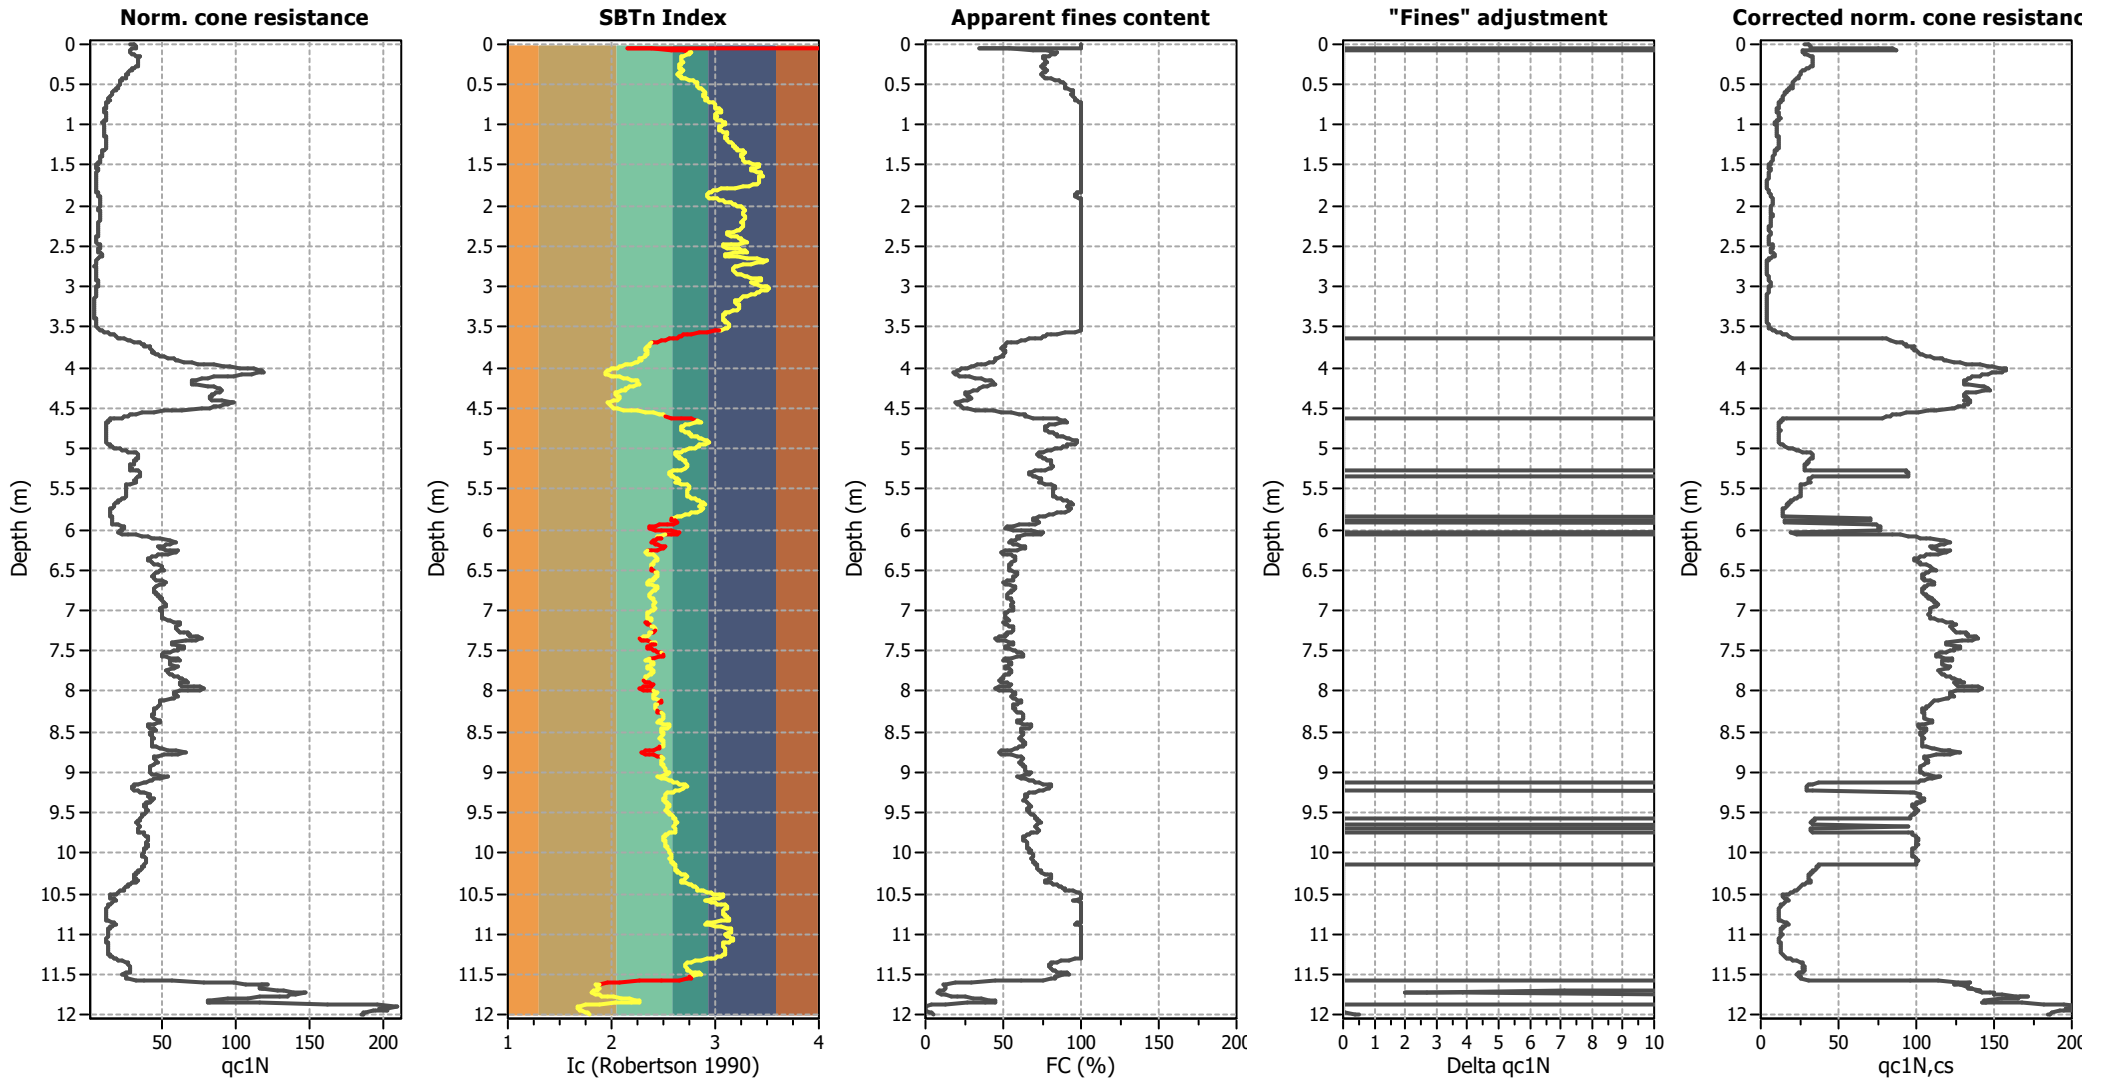

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

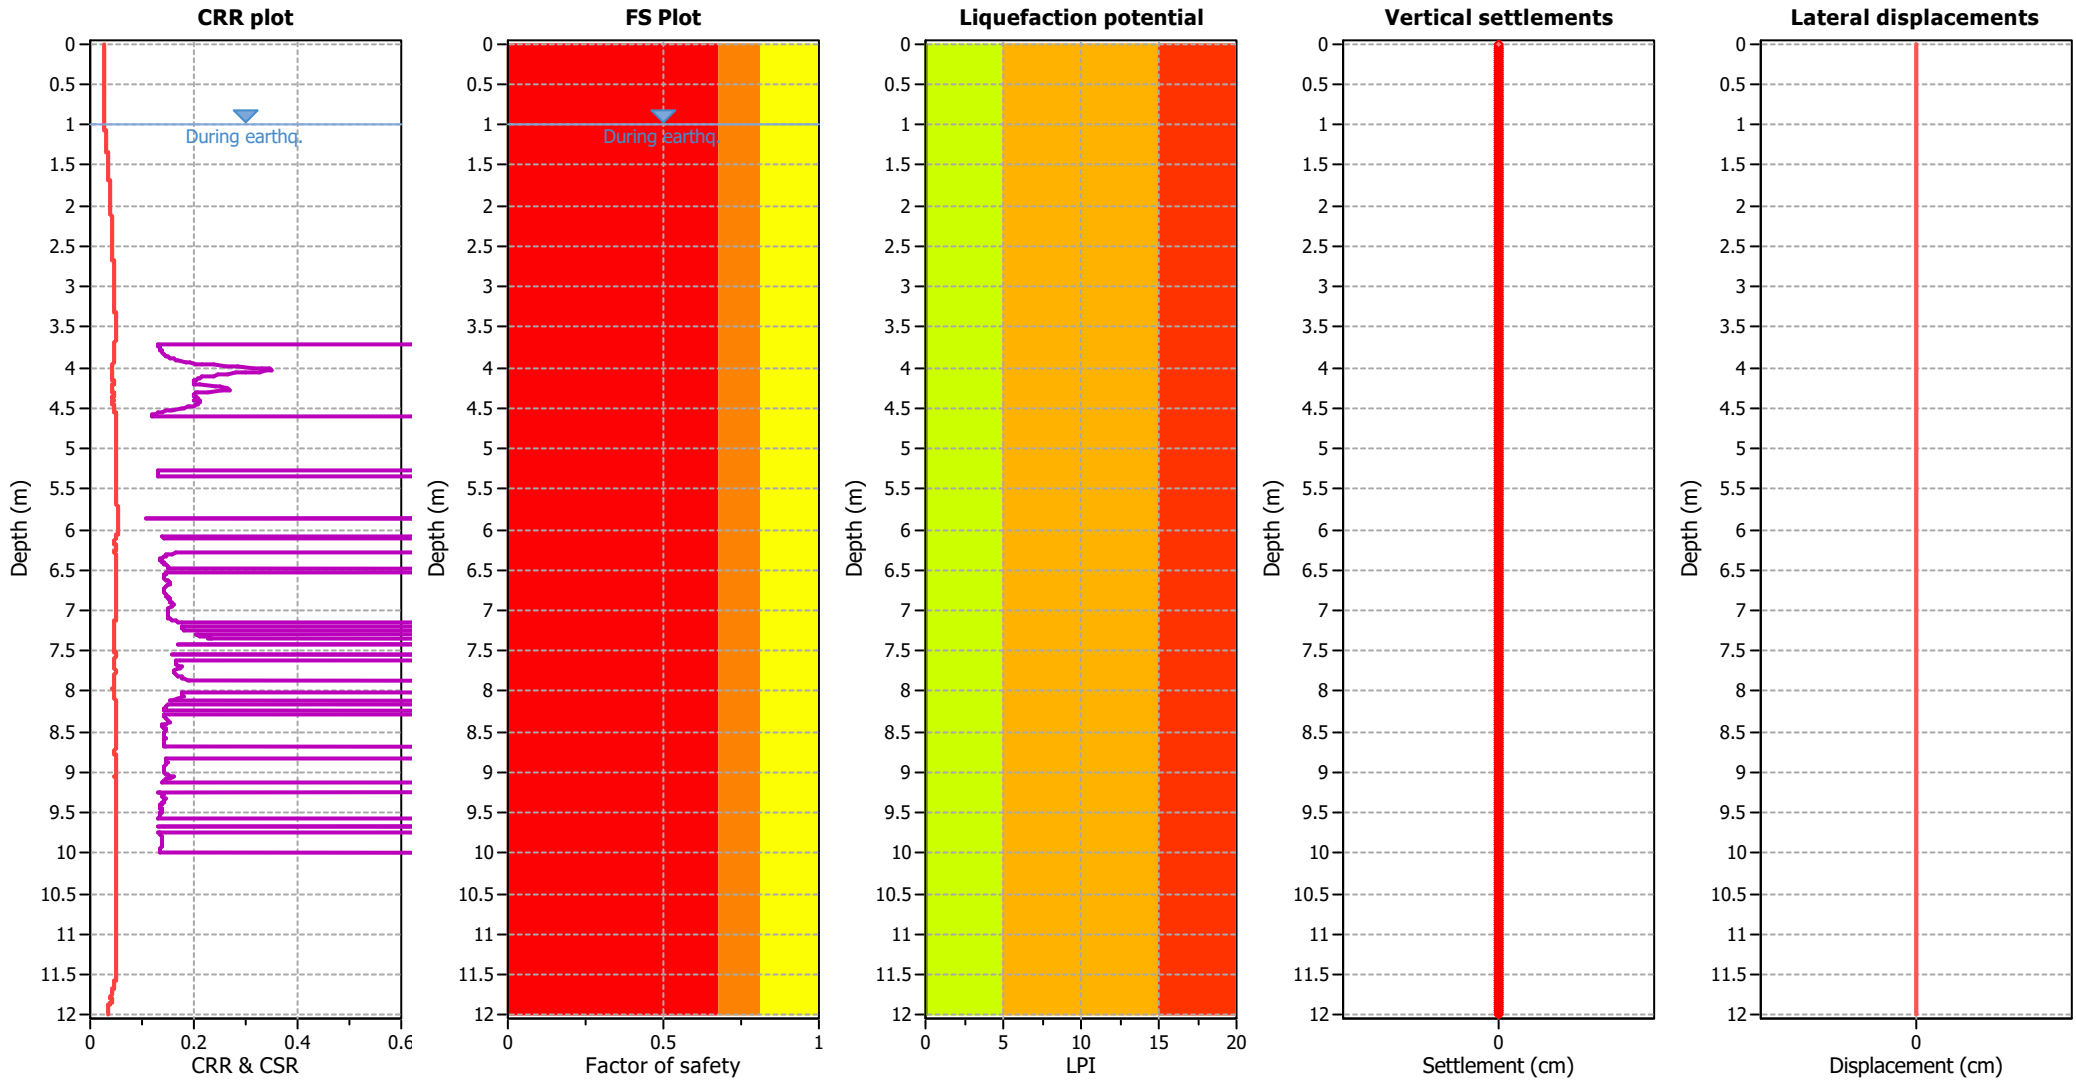

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

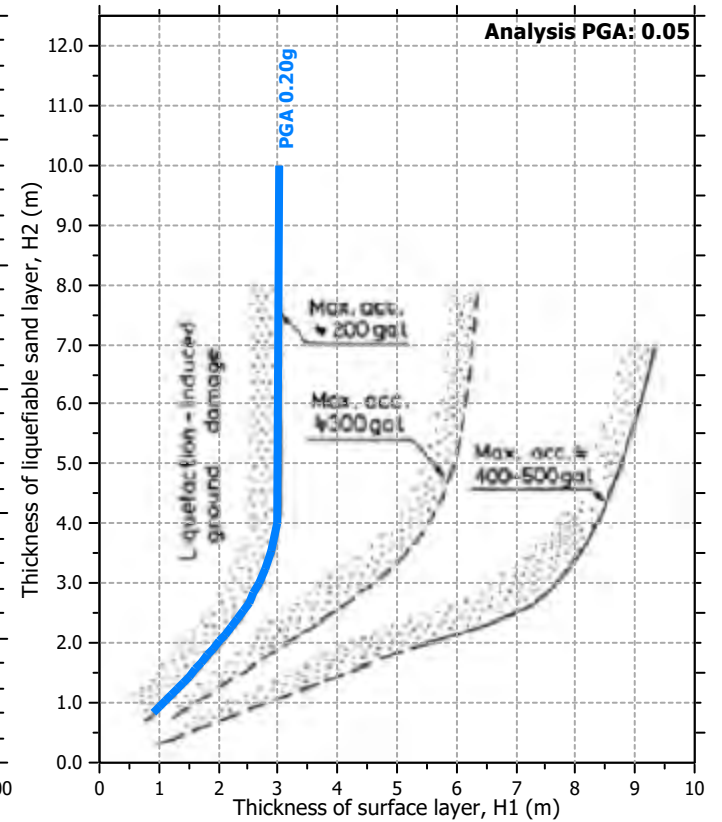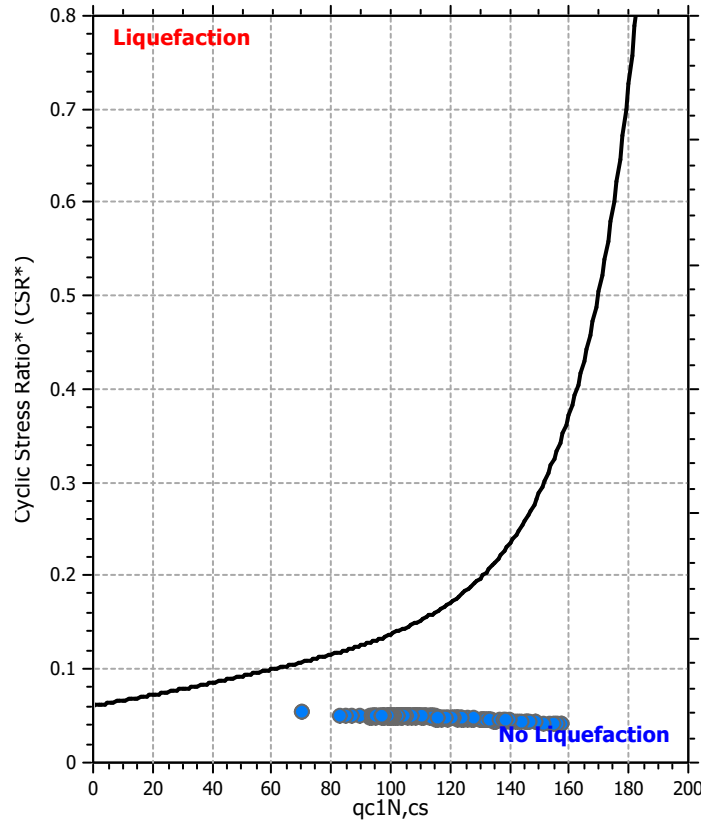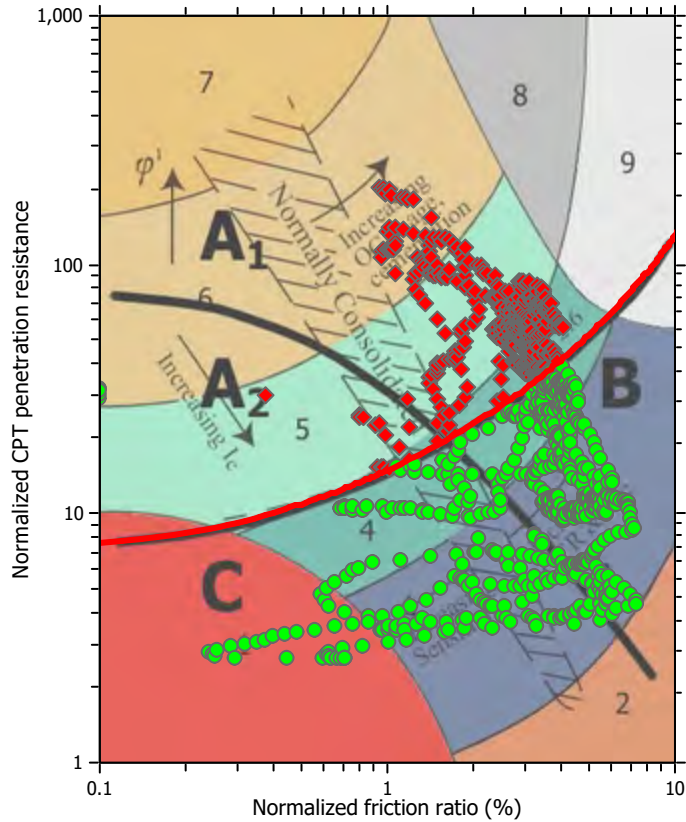

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

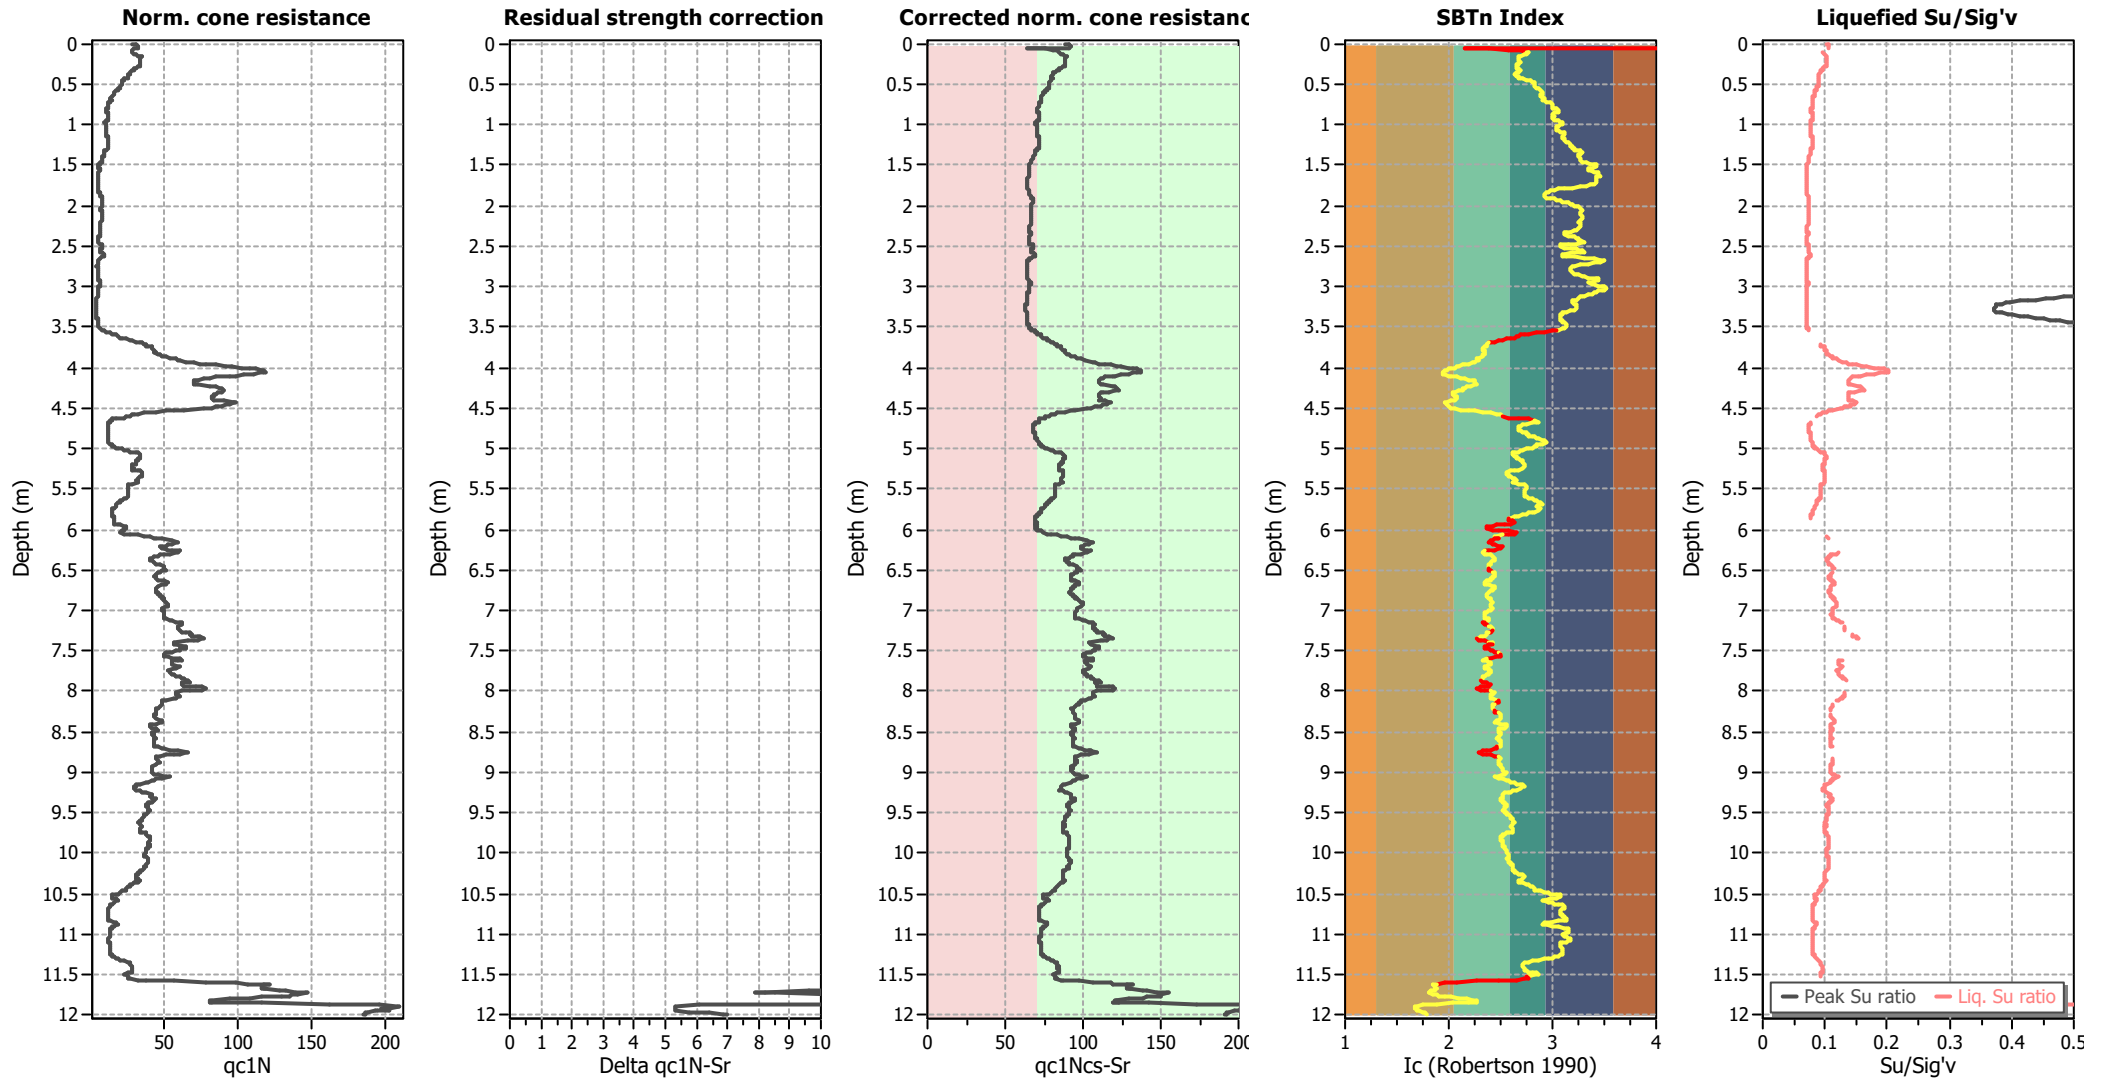

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

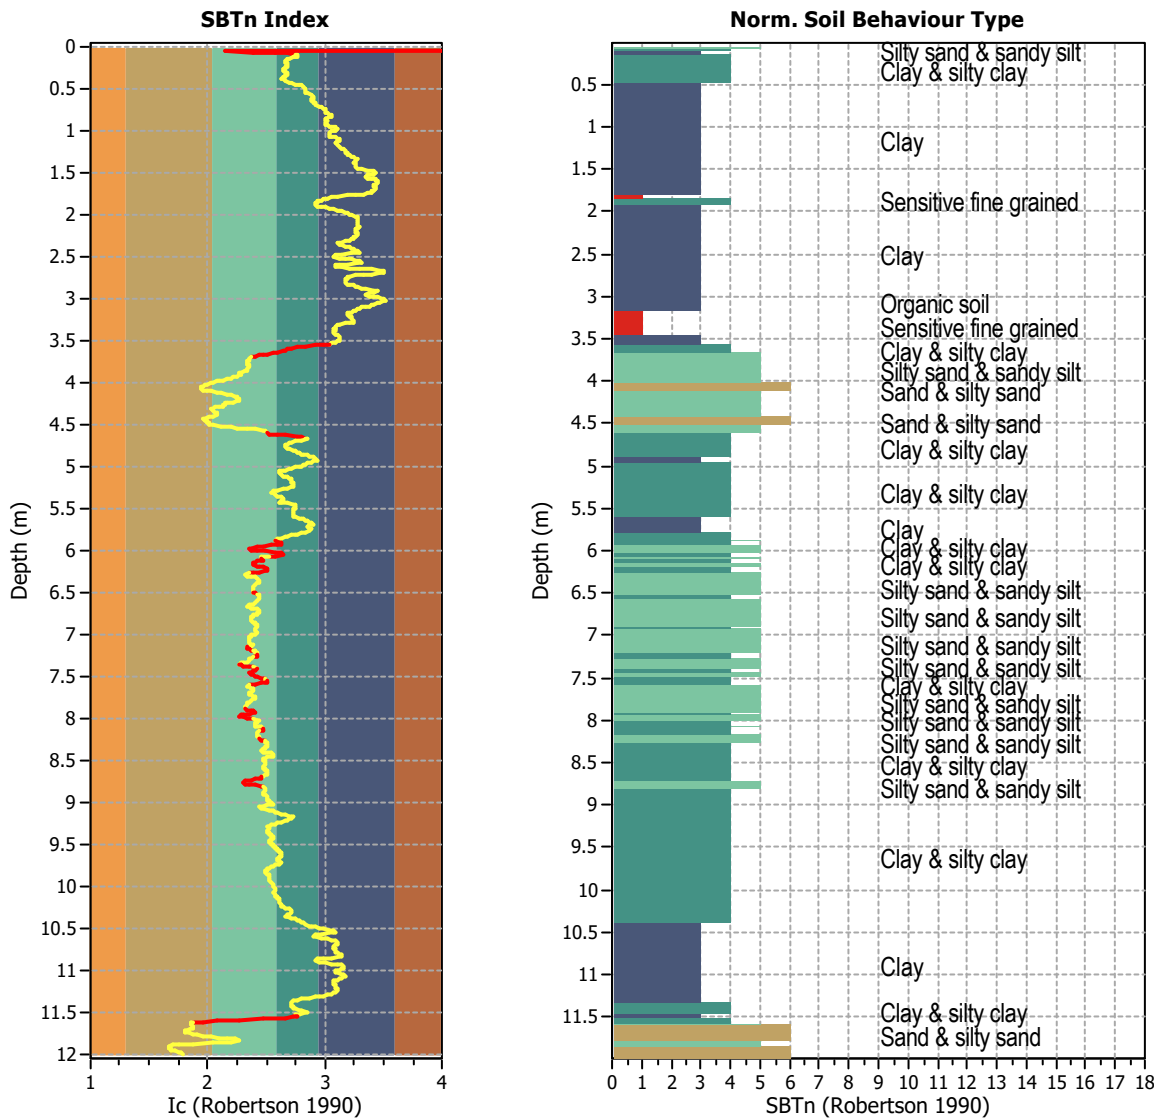


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1199
 Total points excluded: 152
 Exclusion percentage: 12.68%
 Number of layers detected: 25


Estimation of post-earthquake settlements

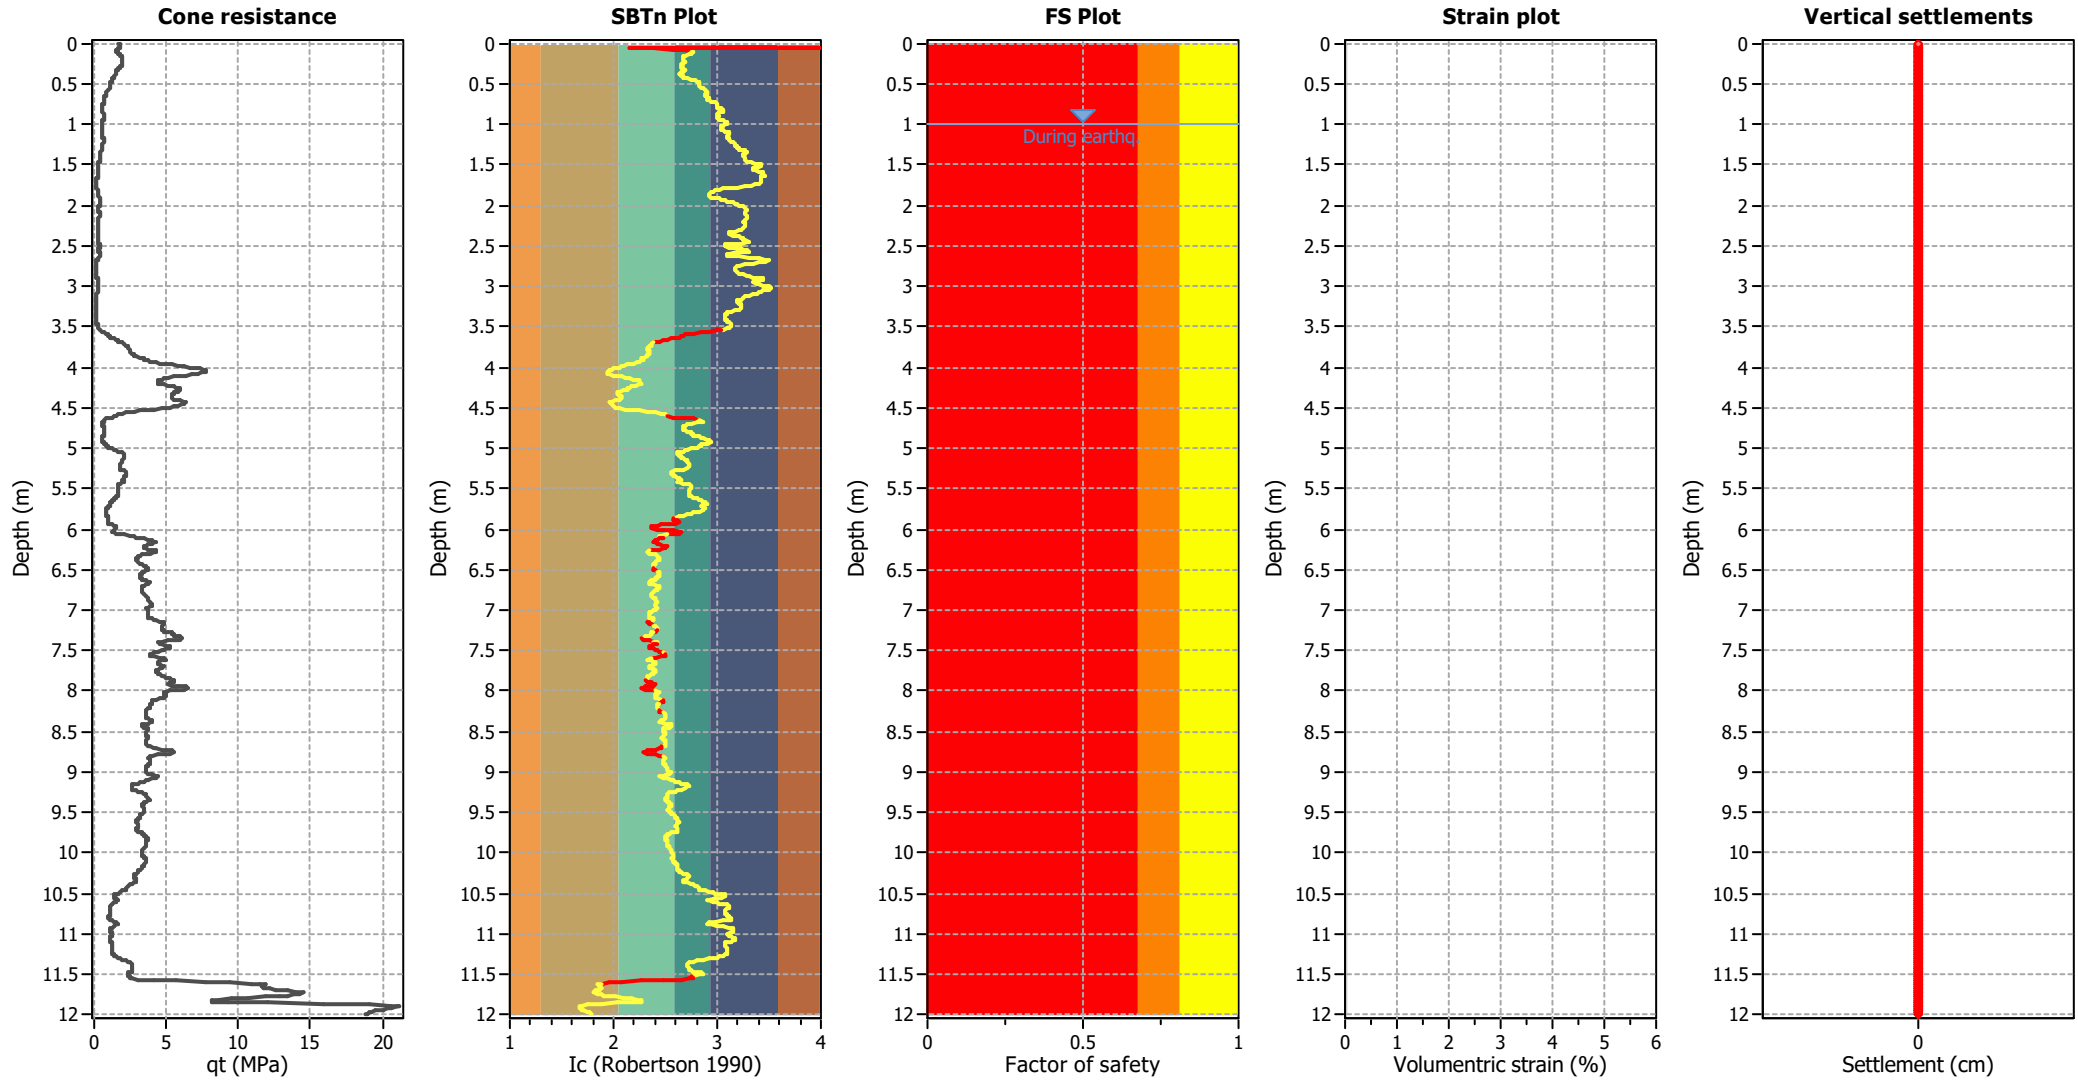

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

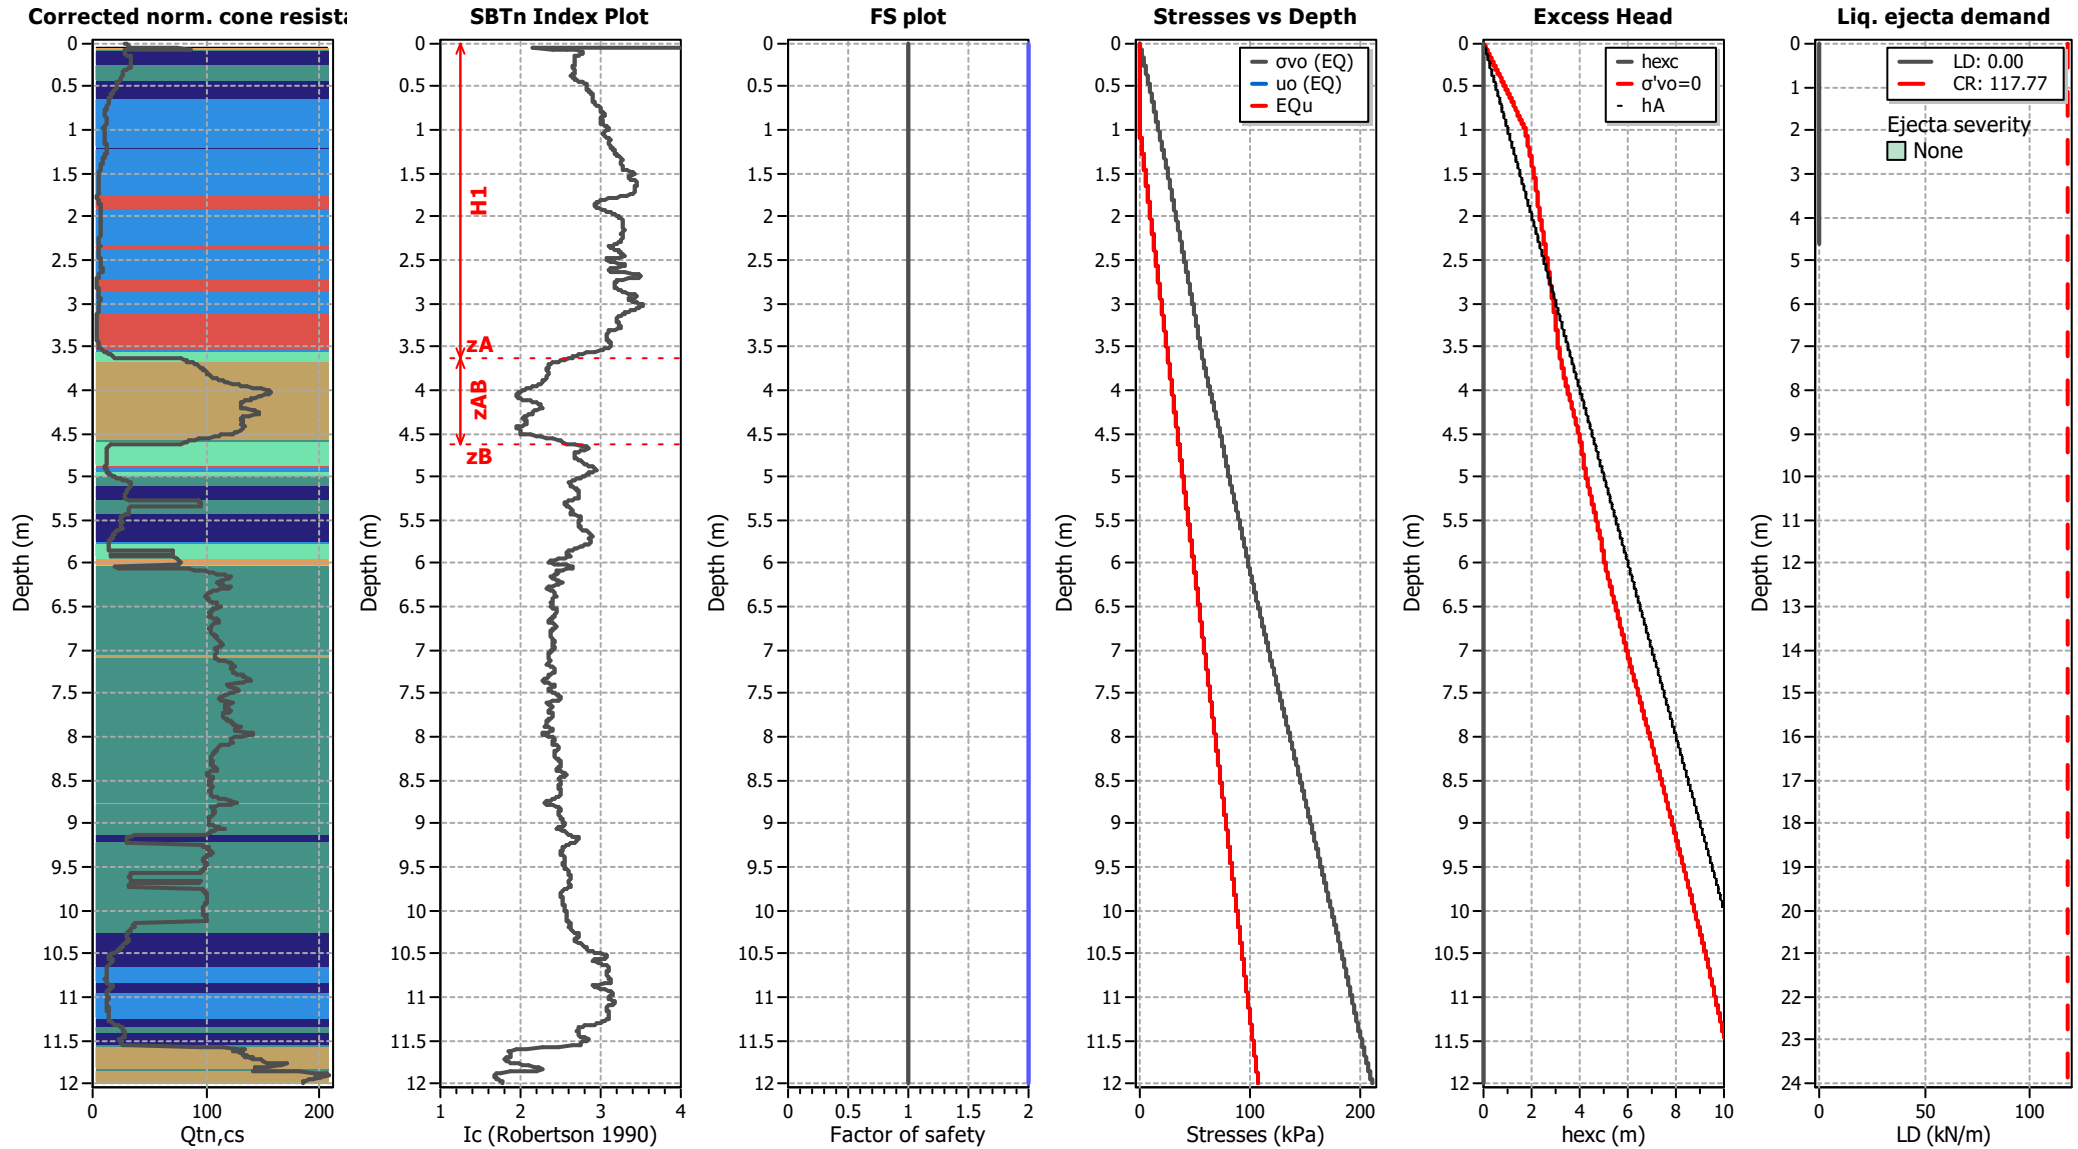

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT412

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

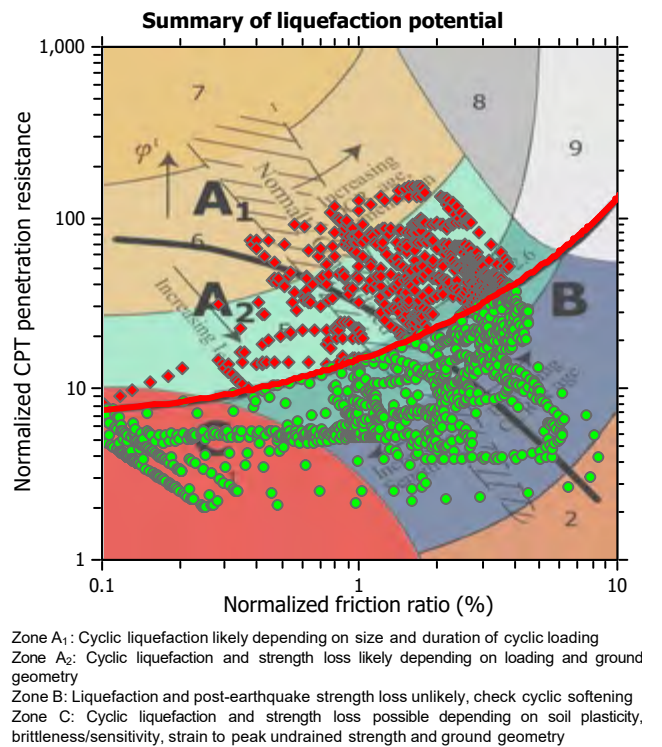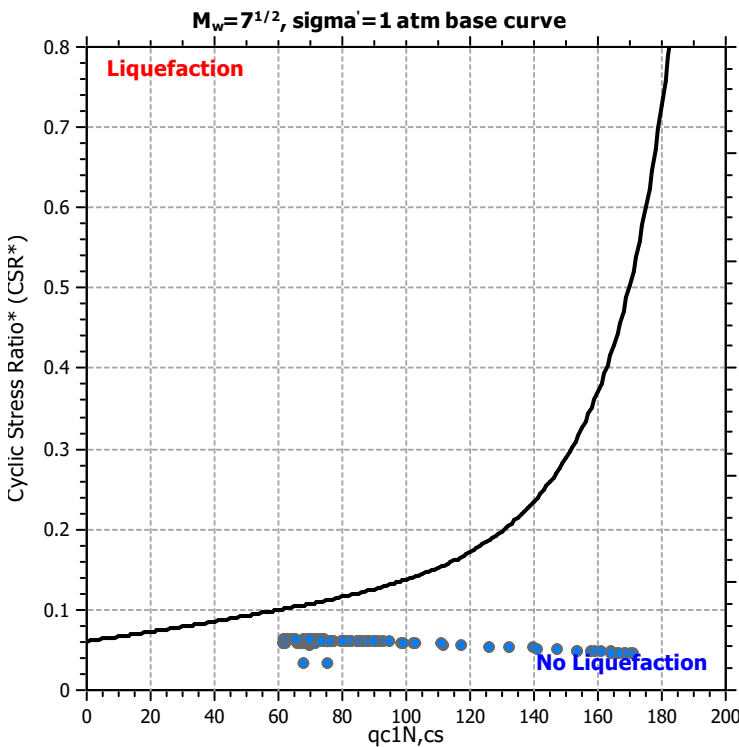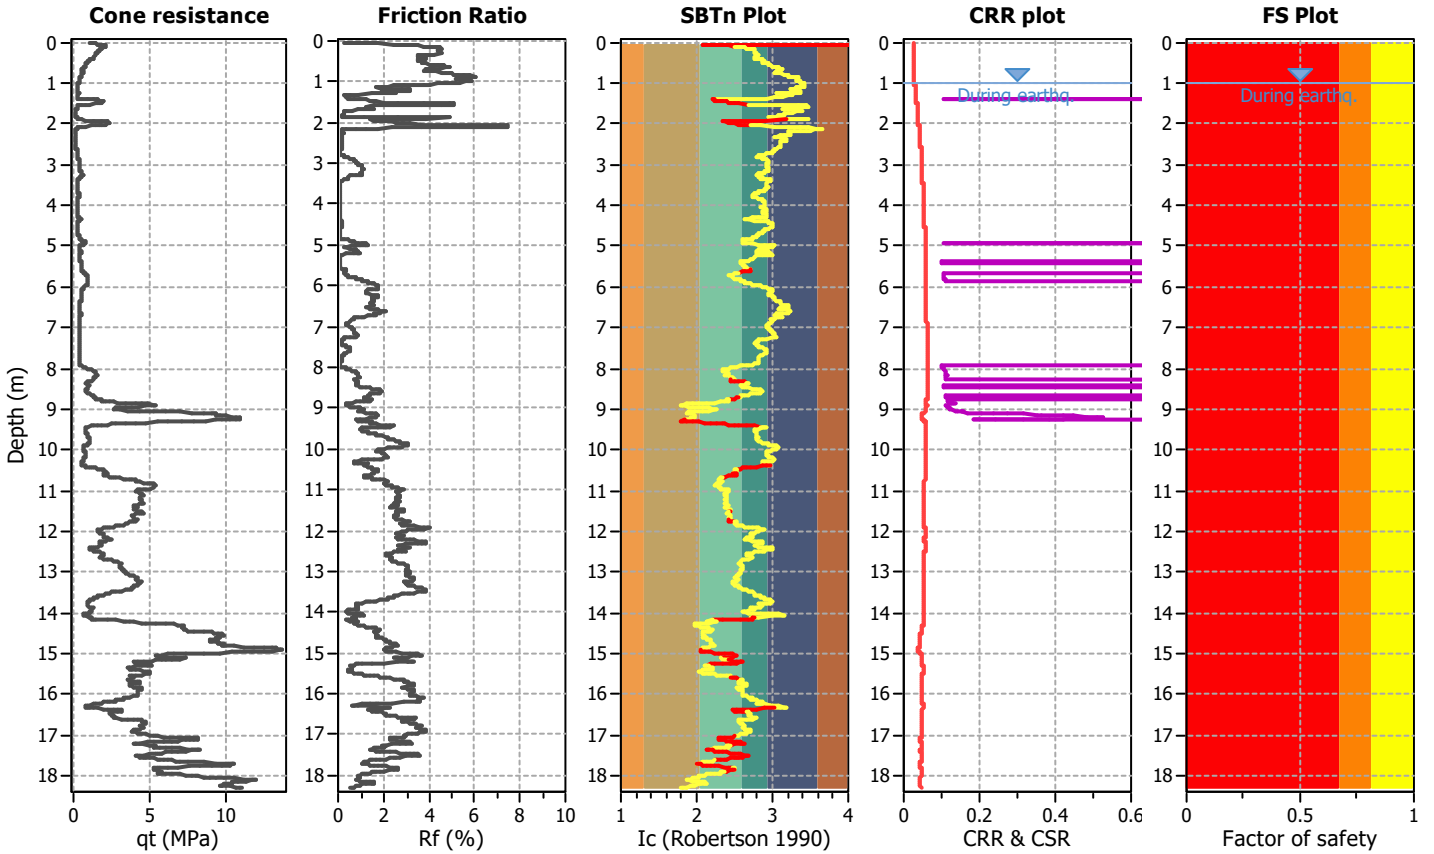

CPT basic interpretation plots

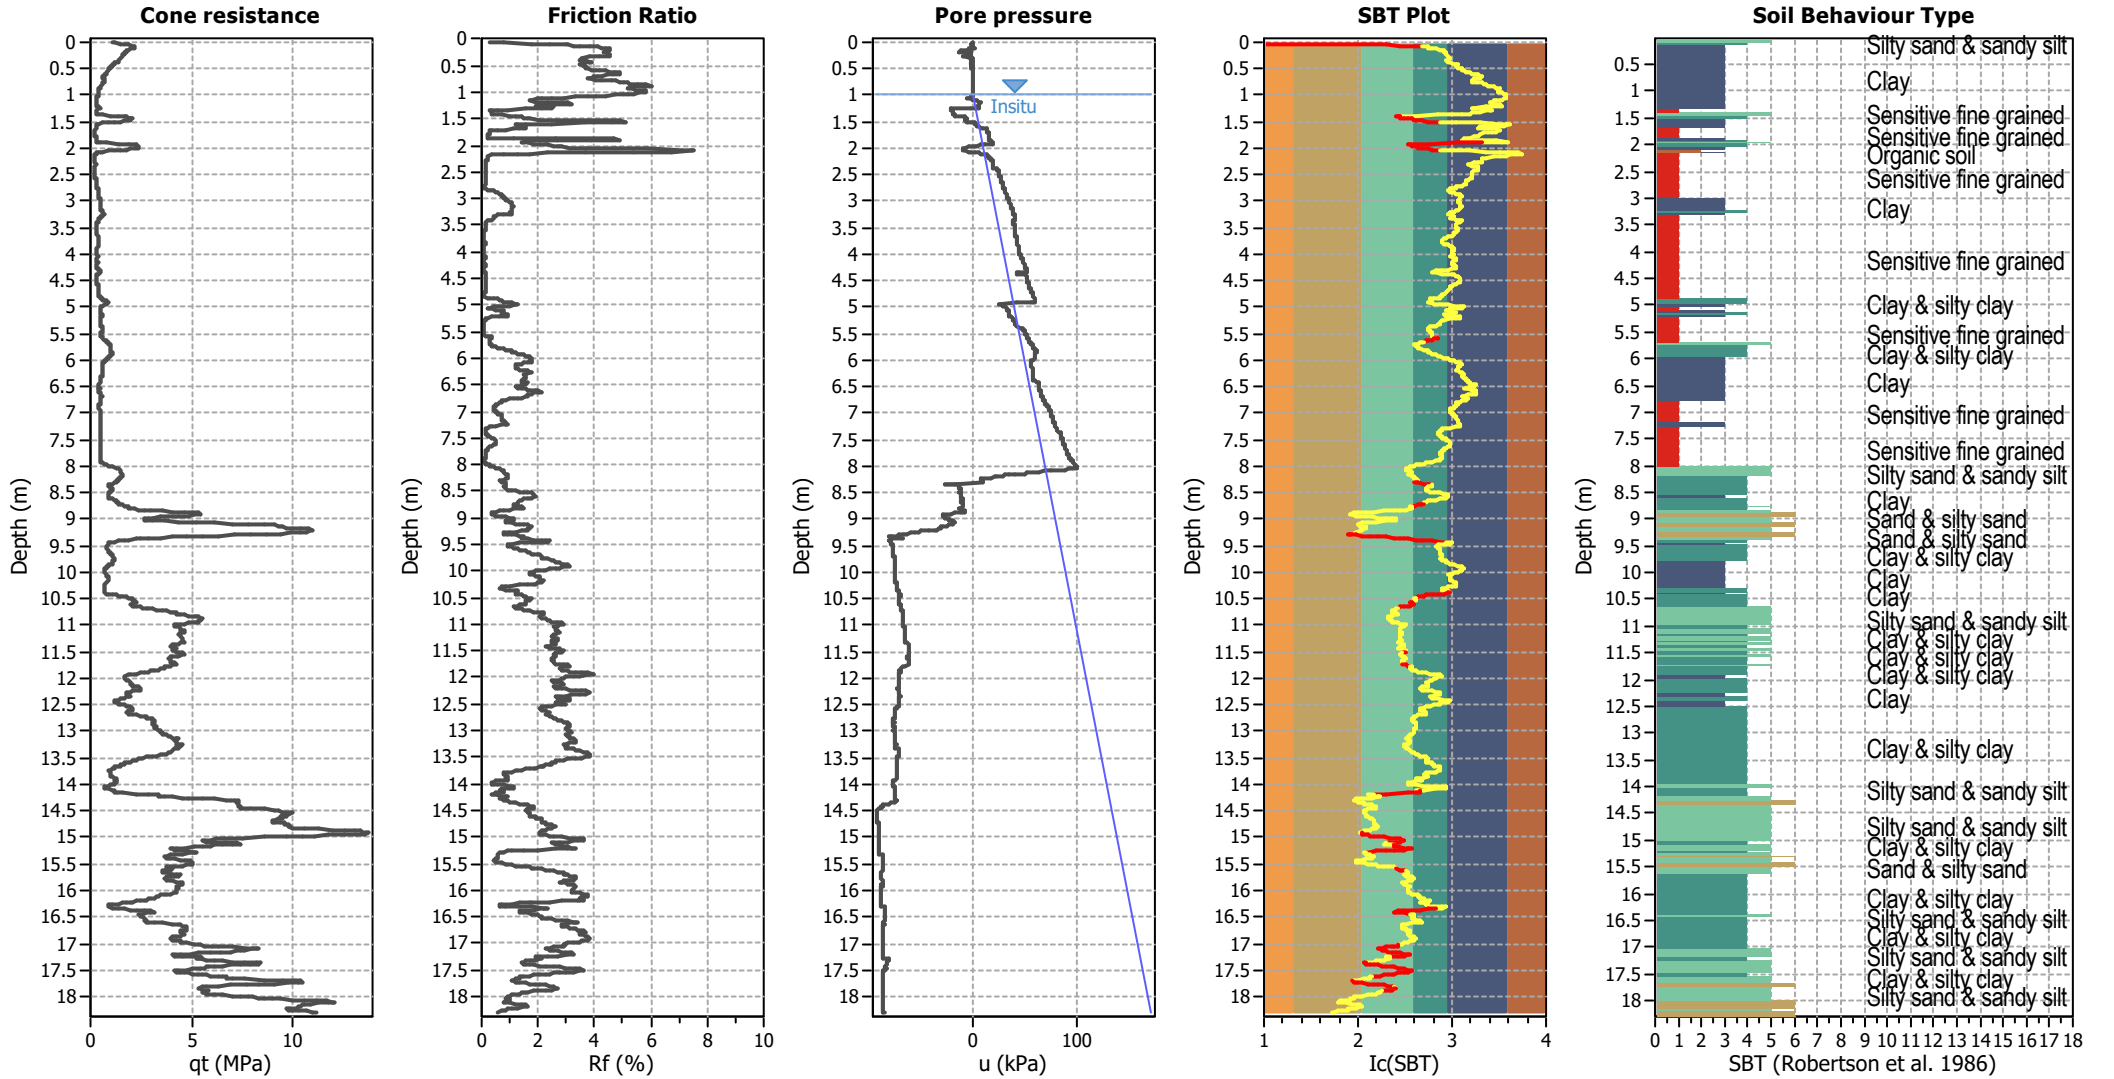


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

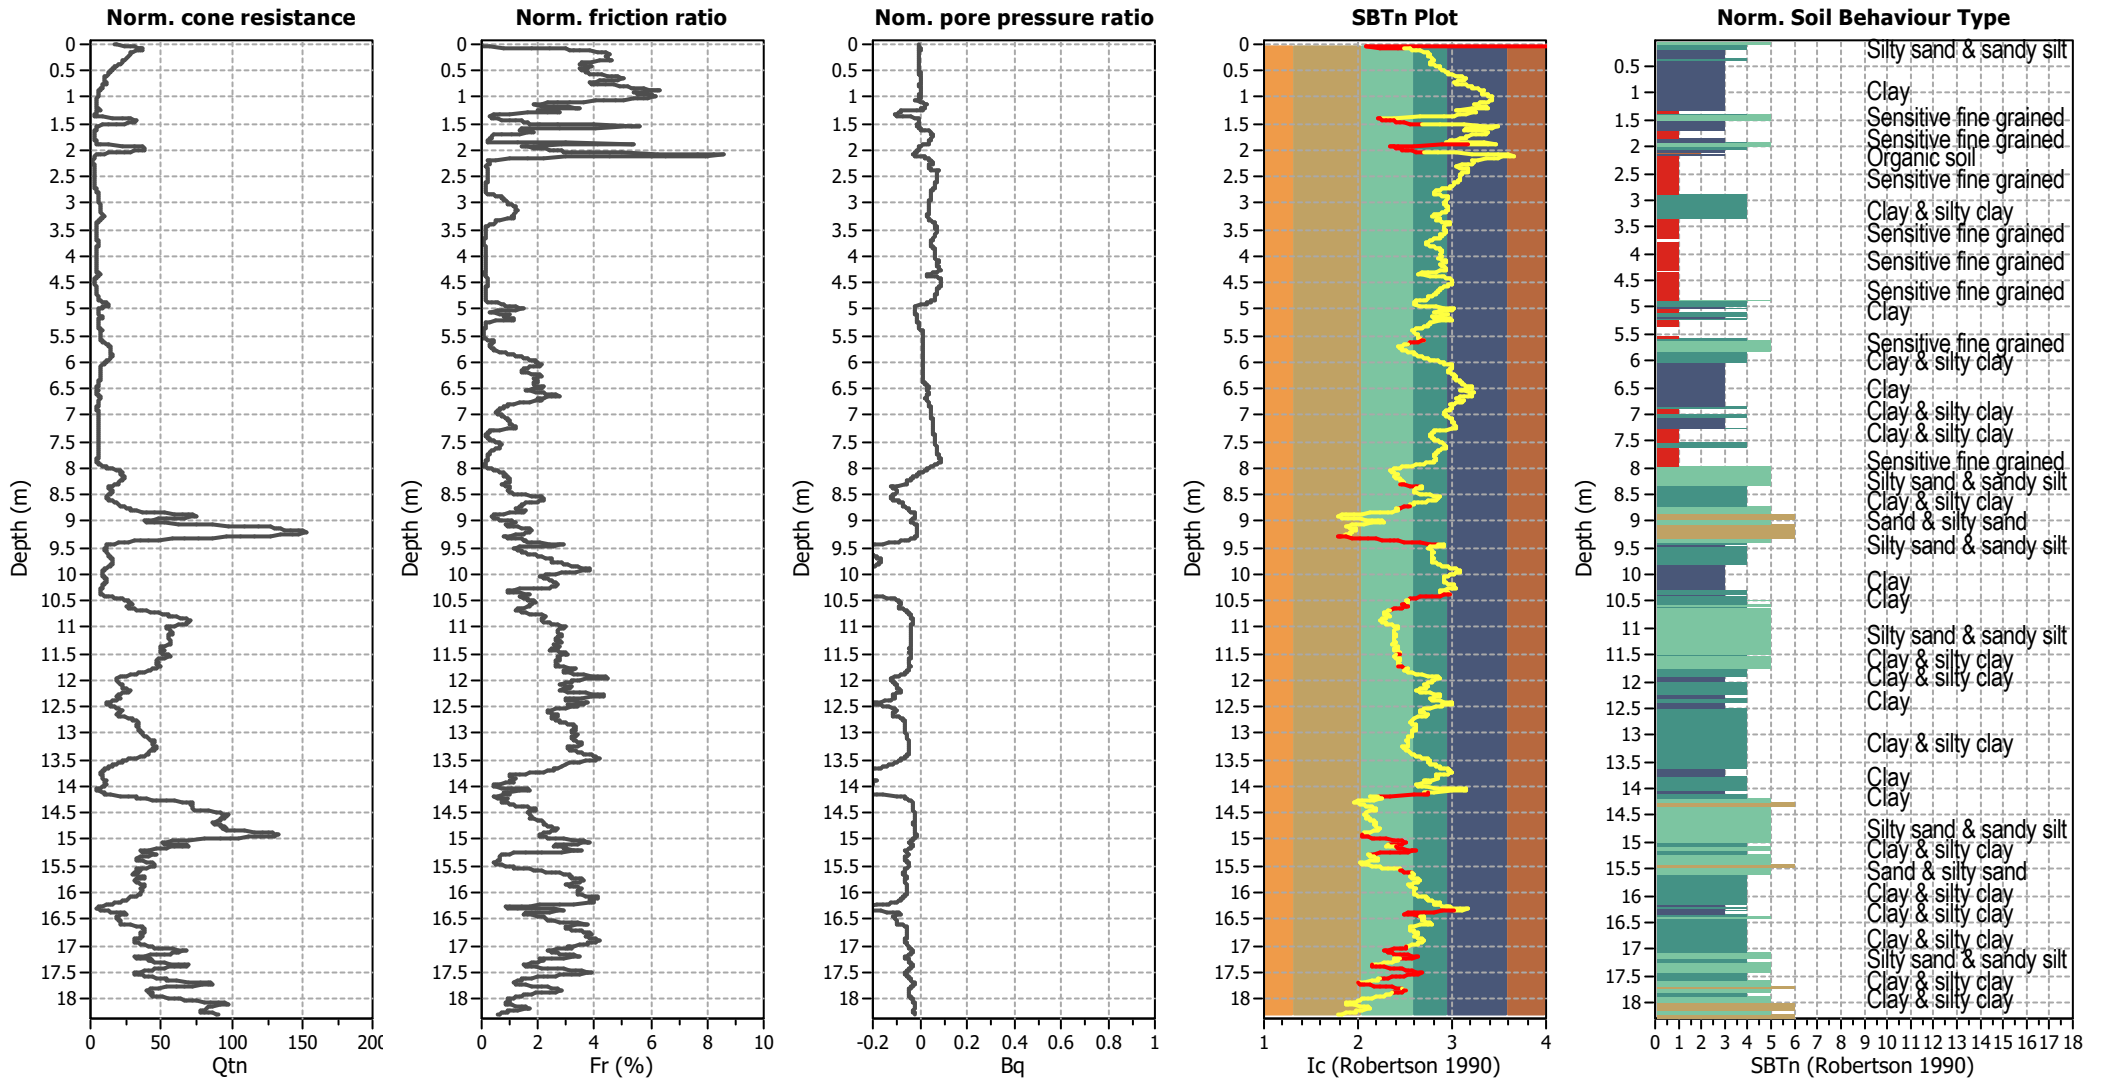


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

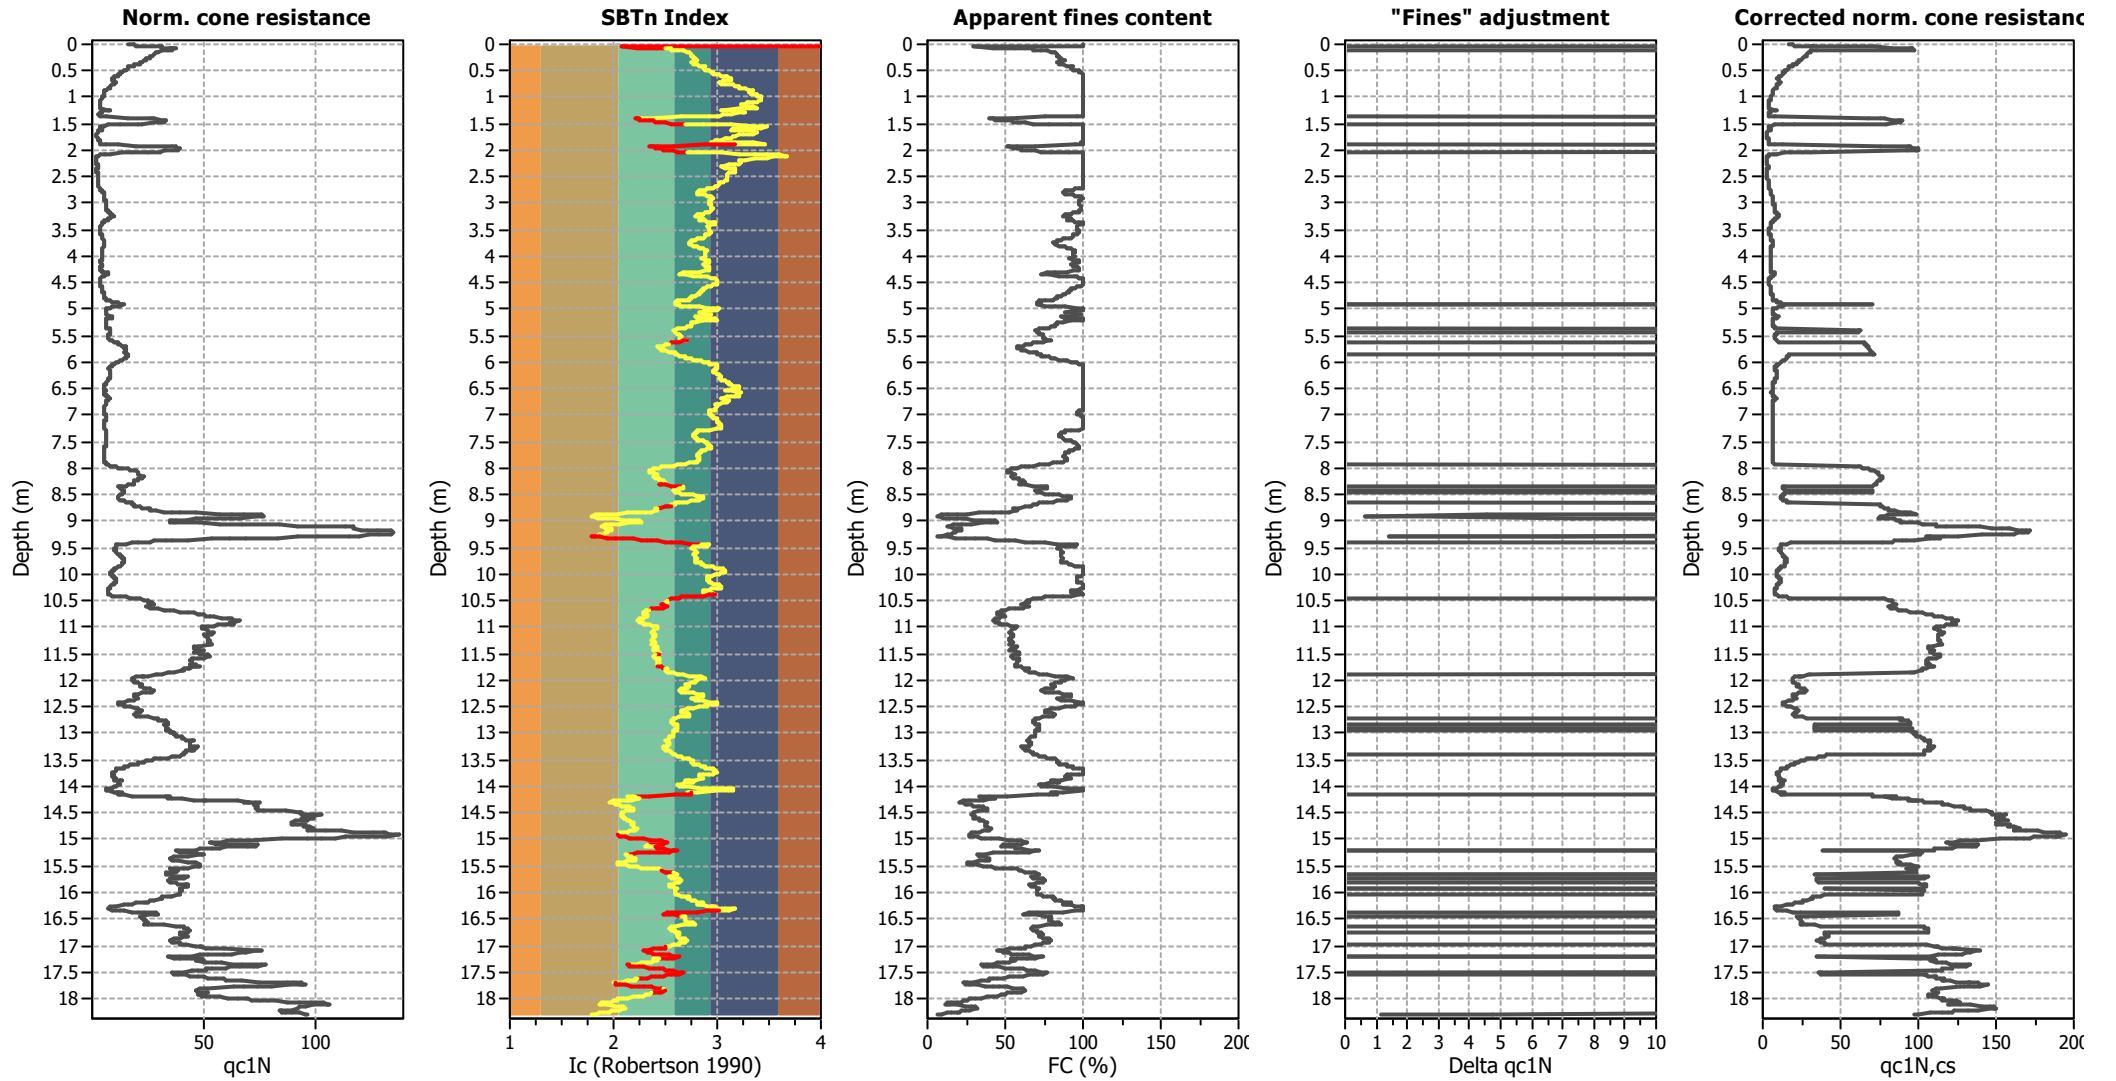

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

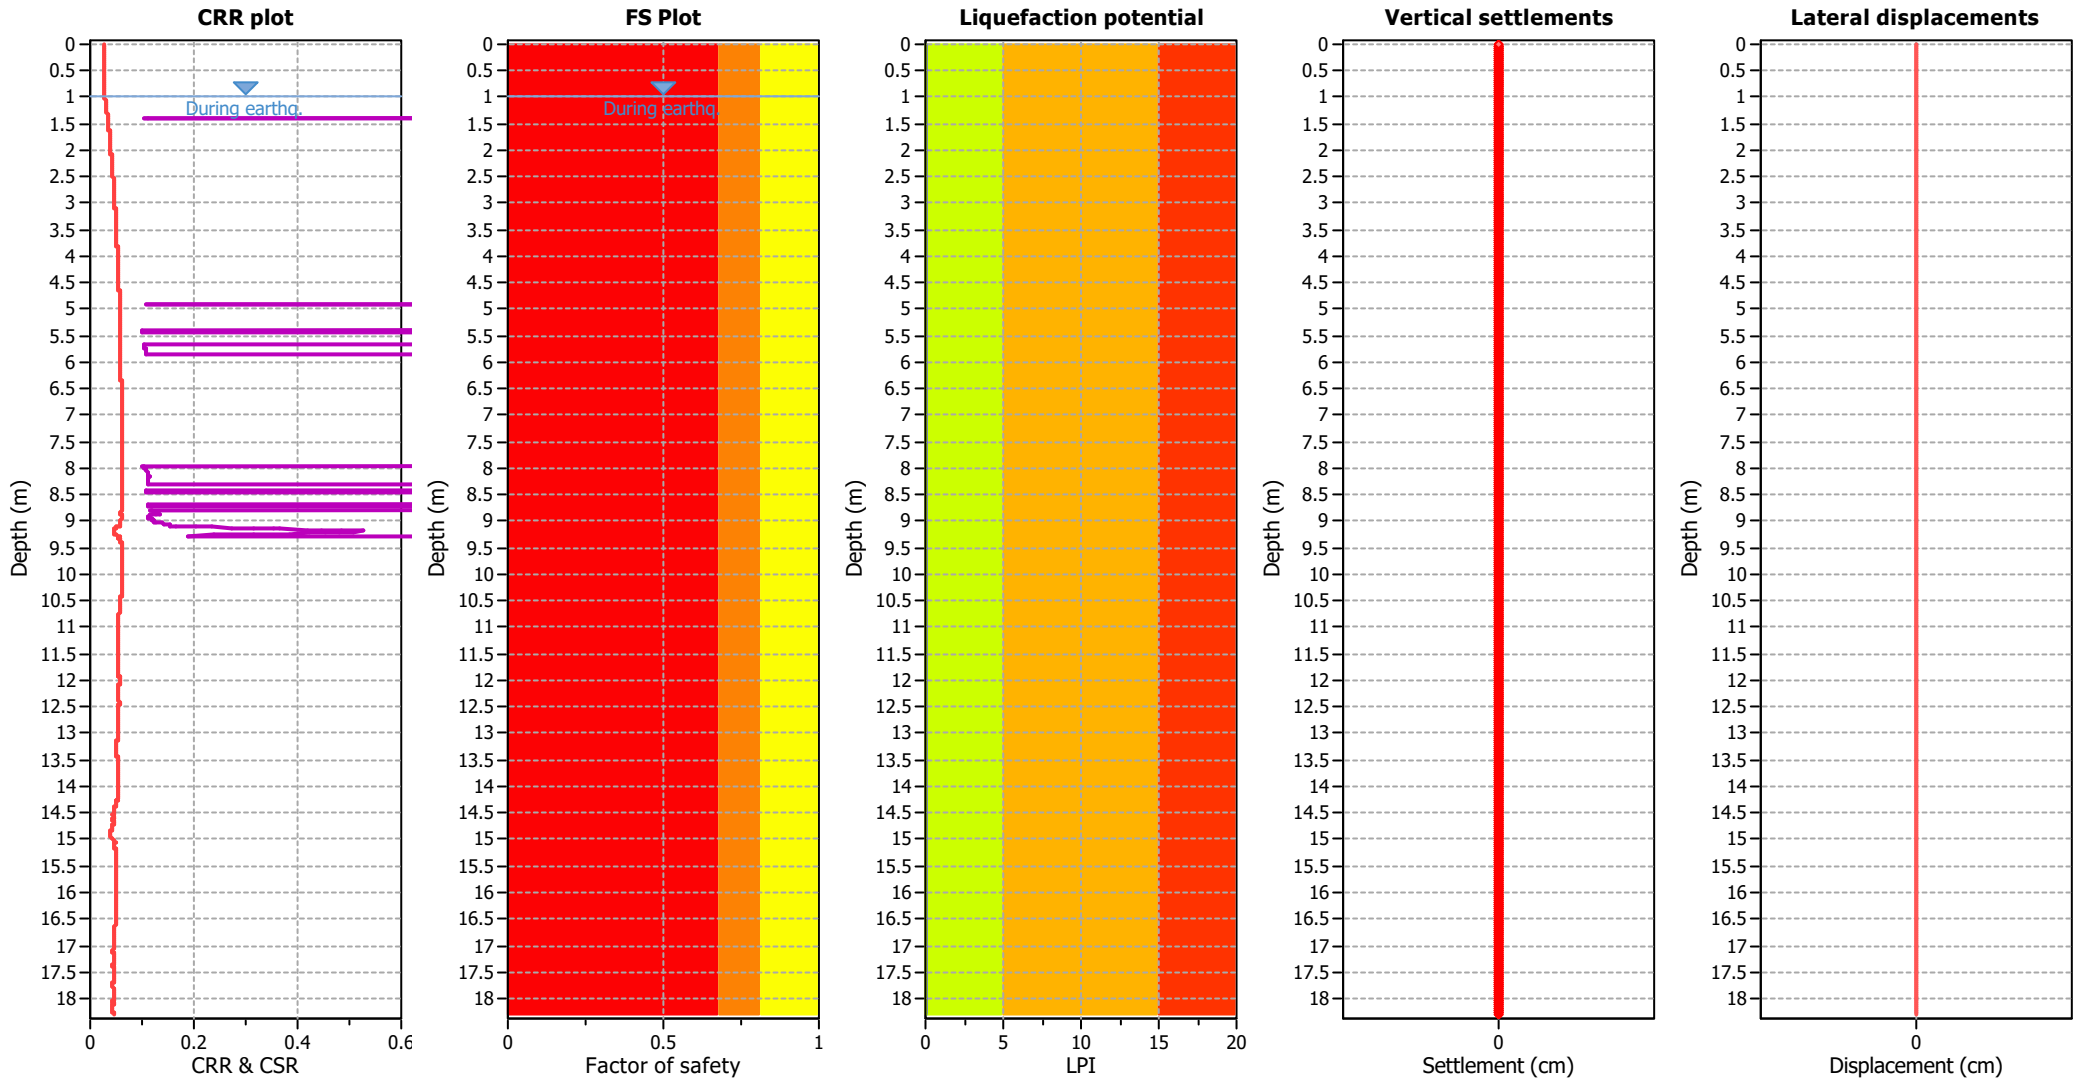

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

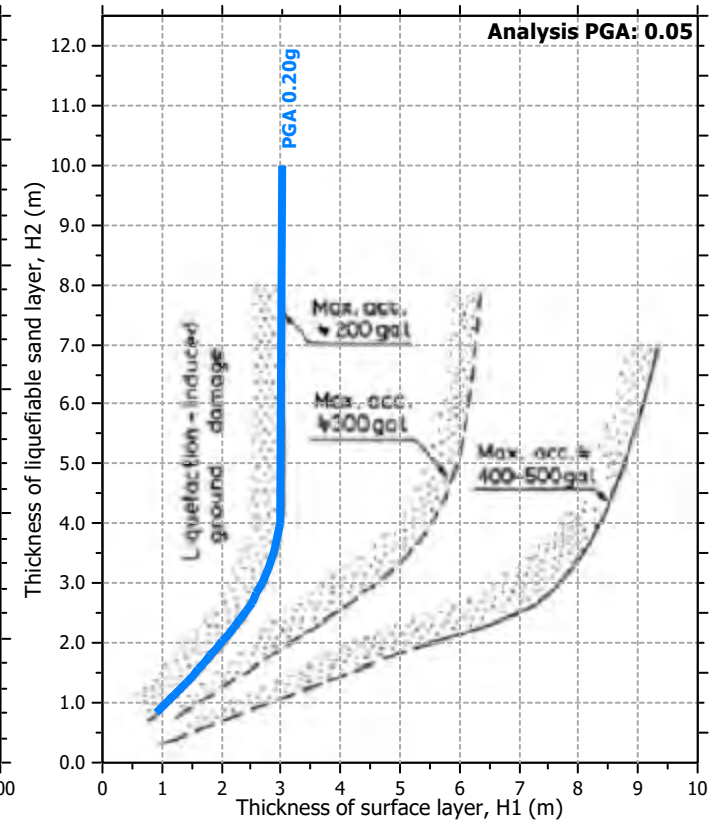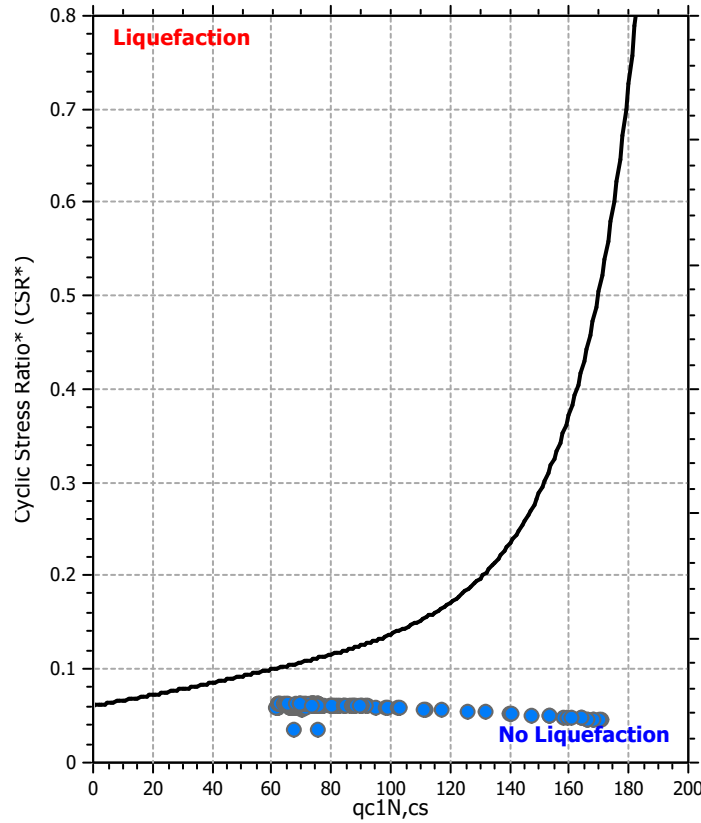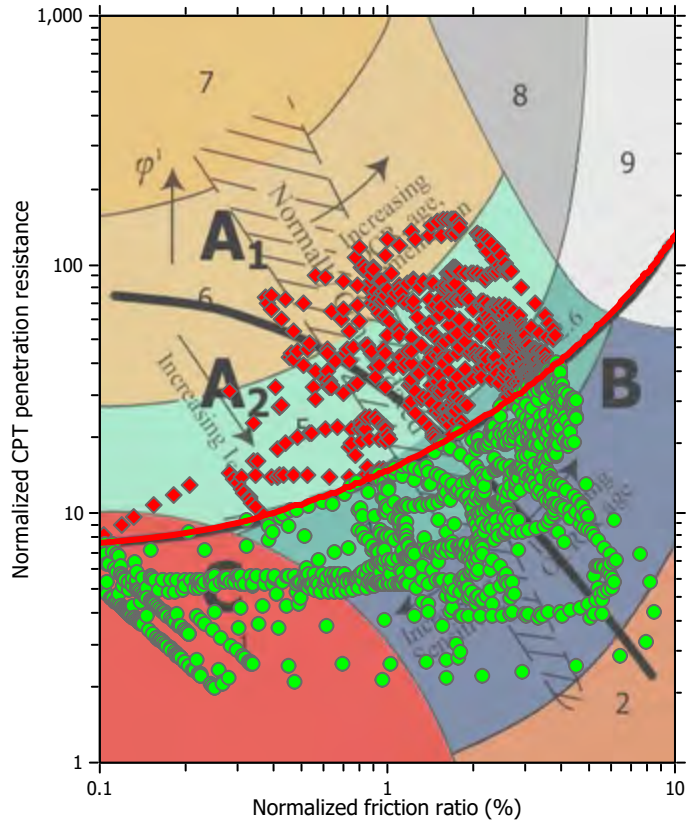

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

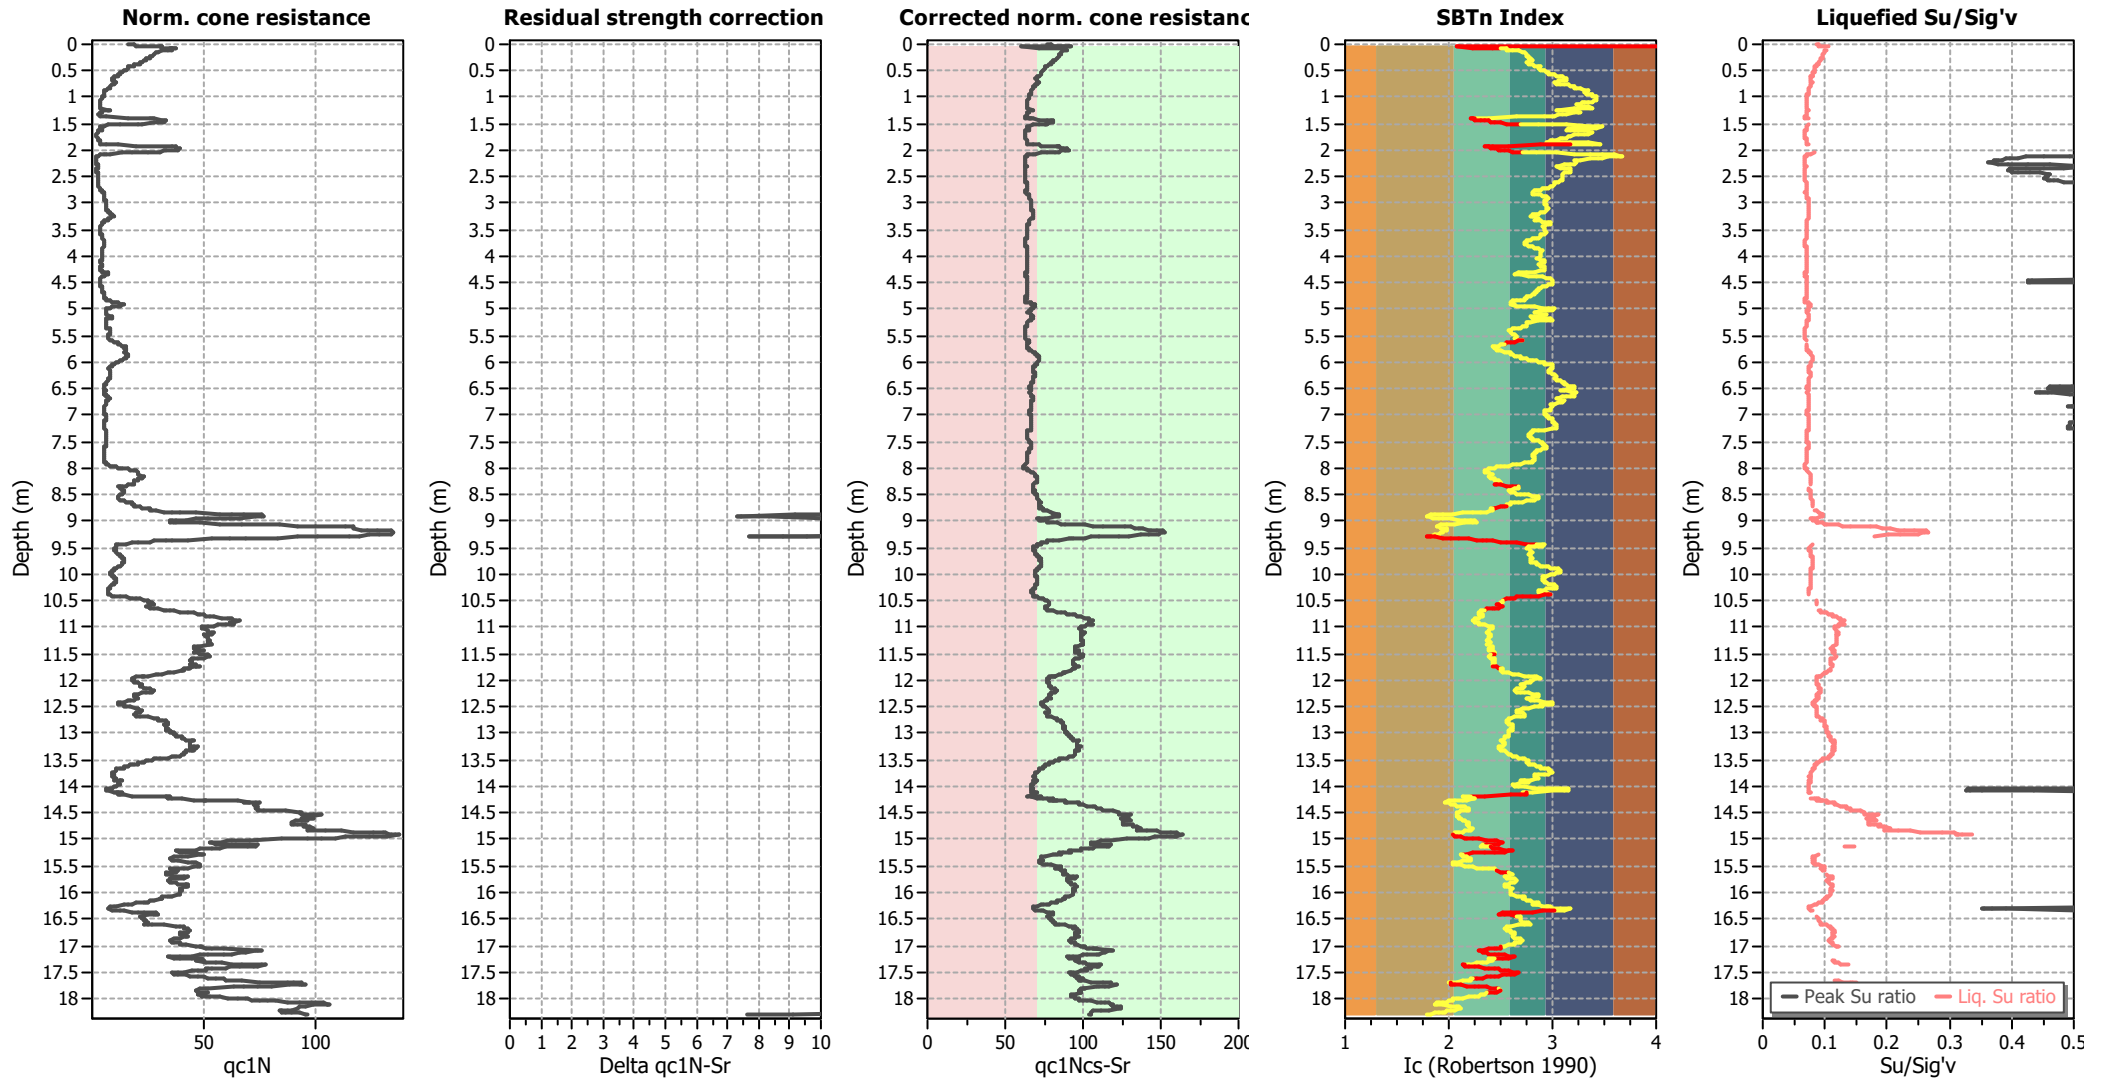

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

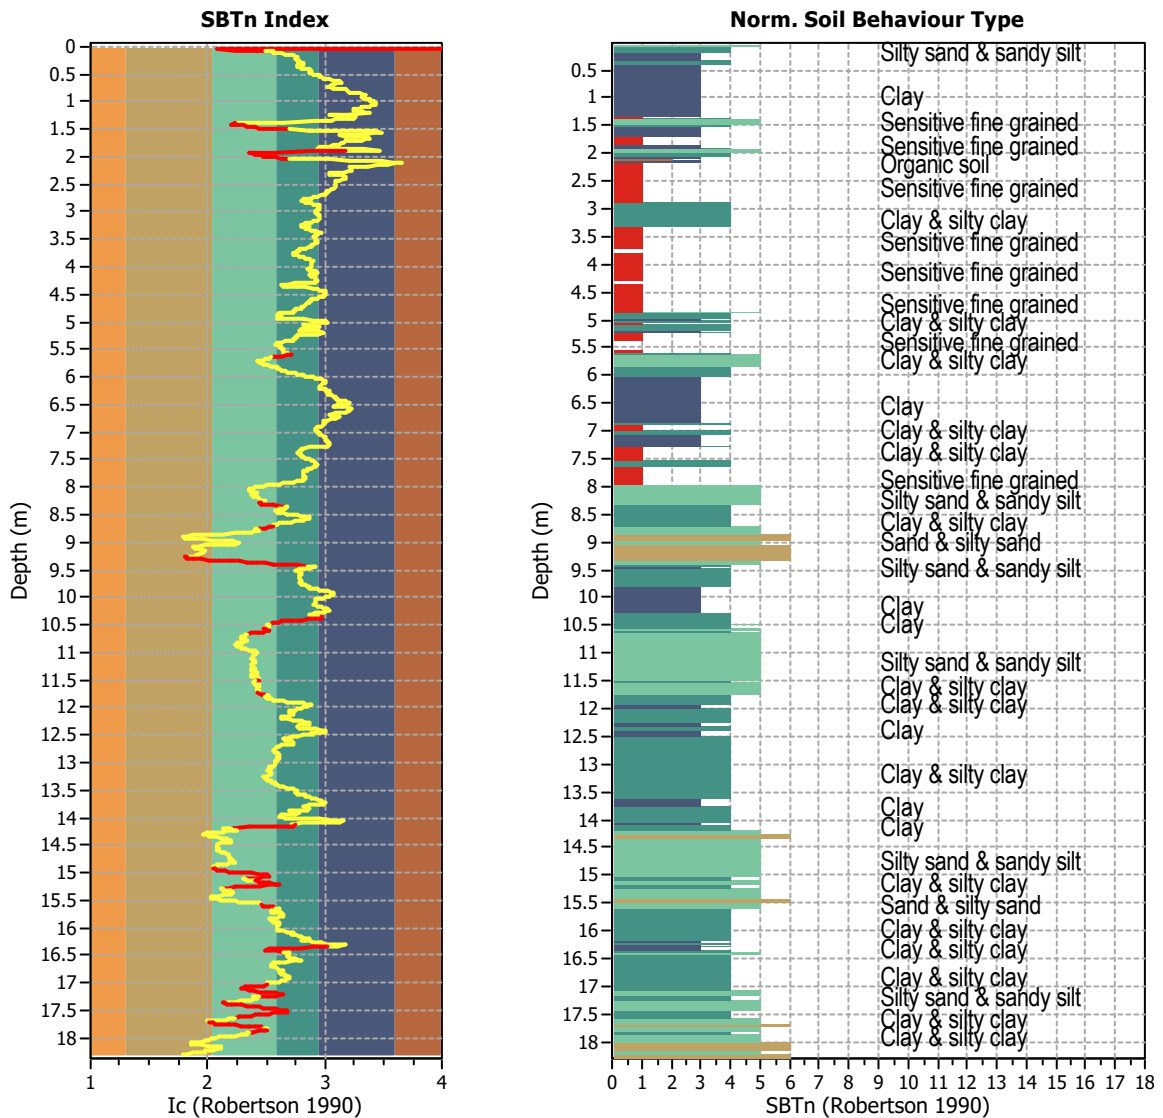


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1830
 Total points excluded: 234
 Exclusion percentage: 12.79%
 Number of layers detected: 28


Estimation of post-earthquake settlements

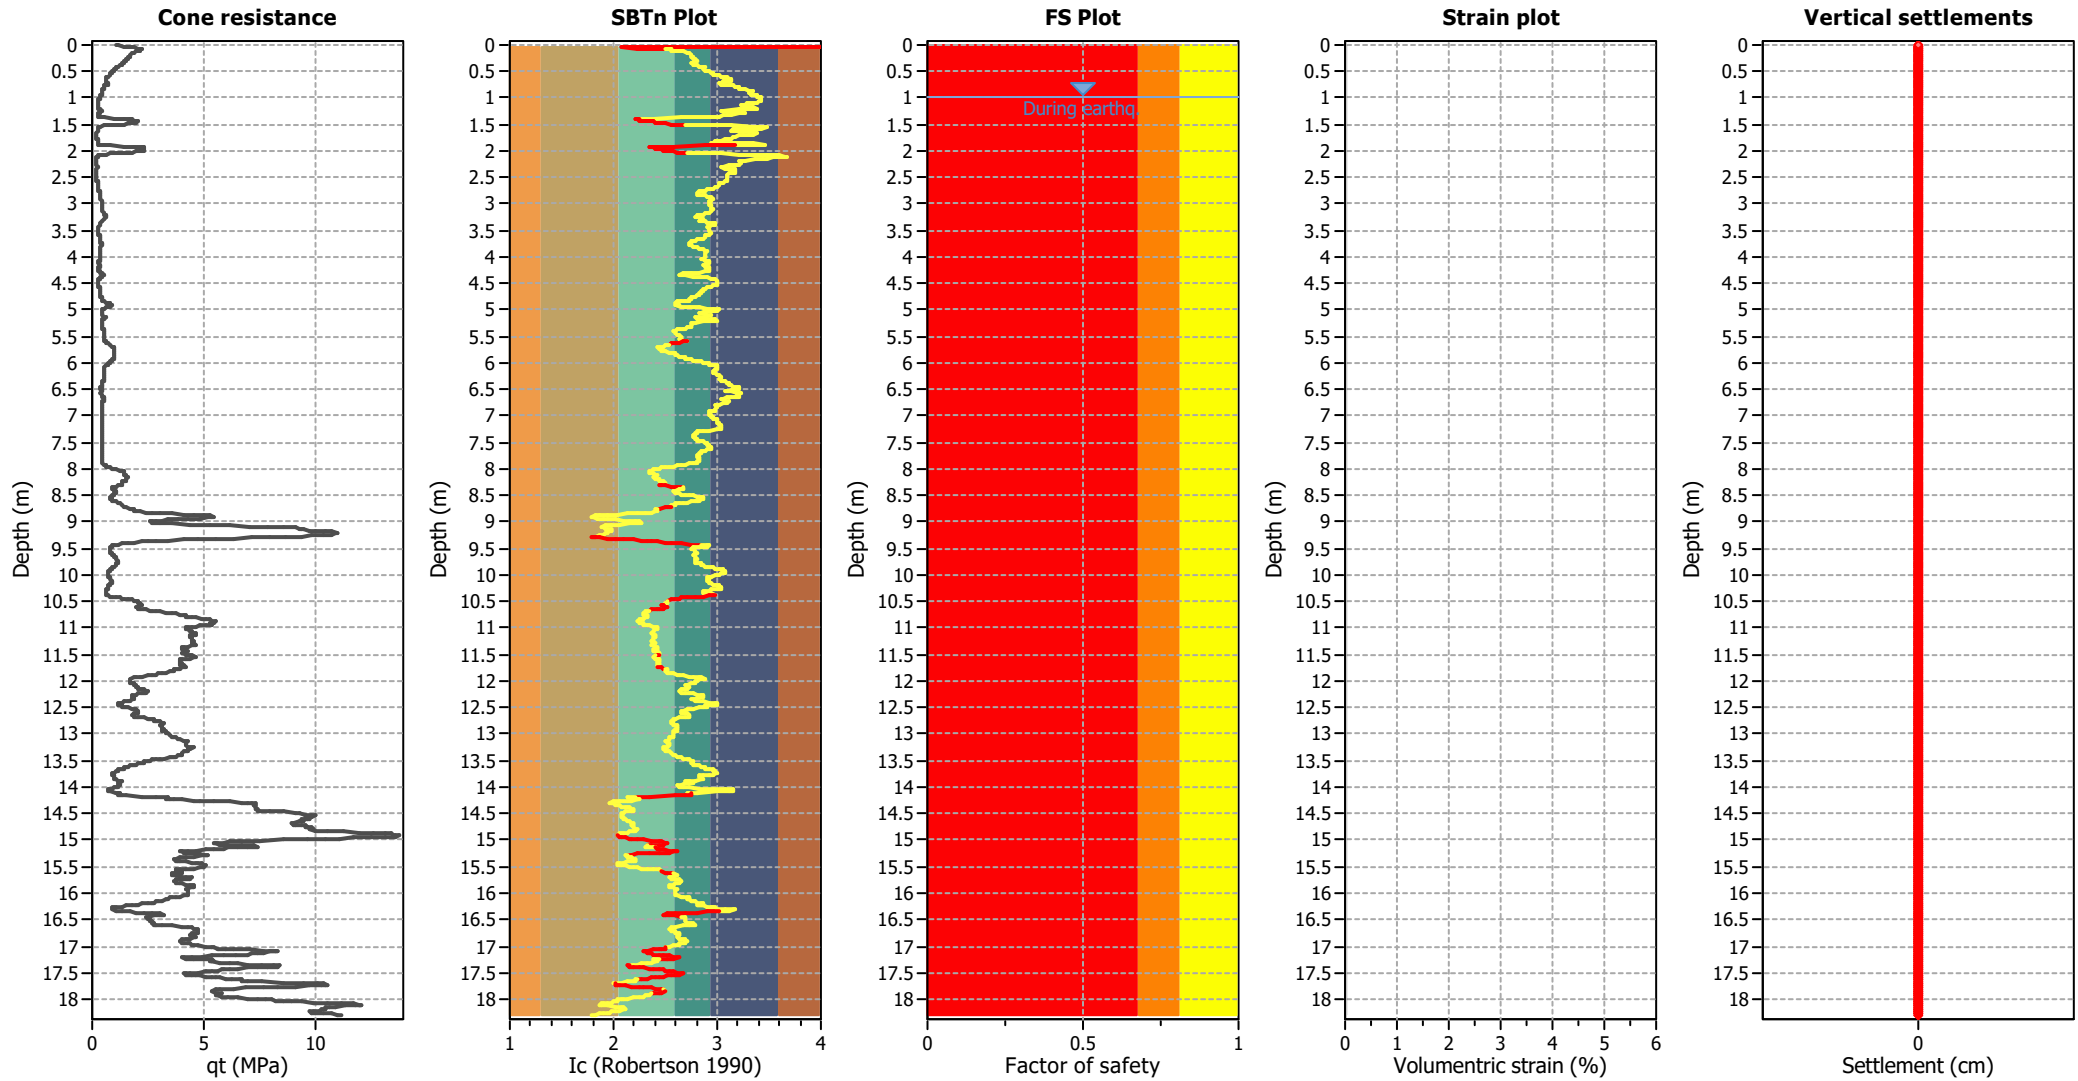

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

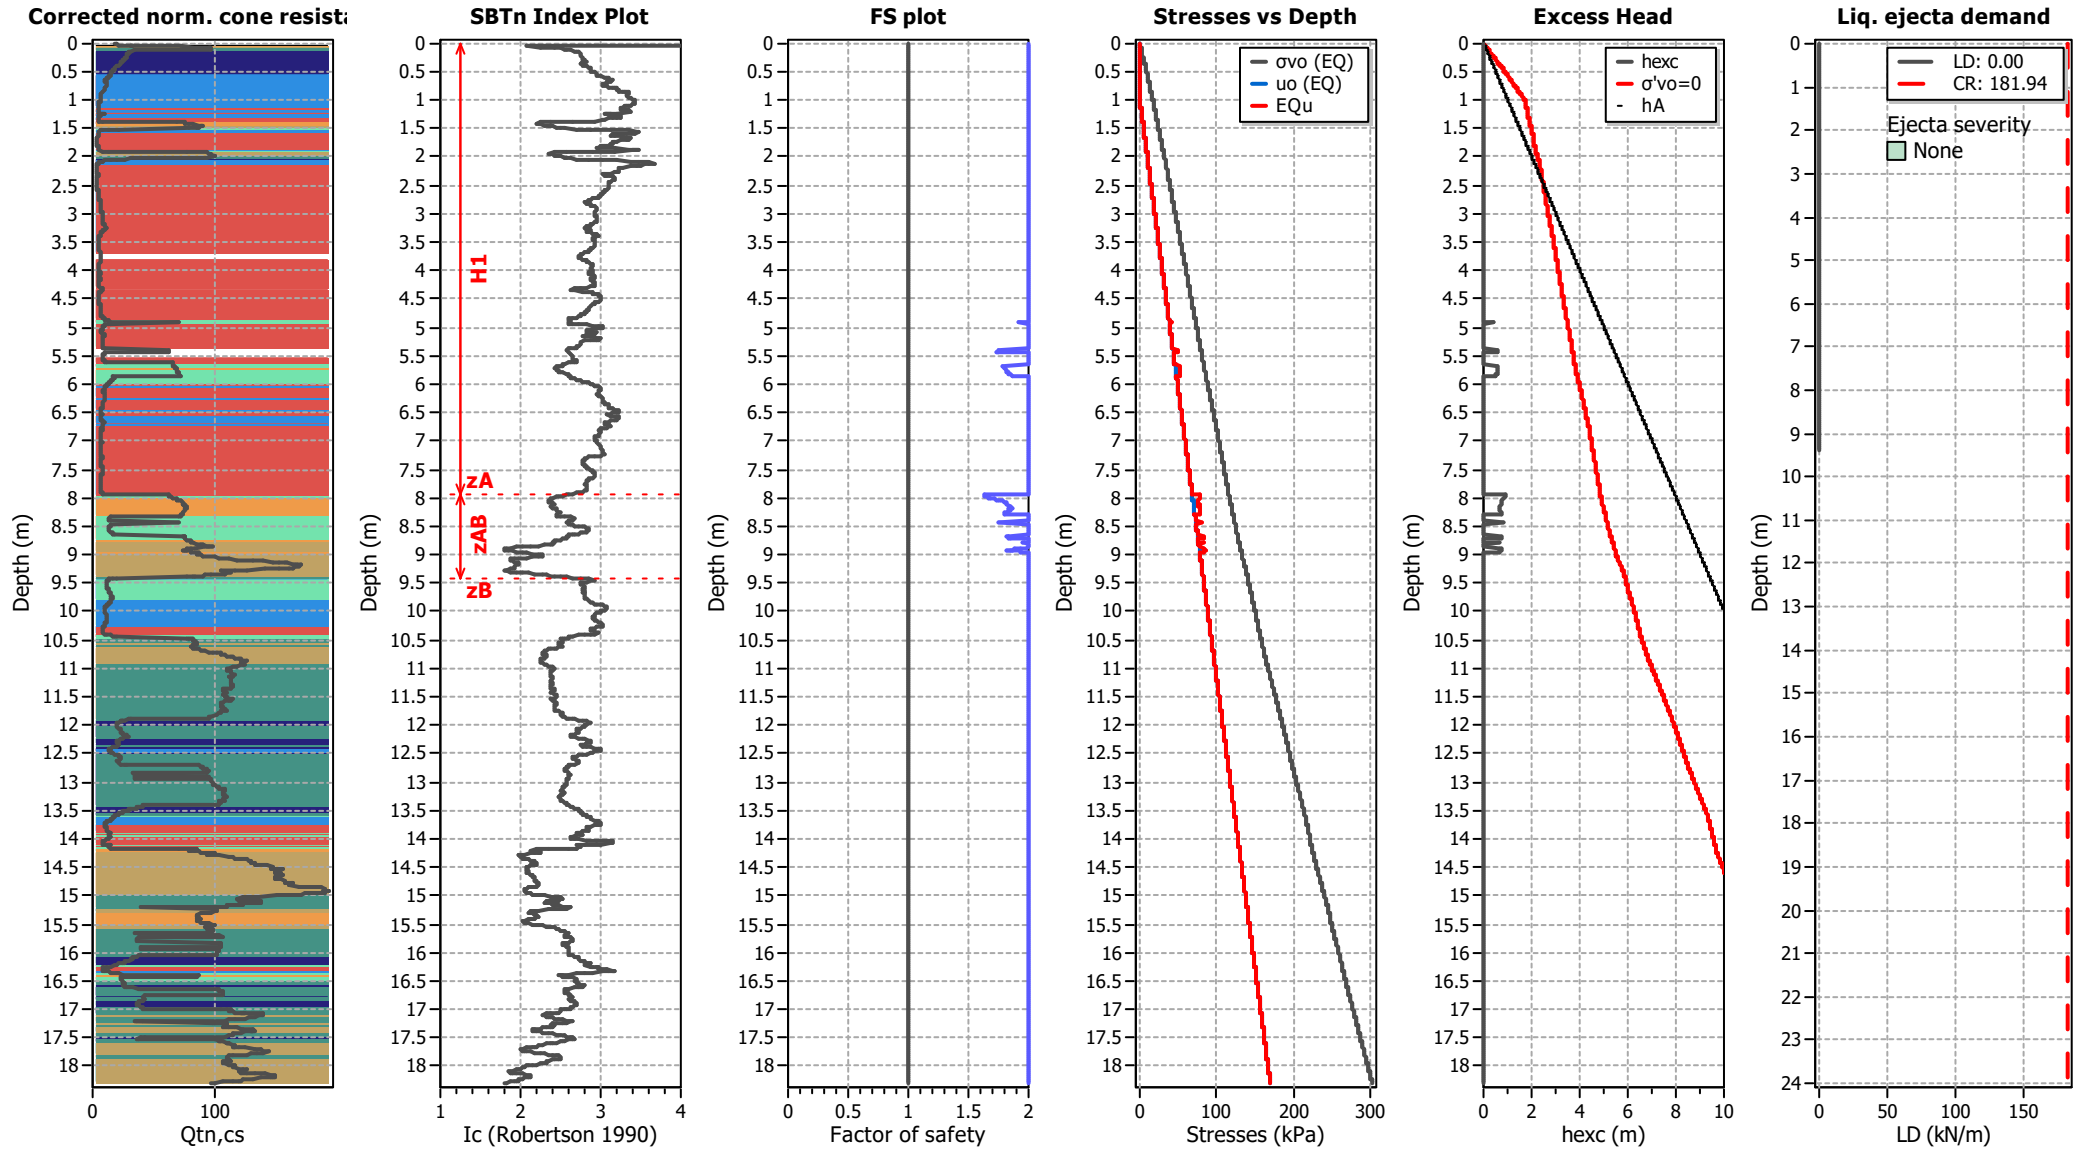

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT413

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

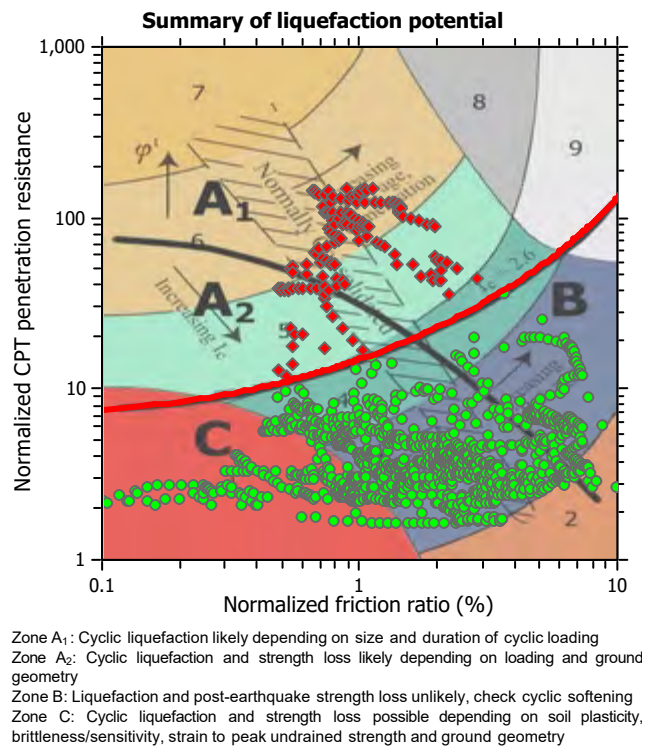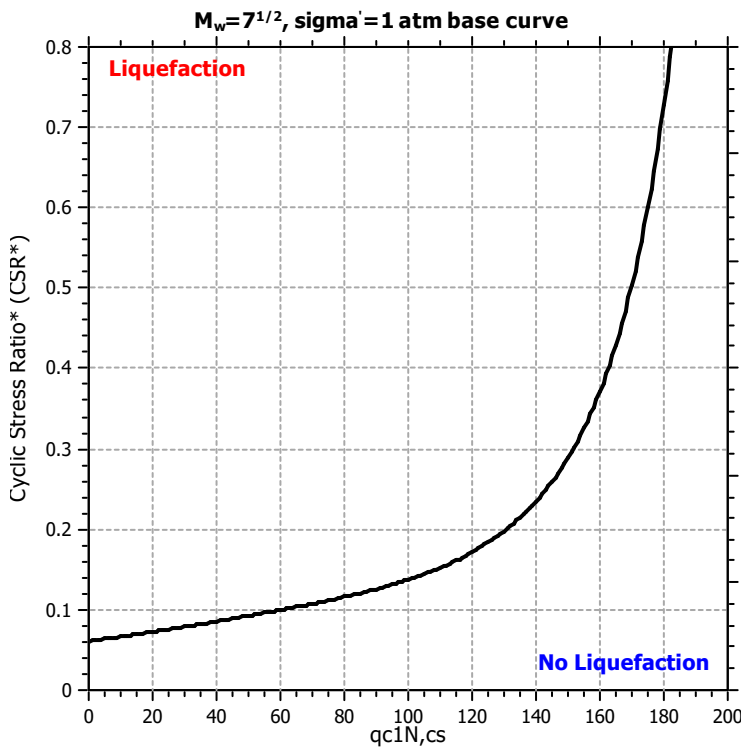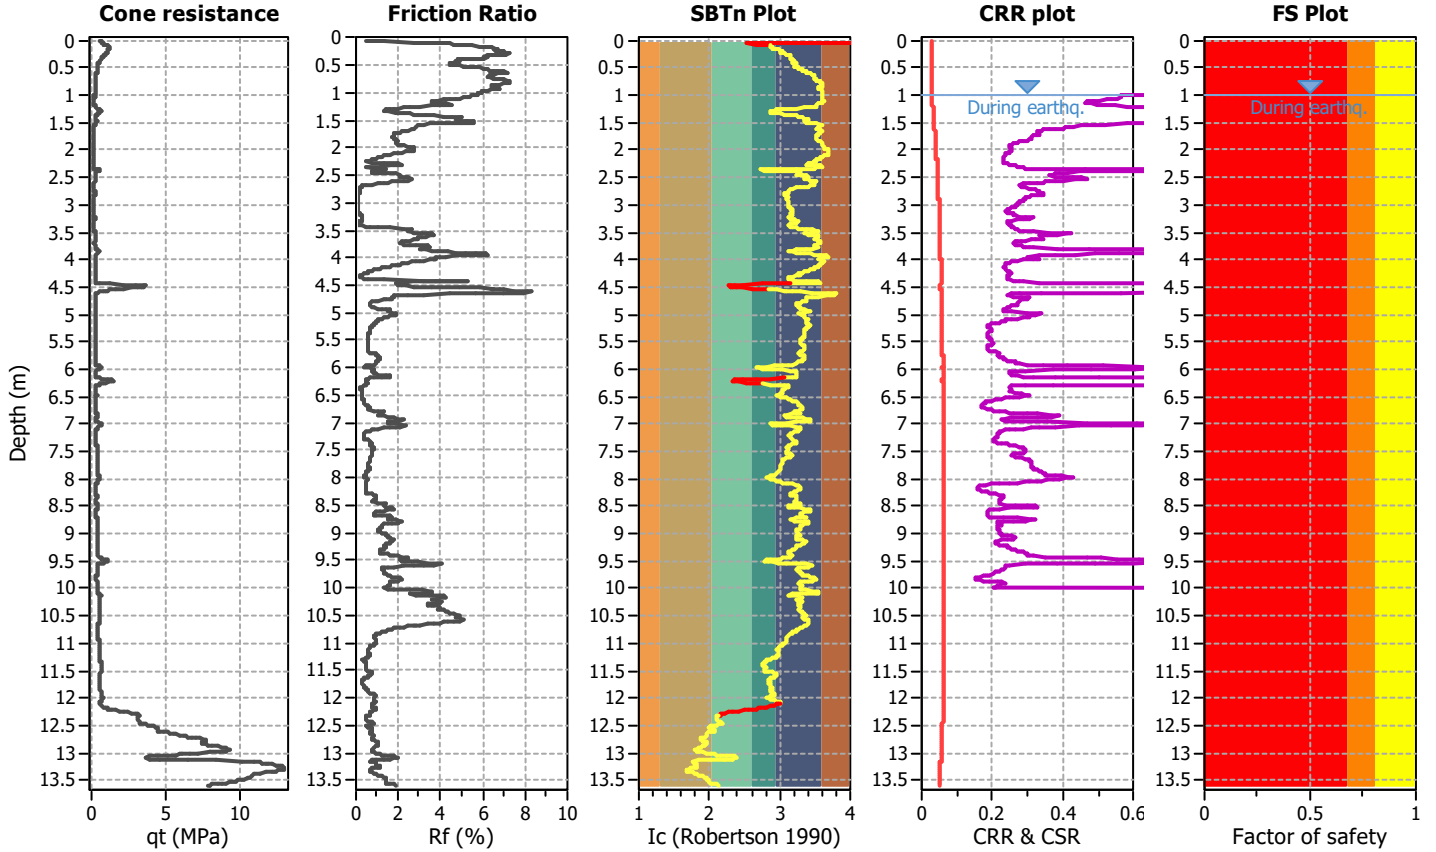

CPT basic interpretation plots

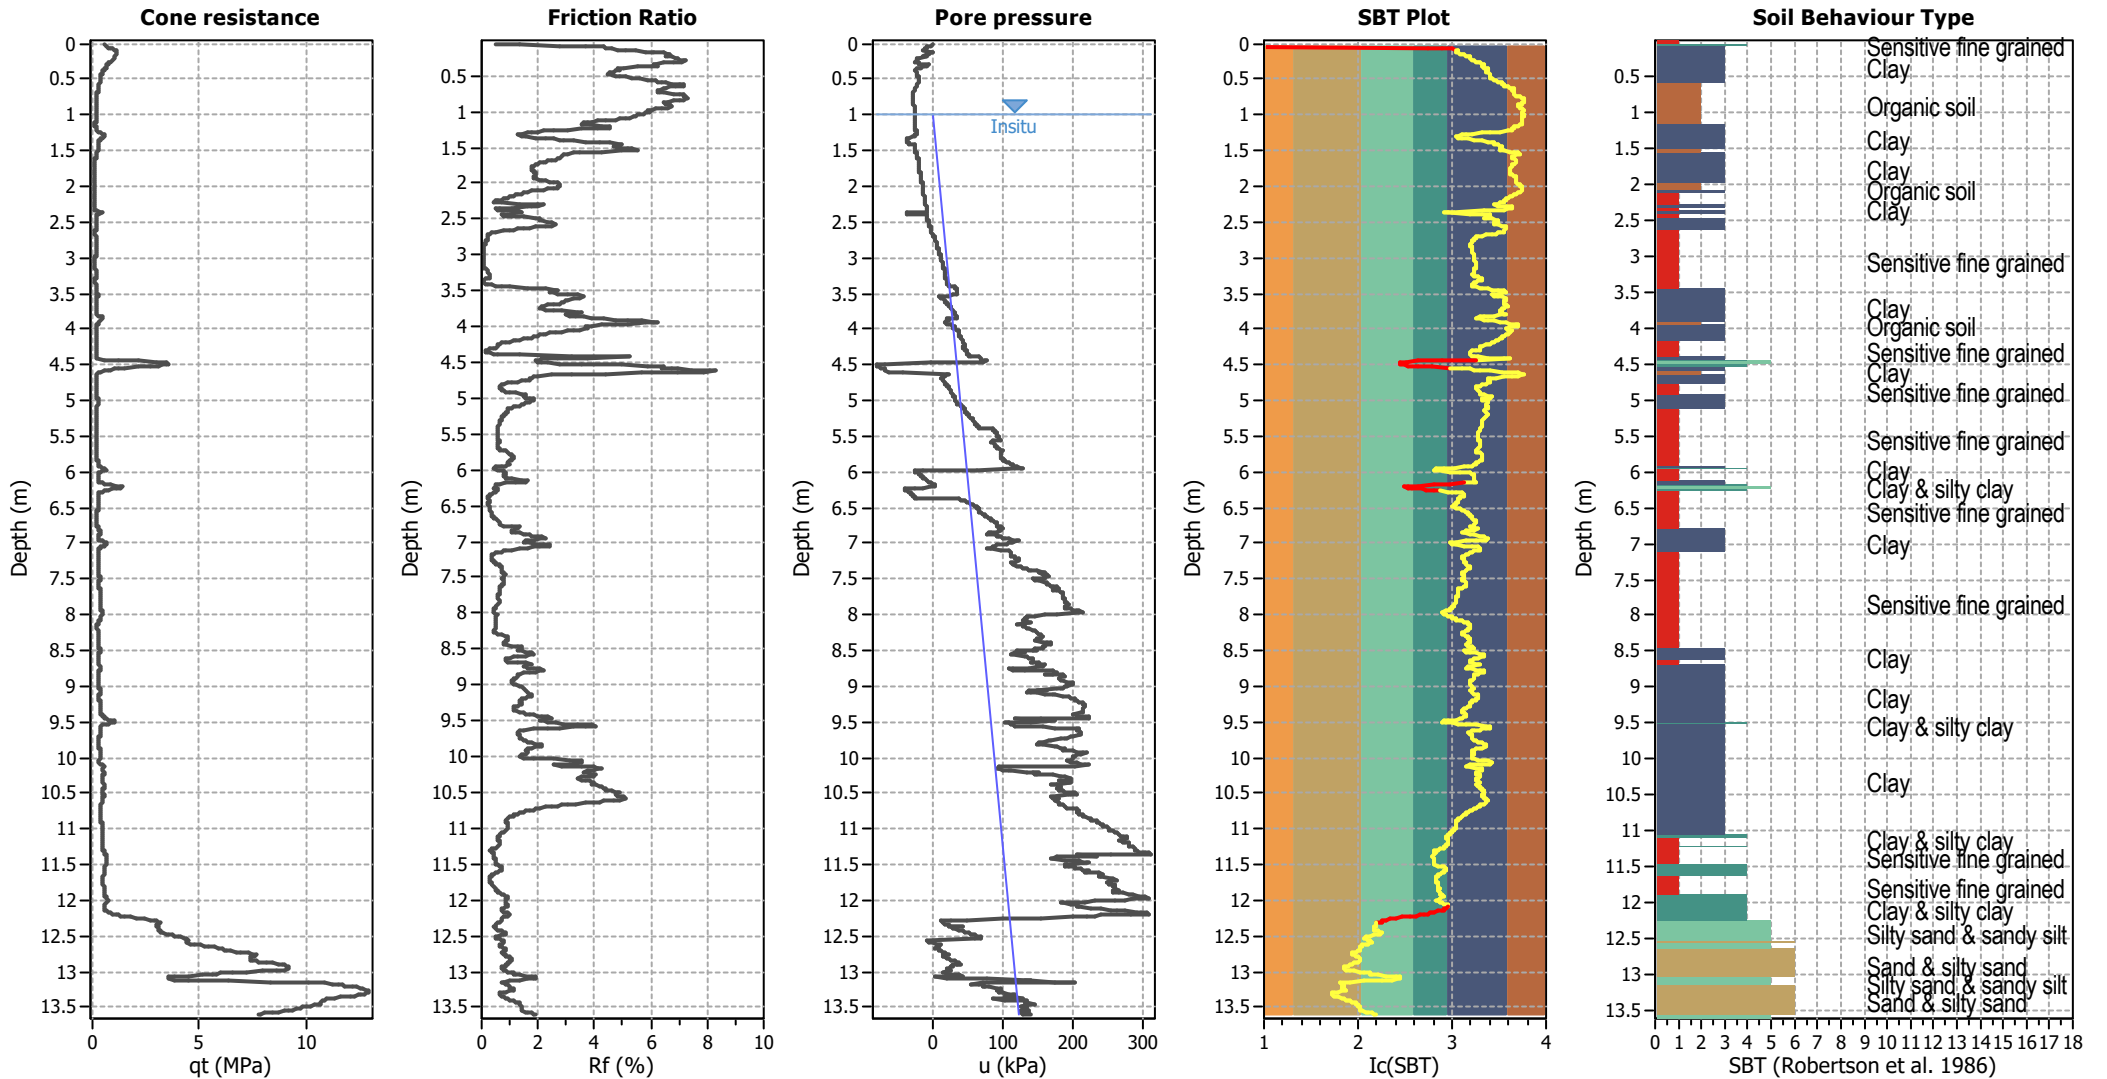


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

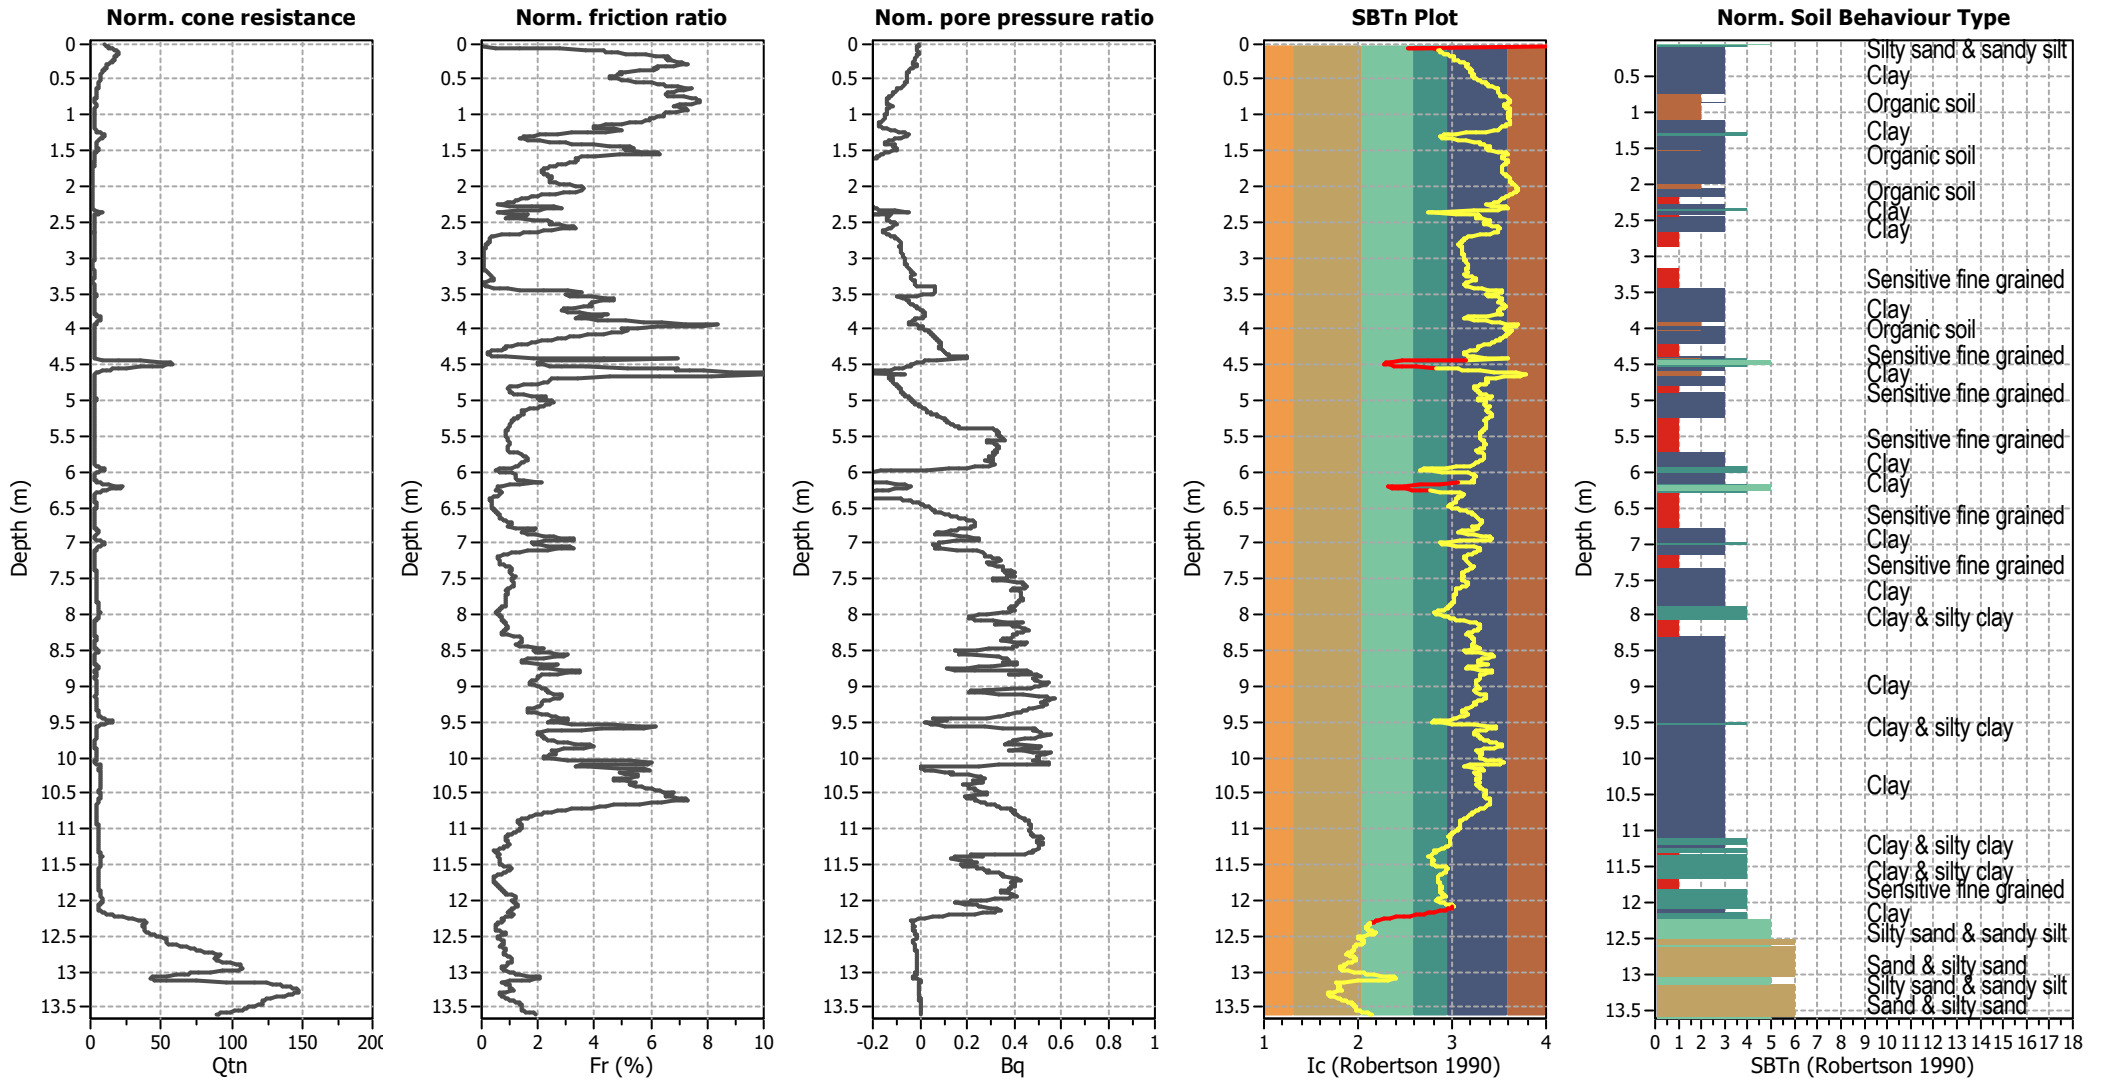


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

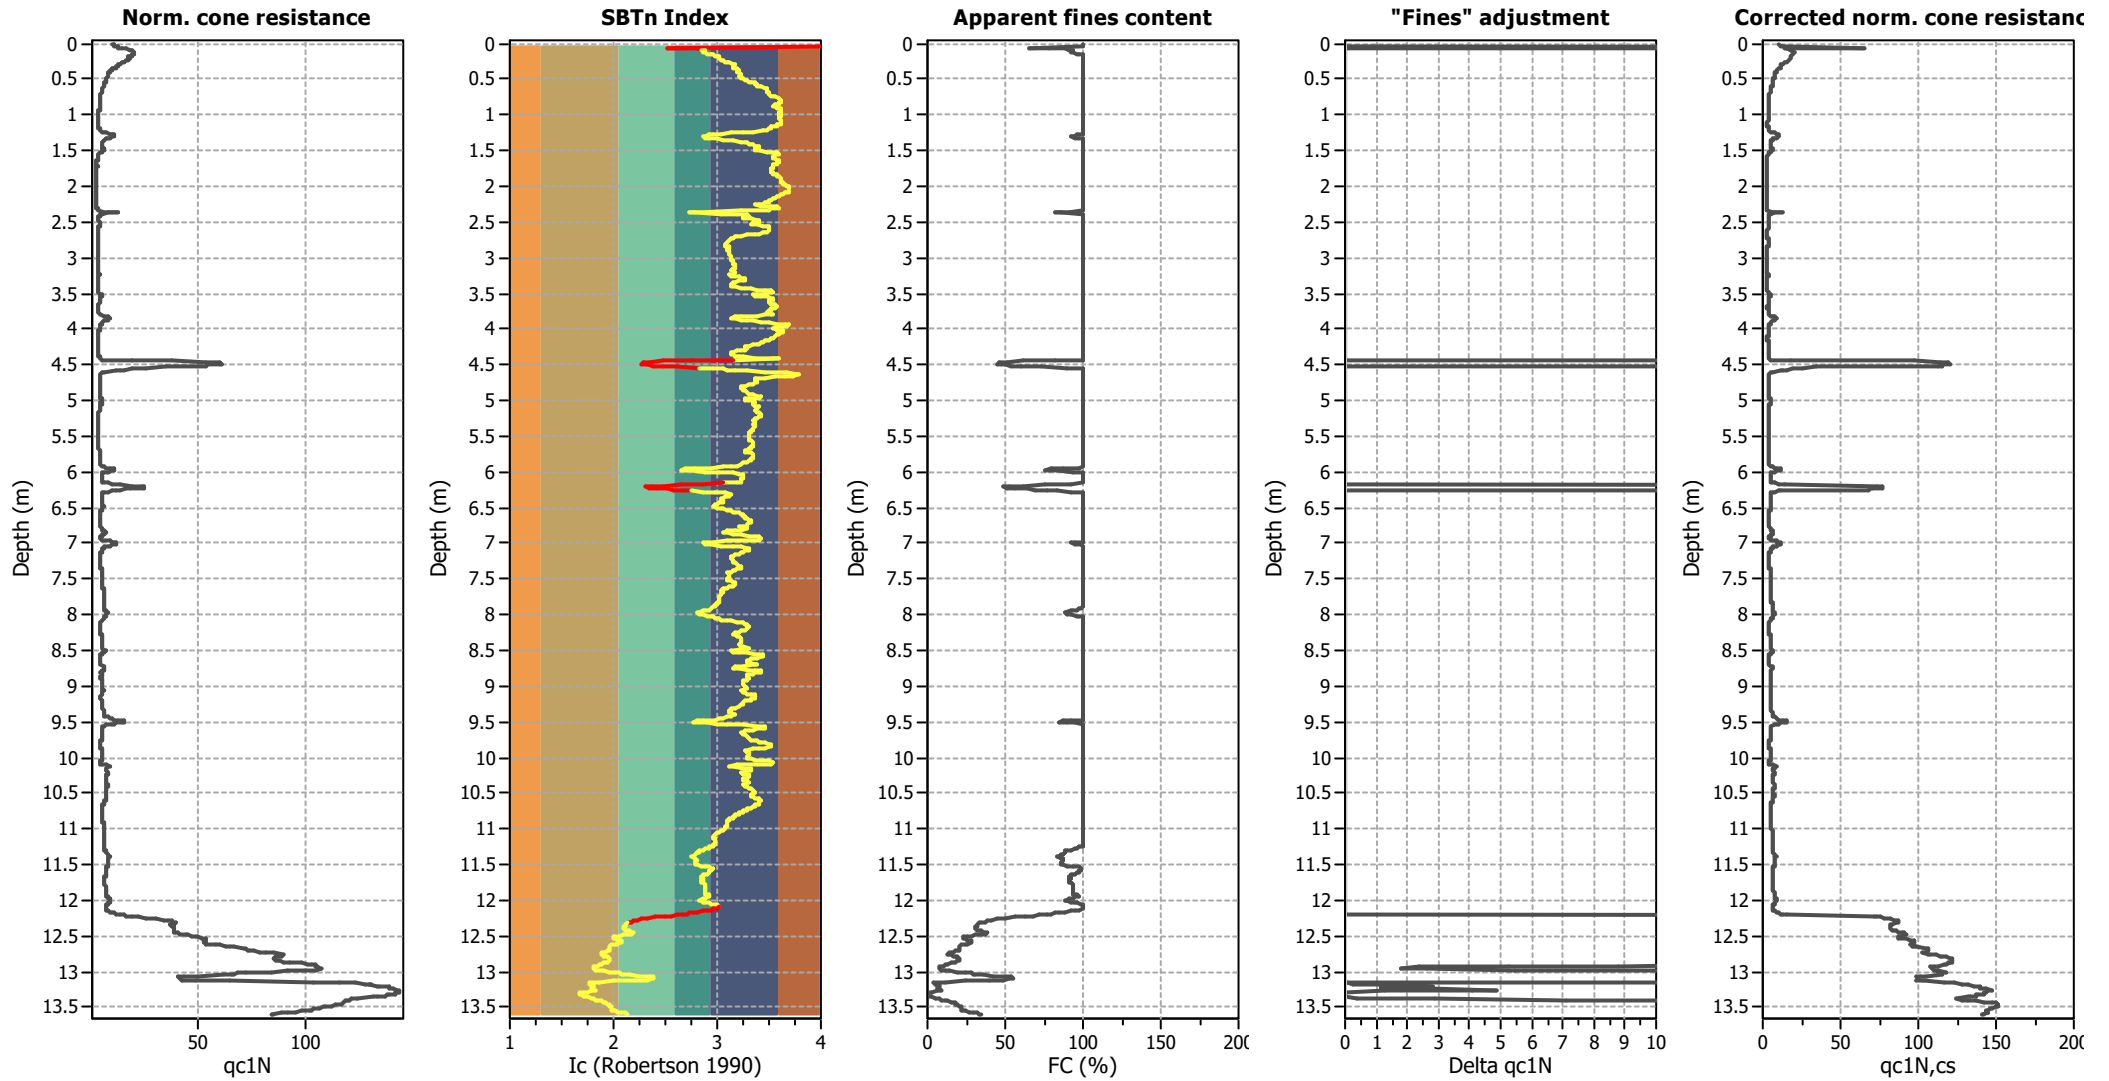

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

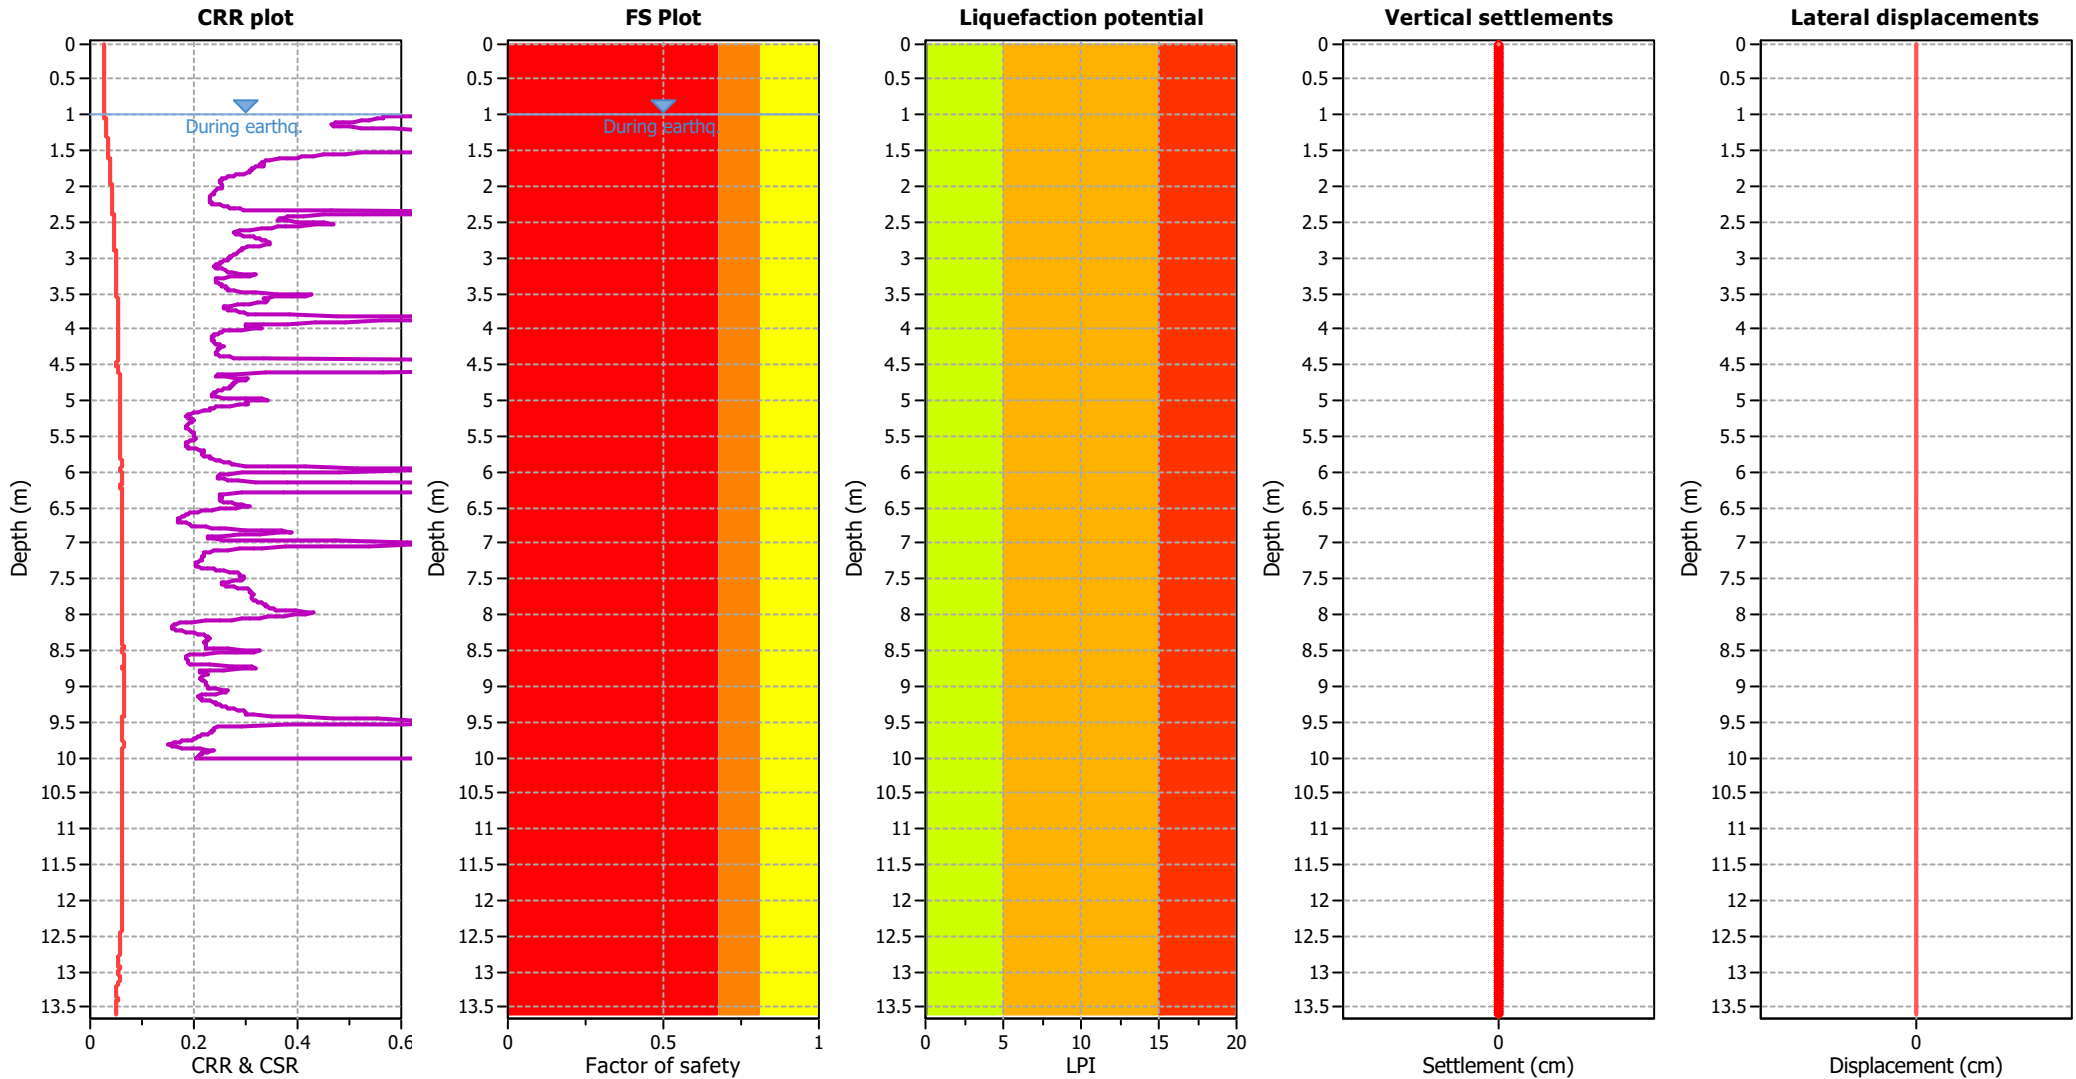

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

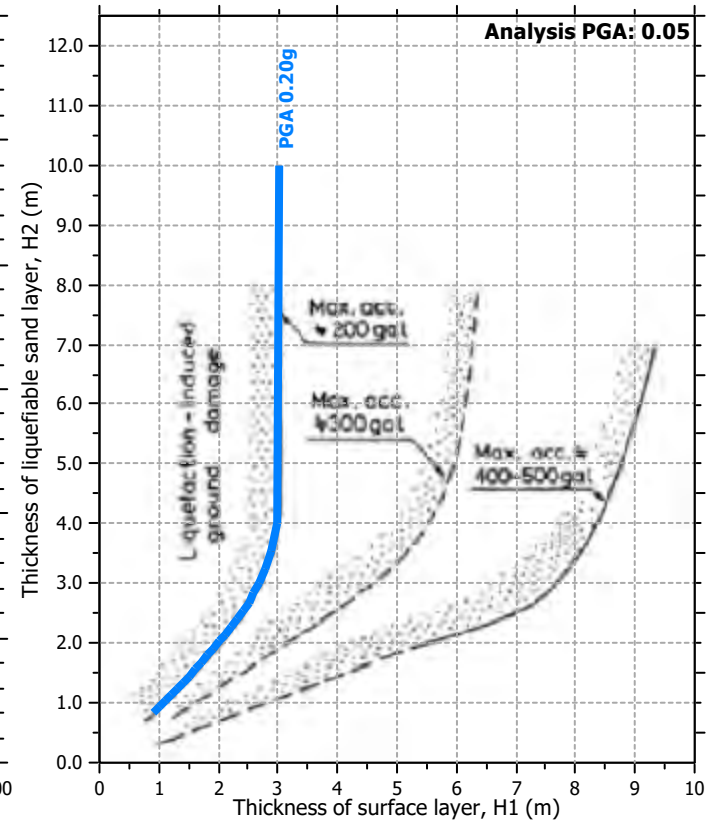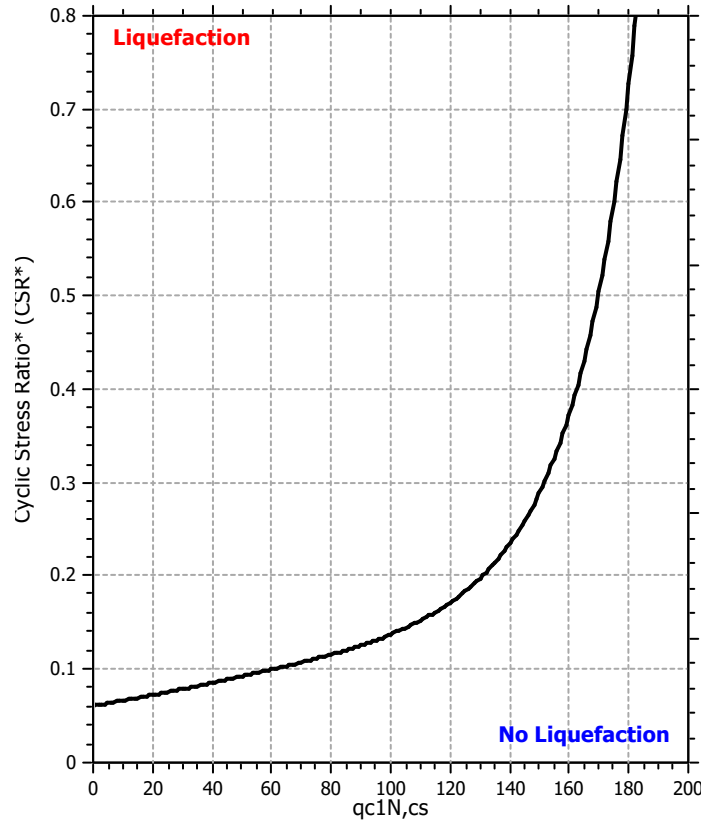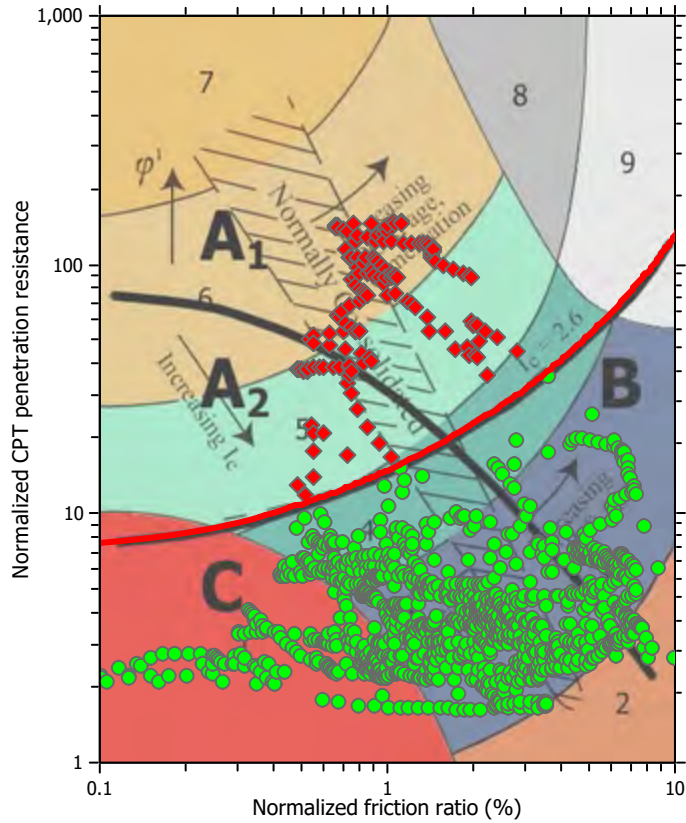

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

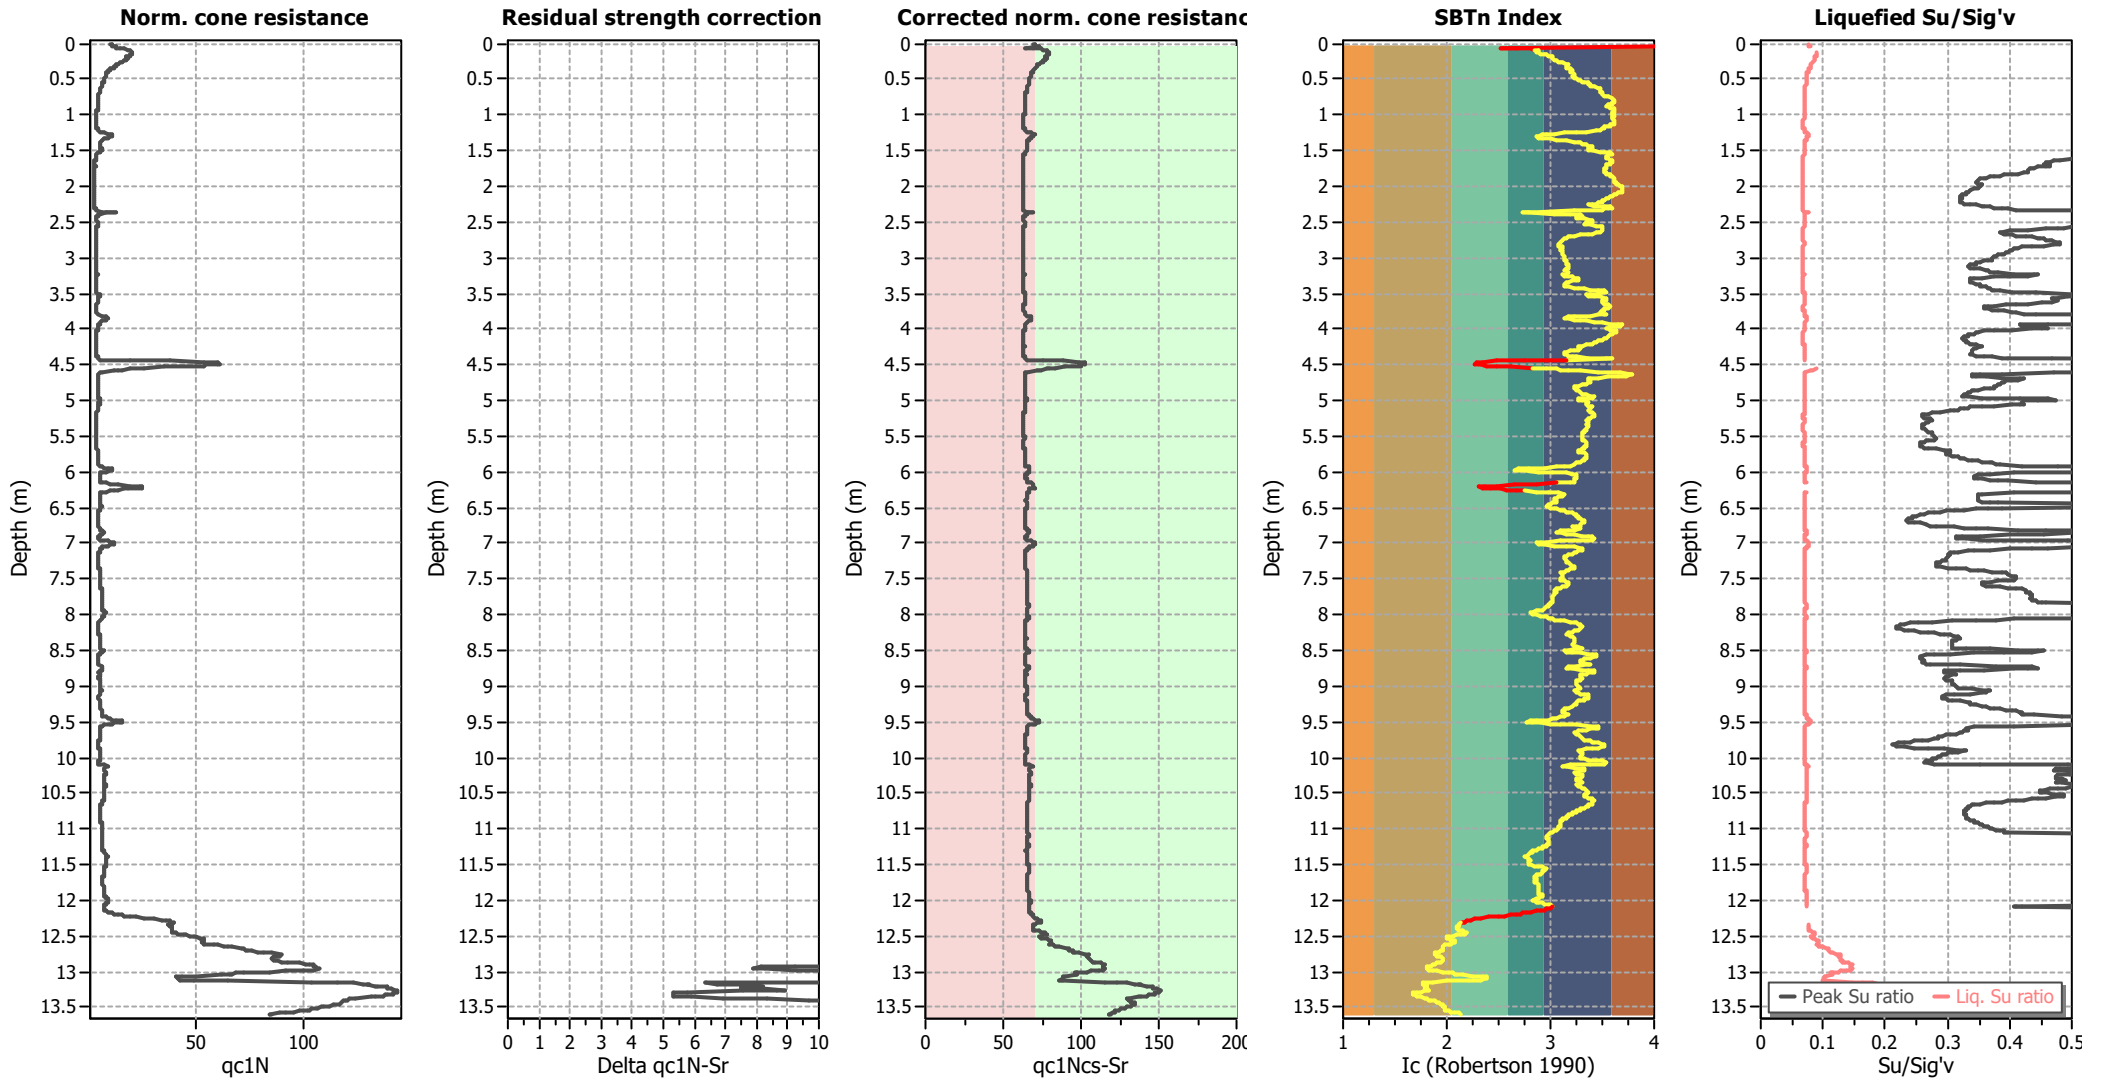

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

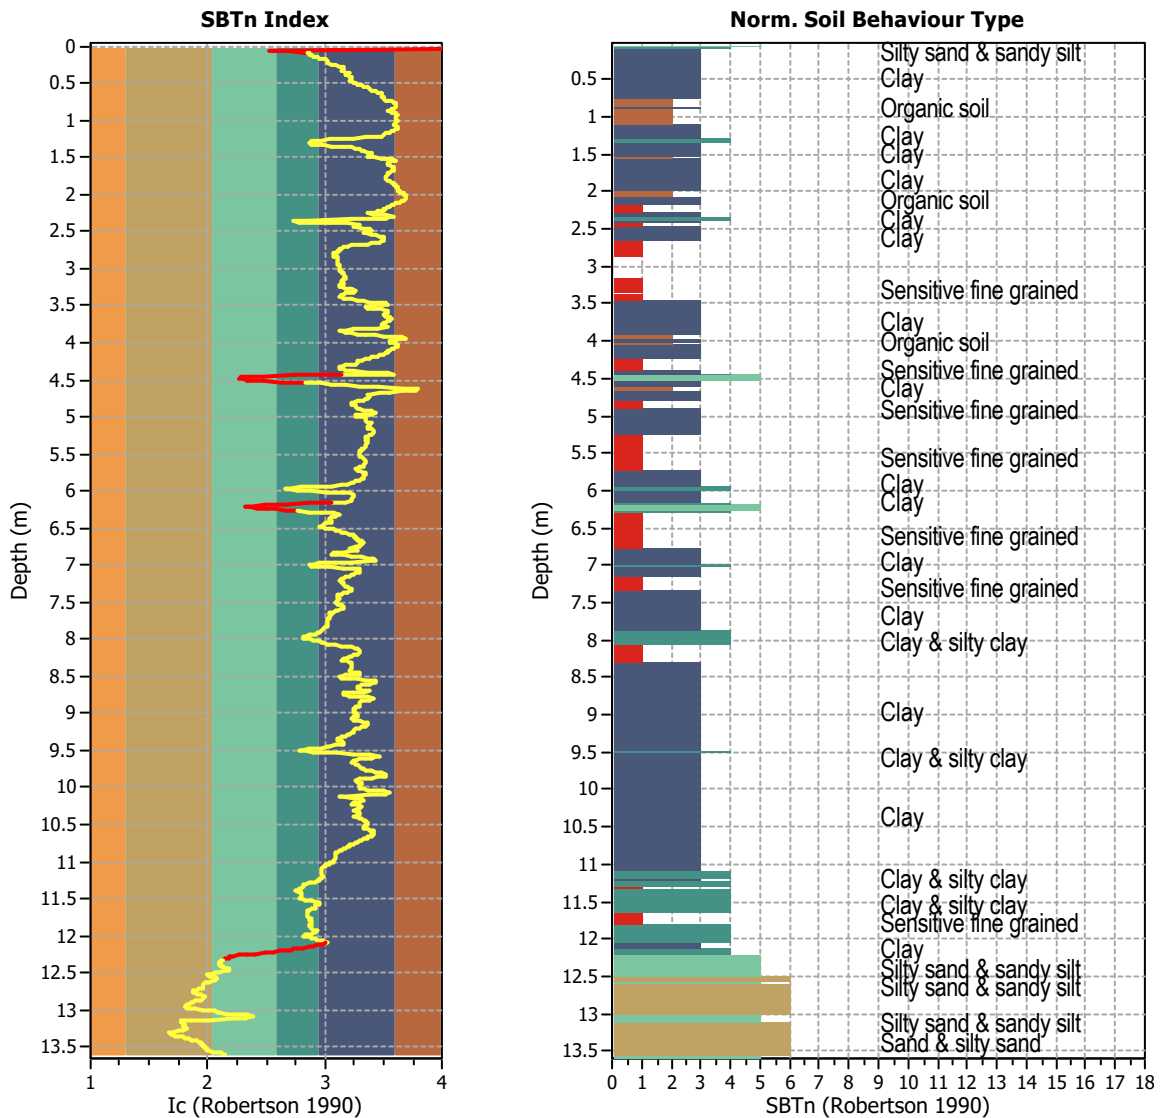


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1360
 Total points excluded: 54
 Exclusion percentage: 3.97%
 Number of layers detected: 6


Estimation of post-earthquake settlements

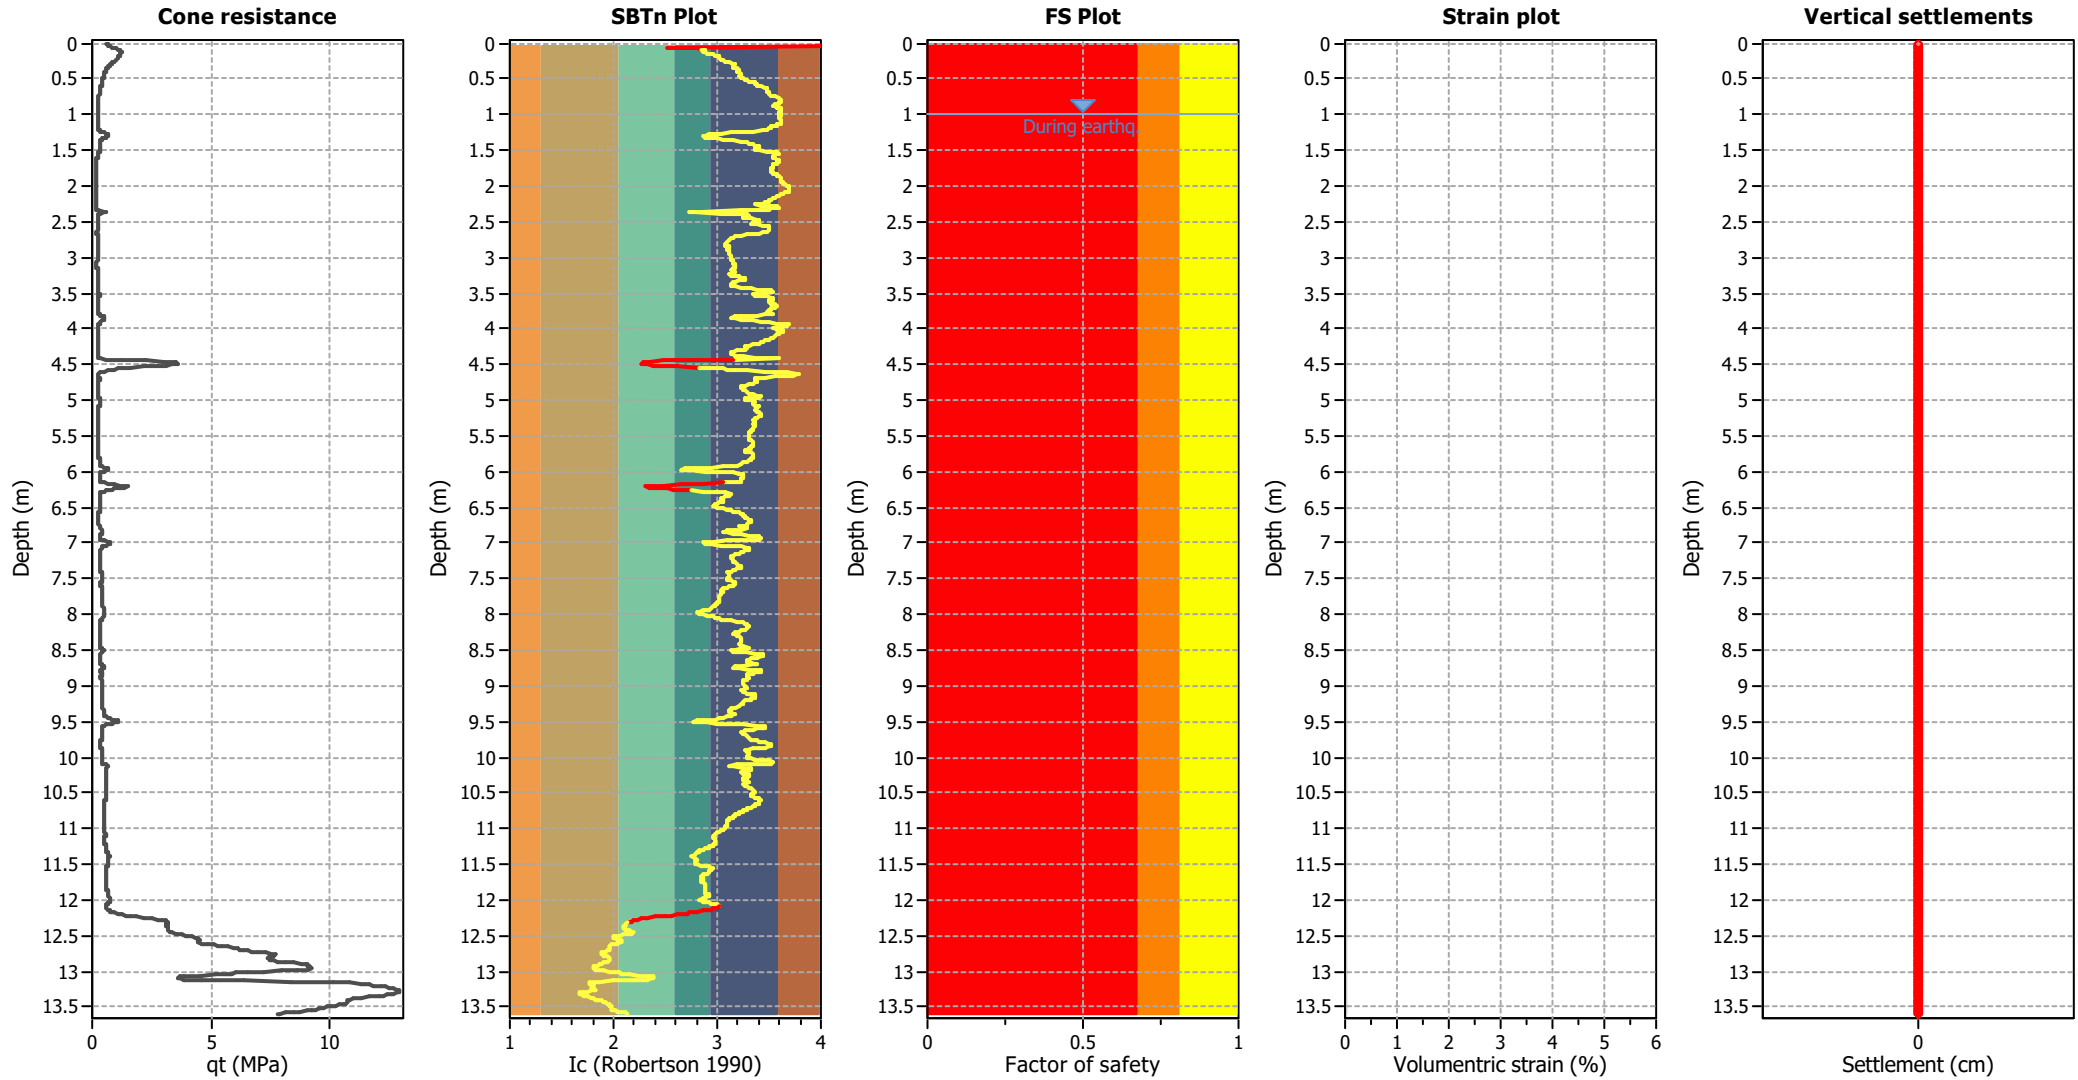

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

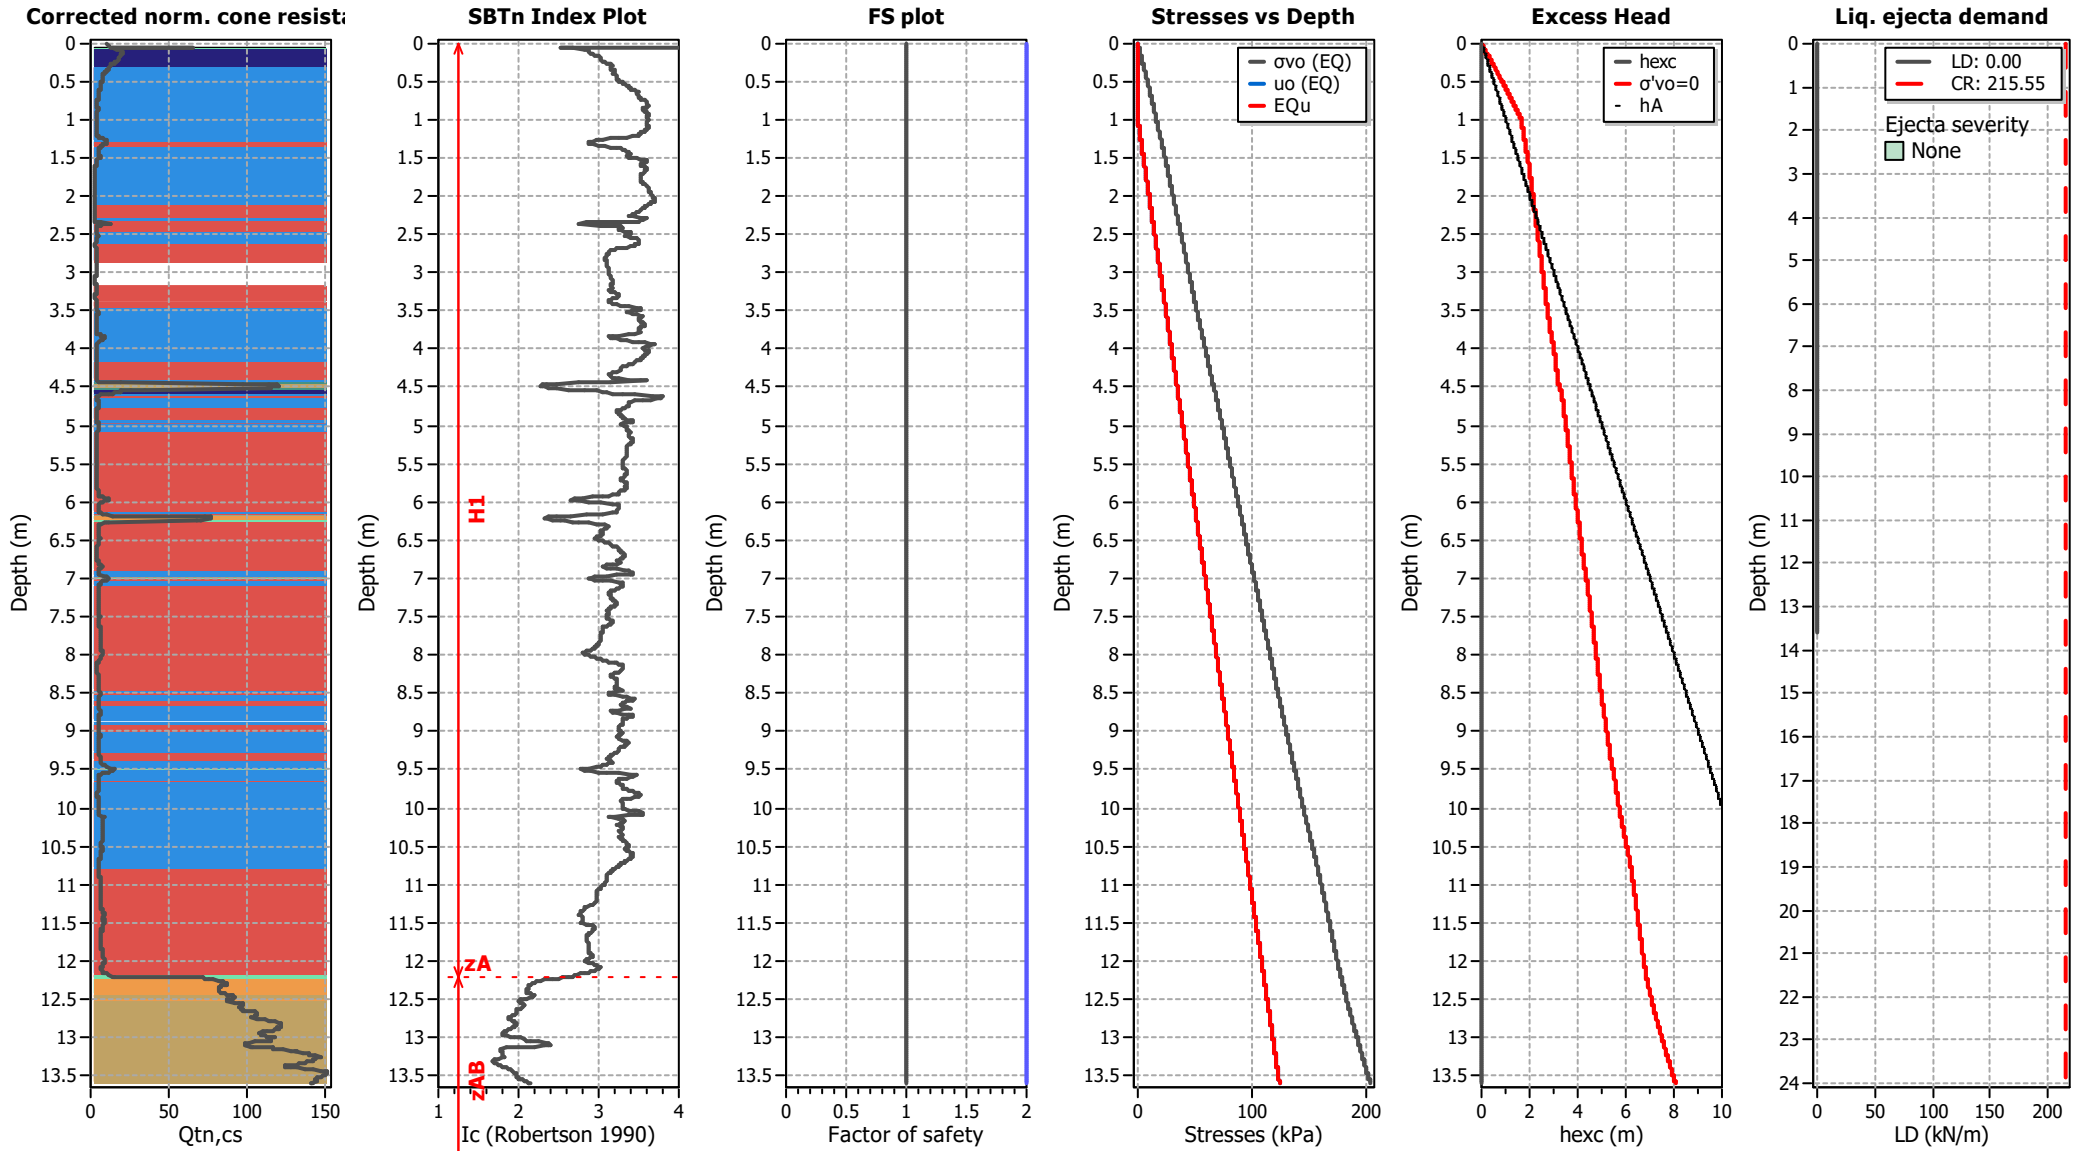

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT414

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sand & Clay
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

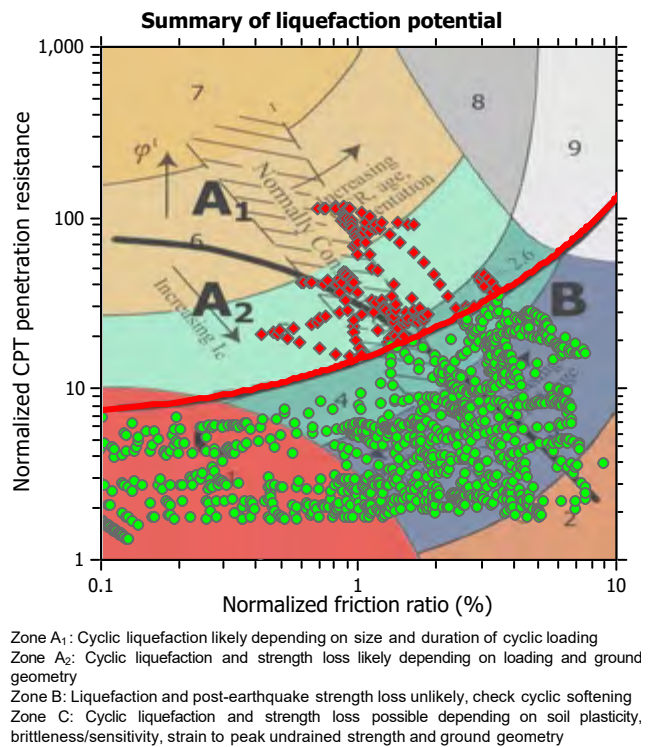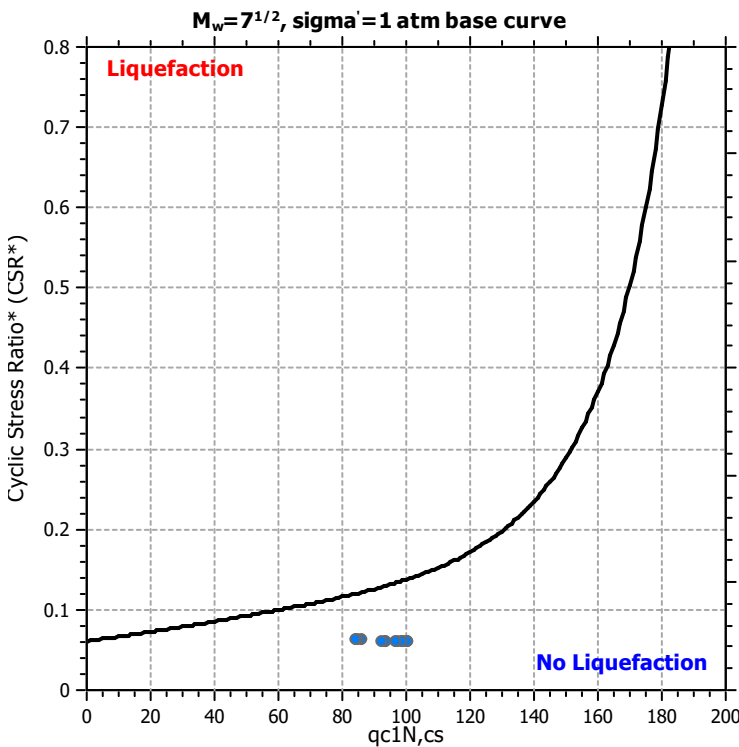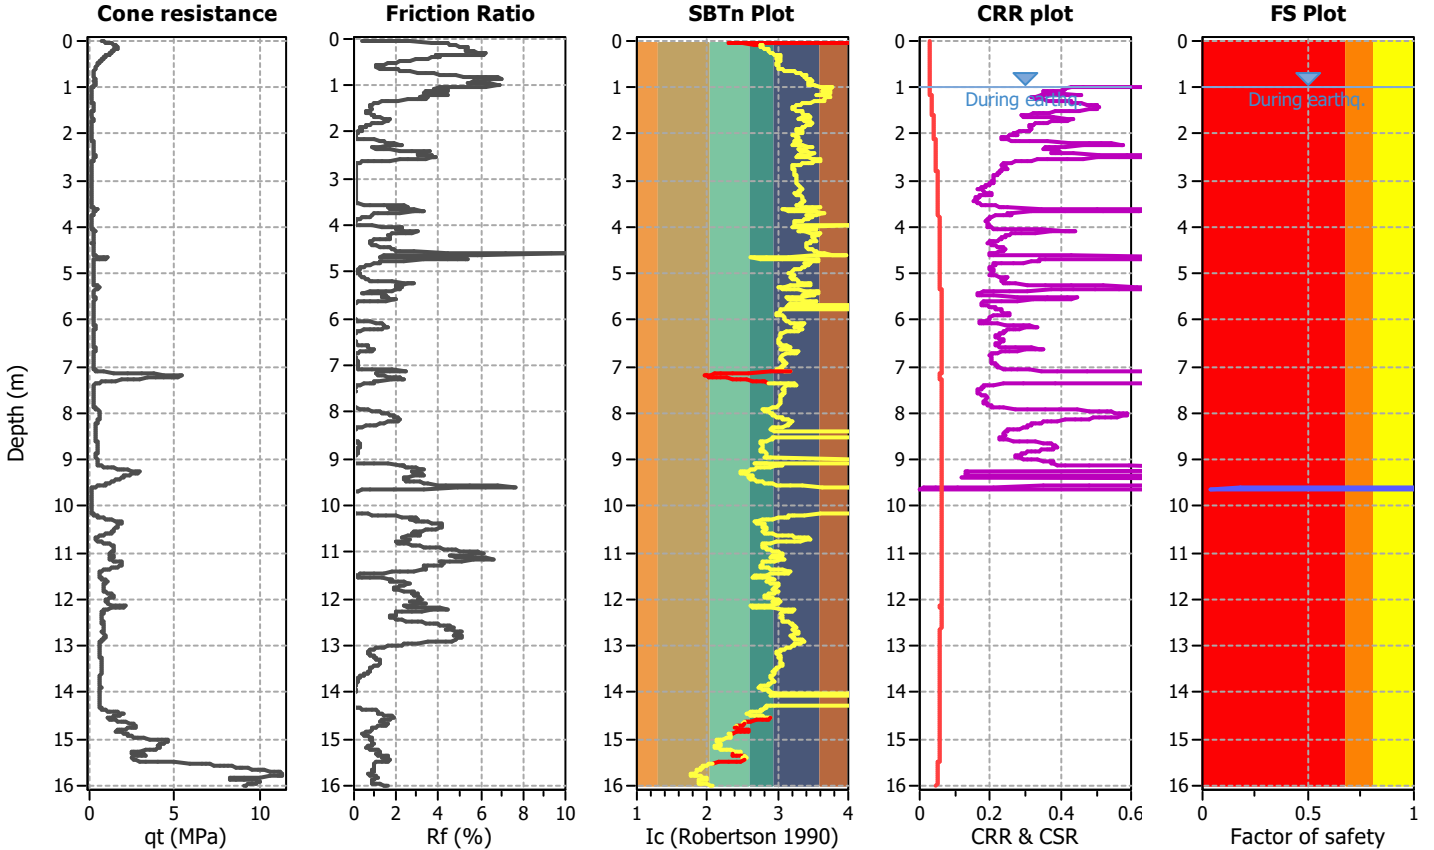

CPT basic interpretation plots

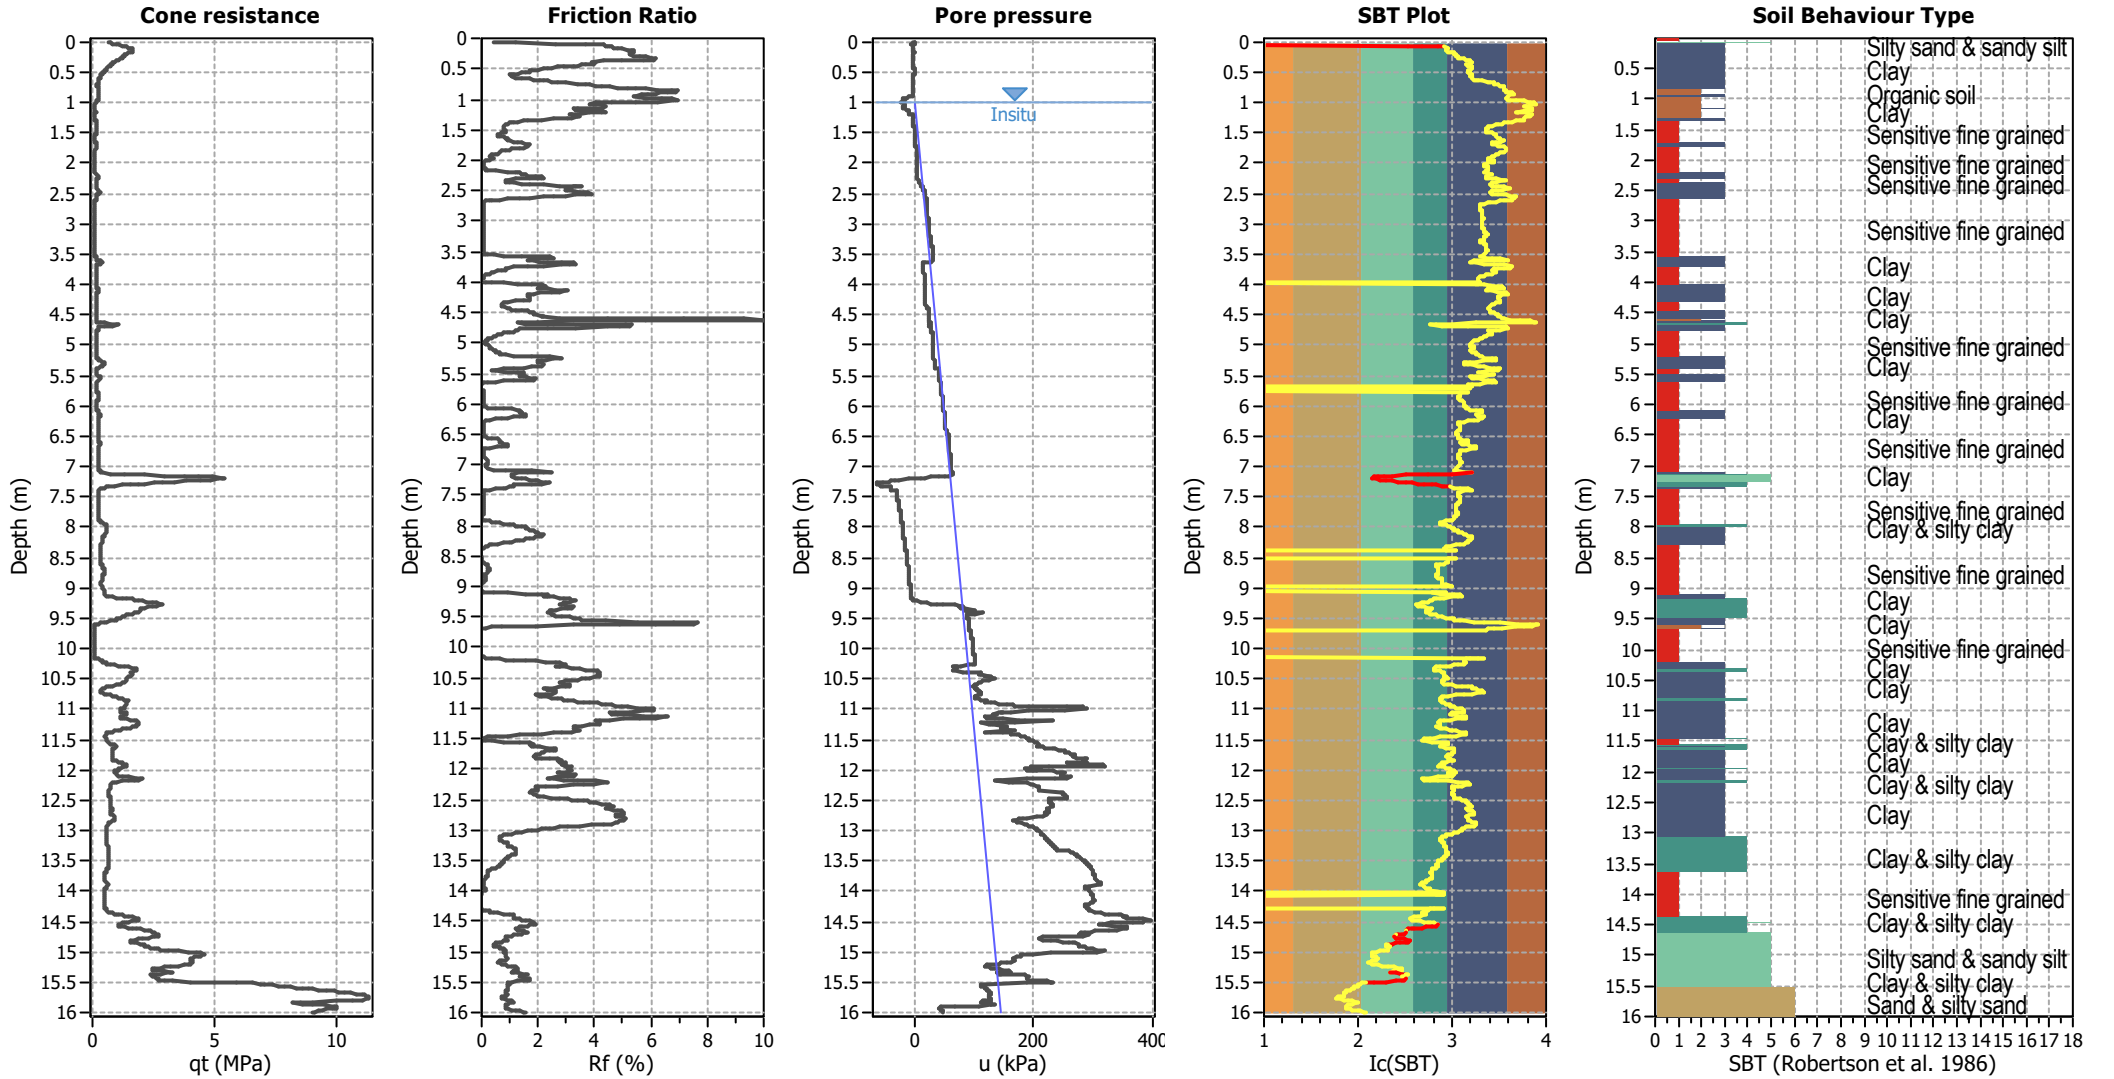


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

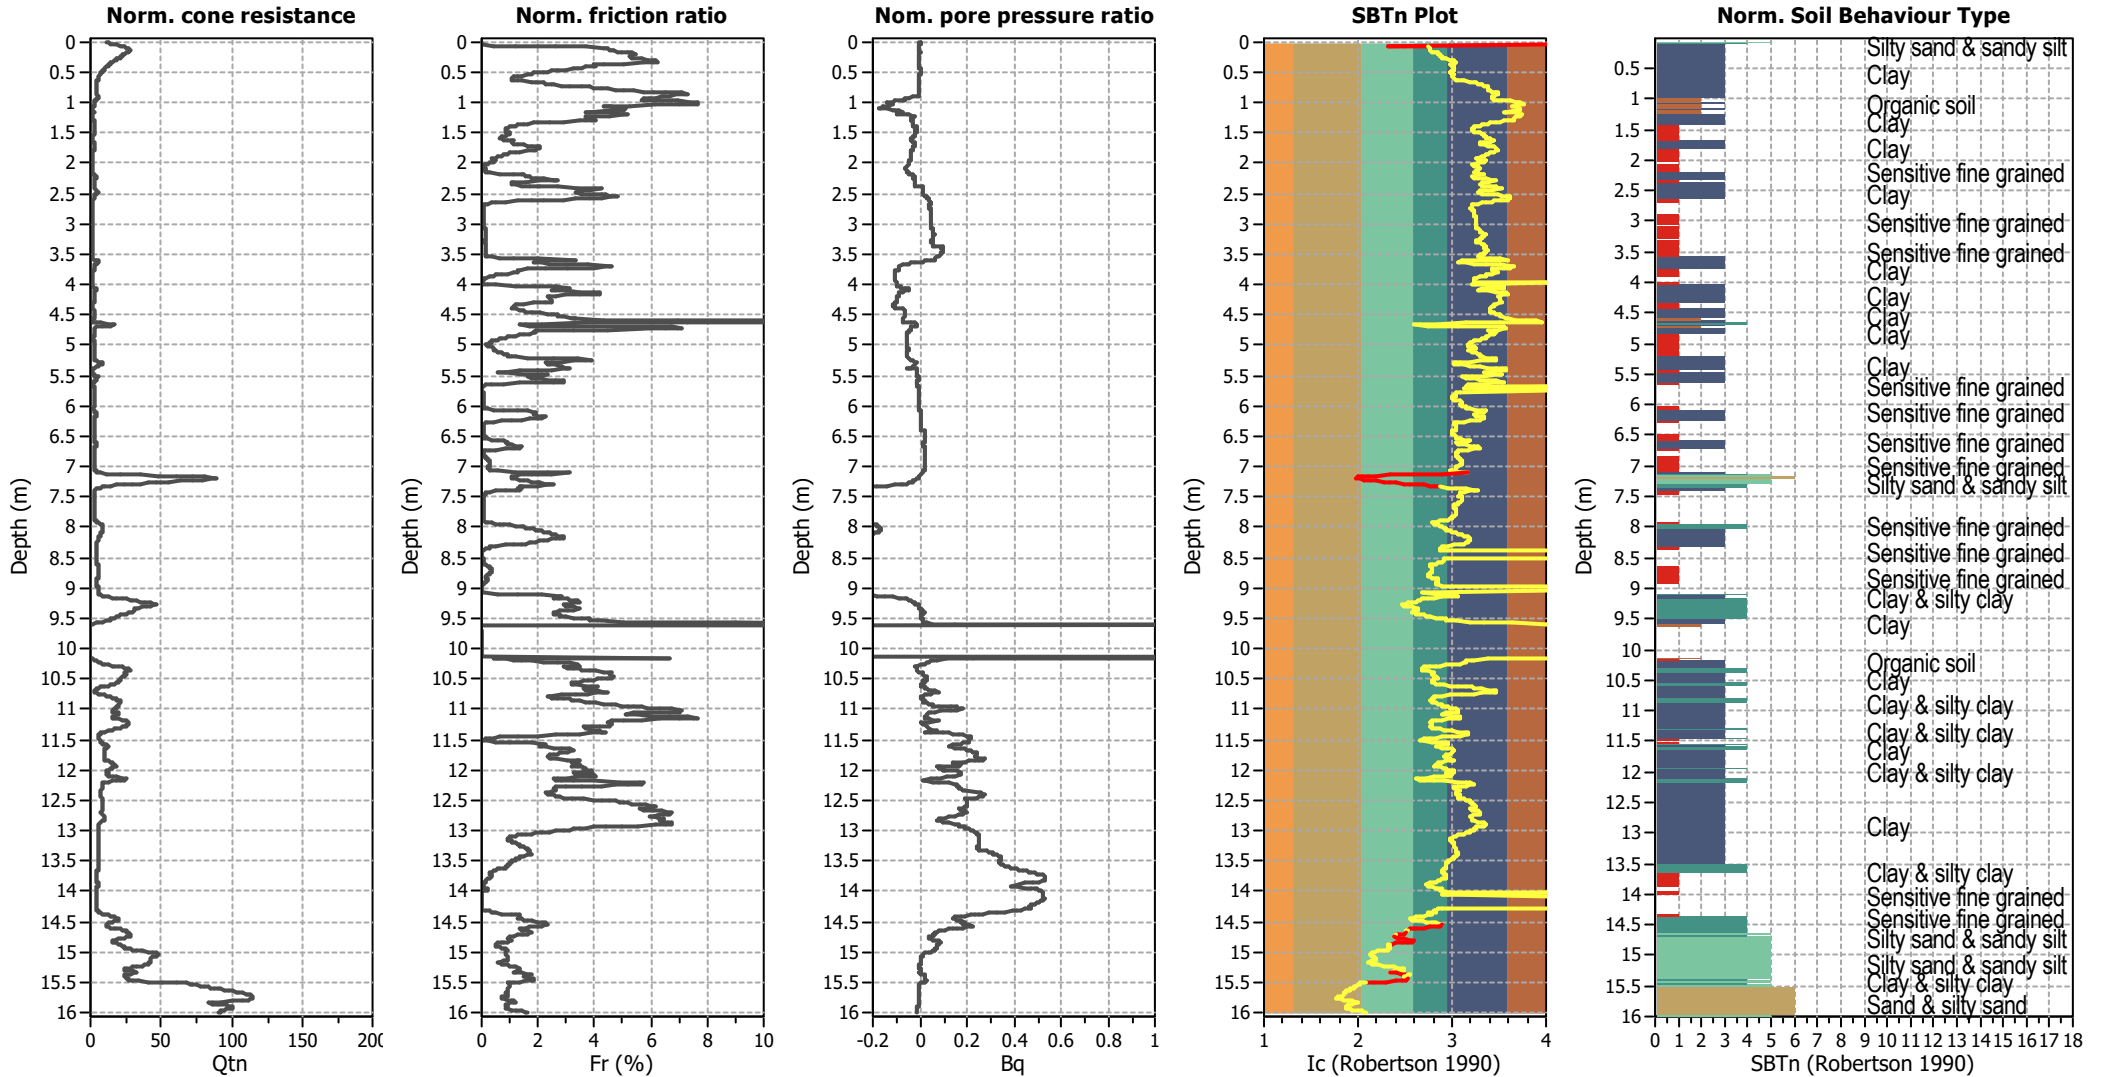


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

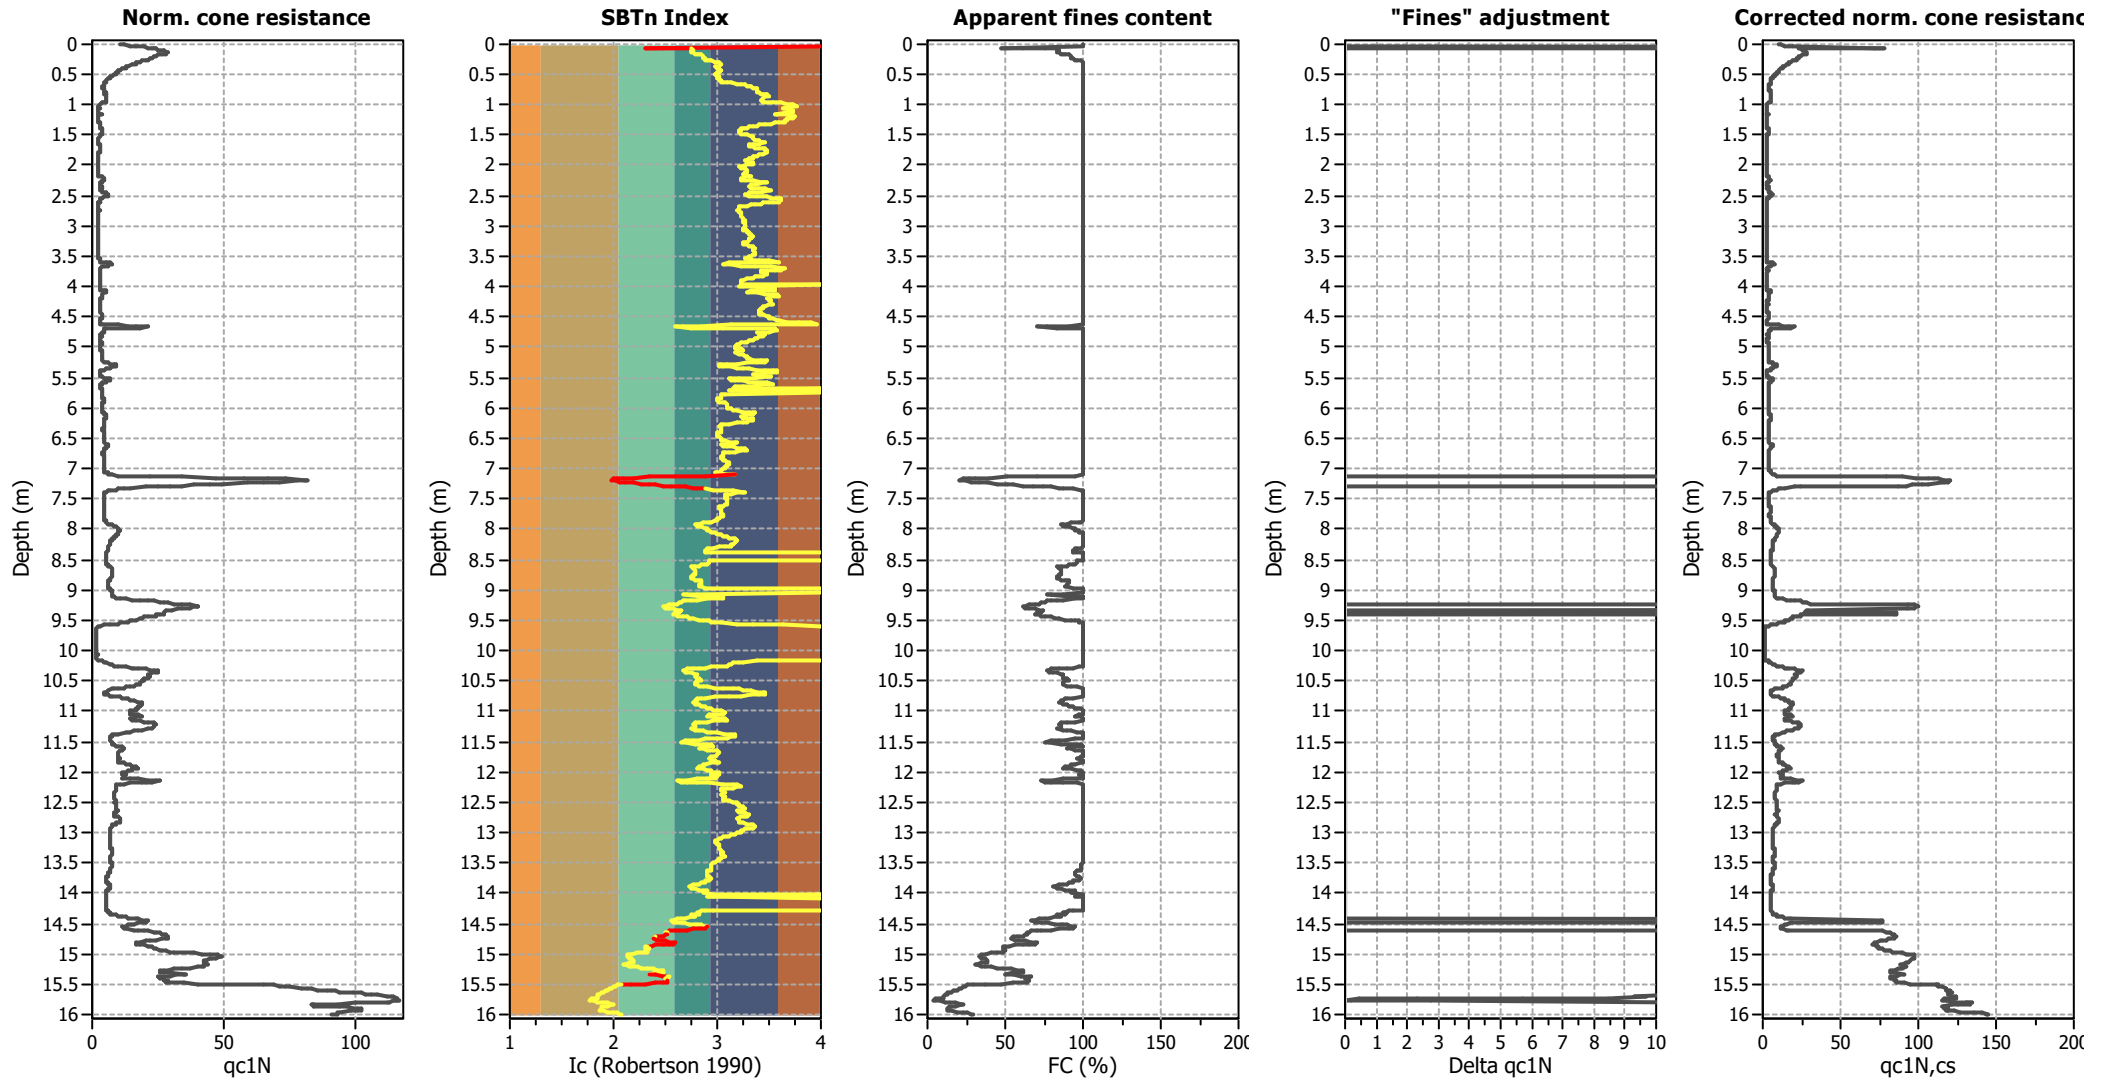

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

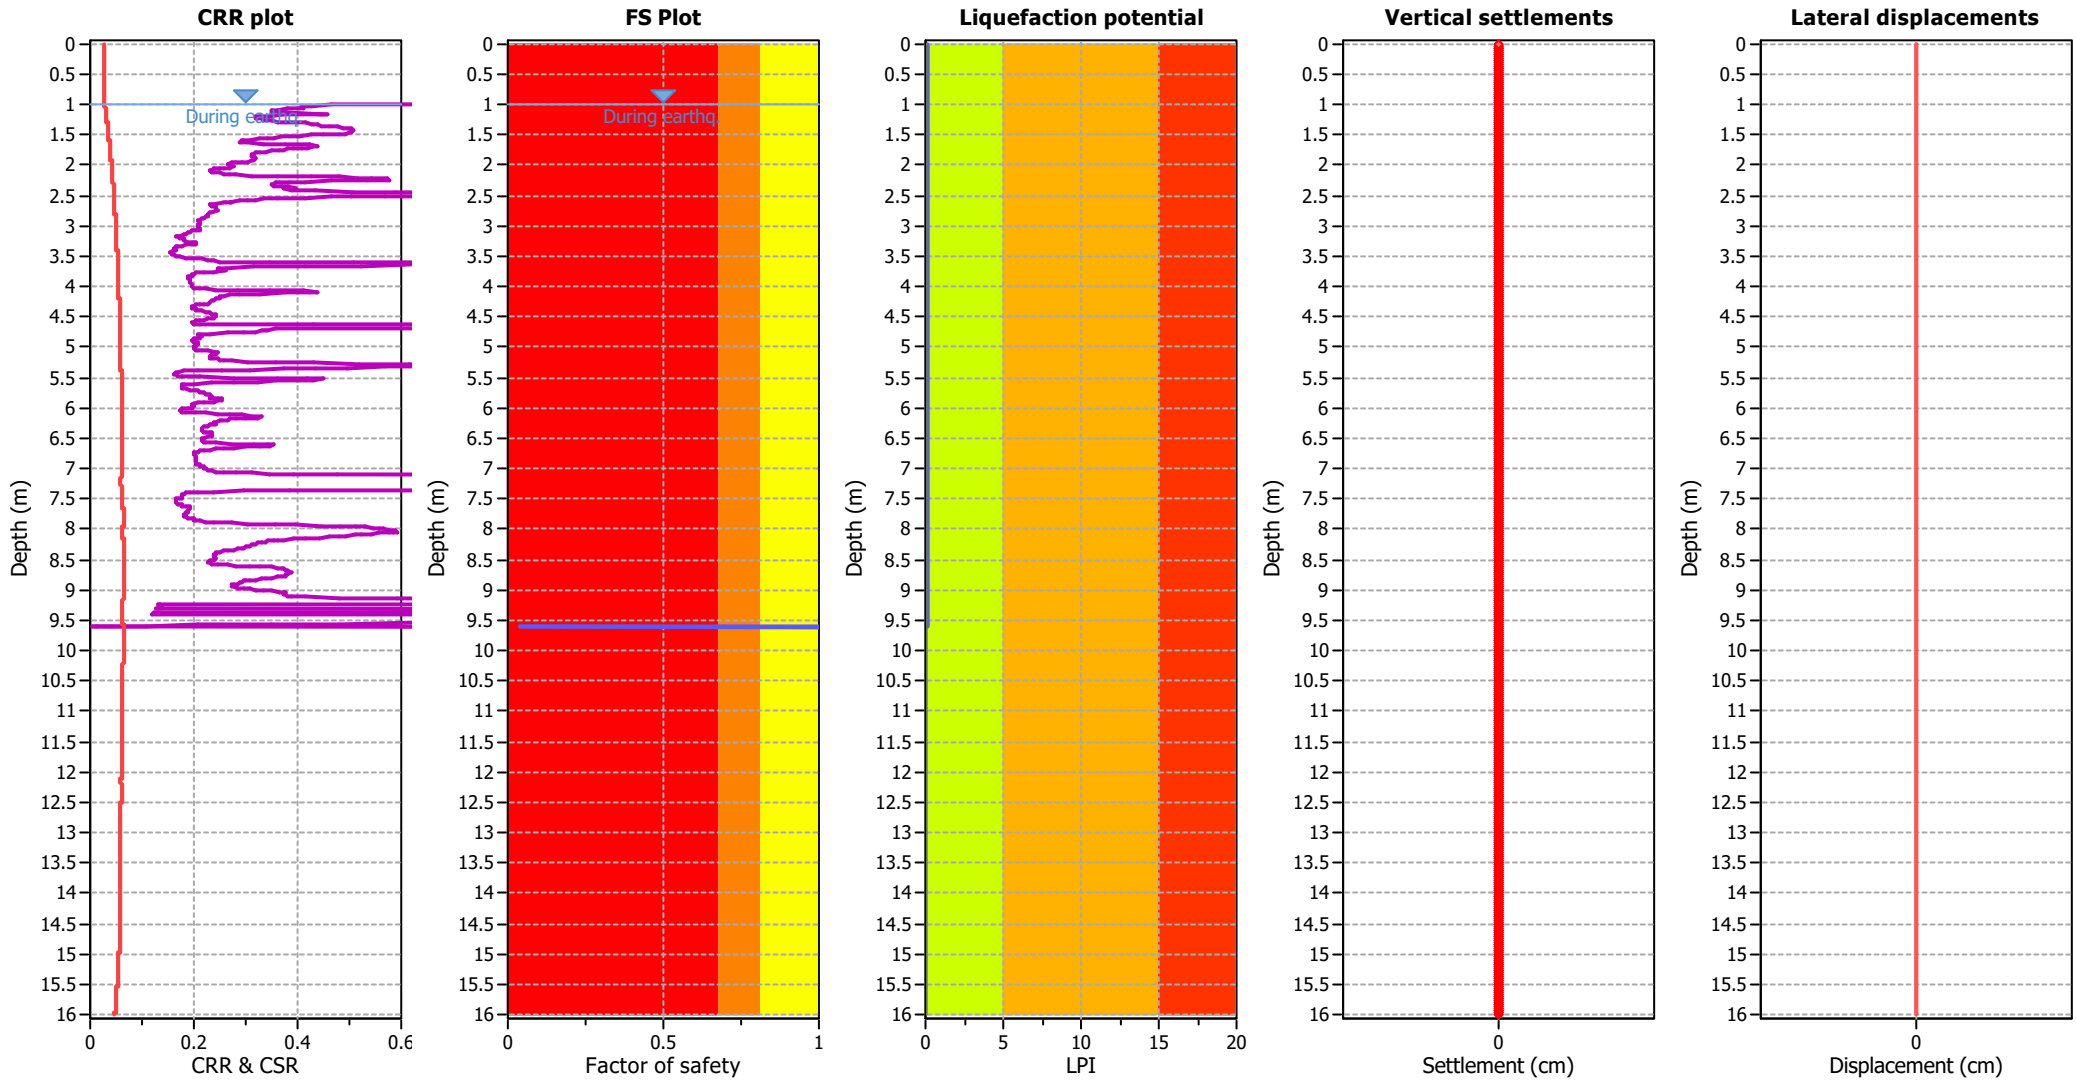

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

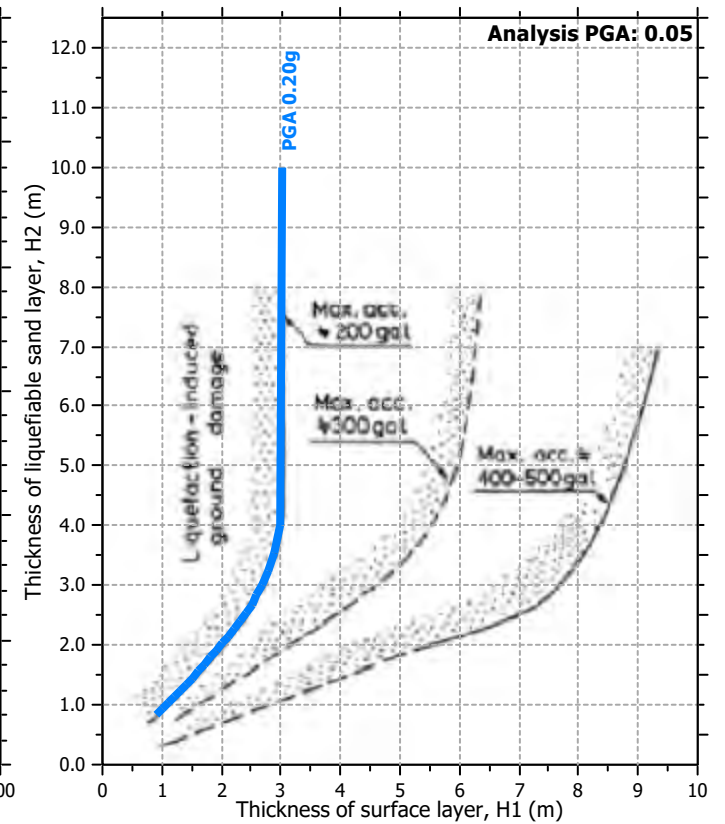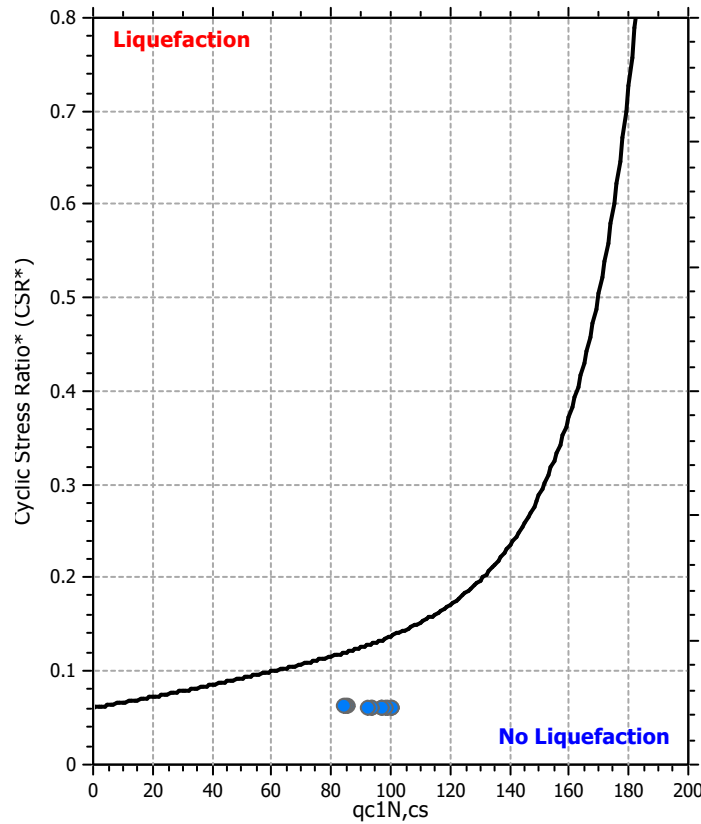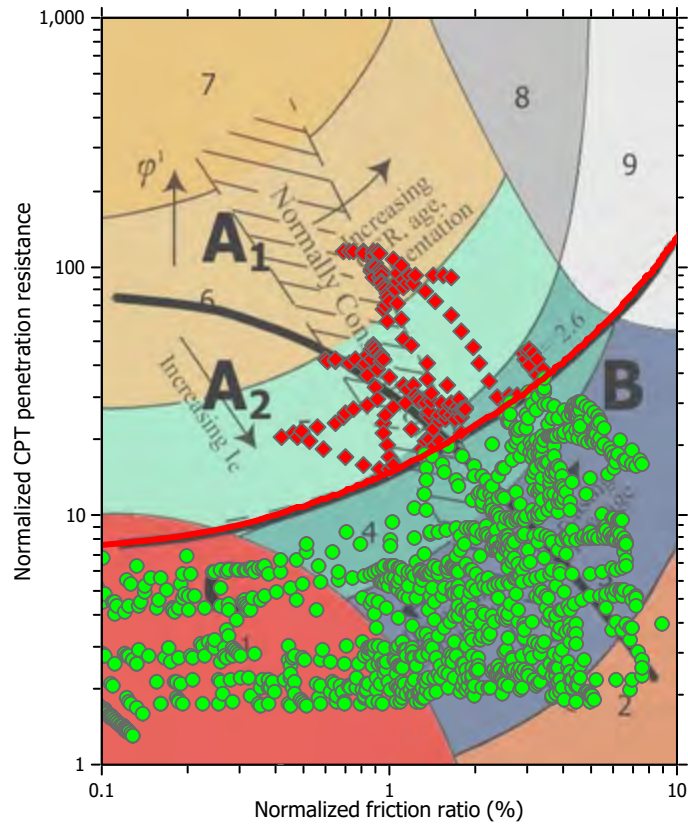

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

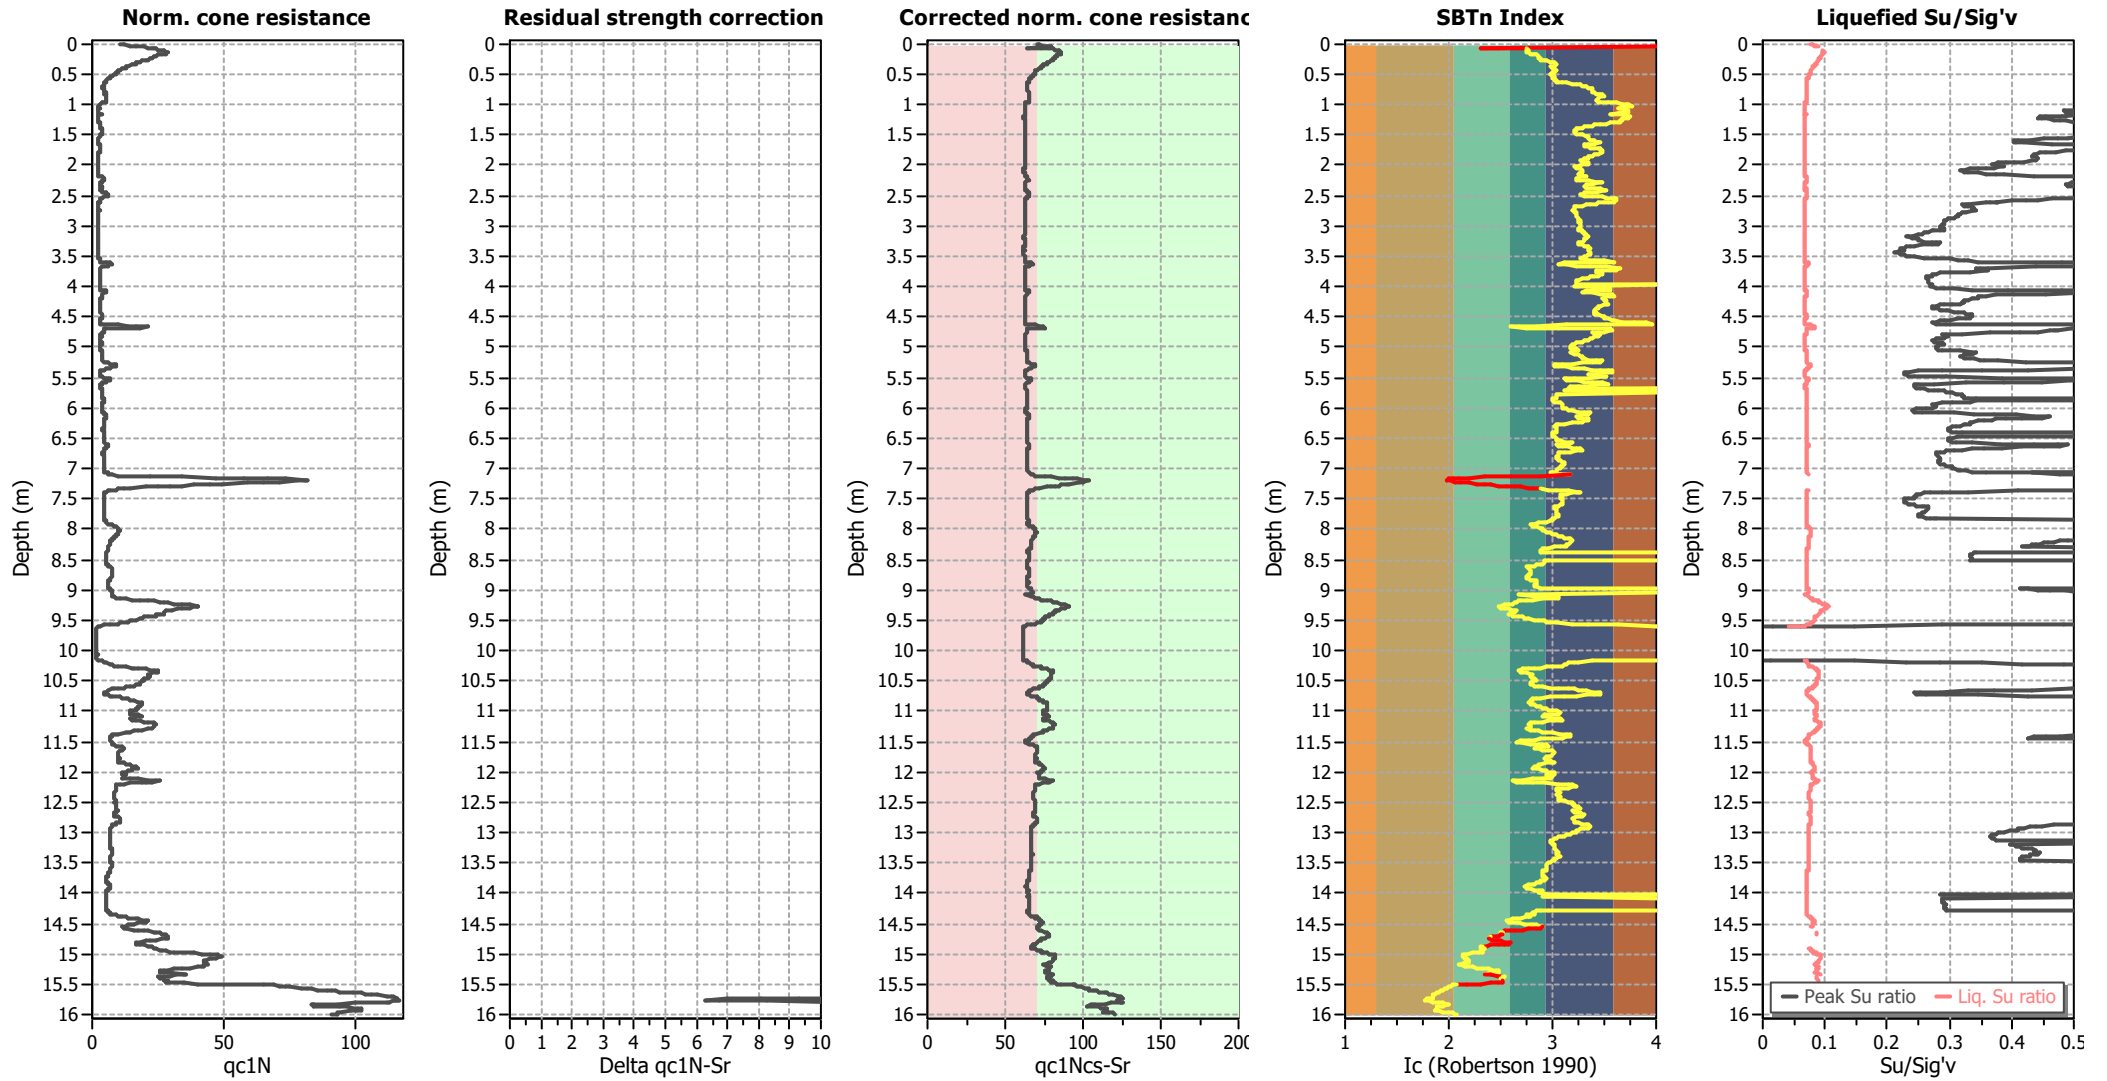

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

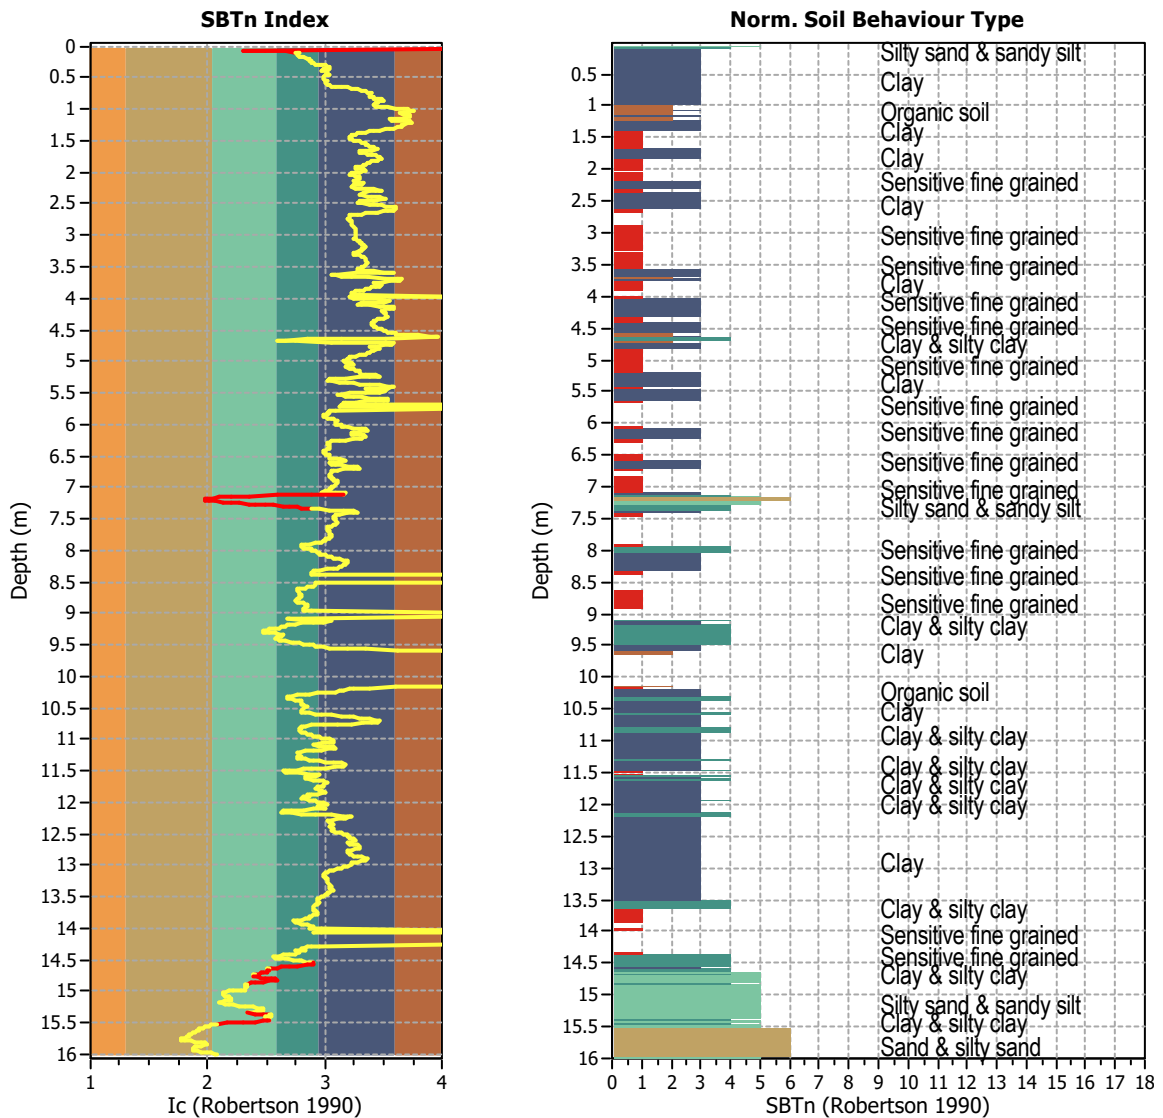


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1600
 Total points excluded: 72
 Exclusion percentage: 4.50%
 Number of layers detected: 9


Estimation of post-earthquake settlements

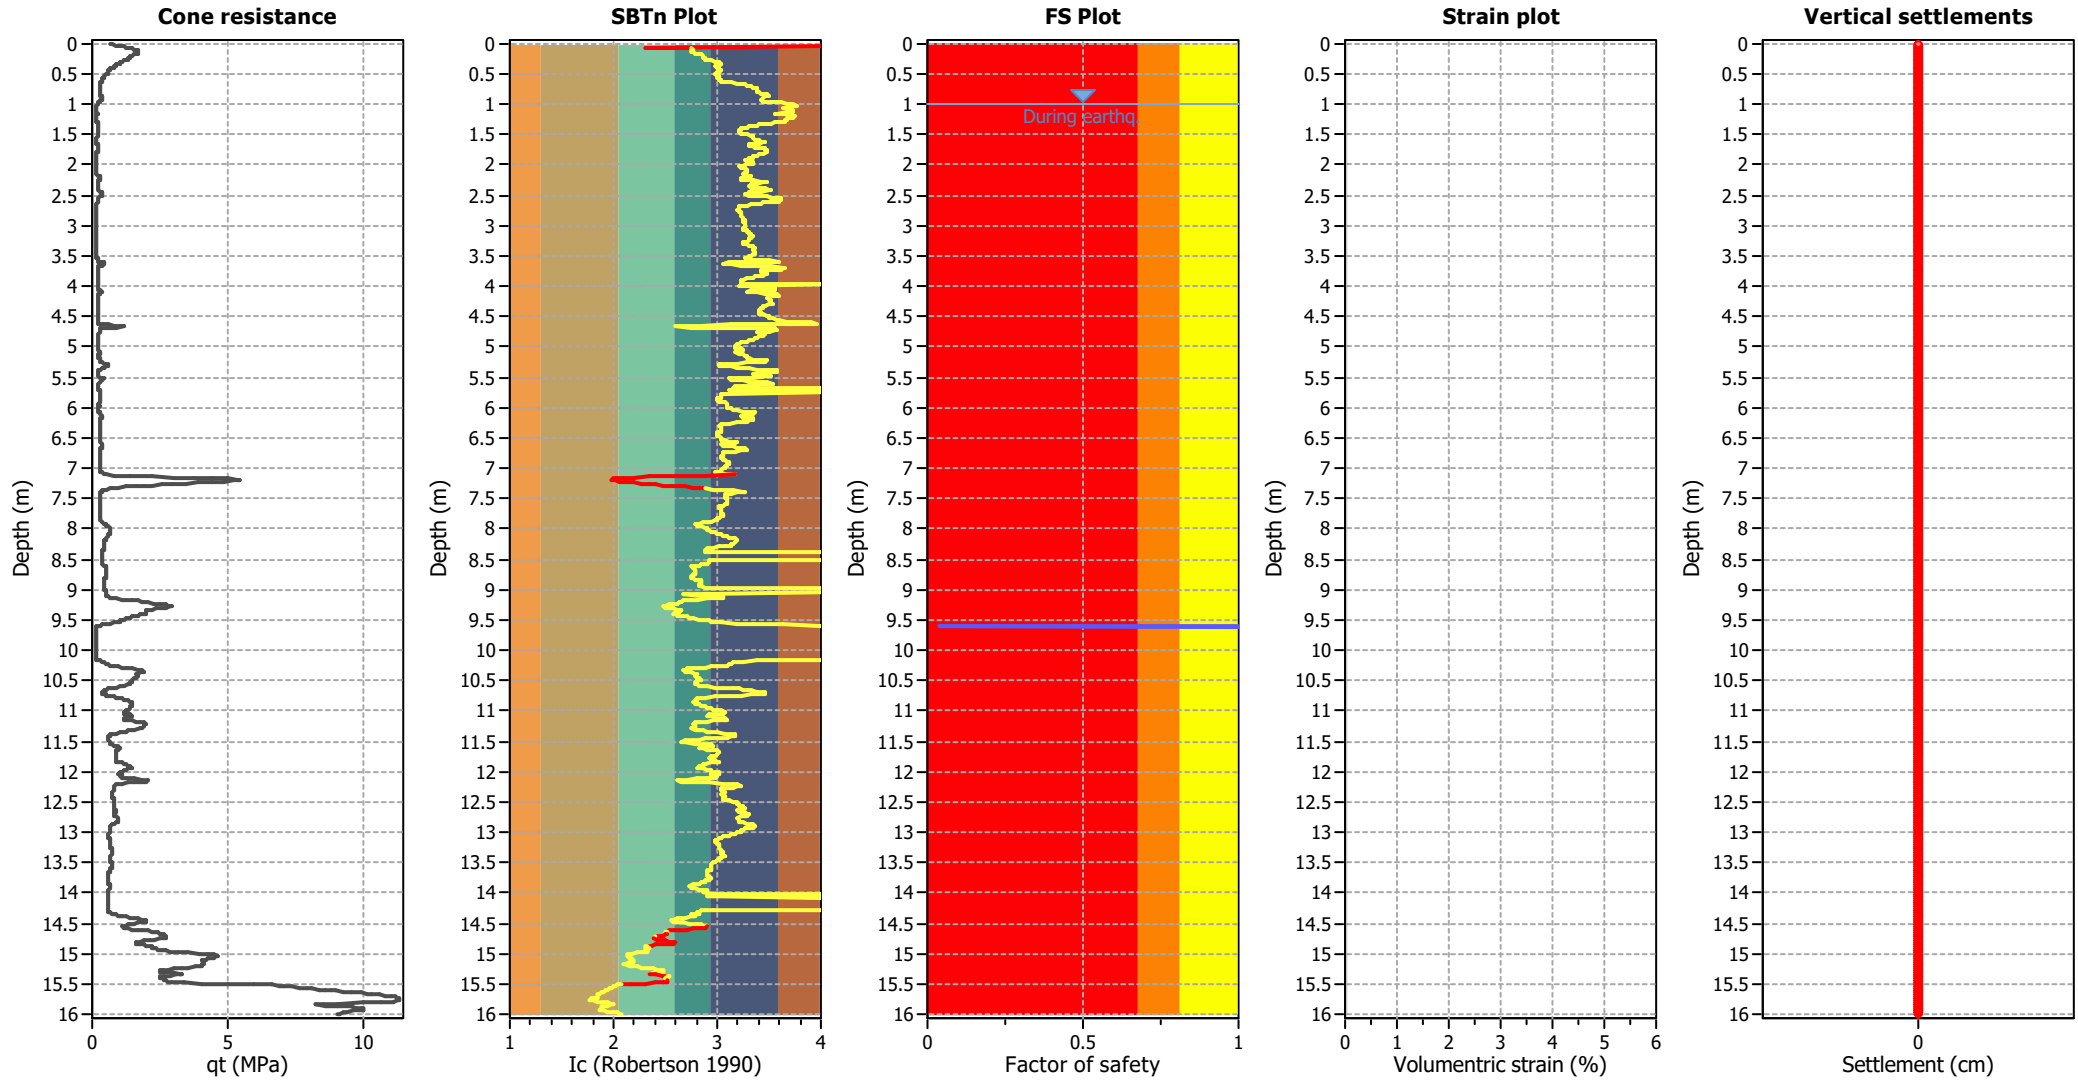

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

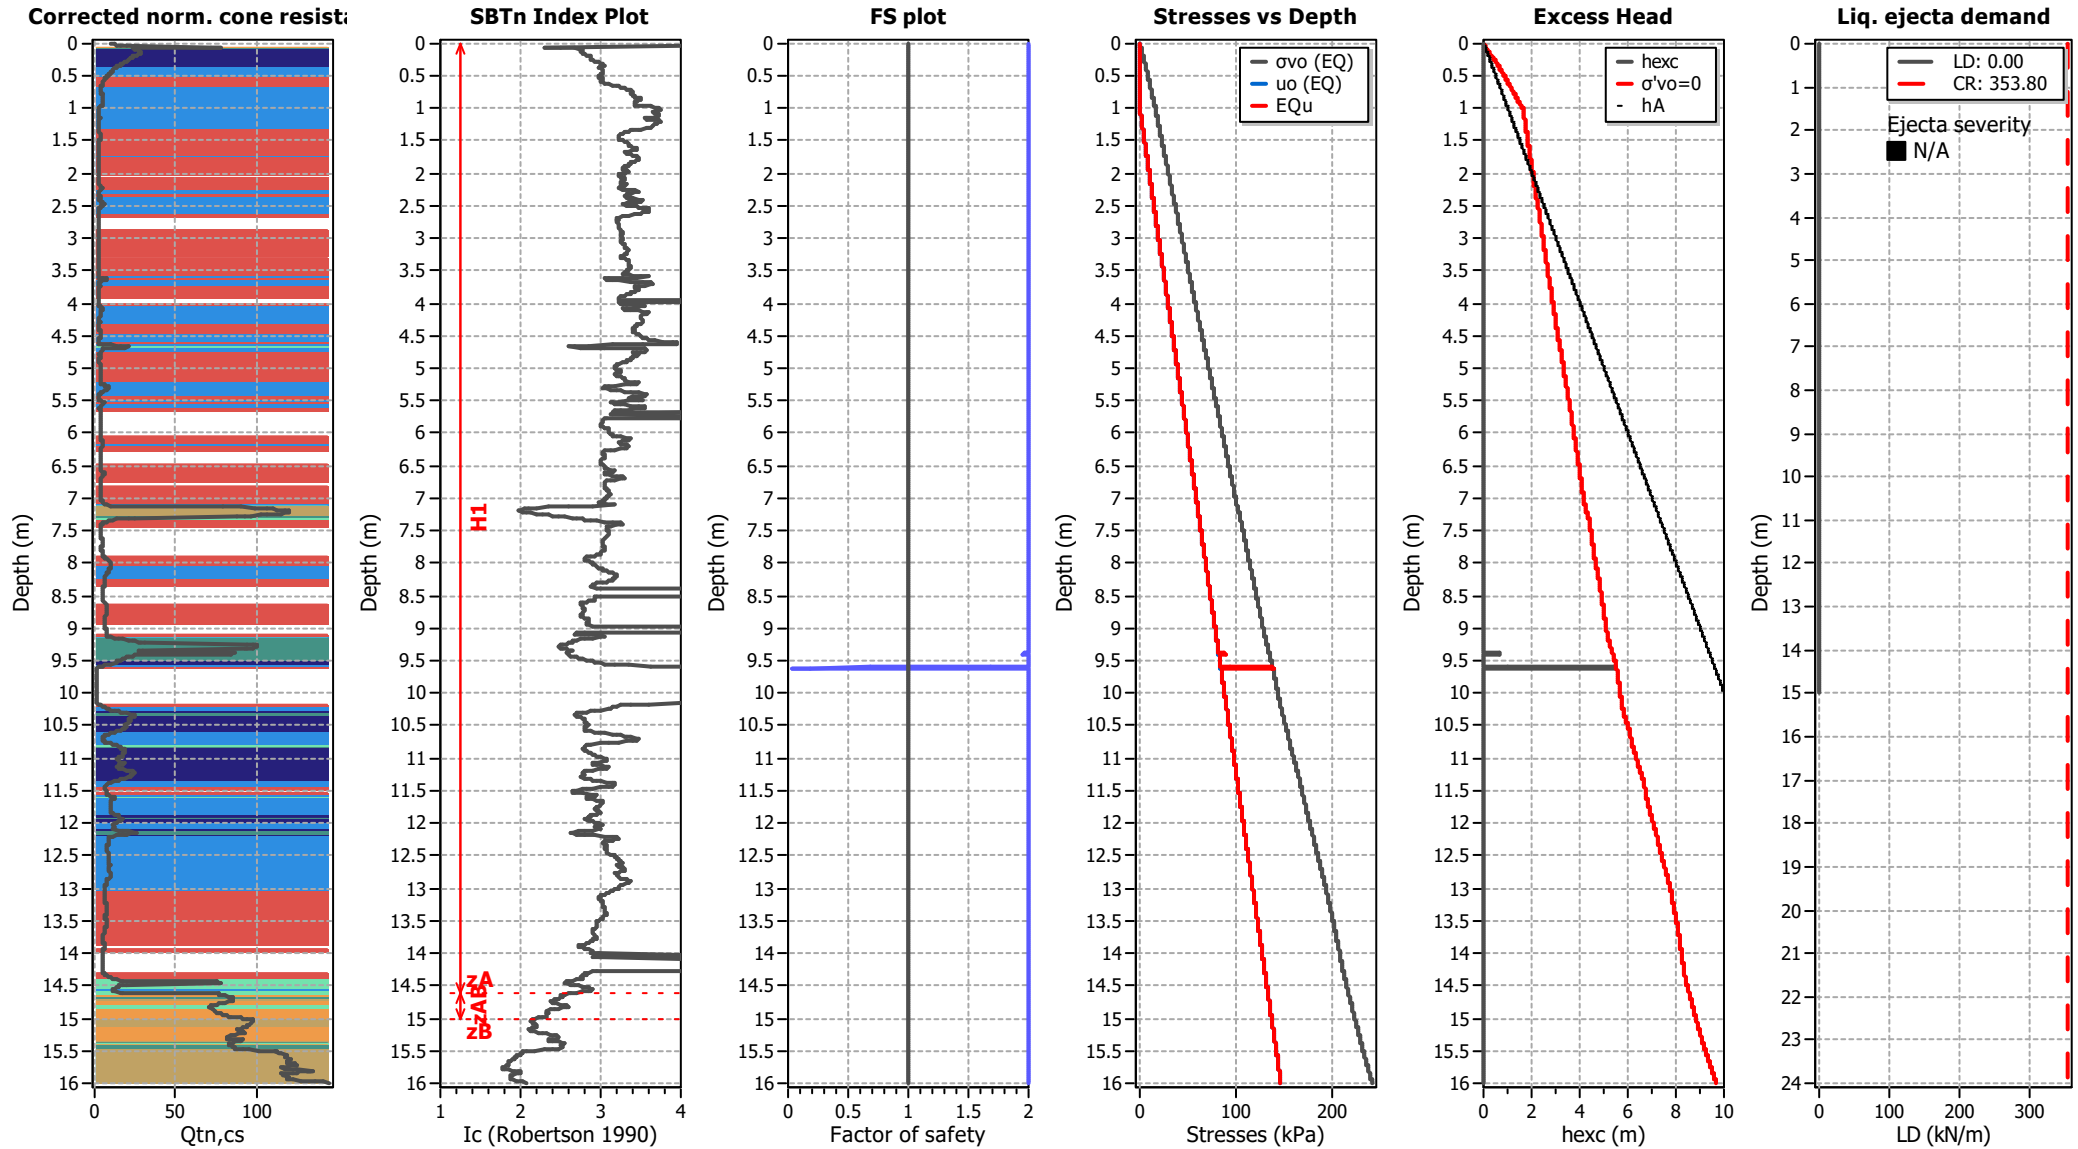

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT415A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sand & Clay
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.05	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

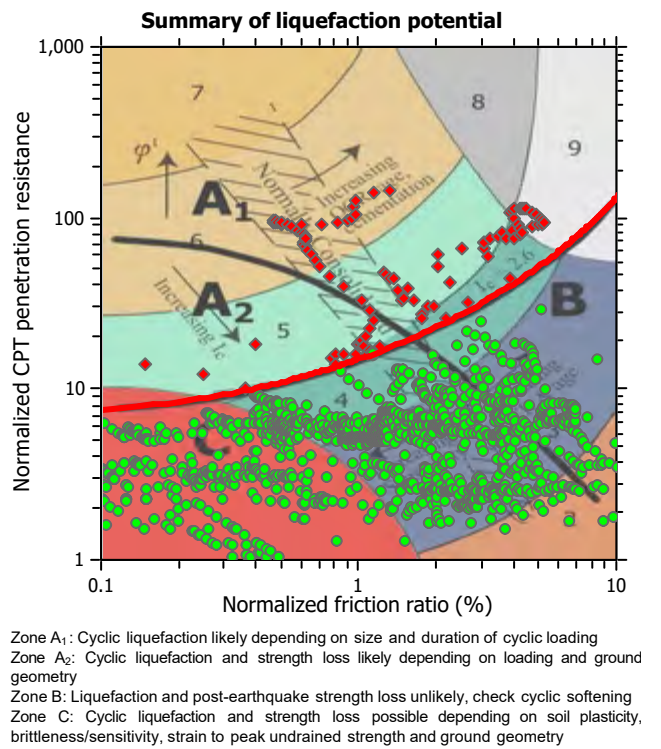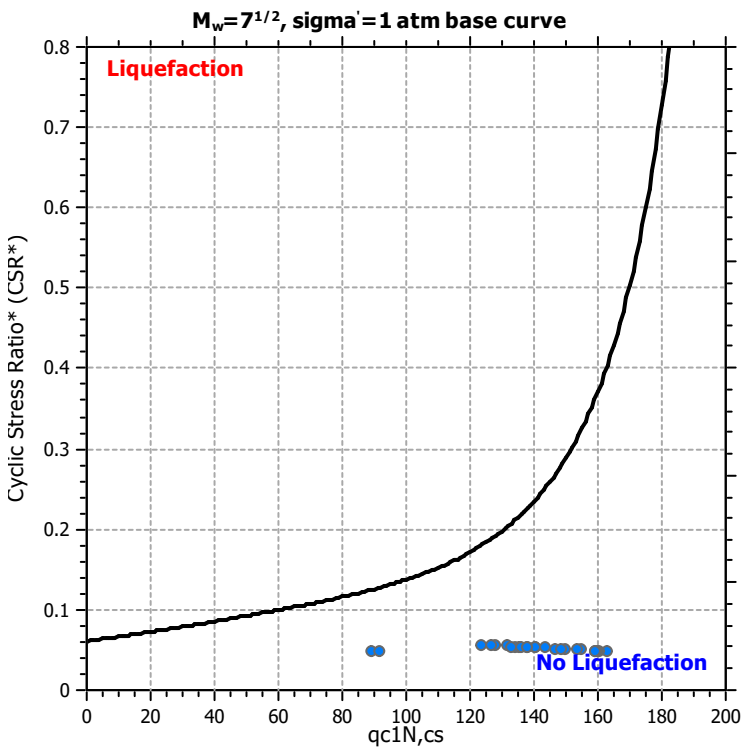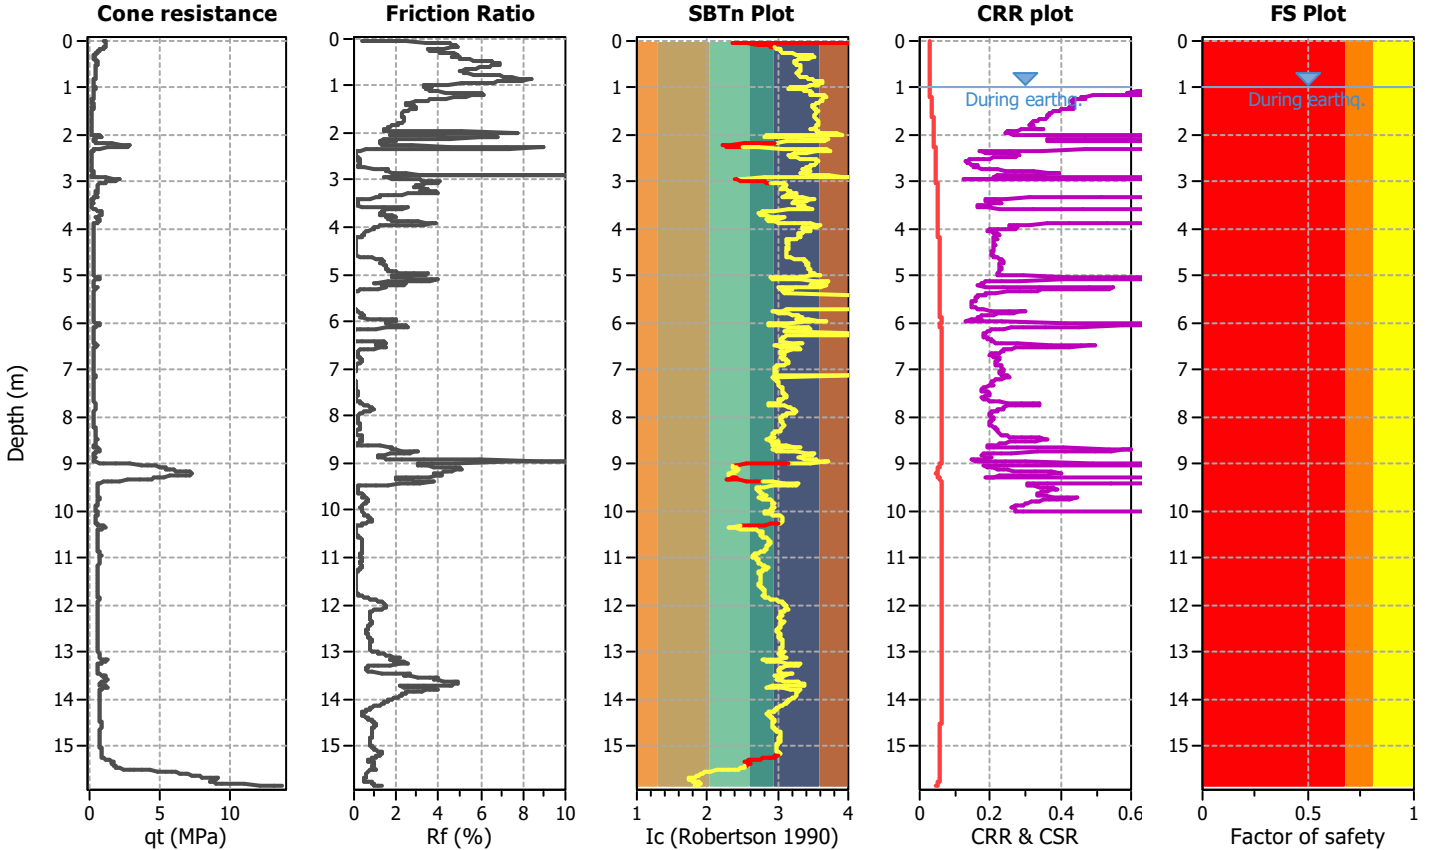

CPT basic interpretation plots

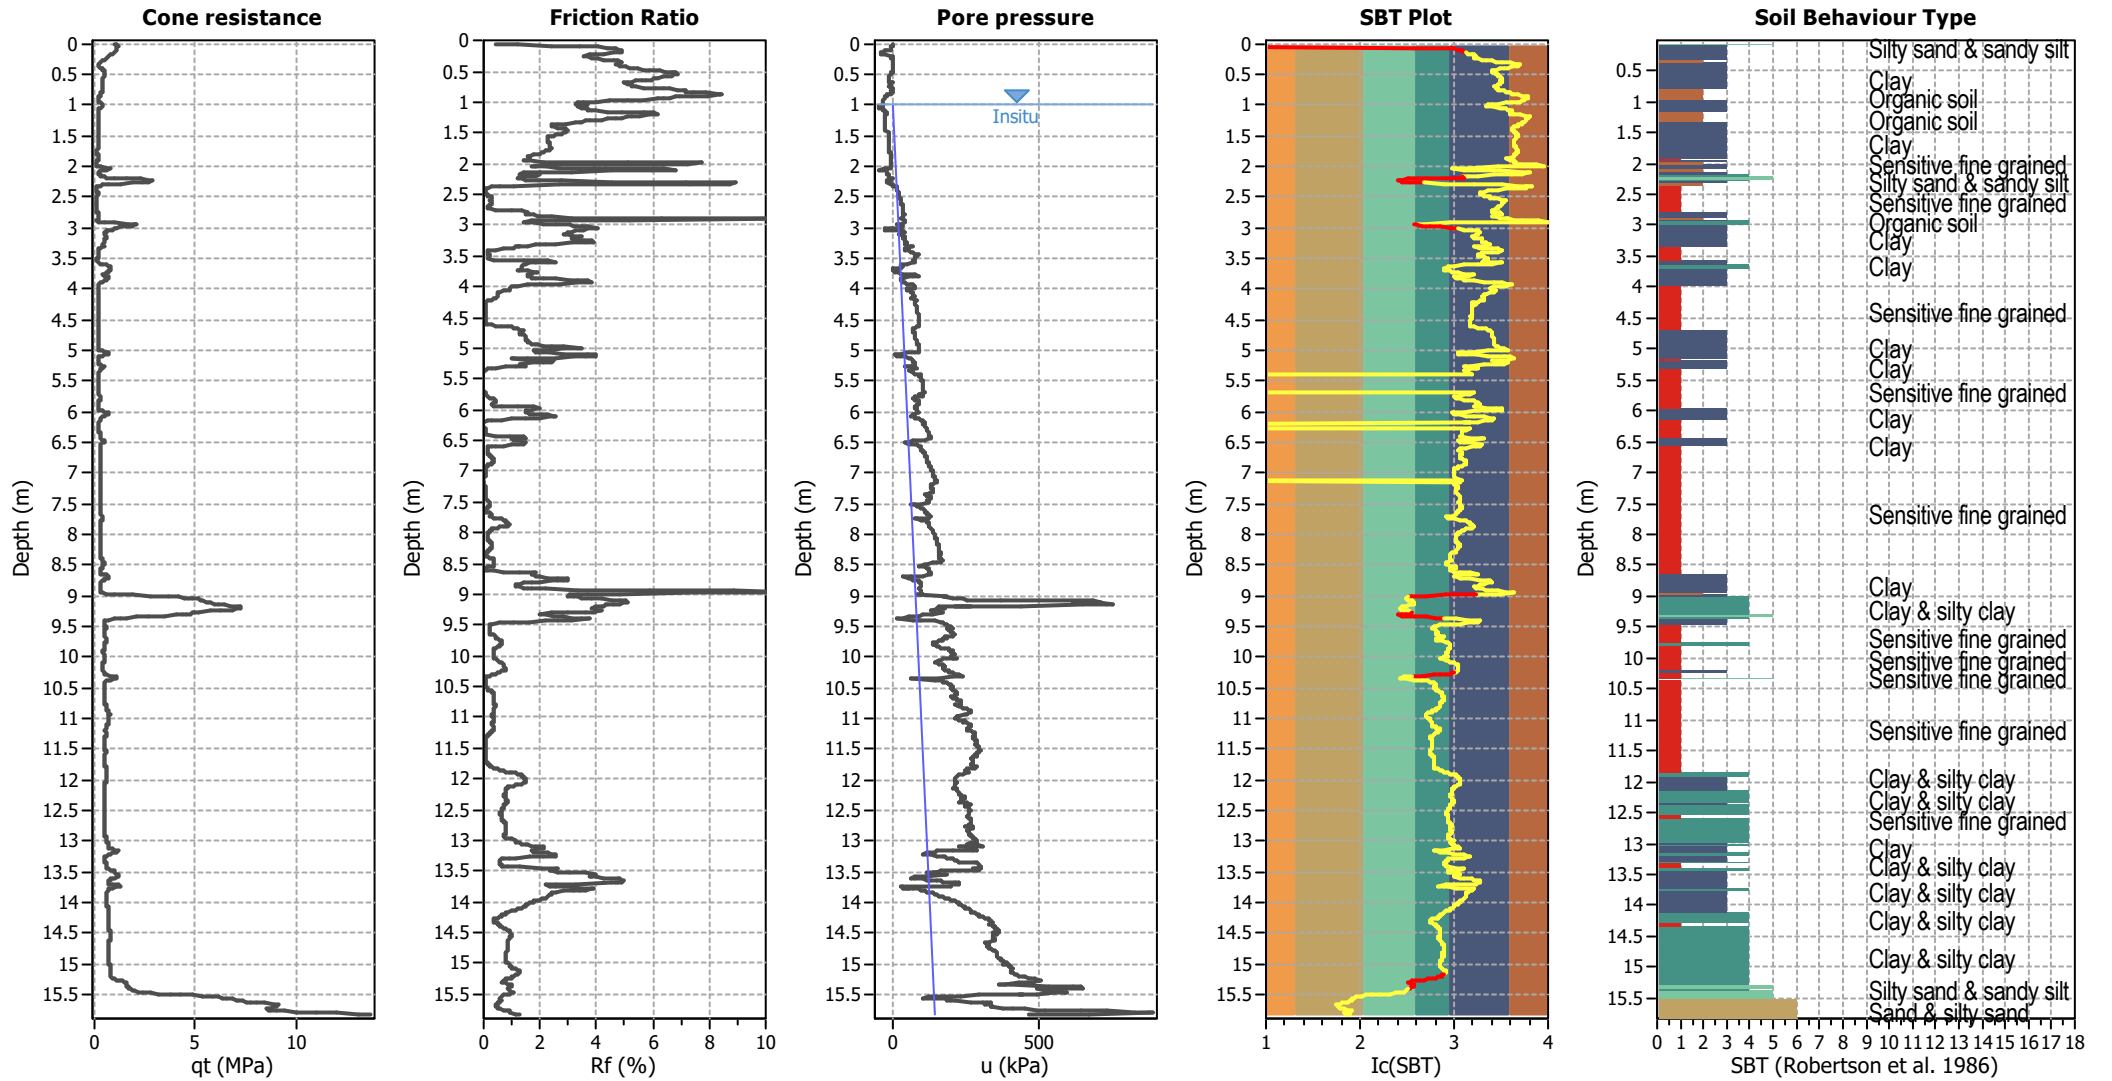


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

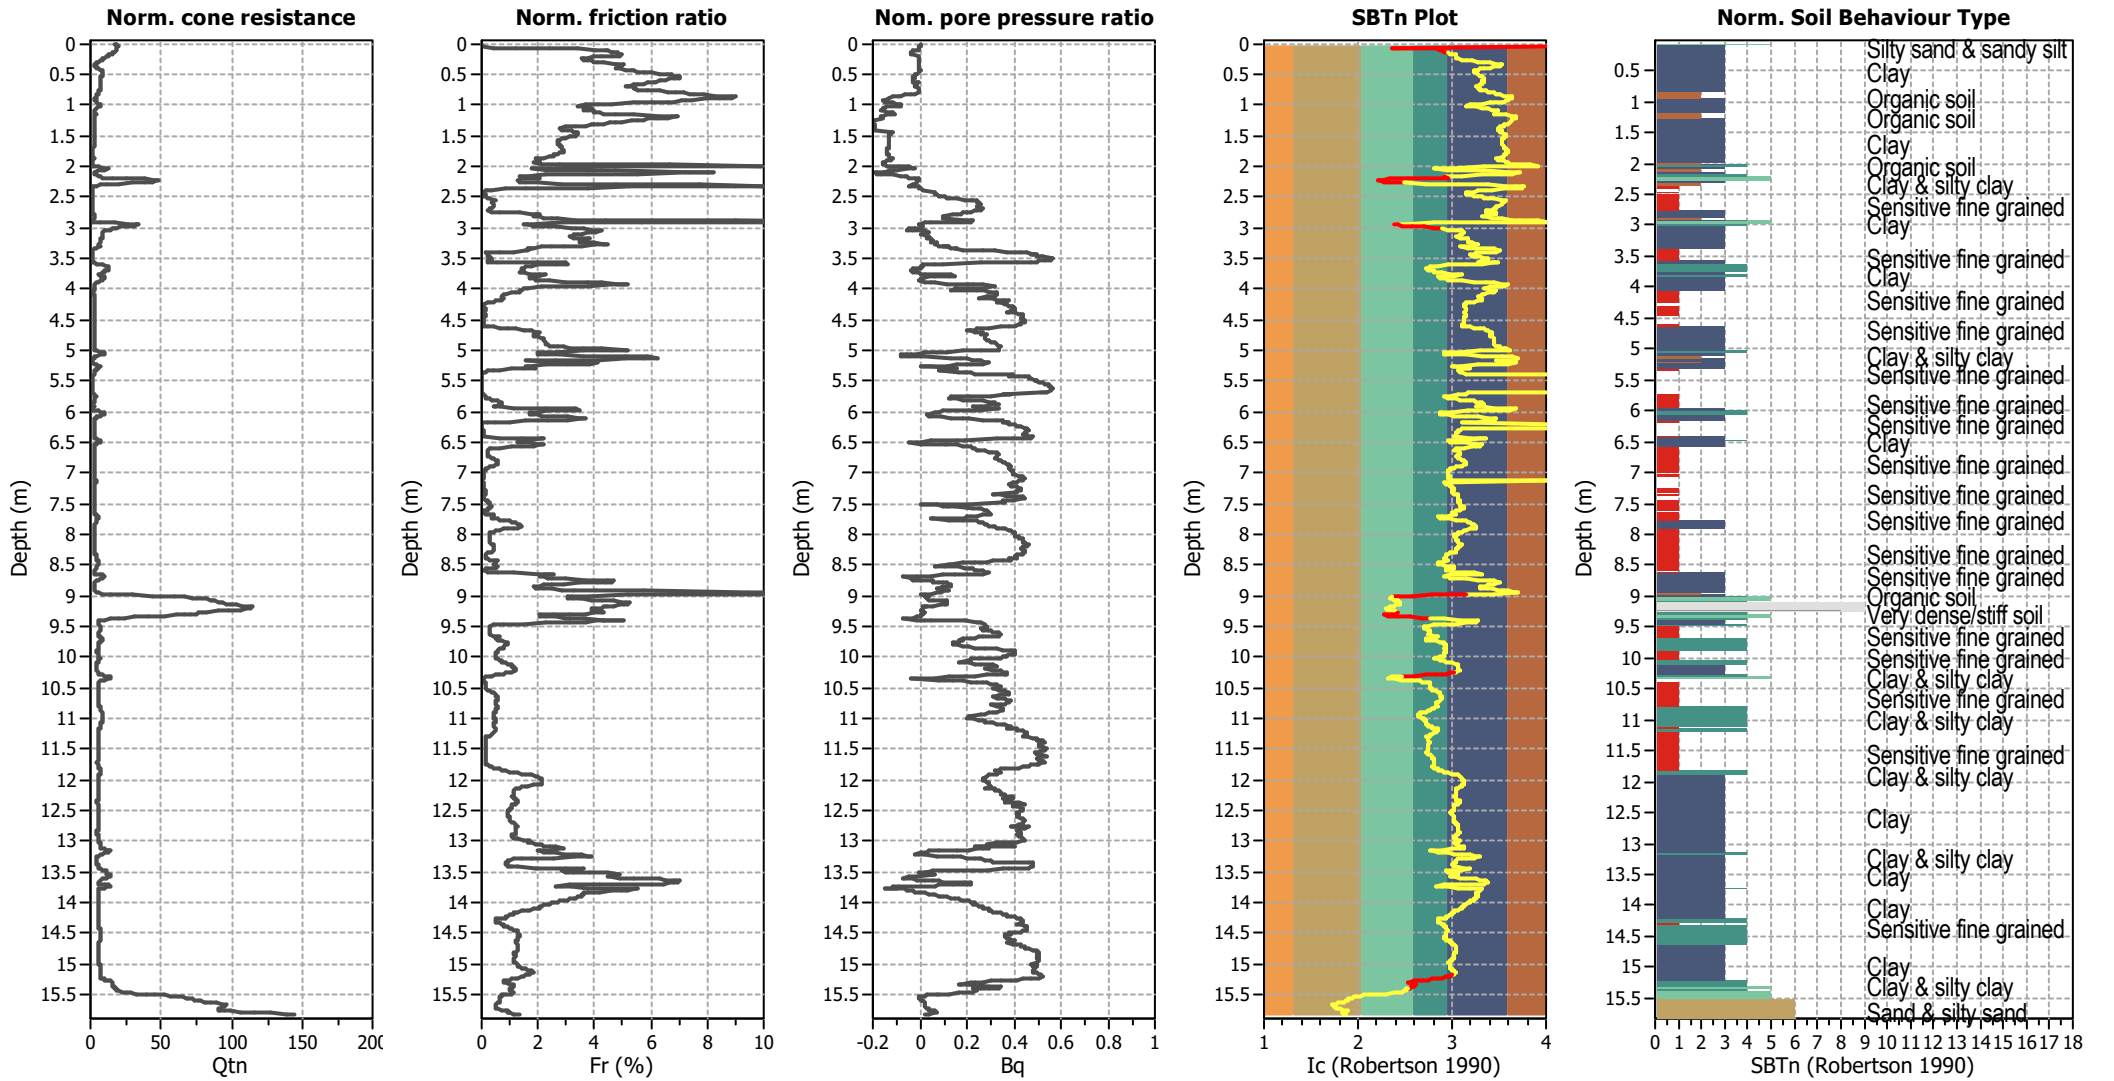


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

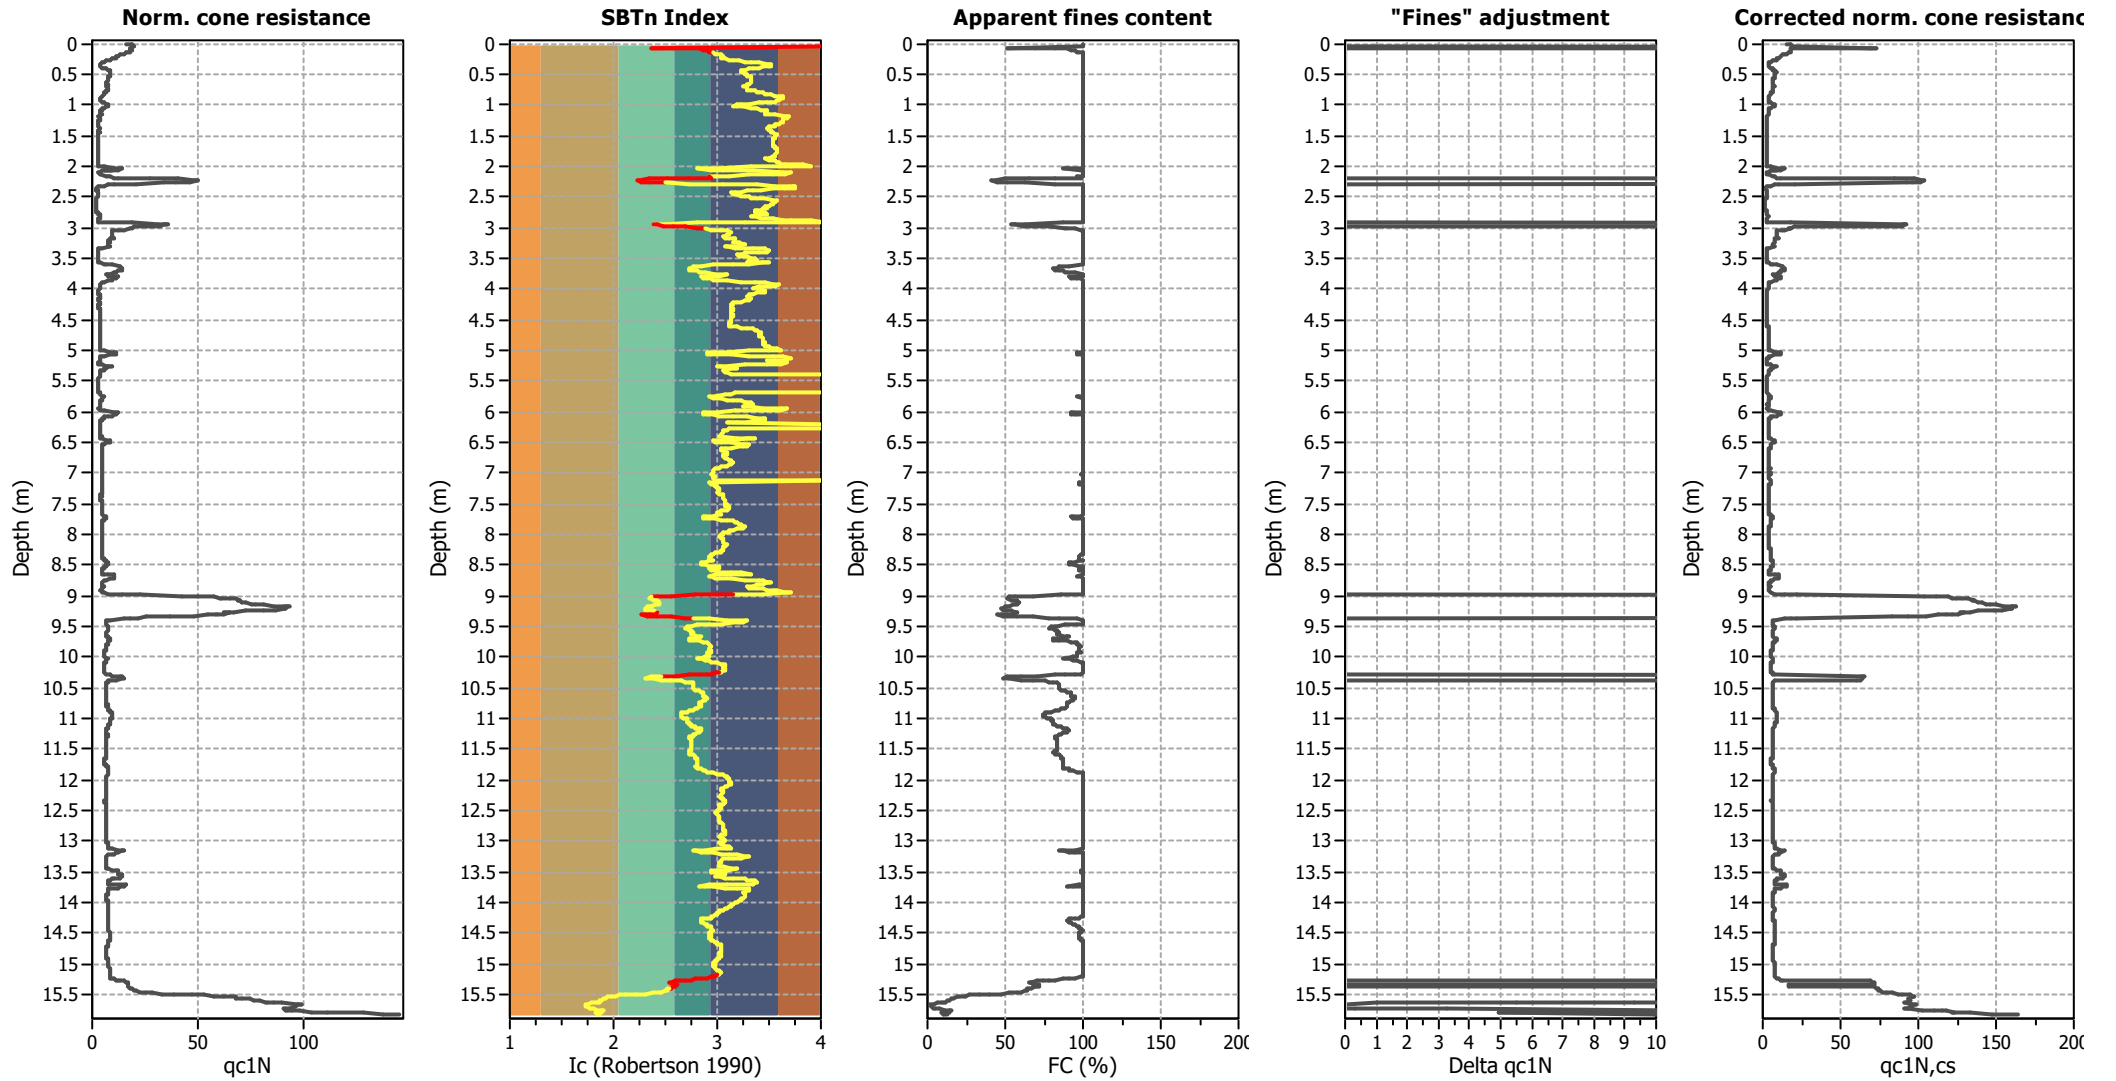

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

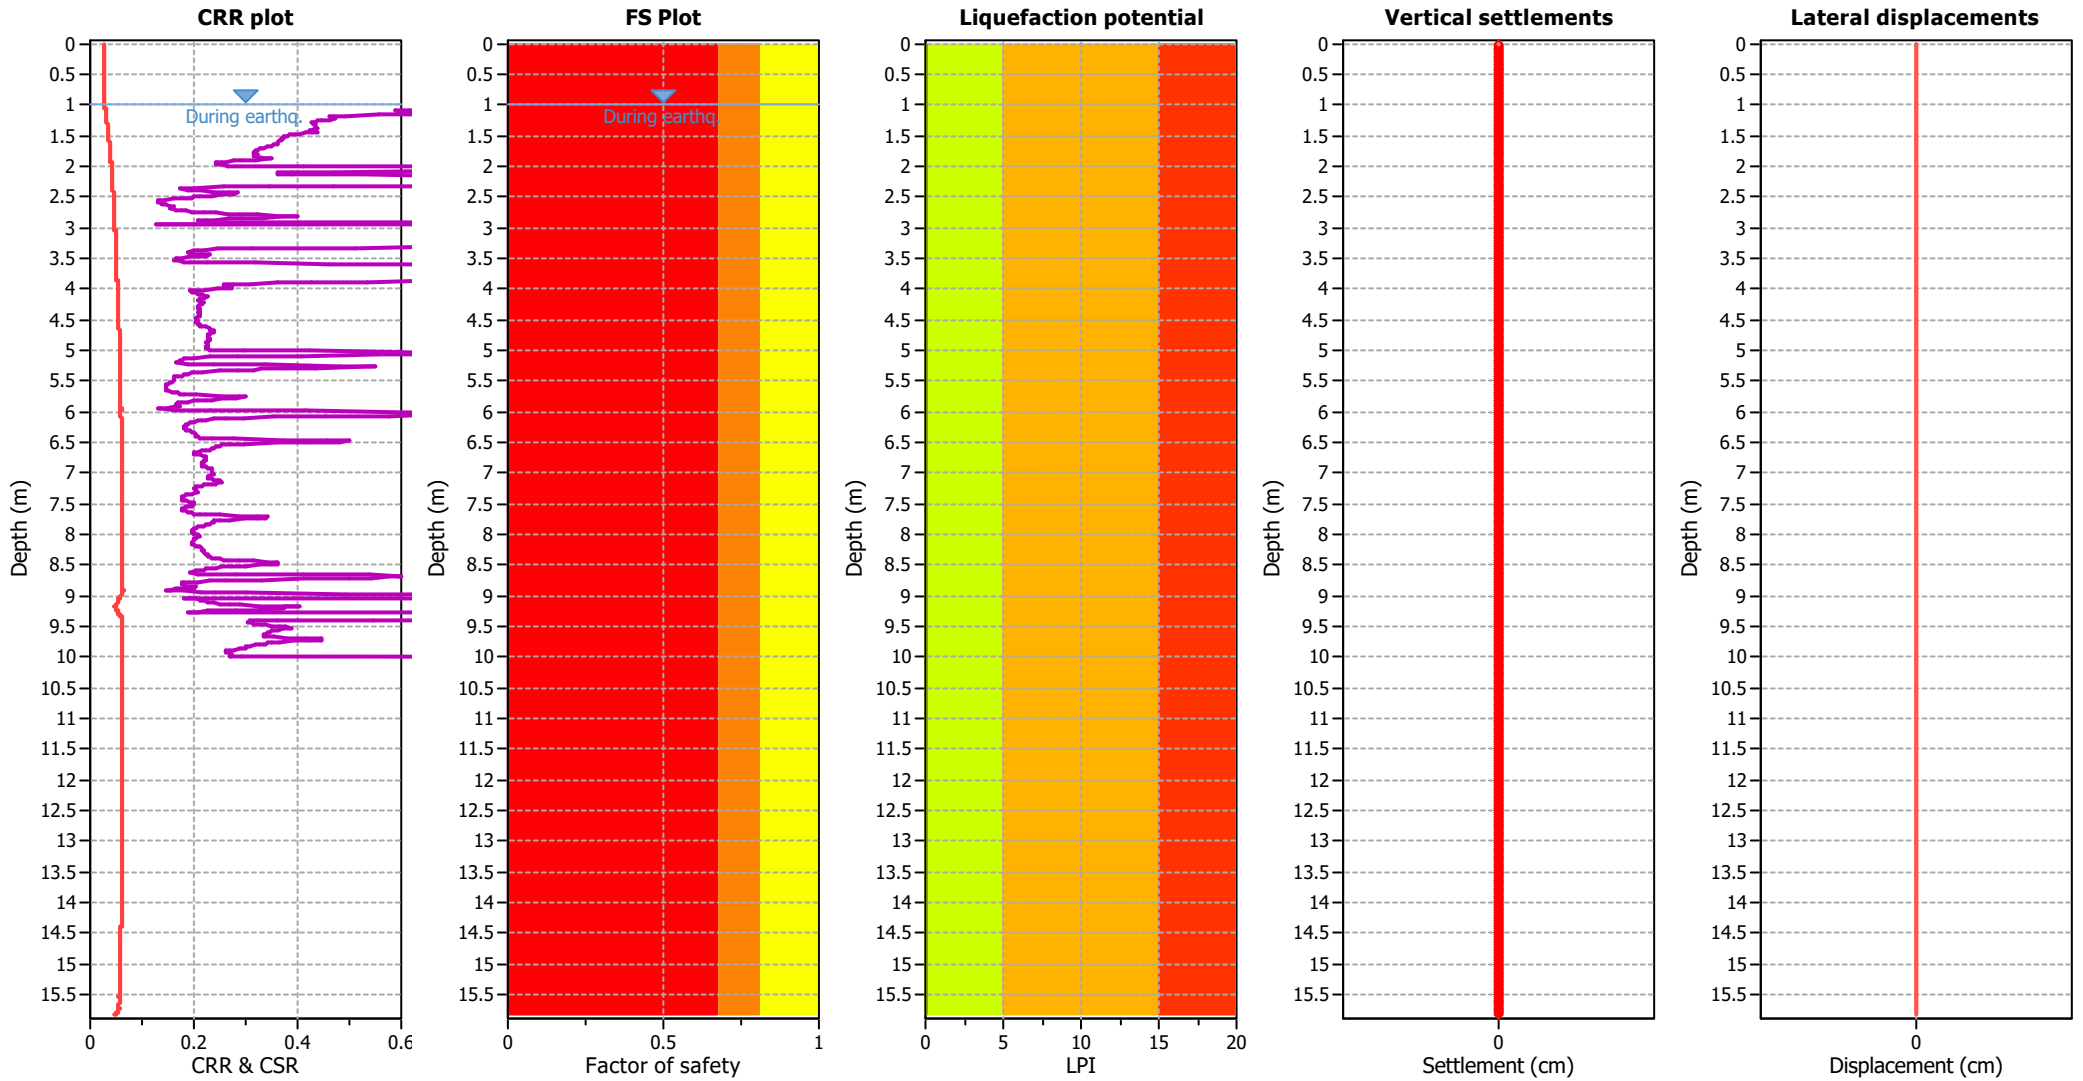

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

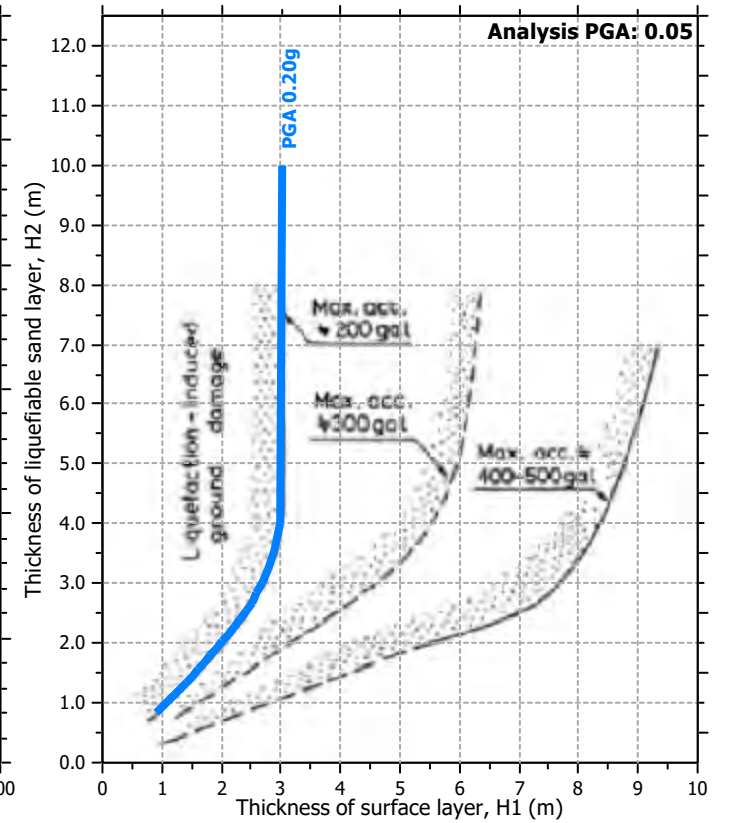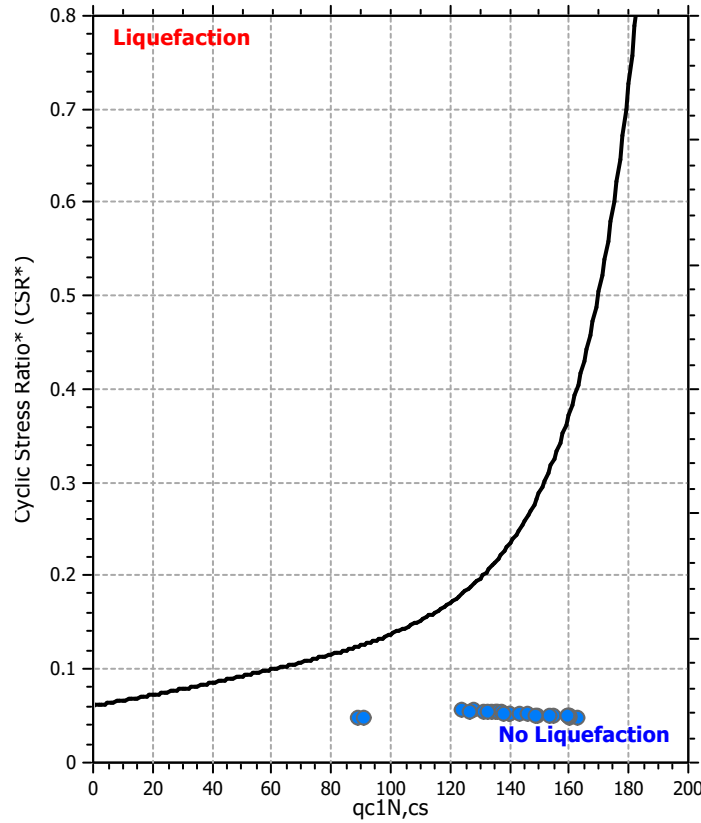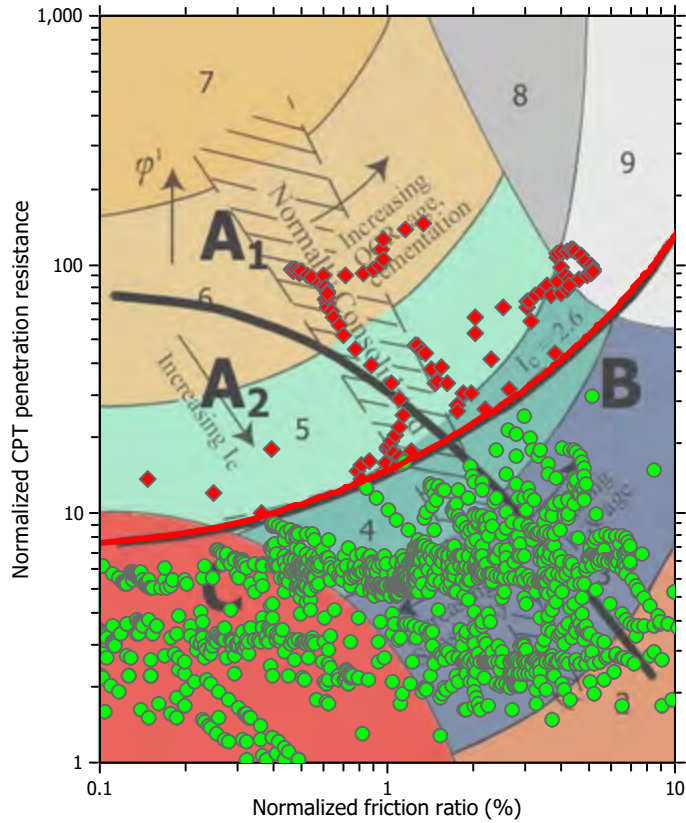

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

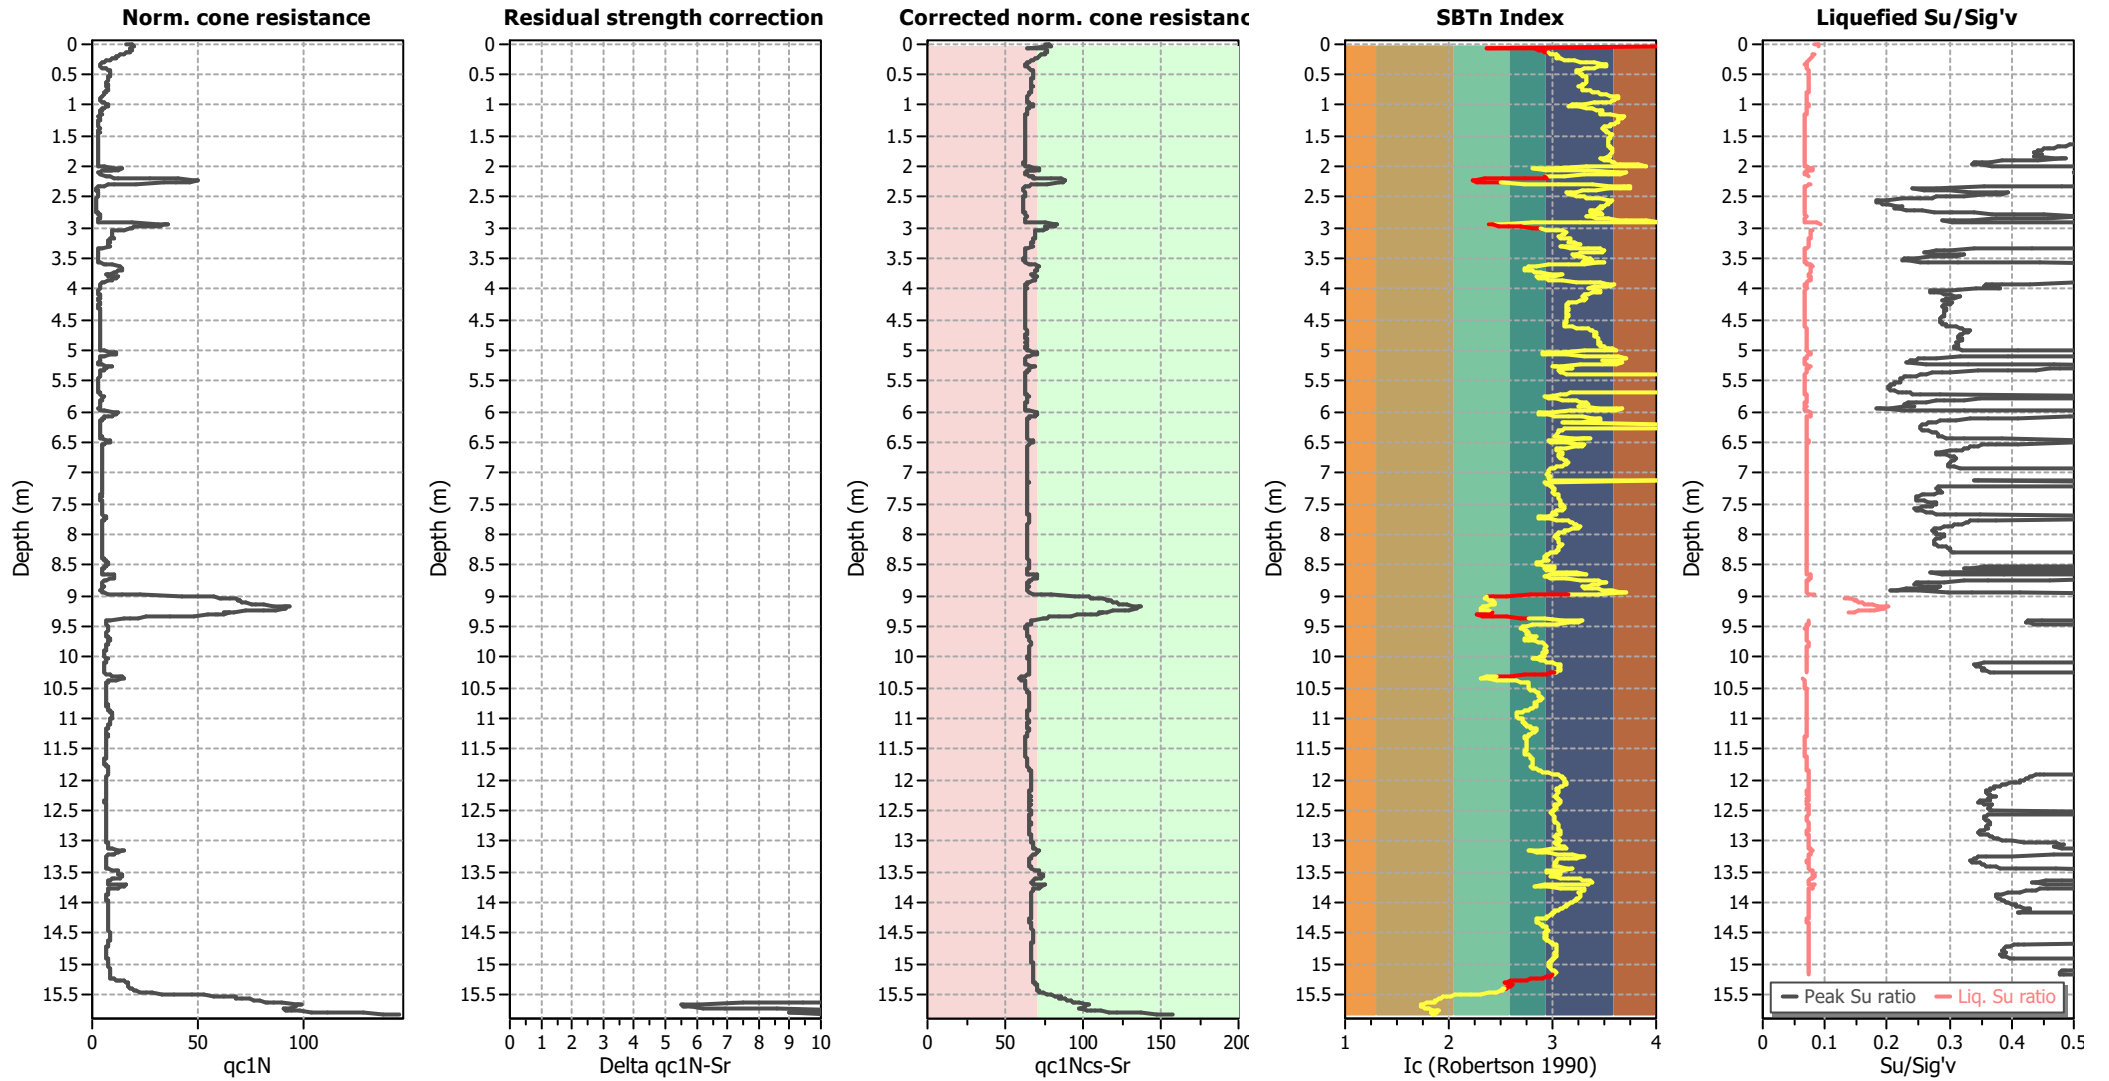

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.05	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

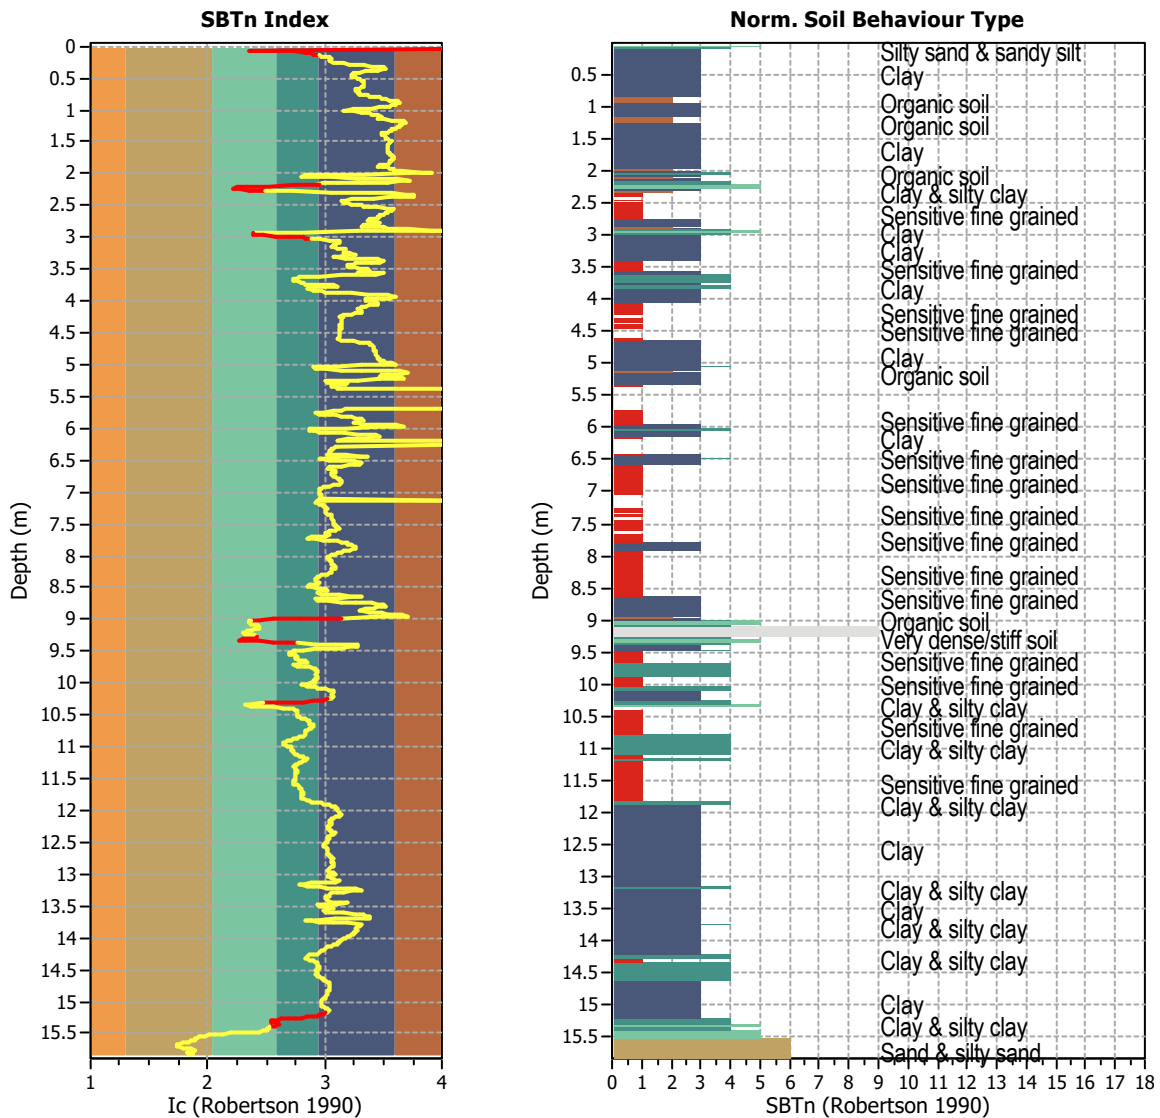


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1583
 Total points excluded: 80
 Exclusion percentage: 5.05%
 Number of layers detected: 11


Estimation of post-earthquake settlements

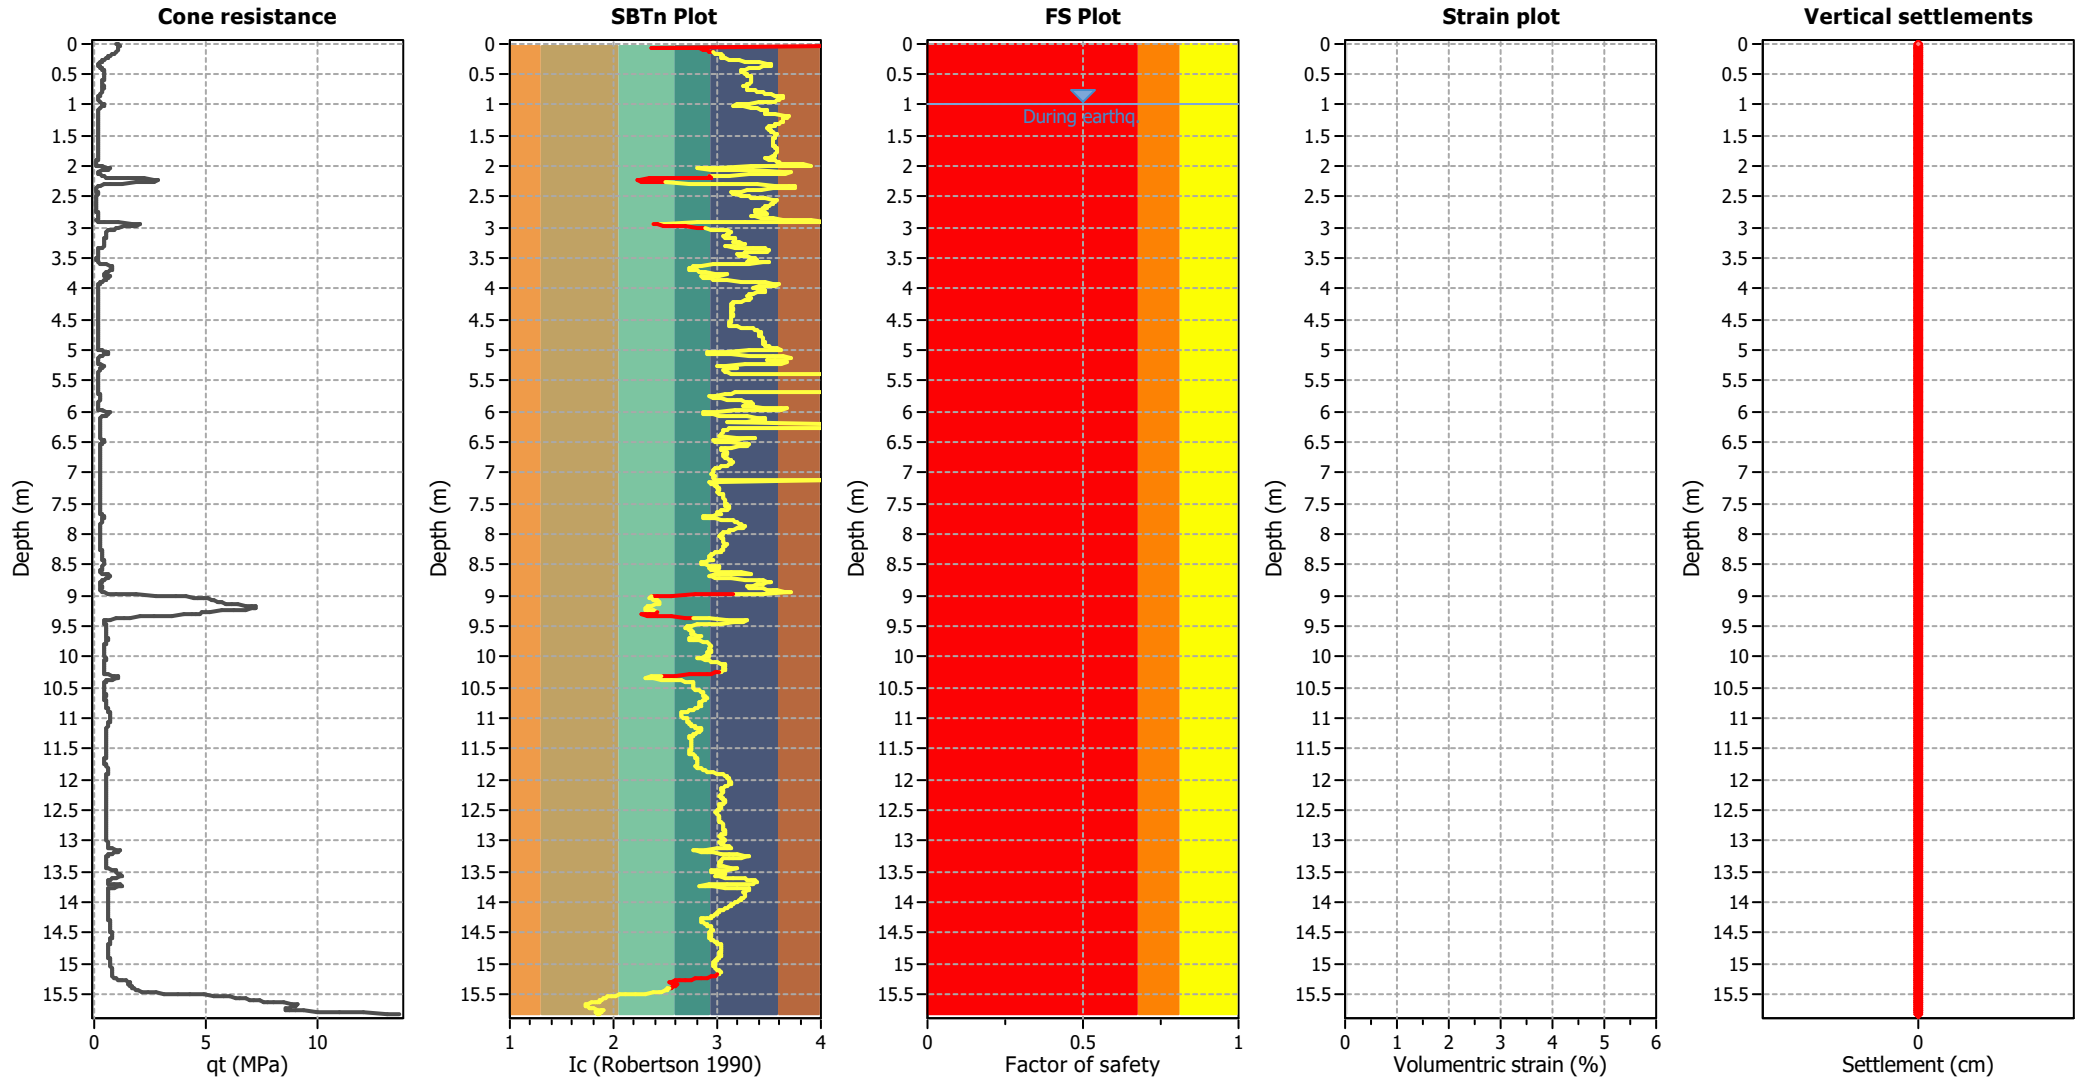

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

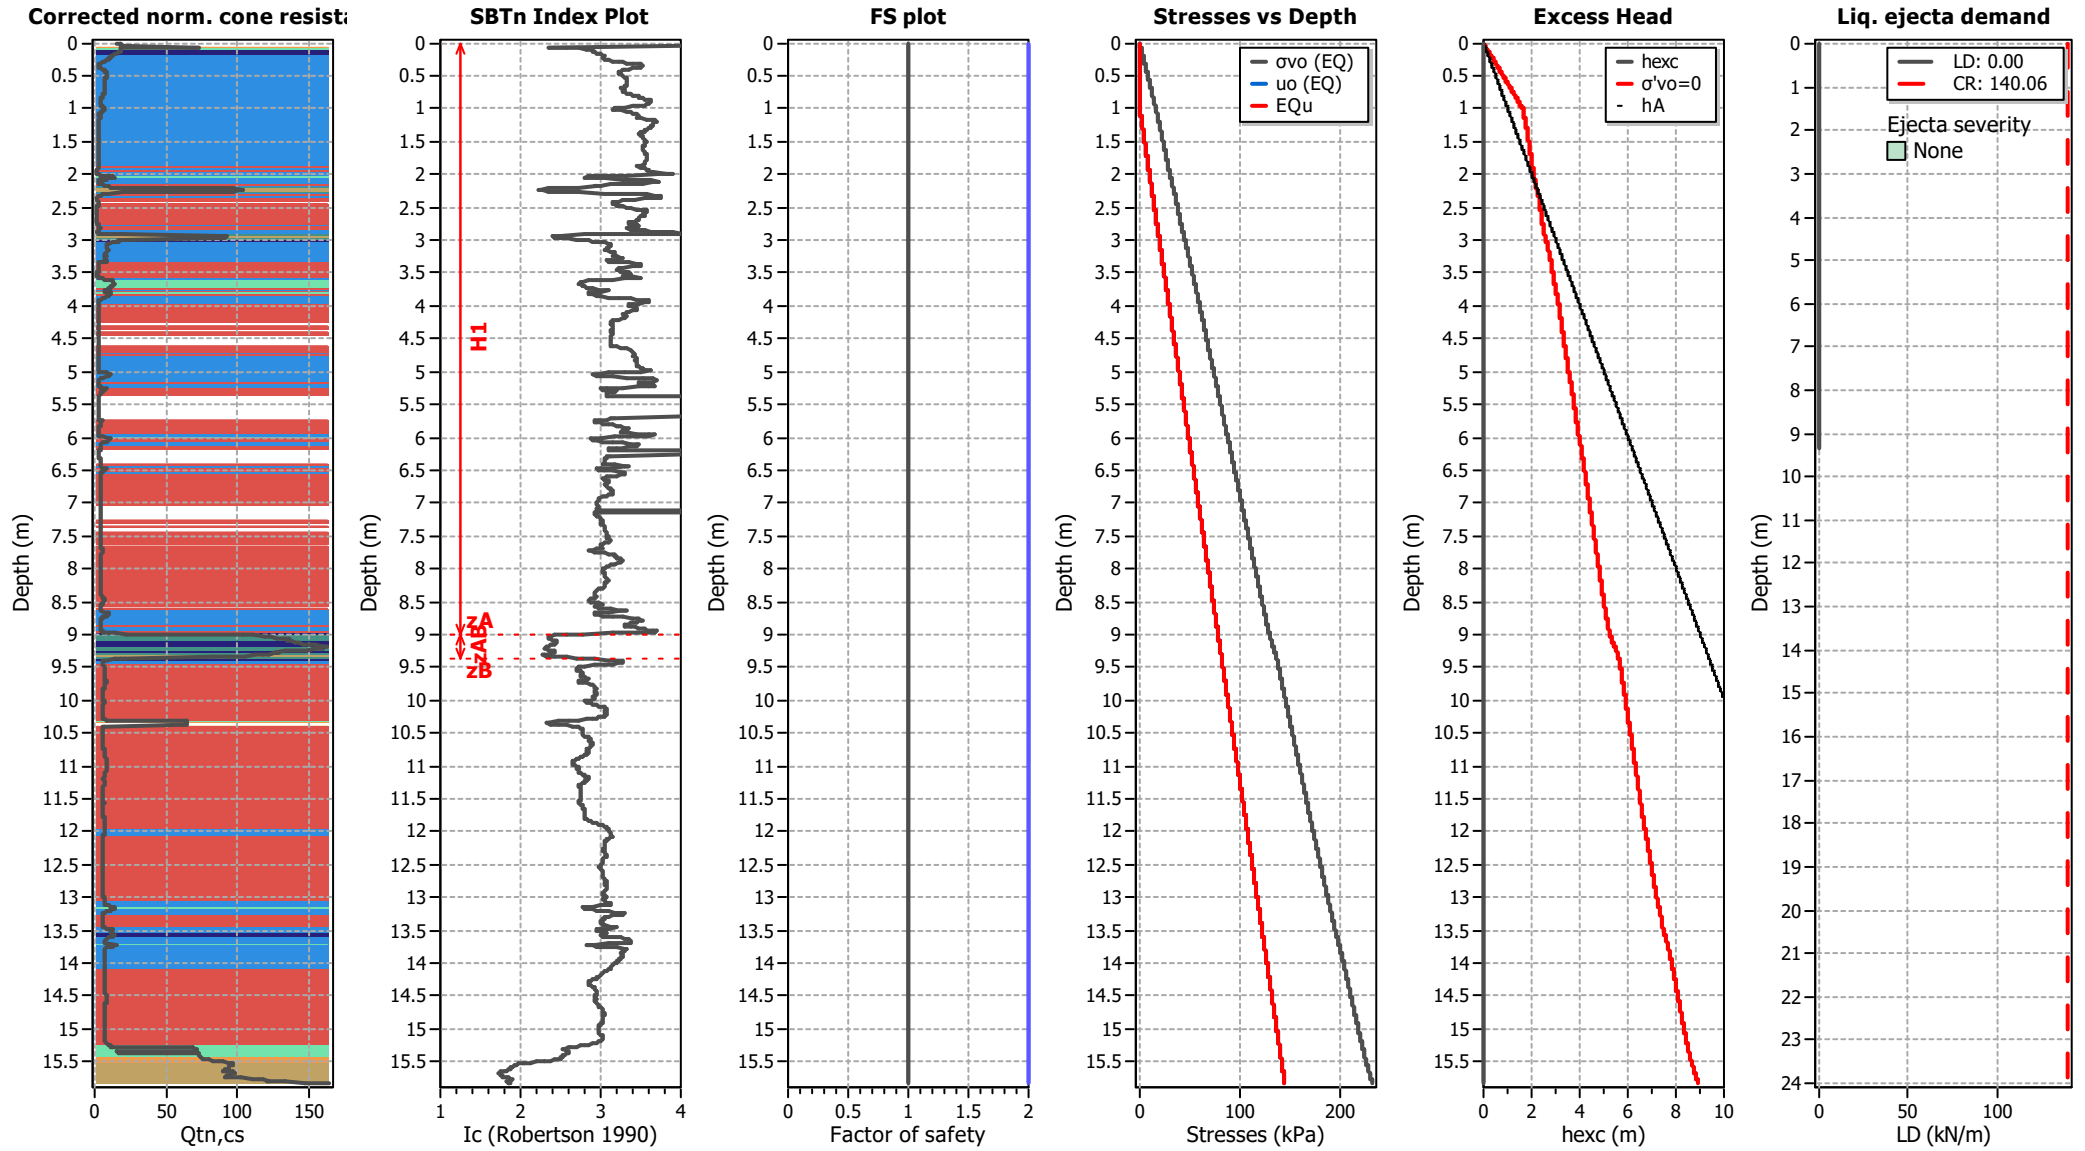


APPENDIX 7.3
ULS LIQUEFACTION ANALYSIS RESULTS

Project title :

Location :


Overall vertical settlements report

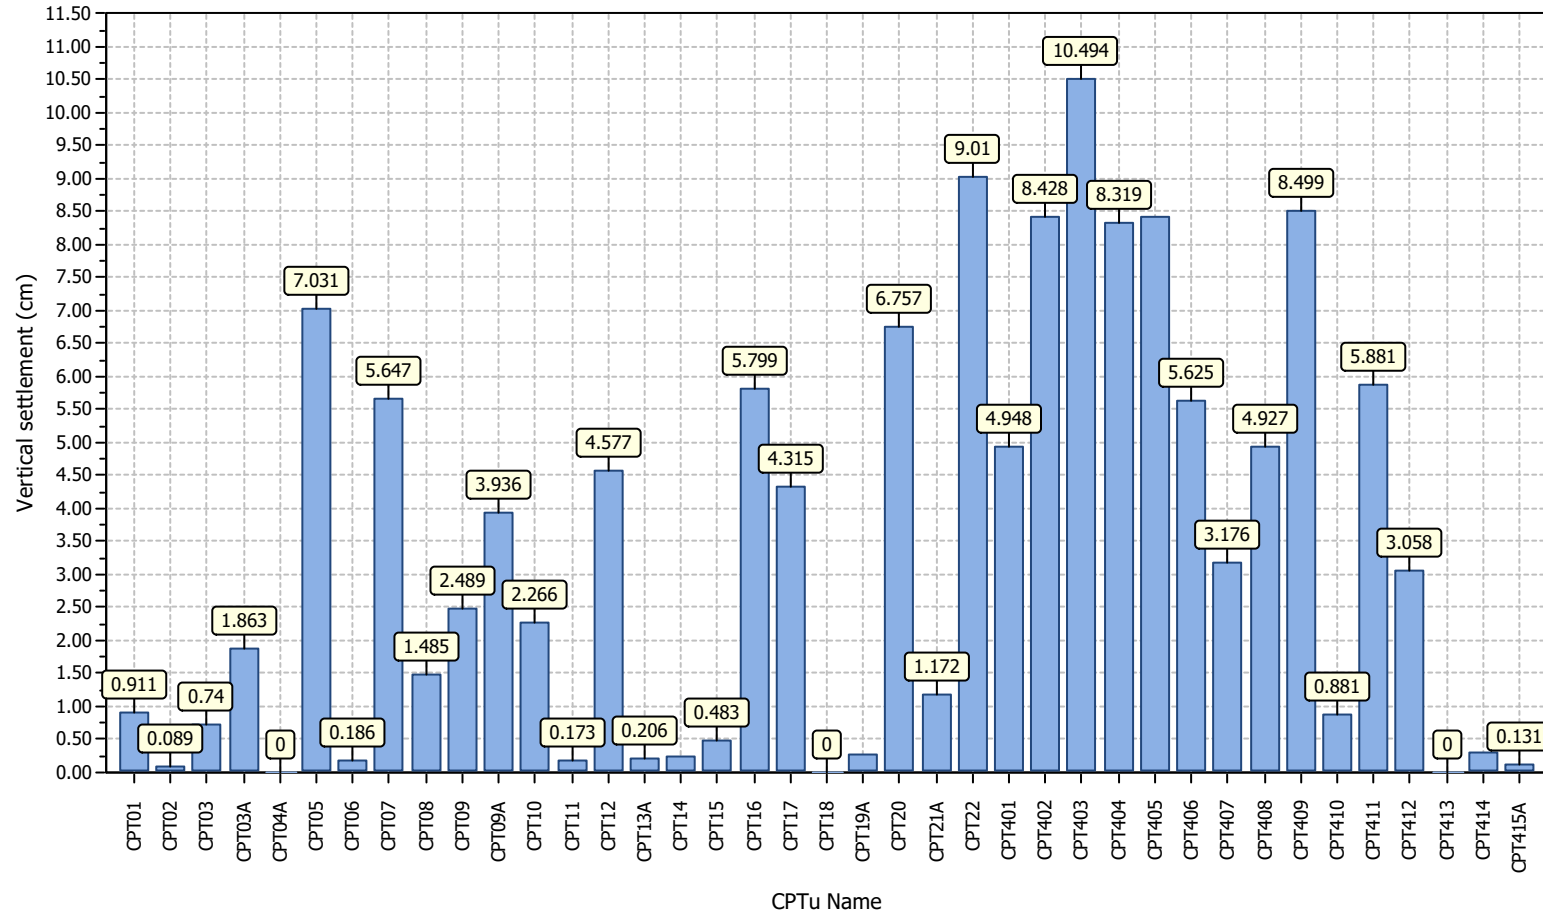

Project title :

Location :

Overall Liquefaction Severity Number report

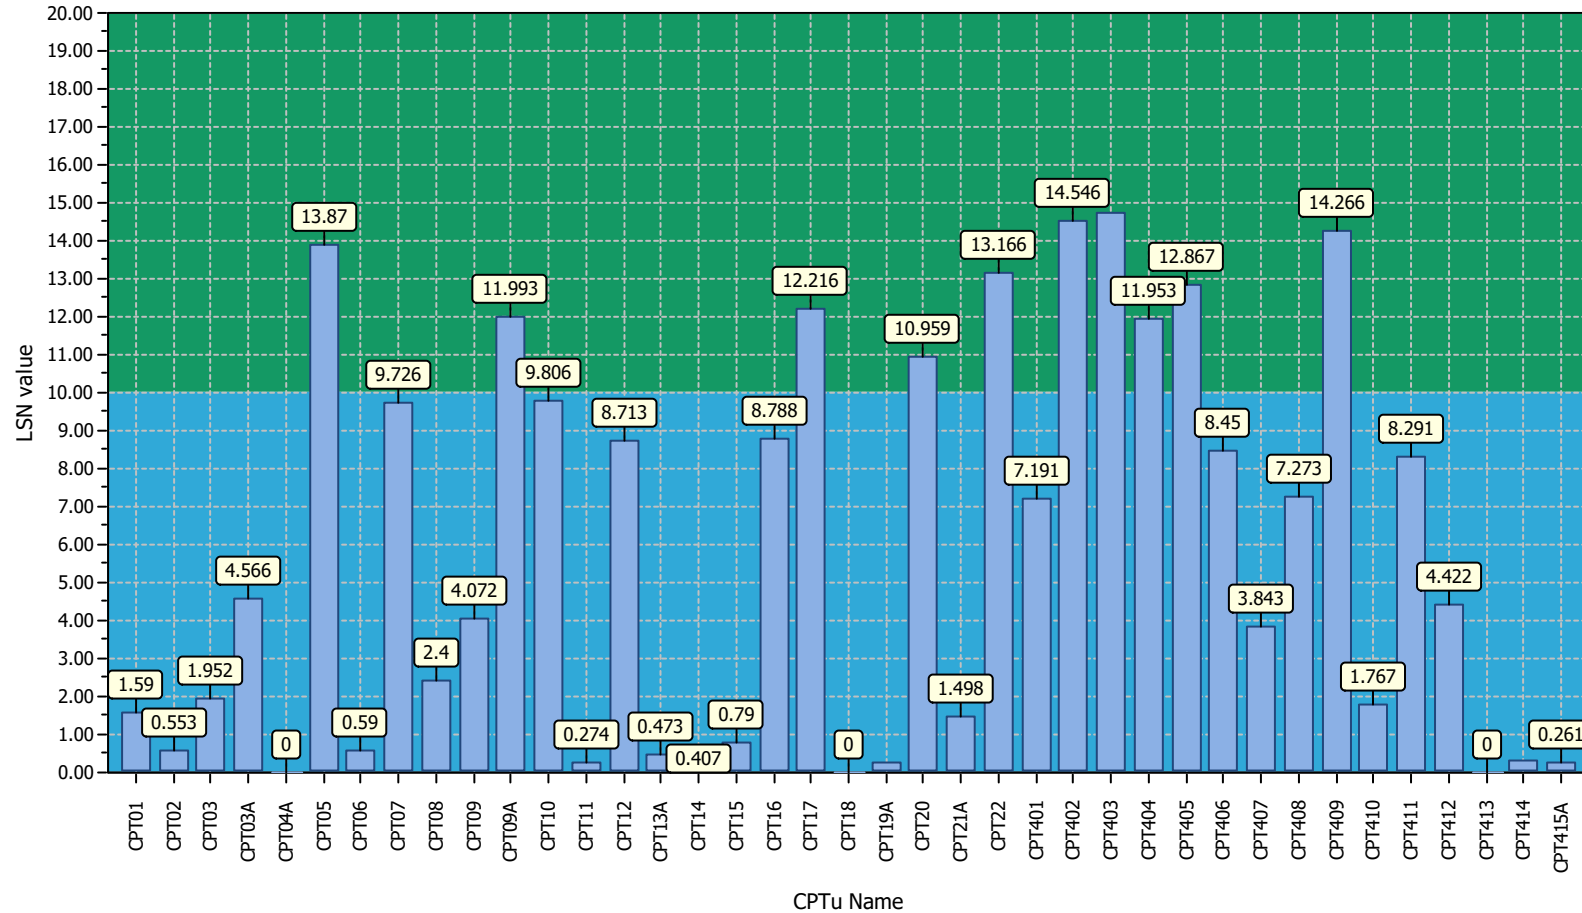

LSN color scheme

- Severe damage
- Major expression of liquefaction
- Moderate to severe exp. of liquefaction
- Moderate expression of liquefaction
- Minor expression of liquefaction
- Little to no expression of liquefaction

Basic statistics

- Total CPT number: 39
- 74% little liquefaction
- 26% minor liquefaction
- 0% moderate liquefaction
- 0% moderate to major liquefaction
- 0% major liquefaction
- 0% severe liquefaction

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT01

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

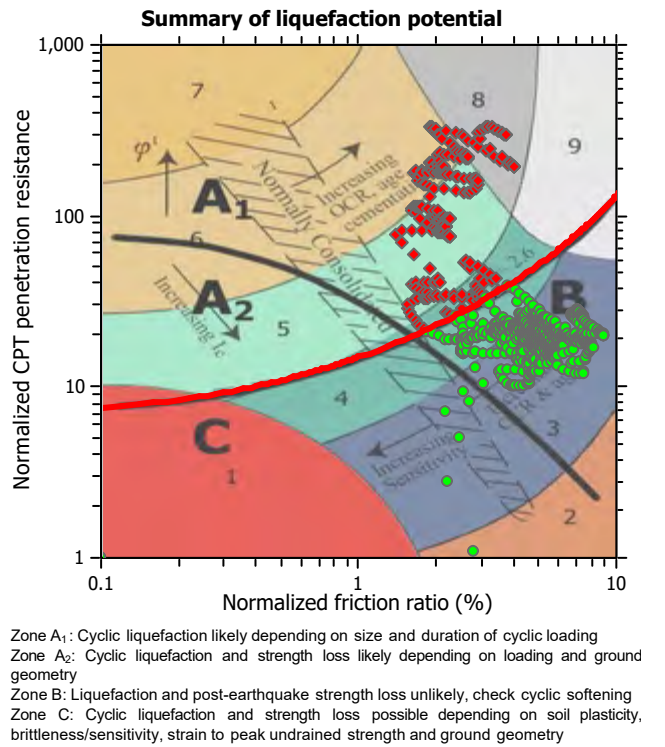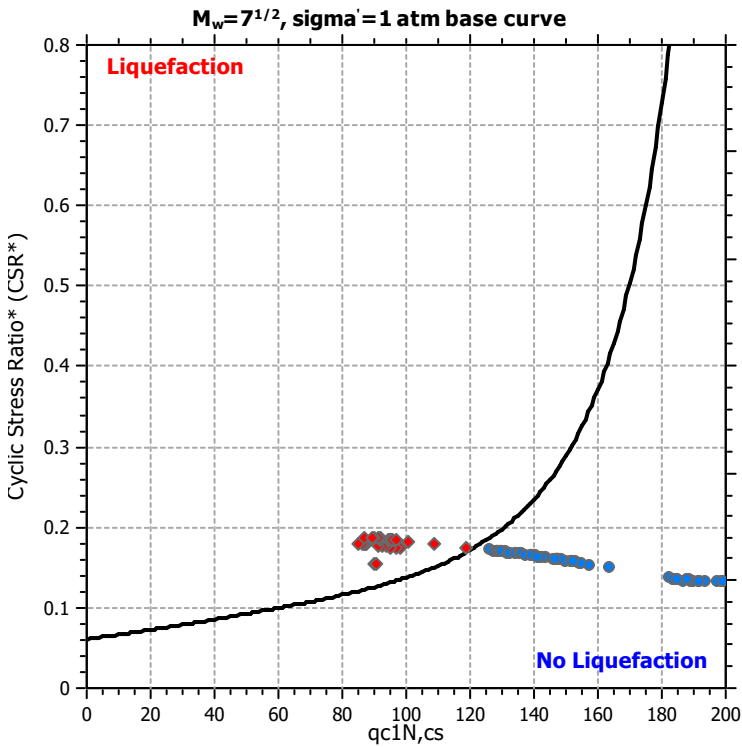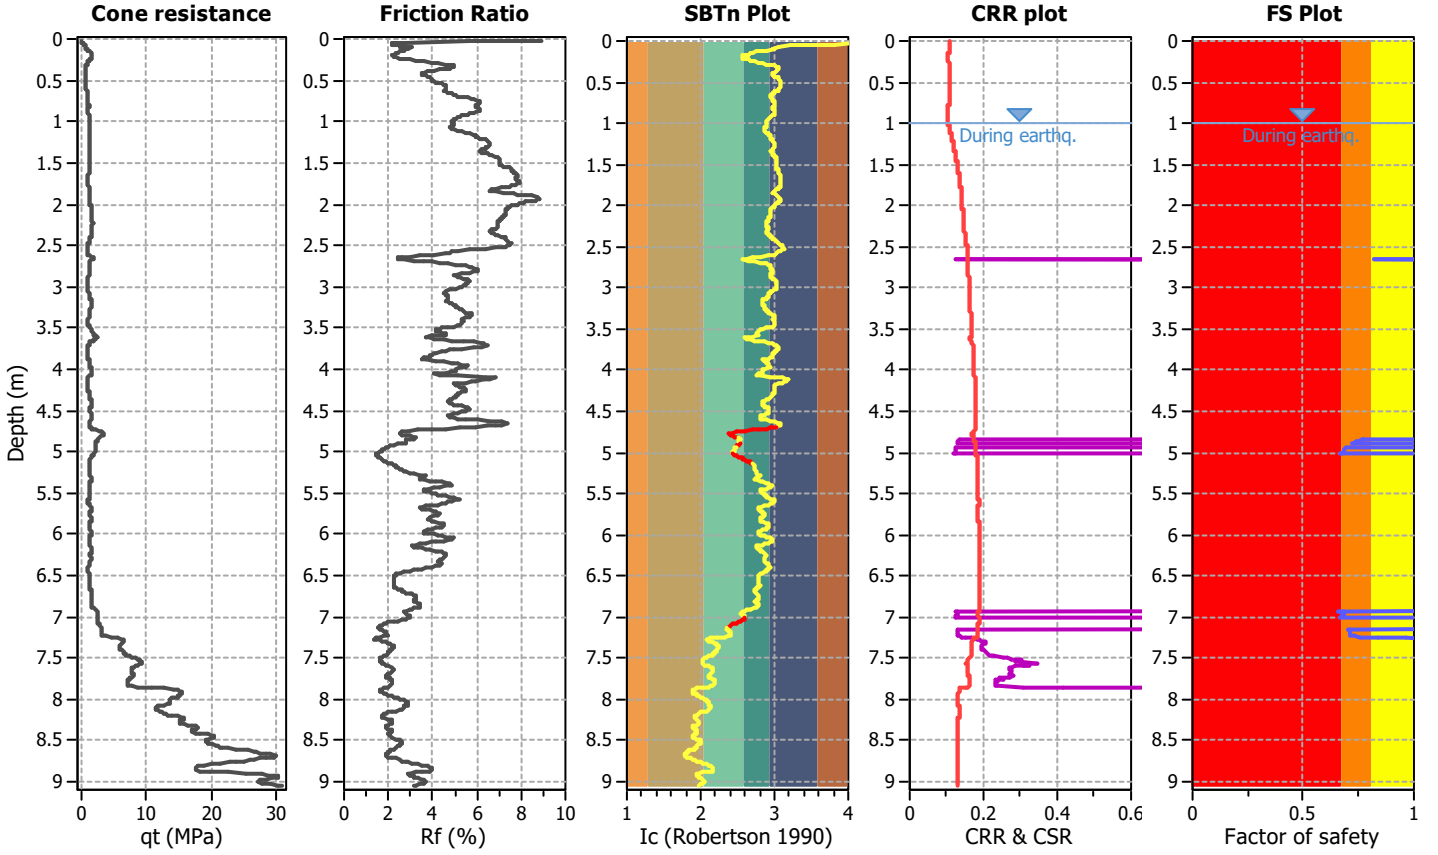

CPT basic interpretation plots

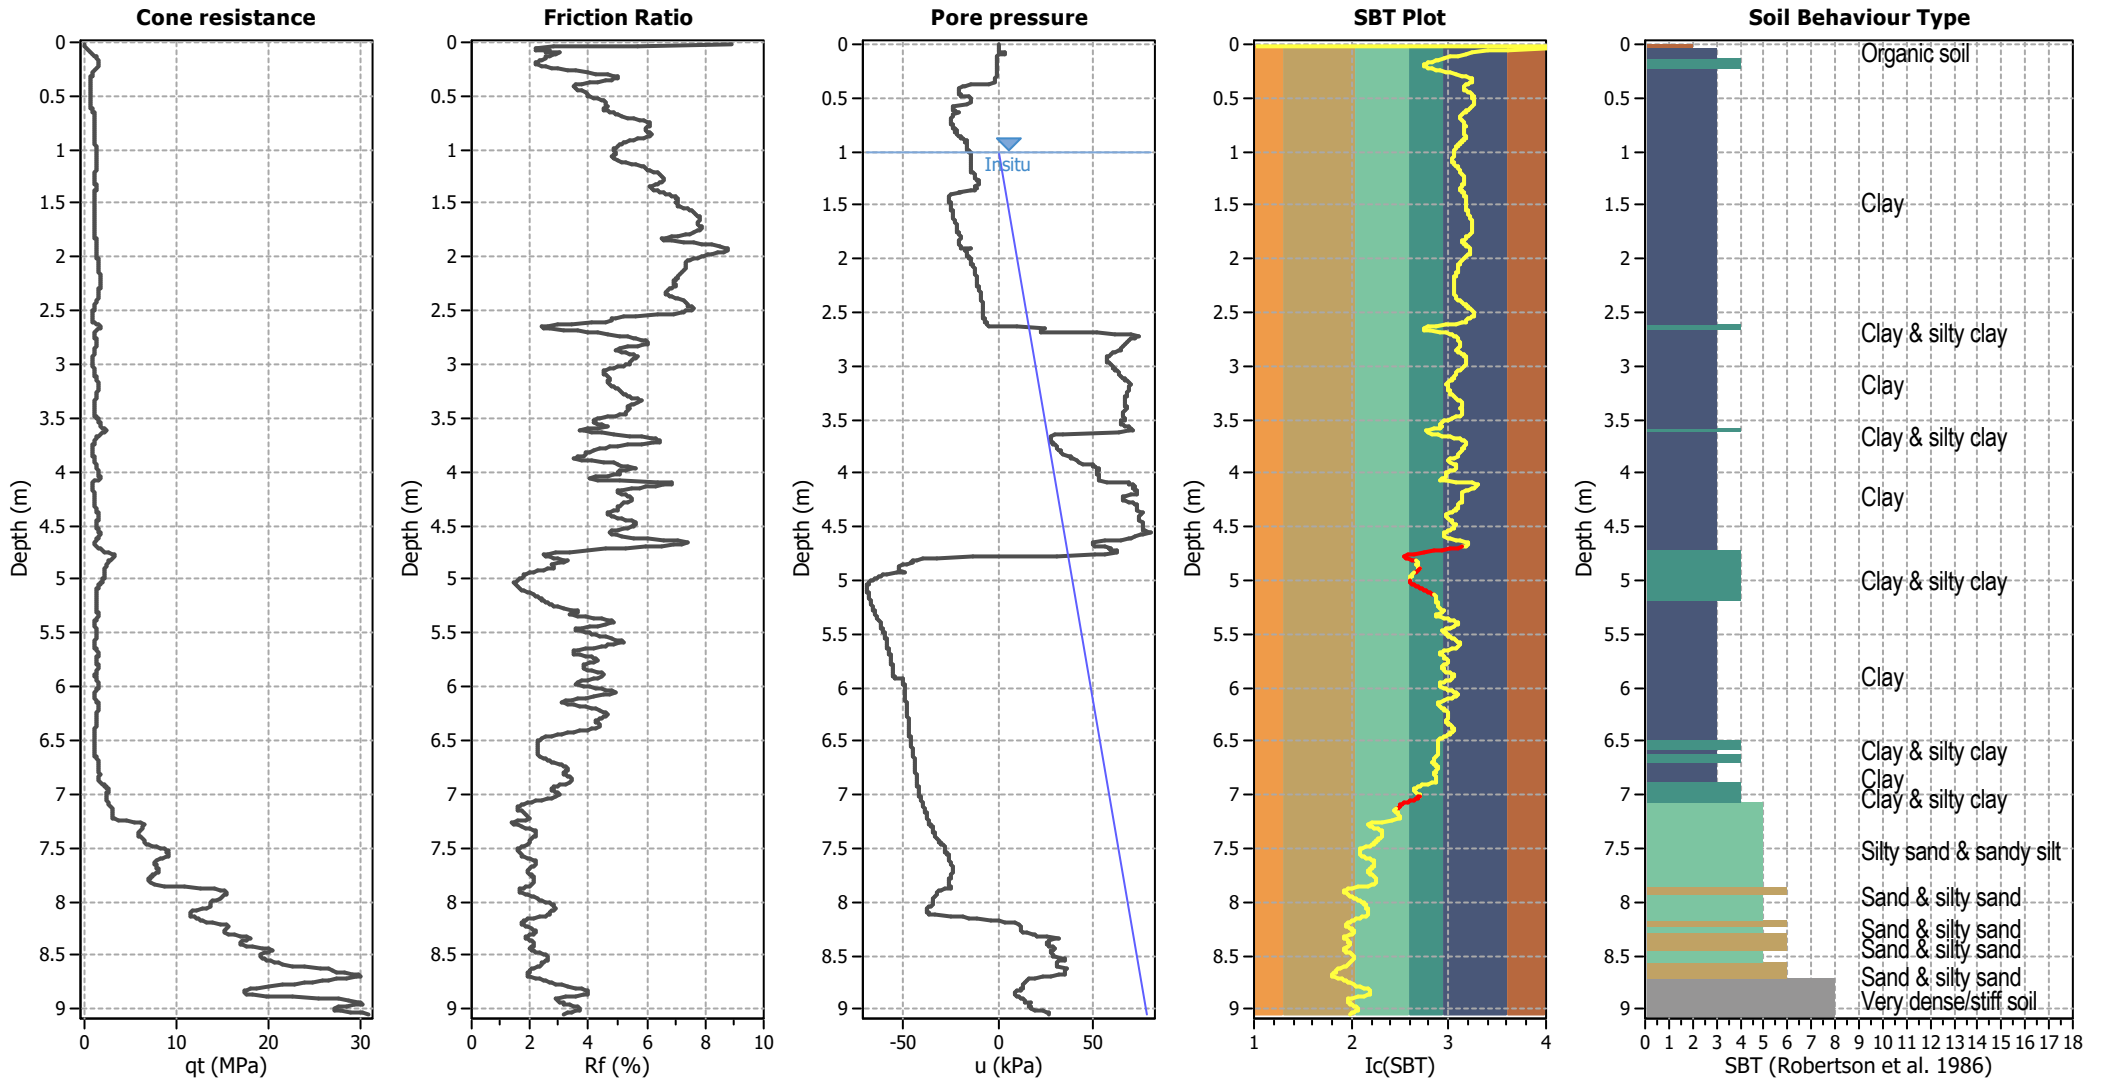


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

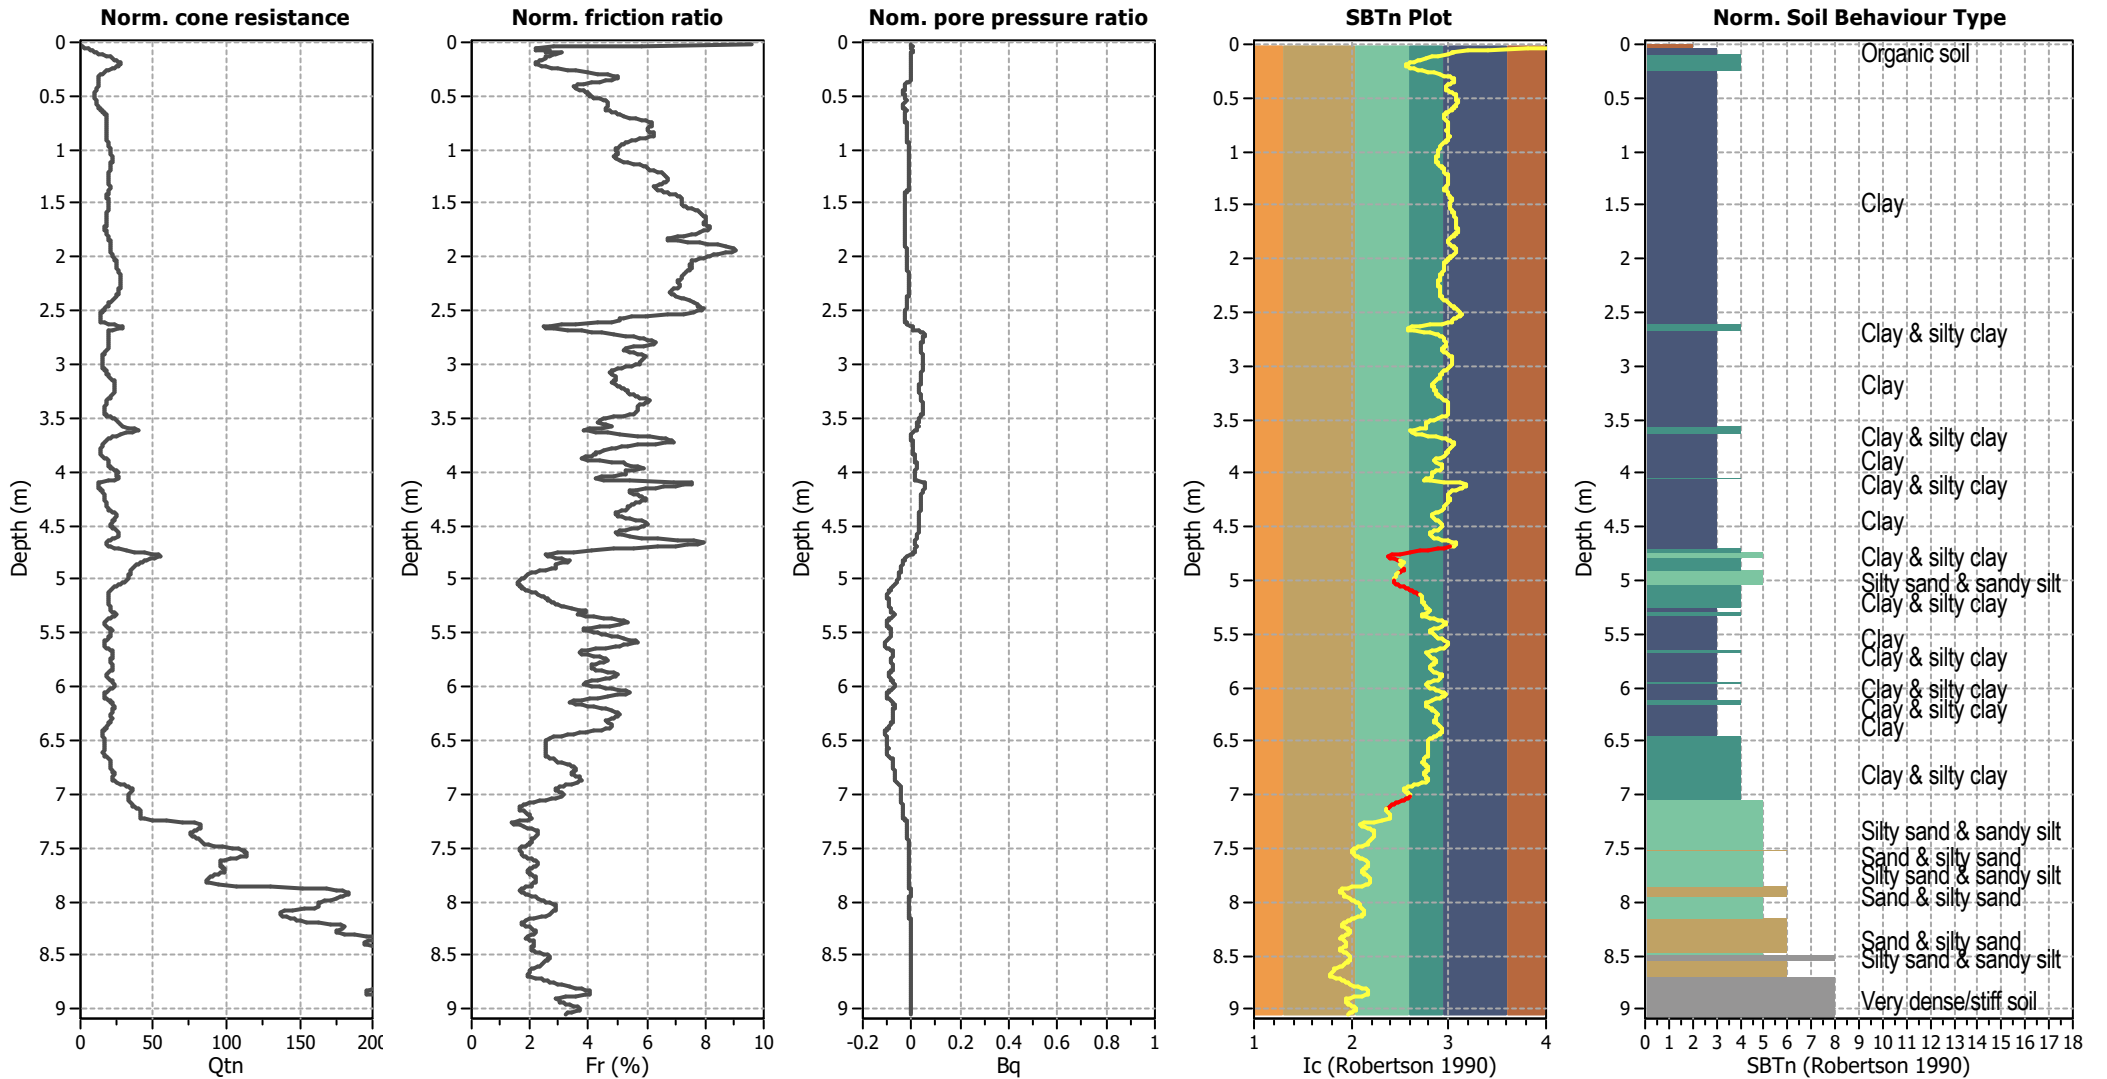


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

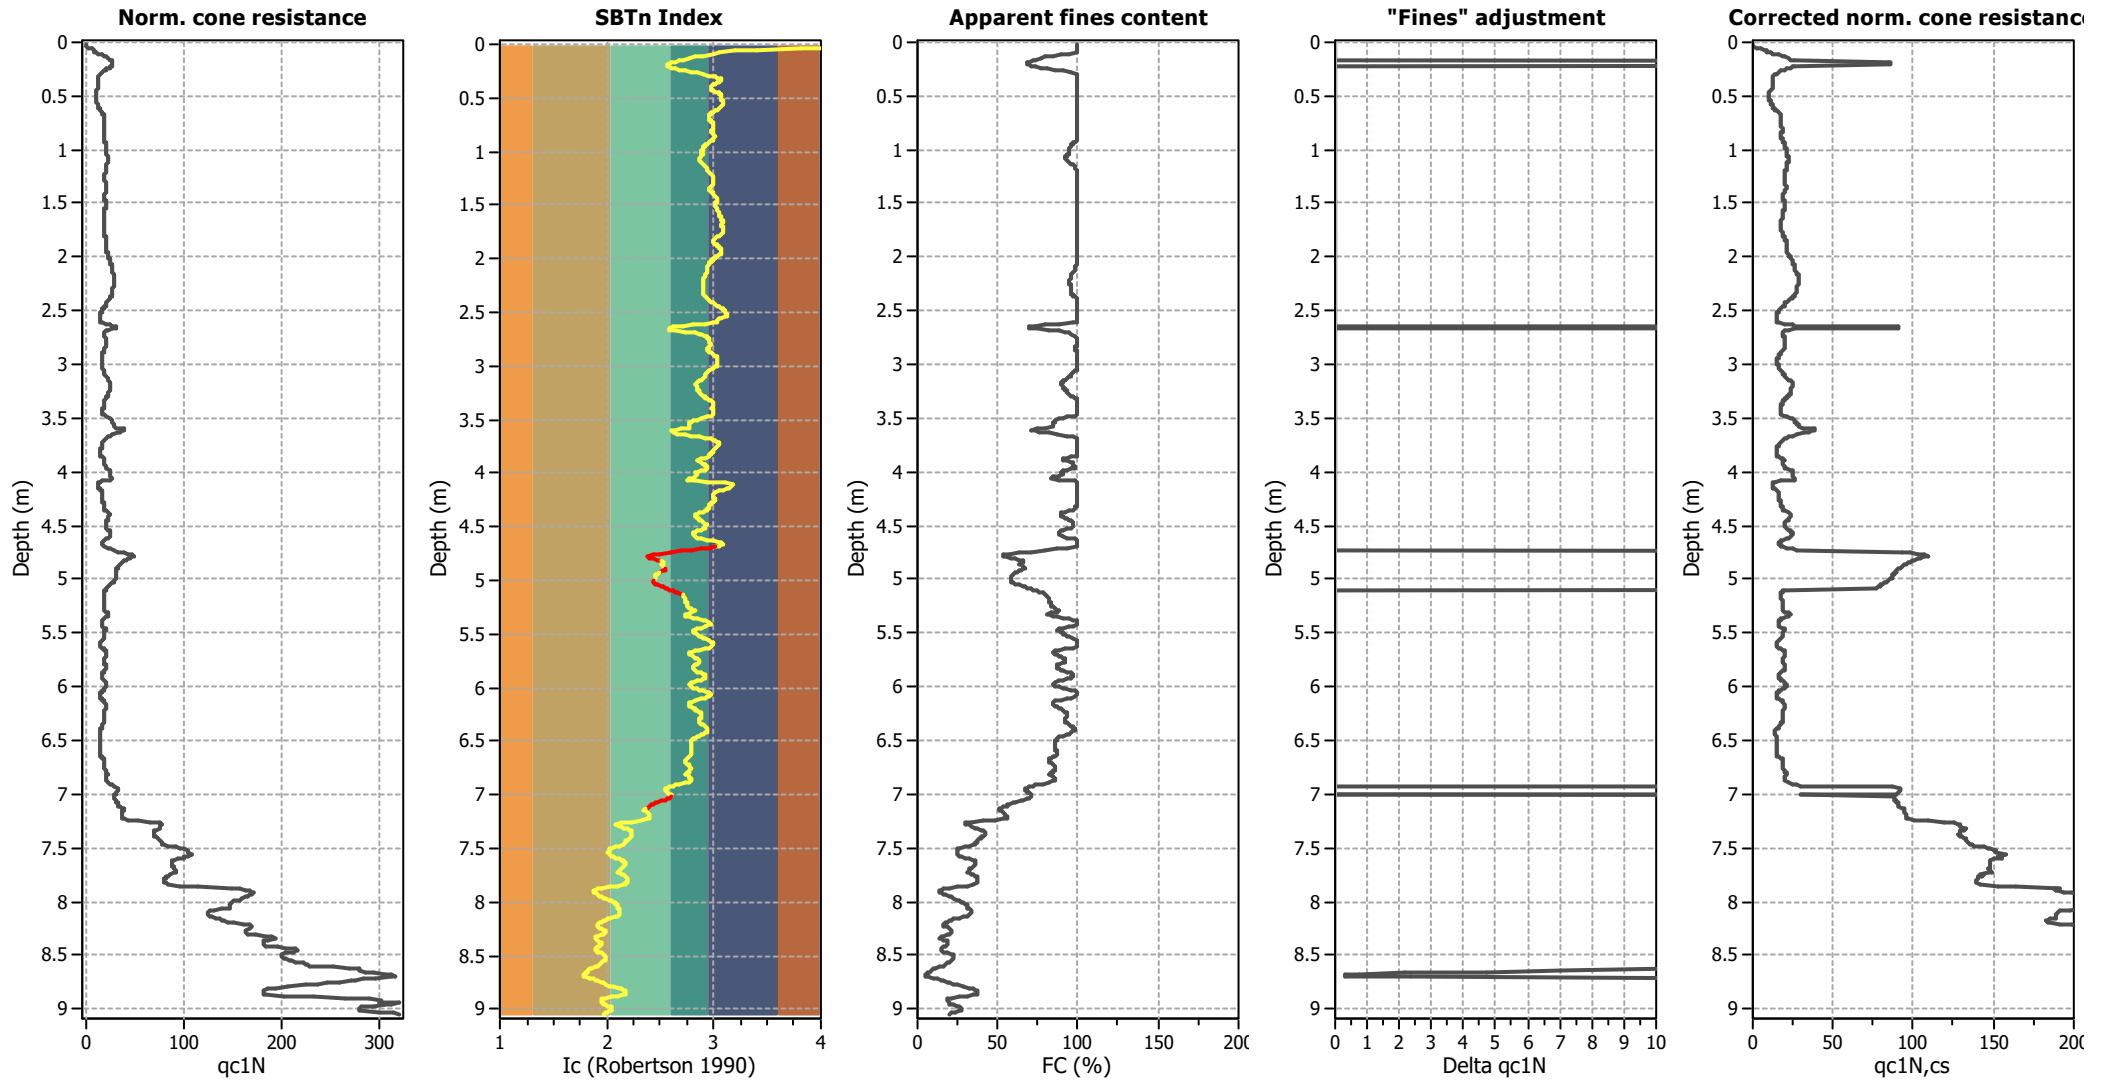

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

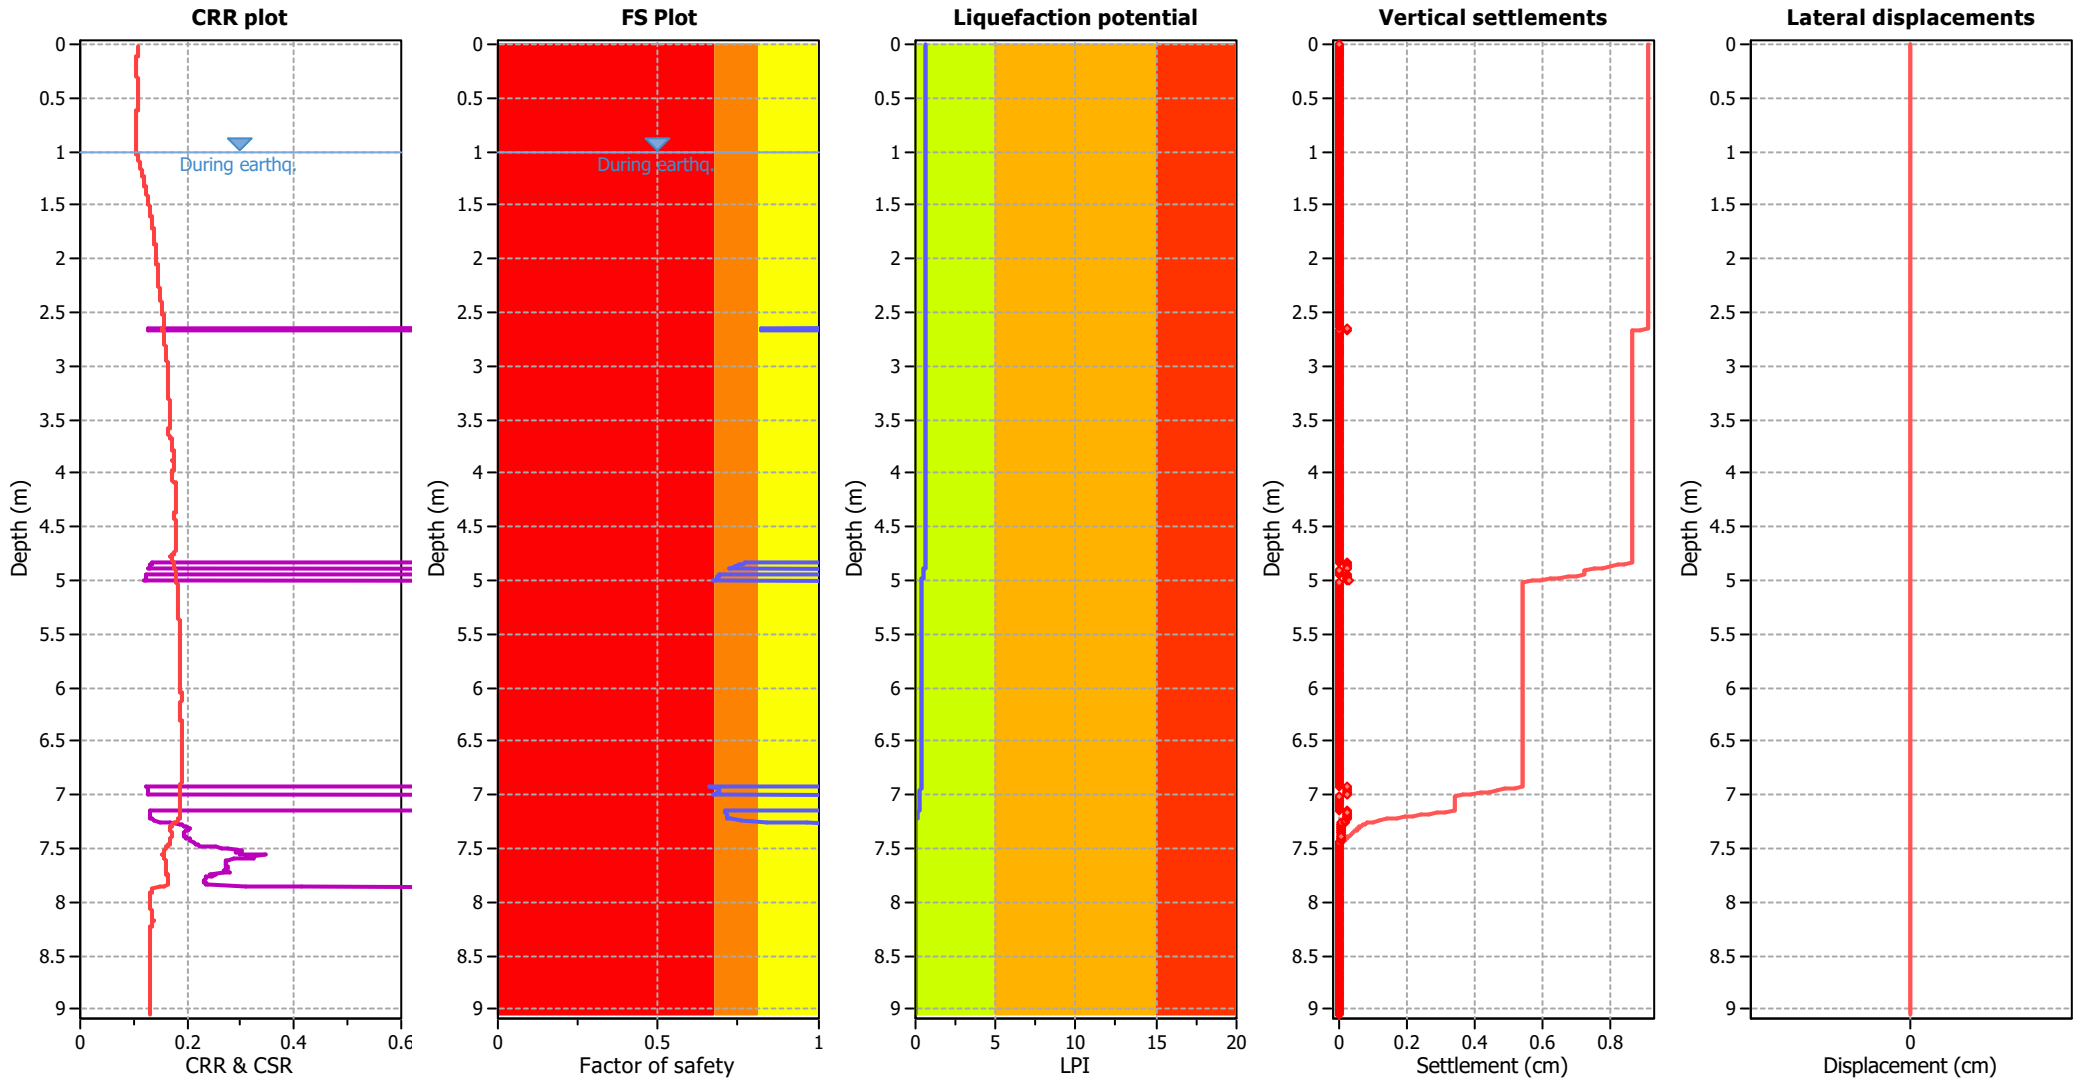

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

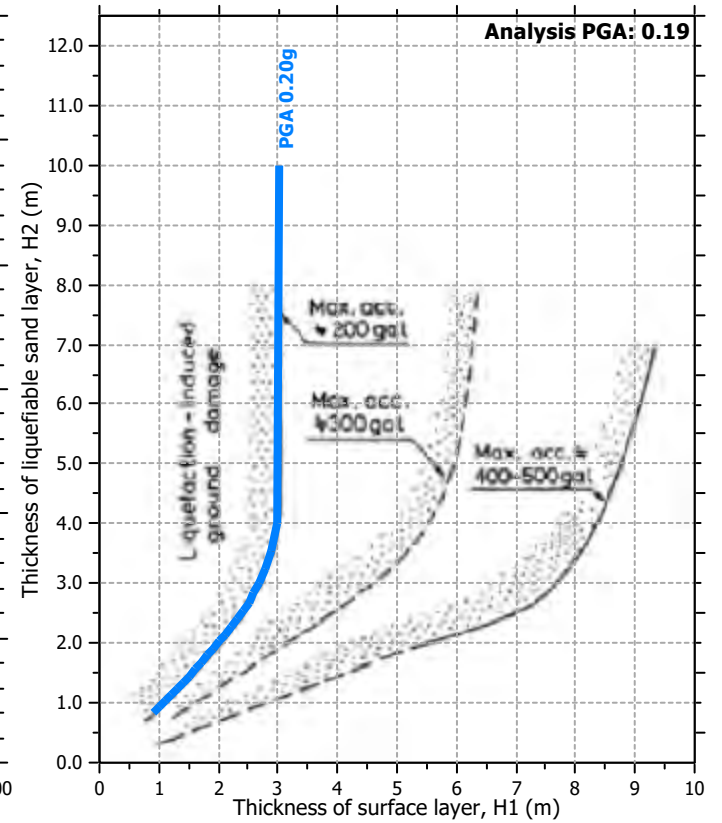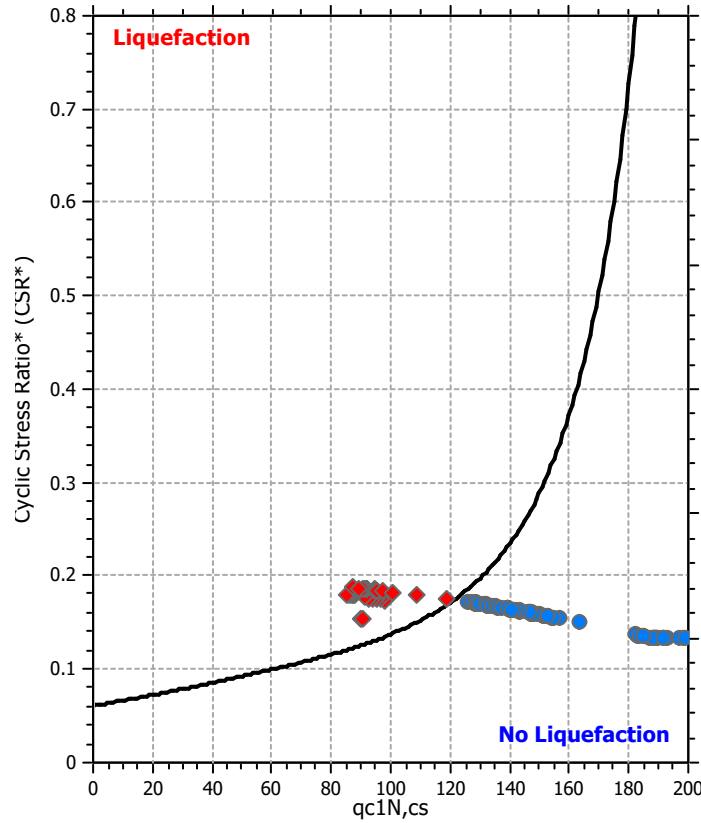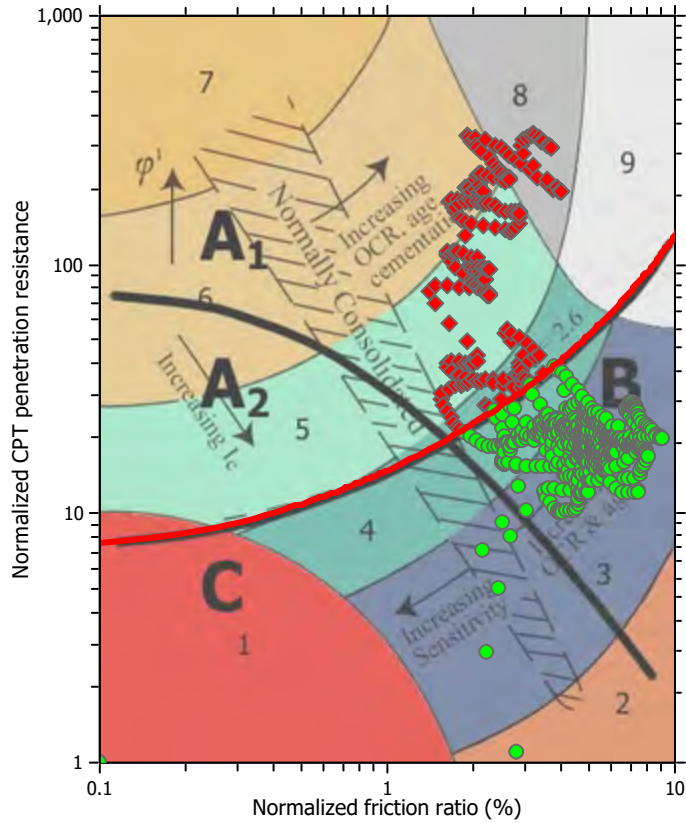

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

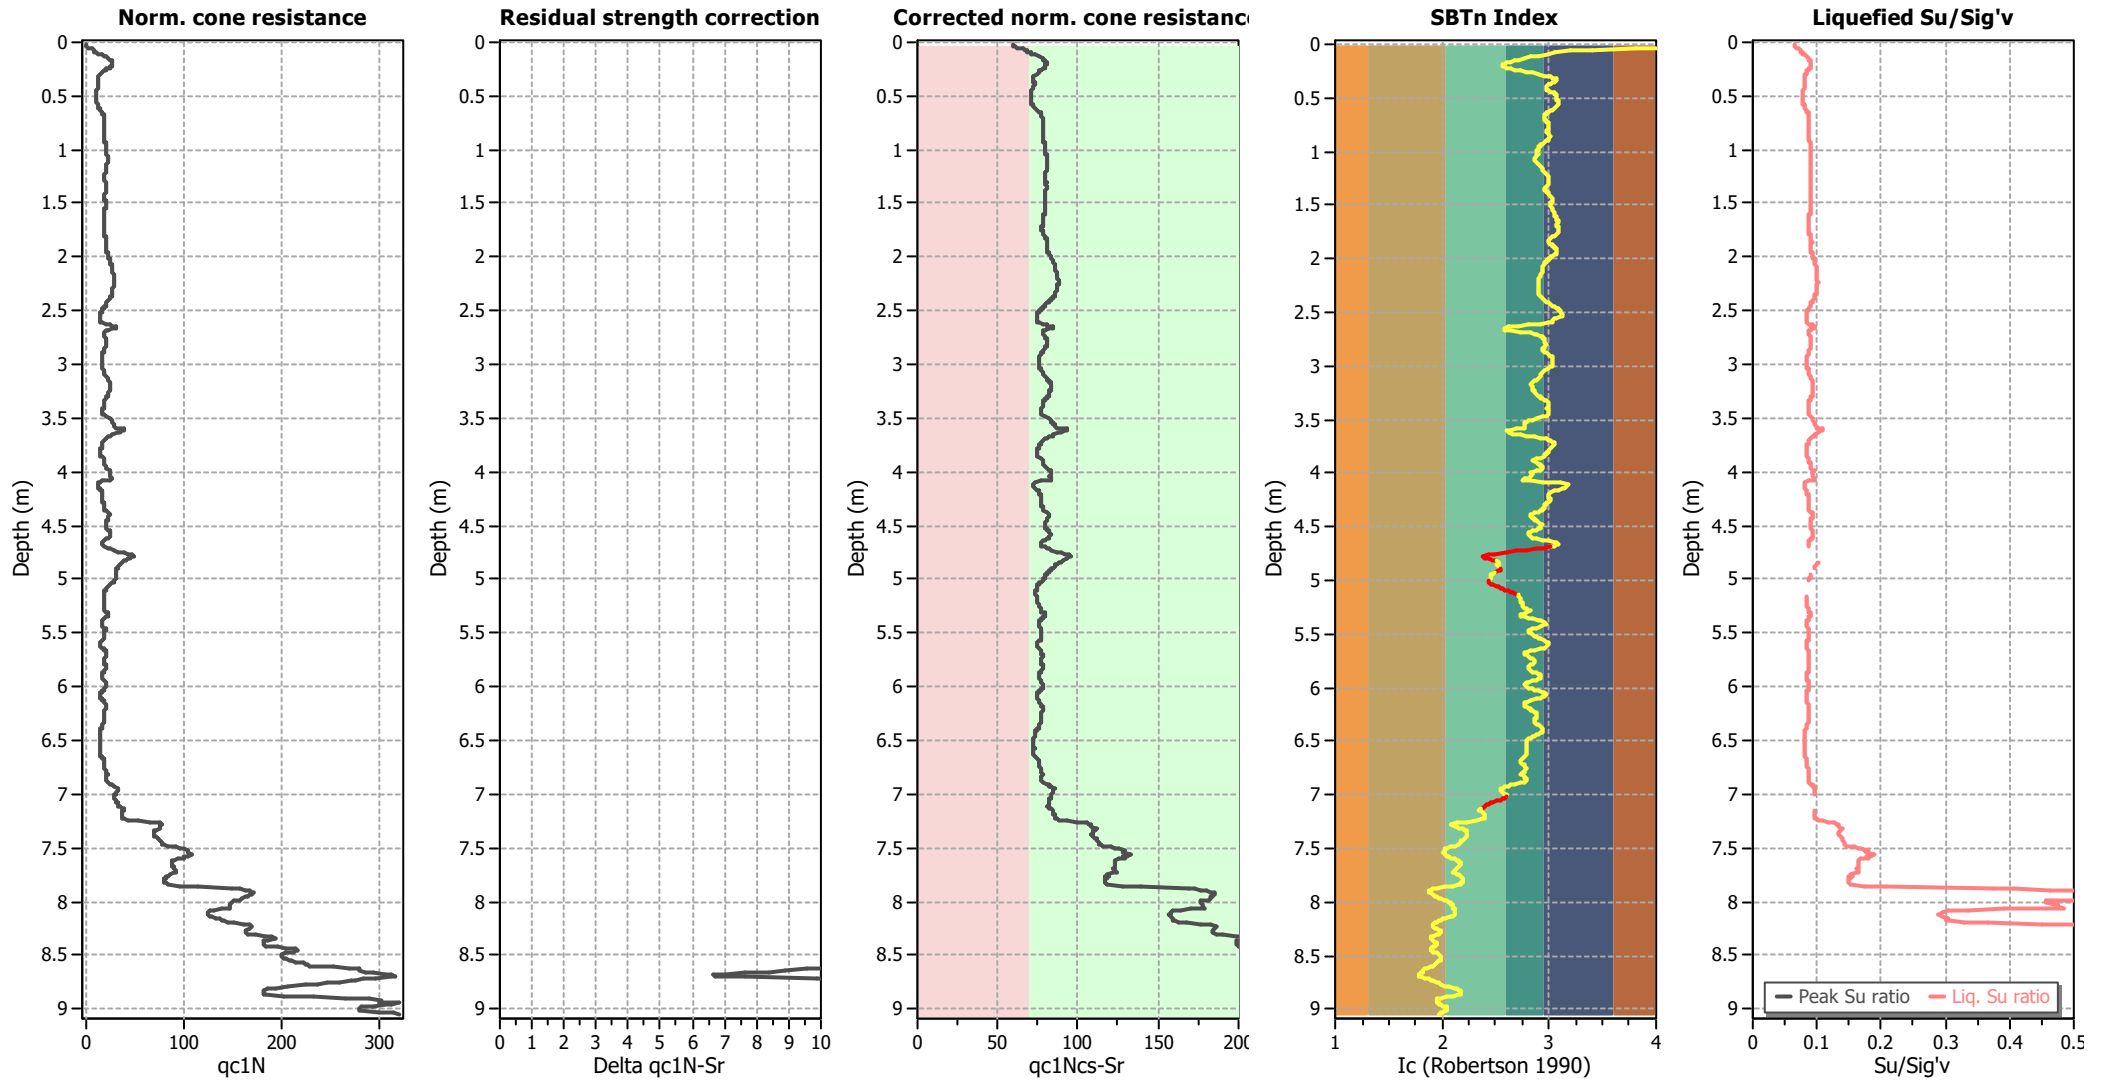

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

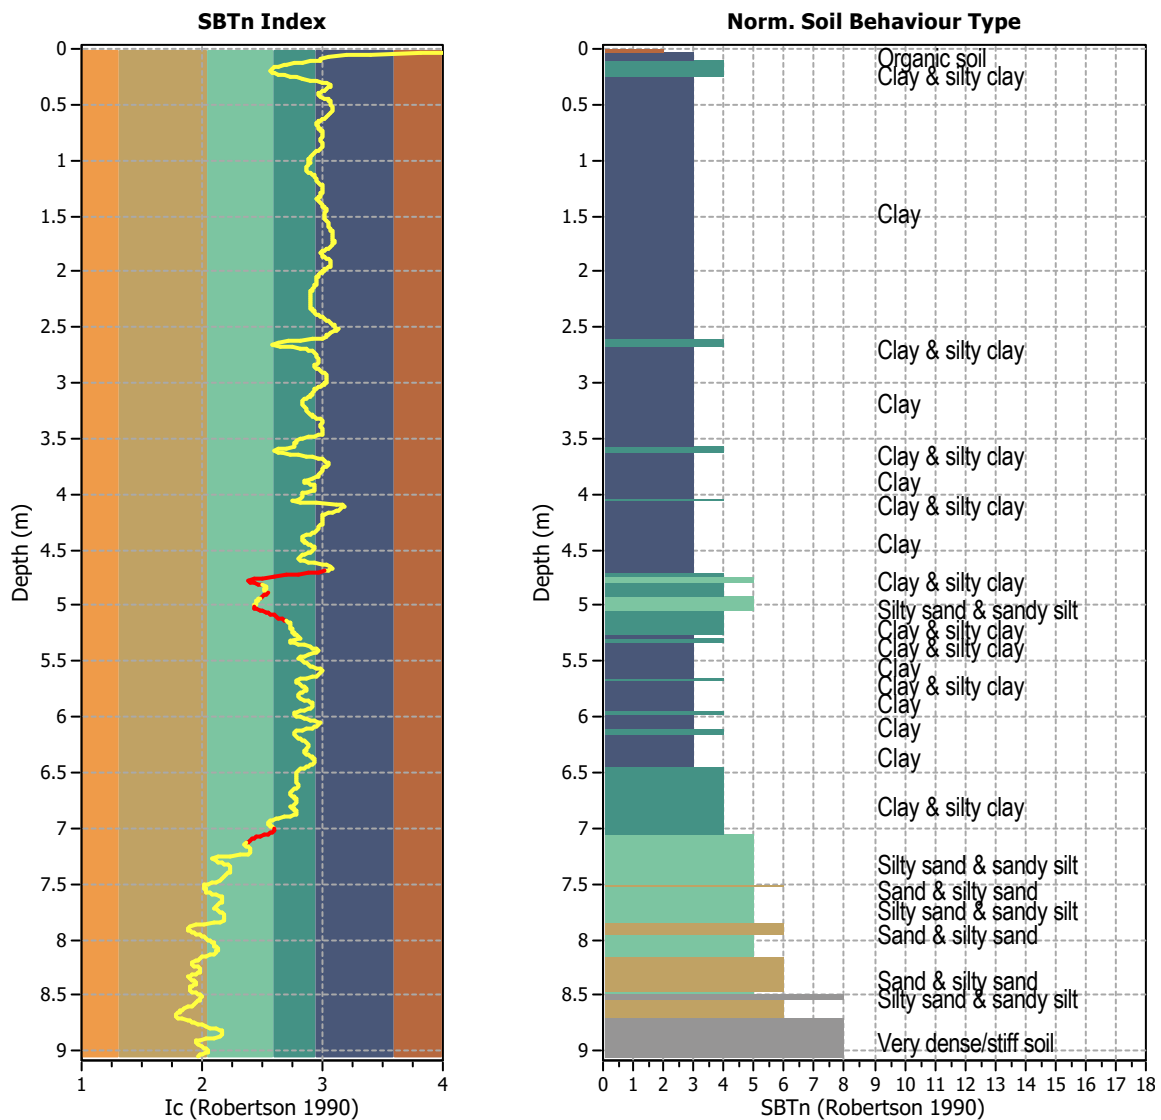

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	906
I_c maximum check value:	3.00	Total points excluded:	46
I_c change ratio value:	0.0100	Exclusion percentage:	5.08%
Minimum number of points in layer:	4	Number of layers detected:	5


Estimation of post-earthquake settlements

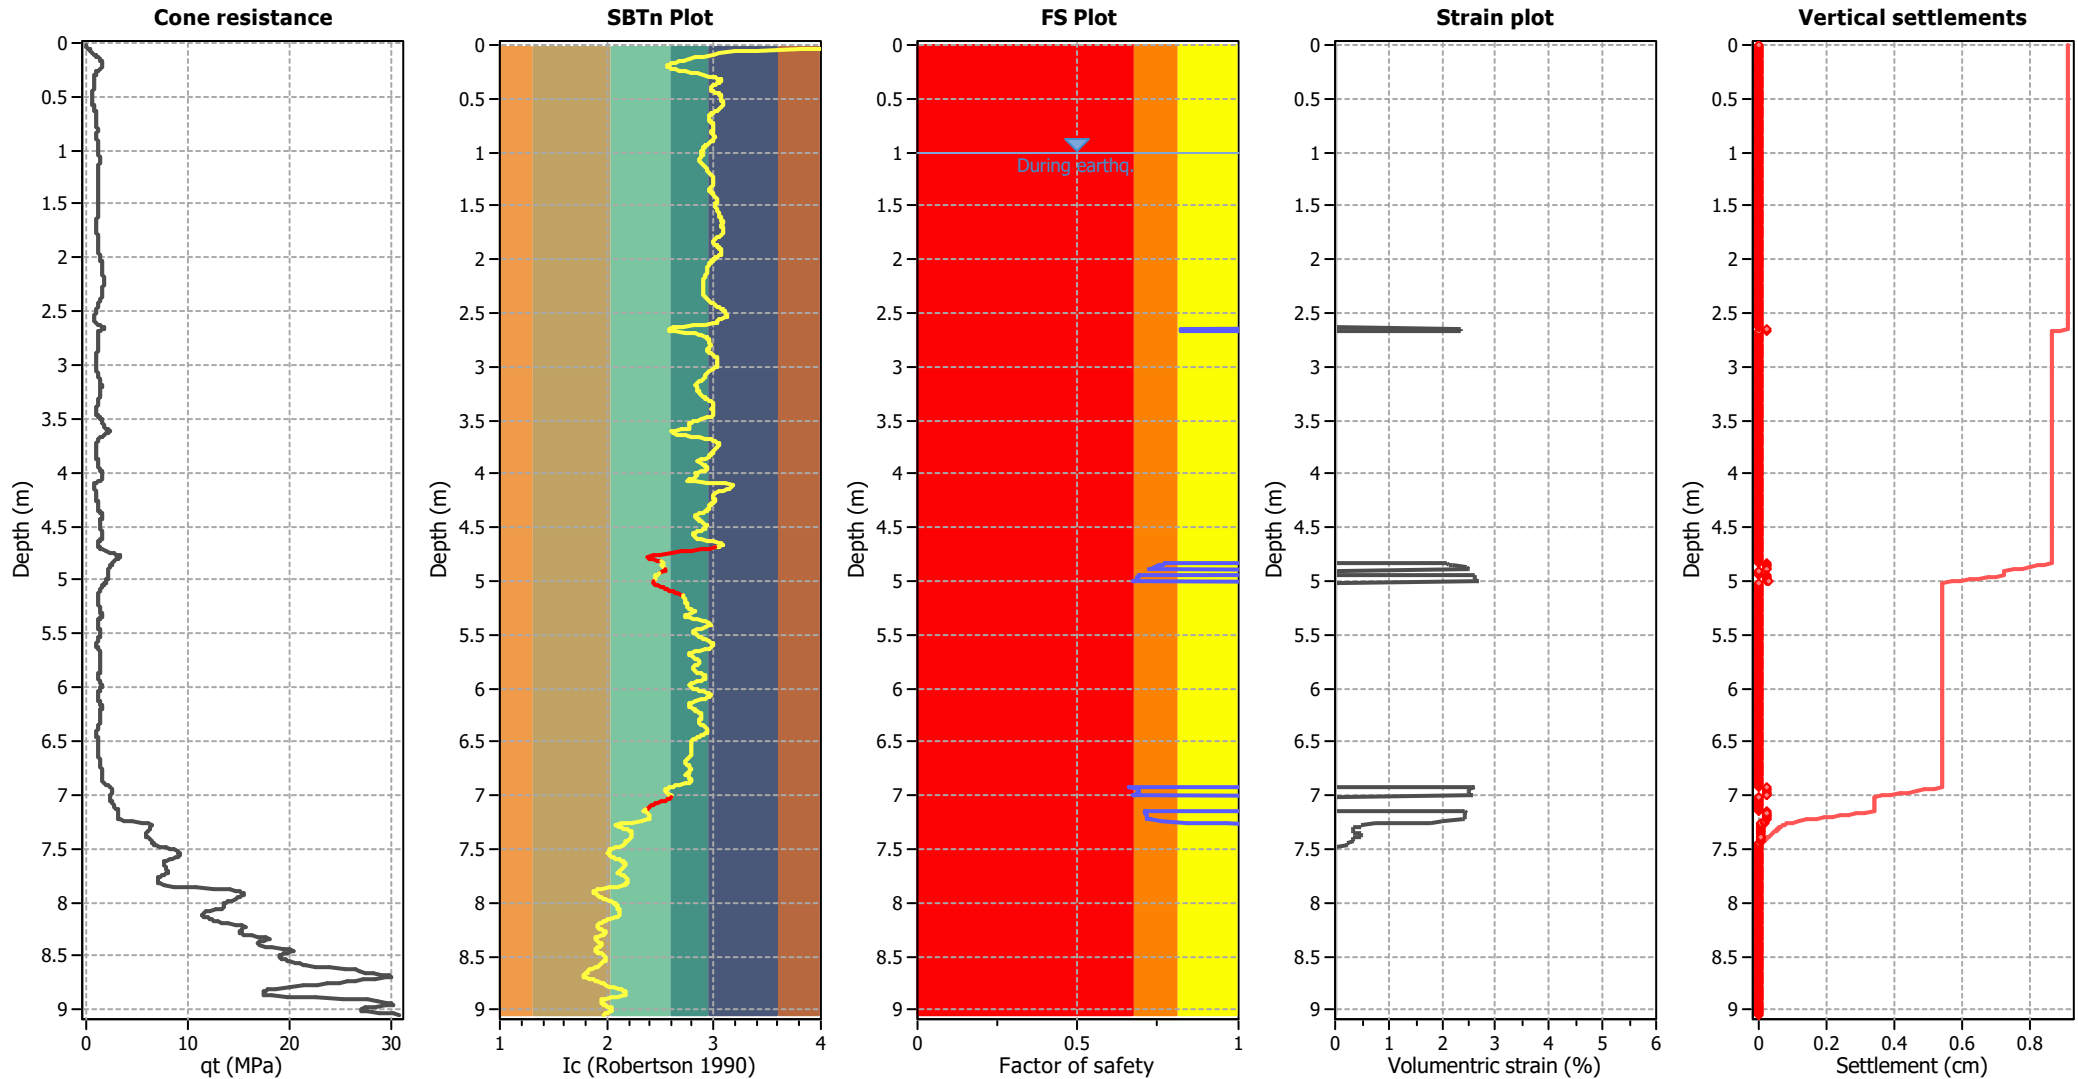

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

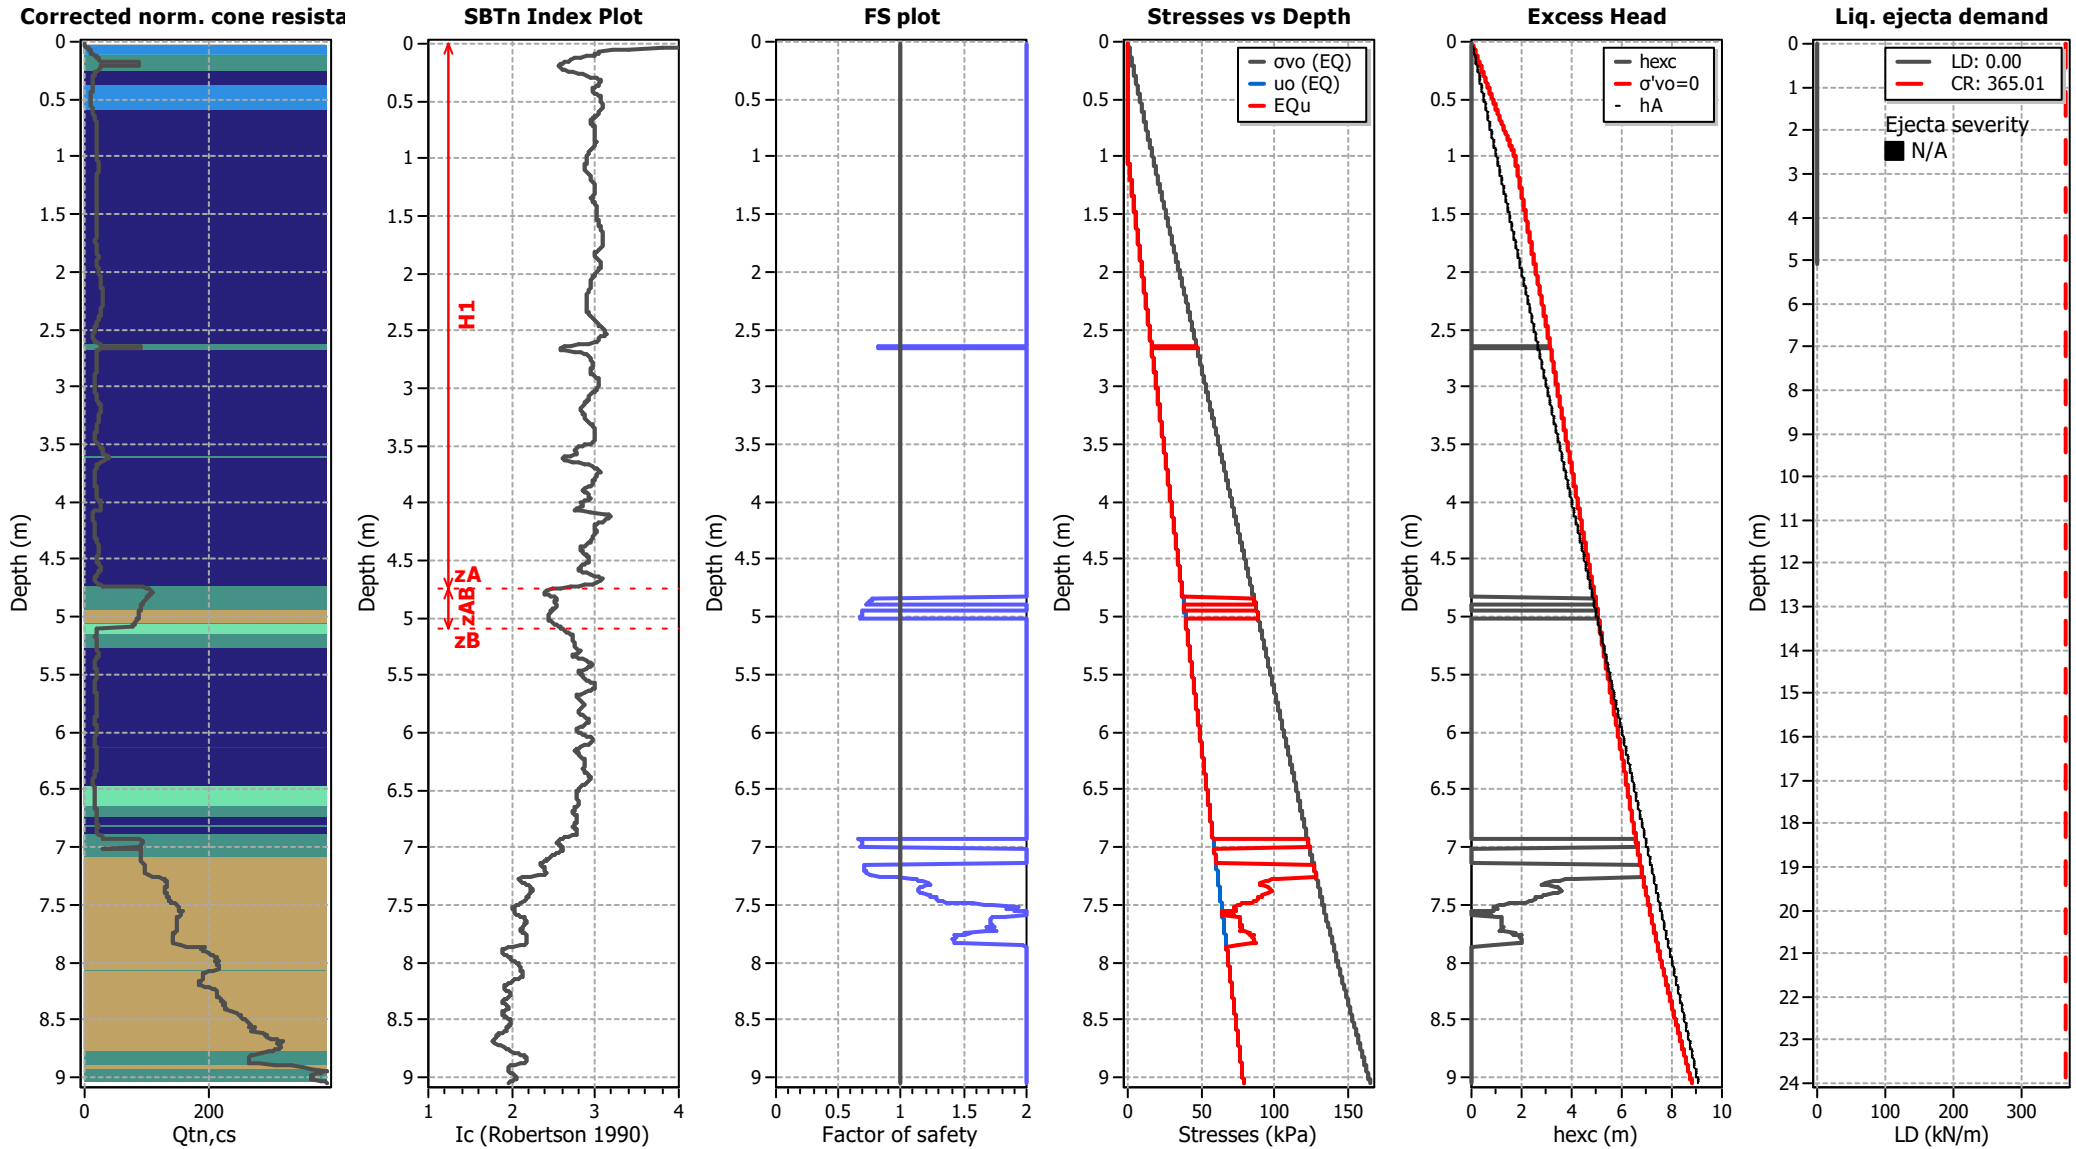

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT02

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

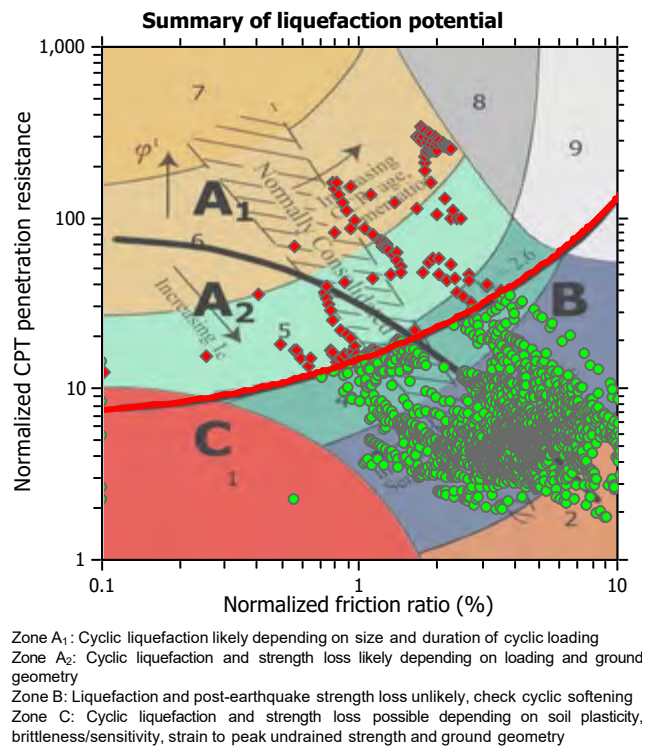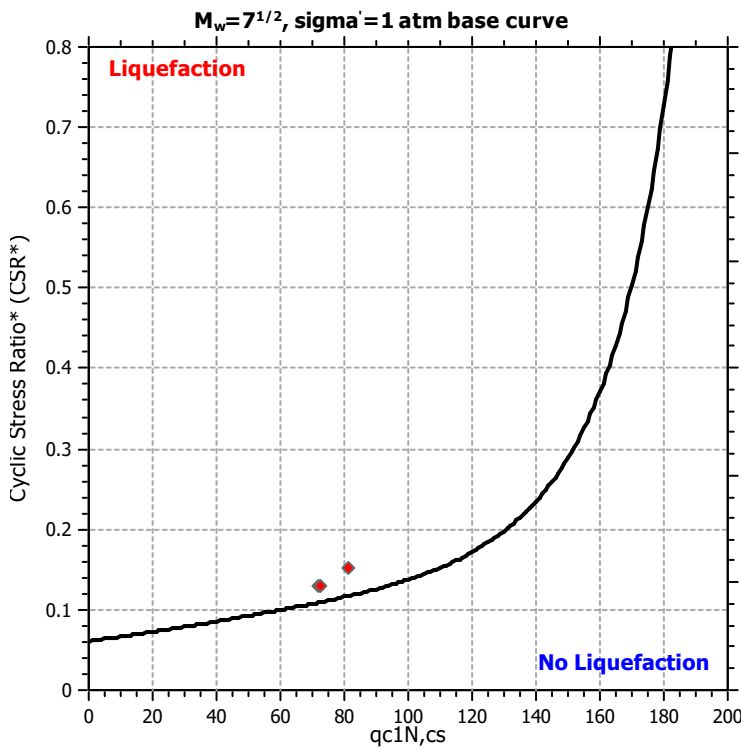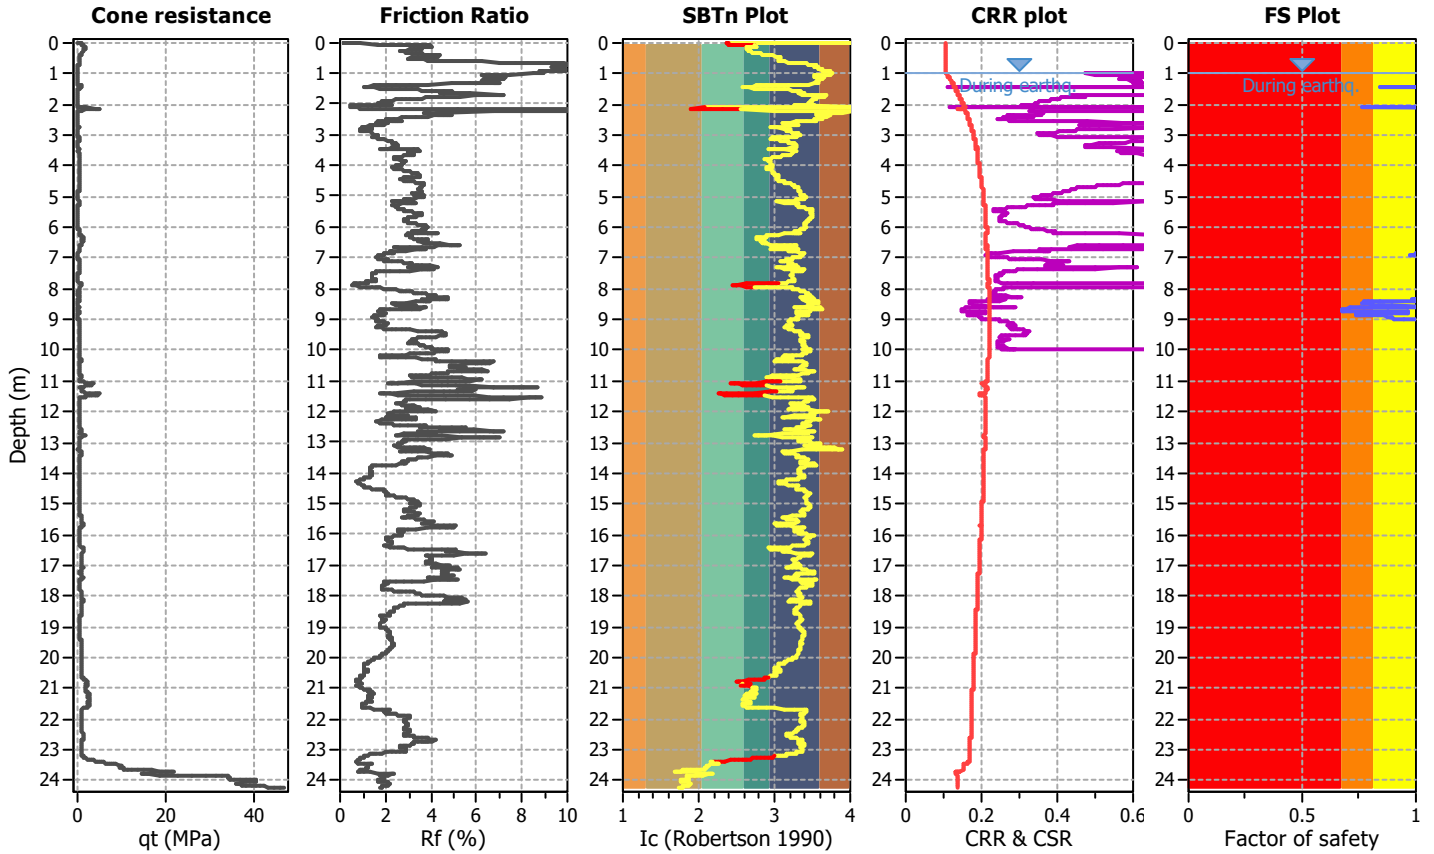

CPT basic interpretation plots

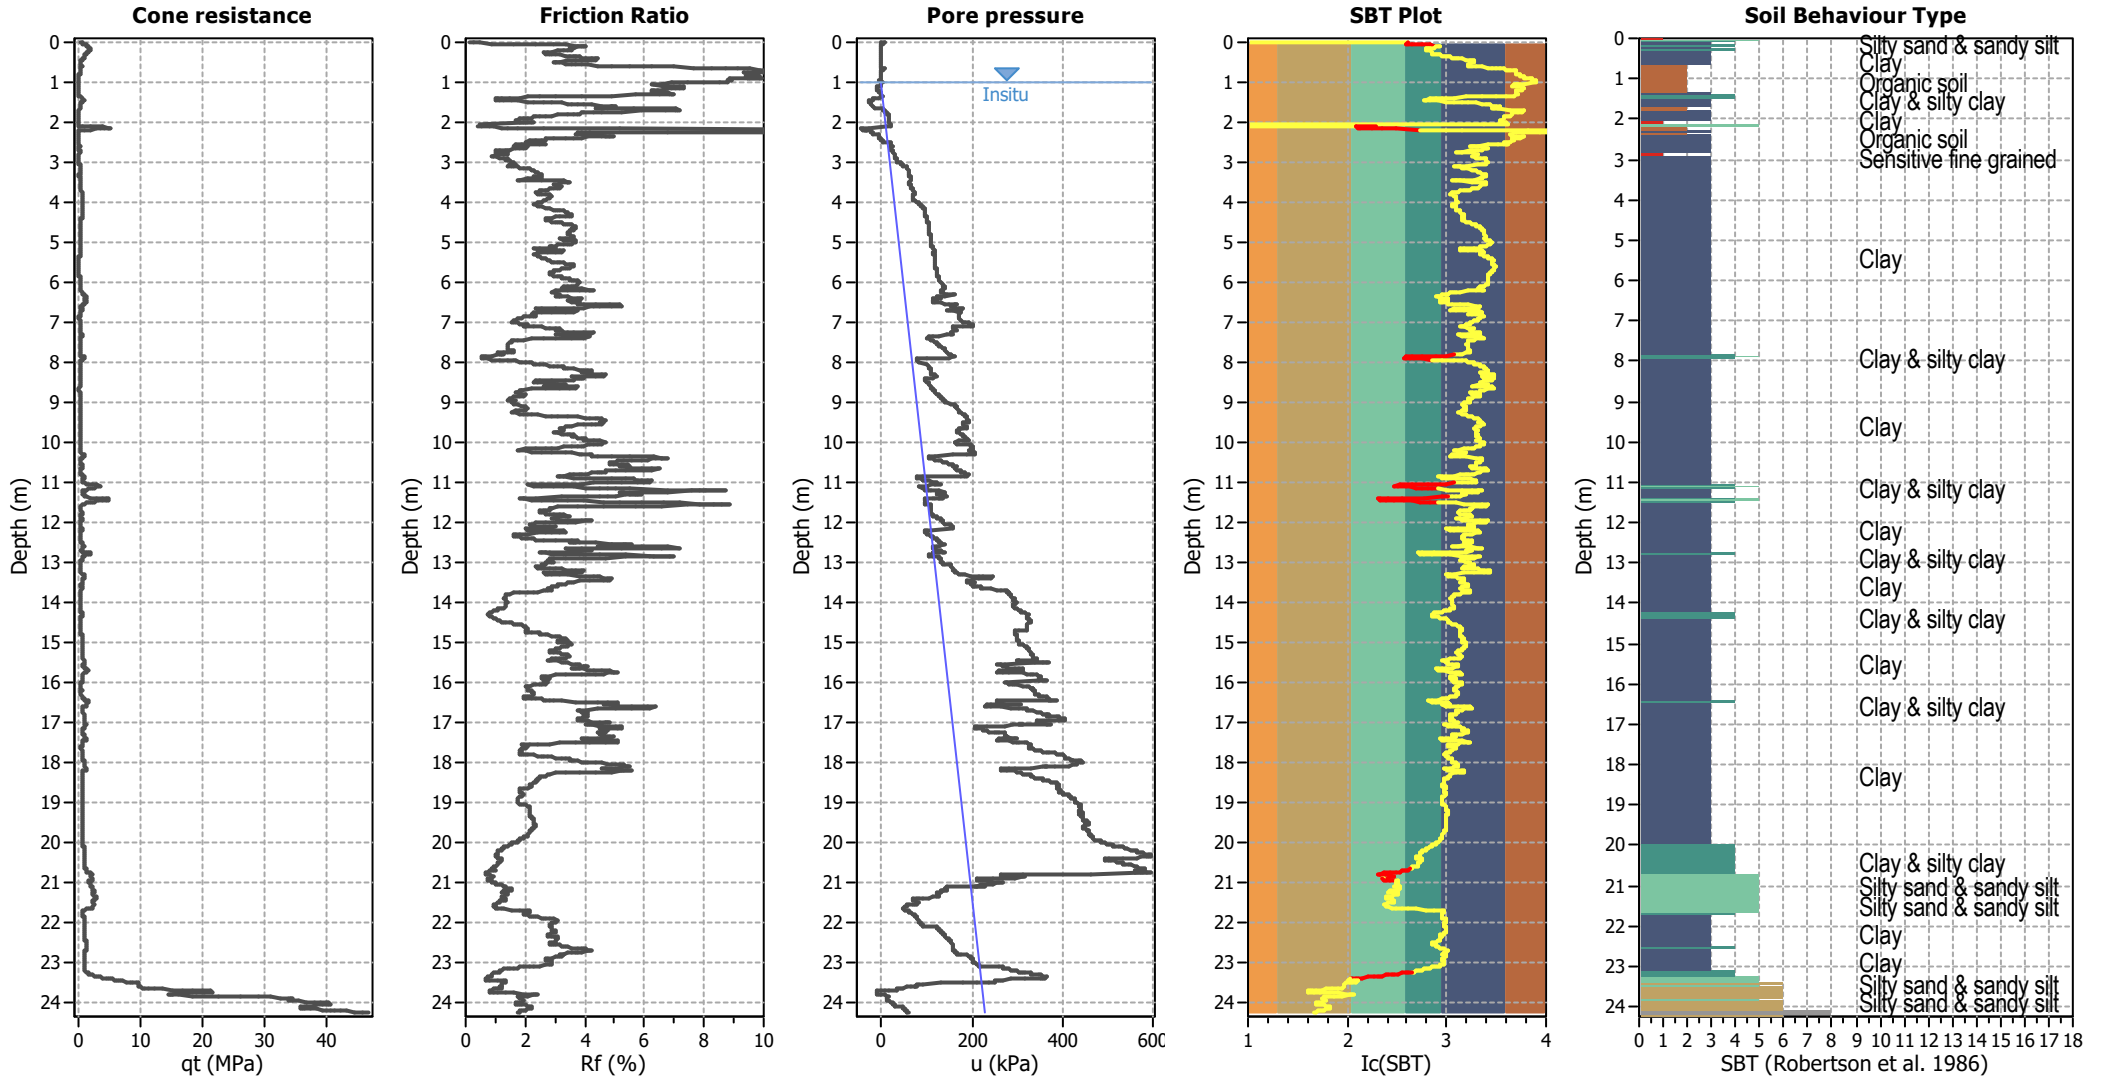


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

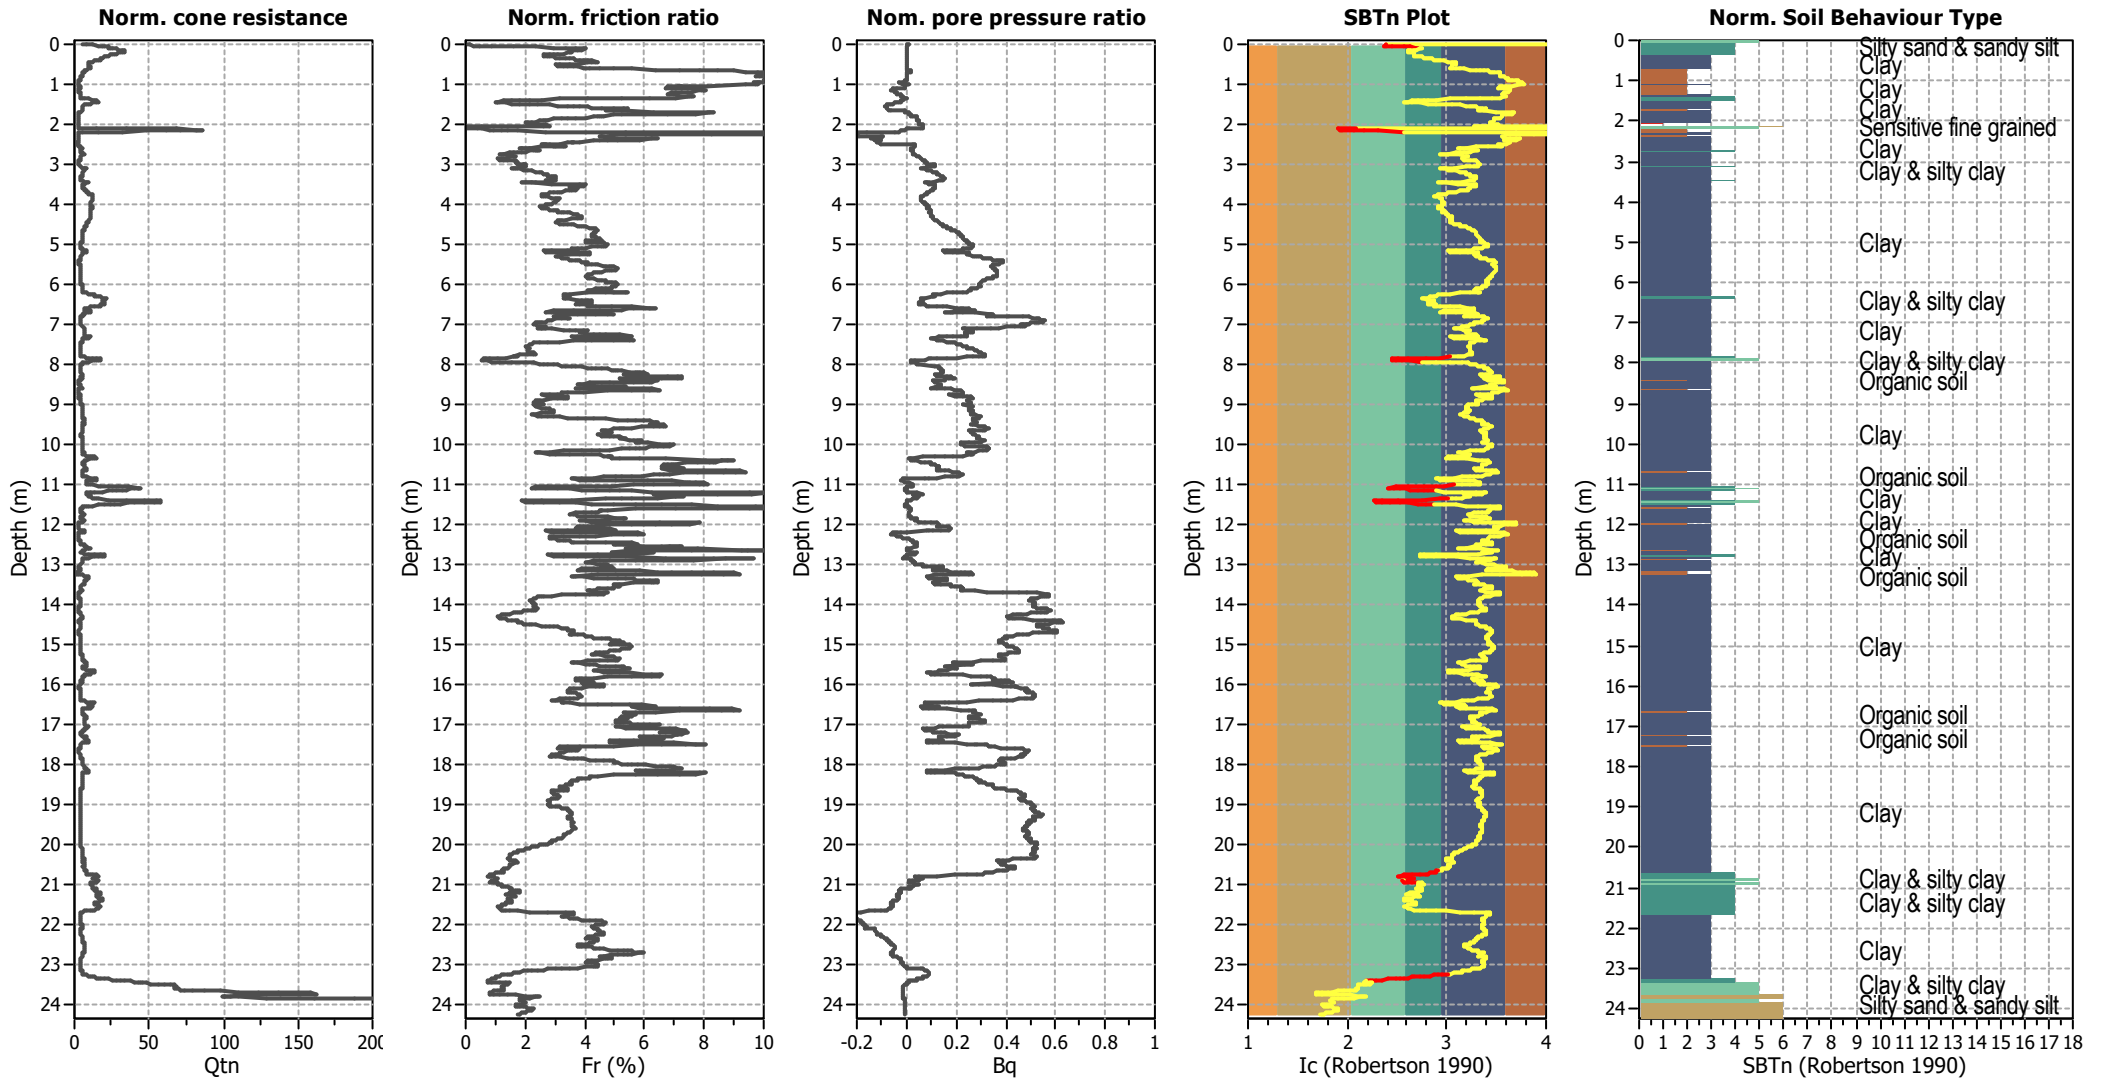


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

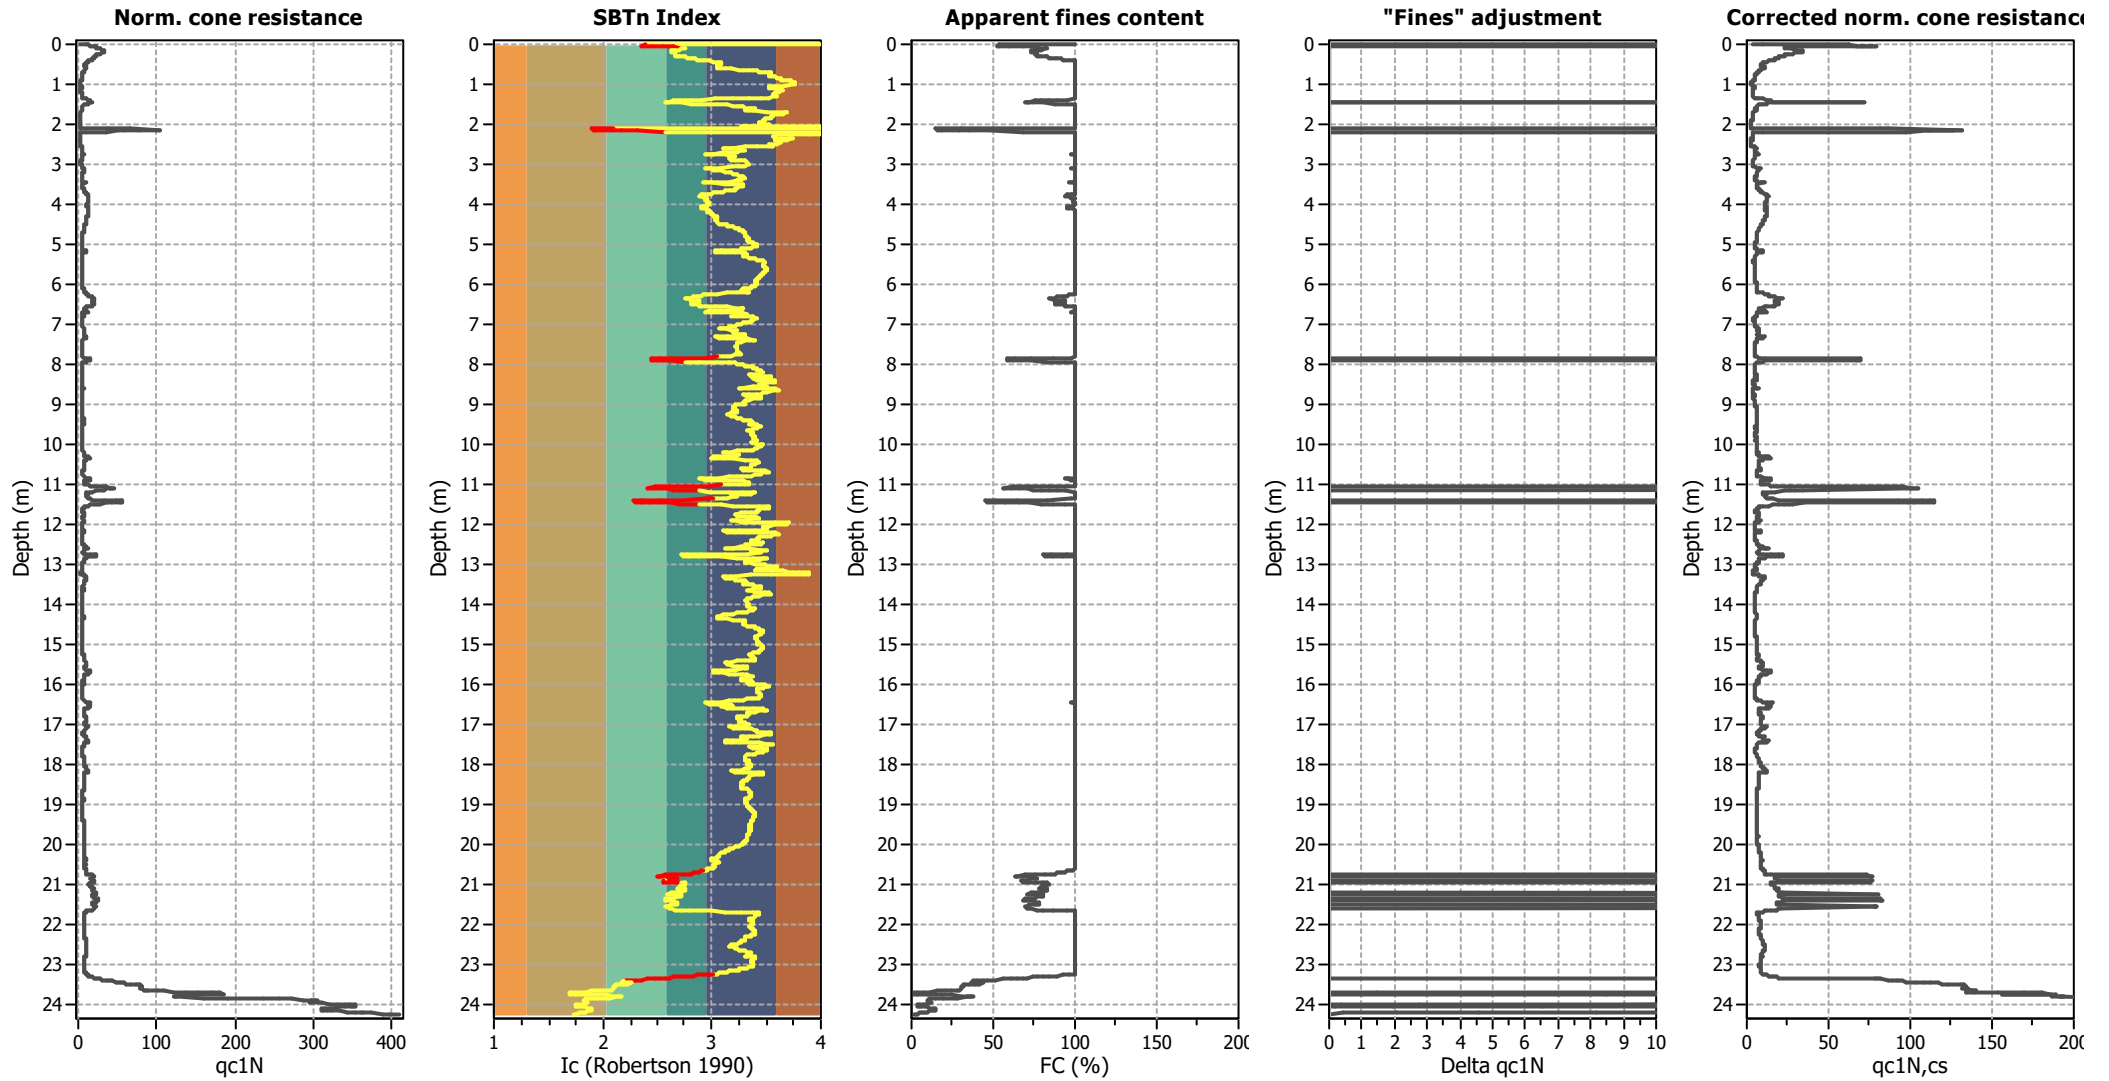

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

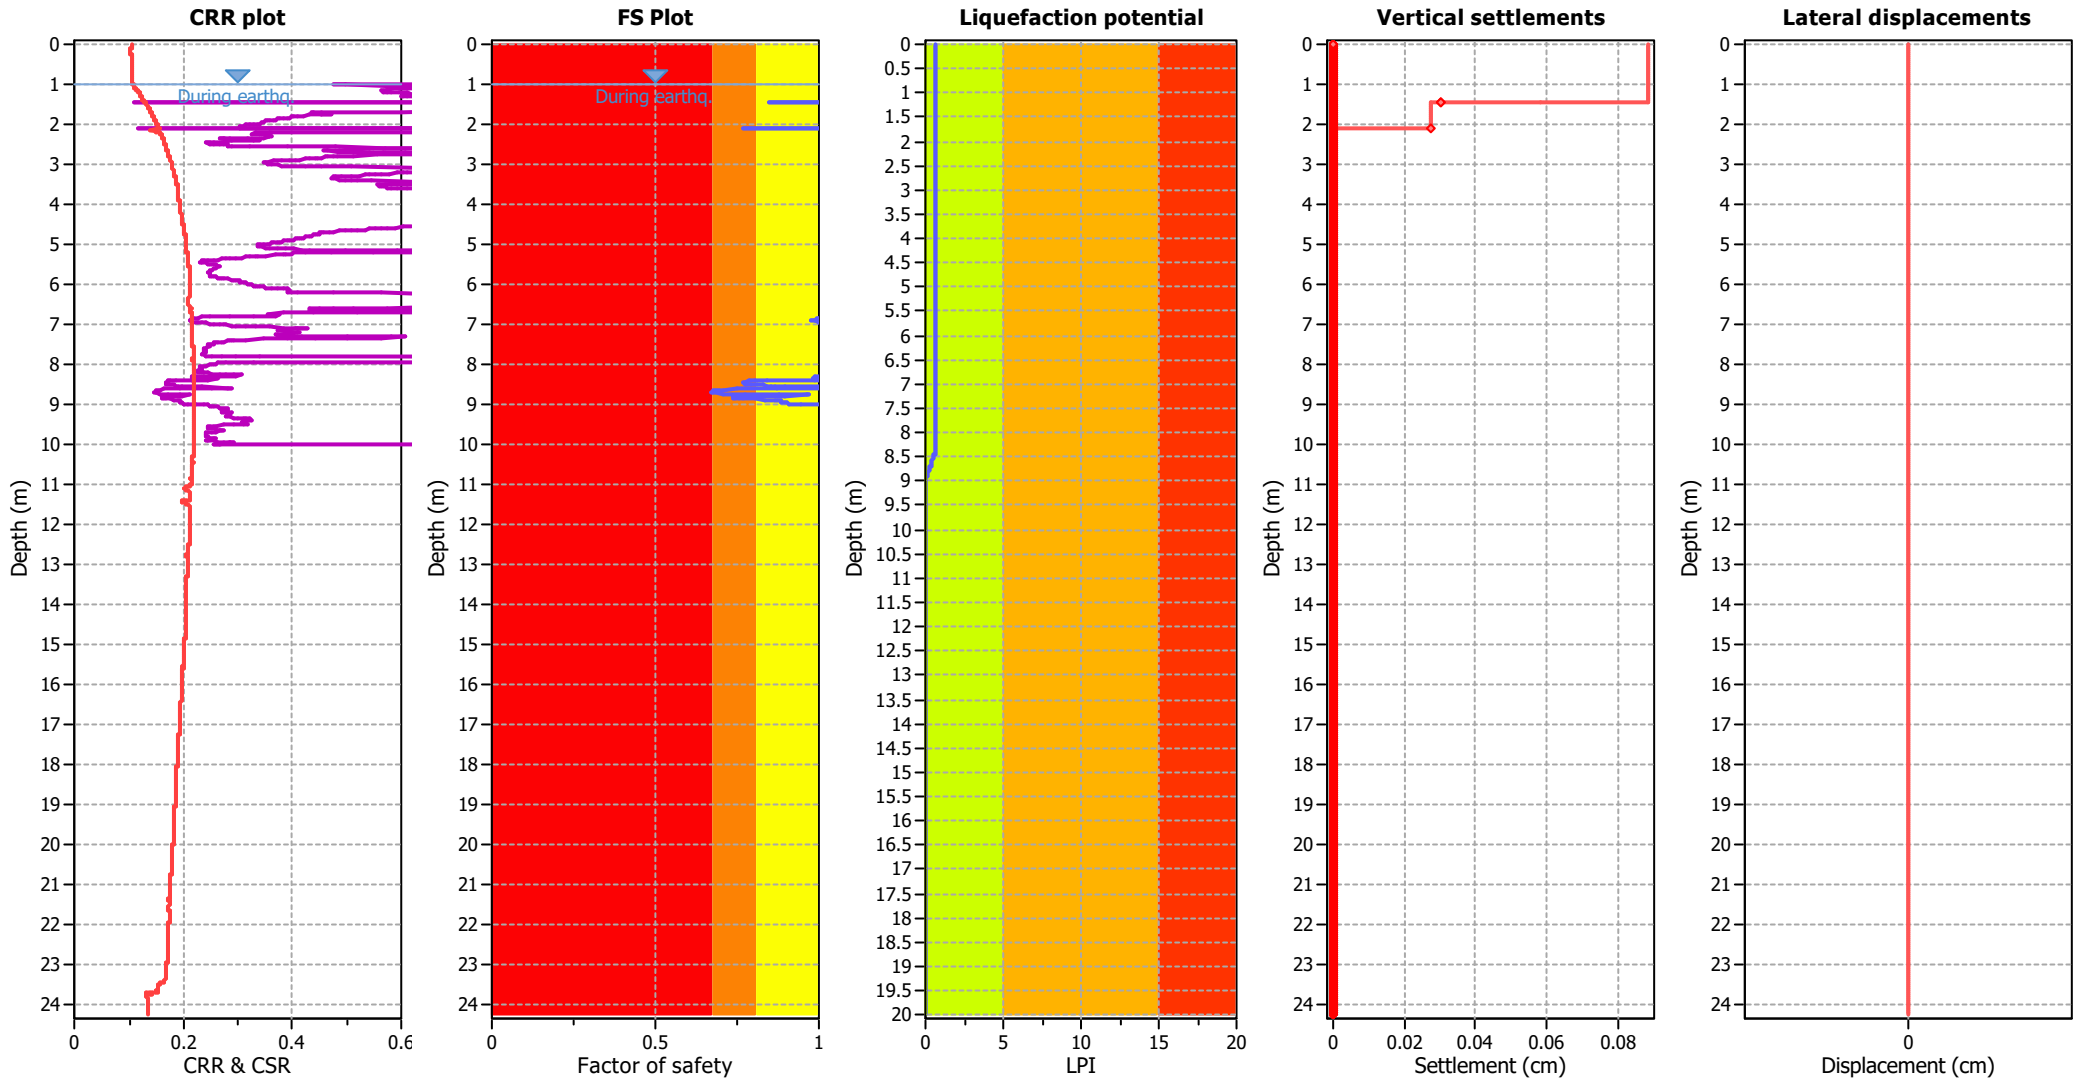

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

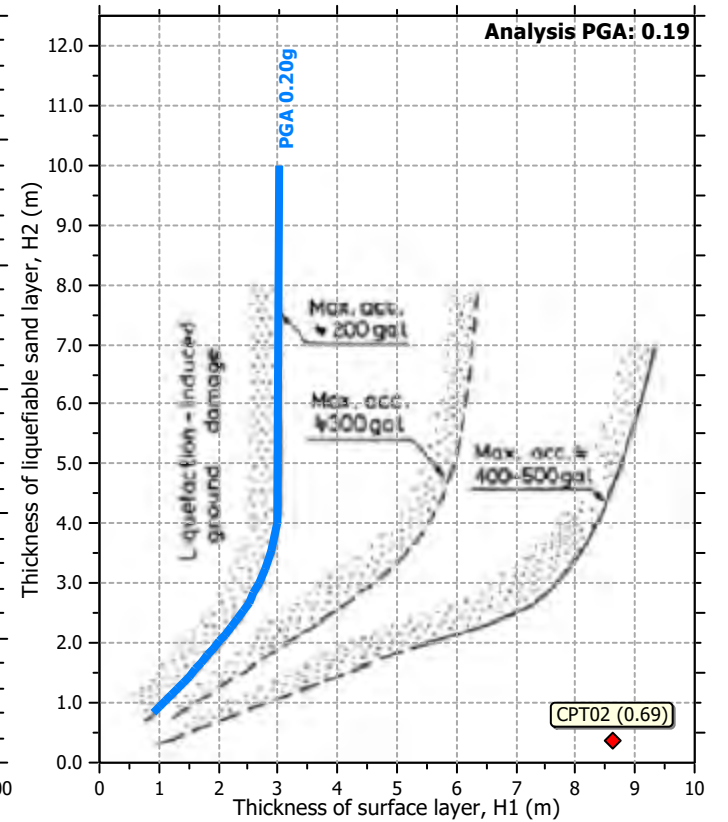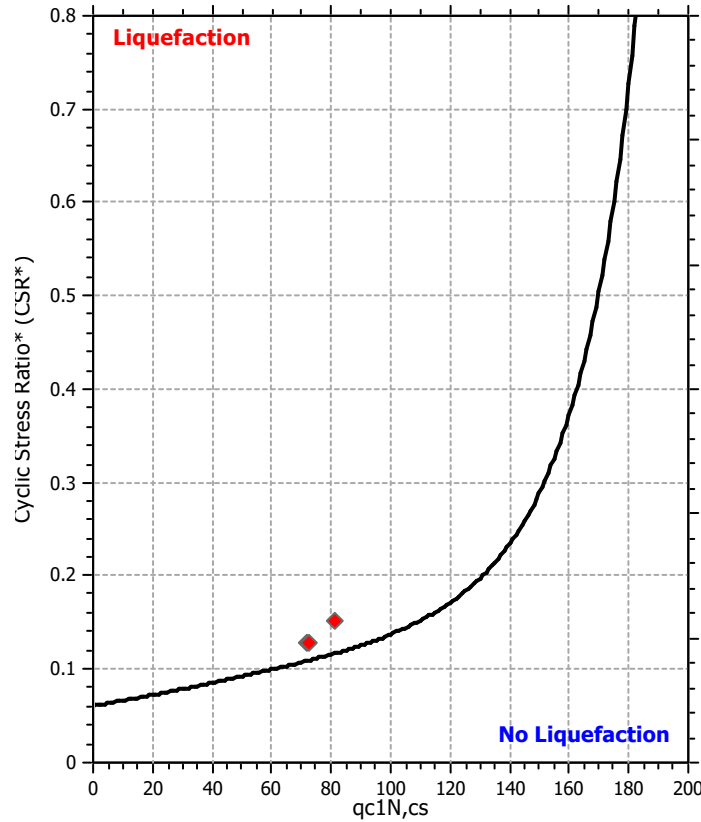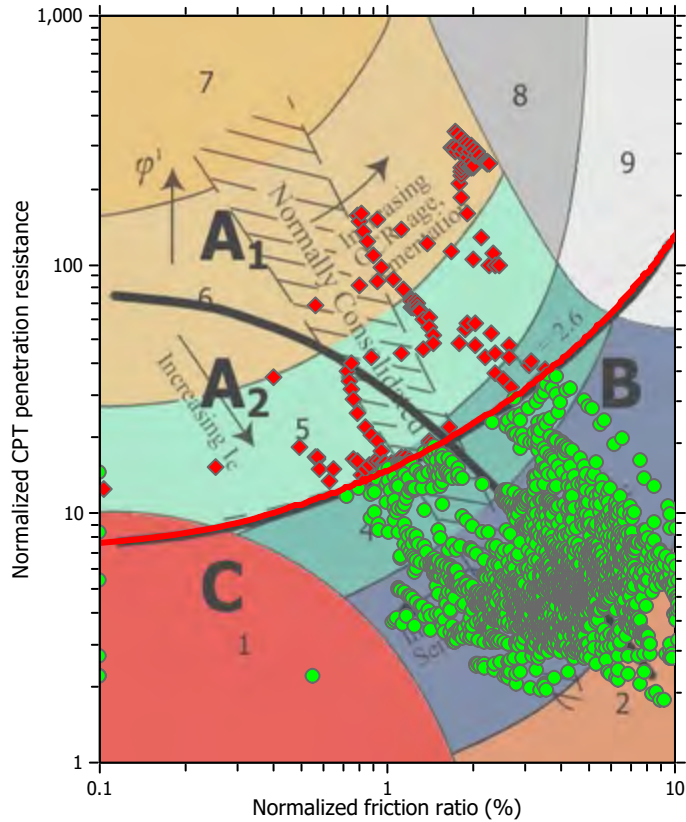

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

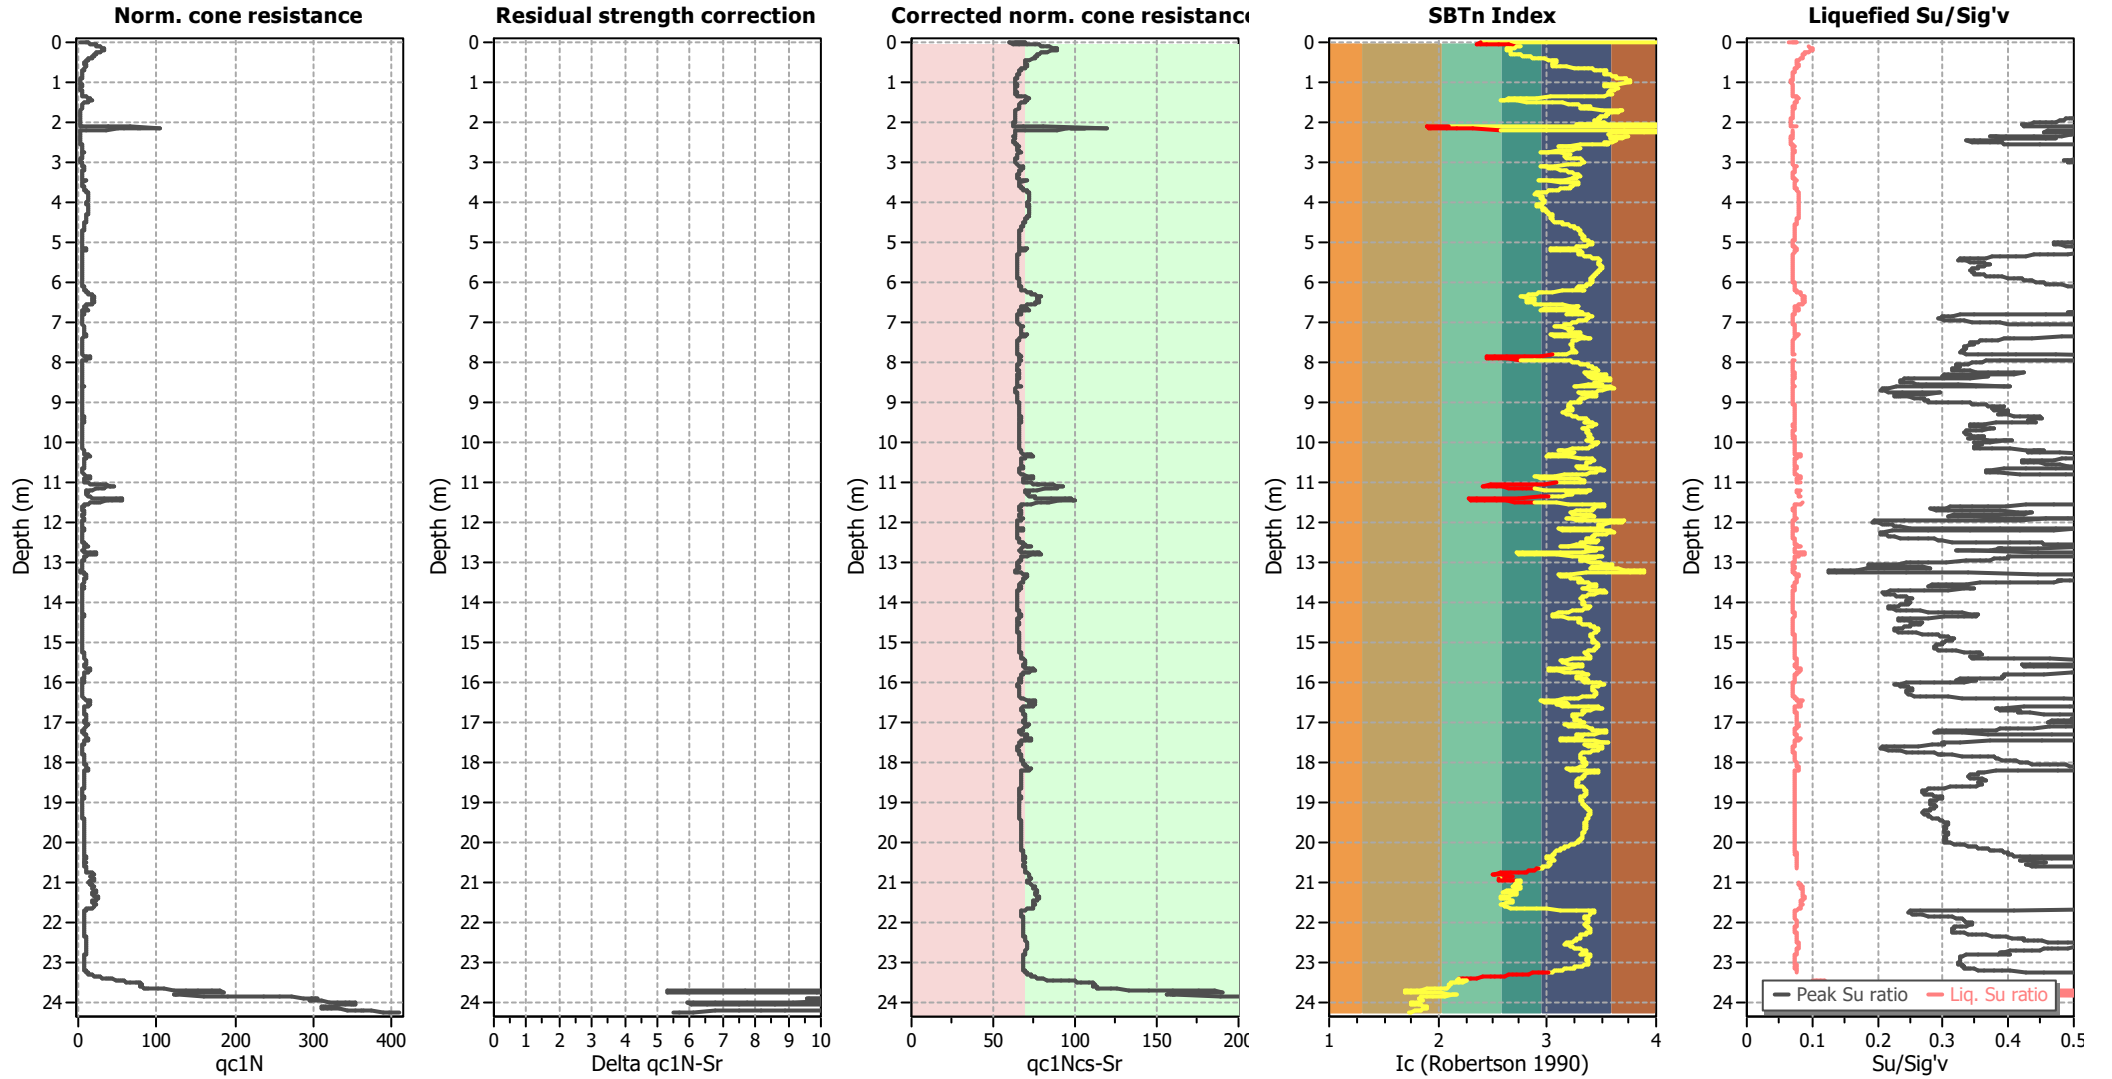

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

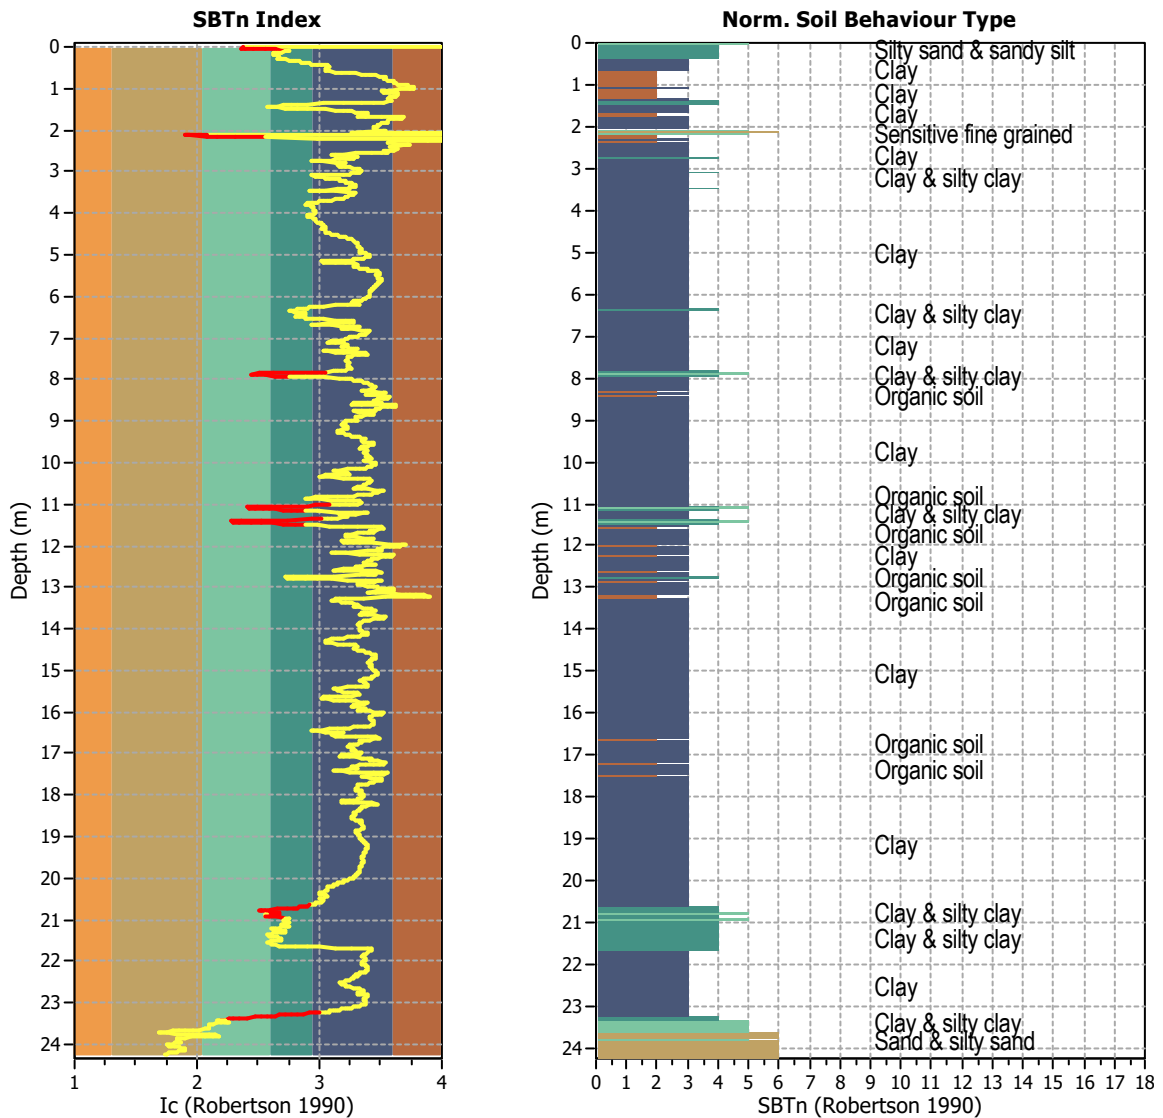


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2425
 Total points excluded: 111
 Exclusion percentage: 4.58%
 Number of layers detected: 13


Estimation of post-earthquake settlements

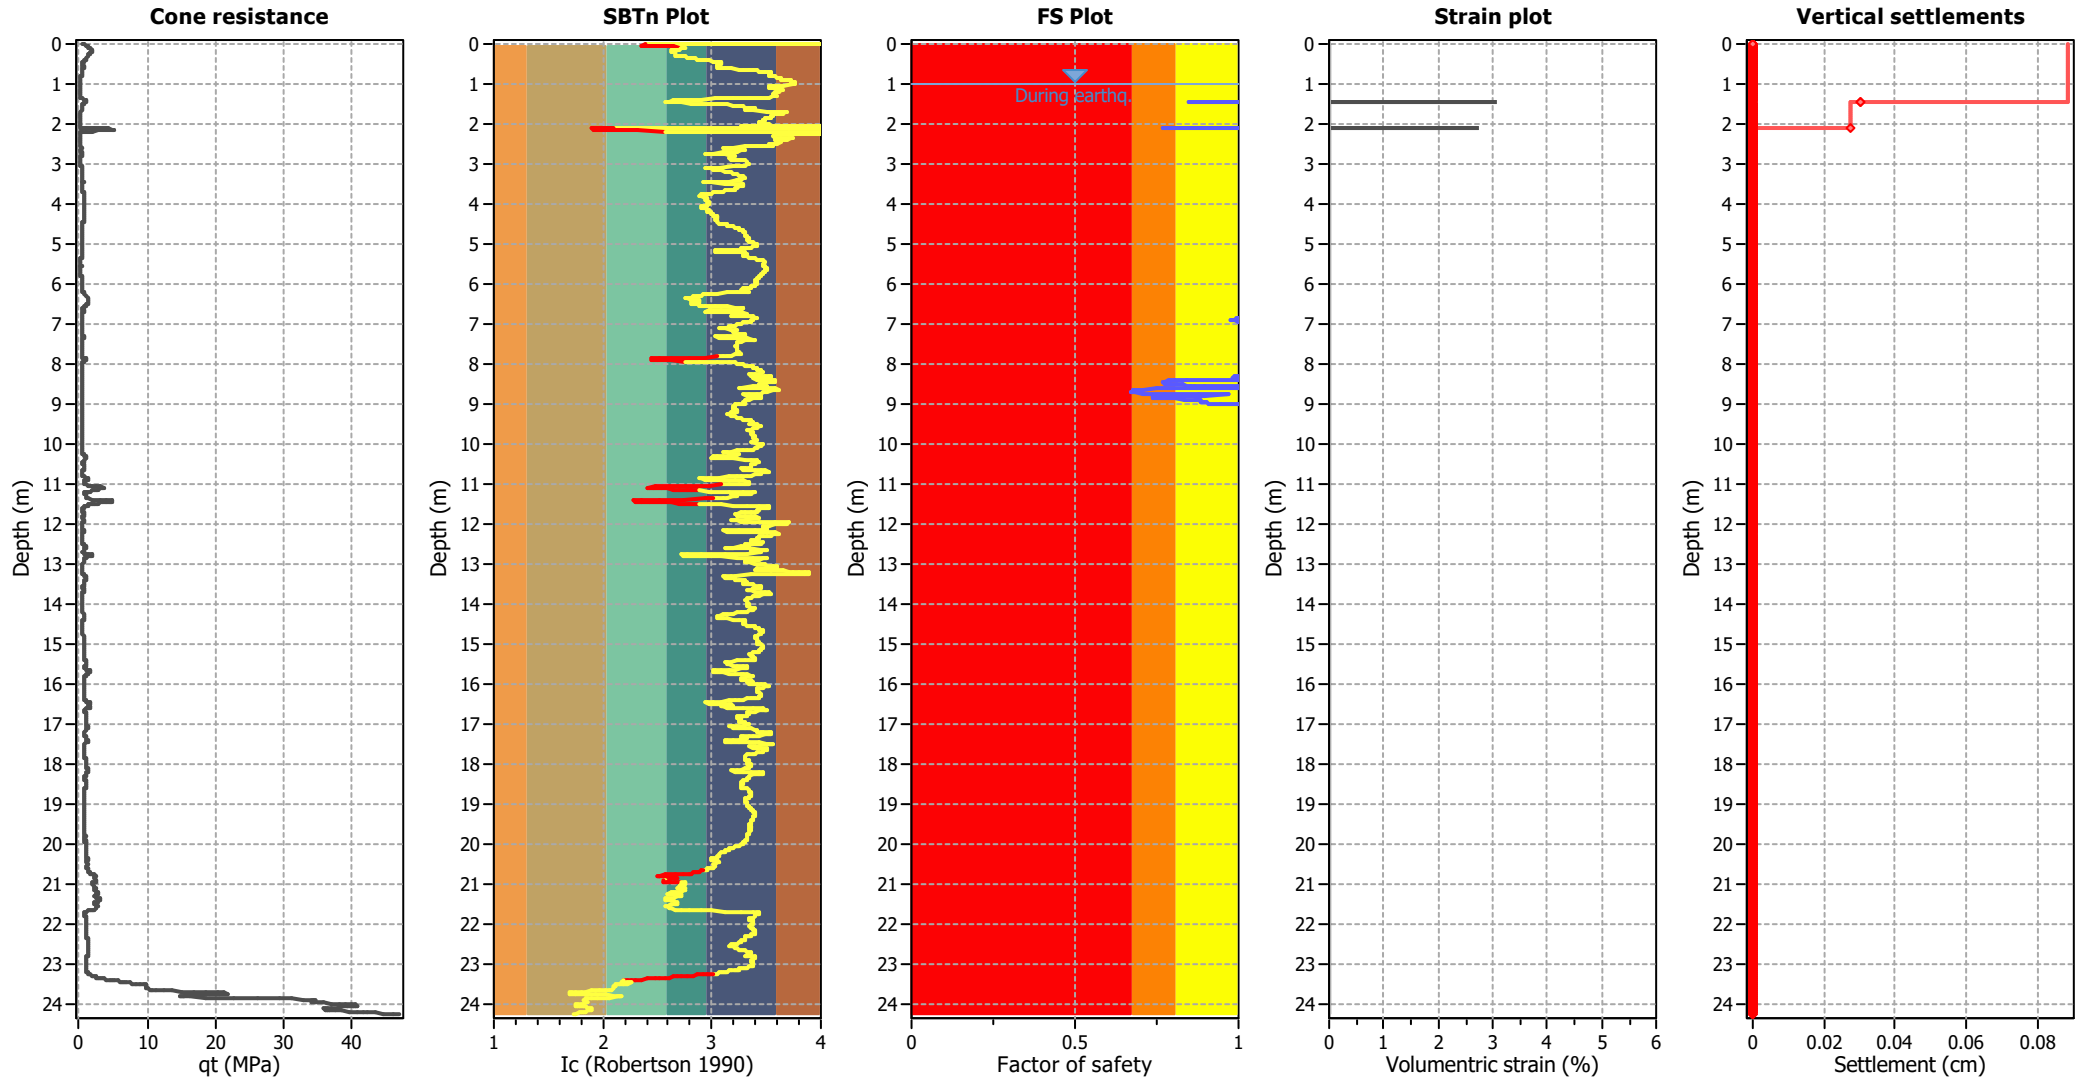

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

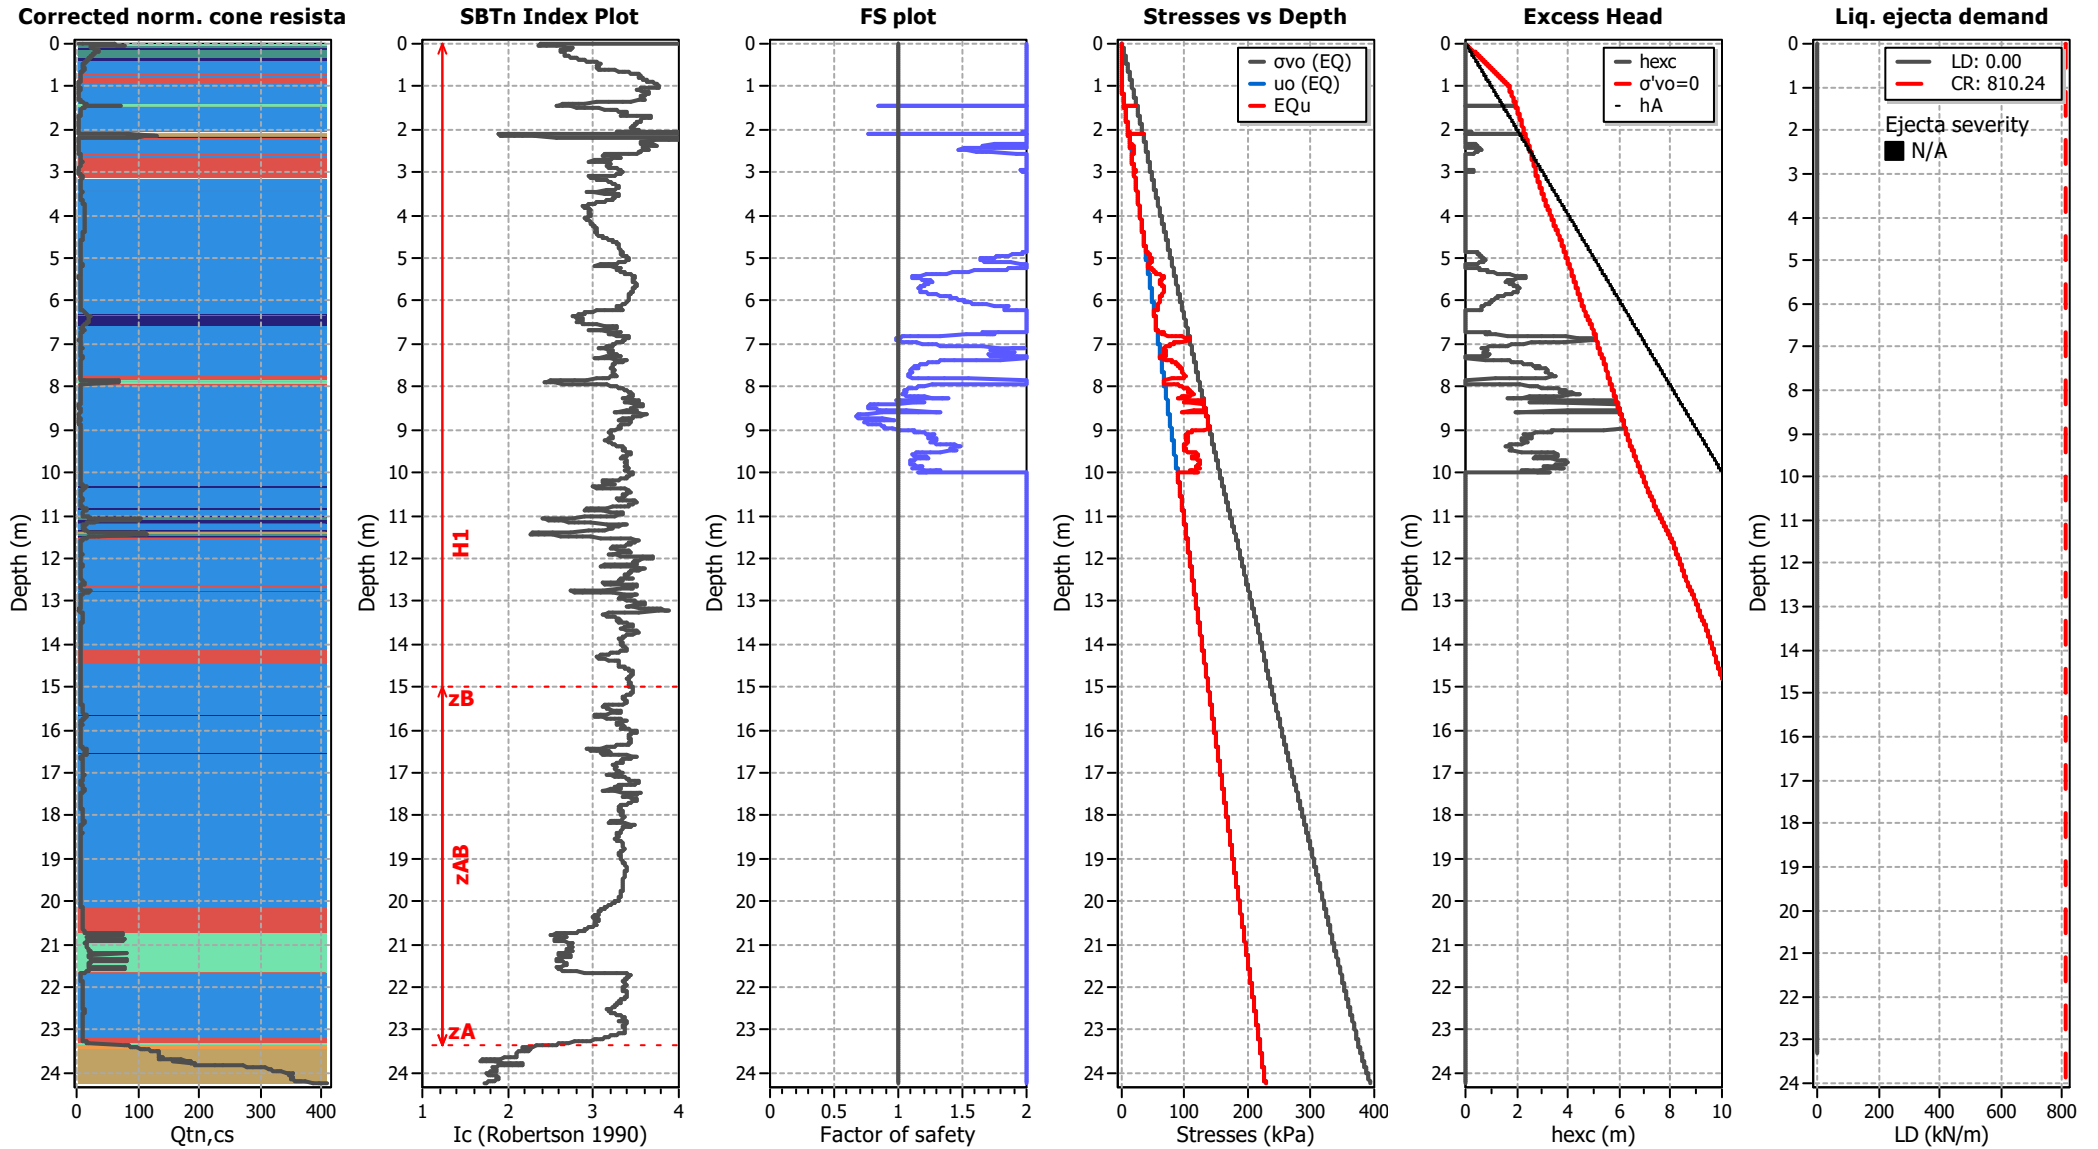

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT03

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

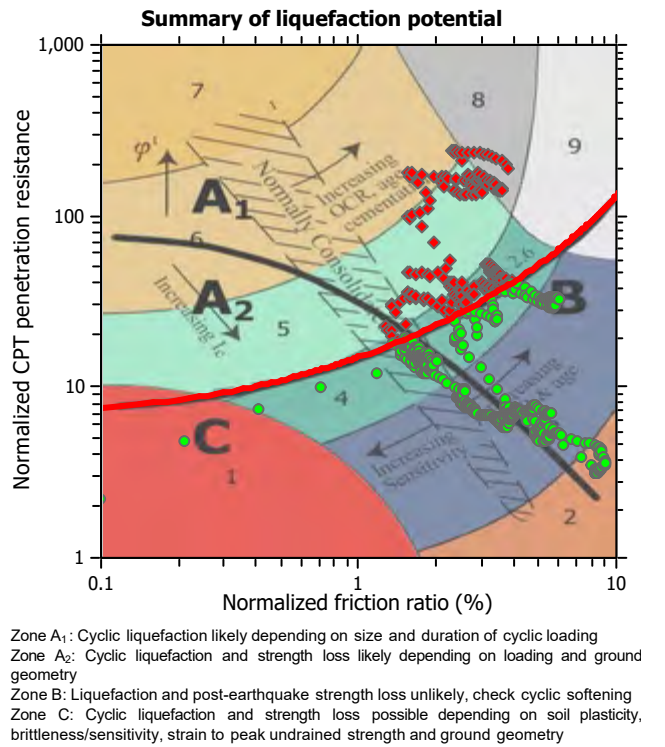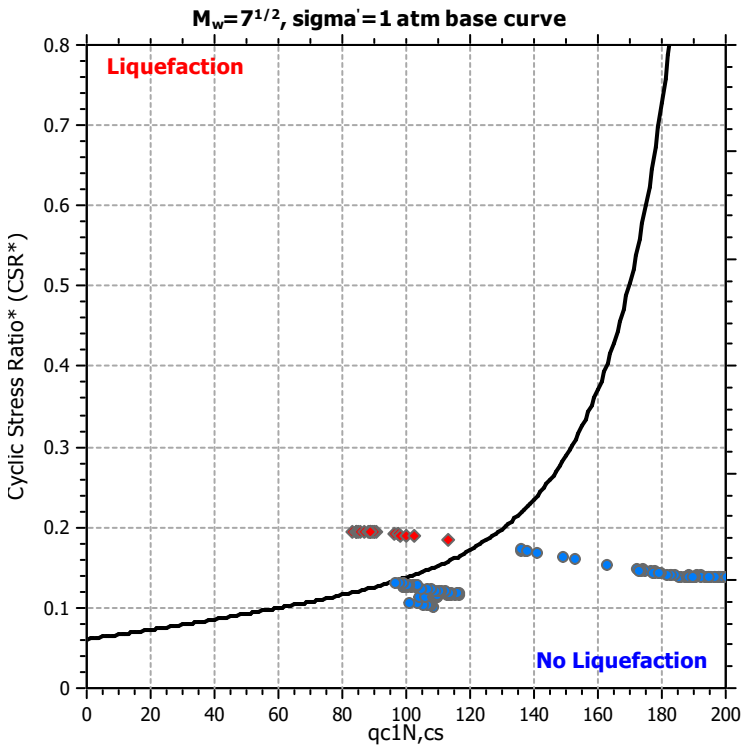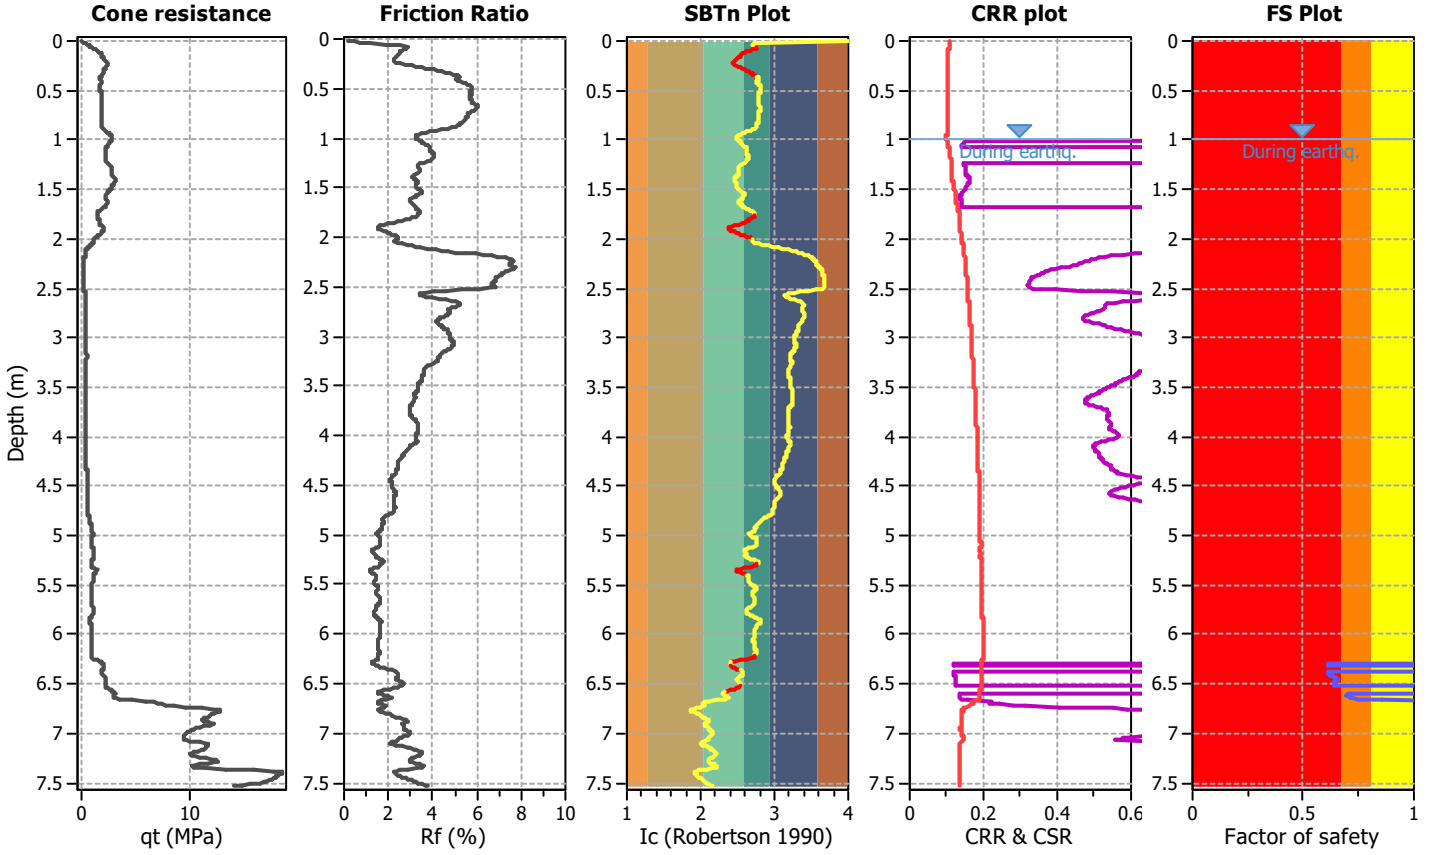

CPT basic interpretation plots

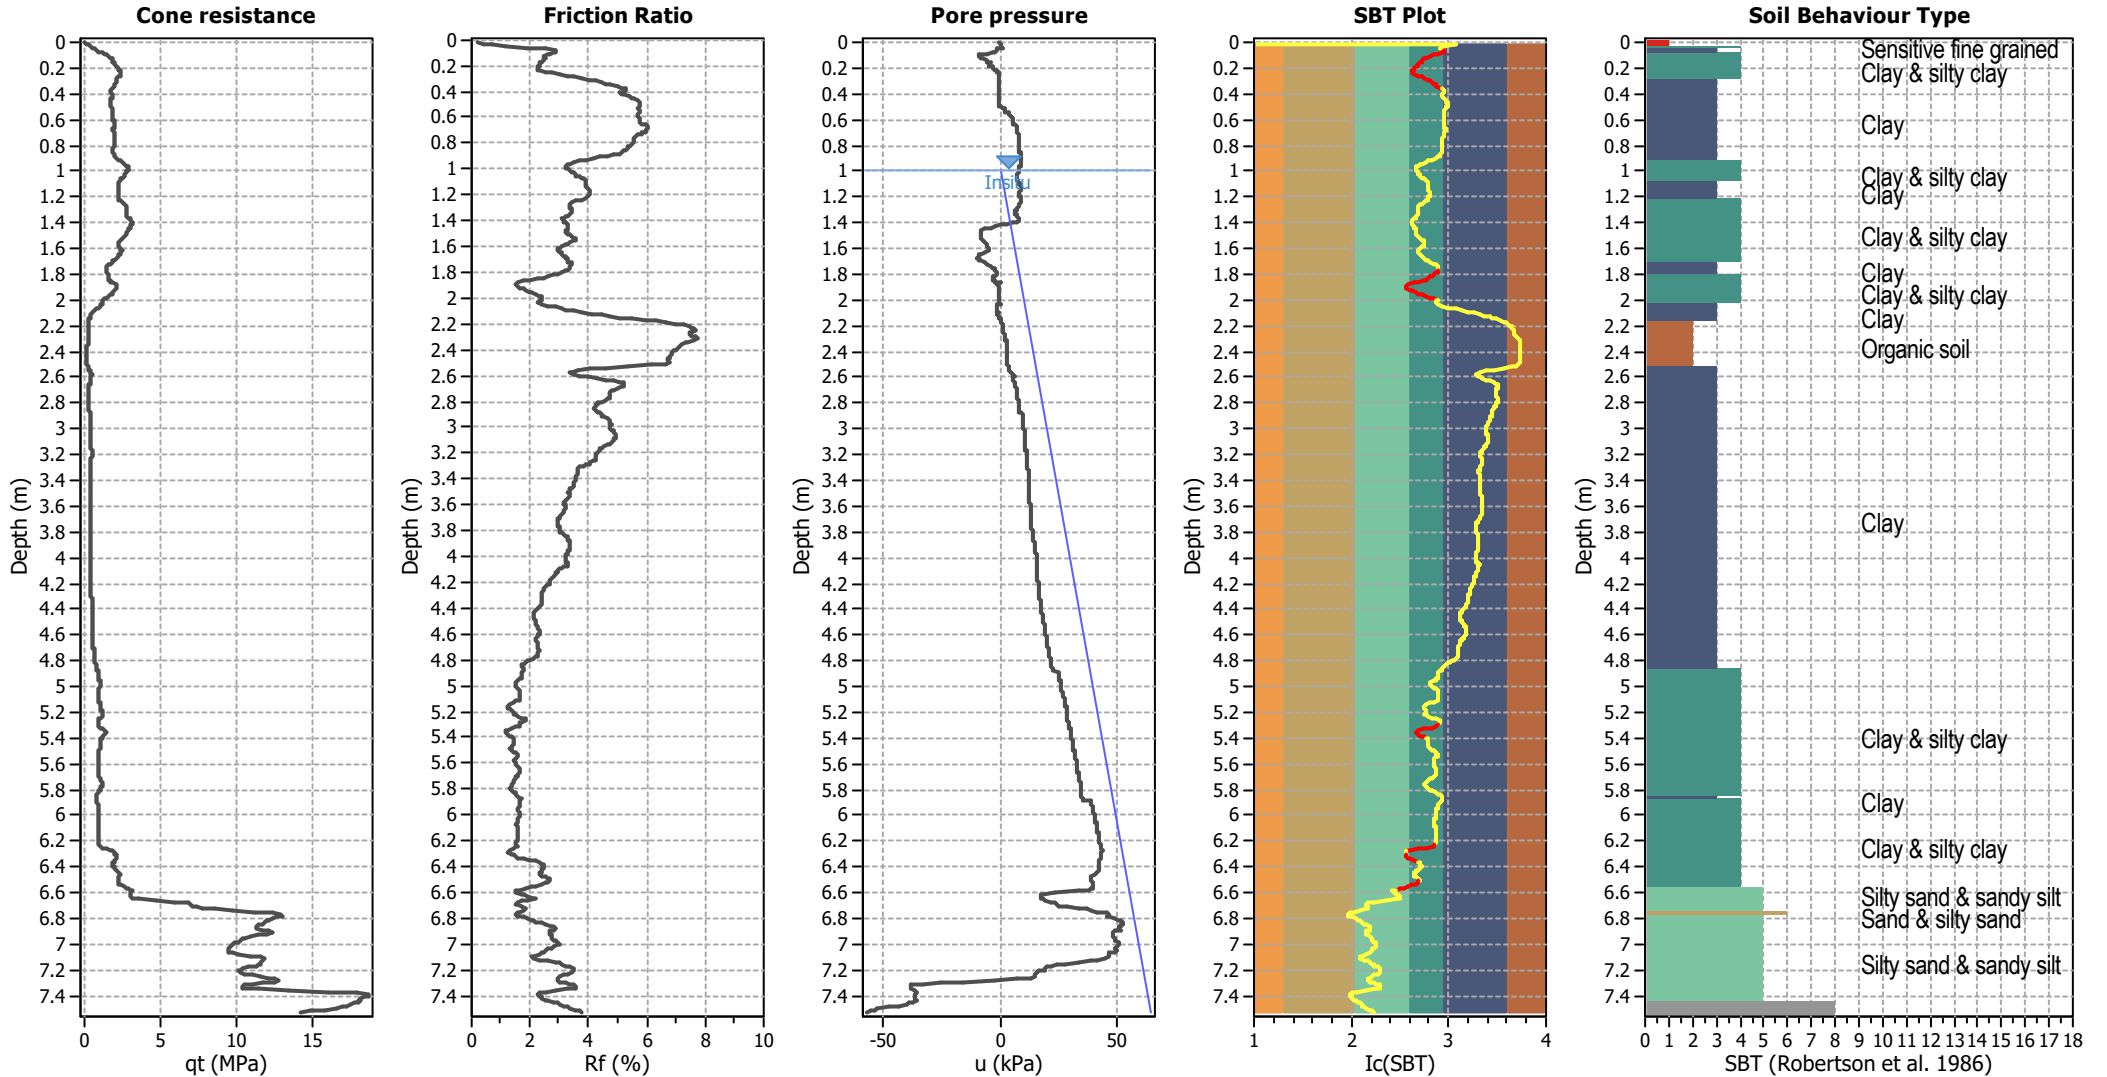


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

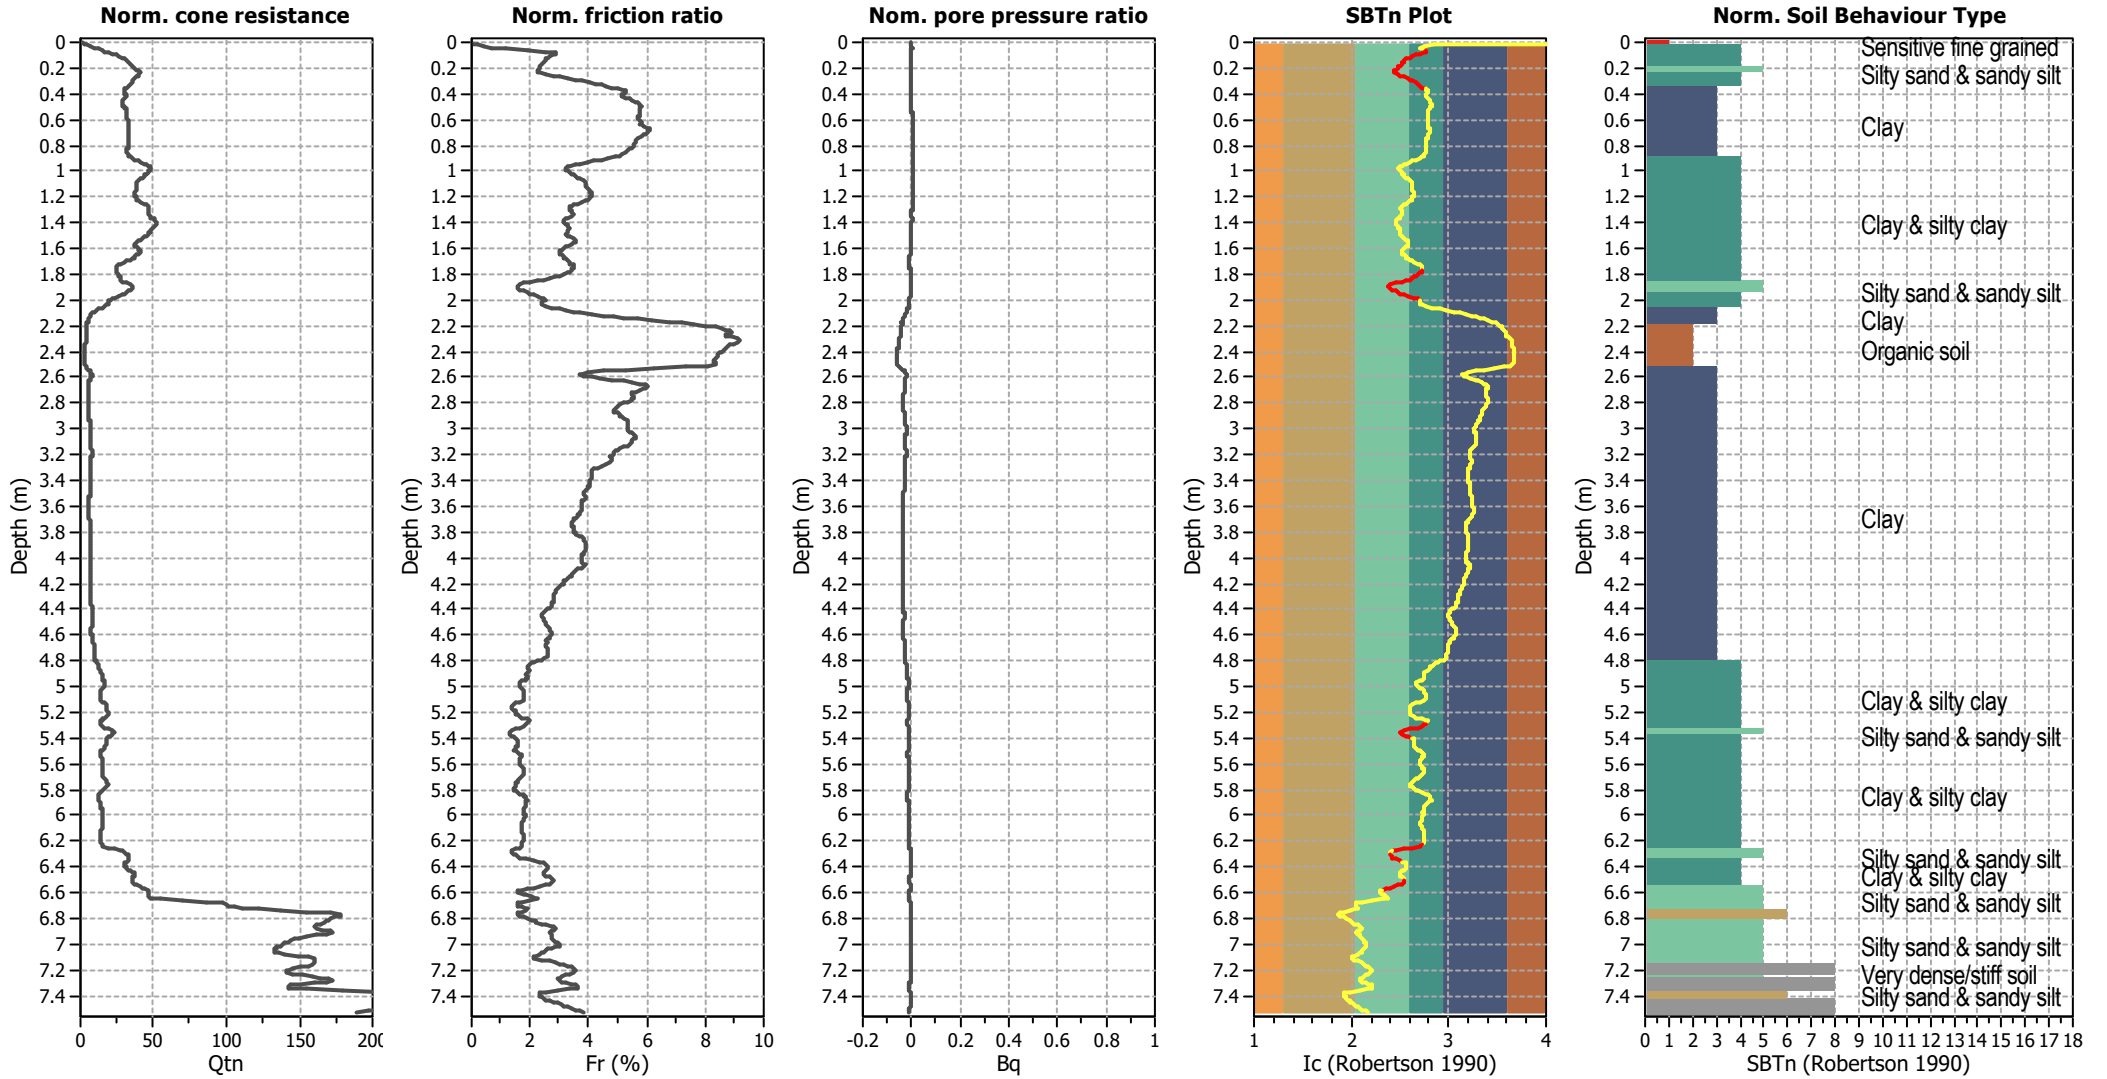


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

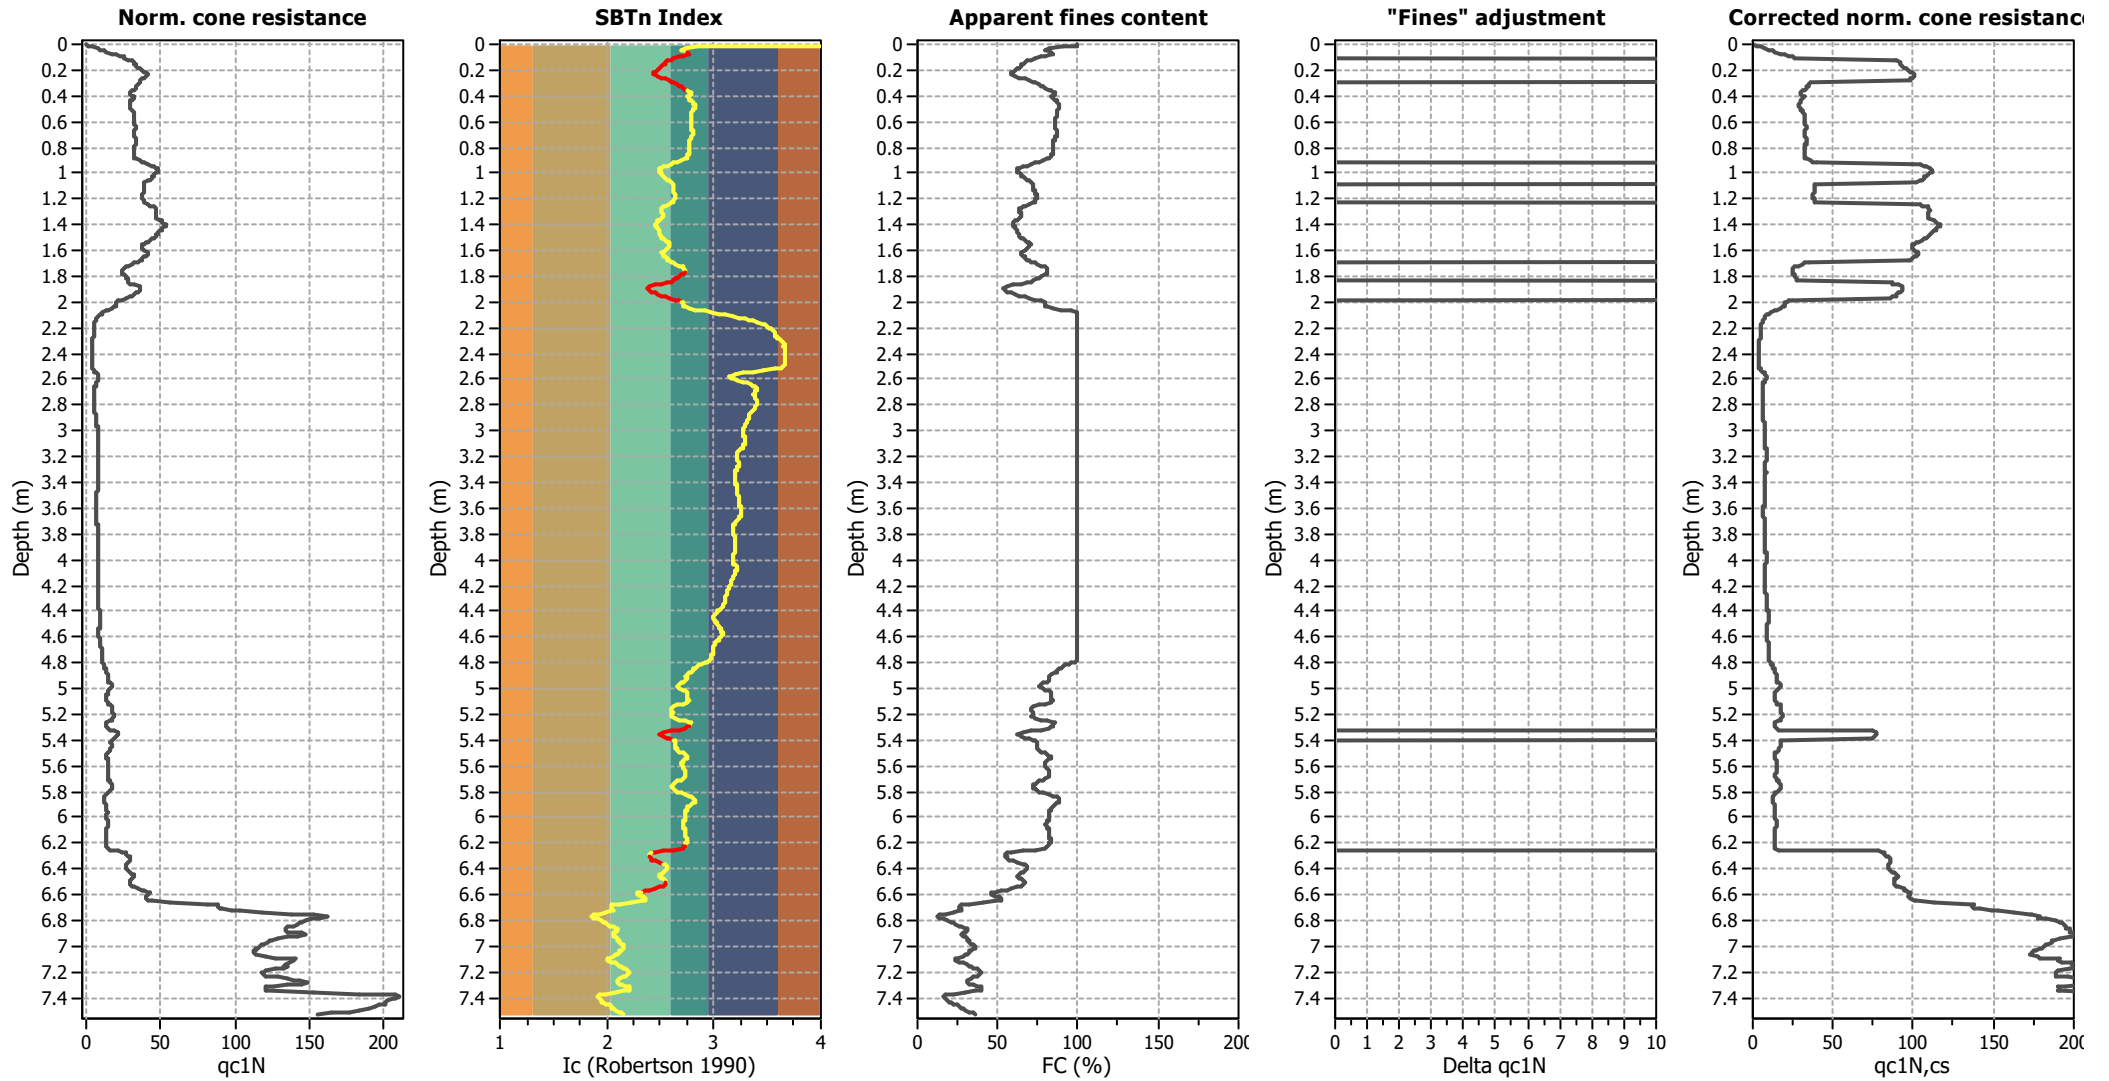

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

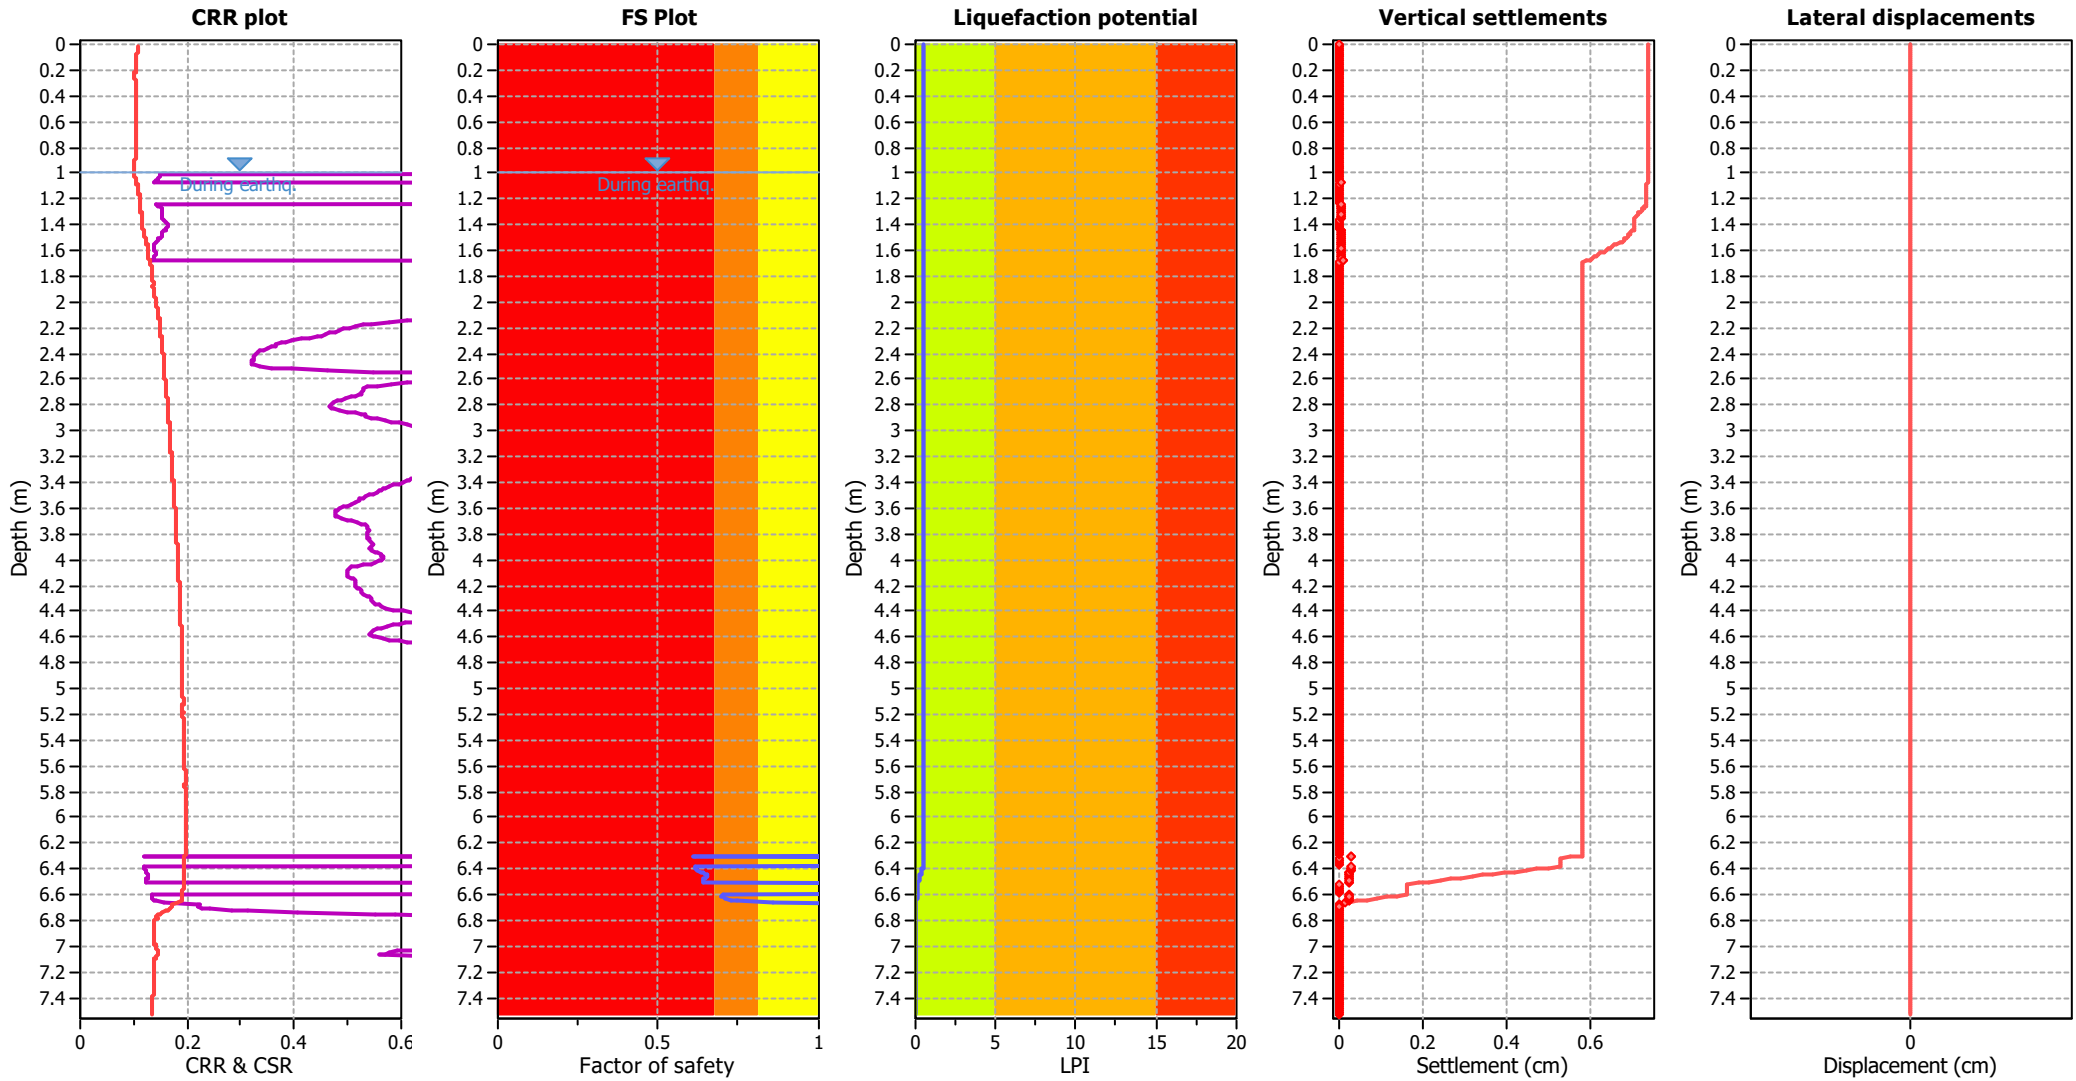

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

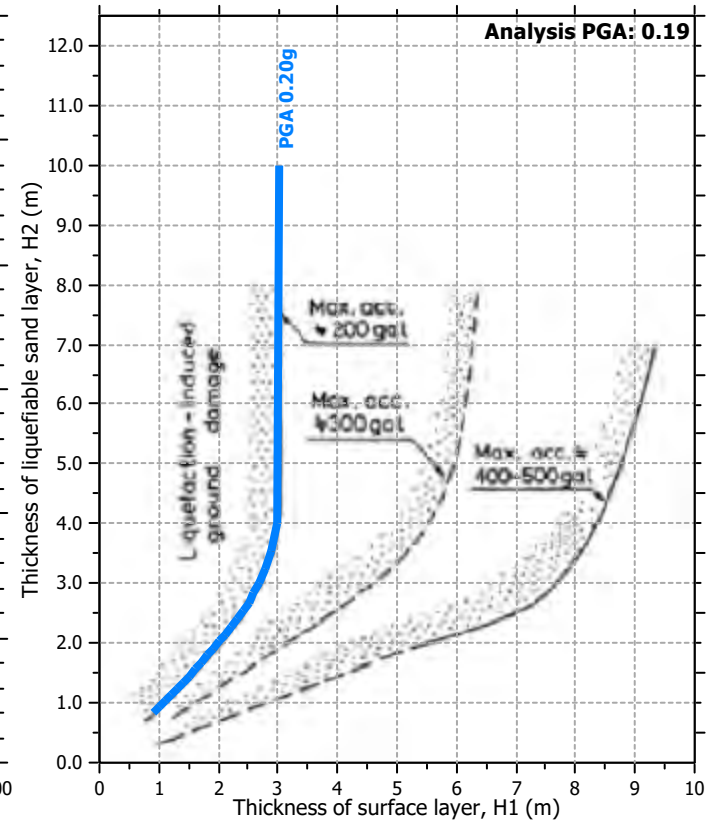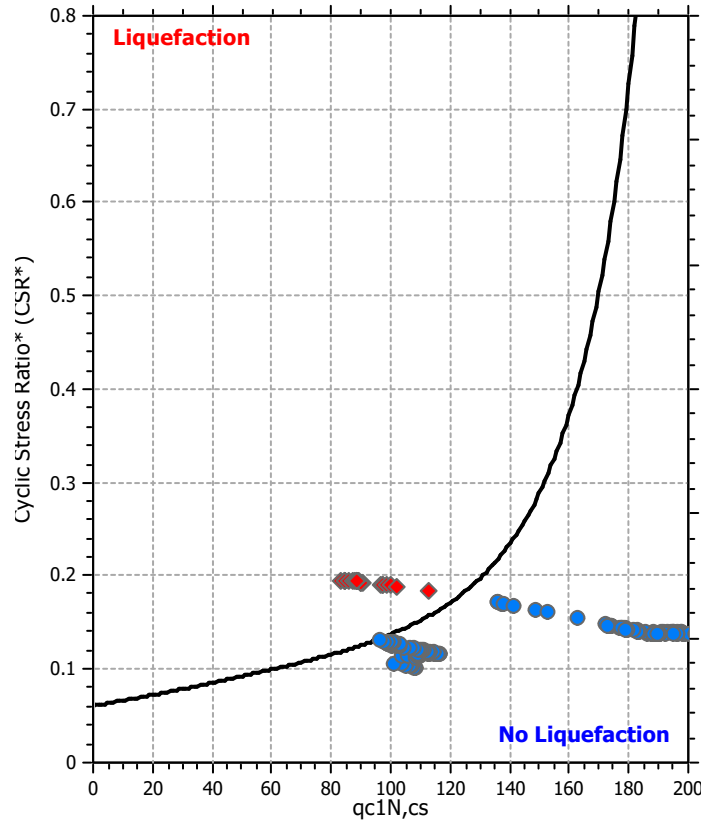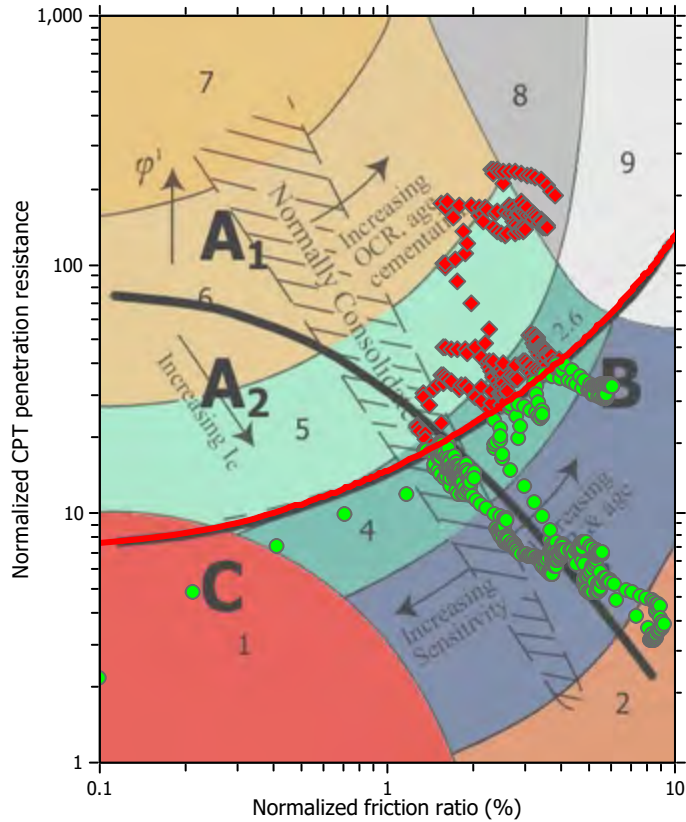

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

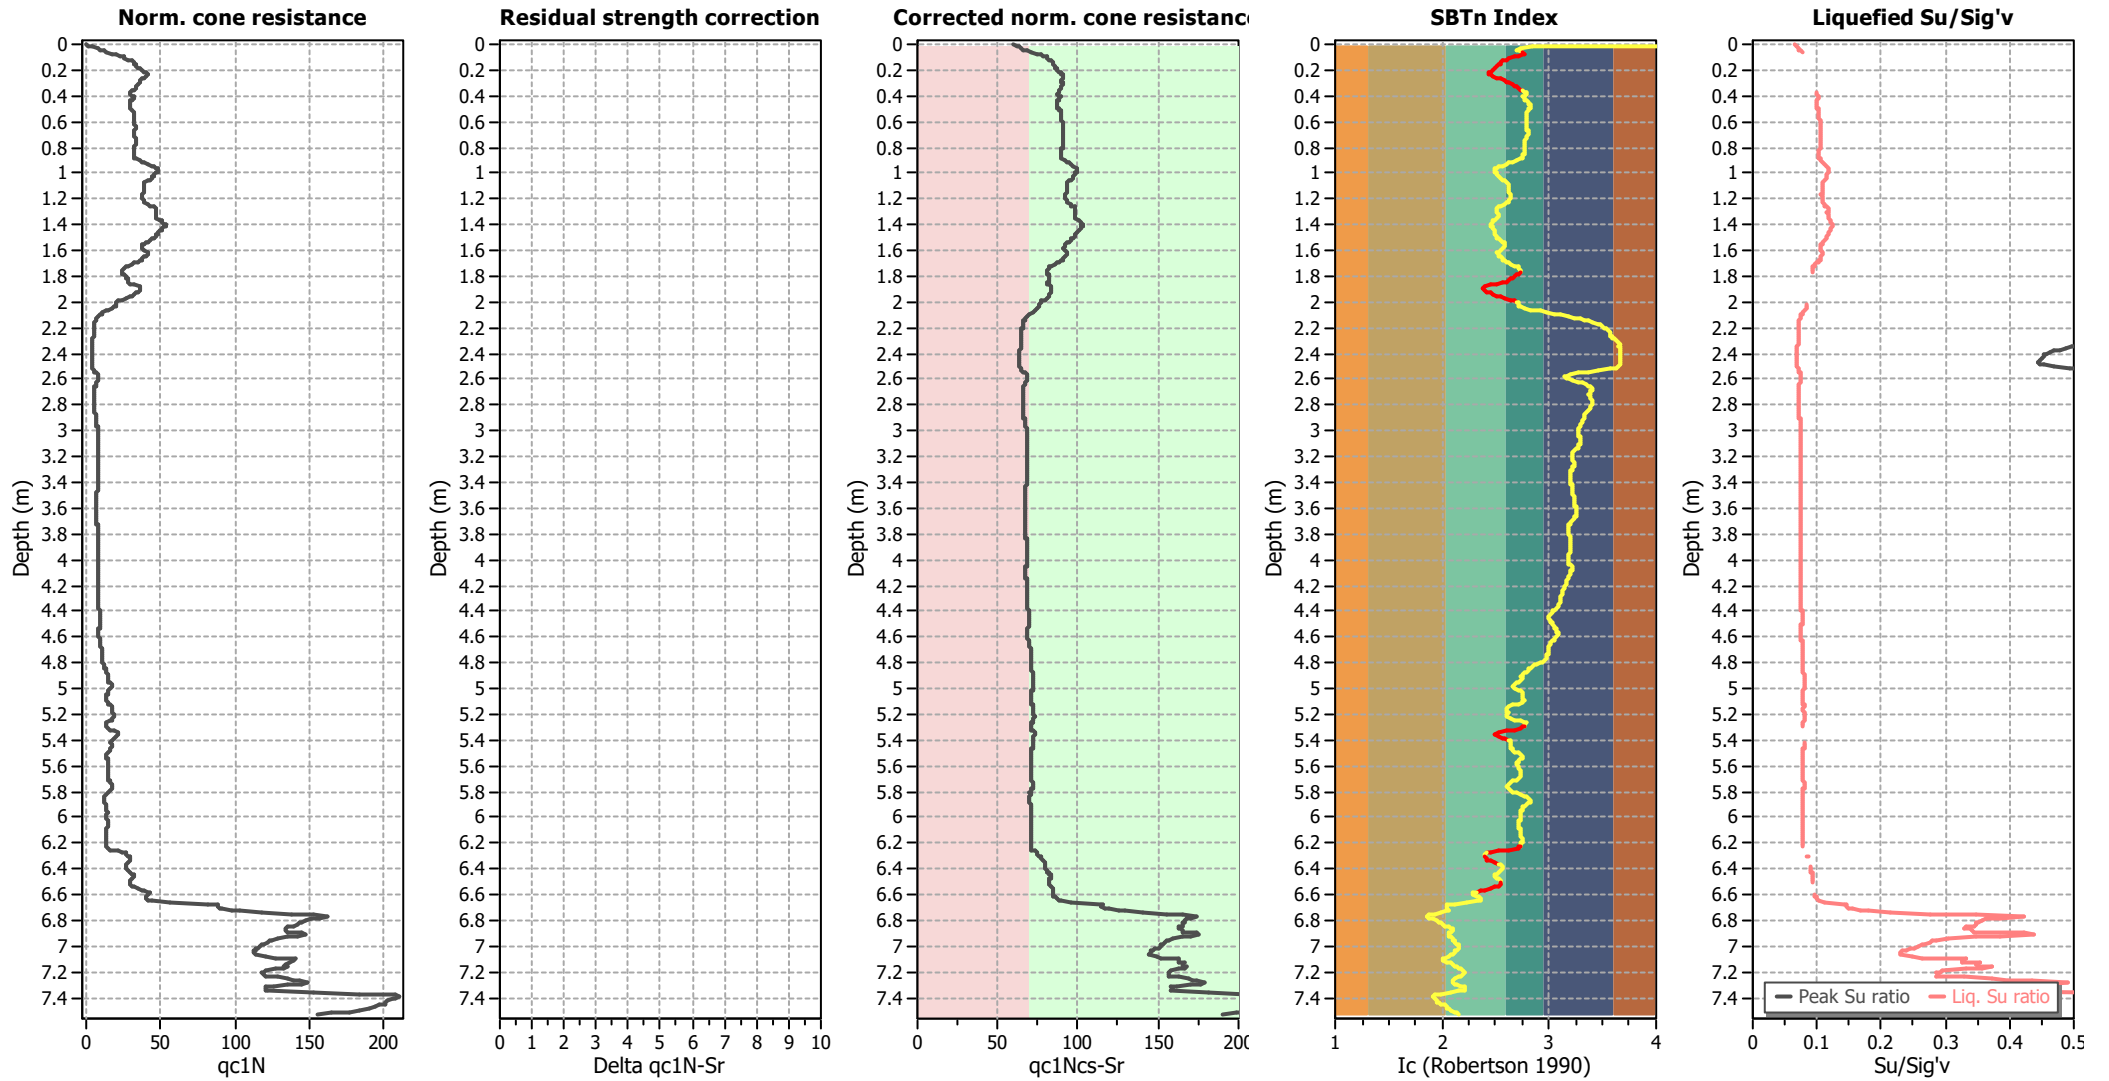

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

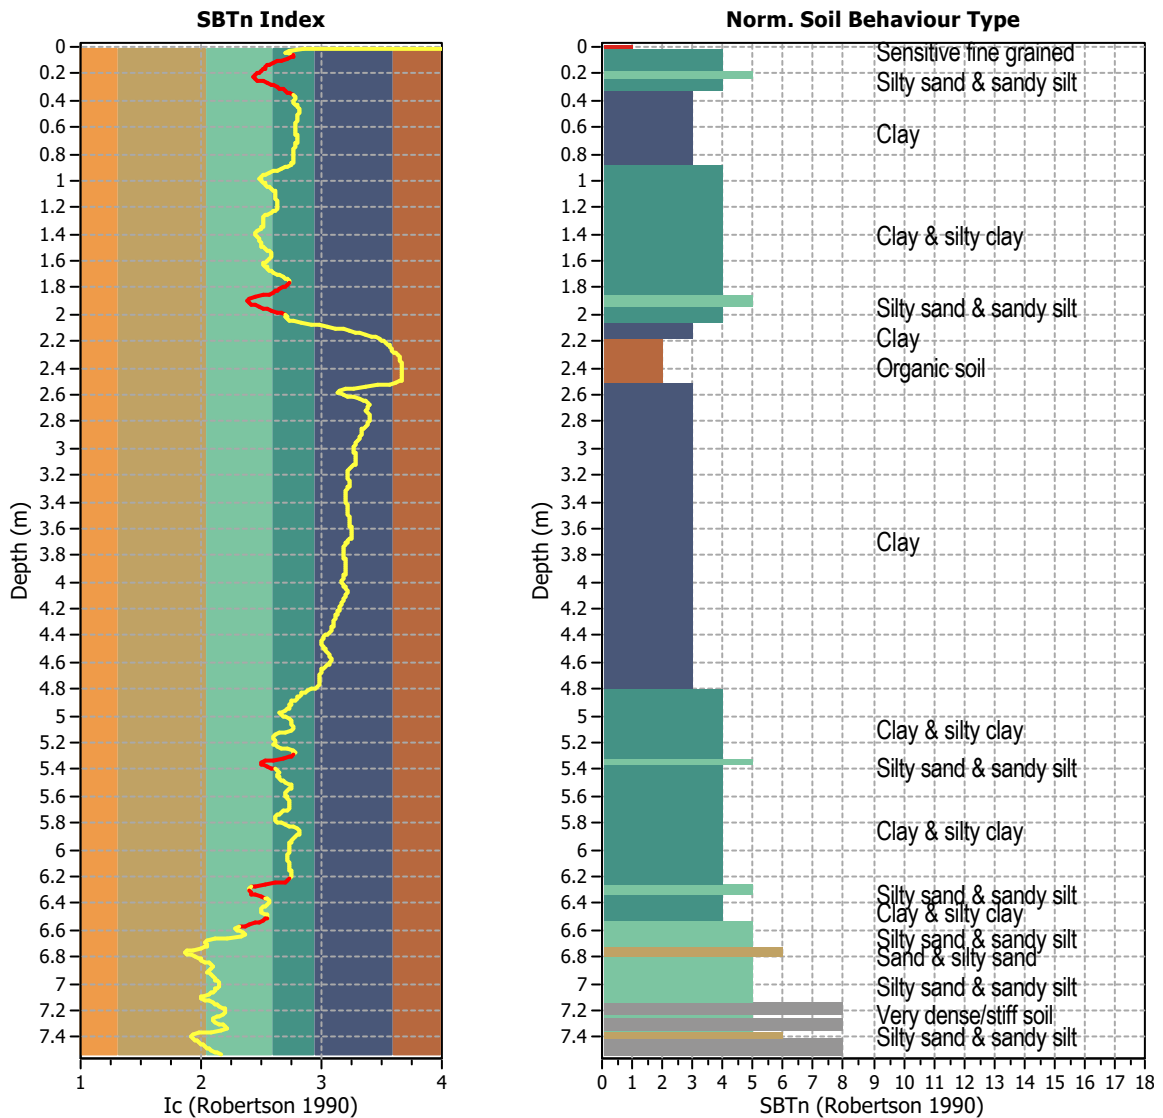


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 754
 Total points excluded: 88
 Exclusion percentage: 11.67%
 Number of layers detected: 9


Estimation of post-earthquake settlements

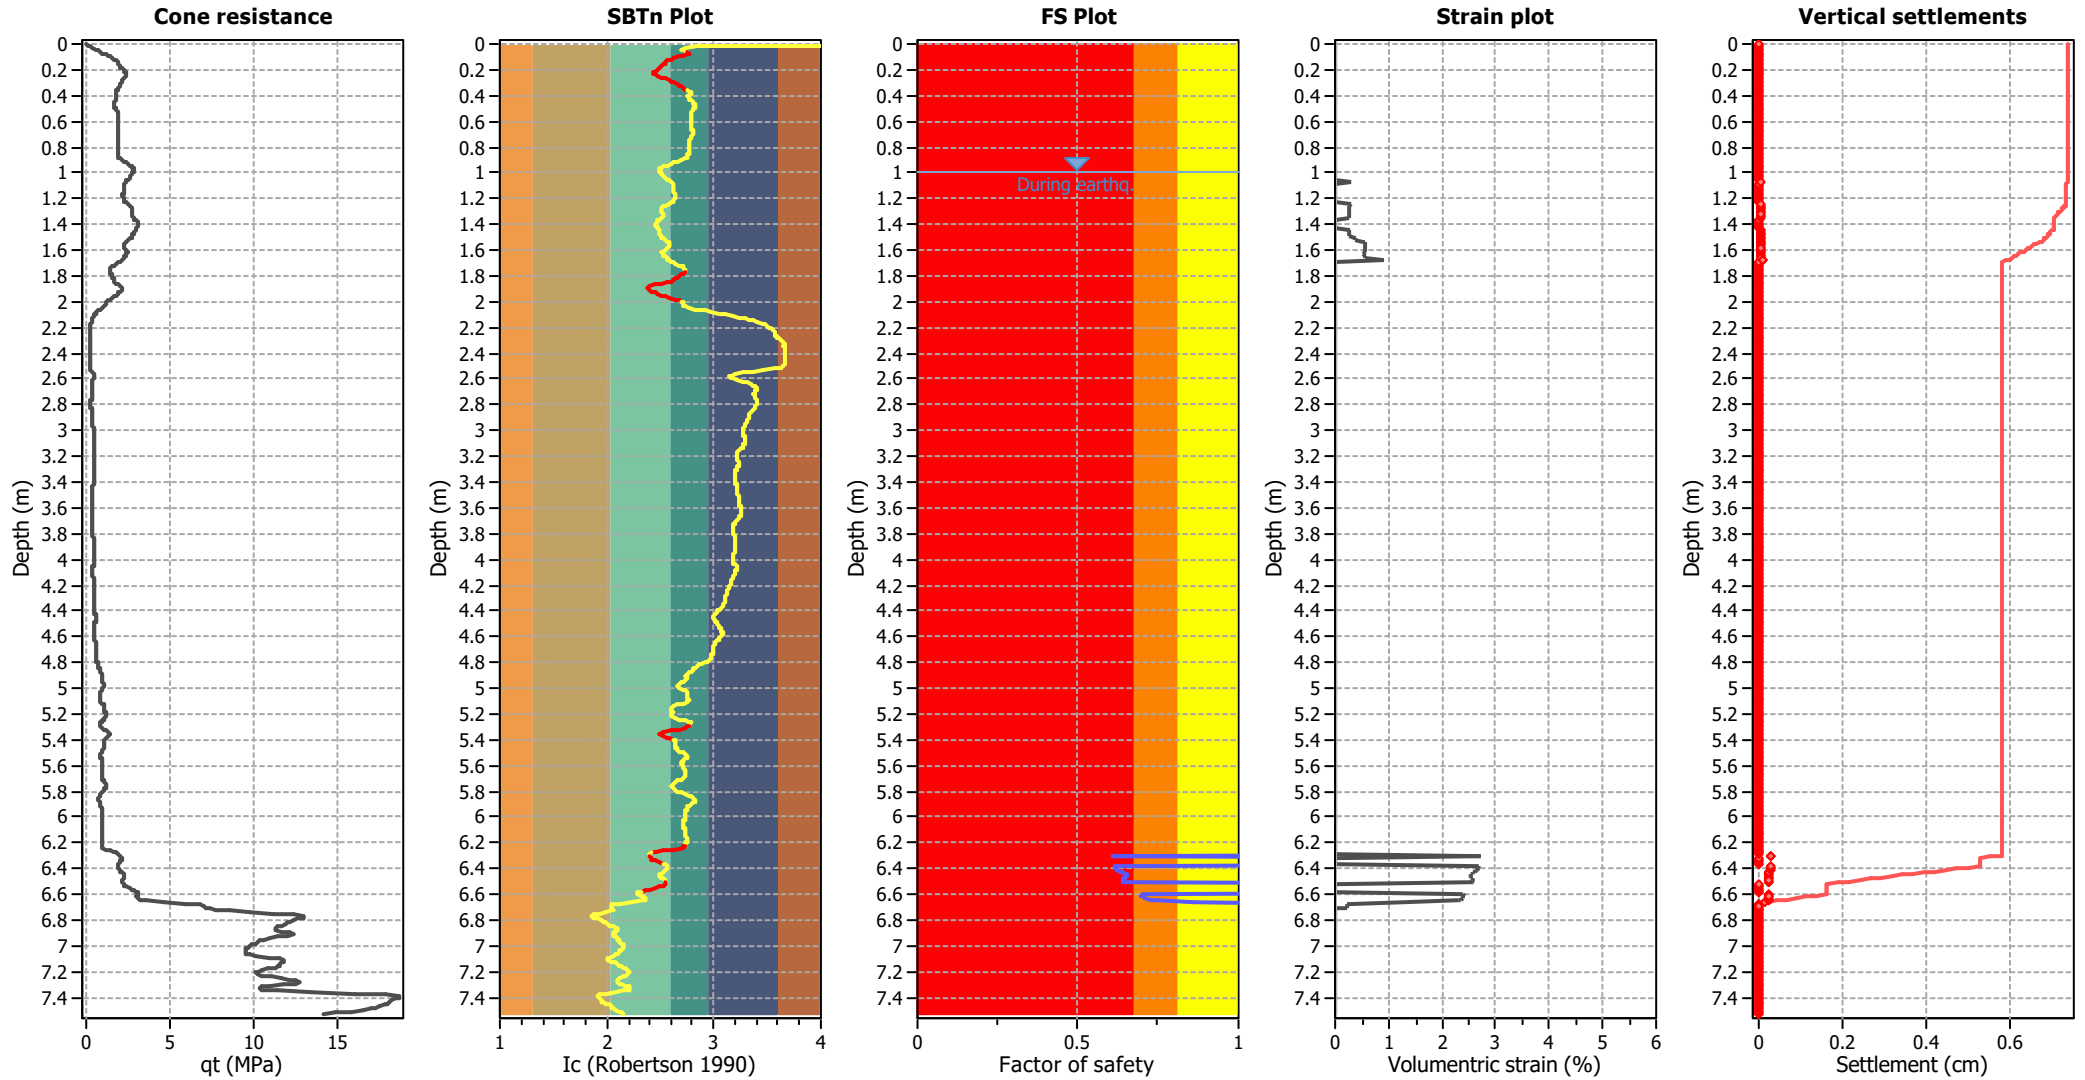

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

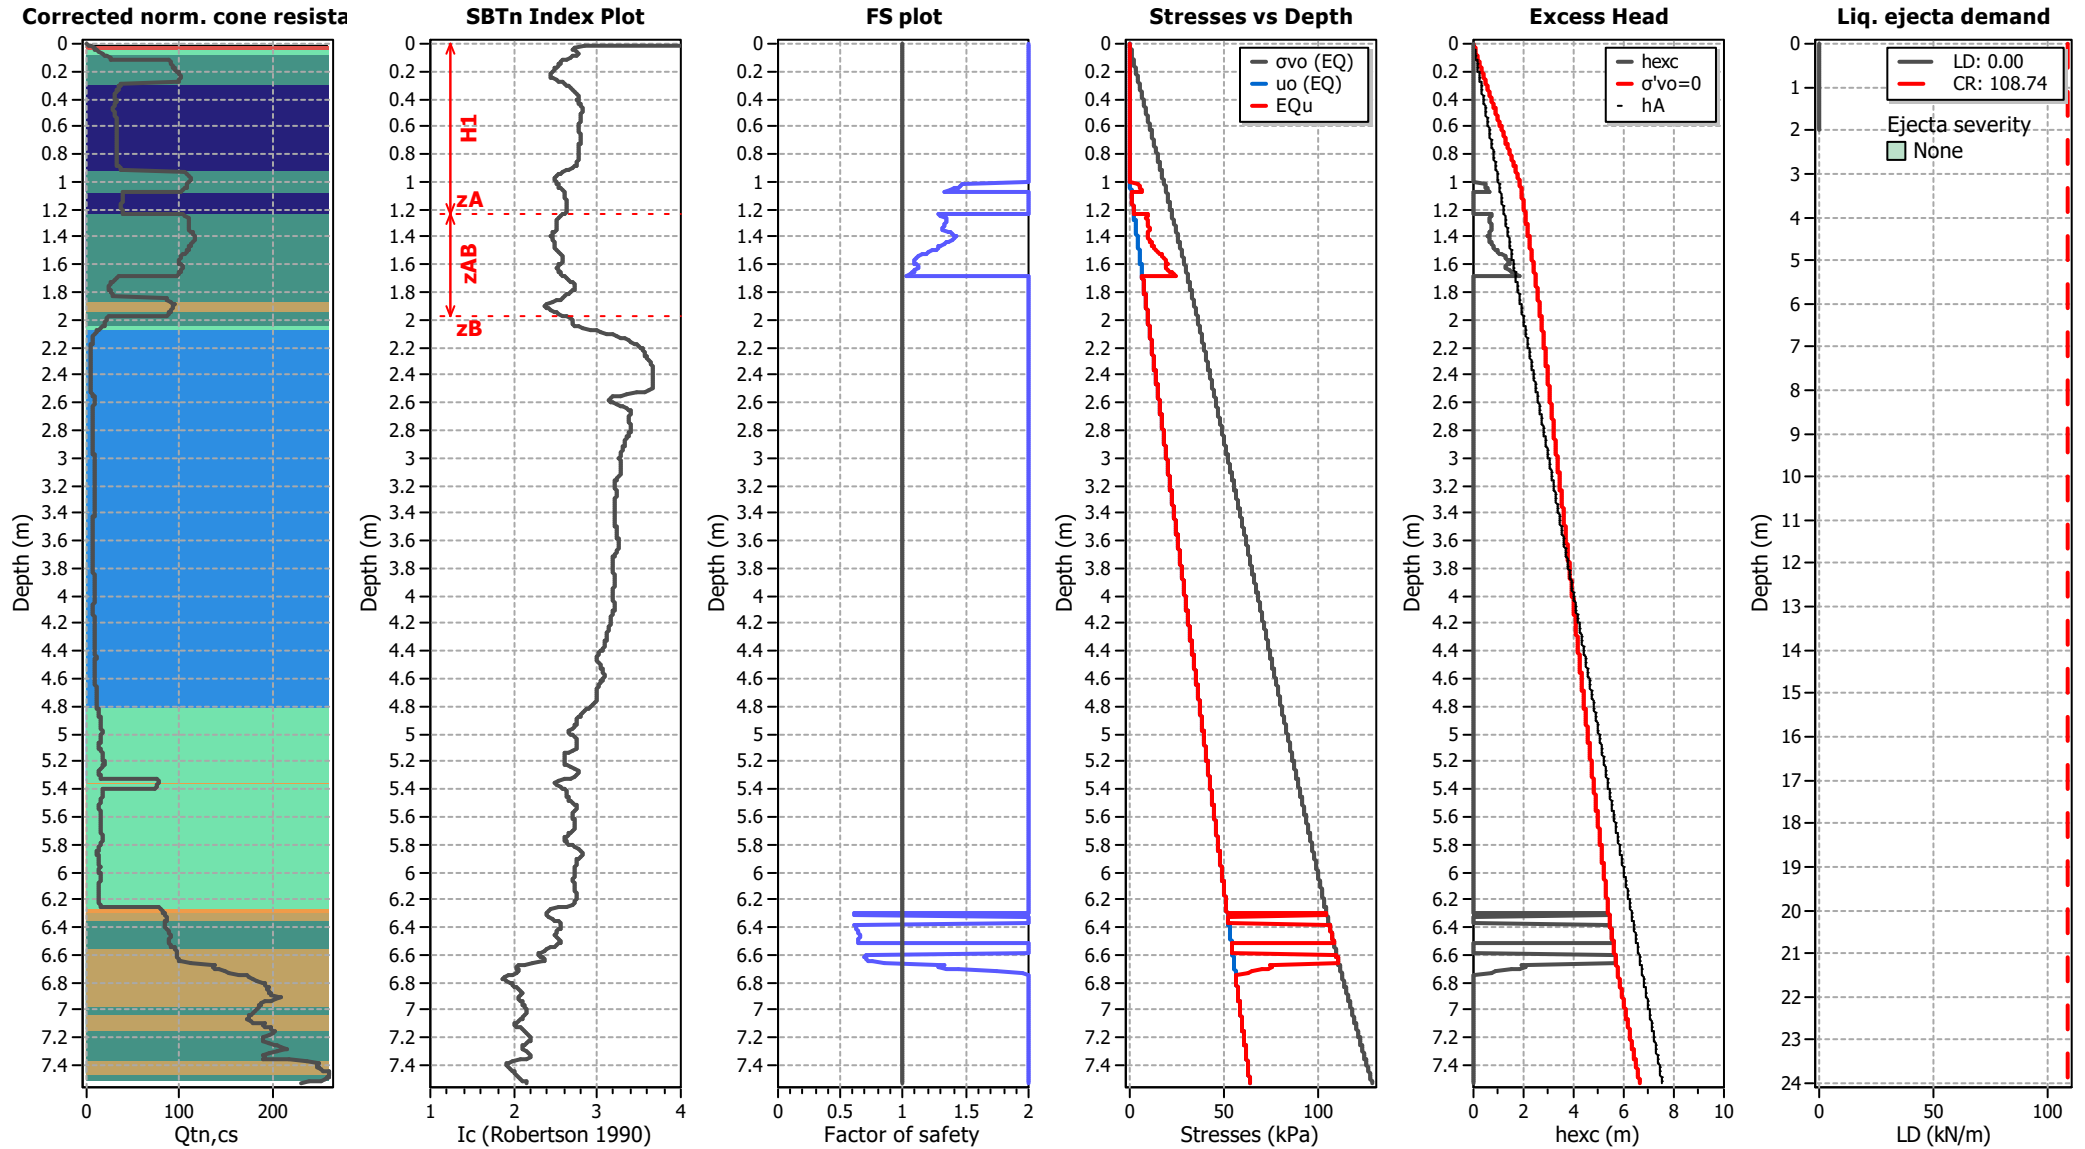

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT03A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

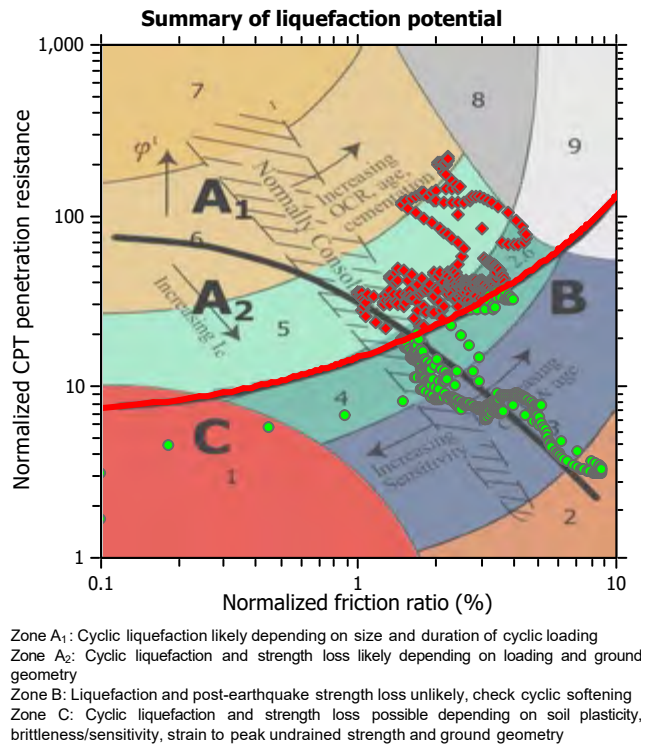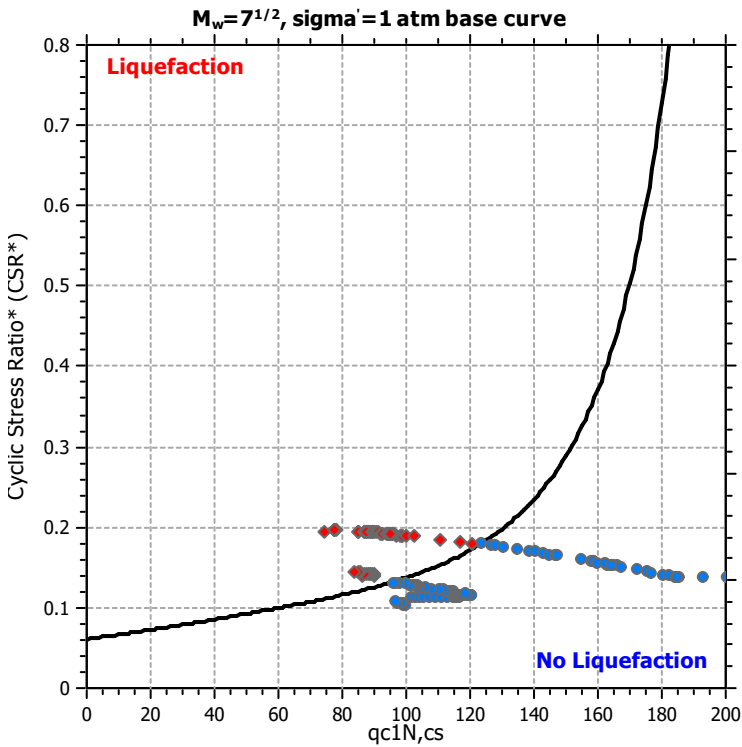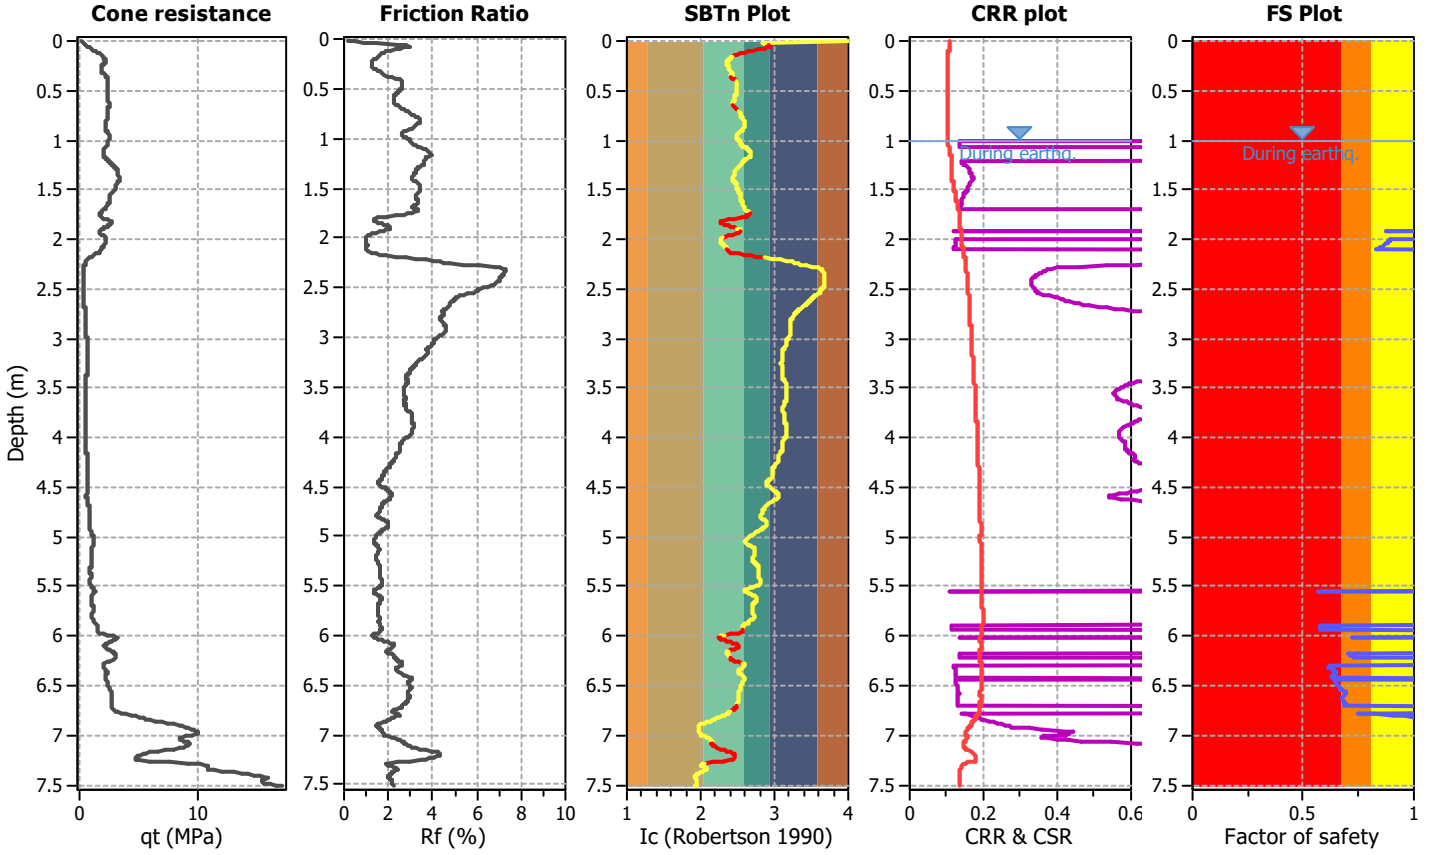

CPT basic interpretation plots

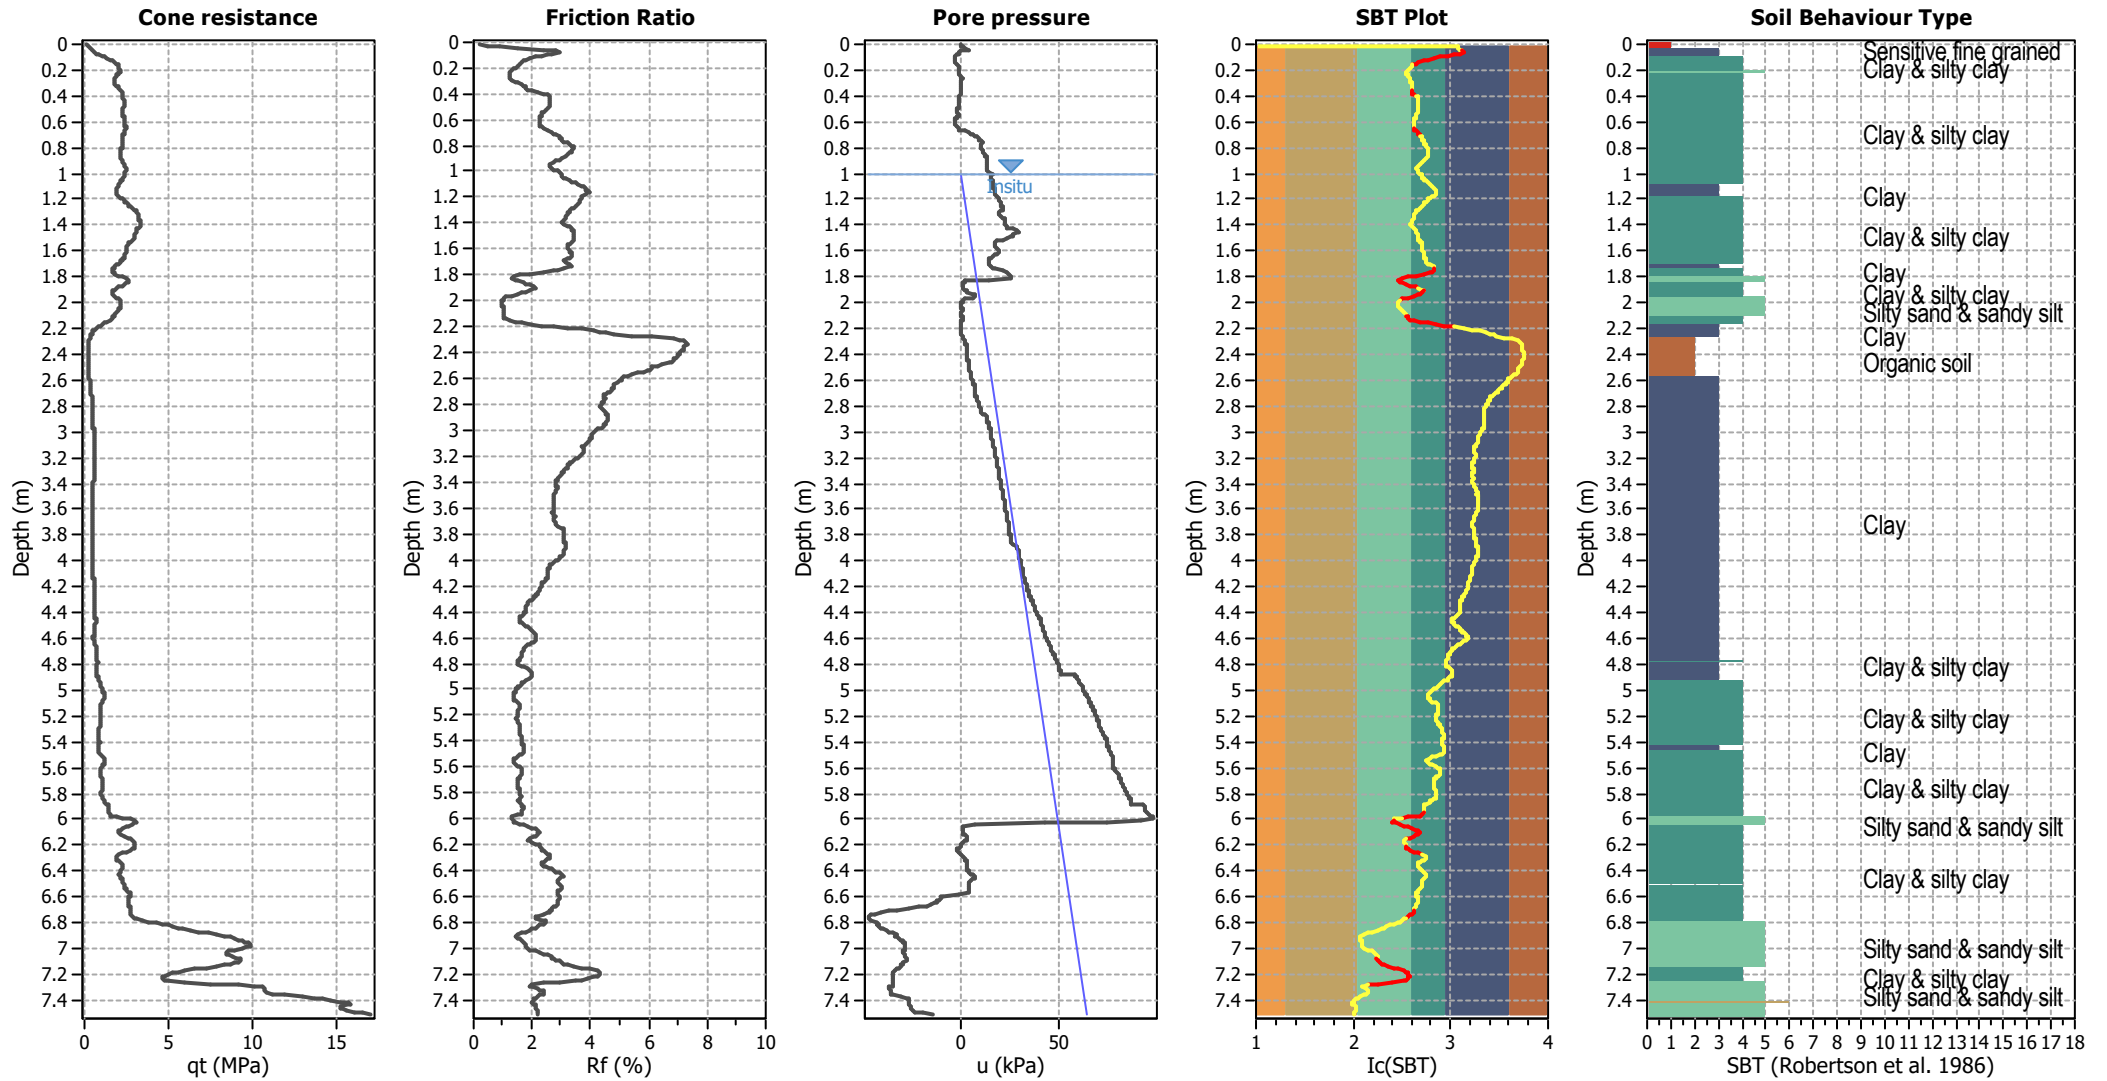


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

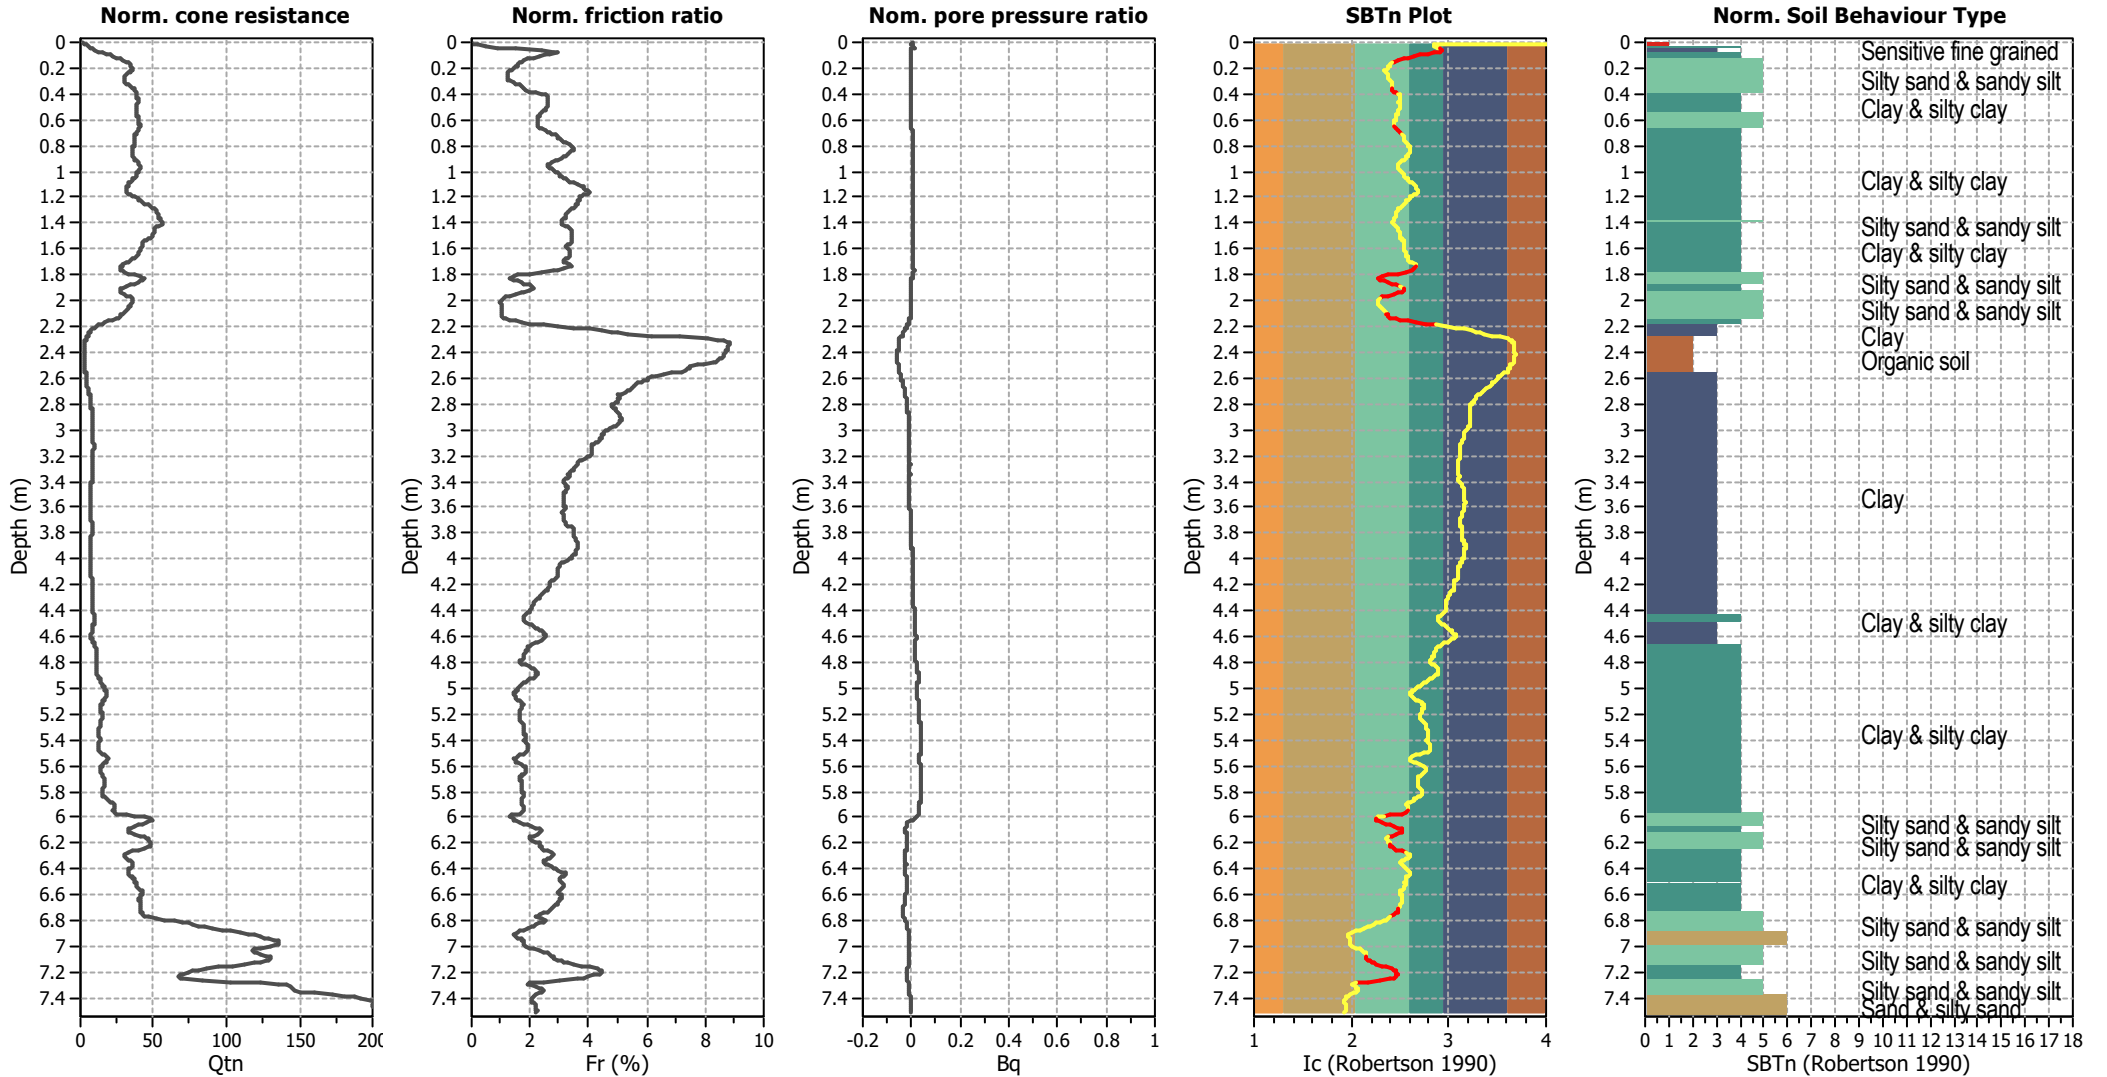


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

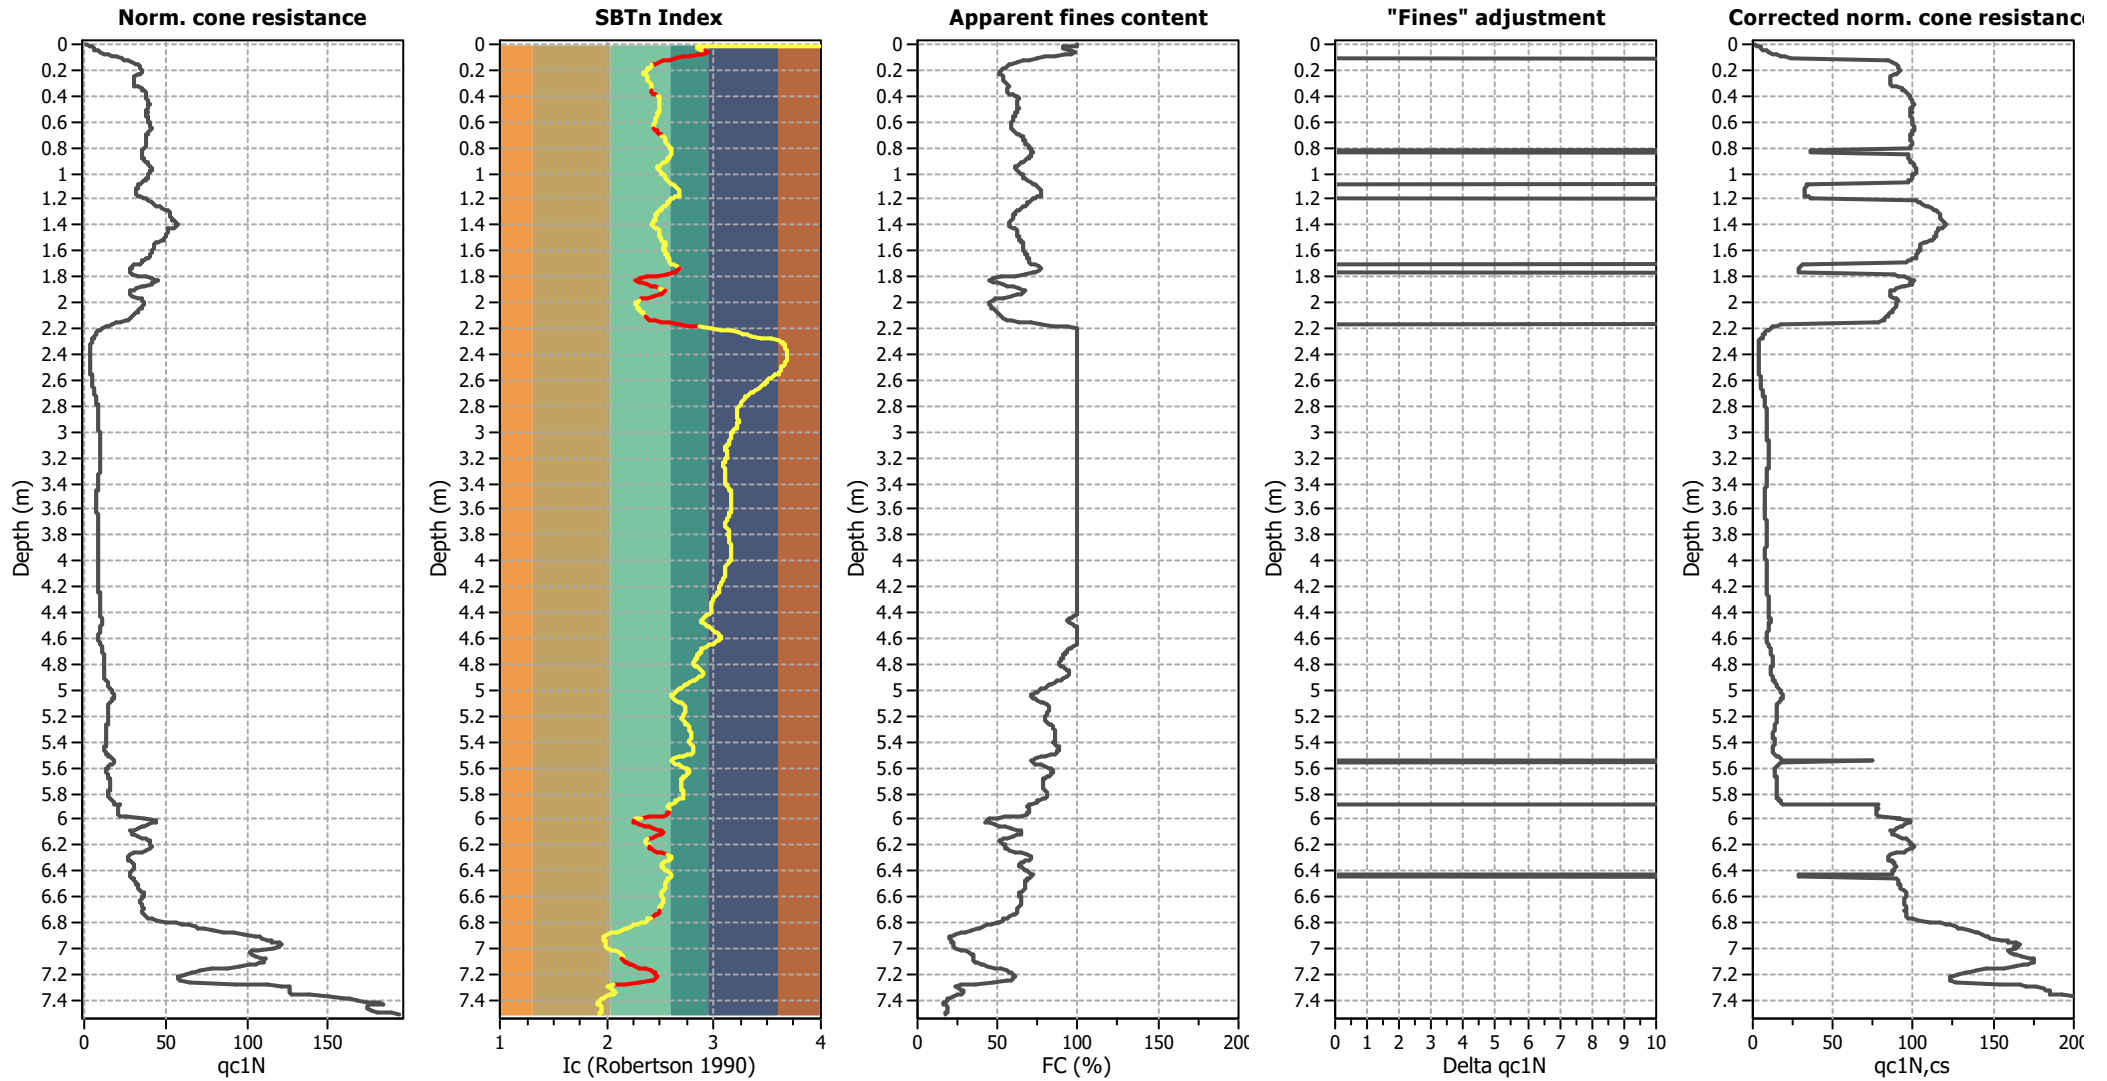

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

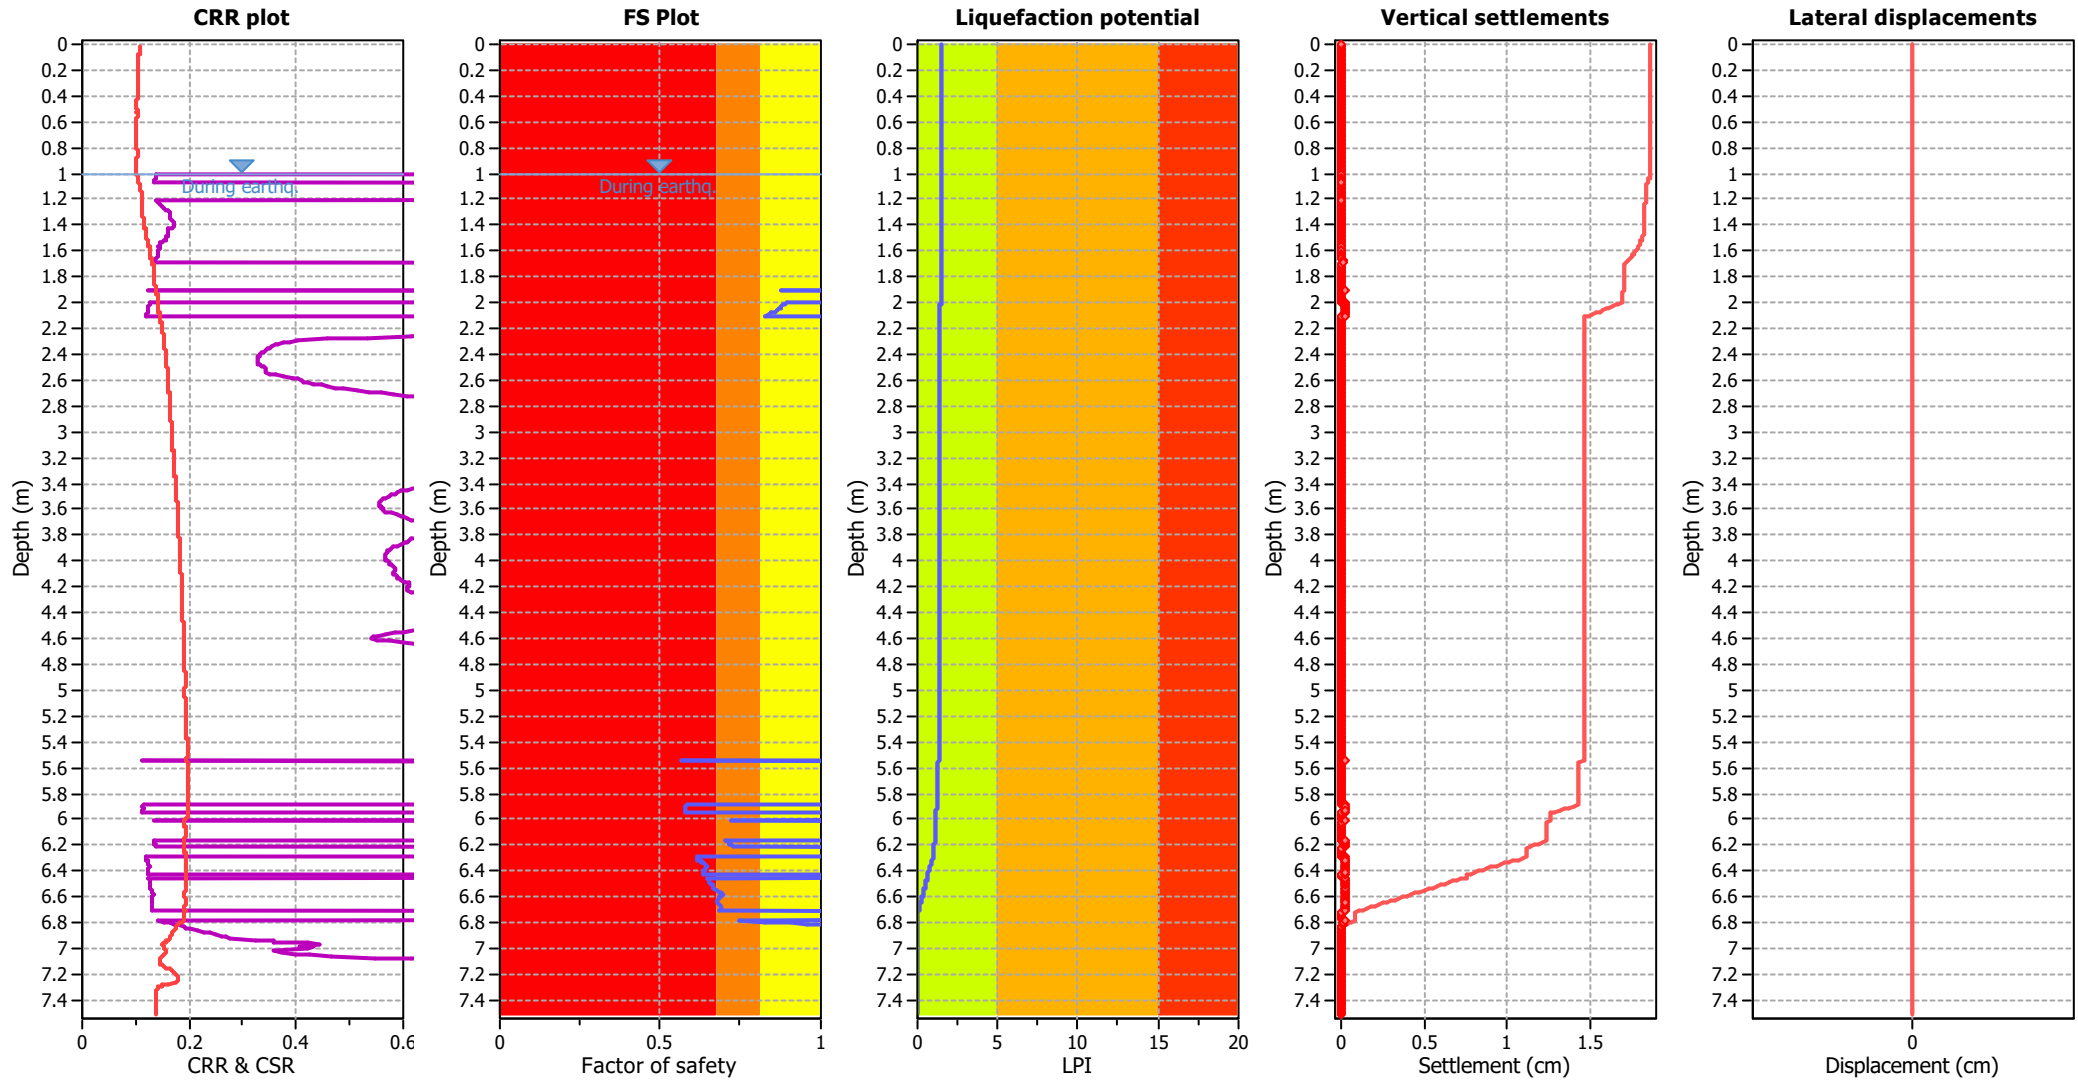

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

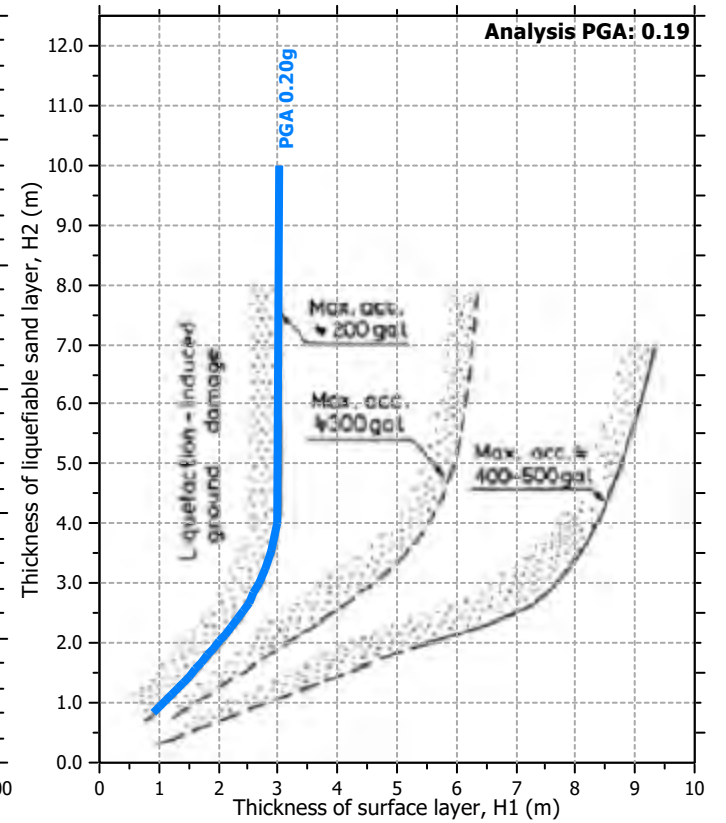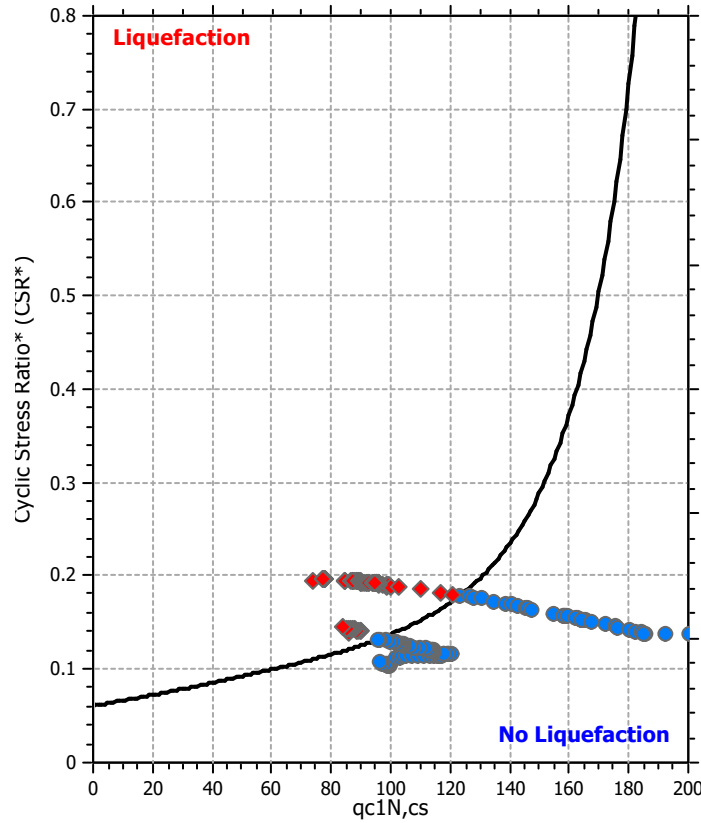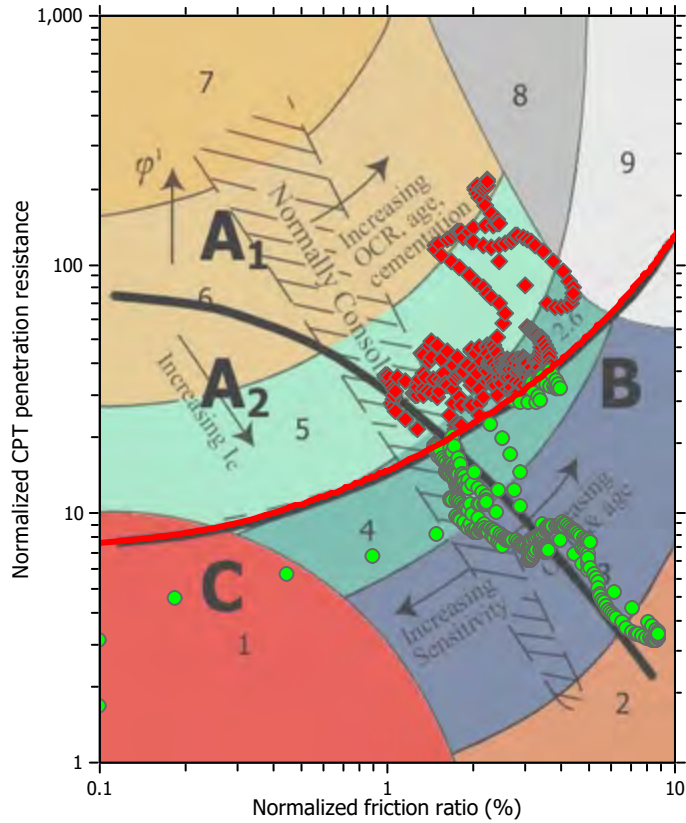

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

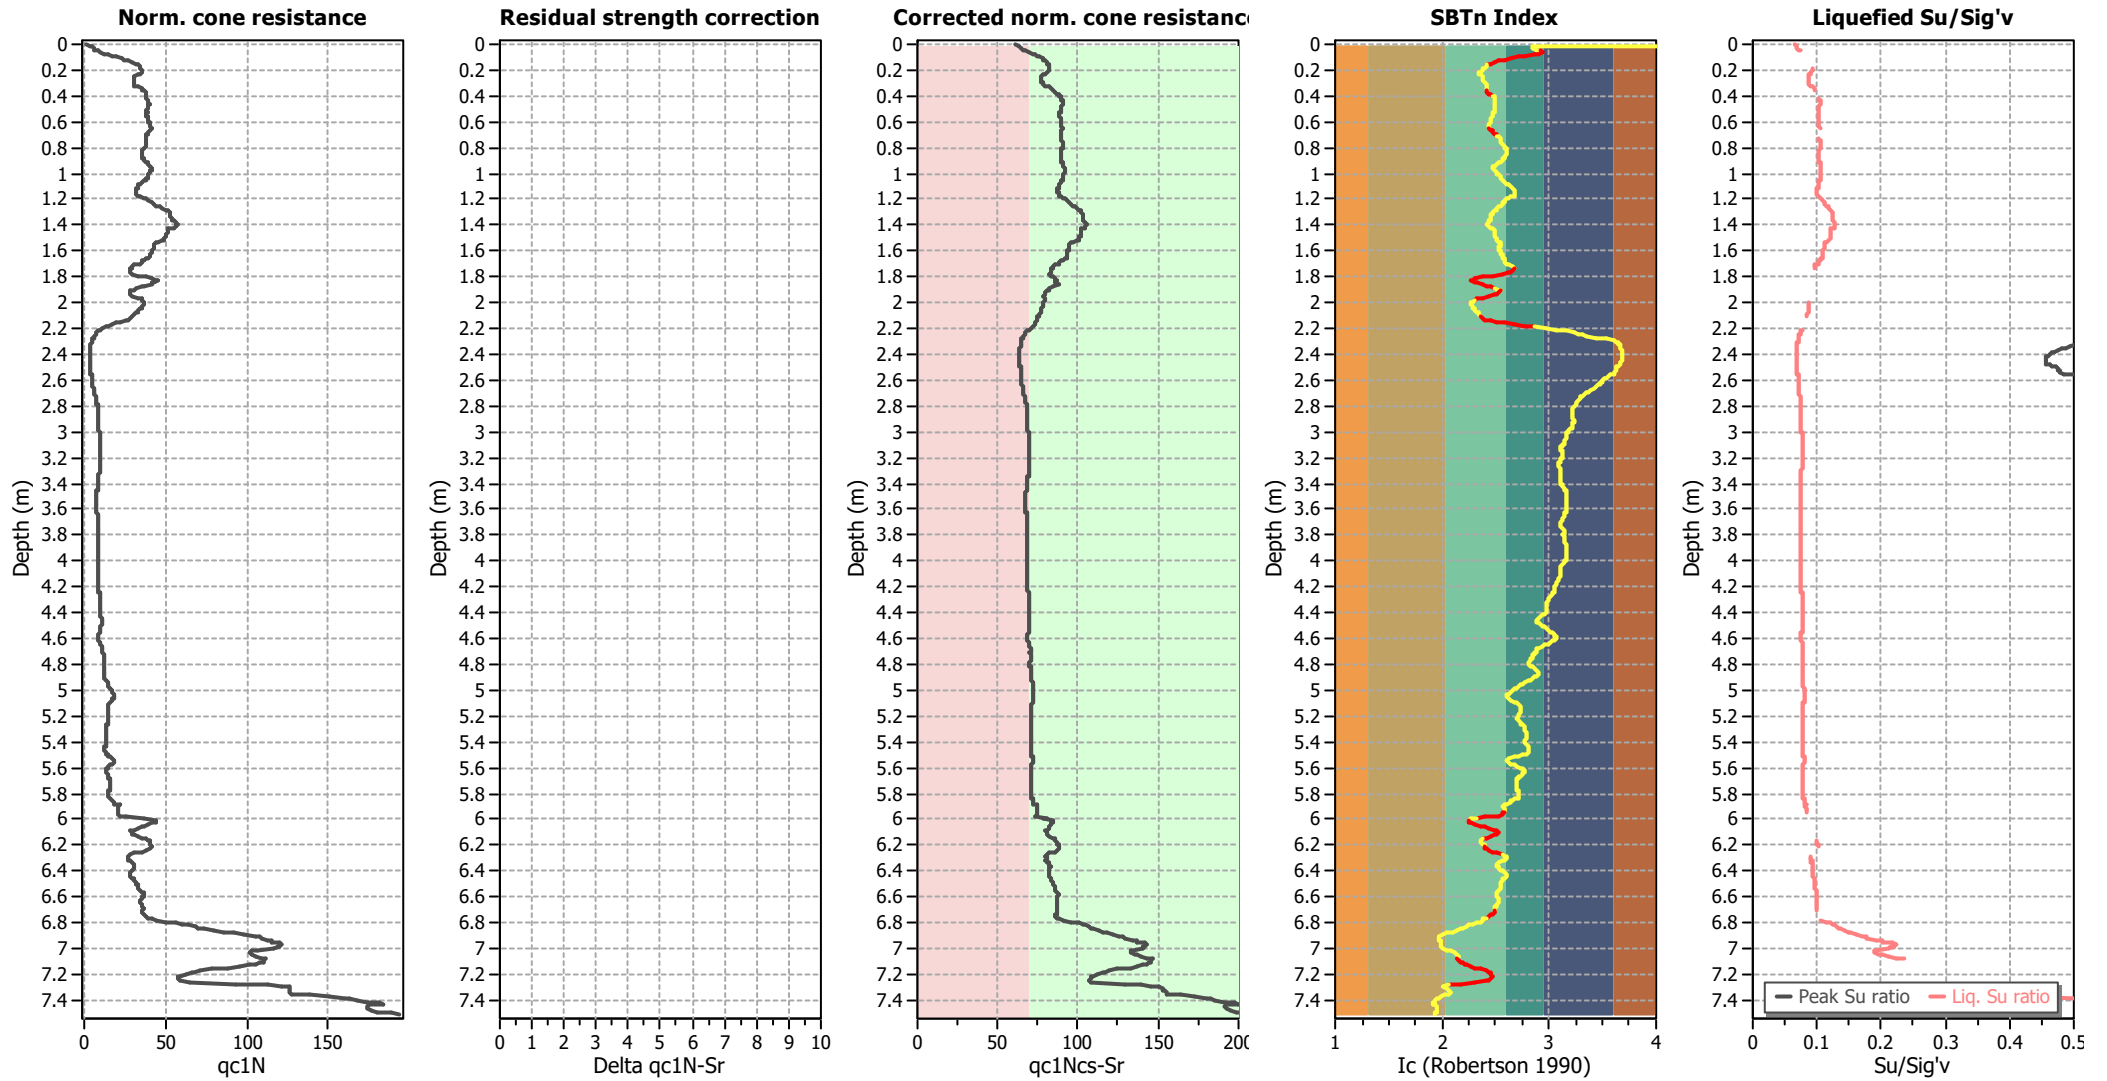

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

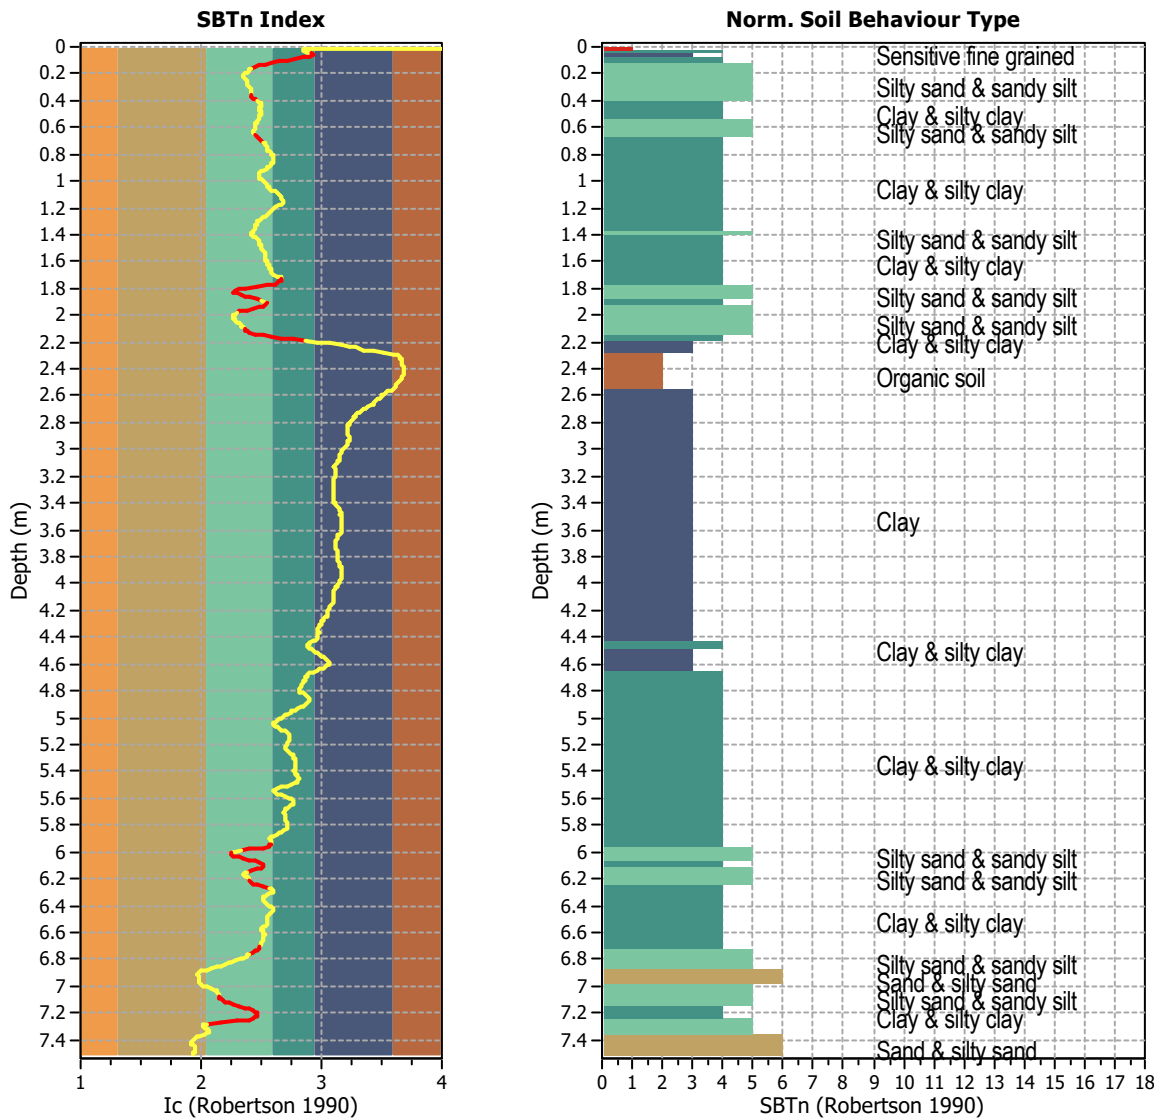


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 752
 Total points excluded: 114
 Exclusion percentage: 15.16%
 Number of layers detected: 14


Estimation of post-earthquake settlements

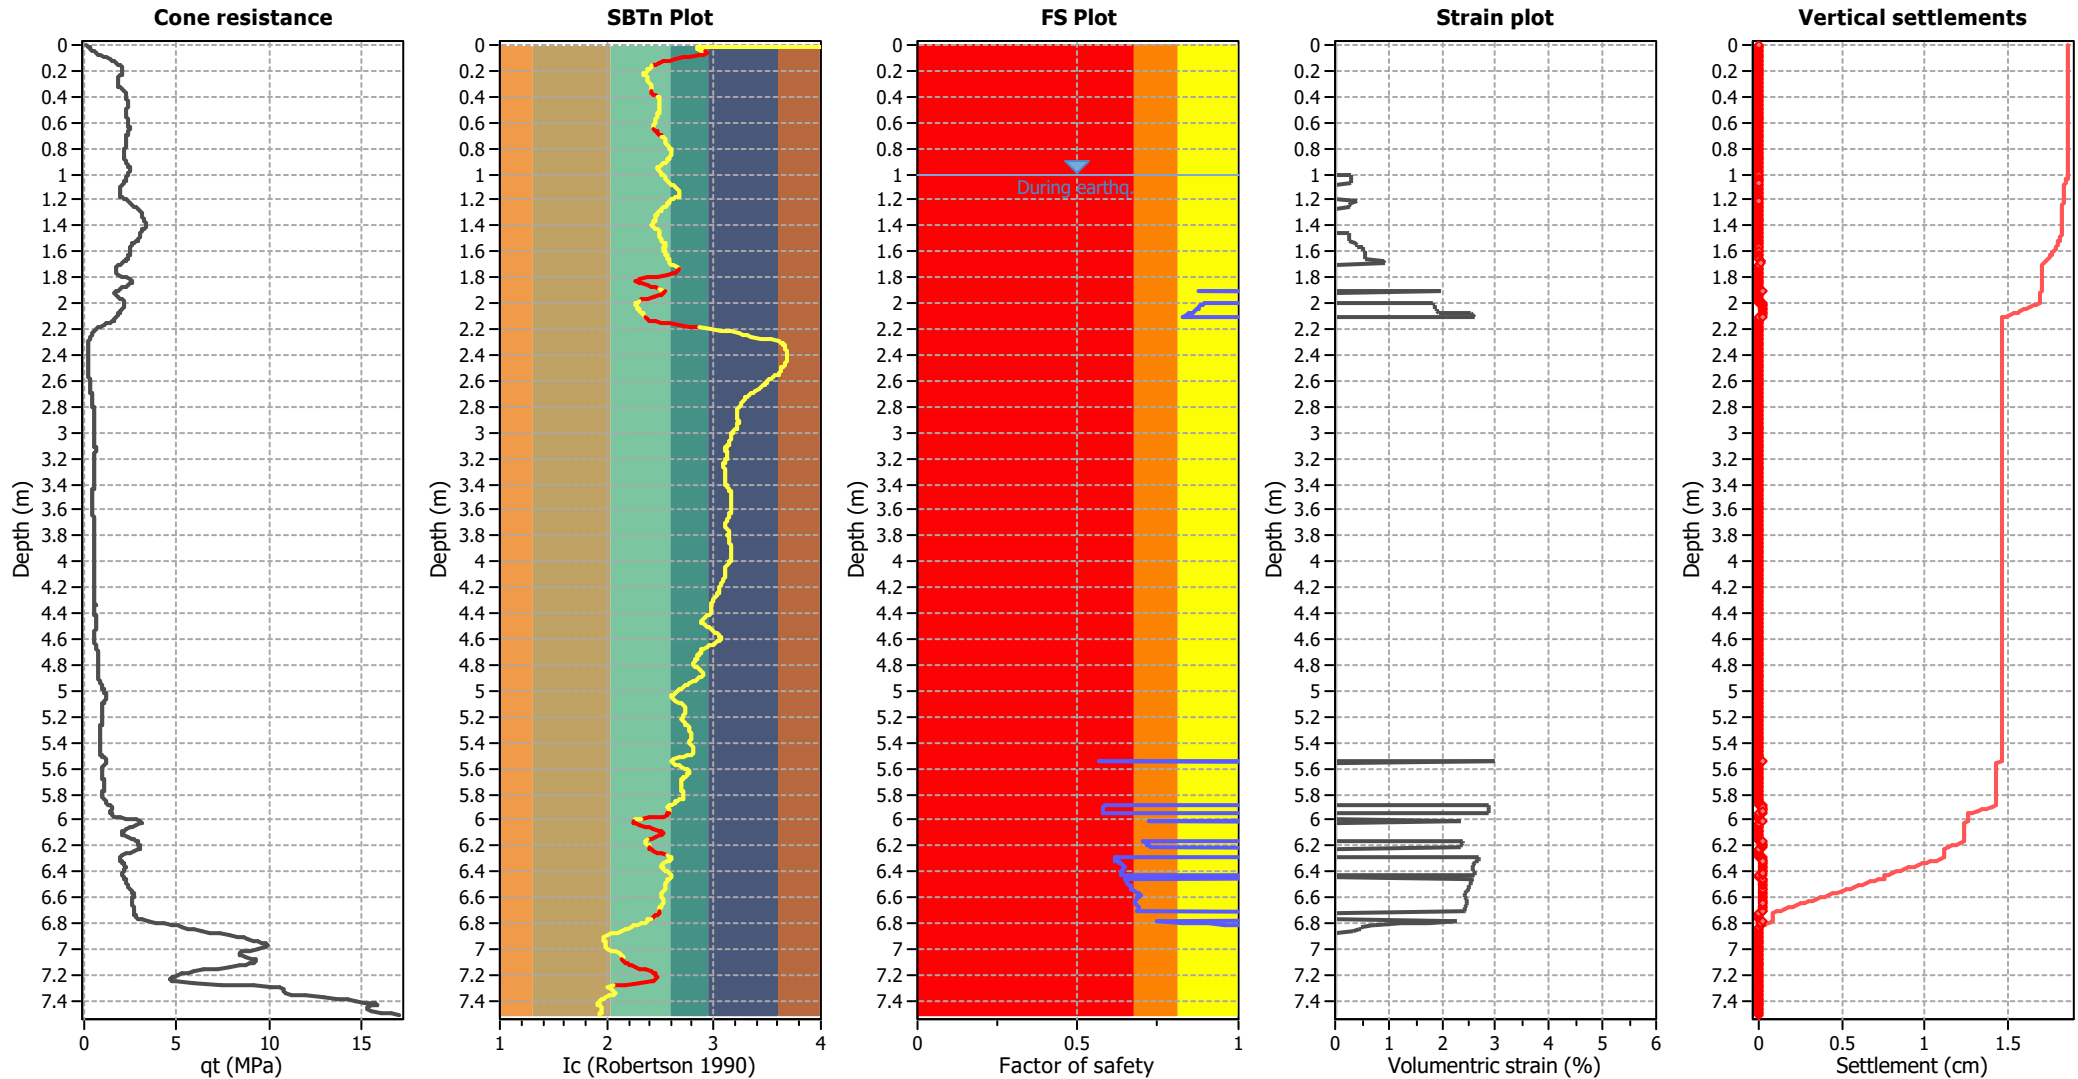

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

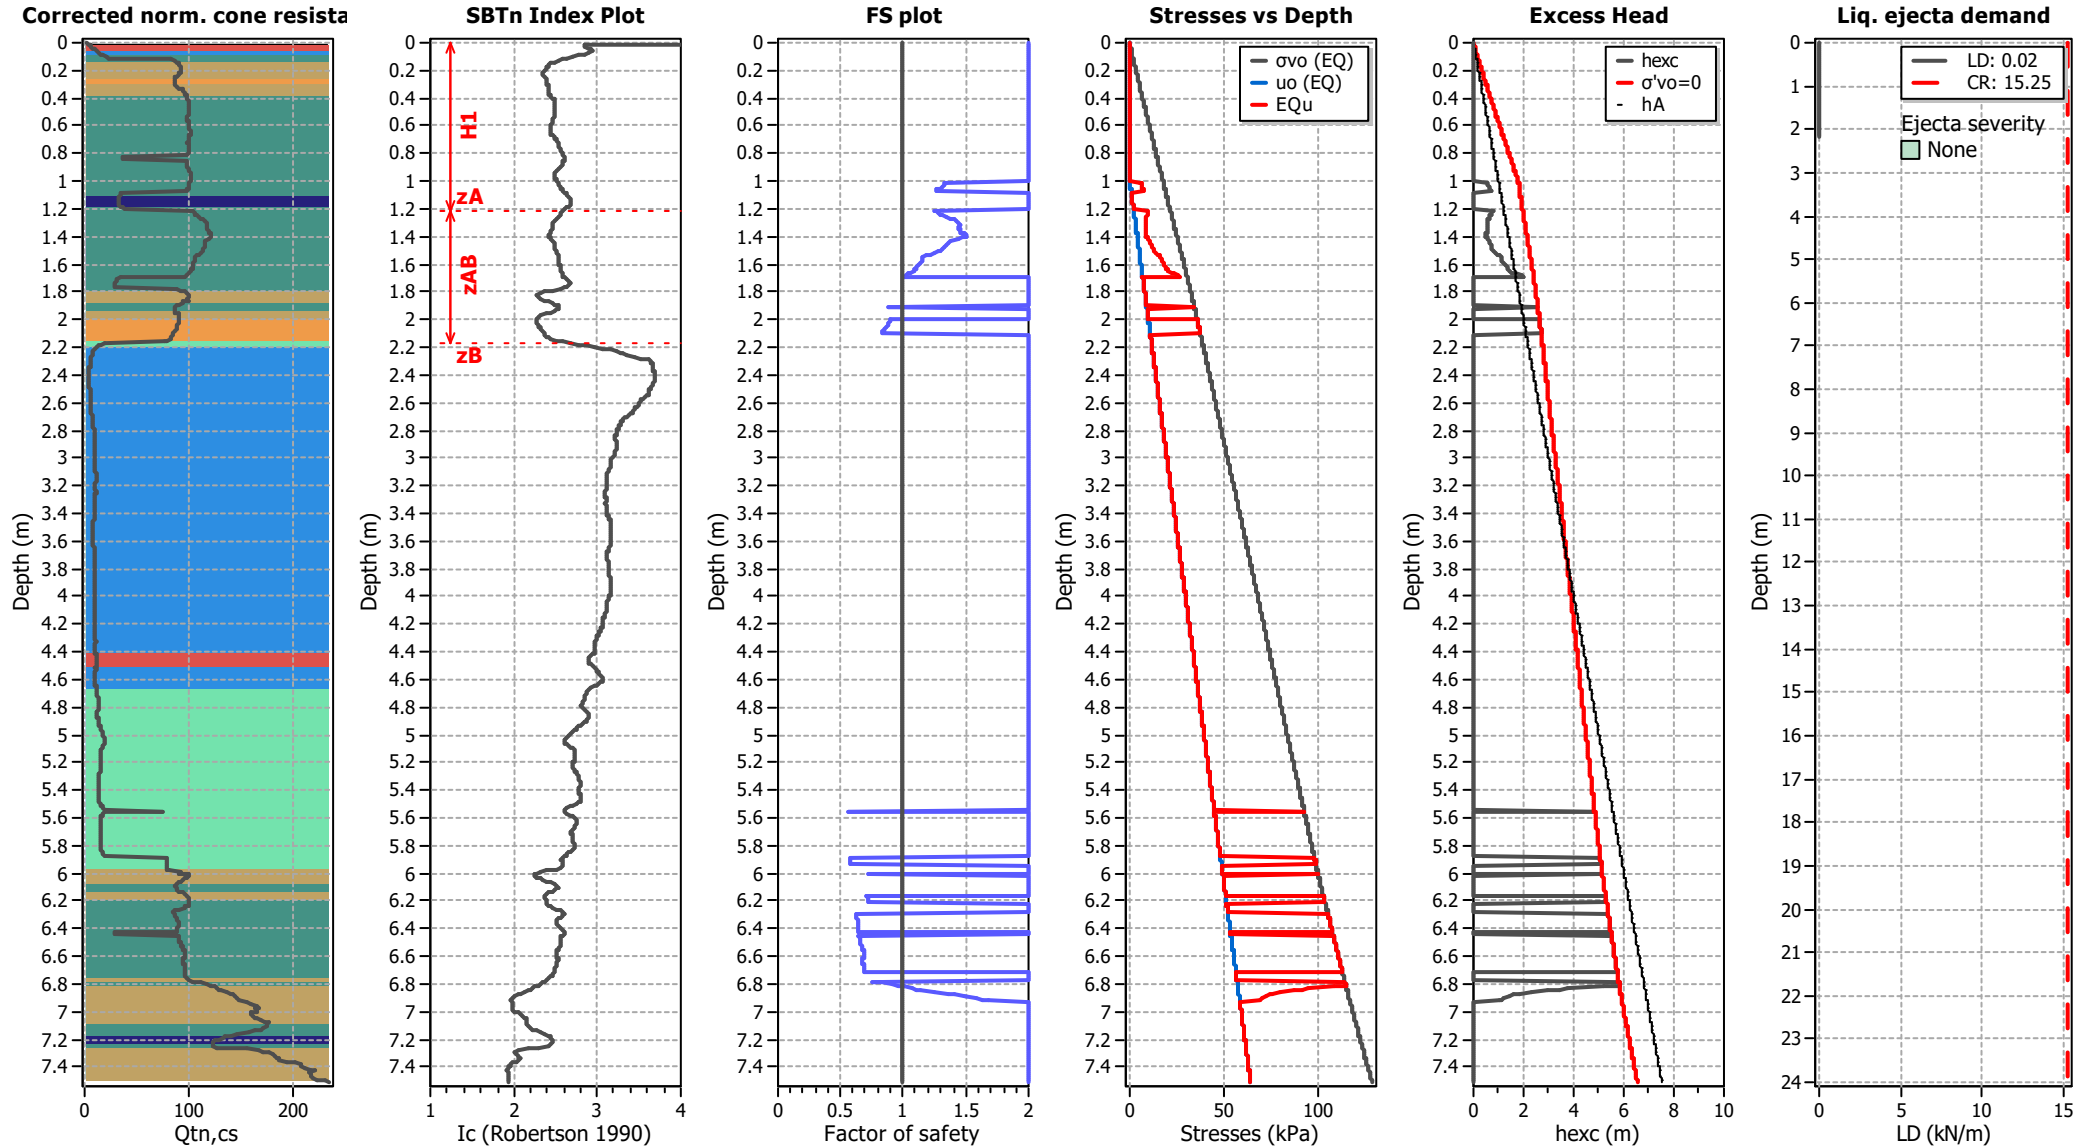

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT04A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

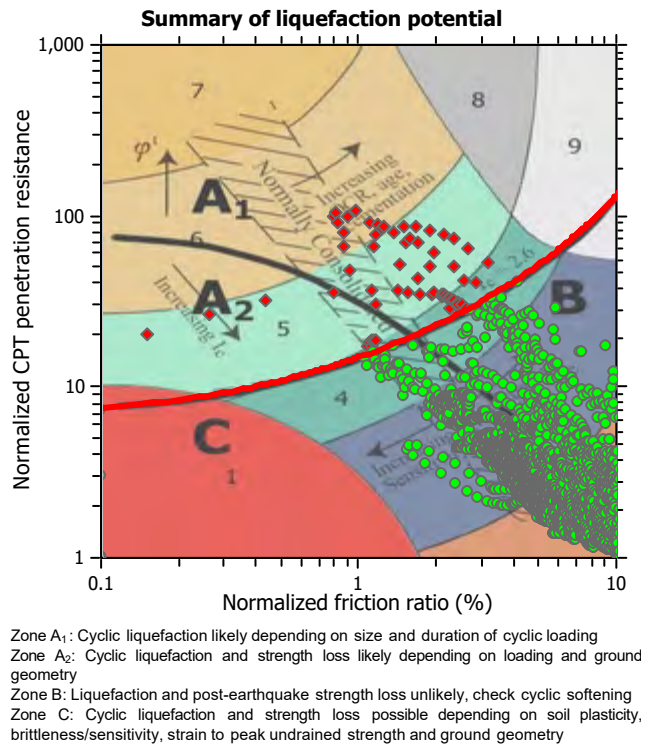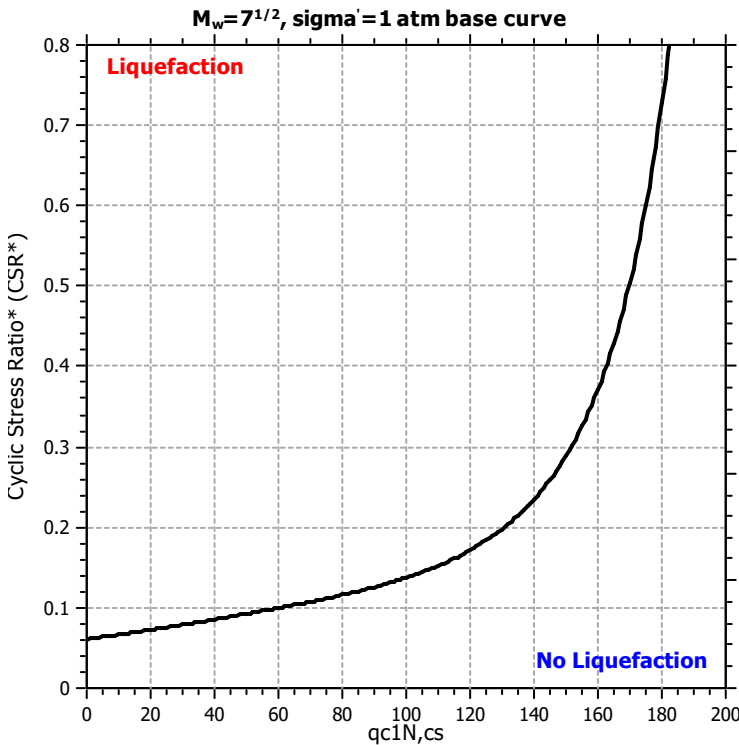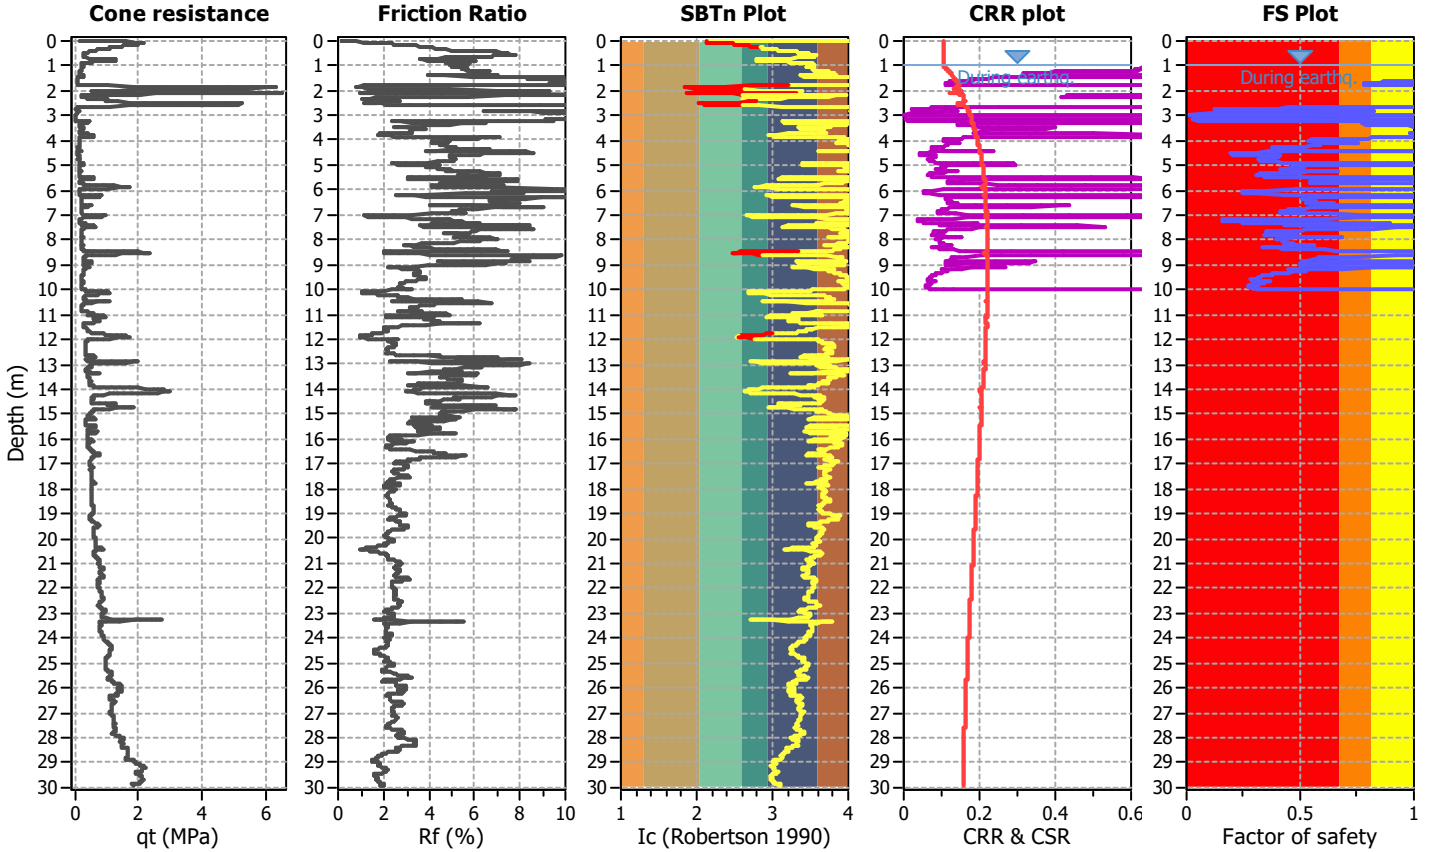

CPT basic interpretation plots

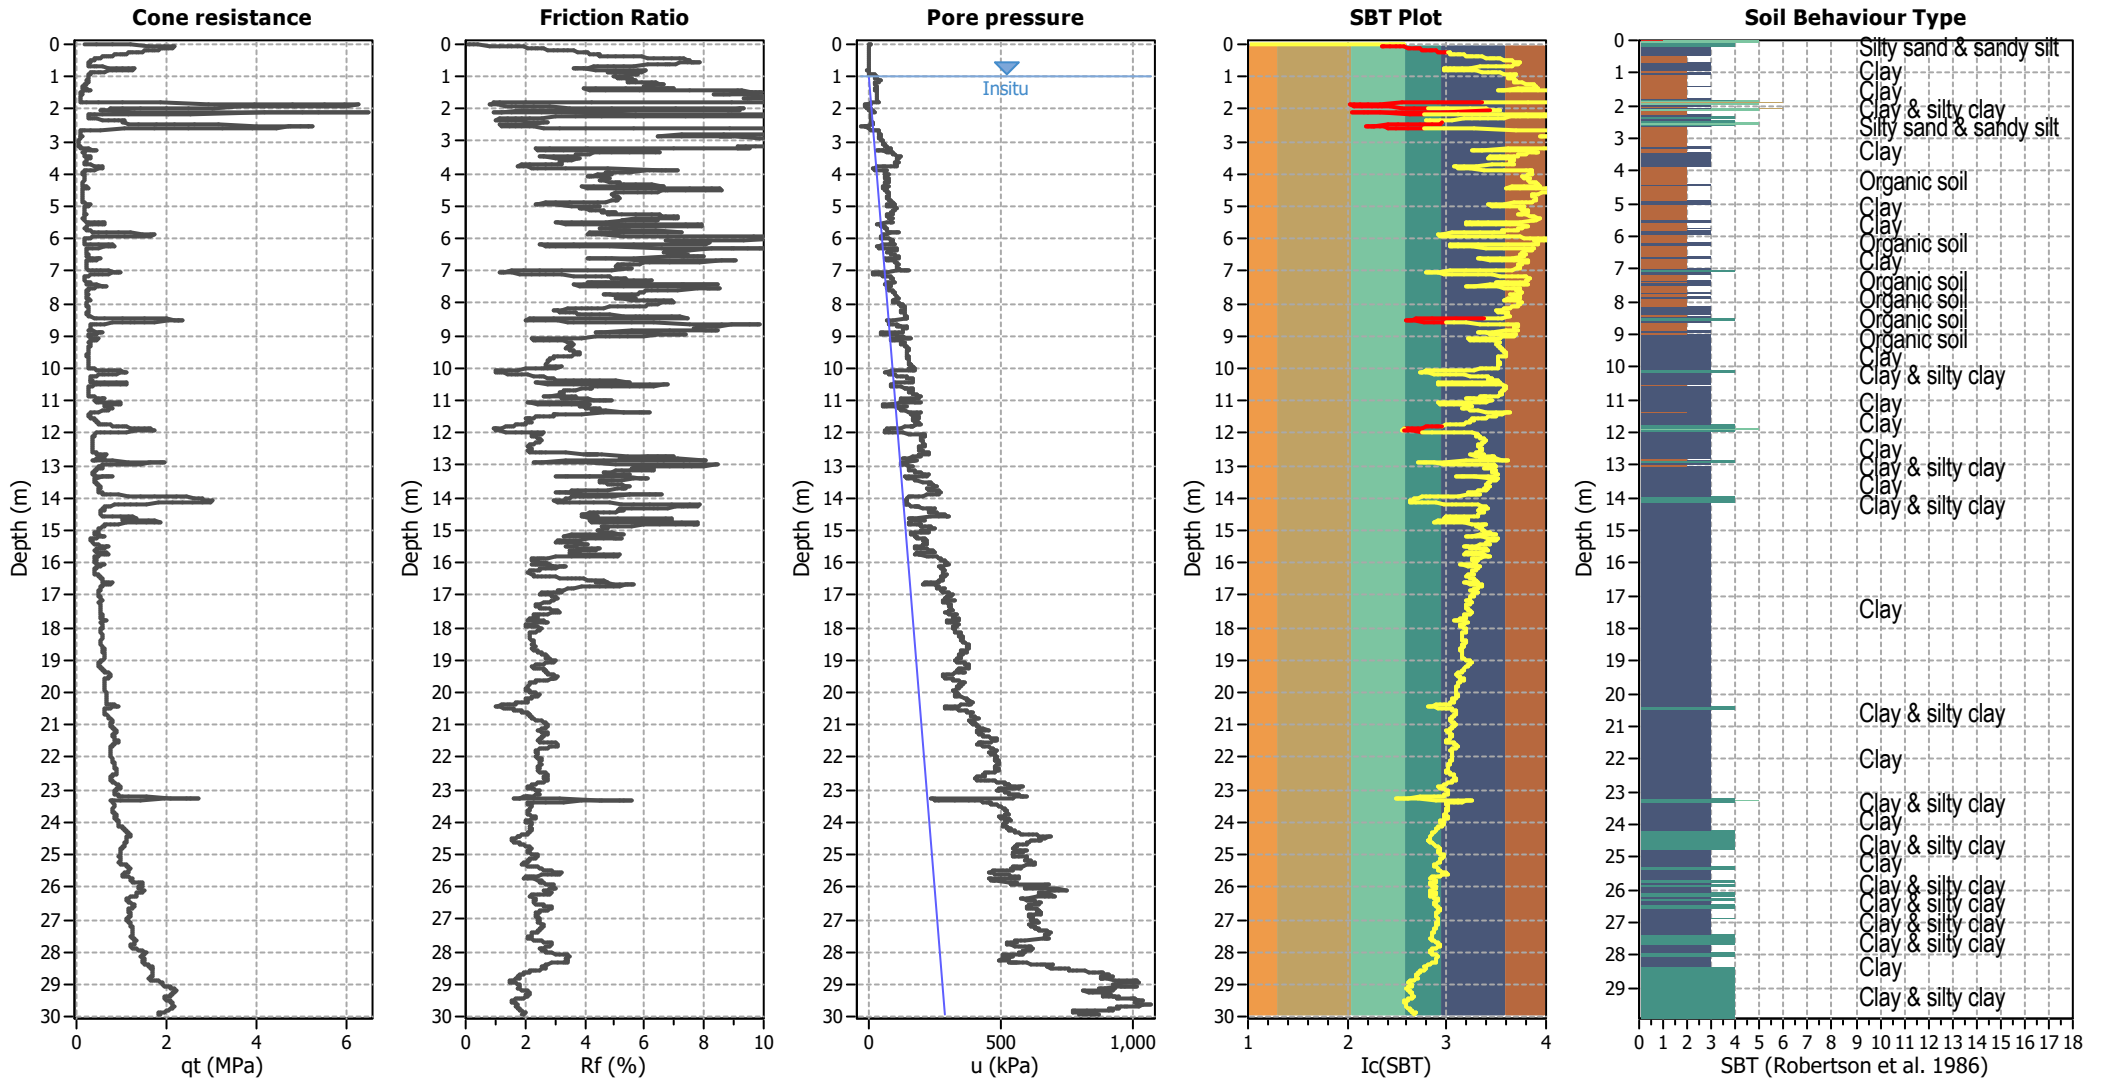


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

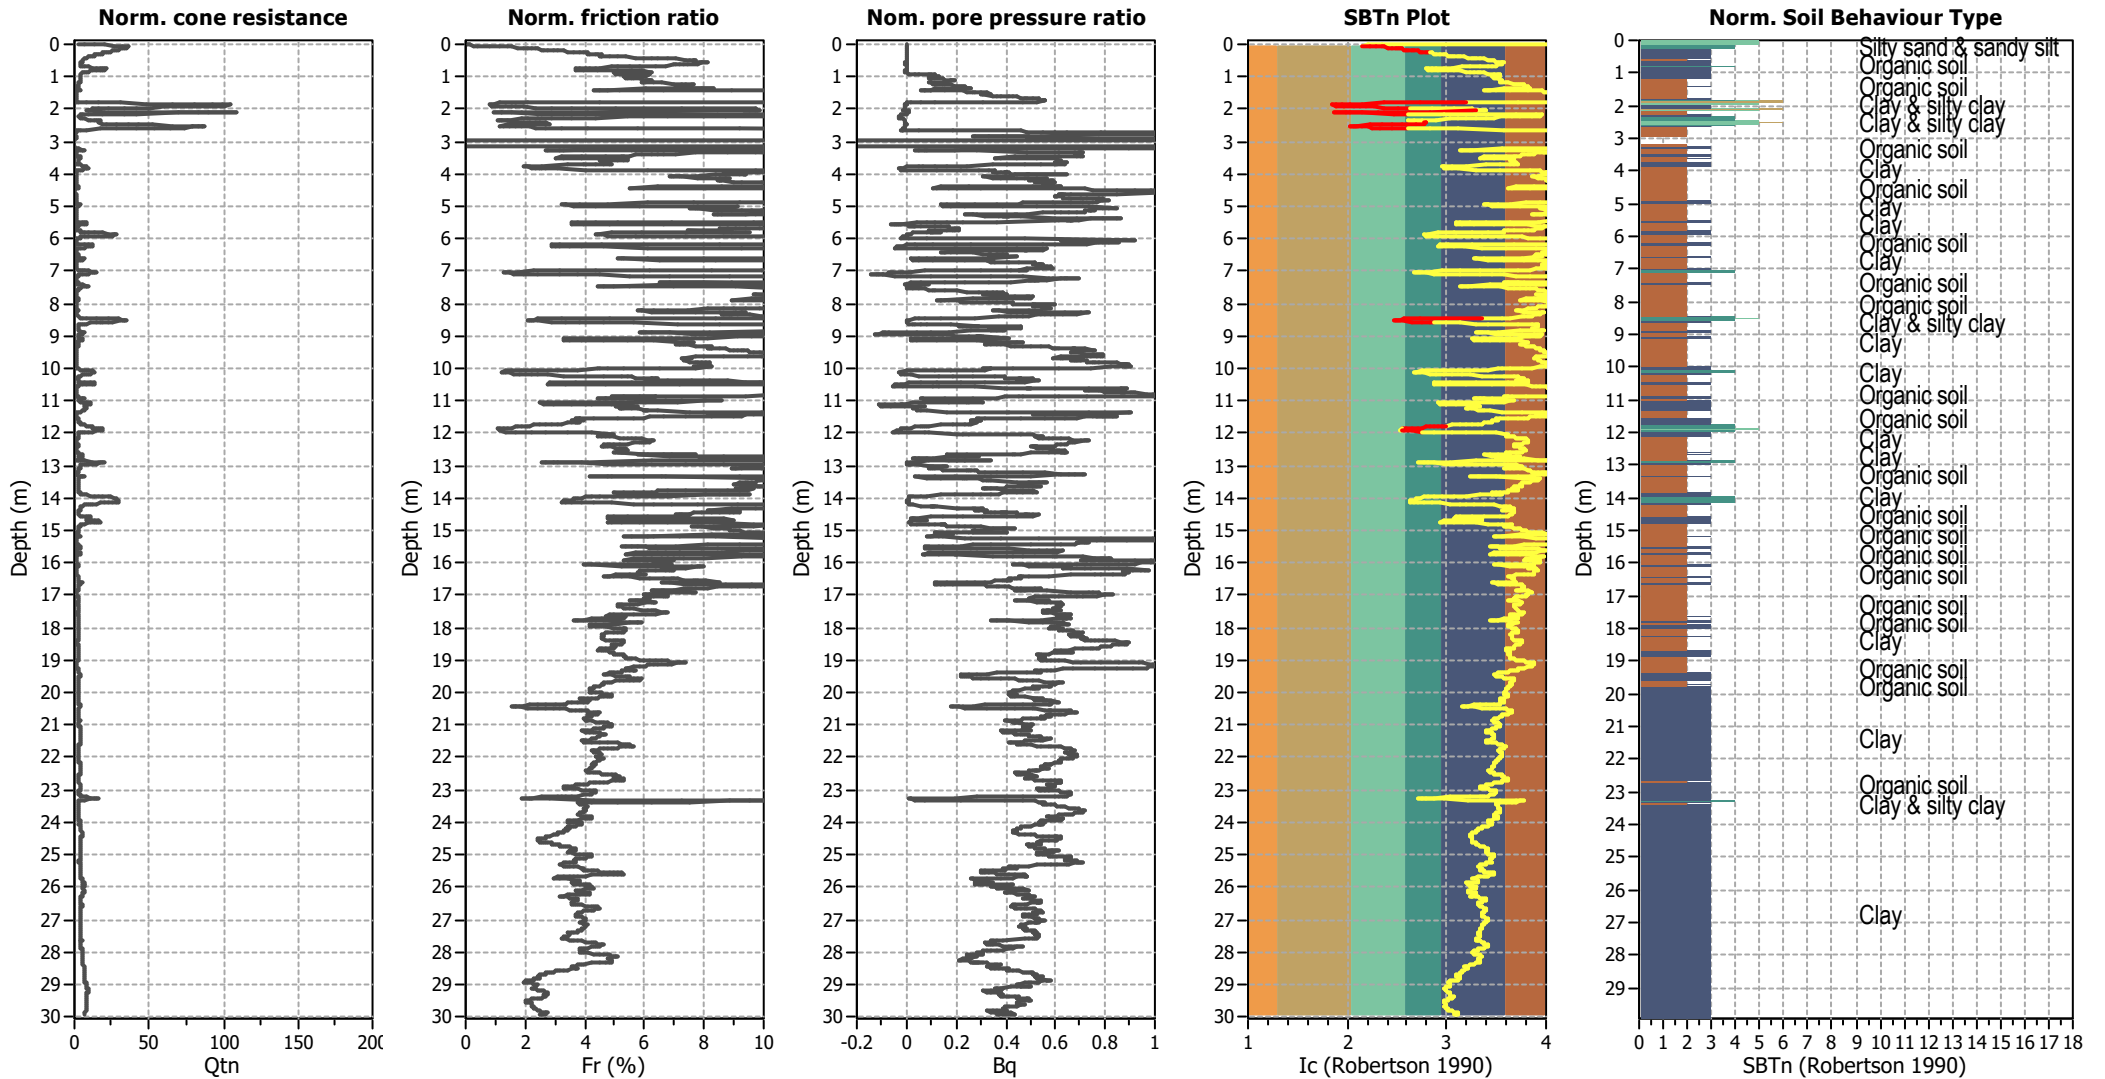


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

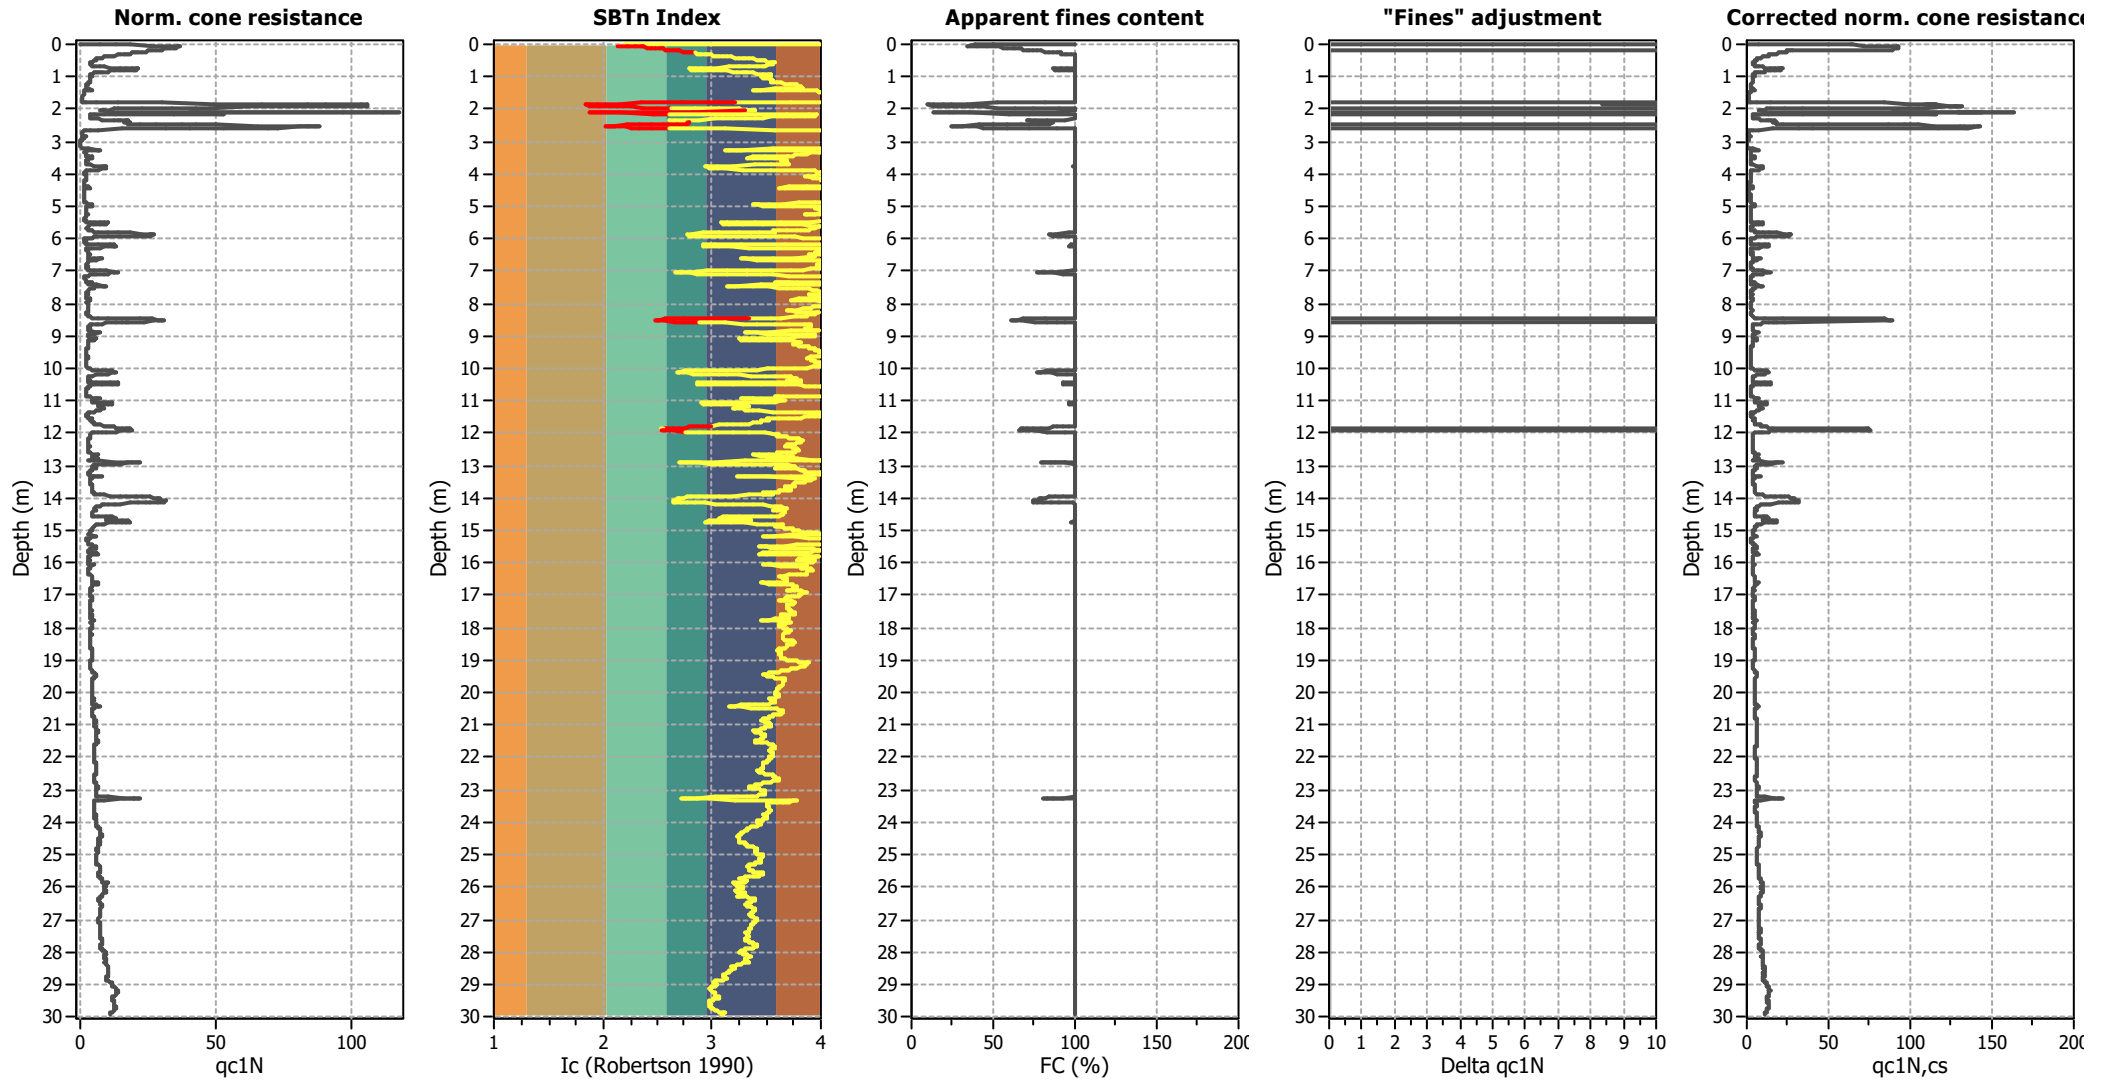

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

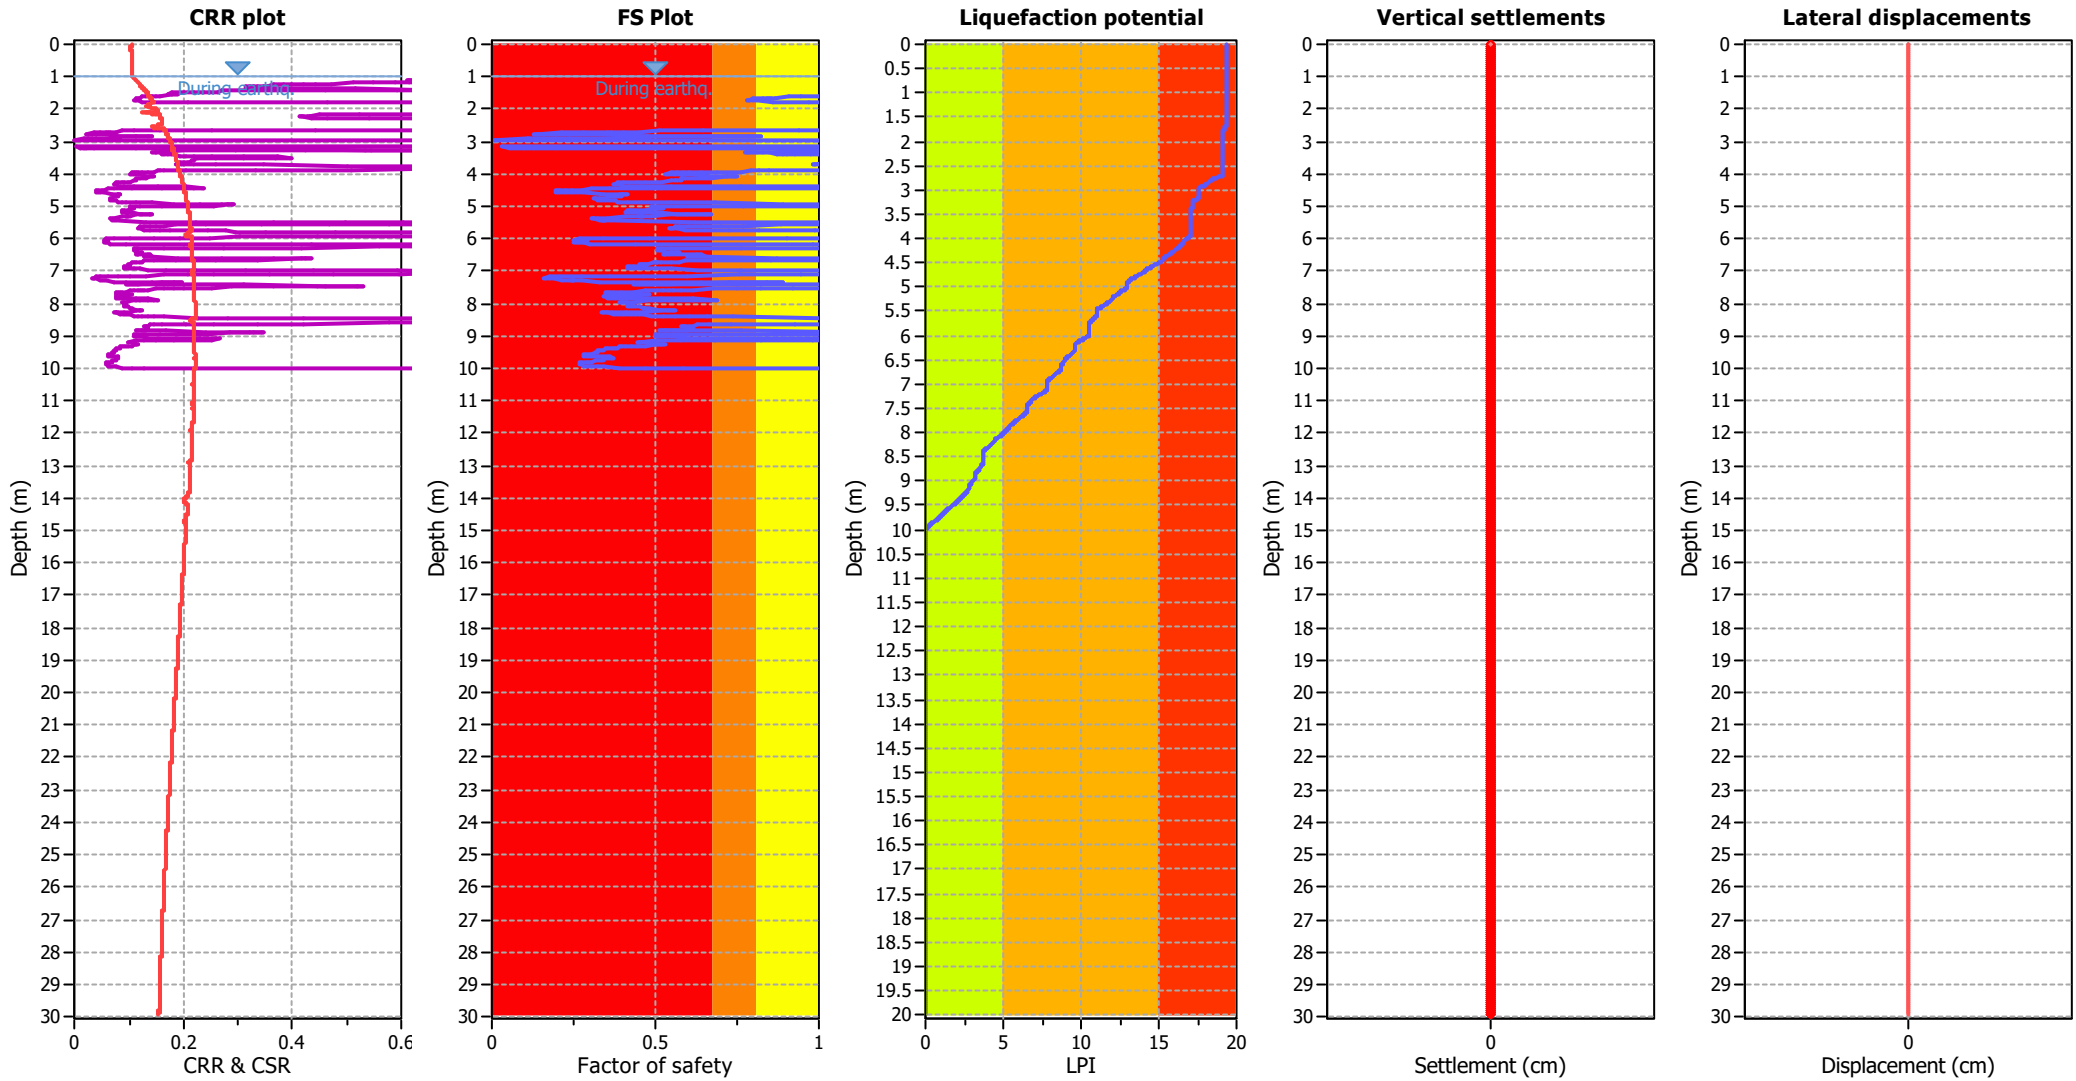

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

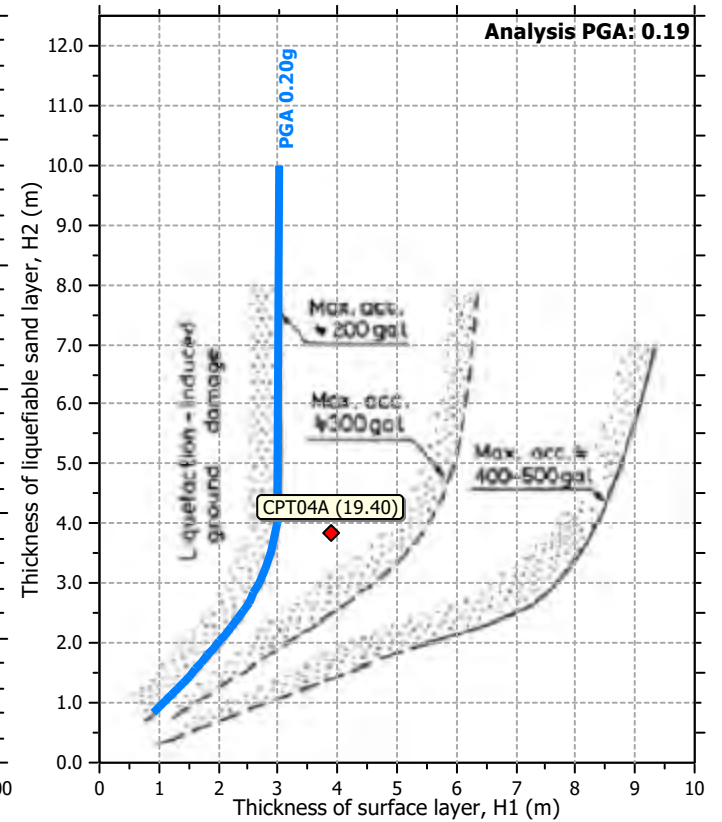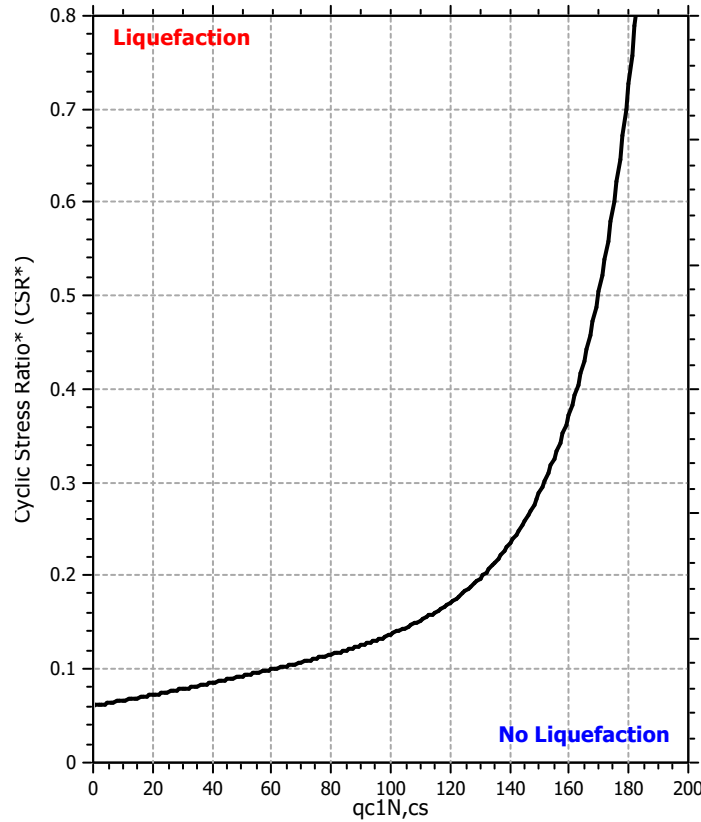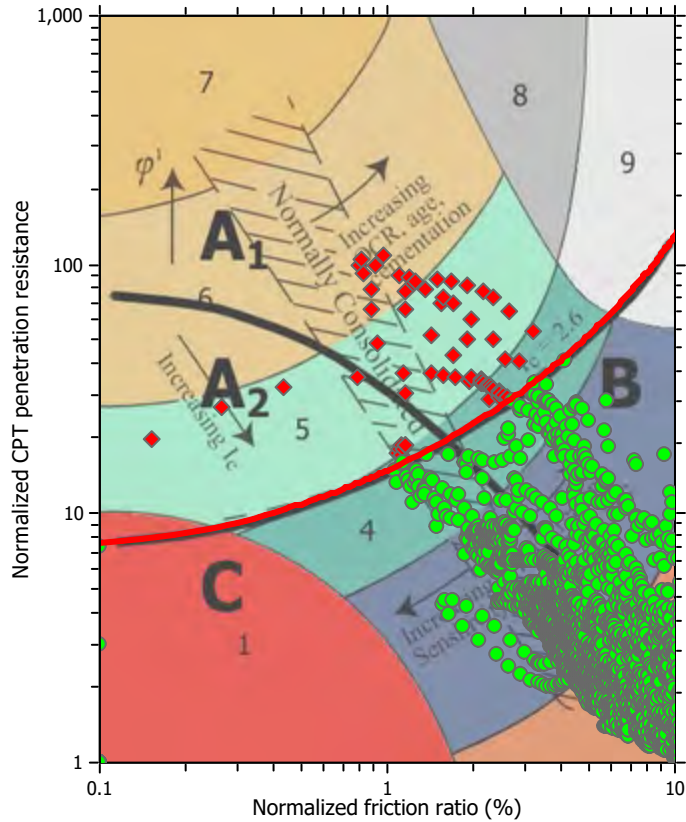

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

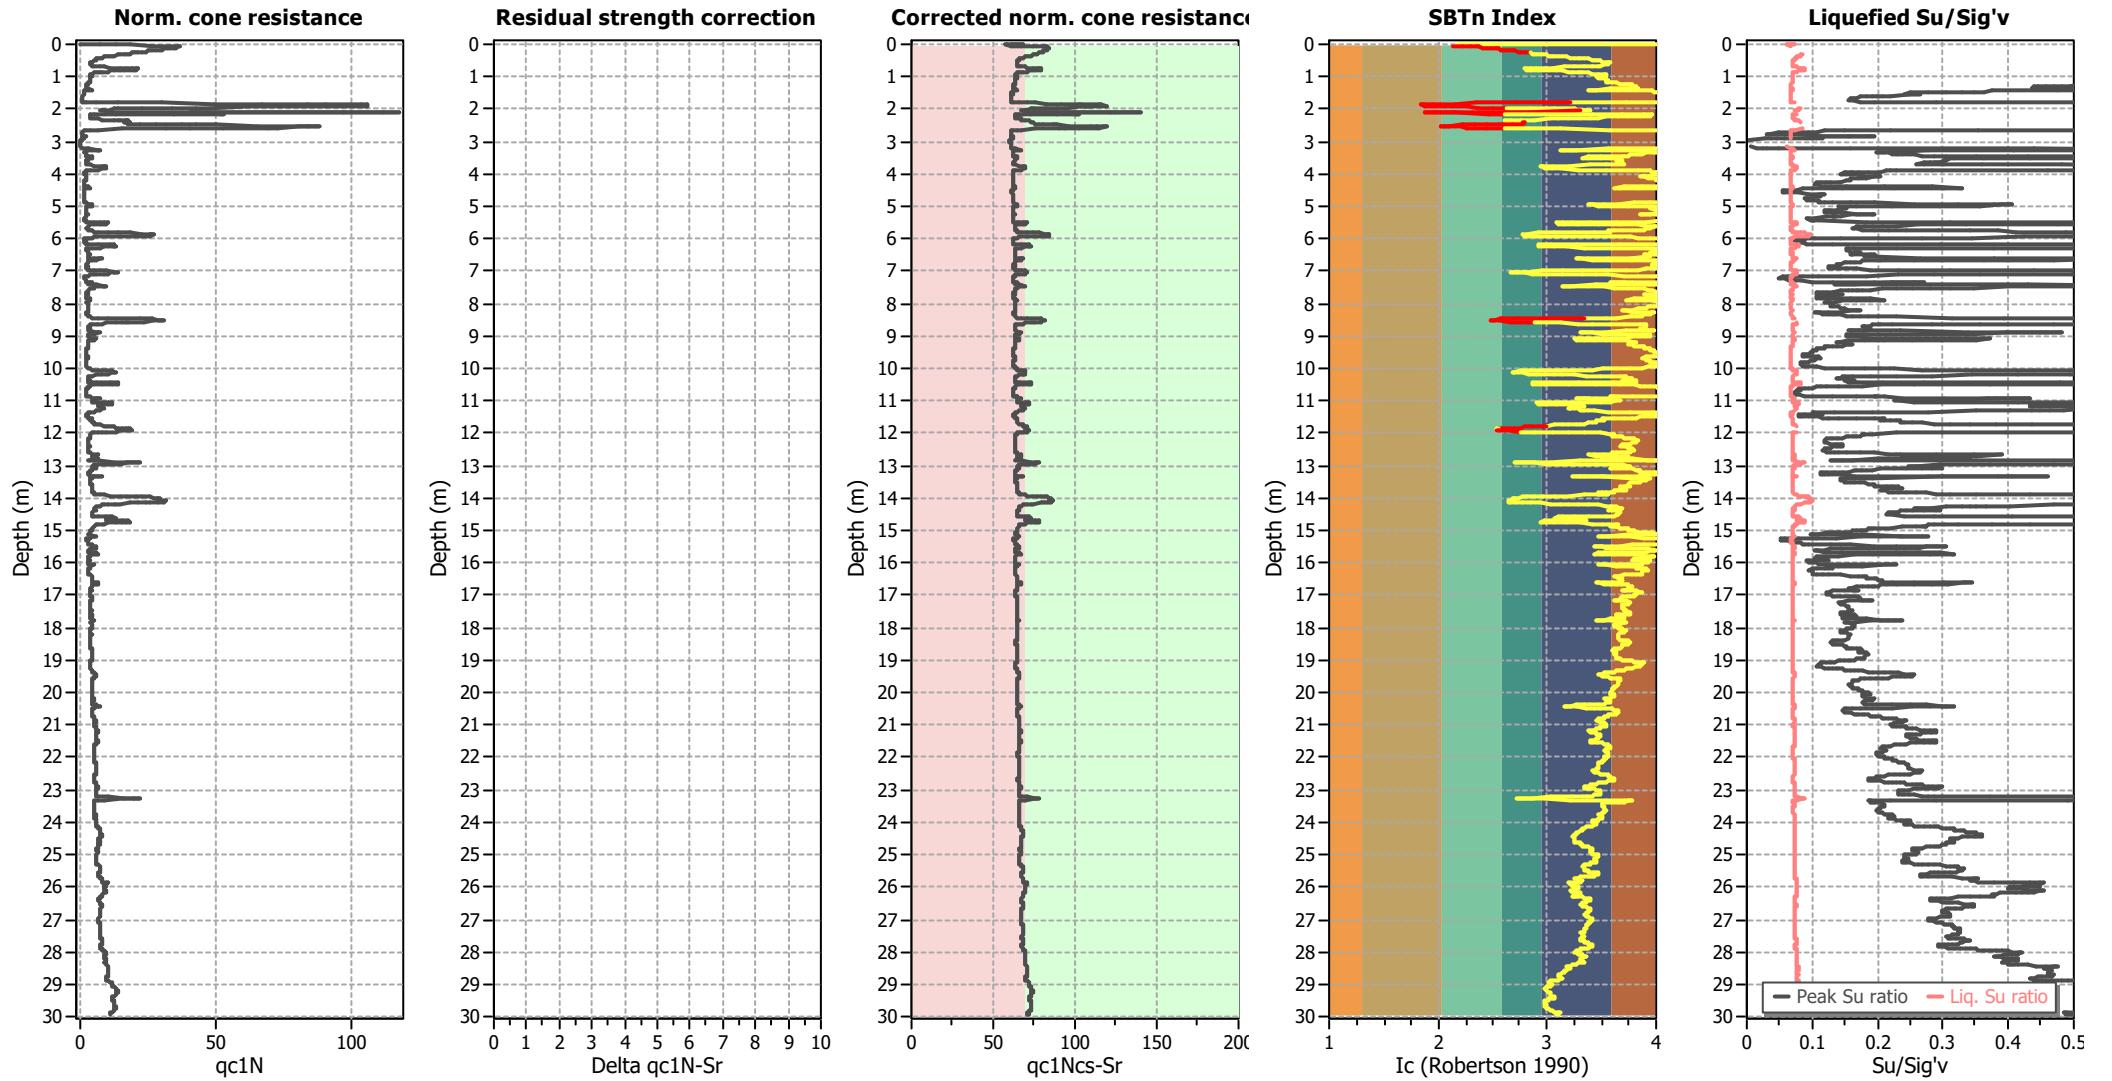

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

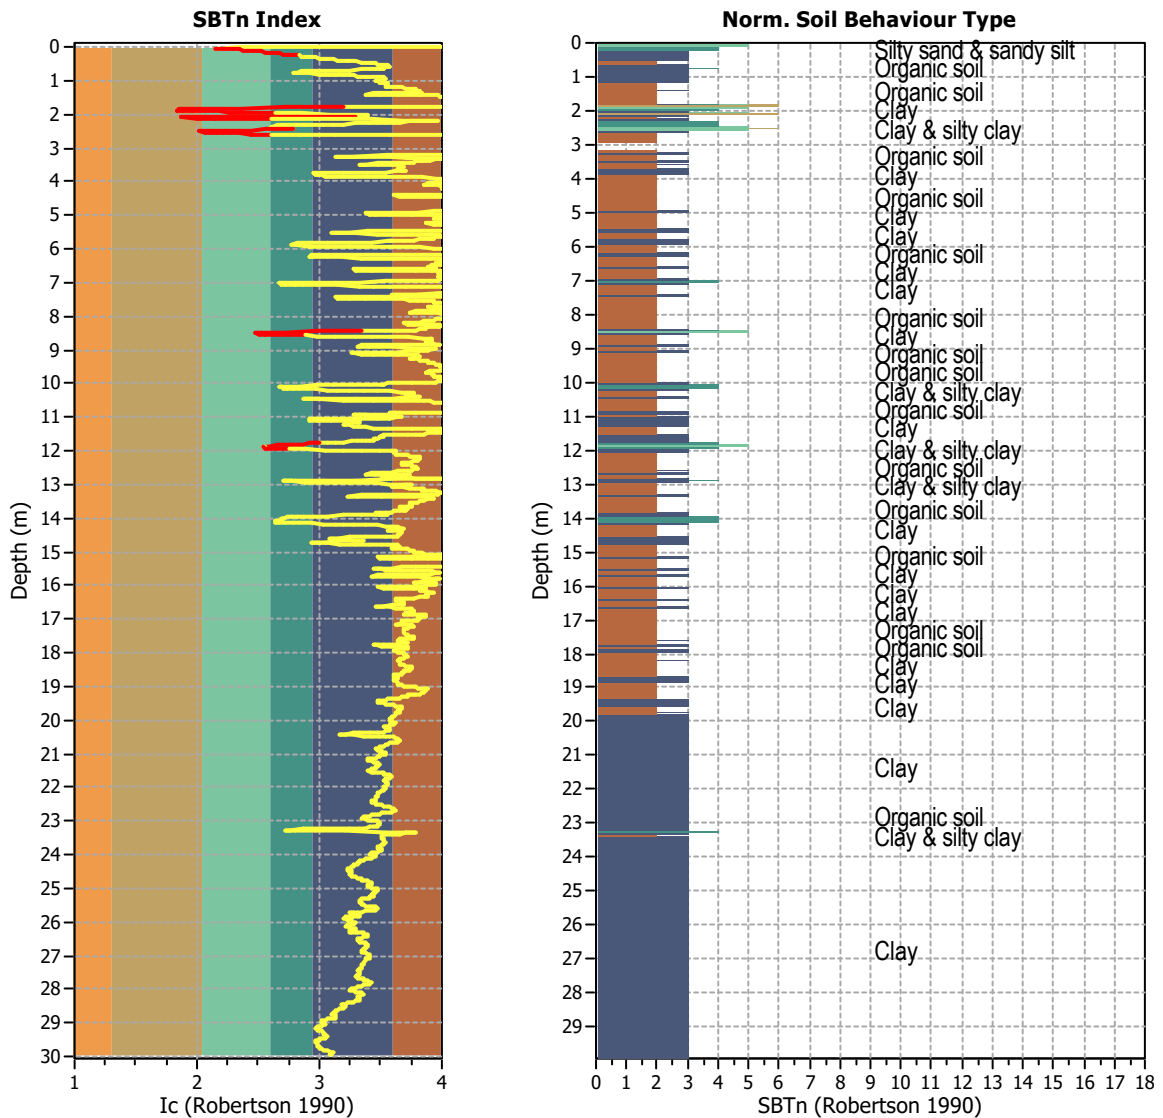


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2994
 Total points excluded: 103
 Exclusion percentage: 3.44%
 Number of layers detected: 11


Estimation of post-earthquake settlements

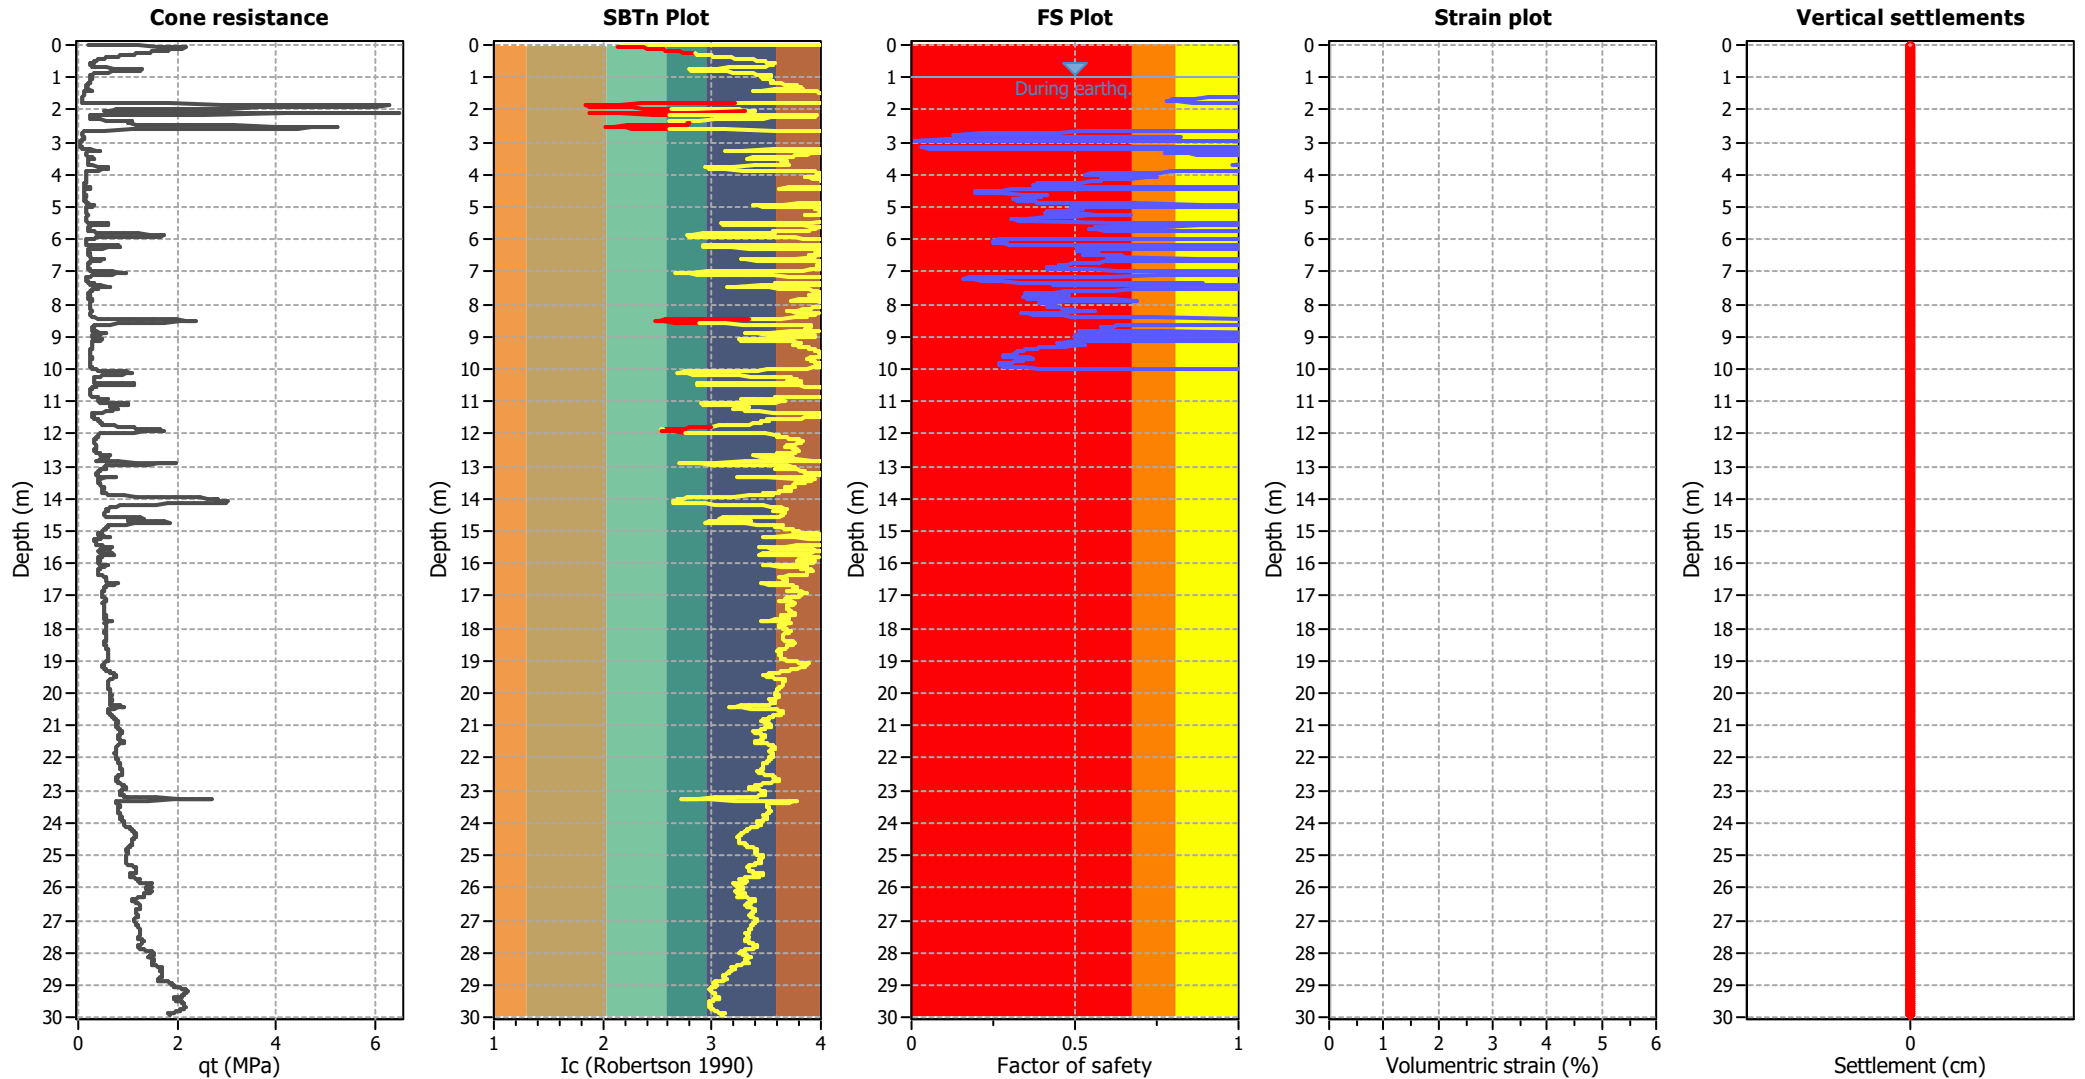

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

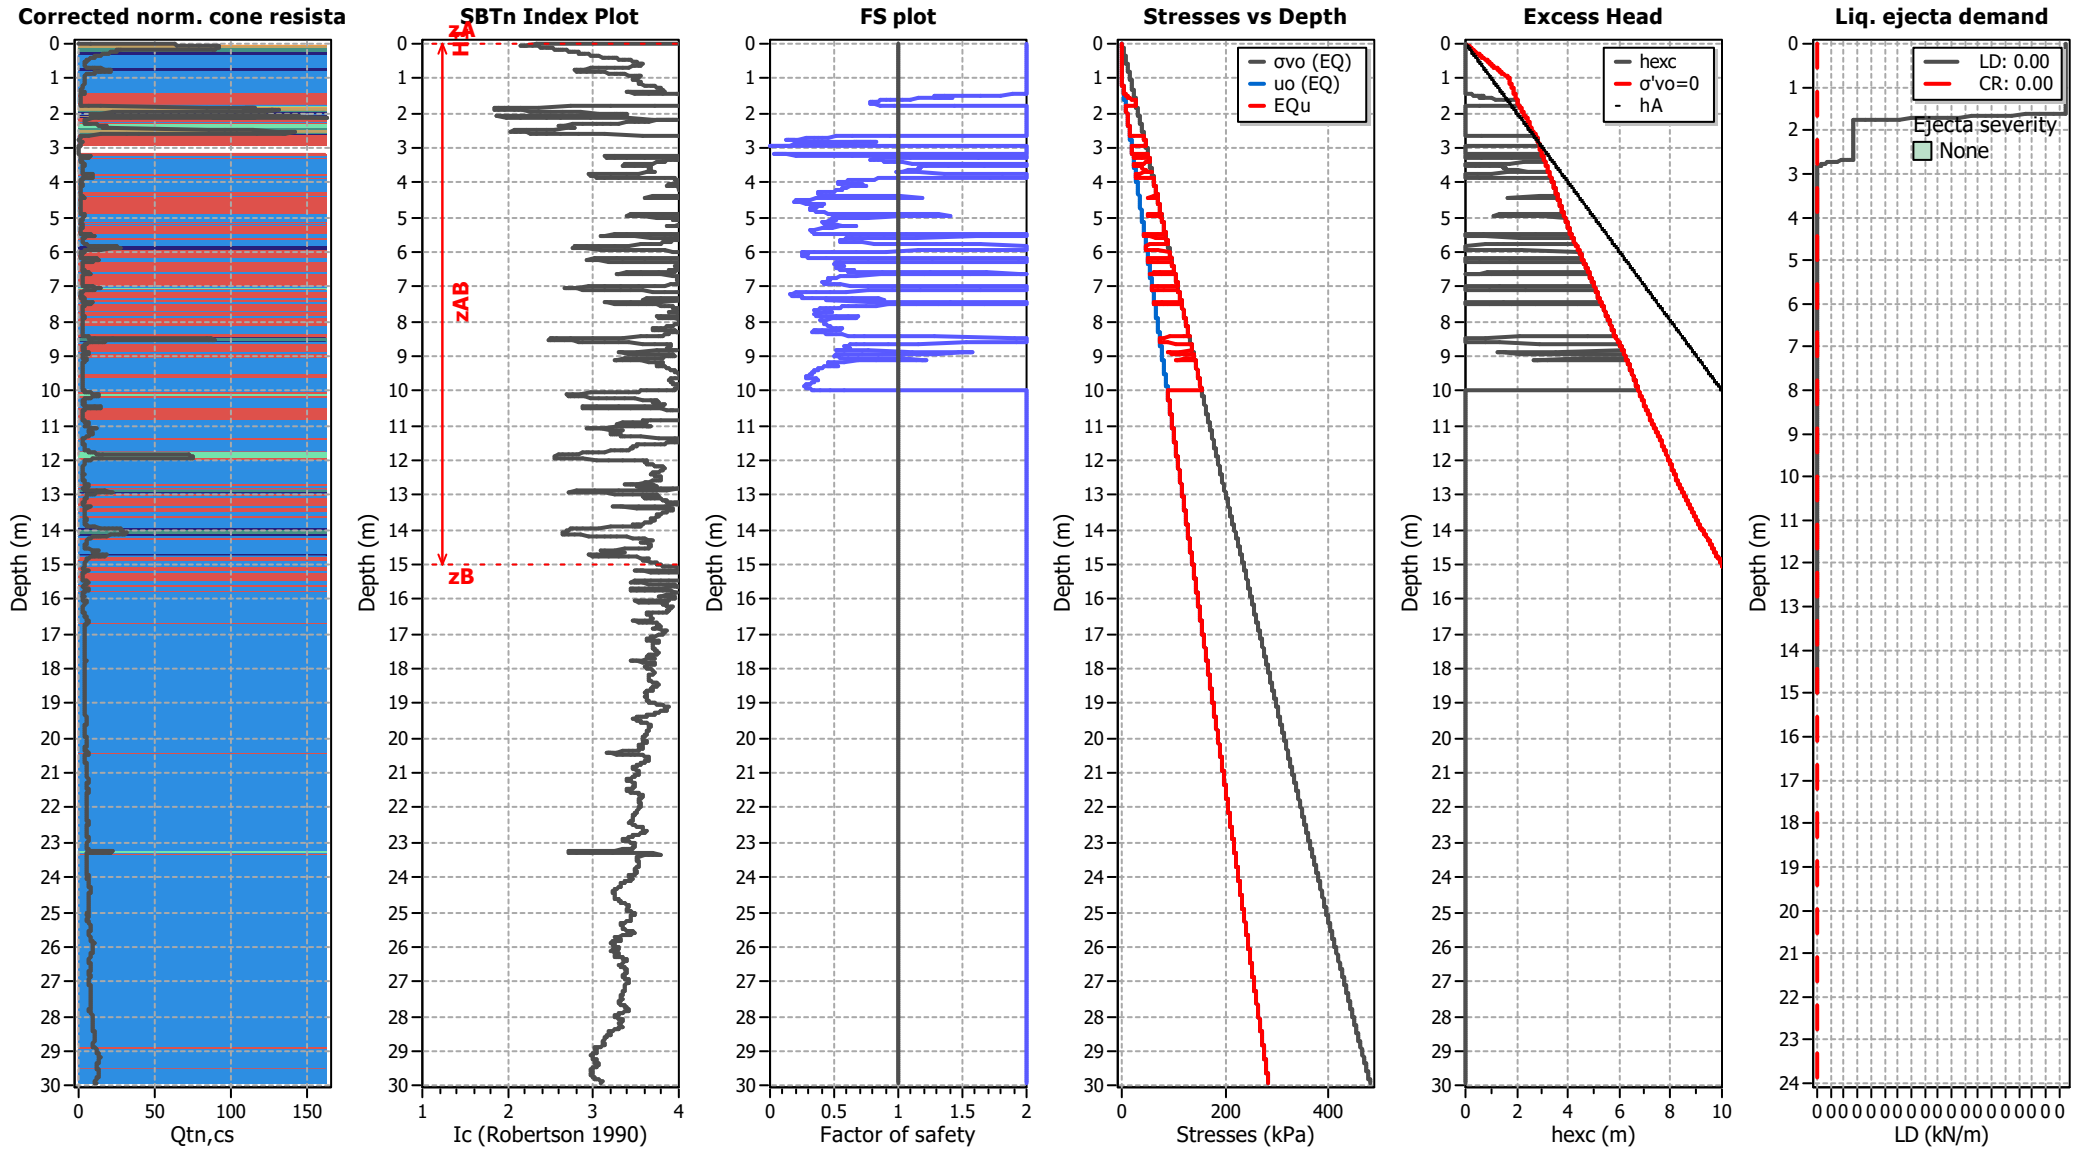

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT05

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

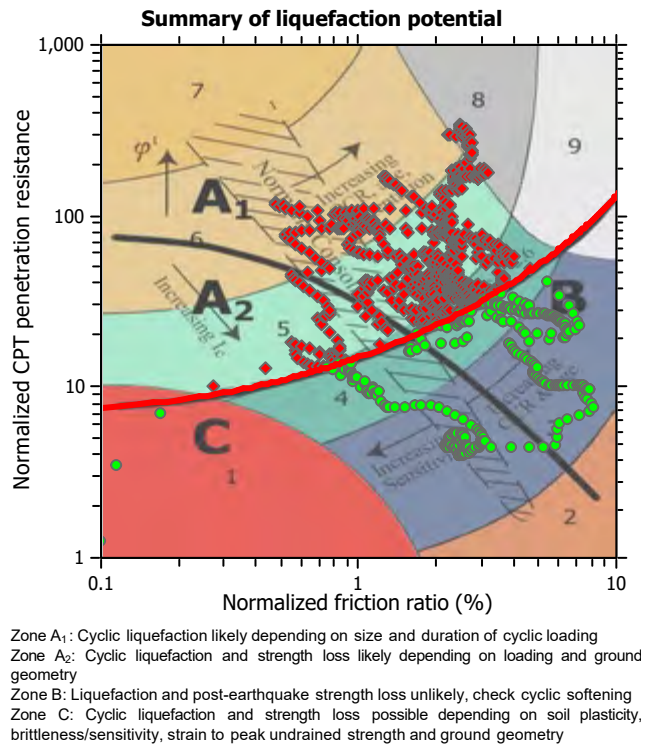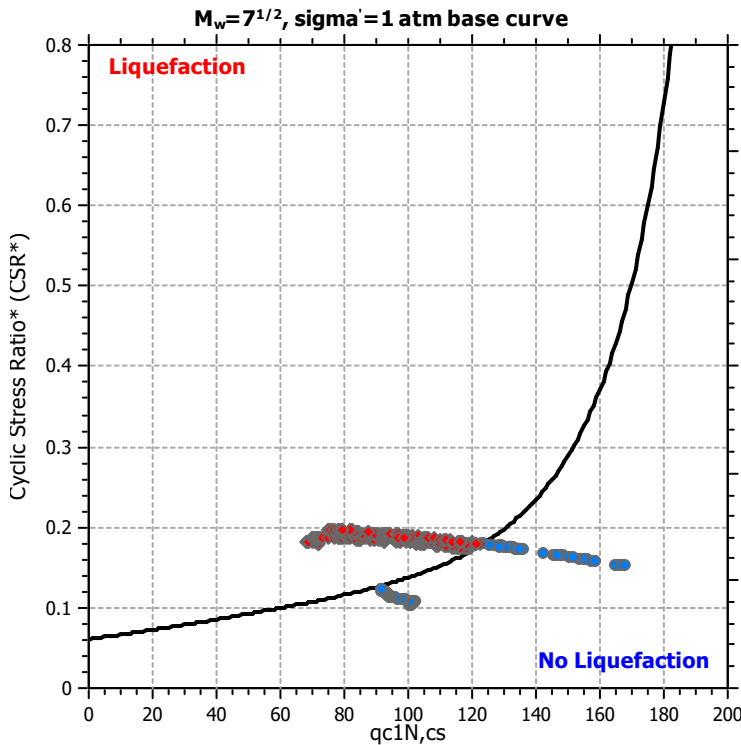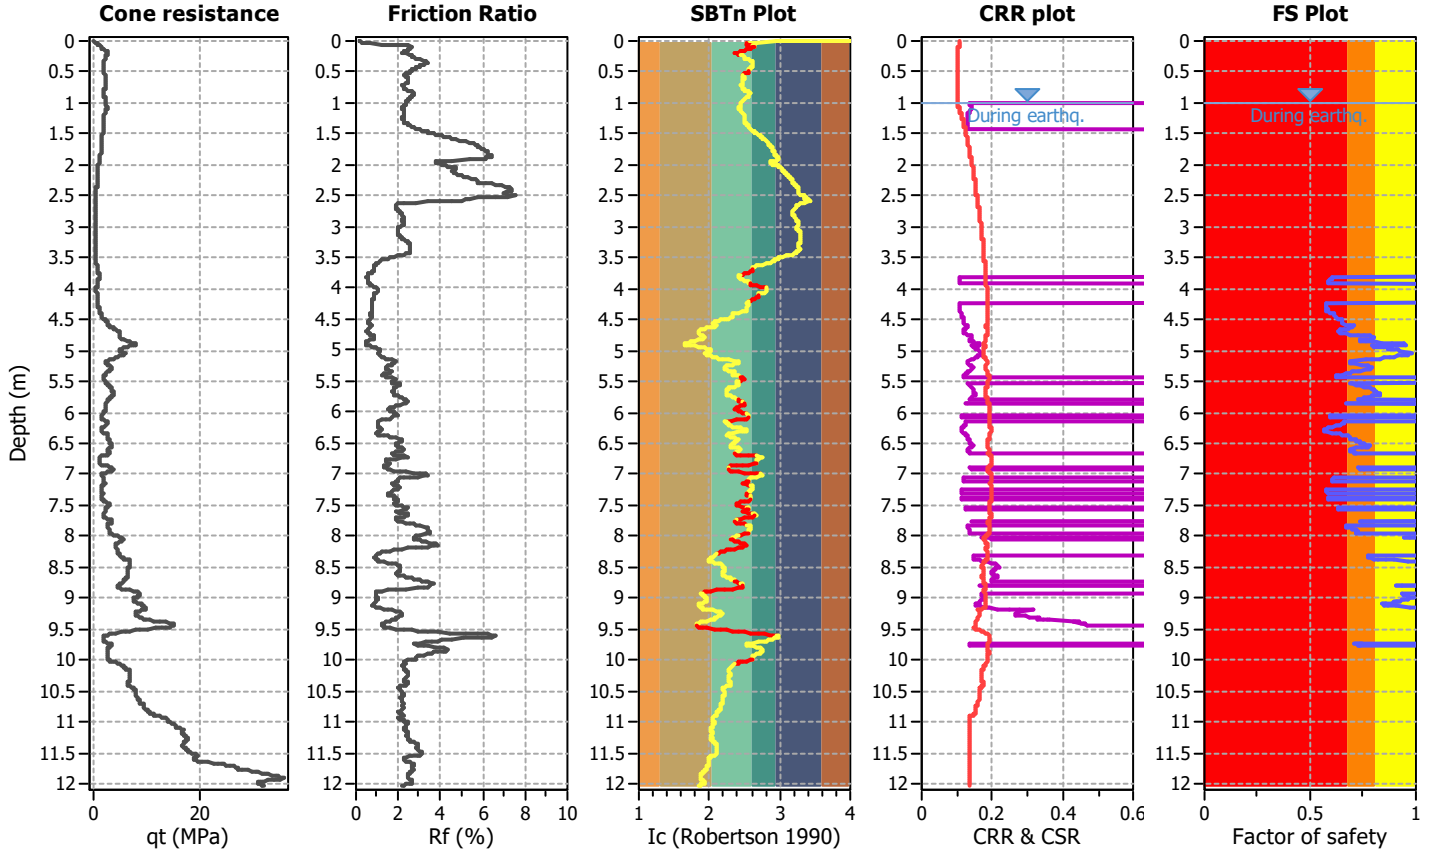

CPT basic interpretation plots

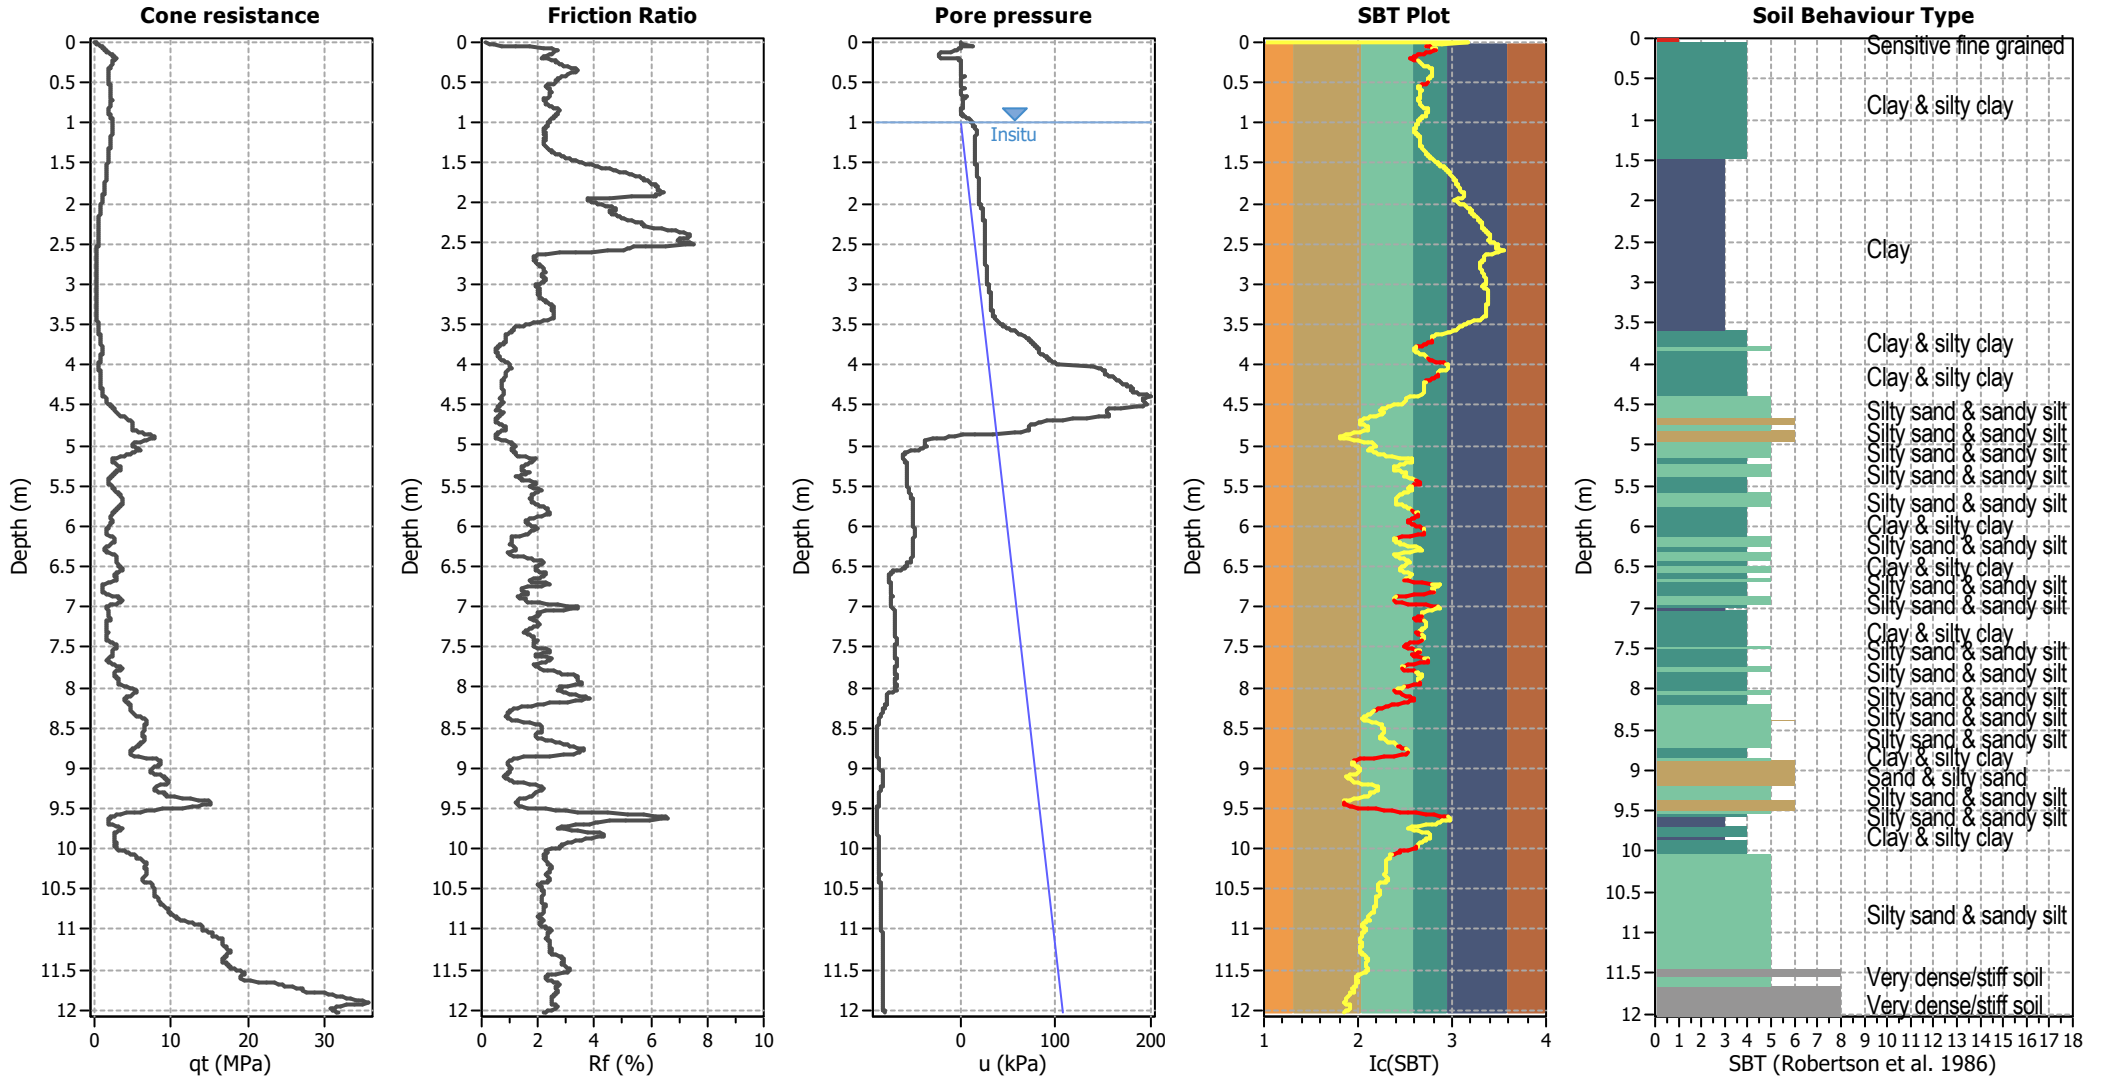


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

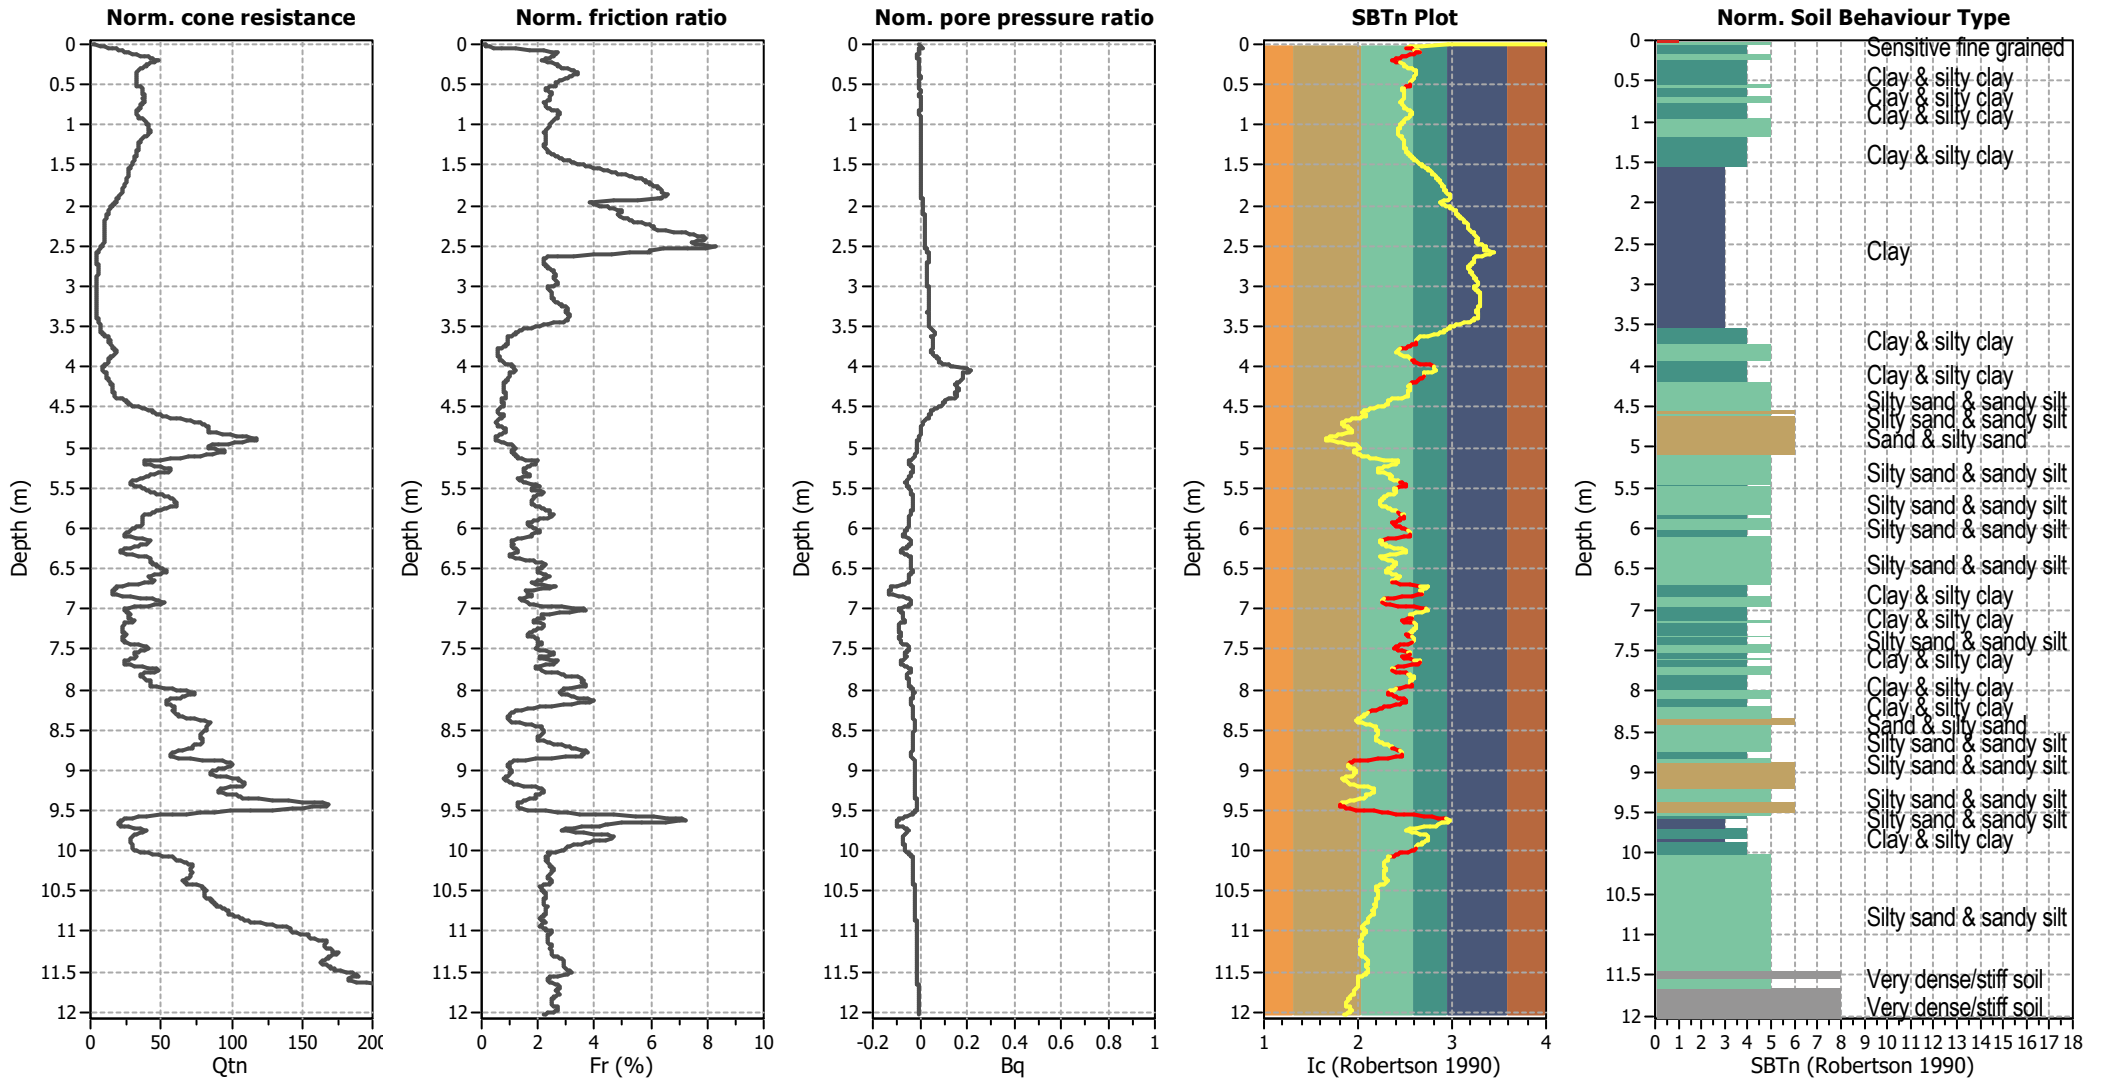


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

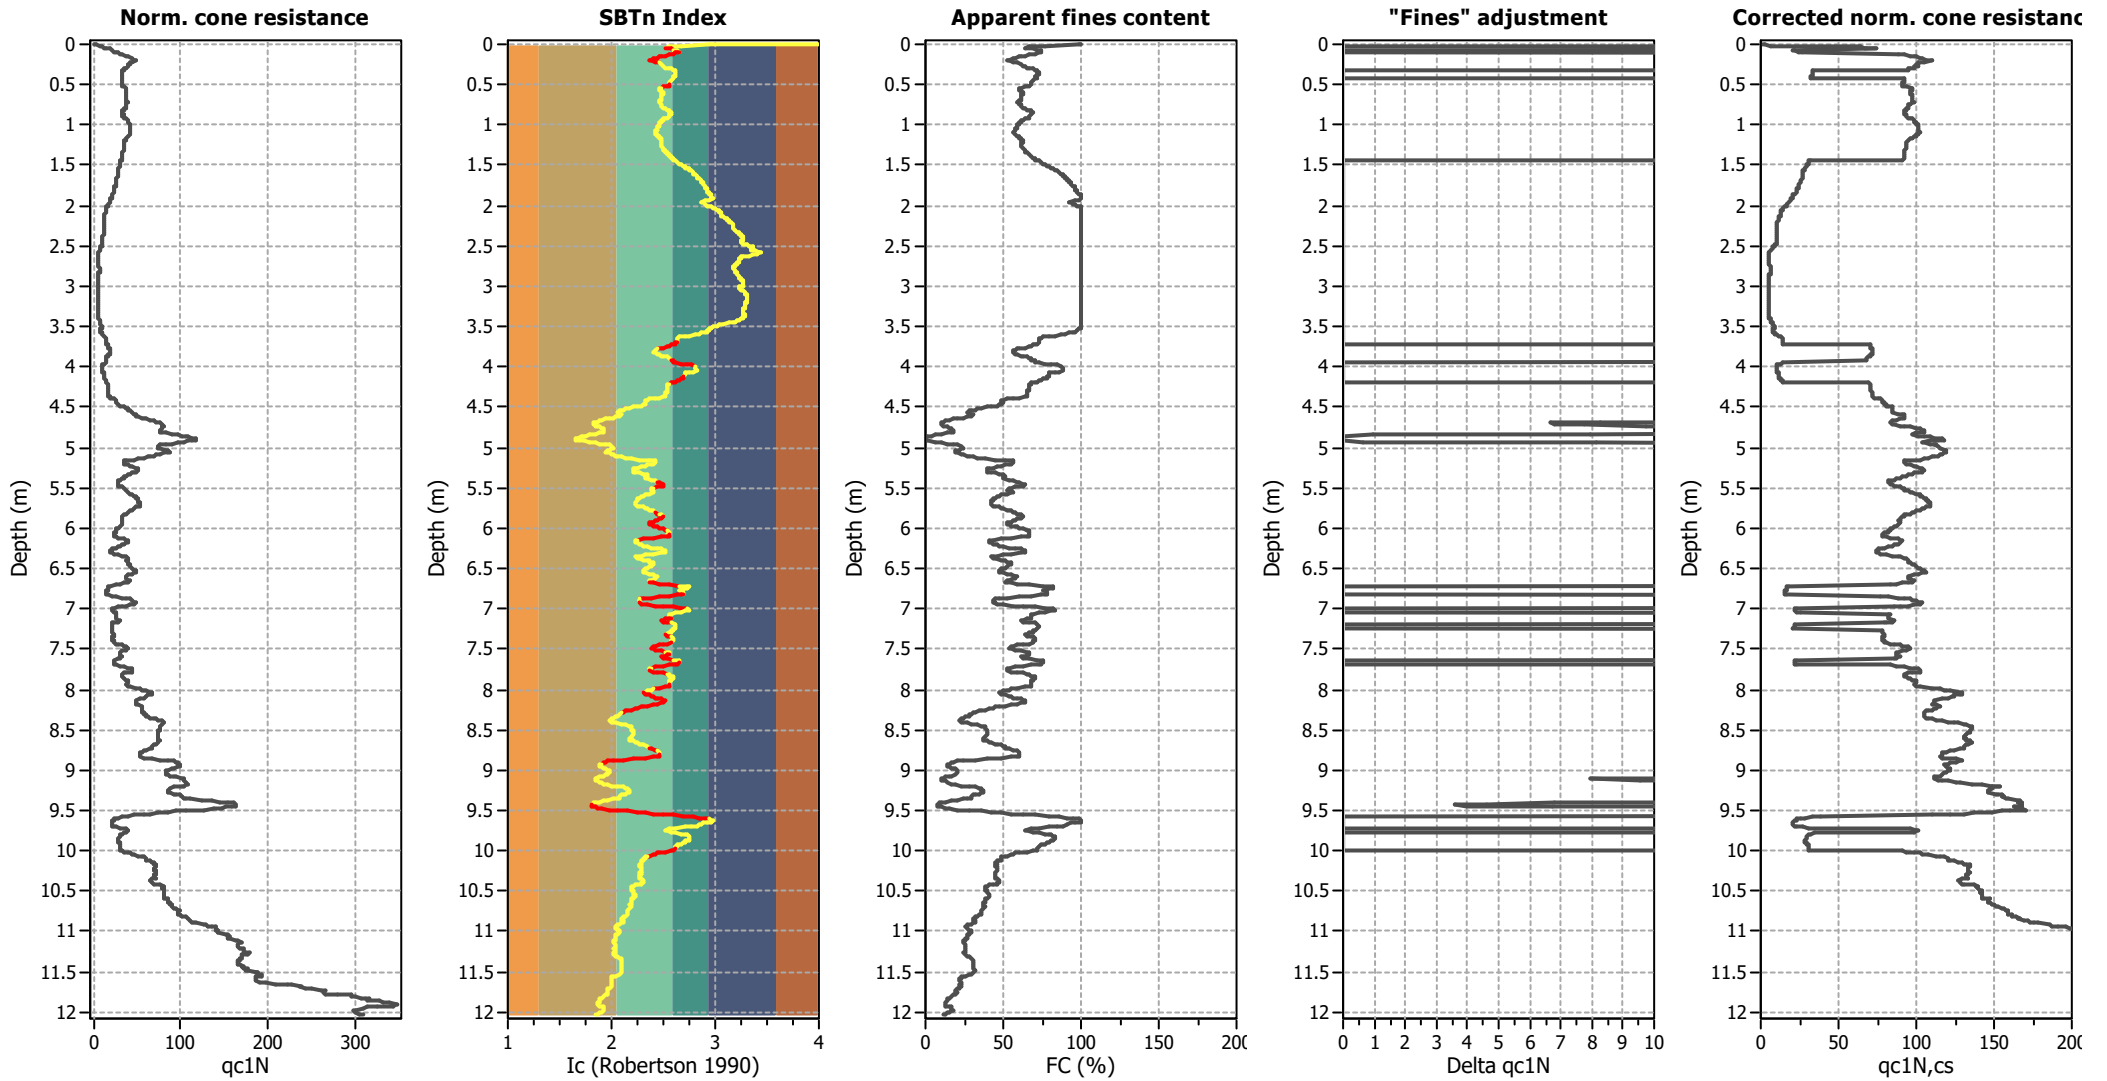

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

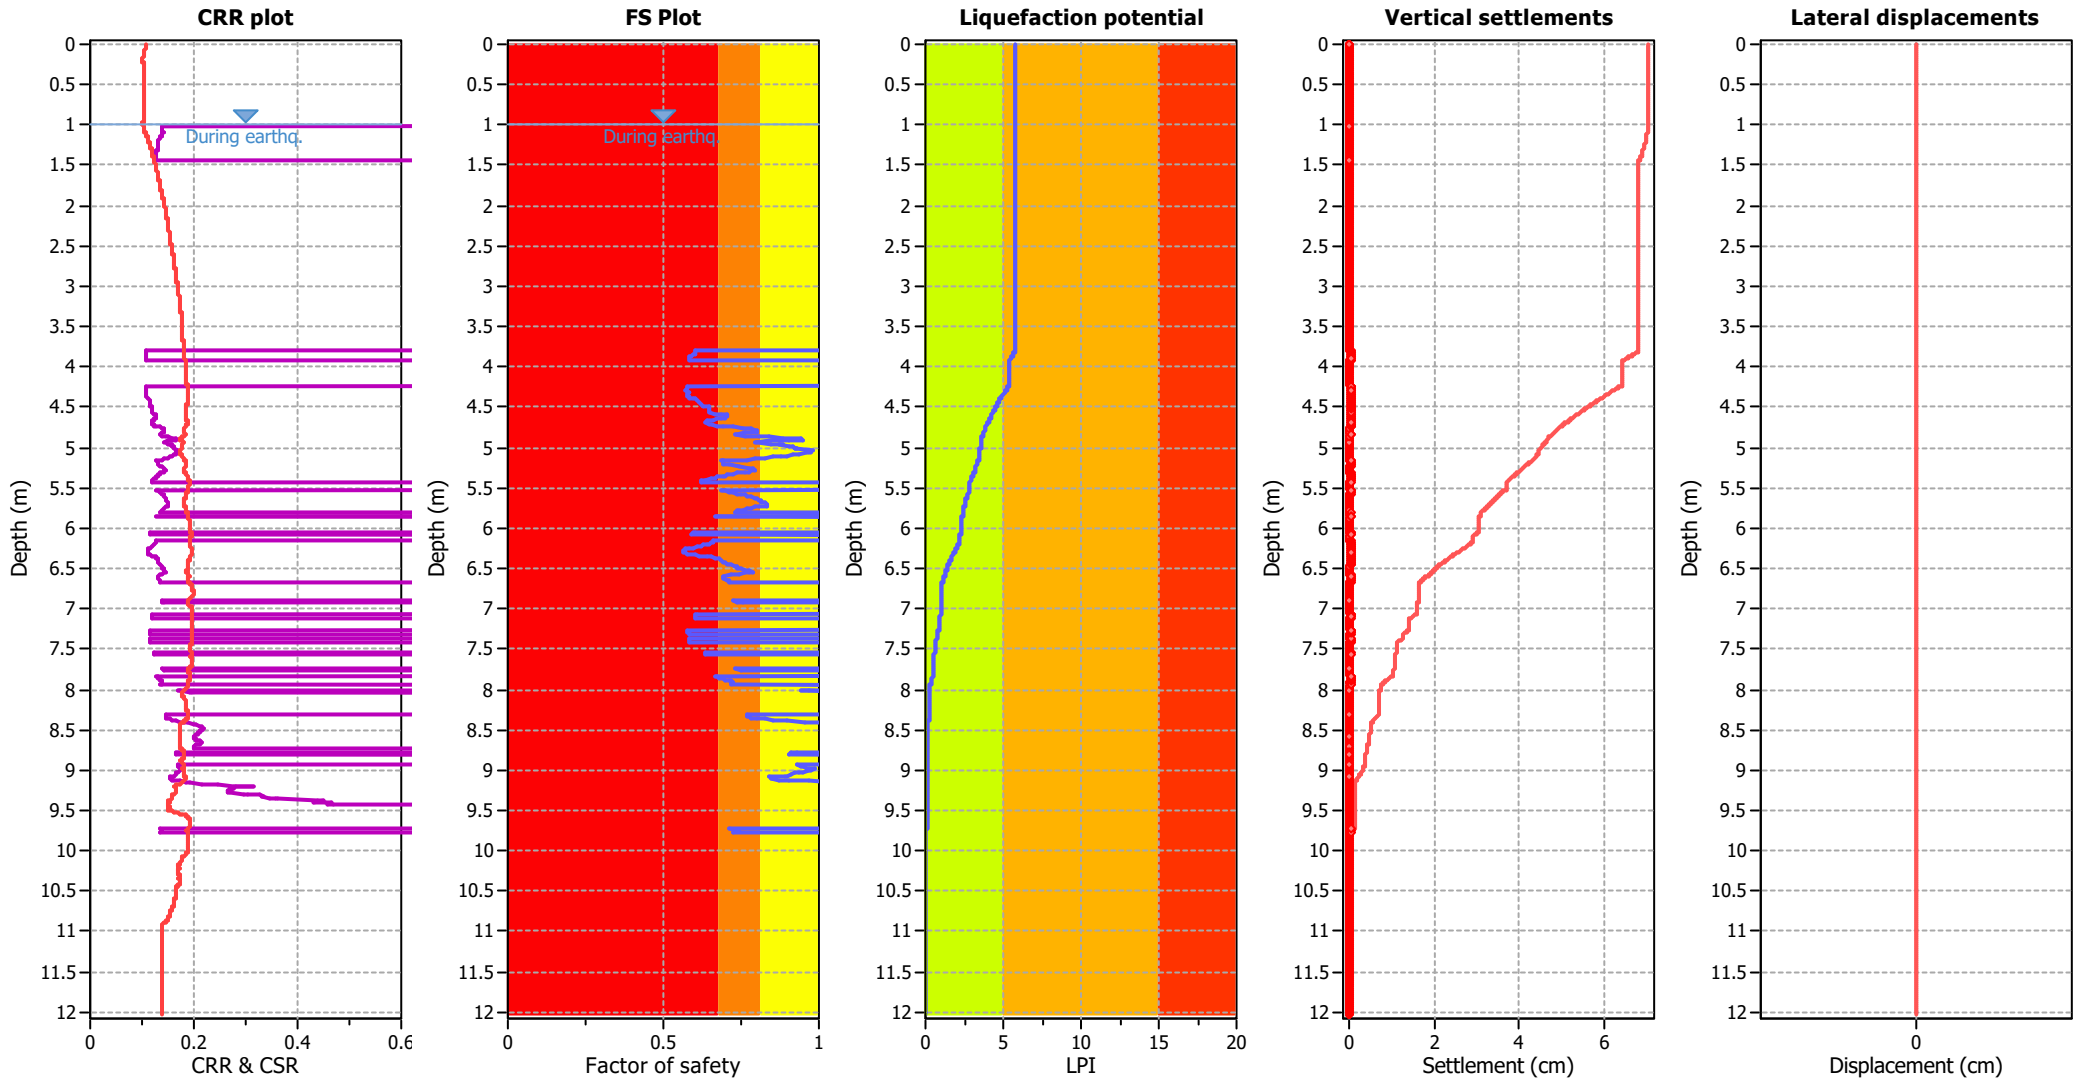

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

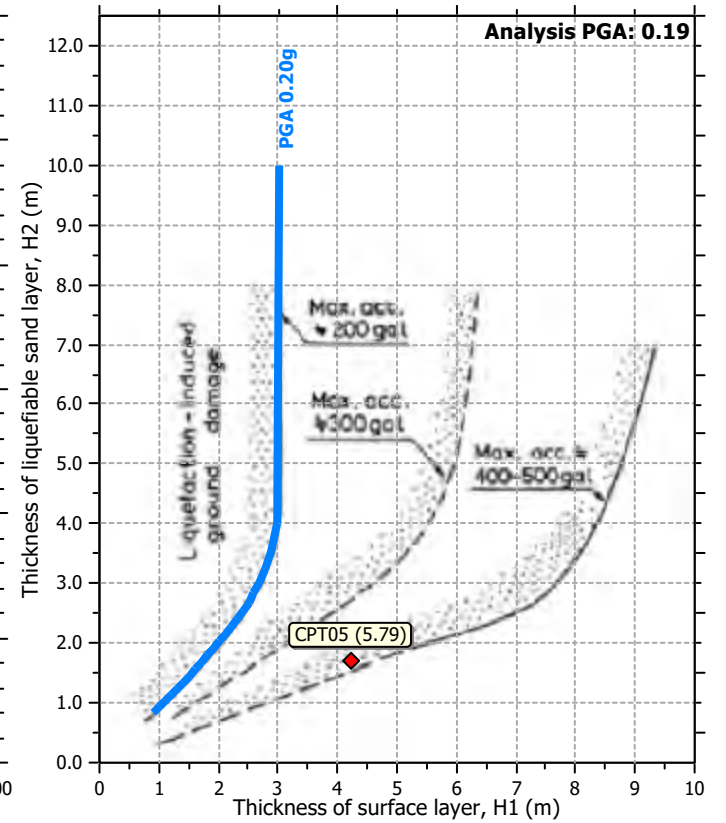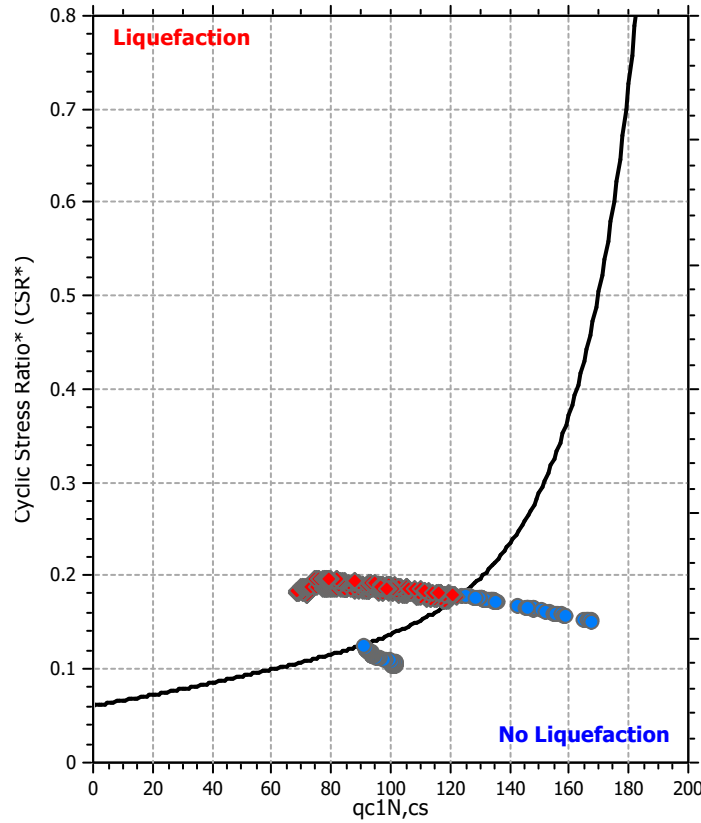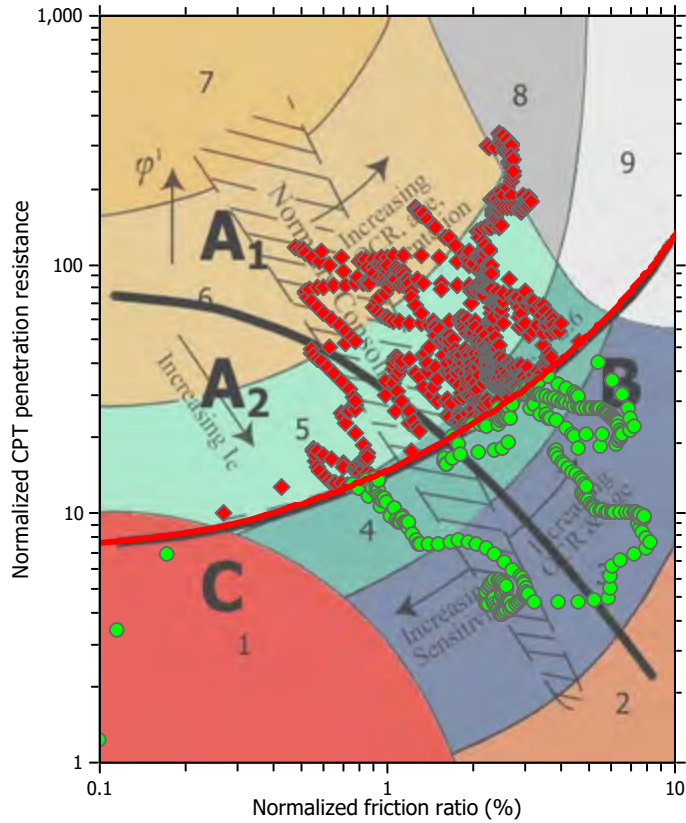

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

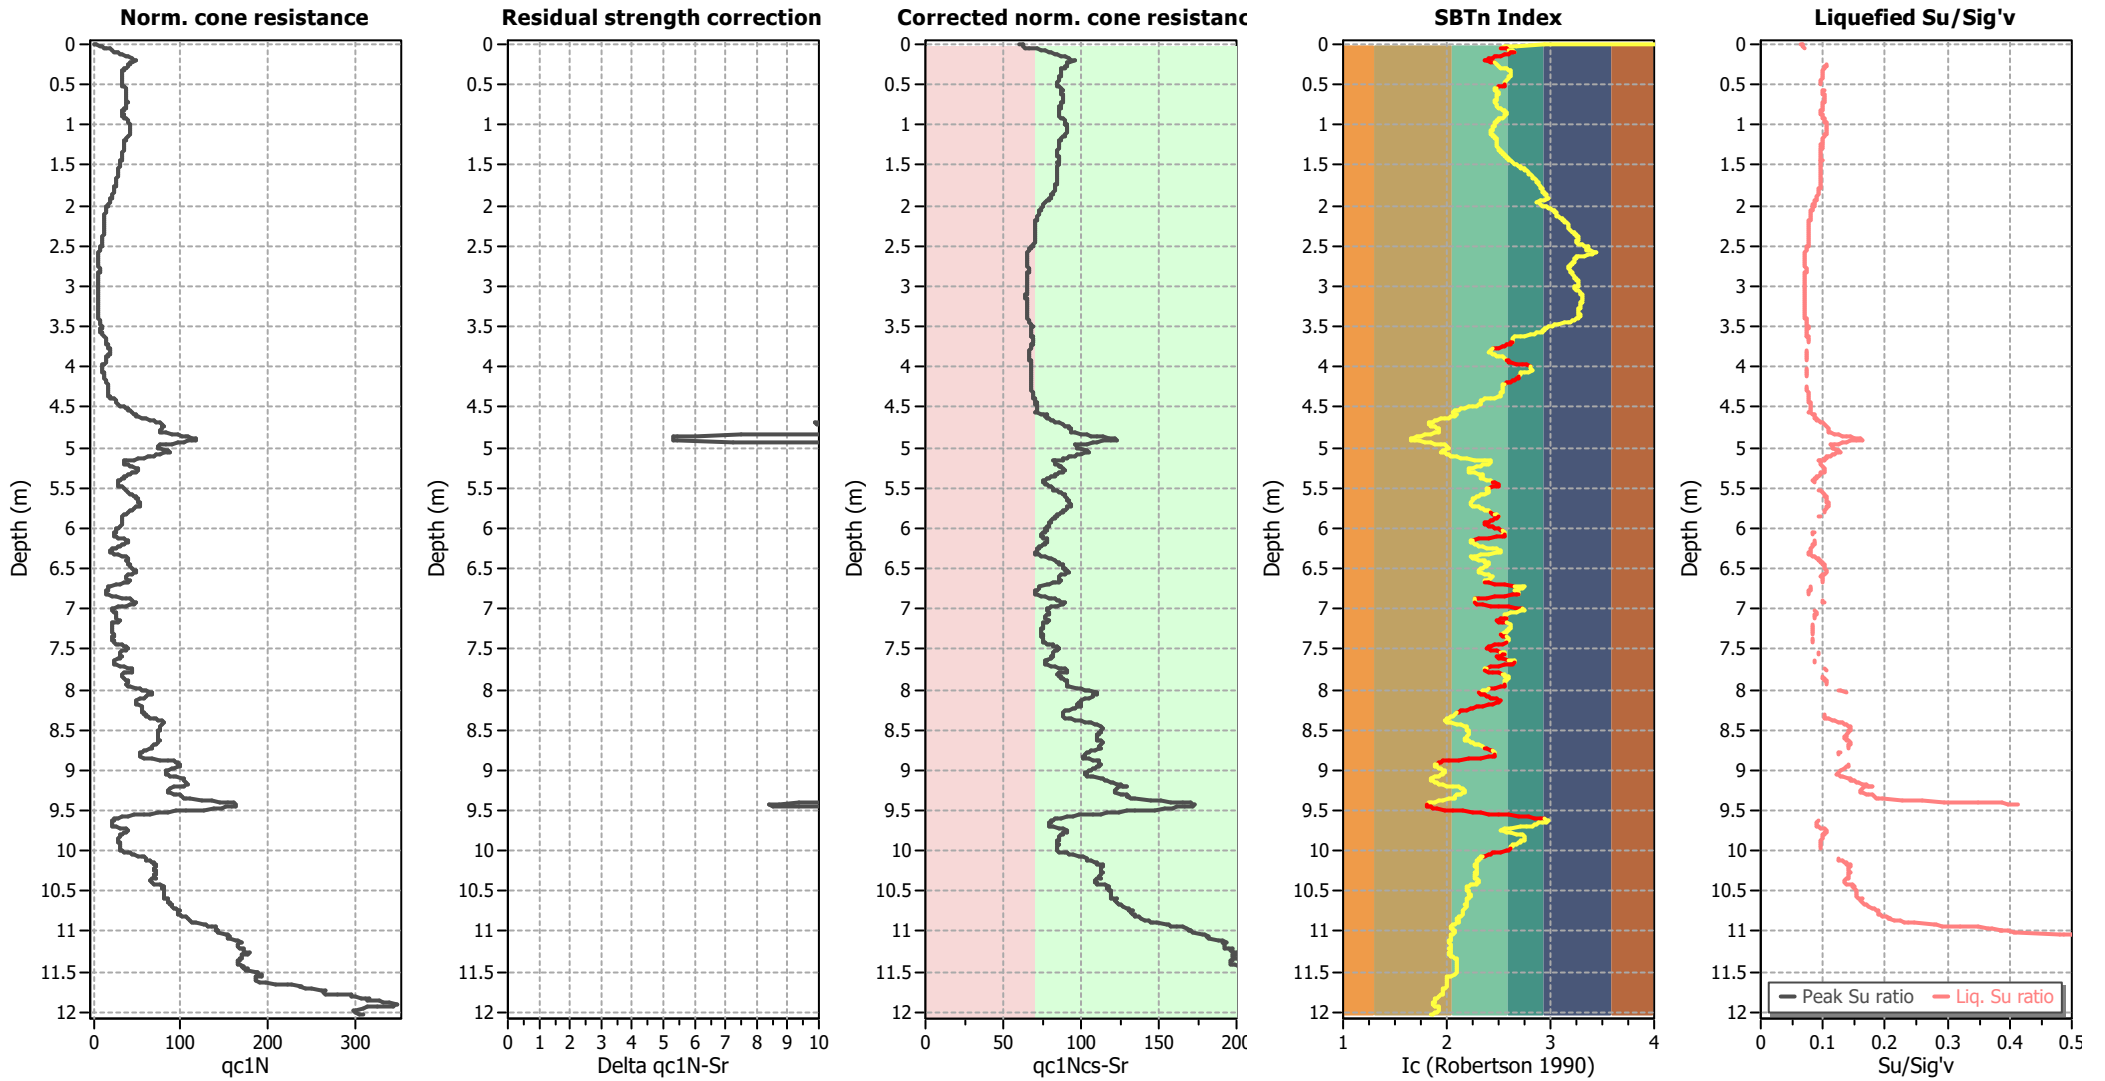

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

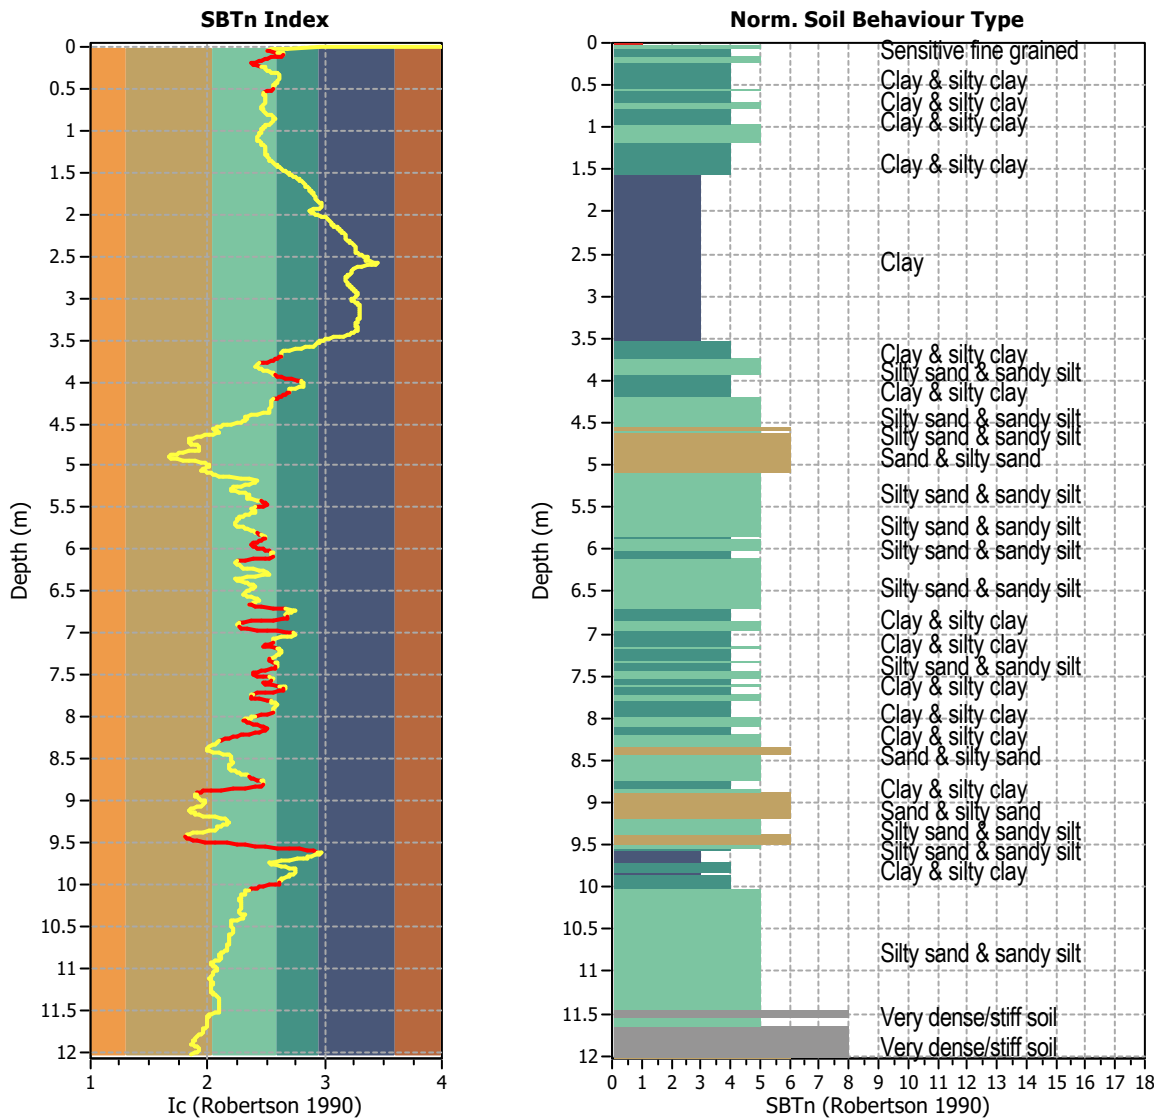


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1204
 Total points excluded: 240
 Exclusion percentage: 19.93%
 Number of layers detected: 32


Estimation of post-earthquake settlements

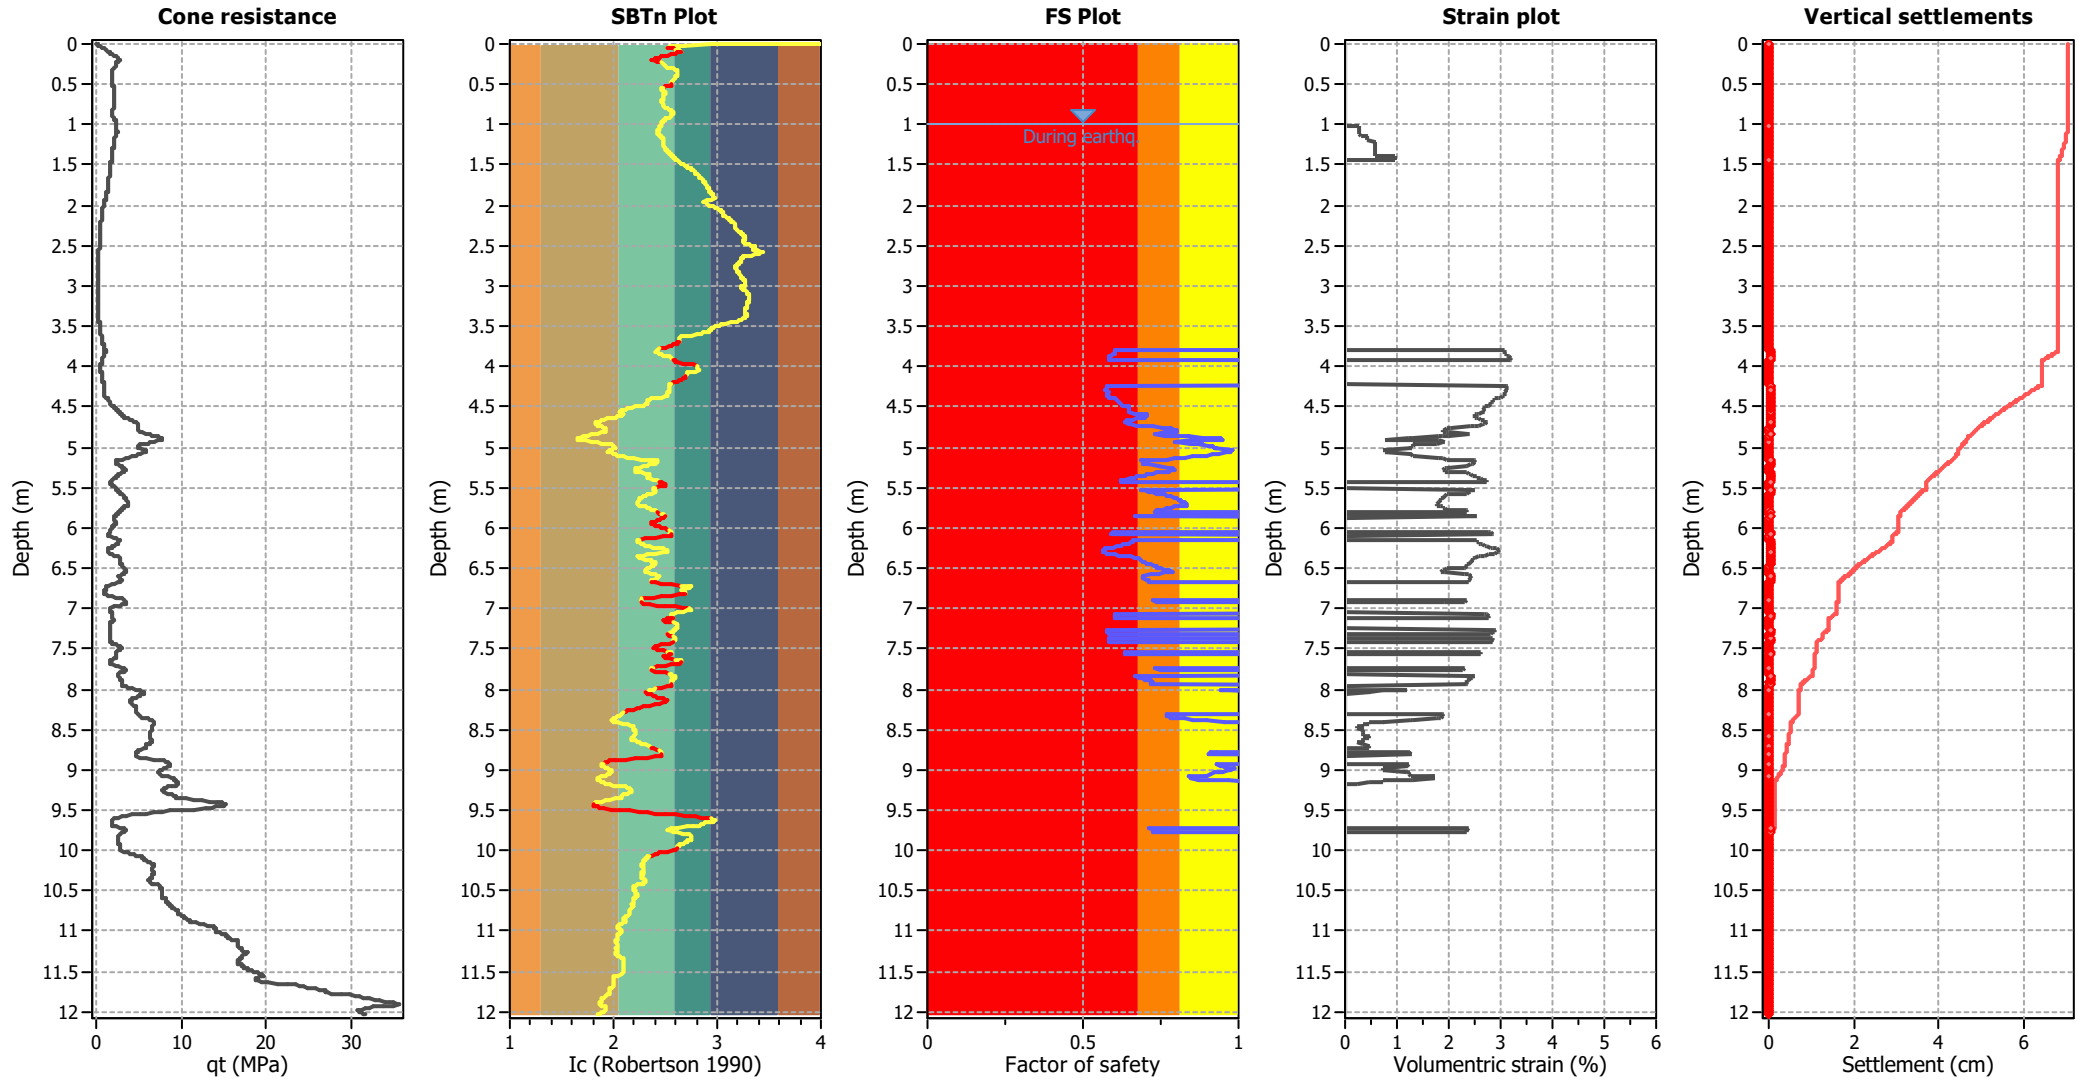

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

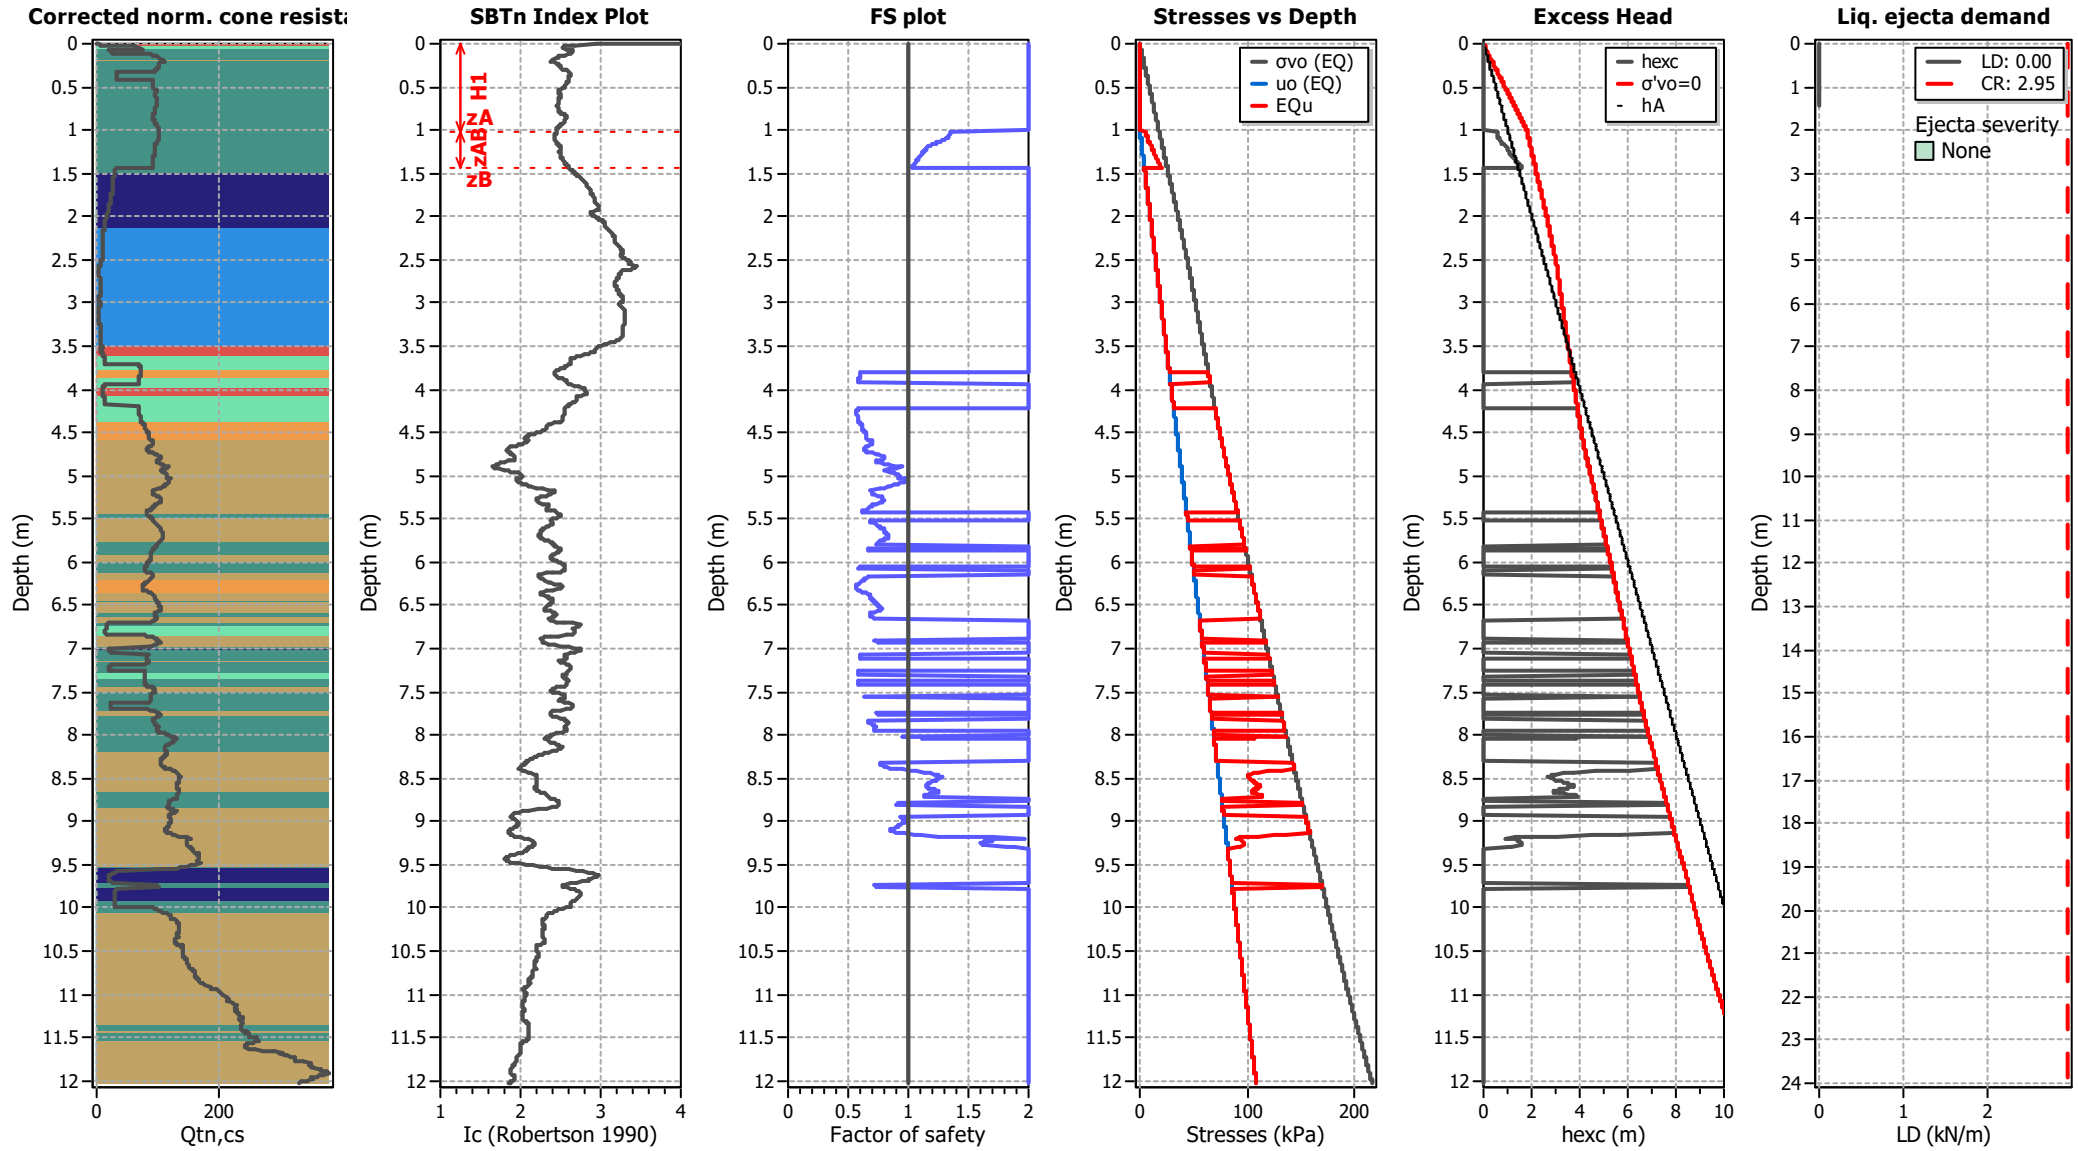

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT06

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

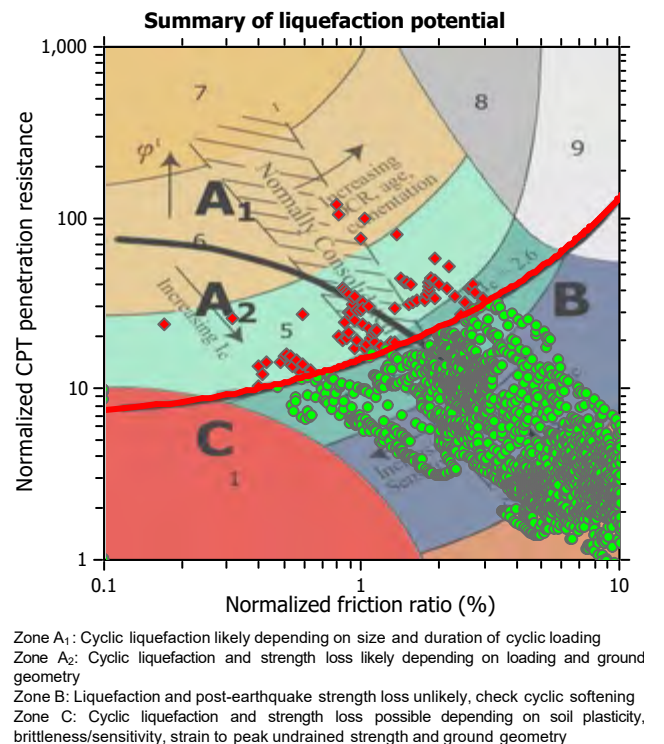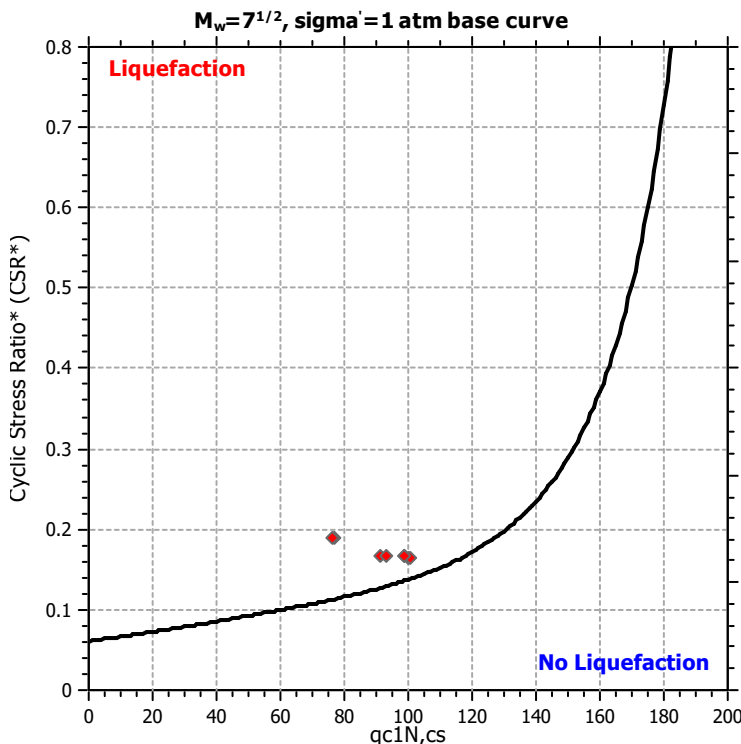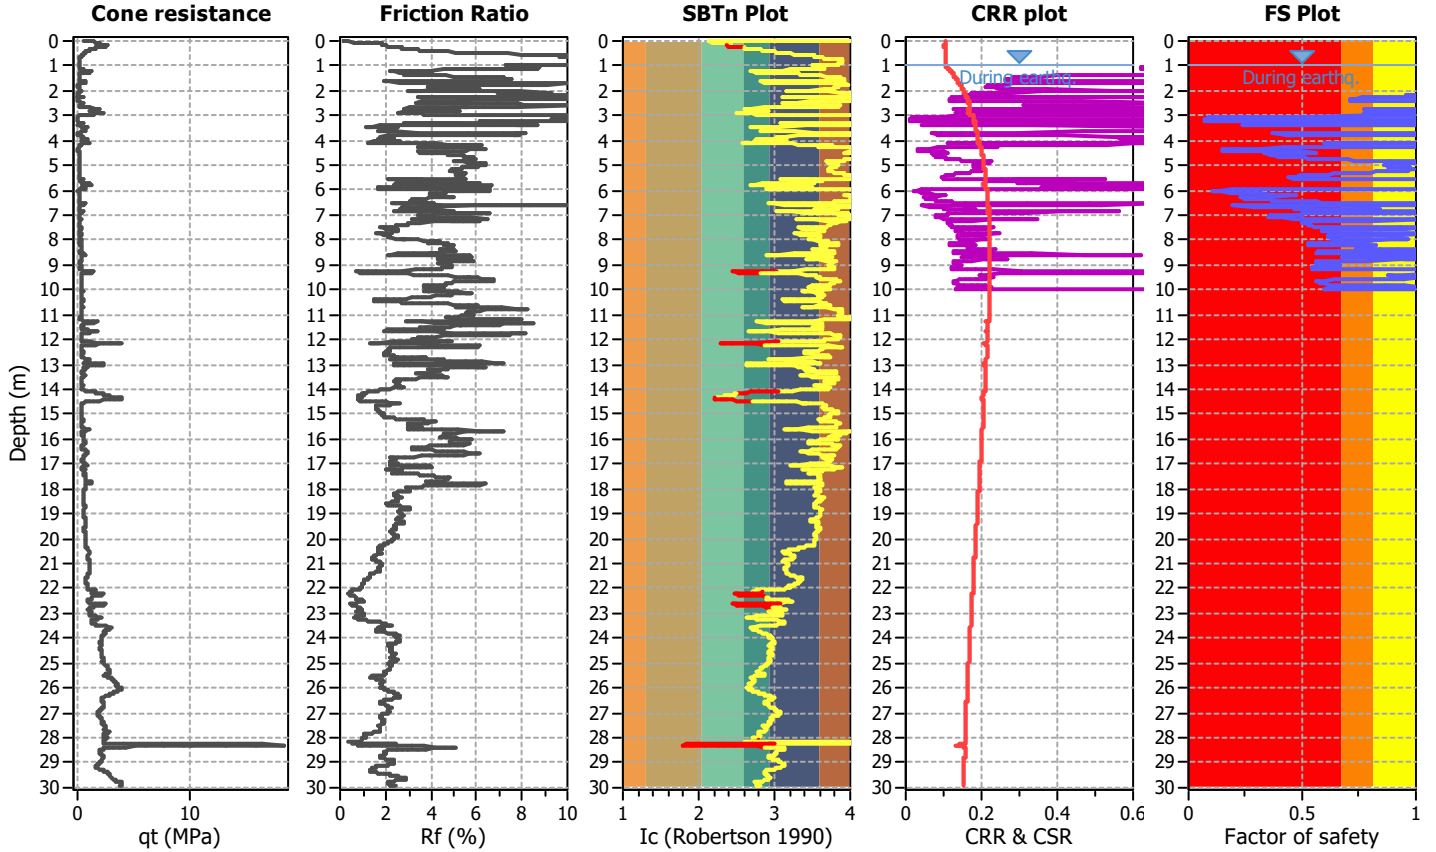

CPT basic interpretation plots

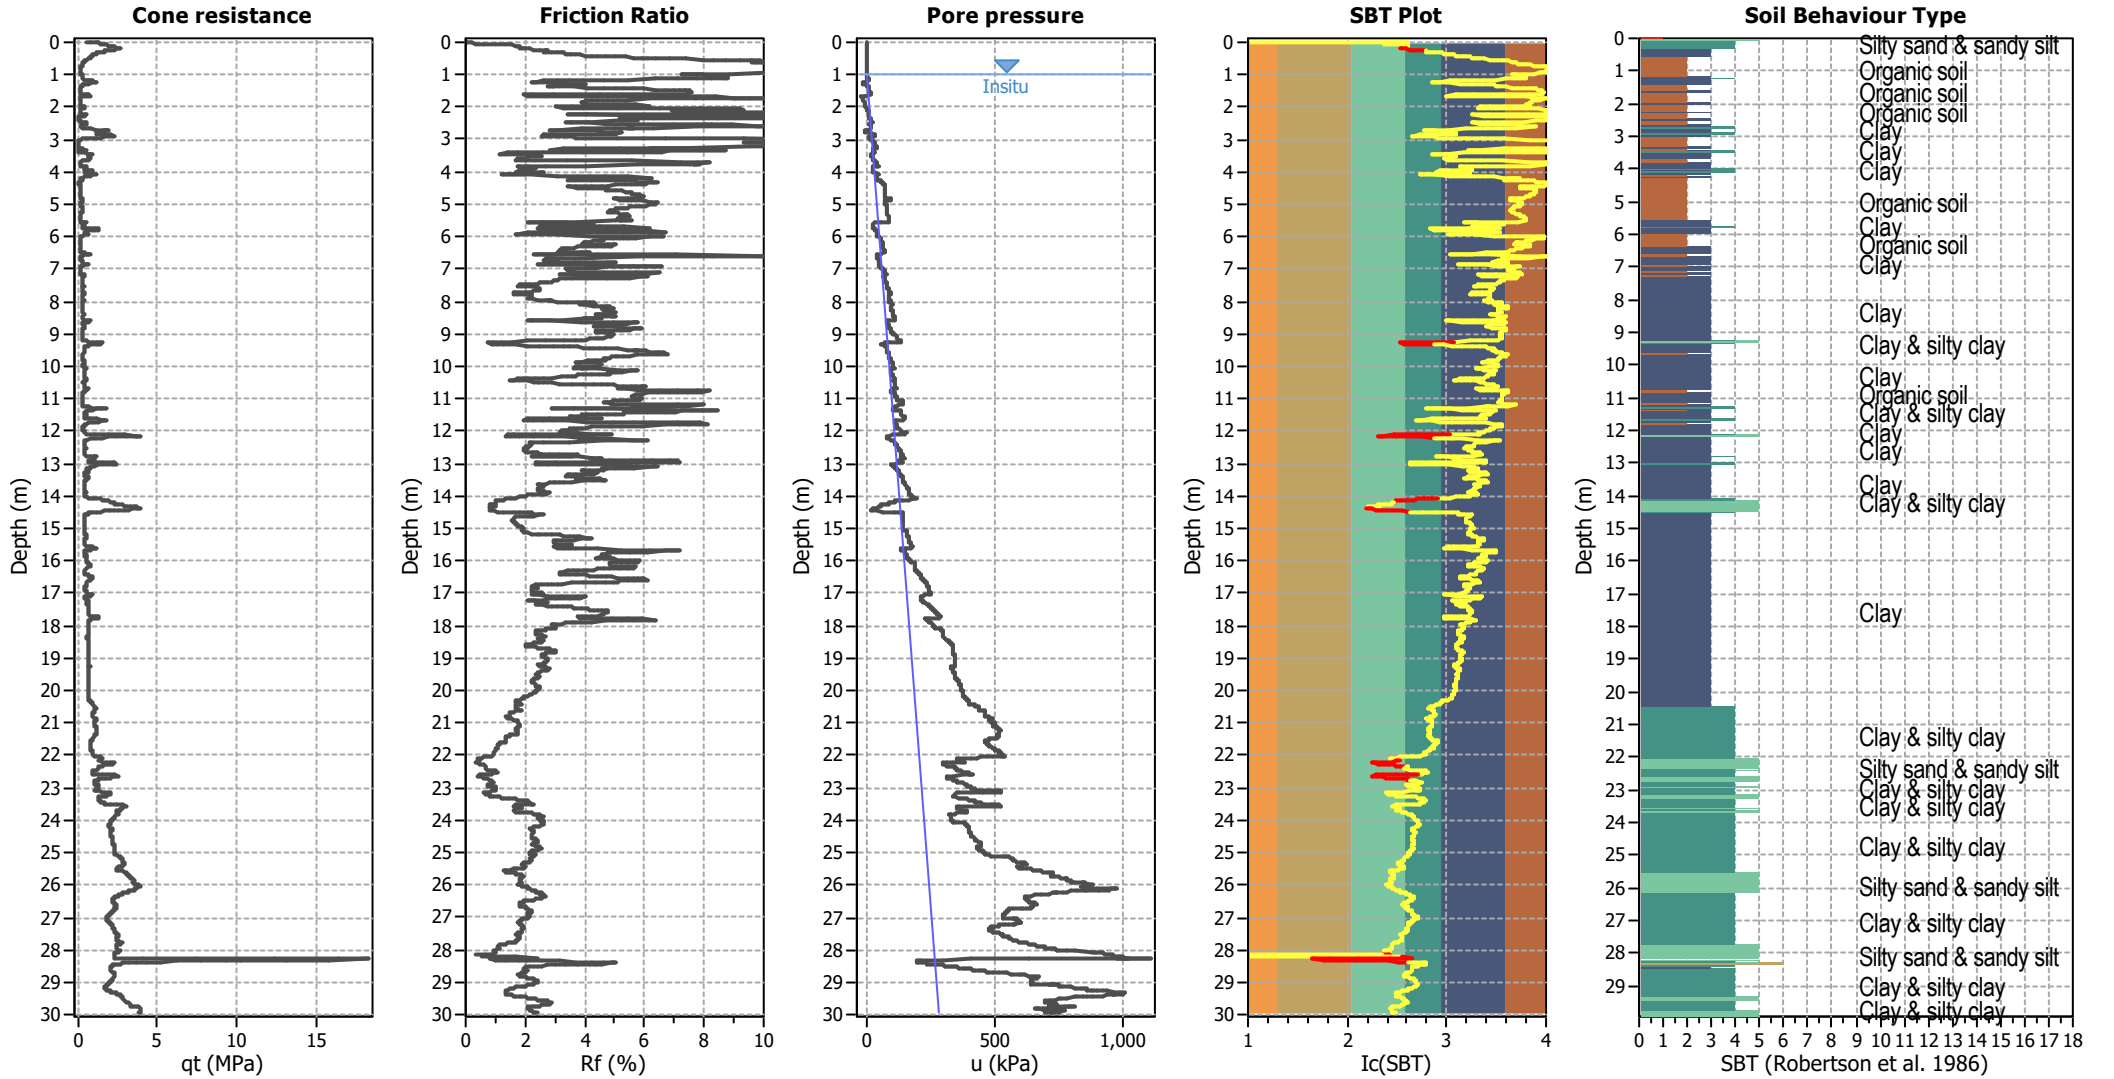


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

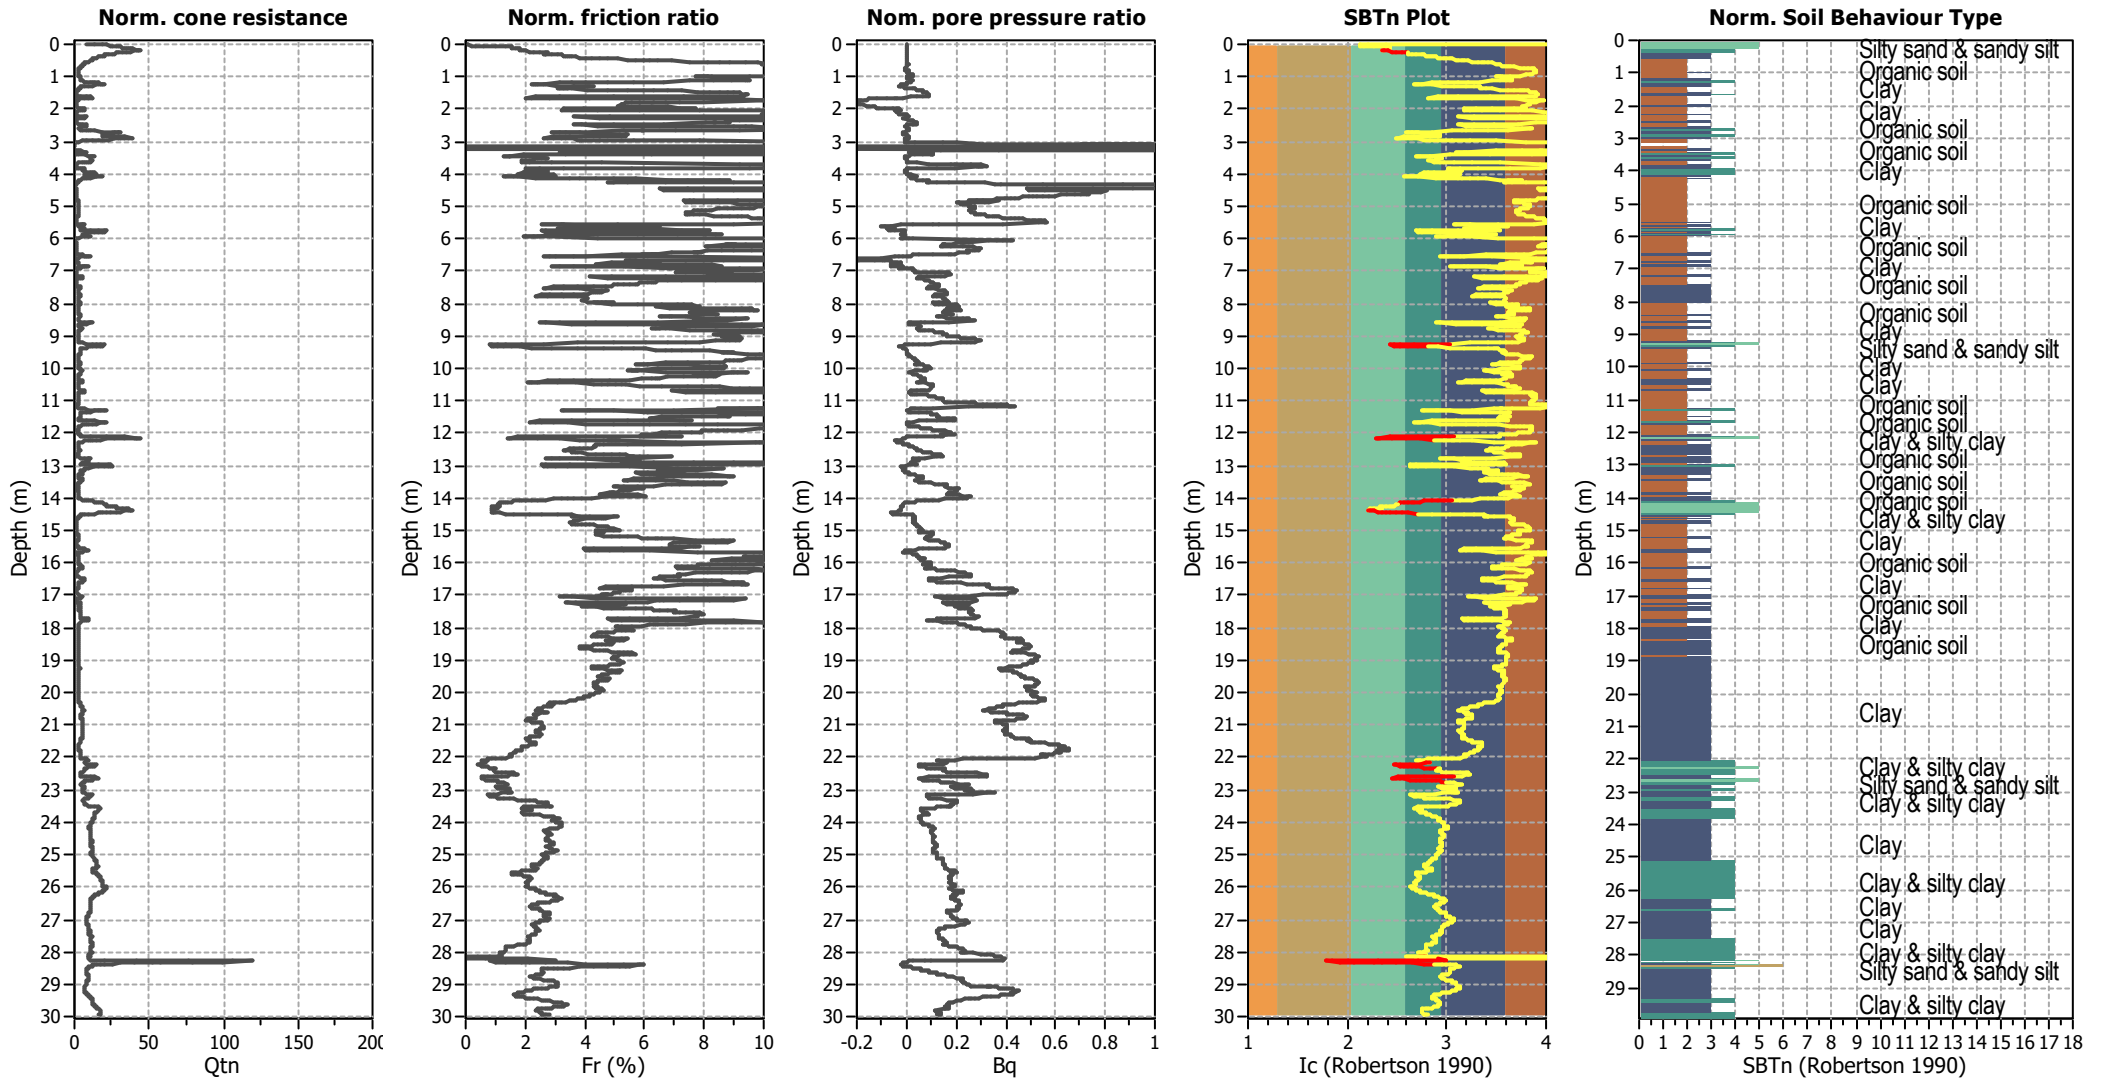


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

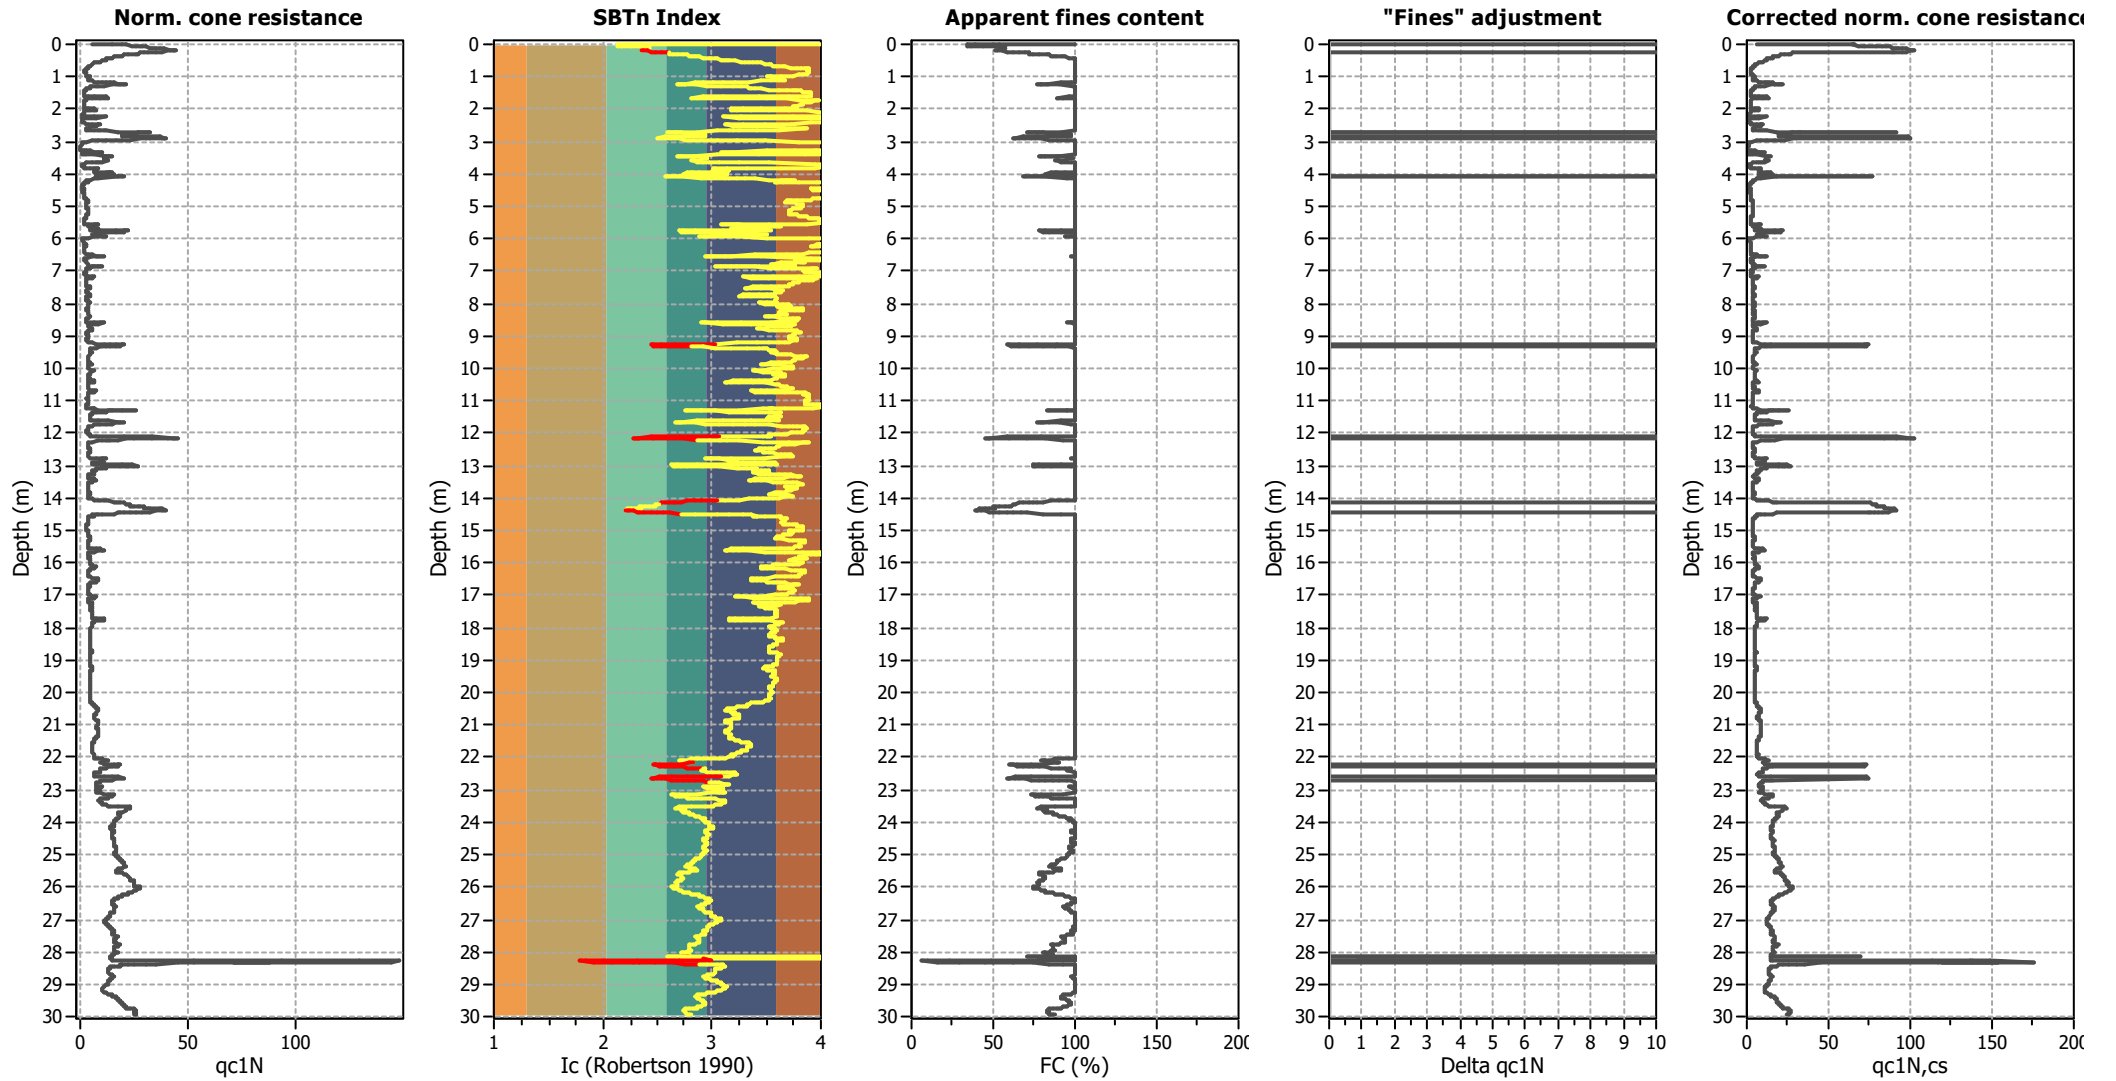

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

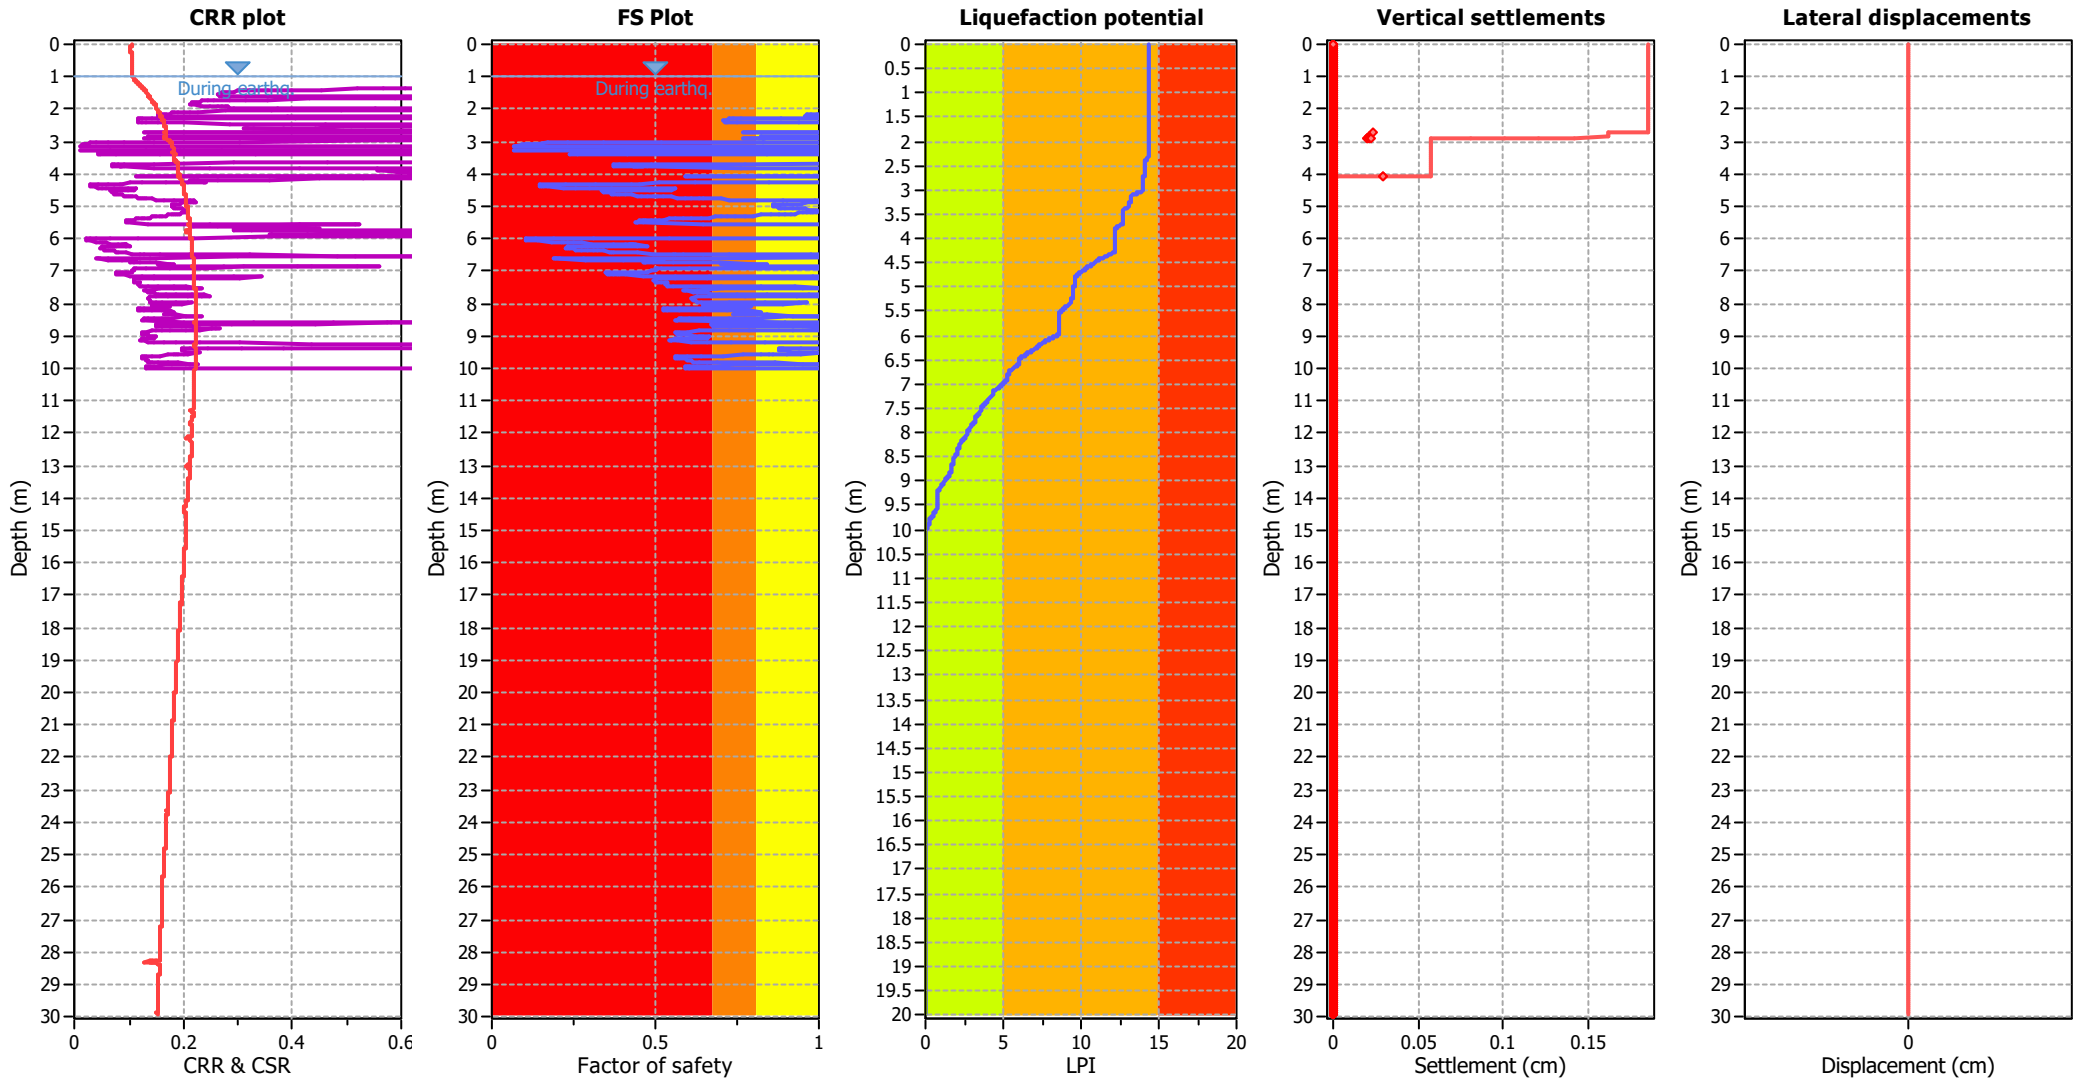

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

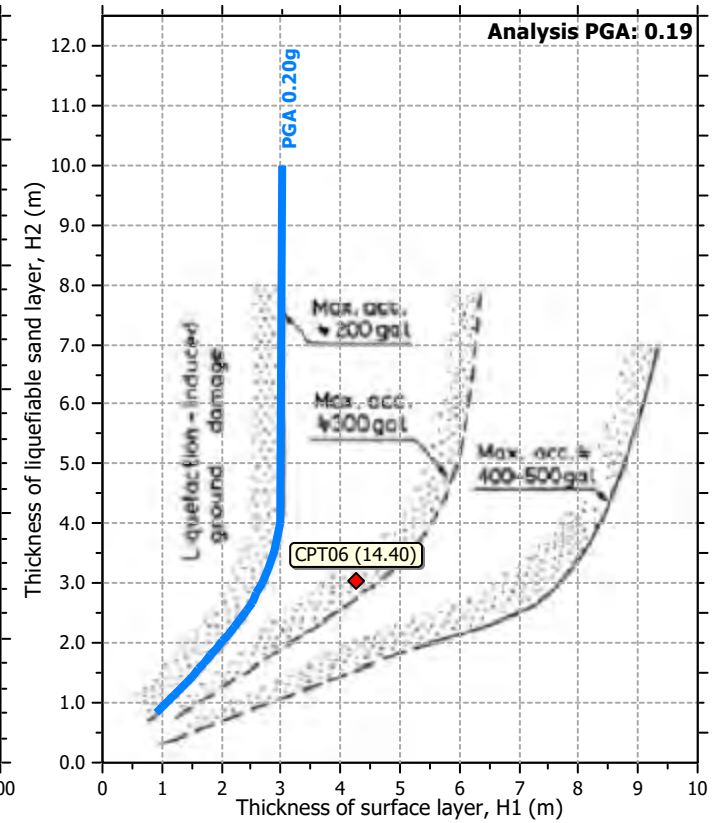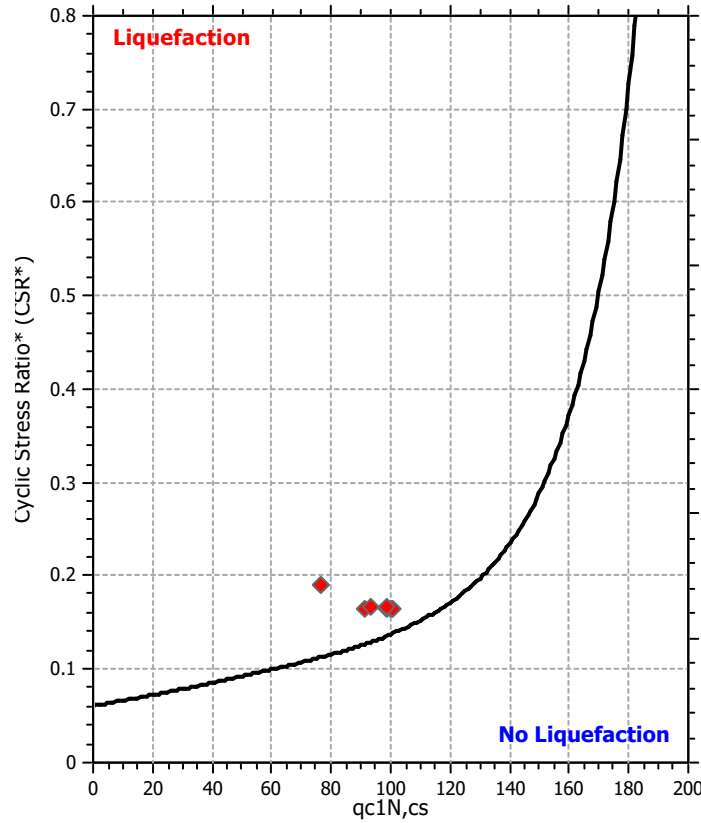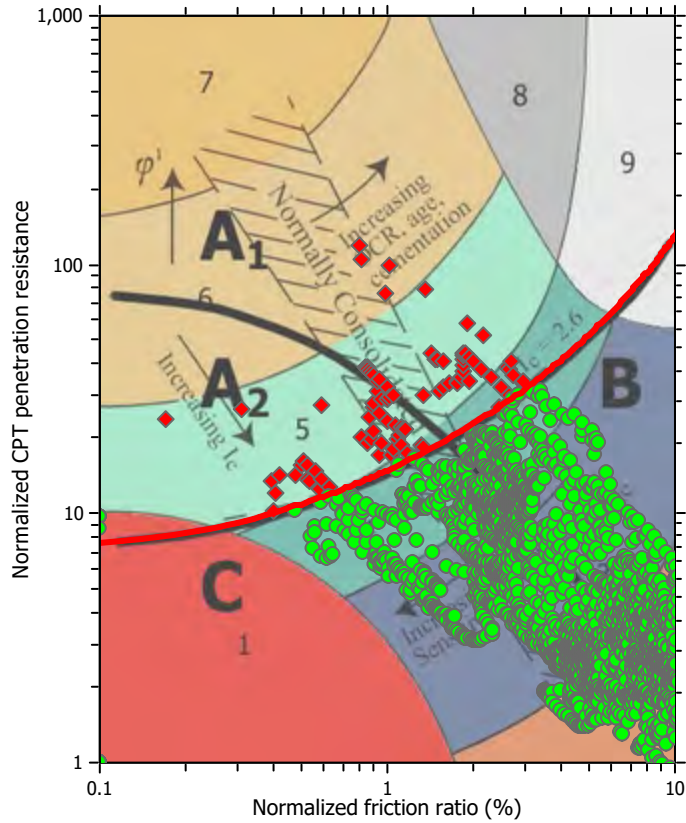

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

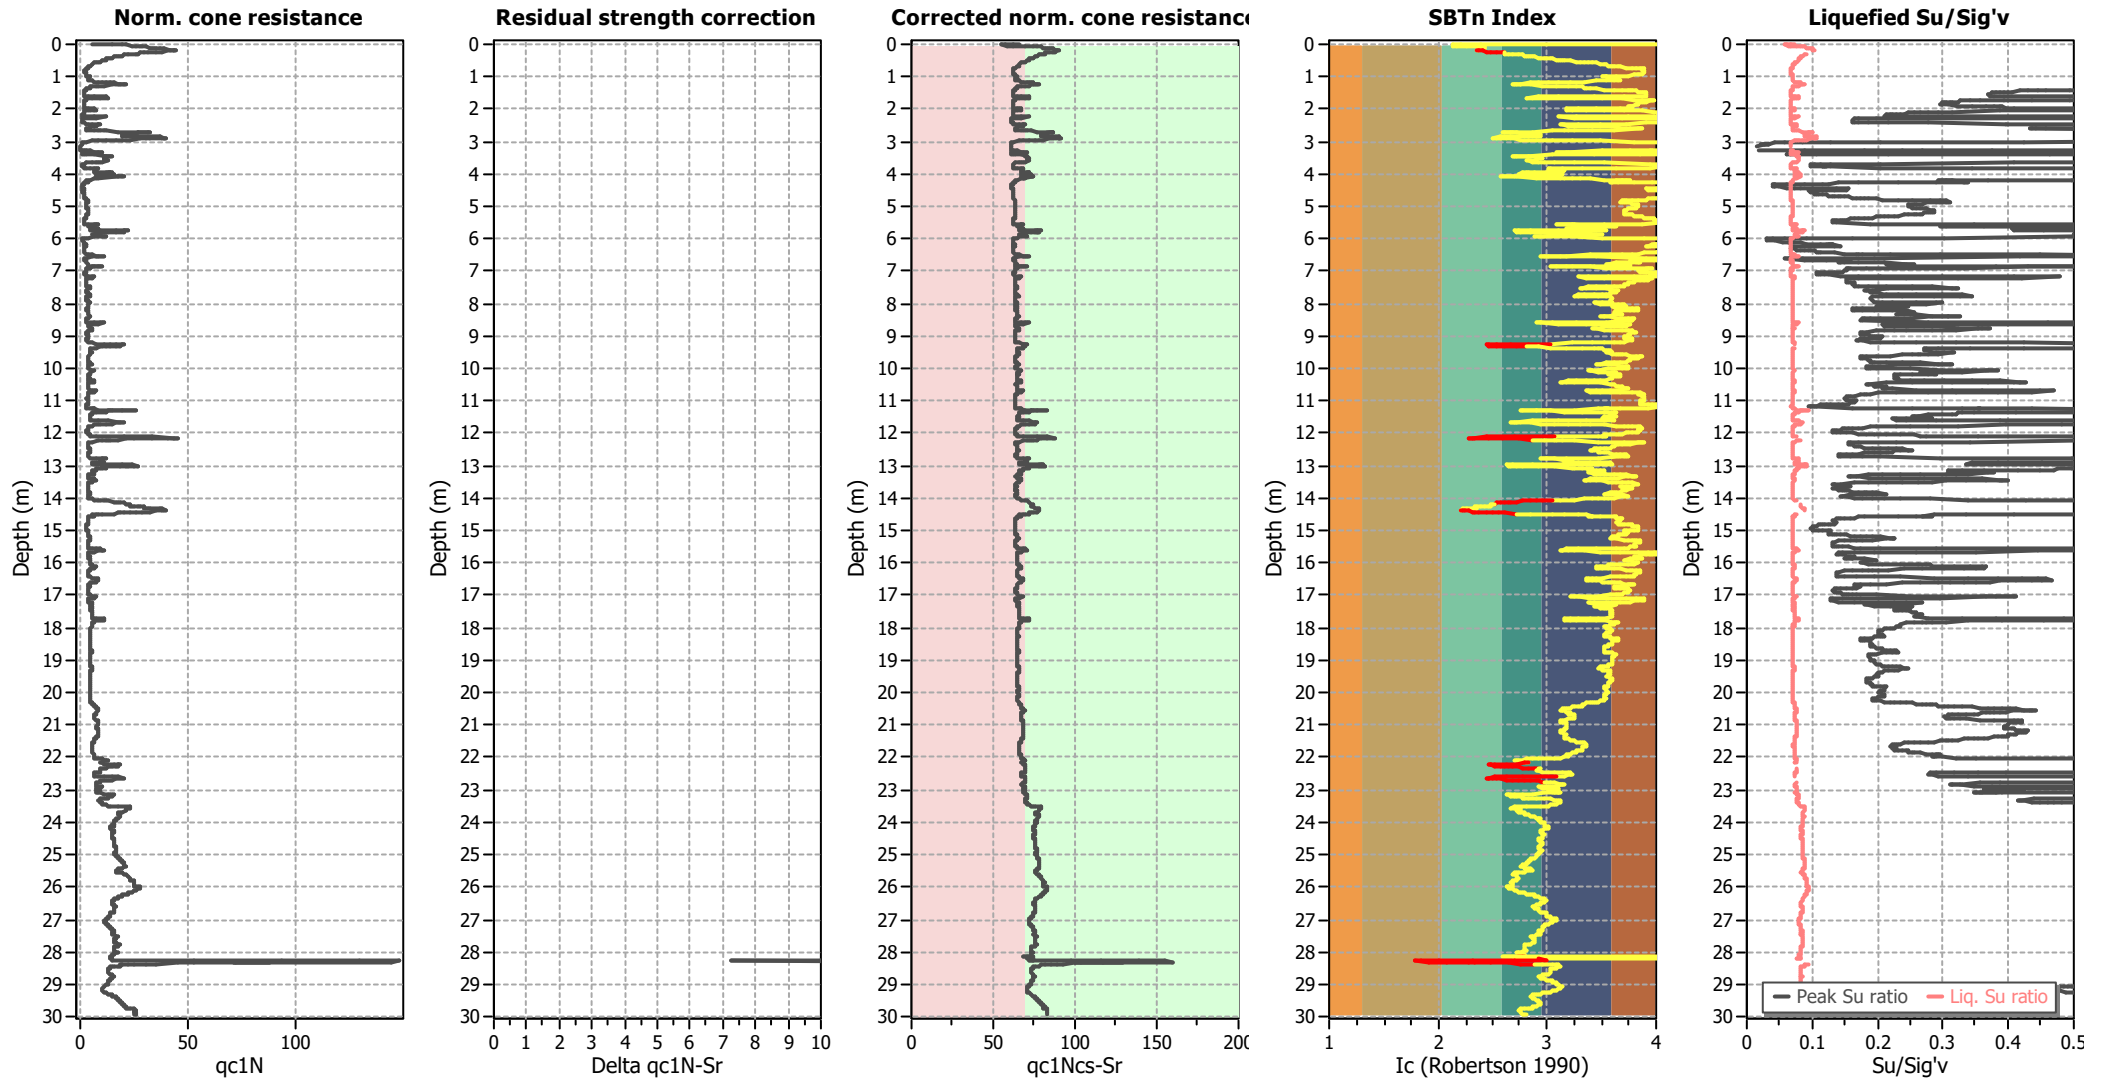

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

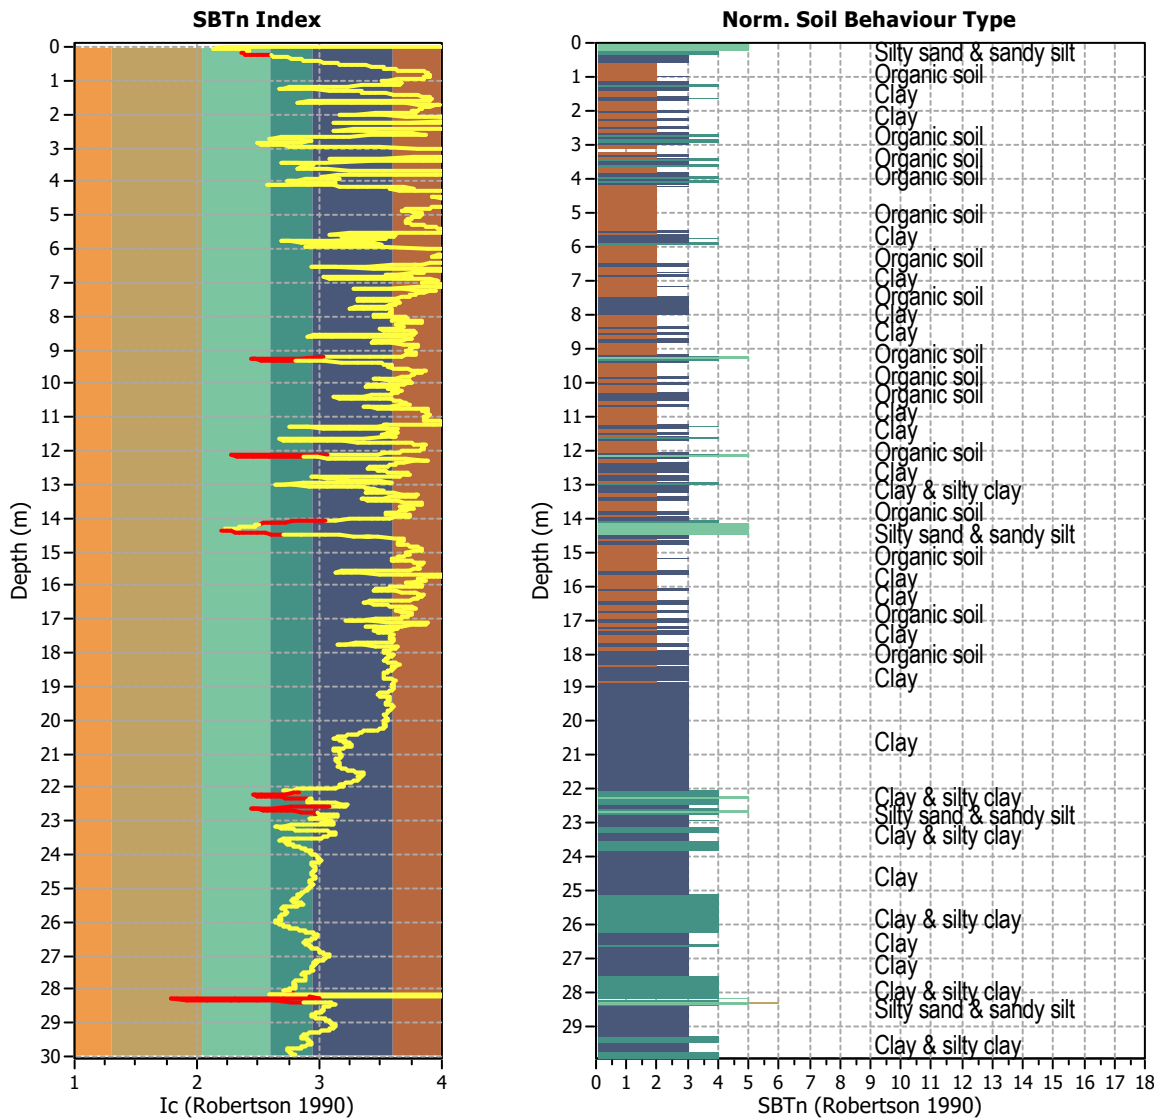

Transition layer algorithm properties	General statistics
I_c minimum check value: 1.70	Total points in CPT file: 2994
I_c maximum check value: 3.00	Total points excluded: 118
I_c change ratio value: 0.0100	Exclusion percentage: 3.94%
Minimum number of points in layer: 4	Number of layers detected: 14


Estimation of post-earthquake settlements

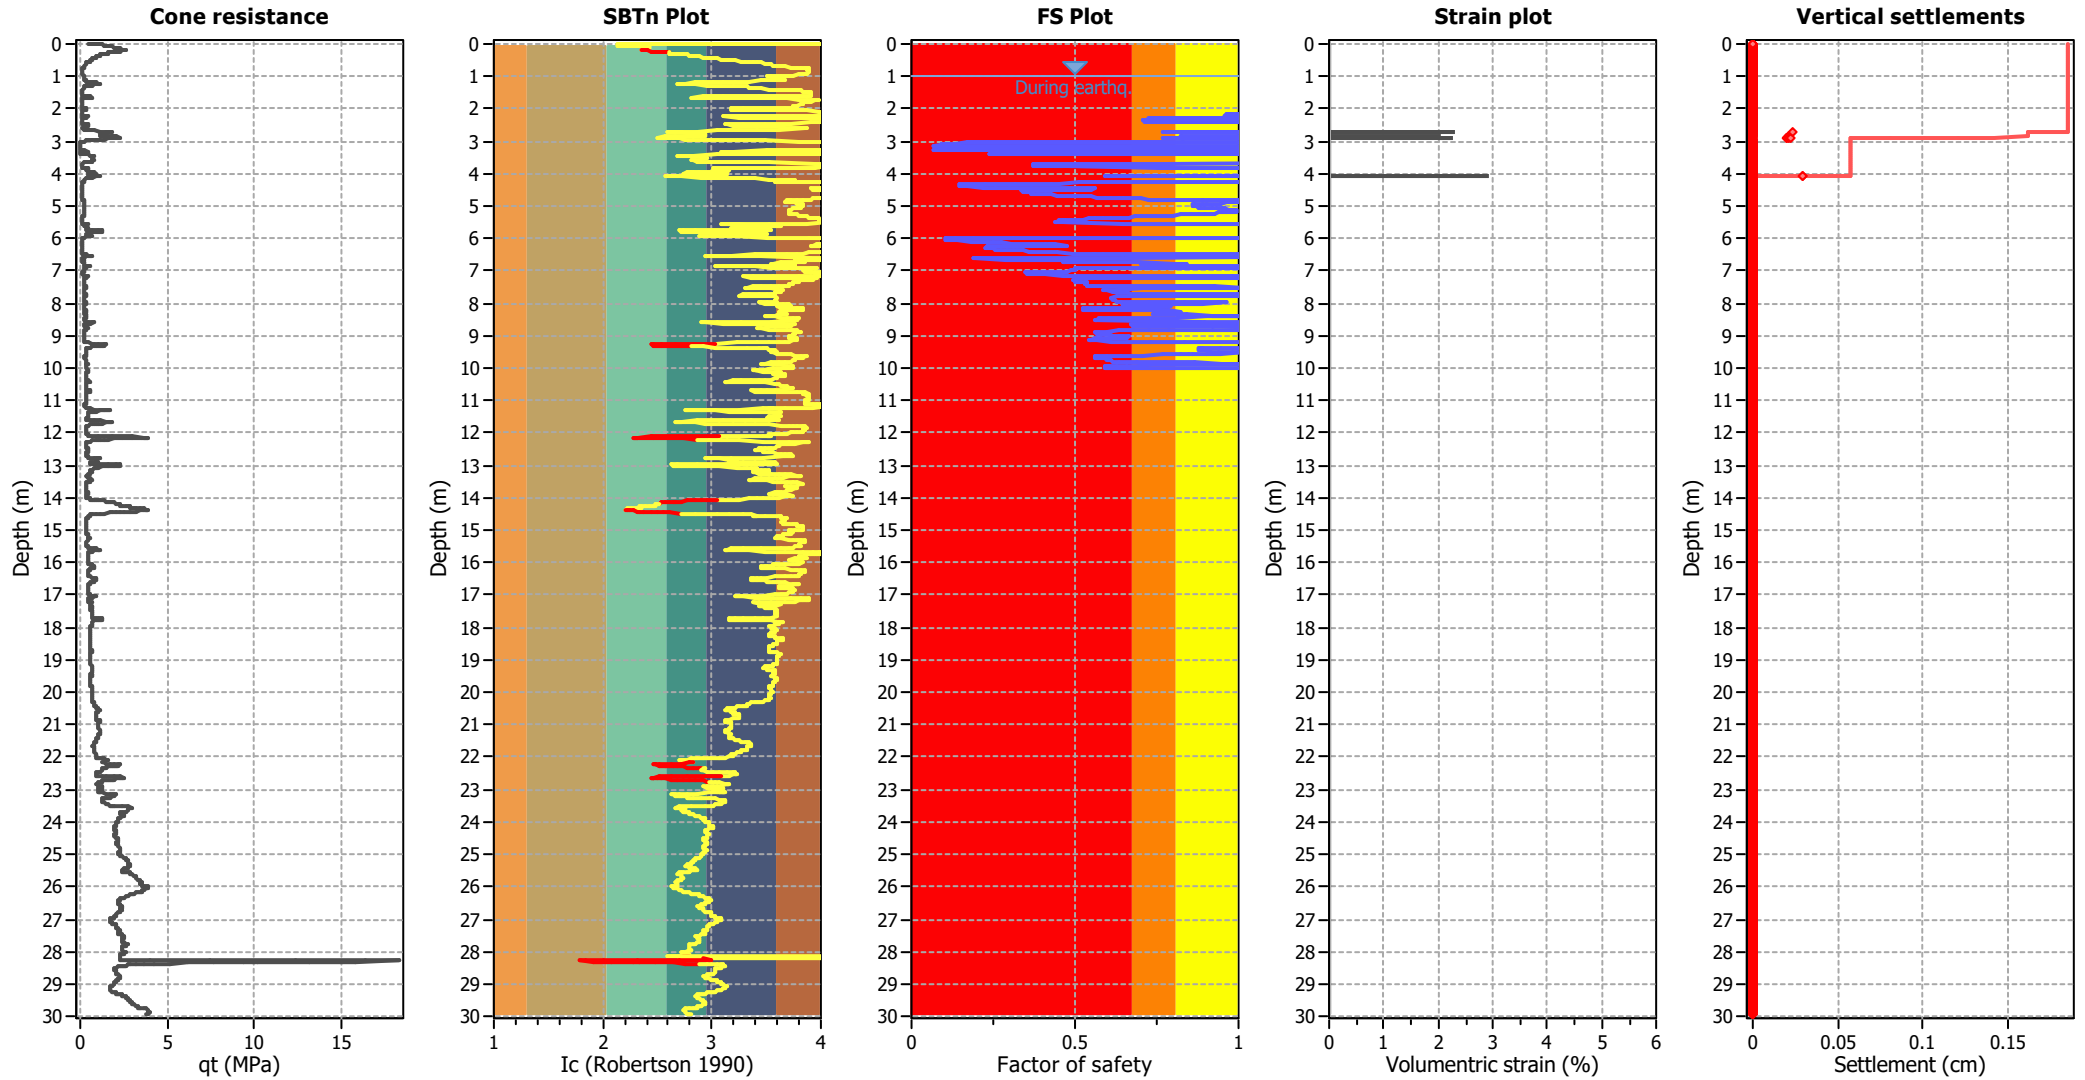

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

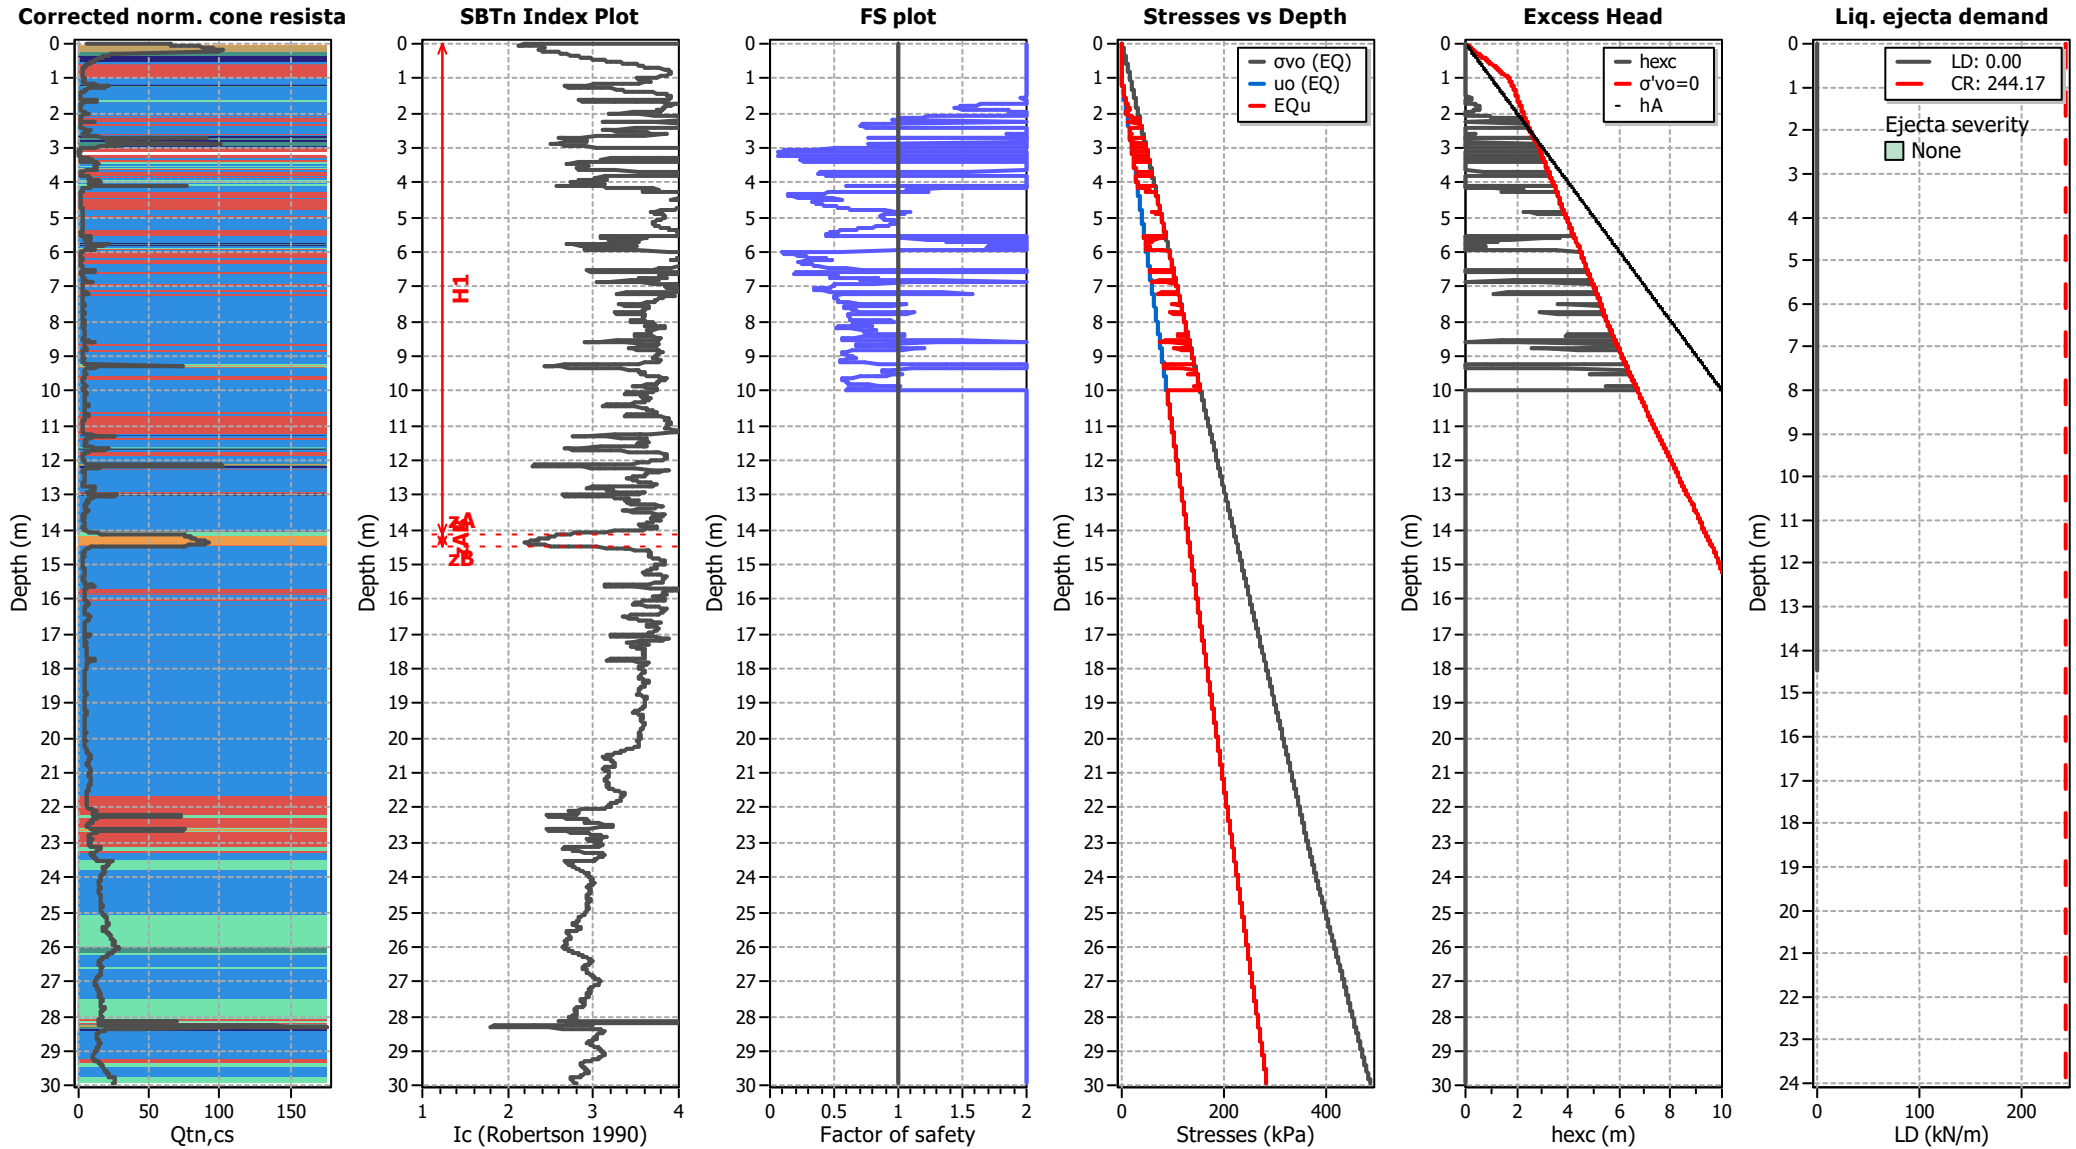

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT07

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

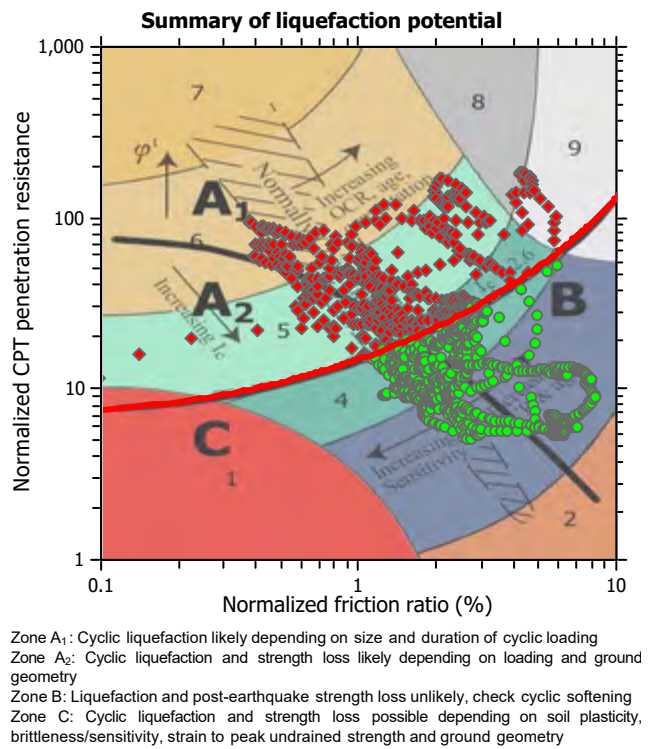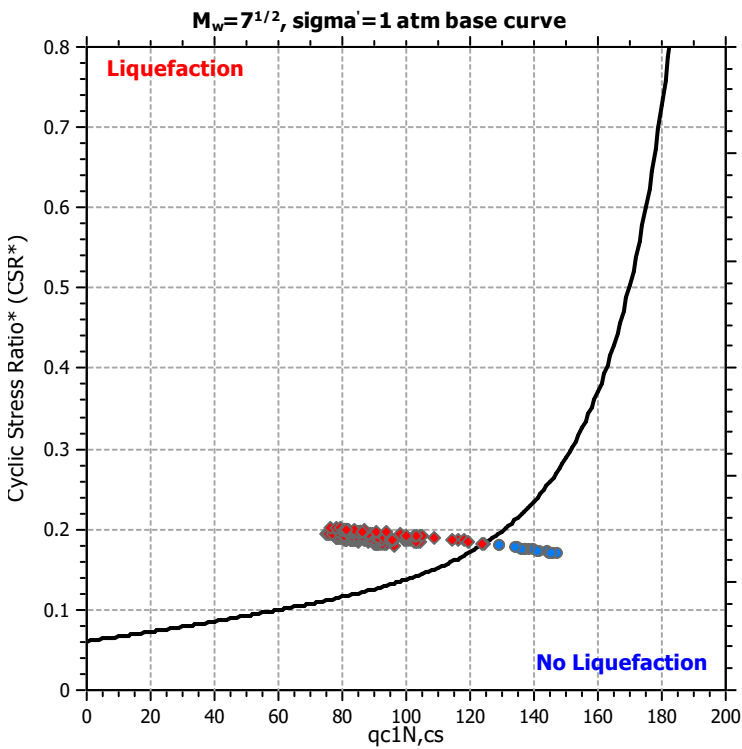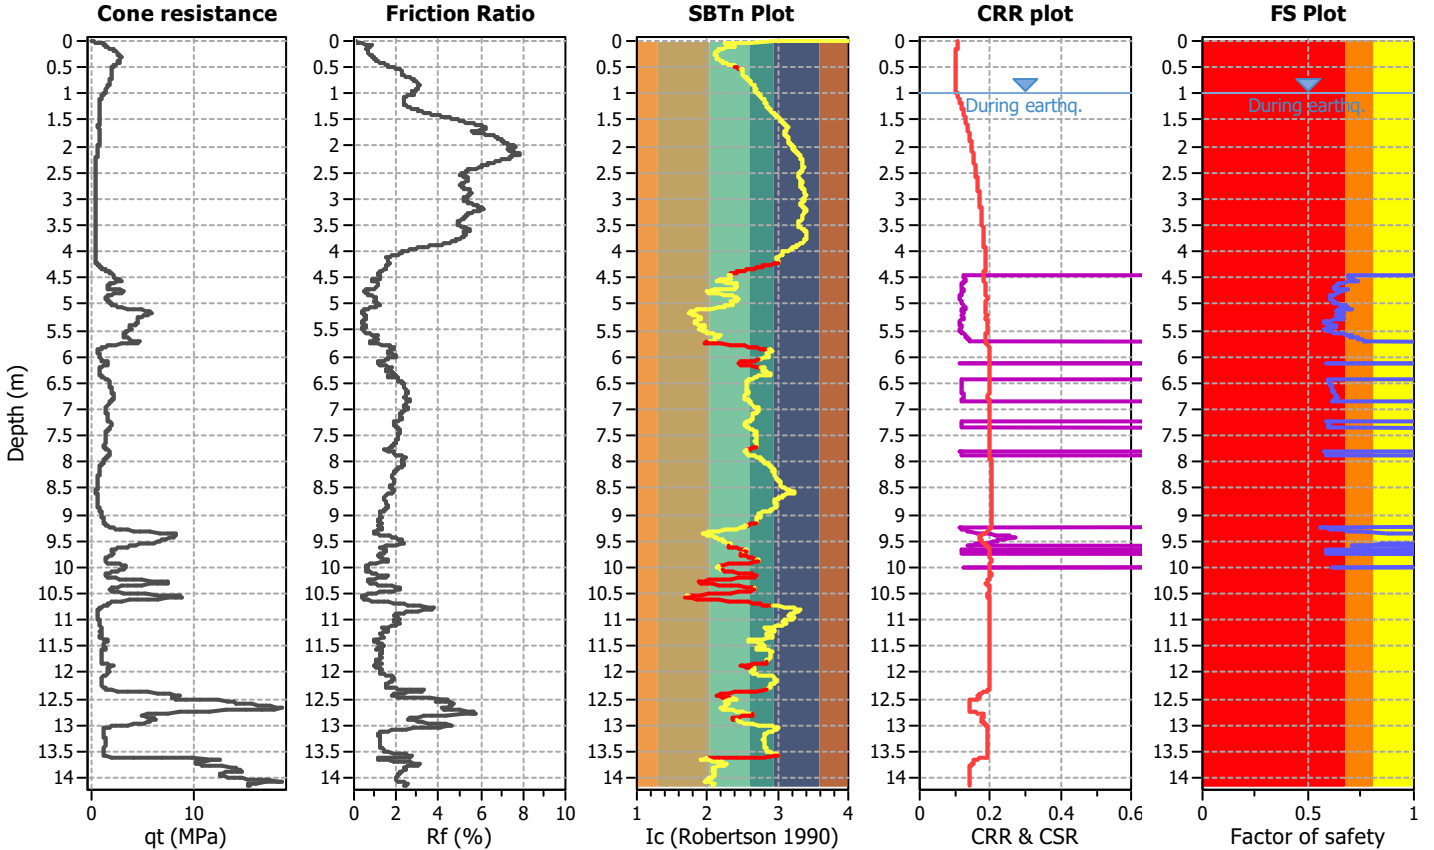

CPT basic interpretation plots

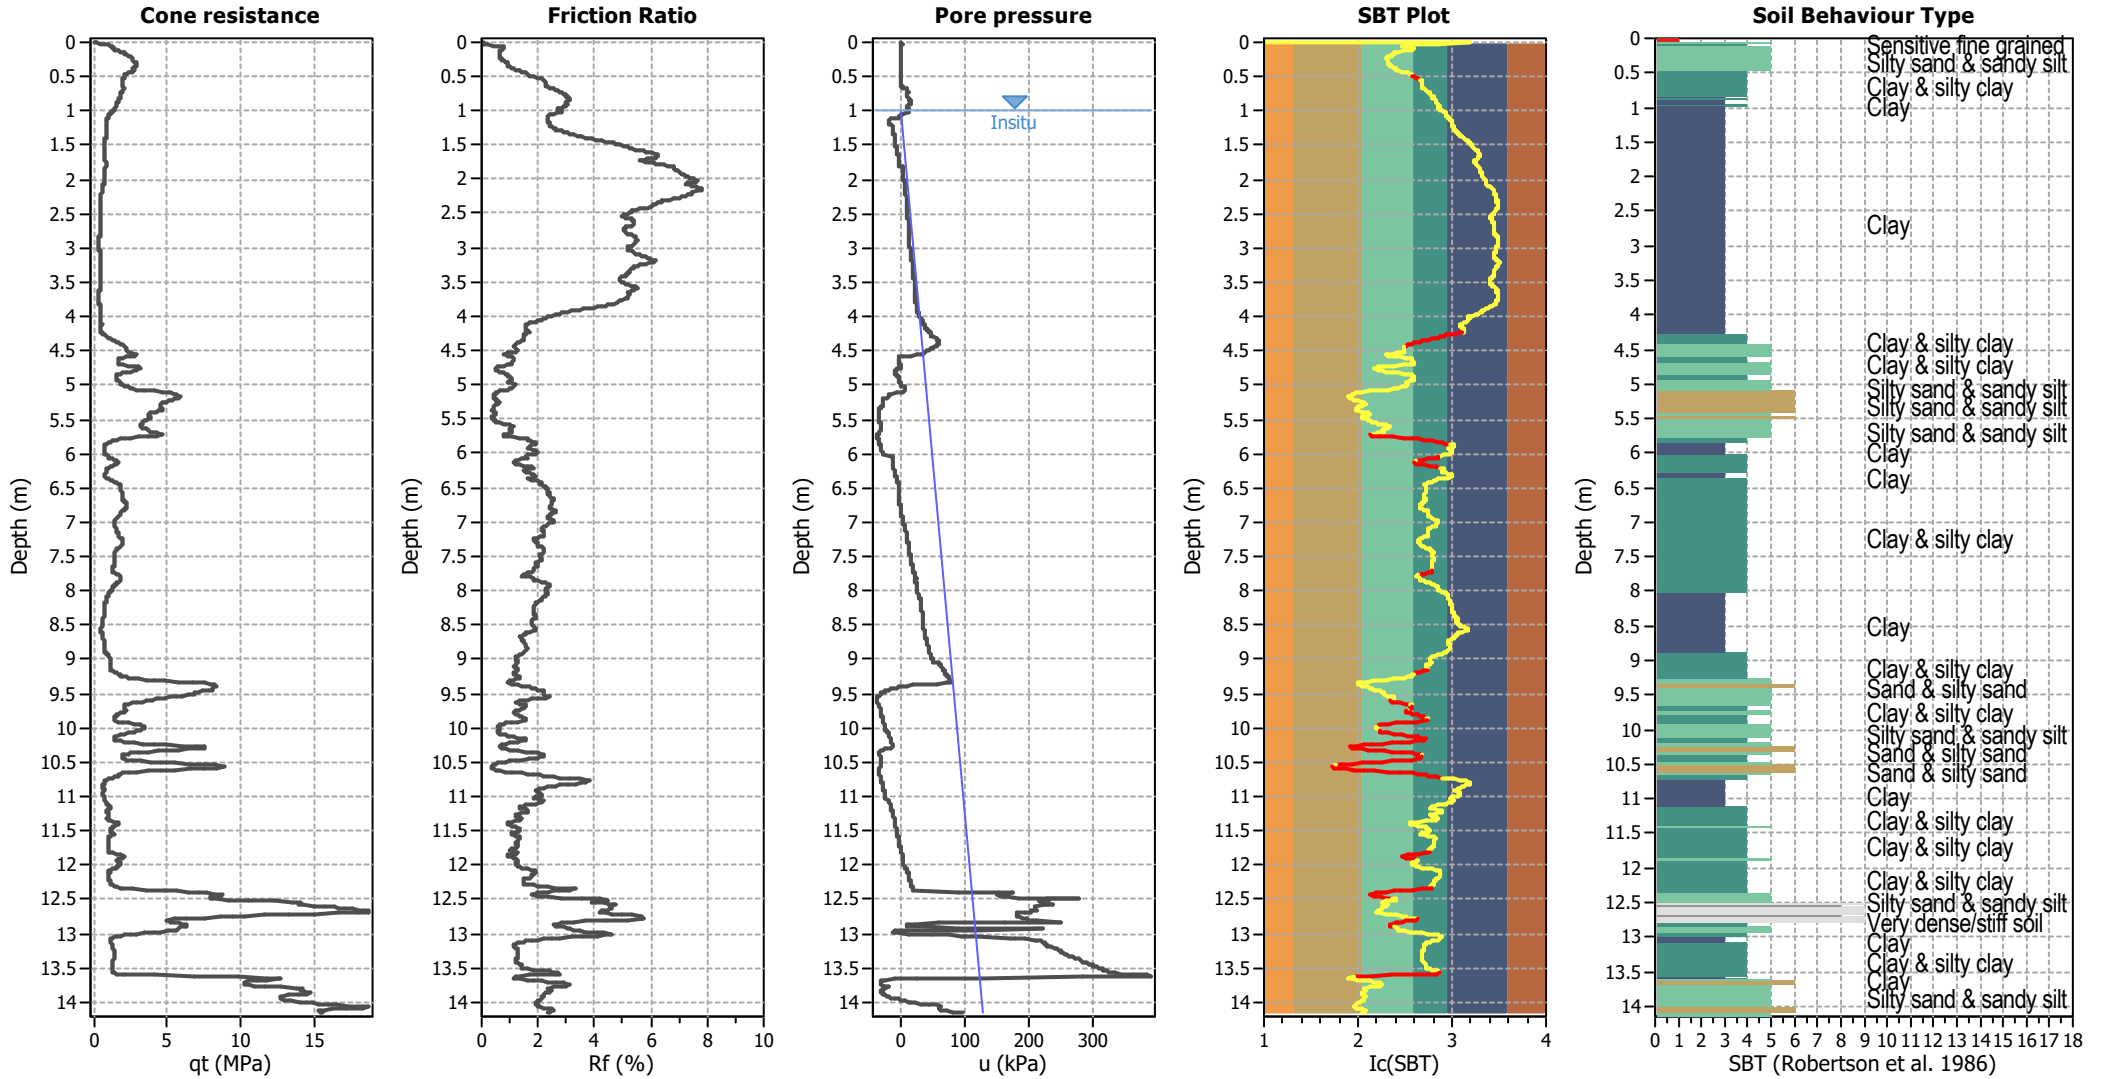


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_p applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

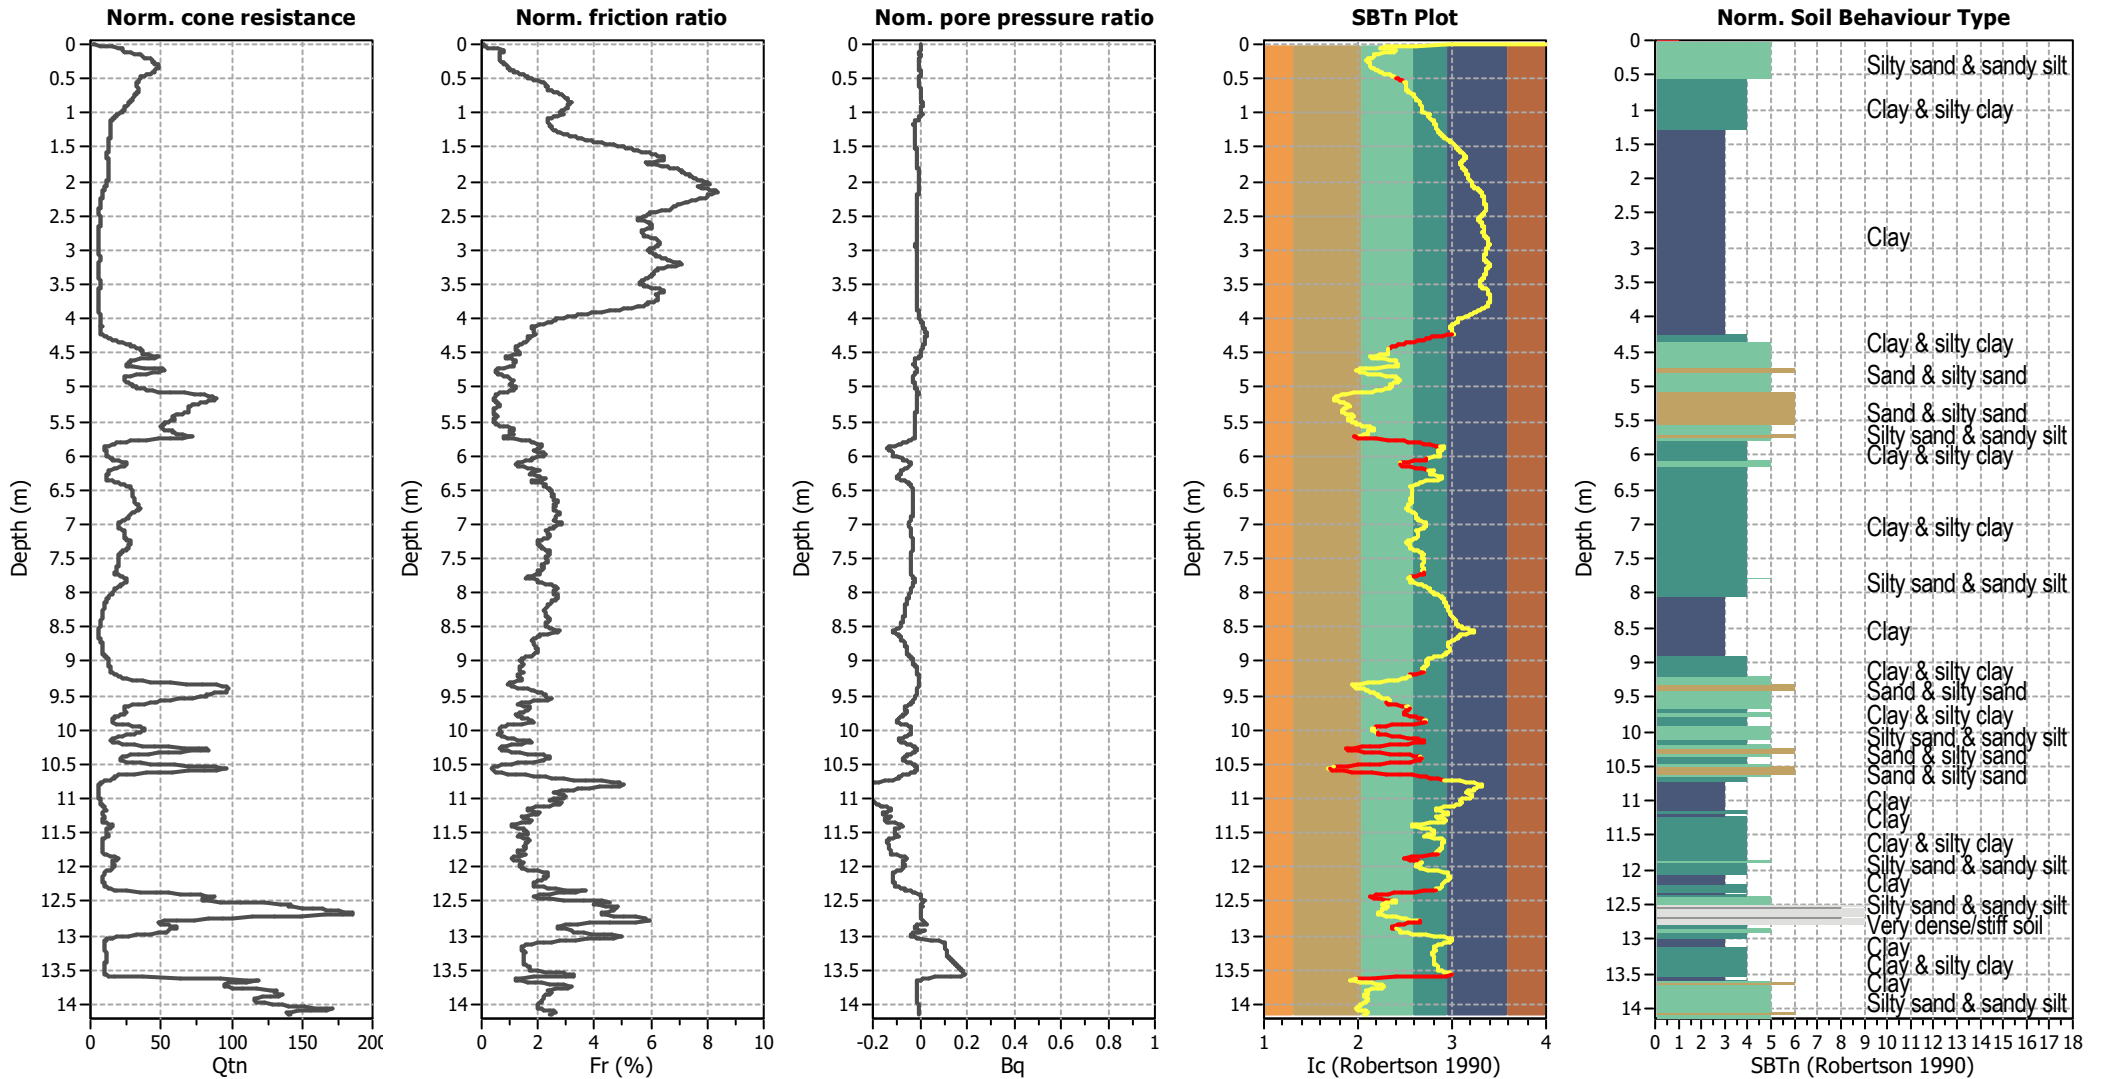


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

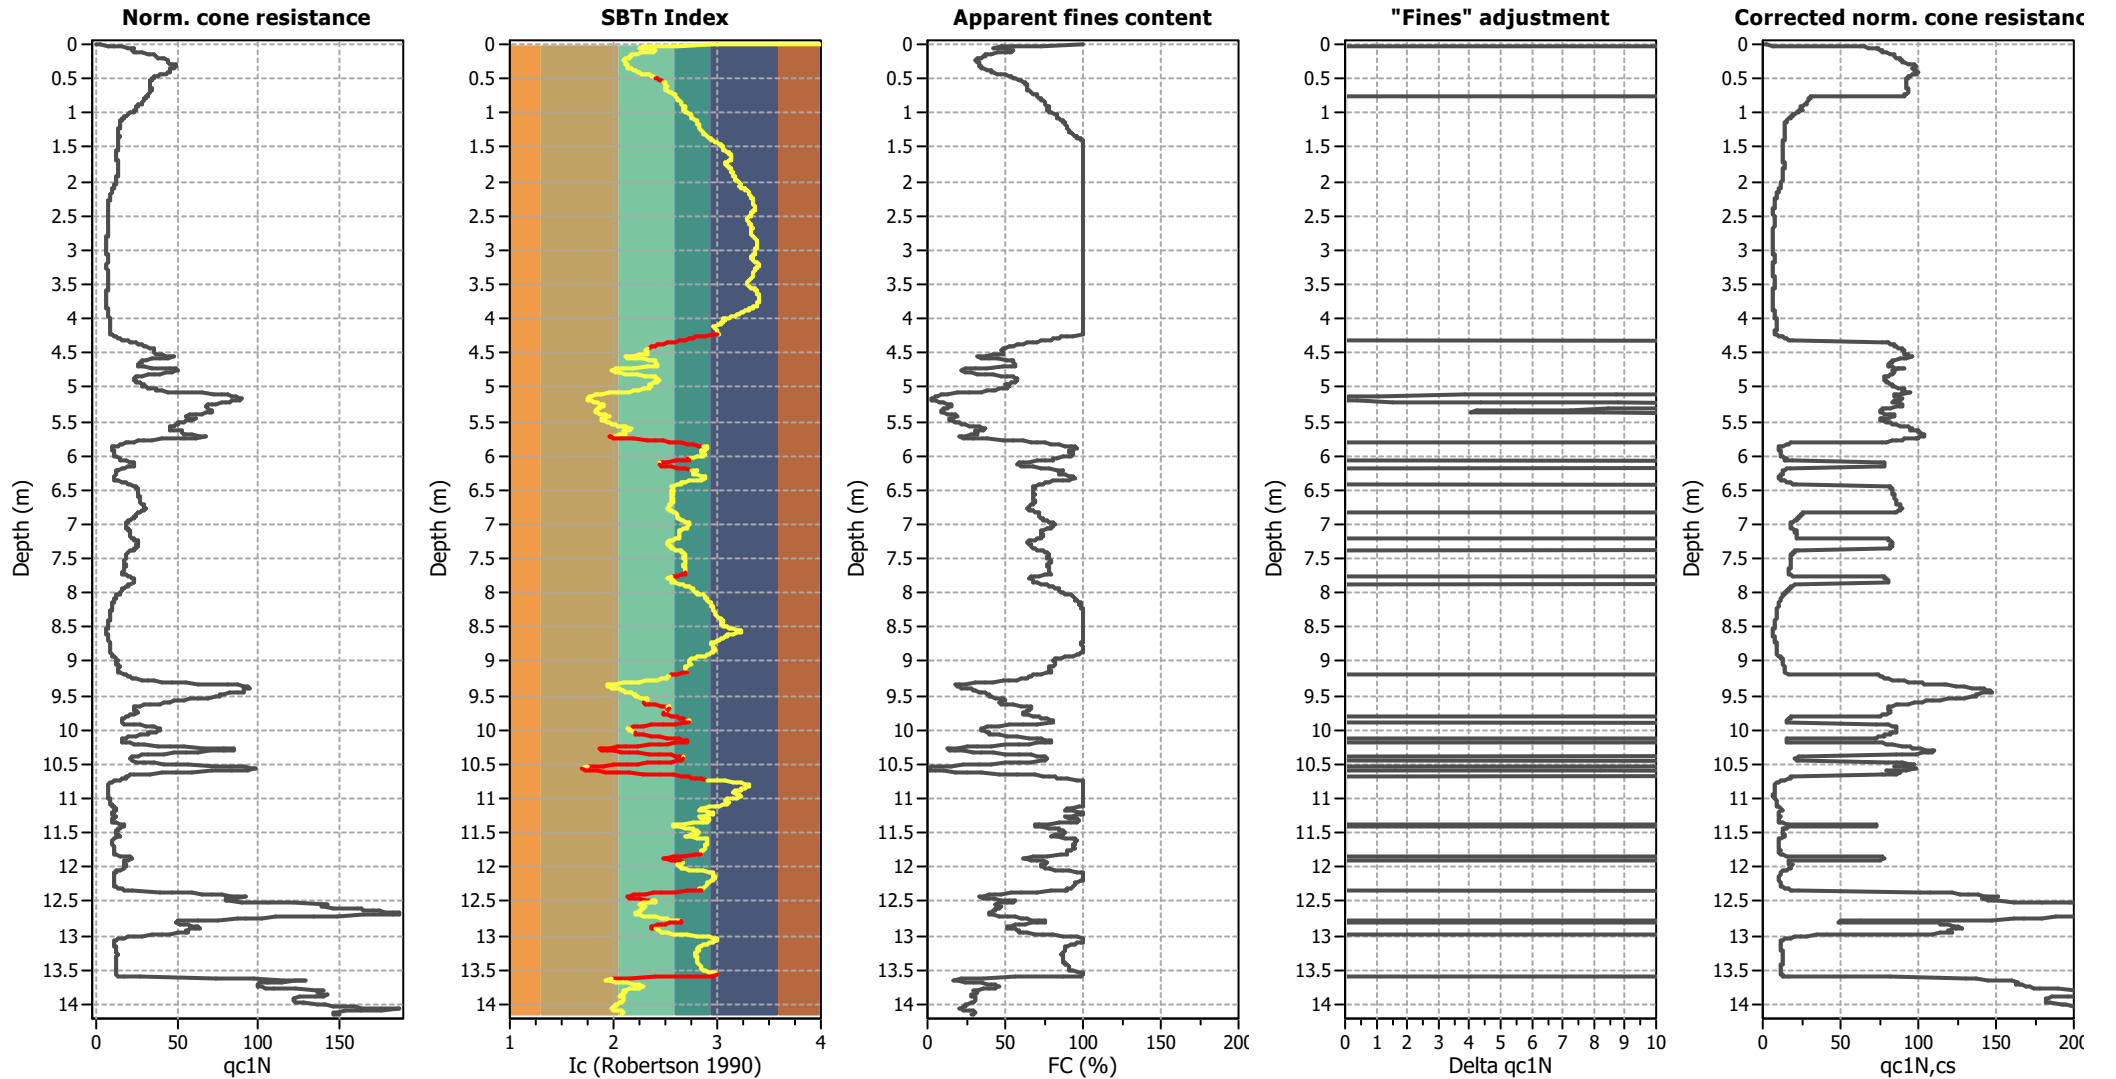

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

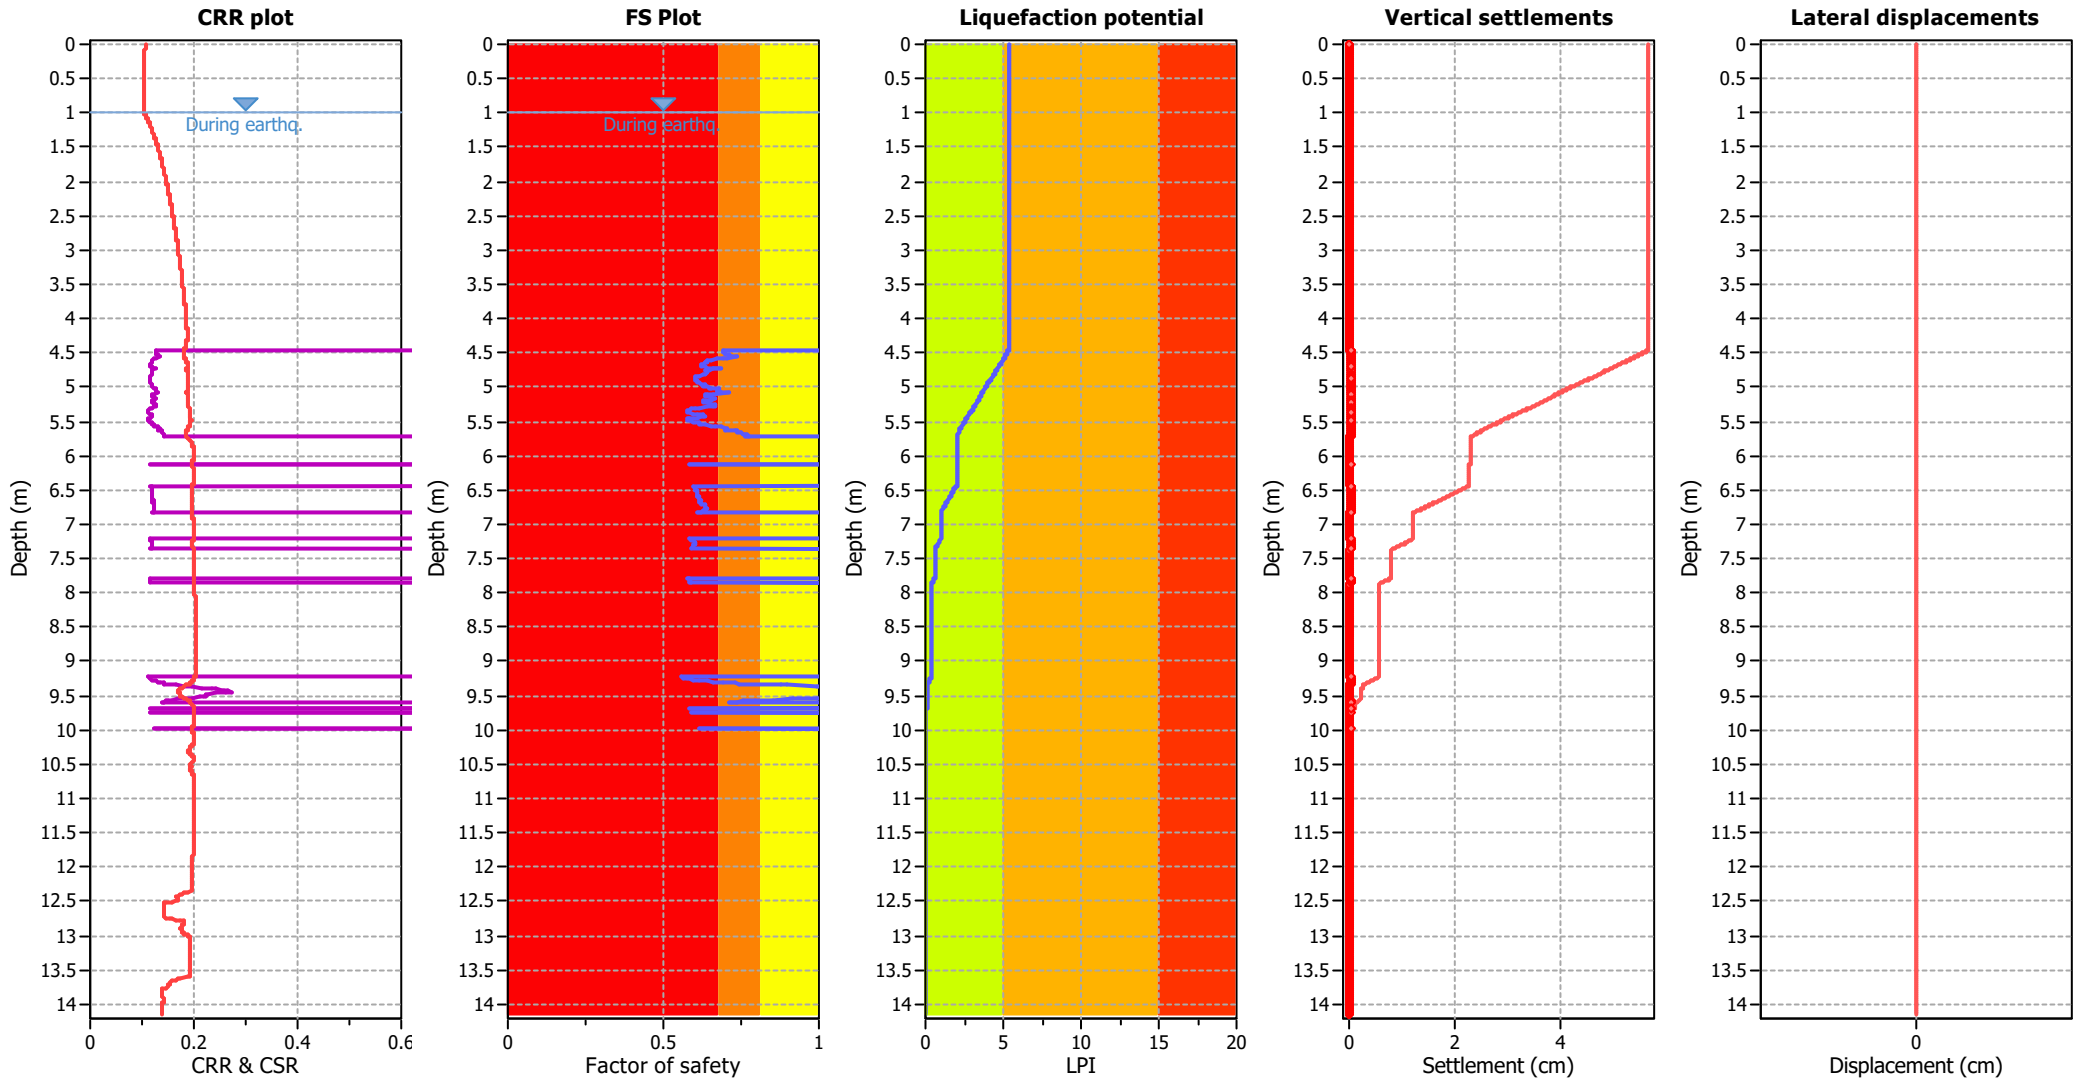

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

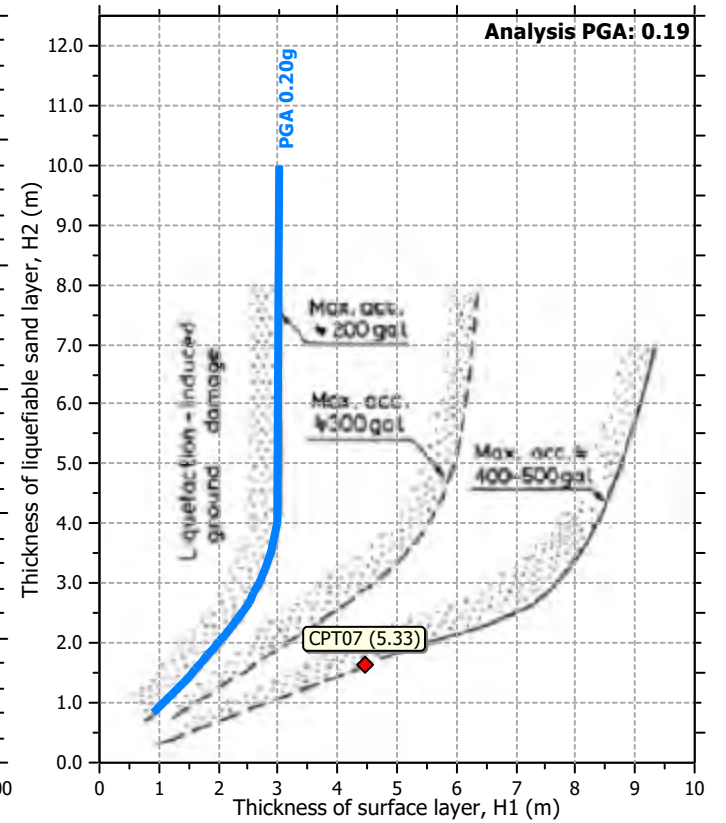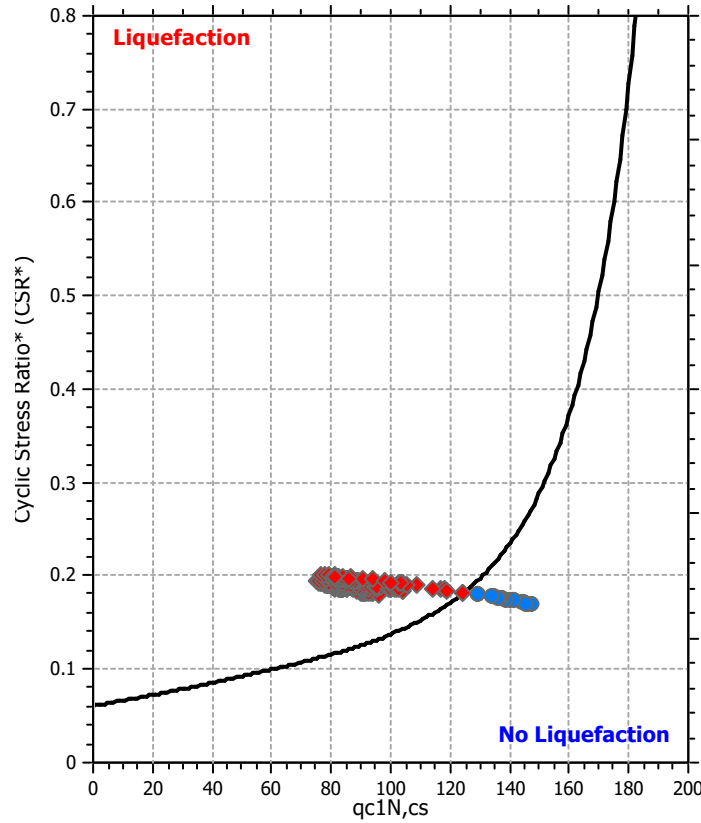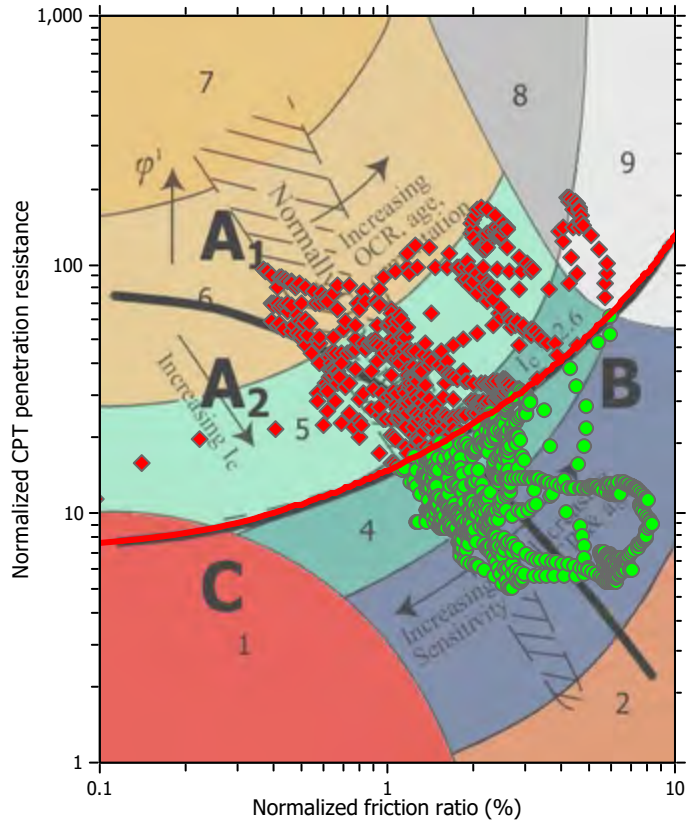

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

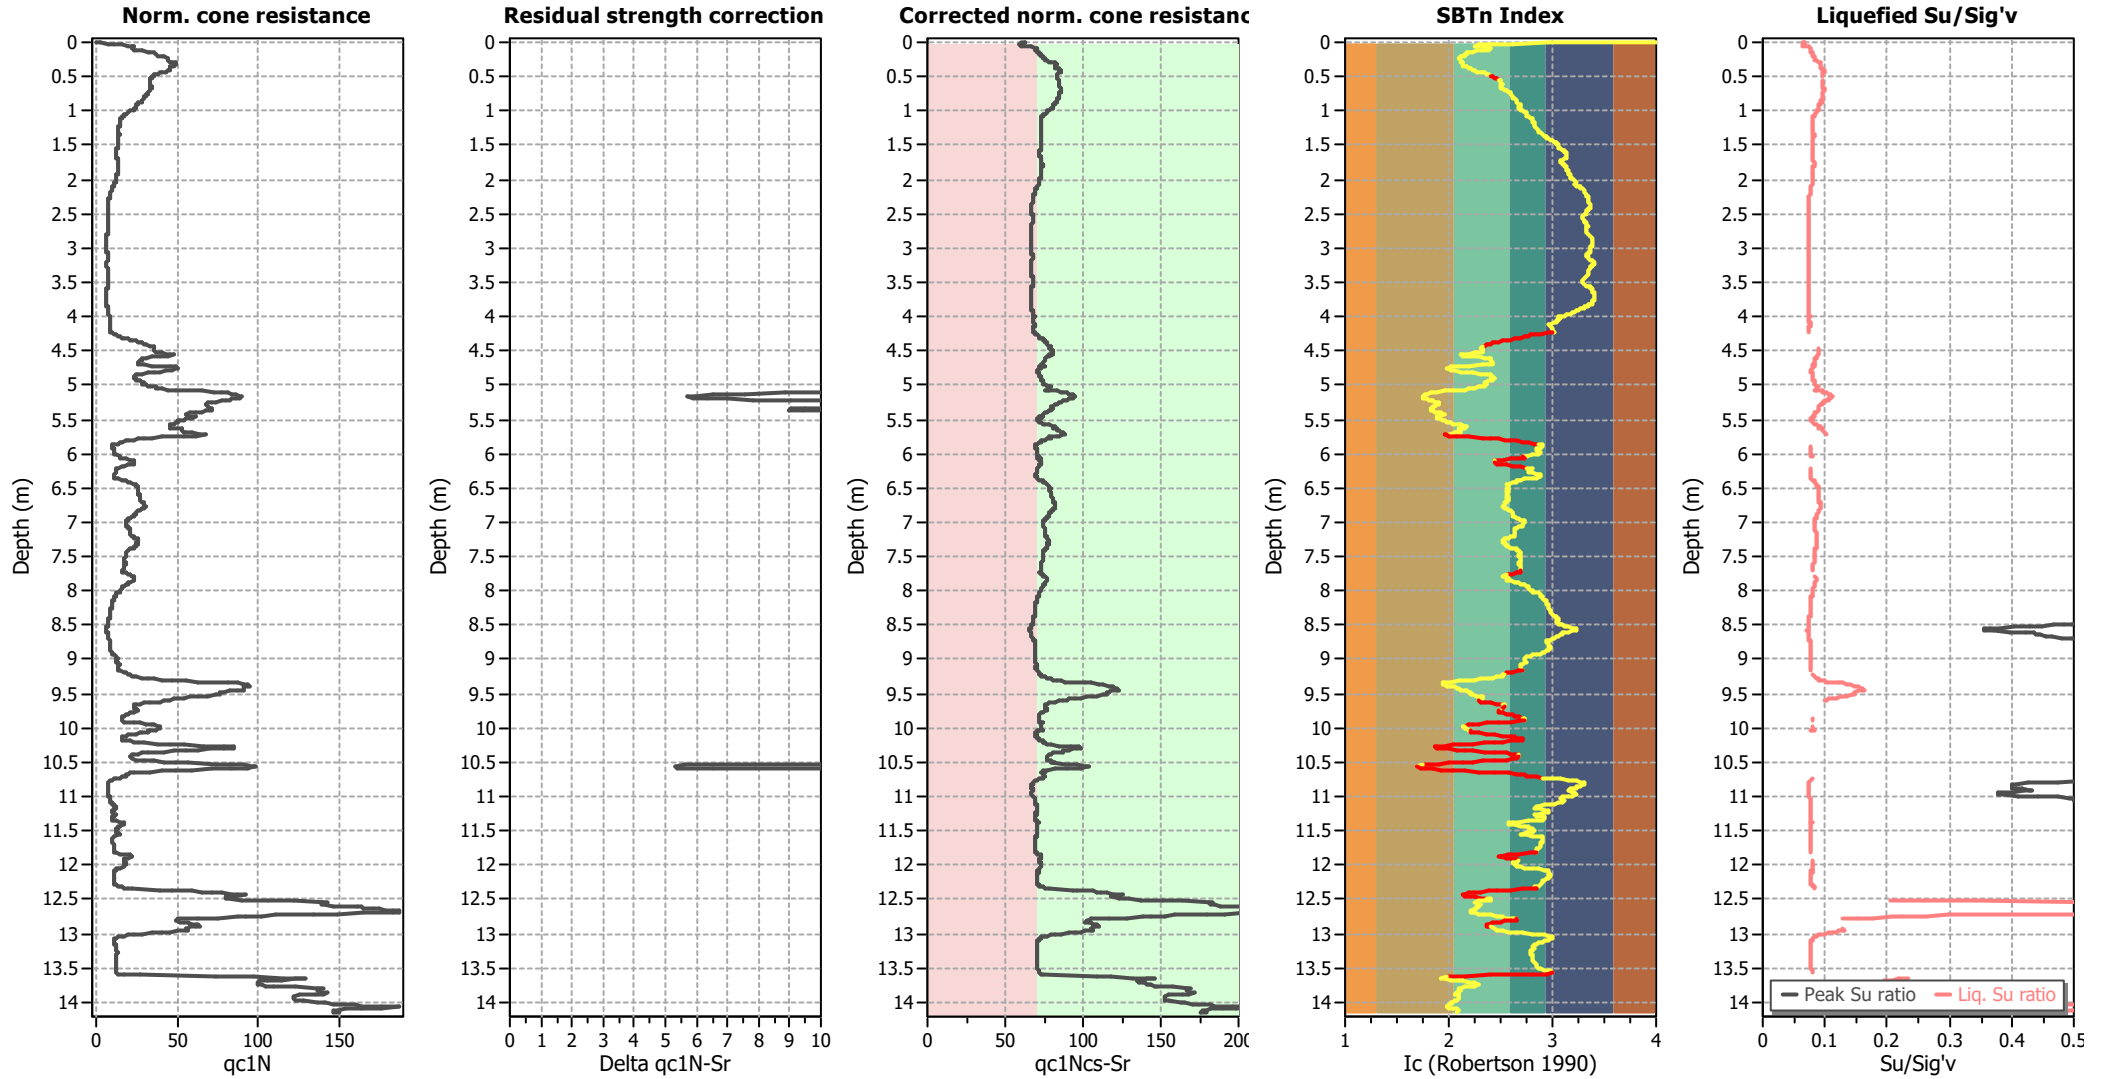

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

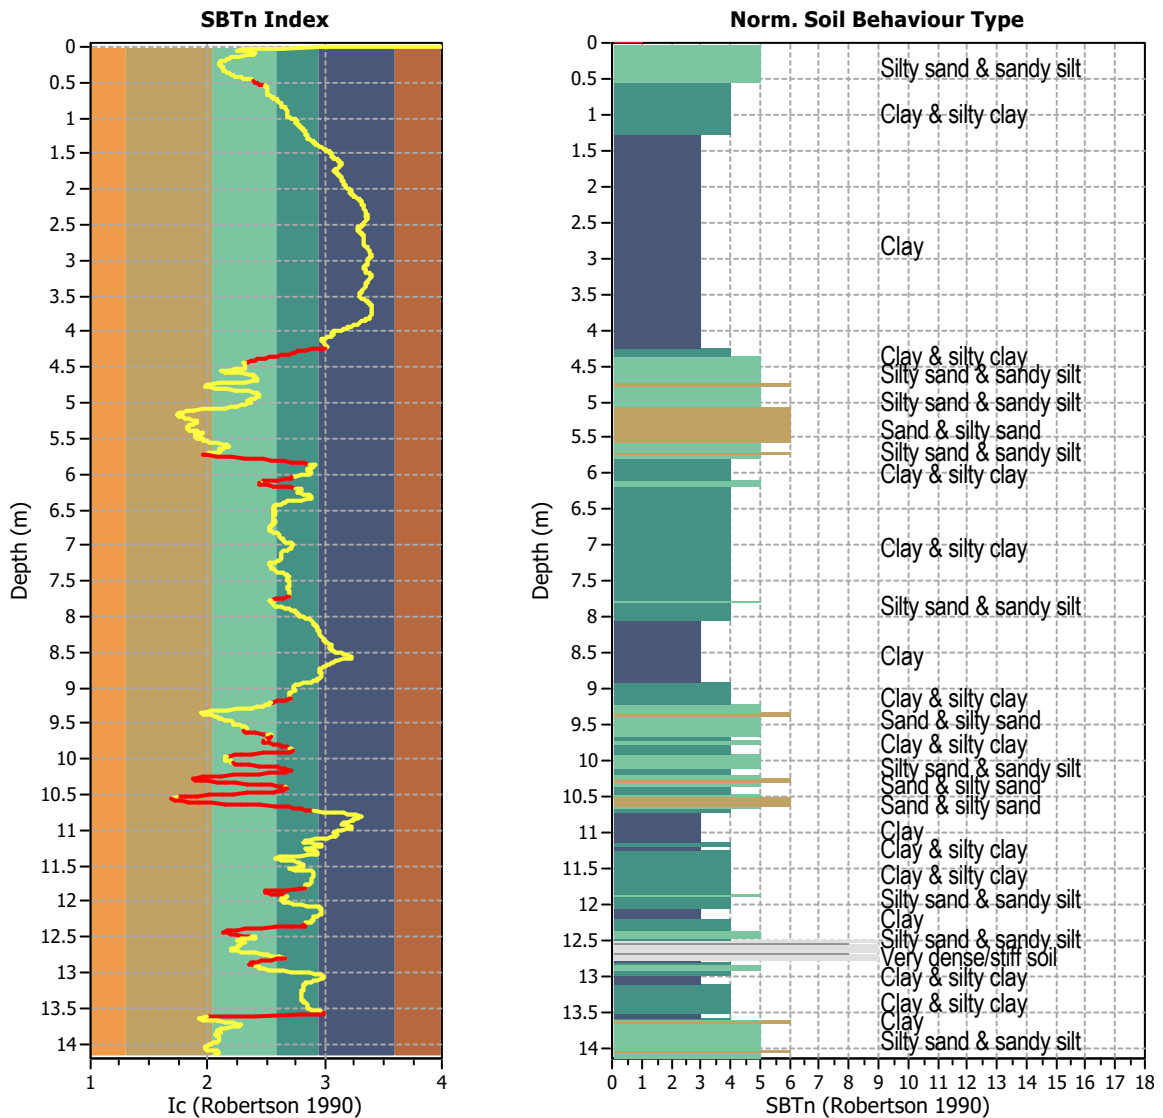


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1416
 Total points excluded: 222
 Exclusion percentage: 15.68%
 Number of layers detected: 23


Estimation of post-earthquake settlements

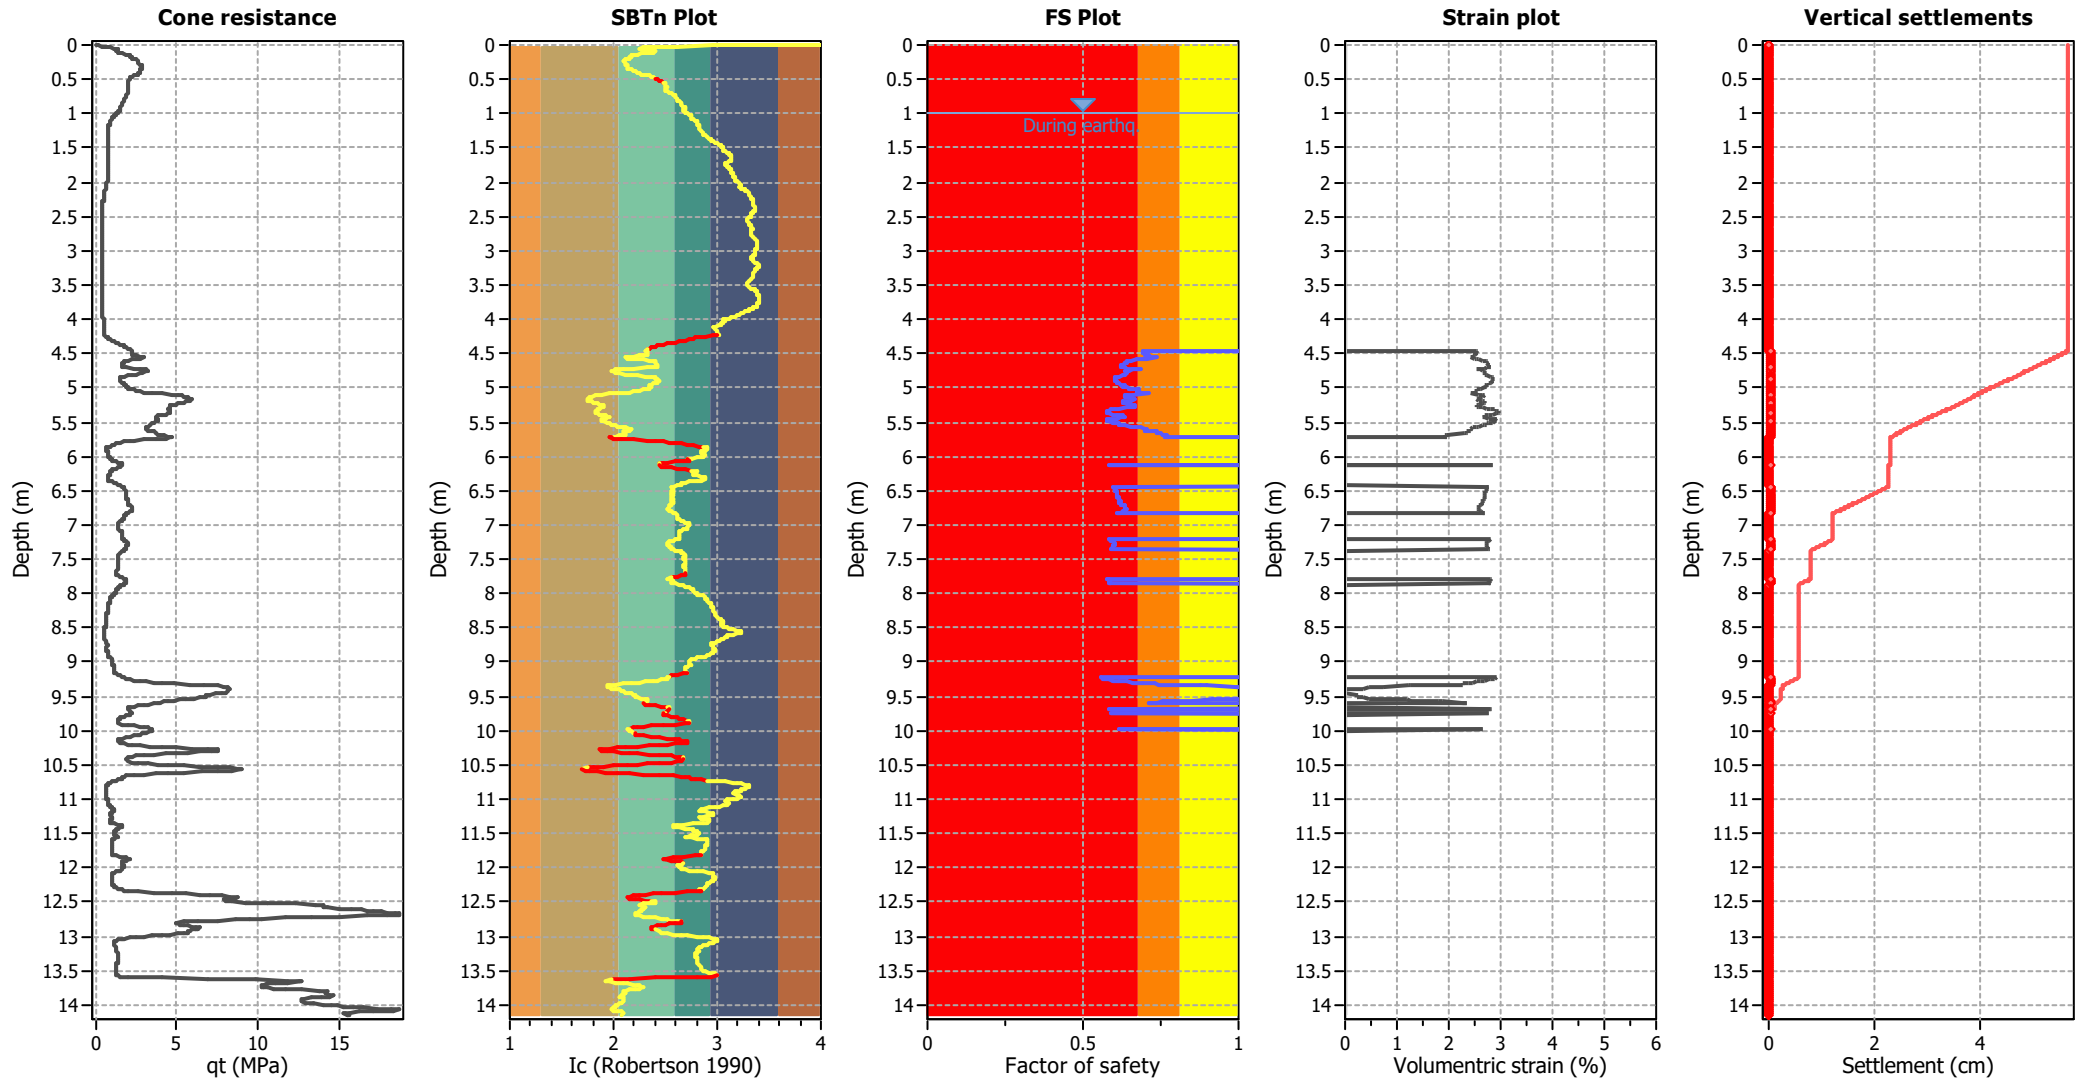

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

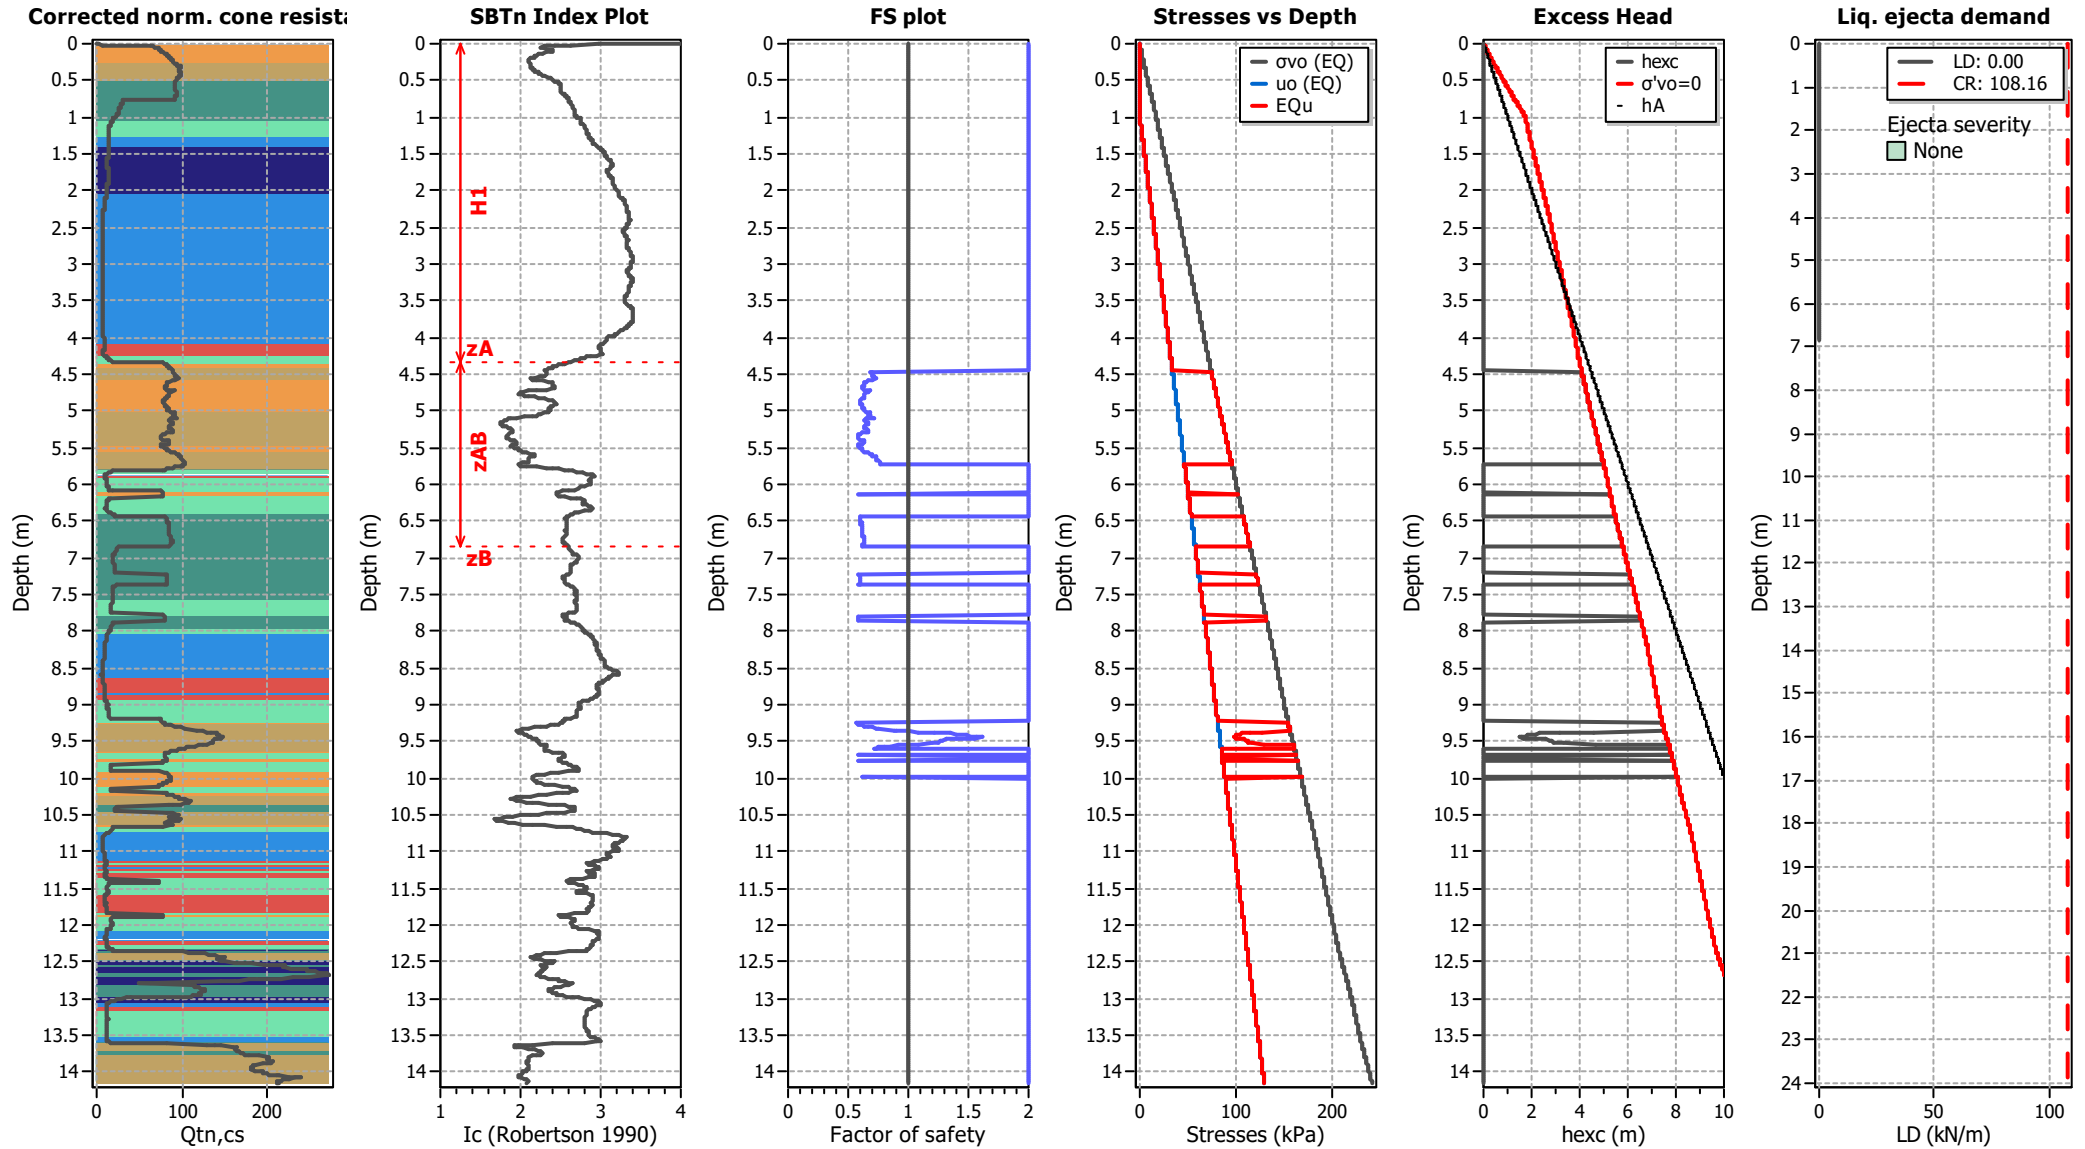

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT08

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19			K_σ applied:	Yes		

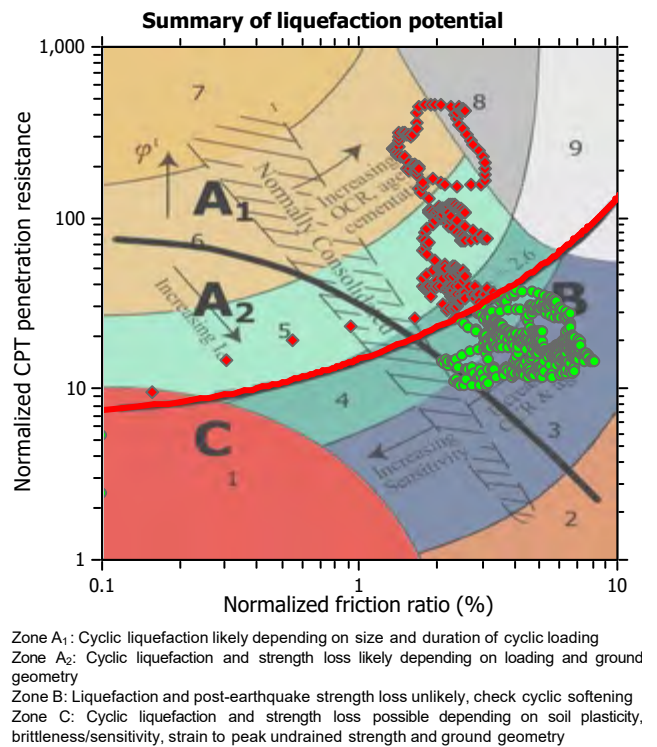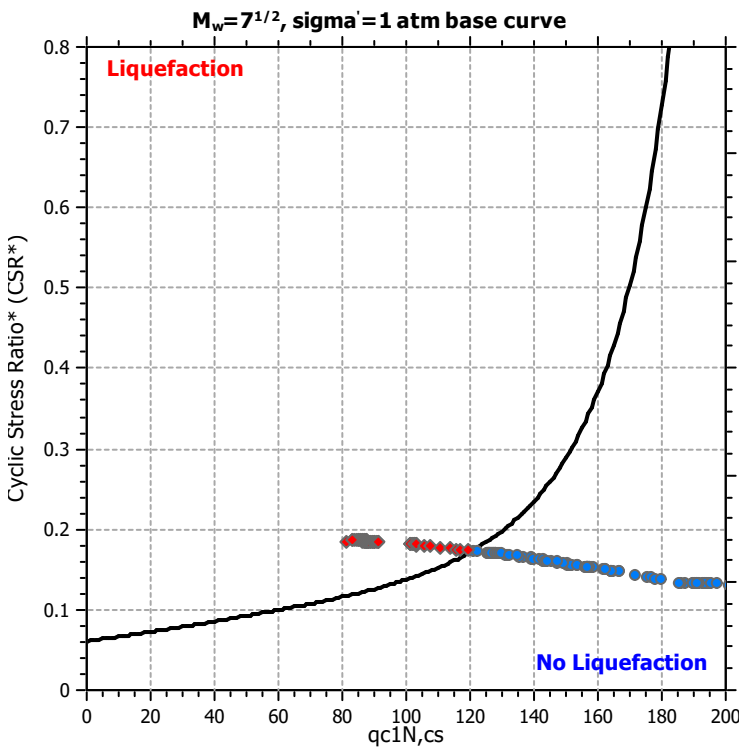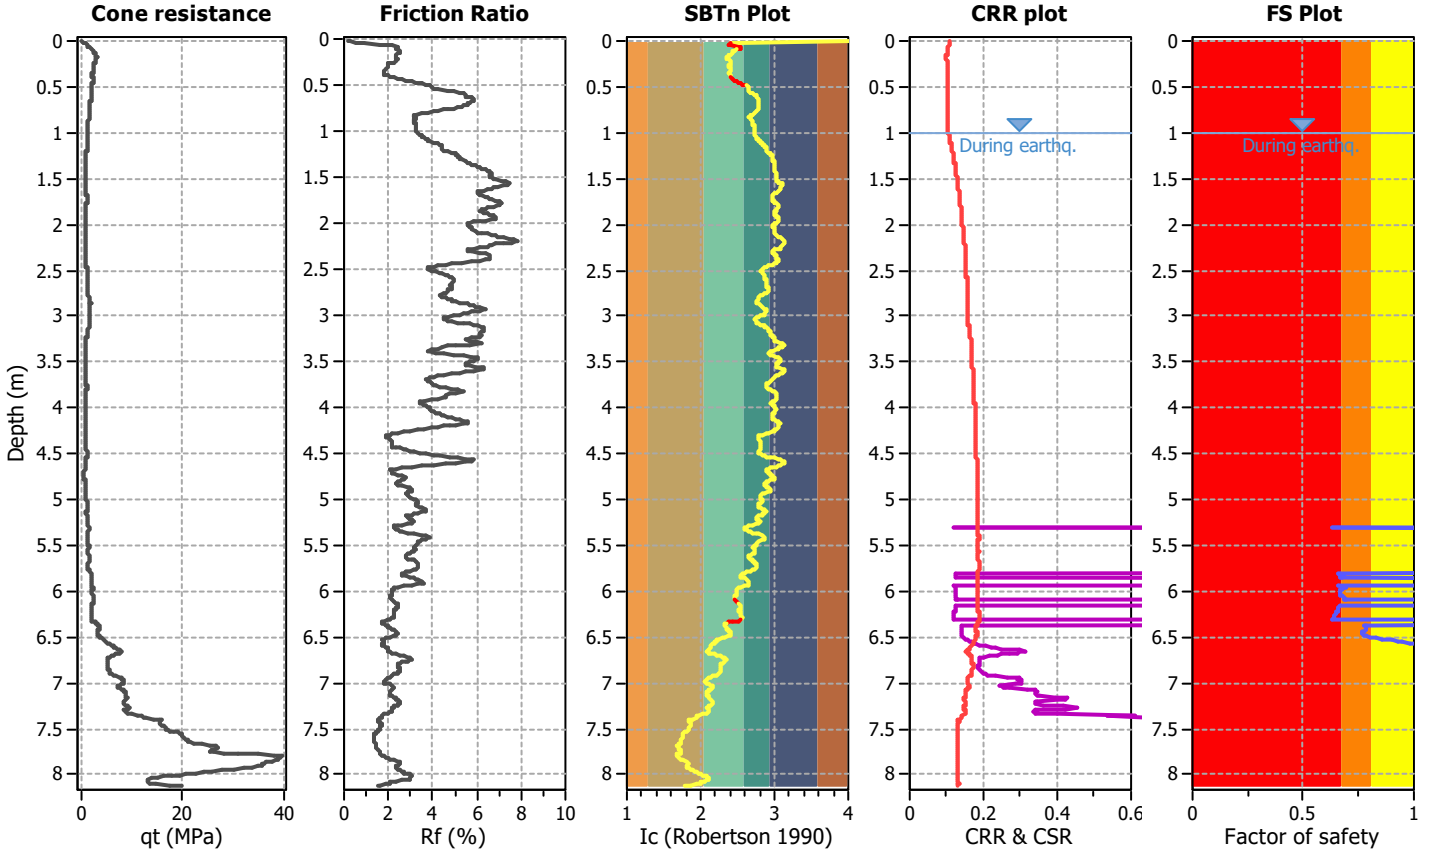

CPT basic interpretation plots

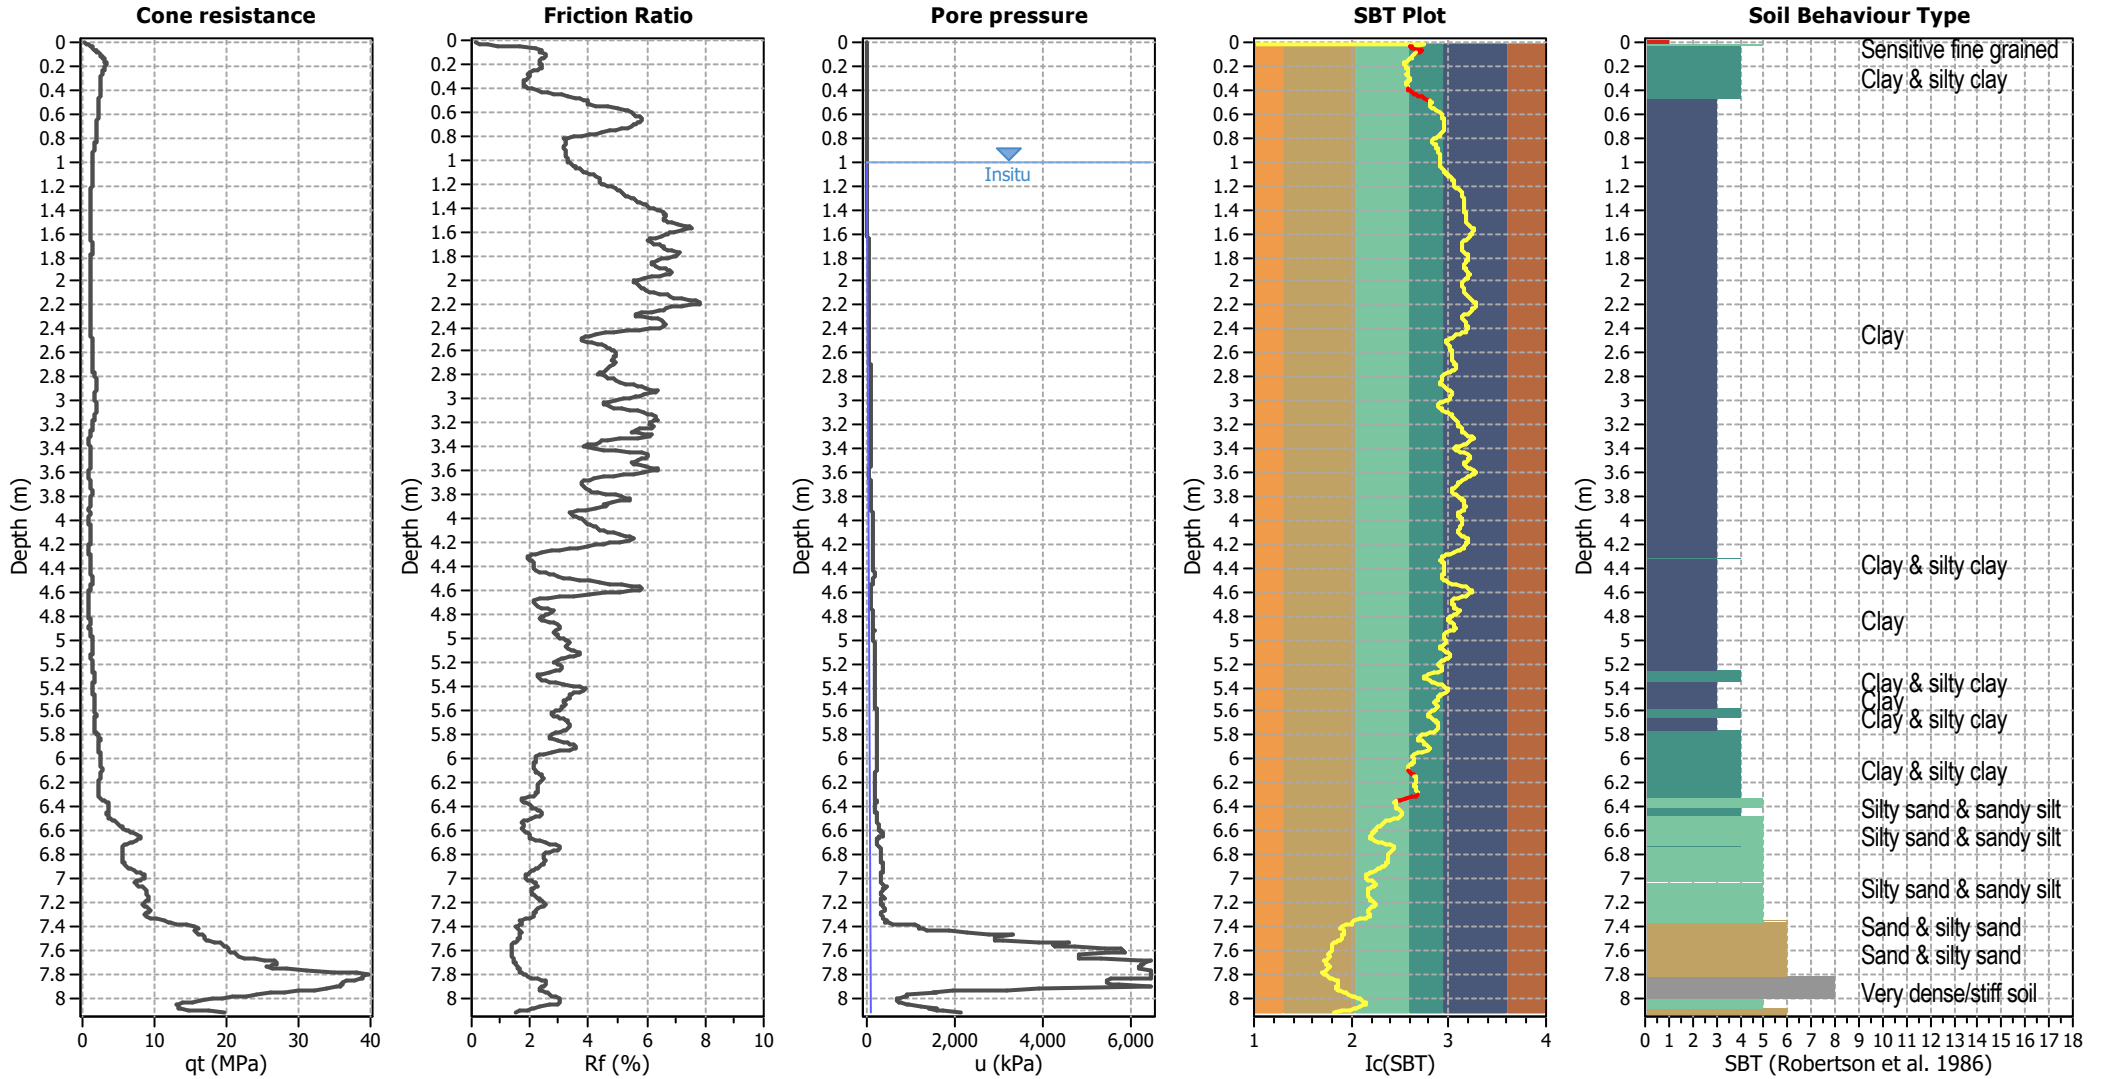


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

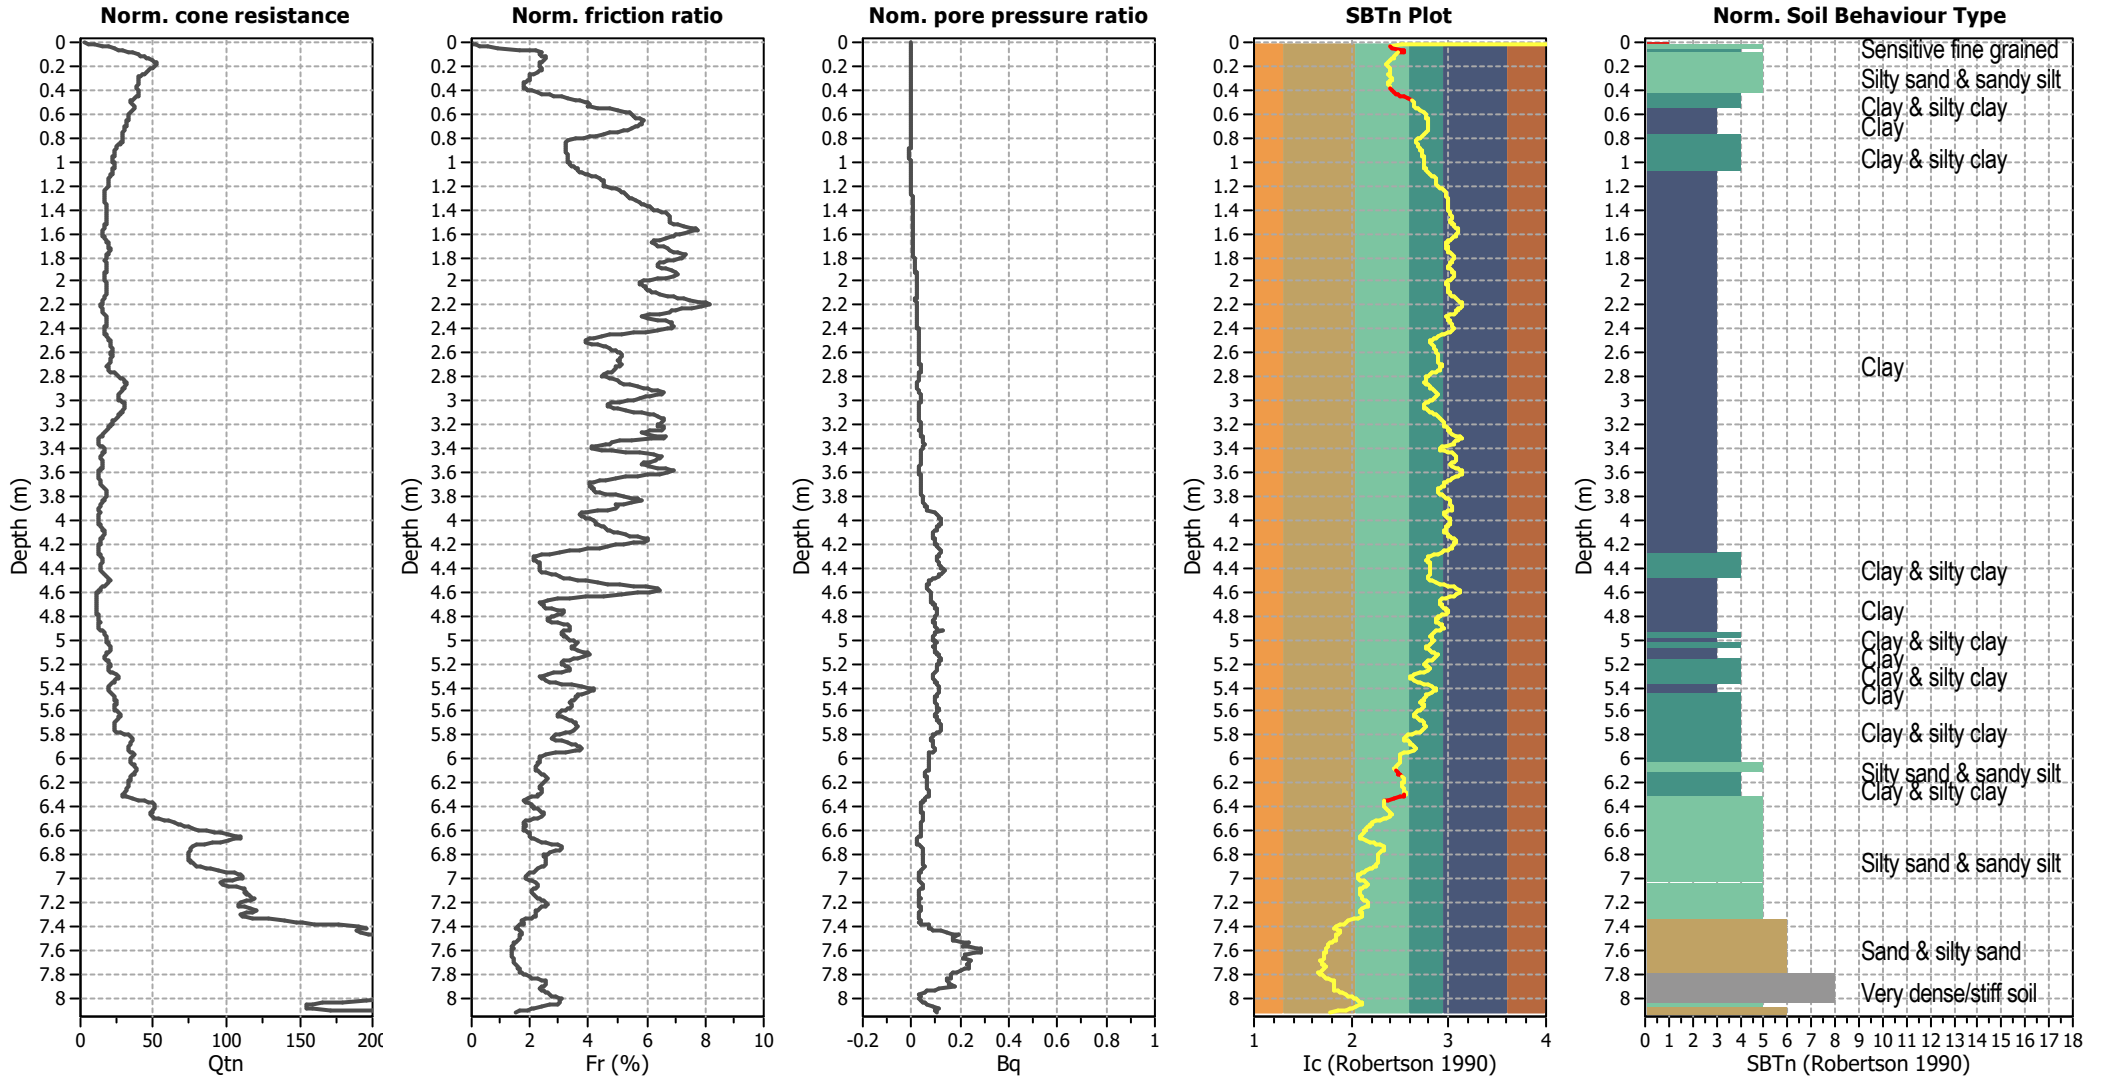


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

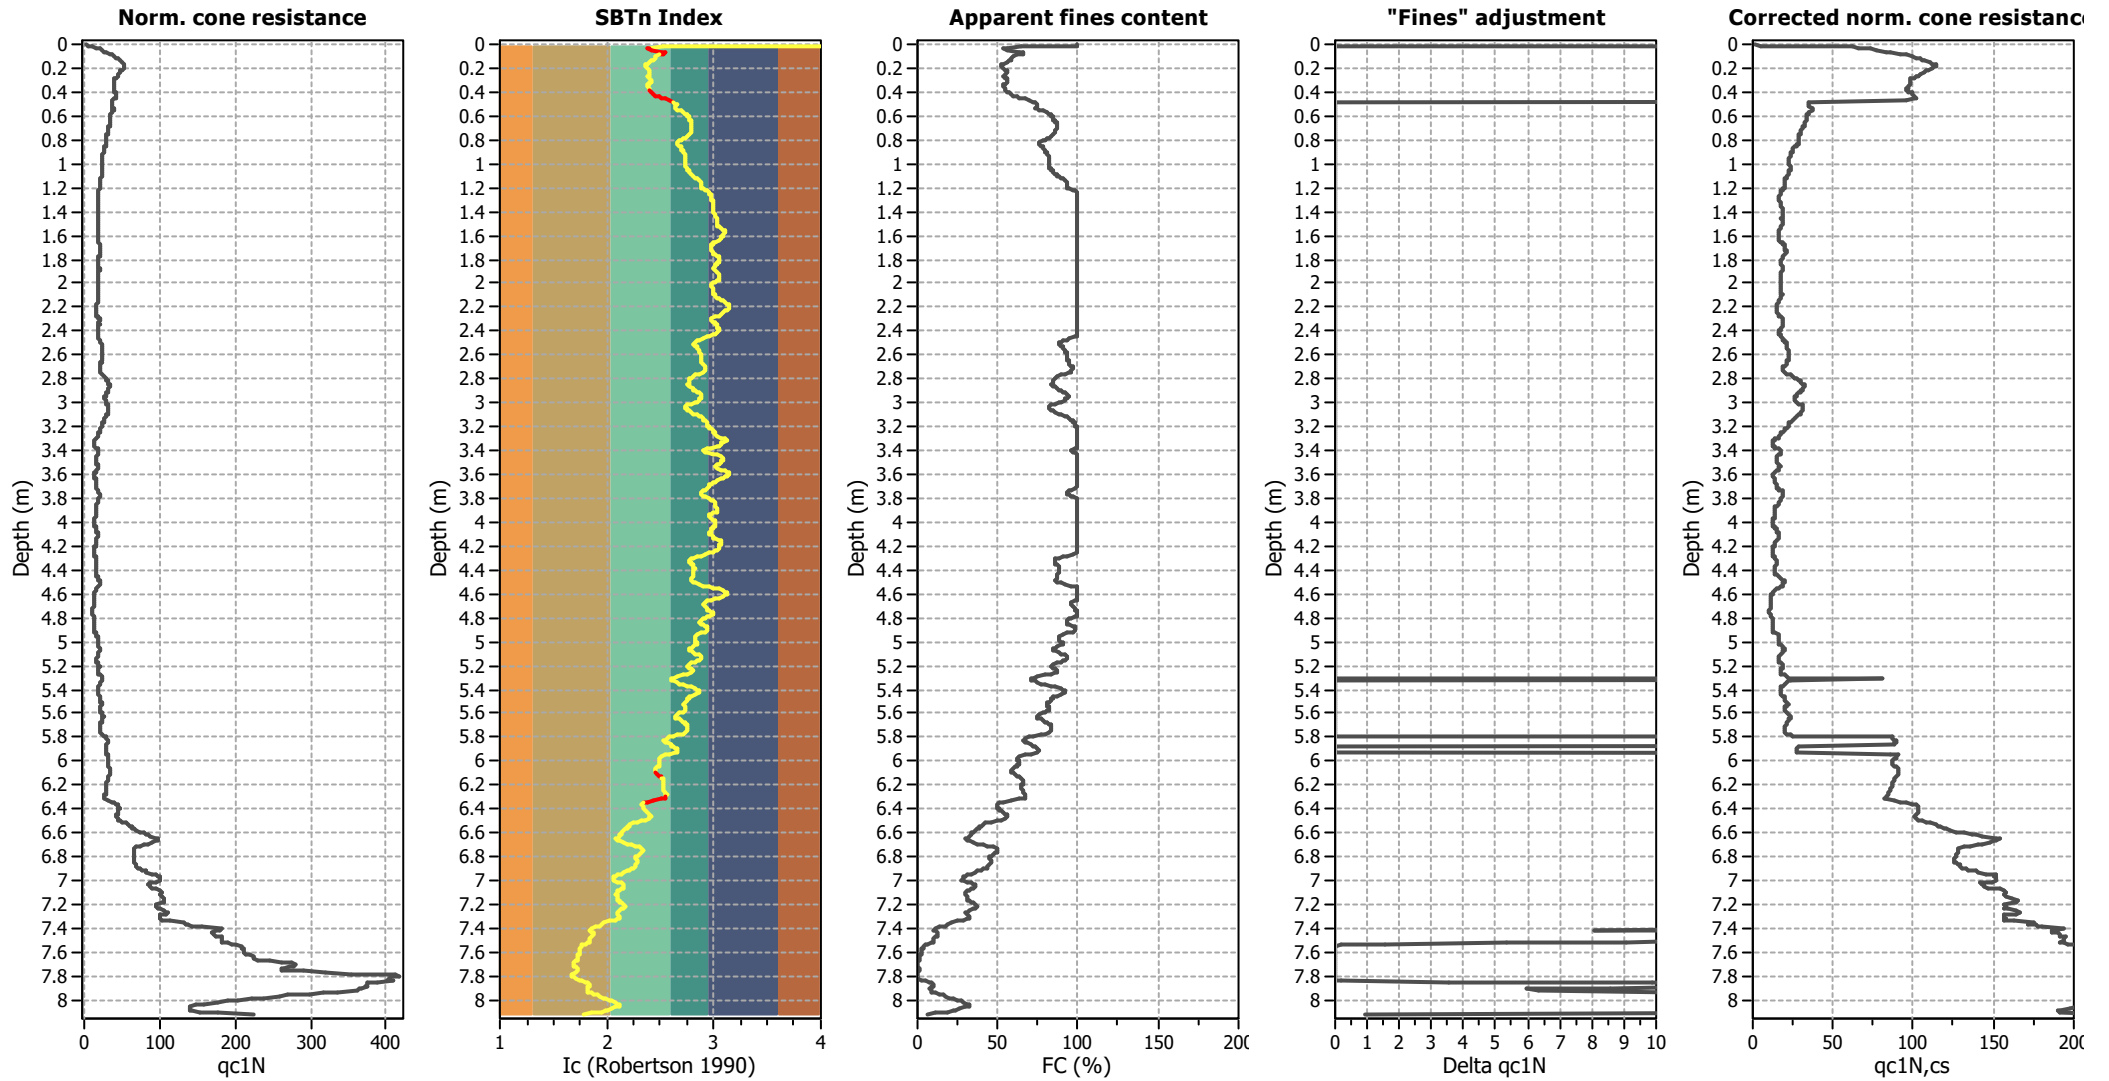

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

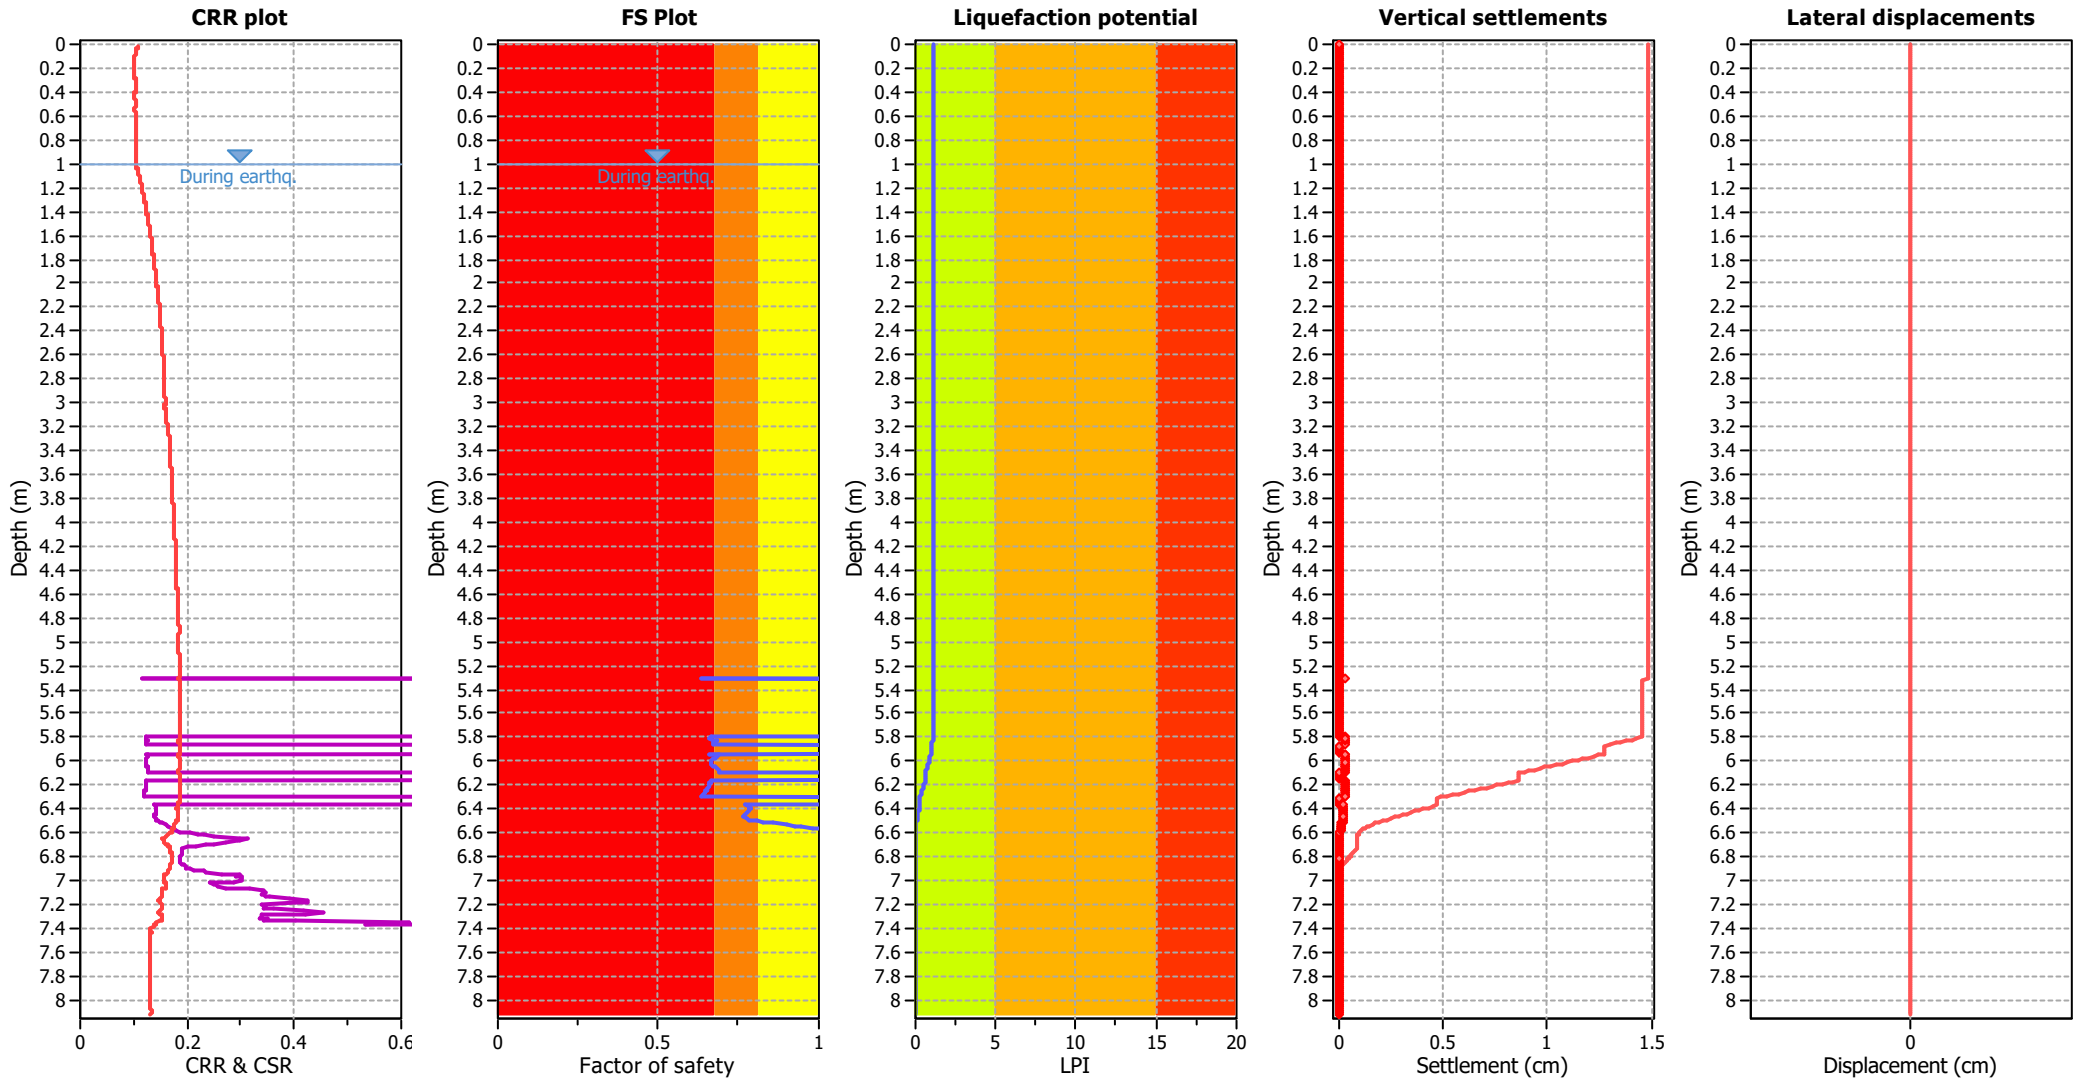

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

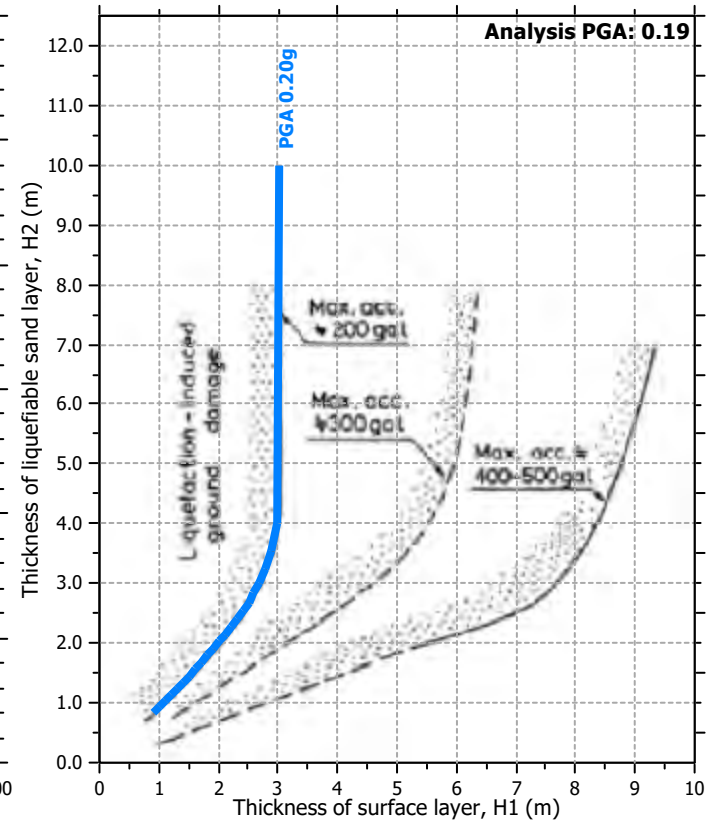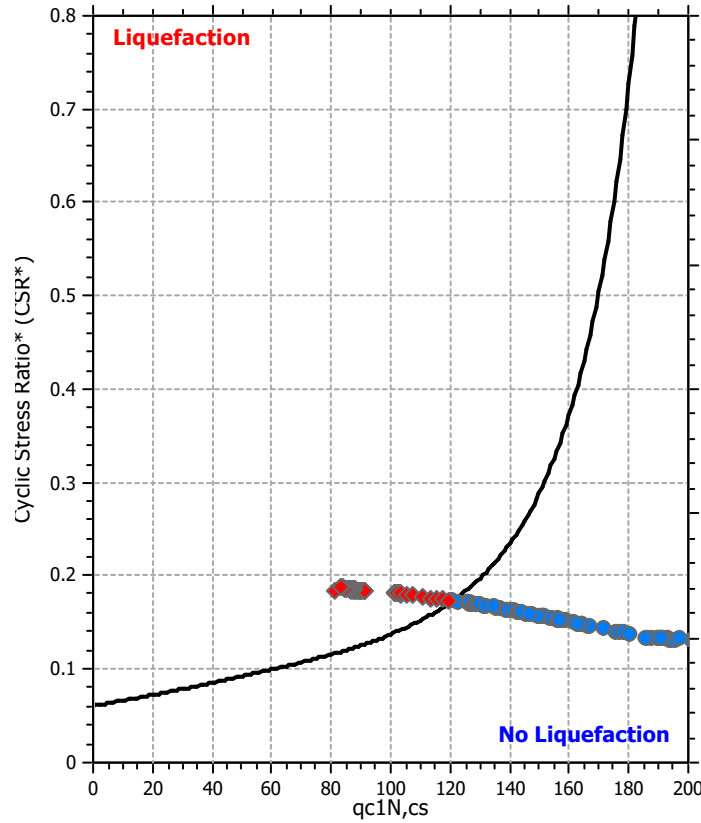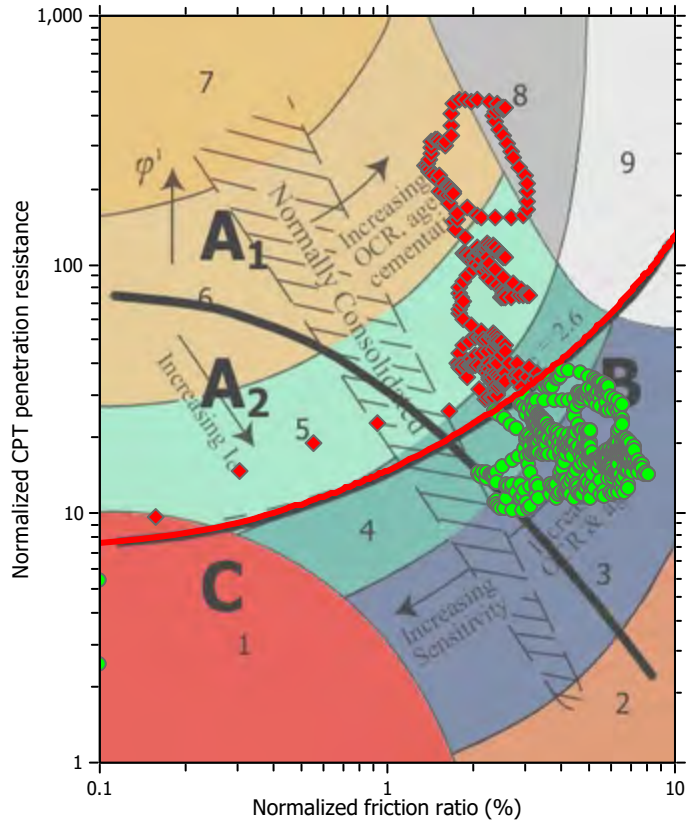

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

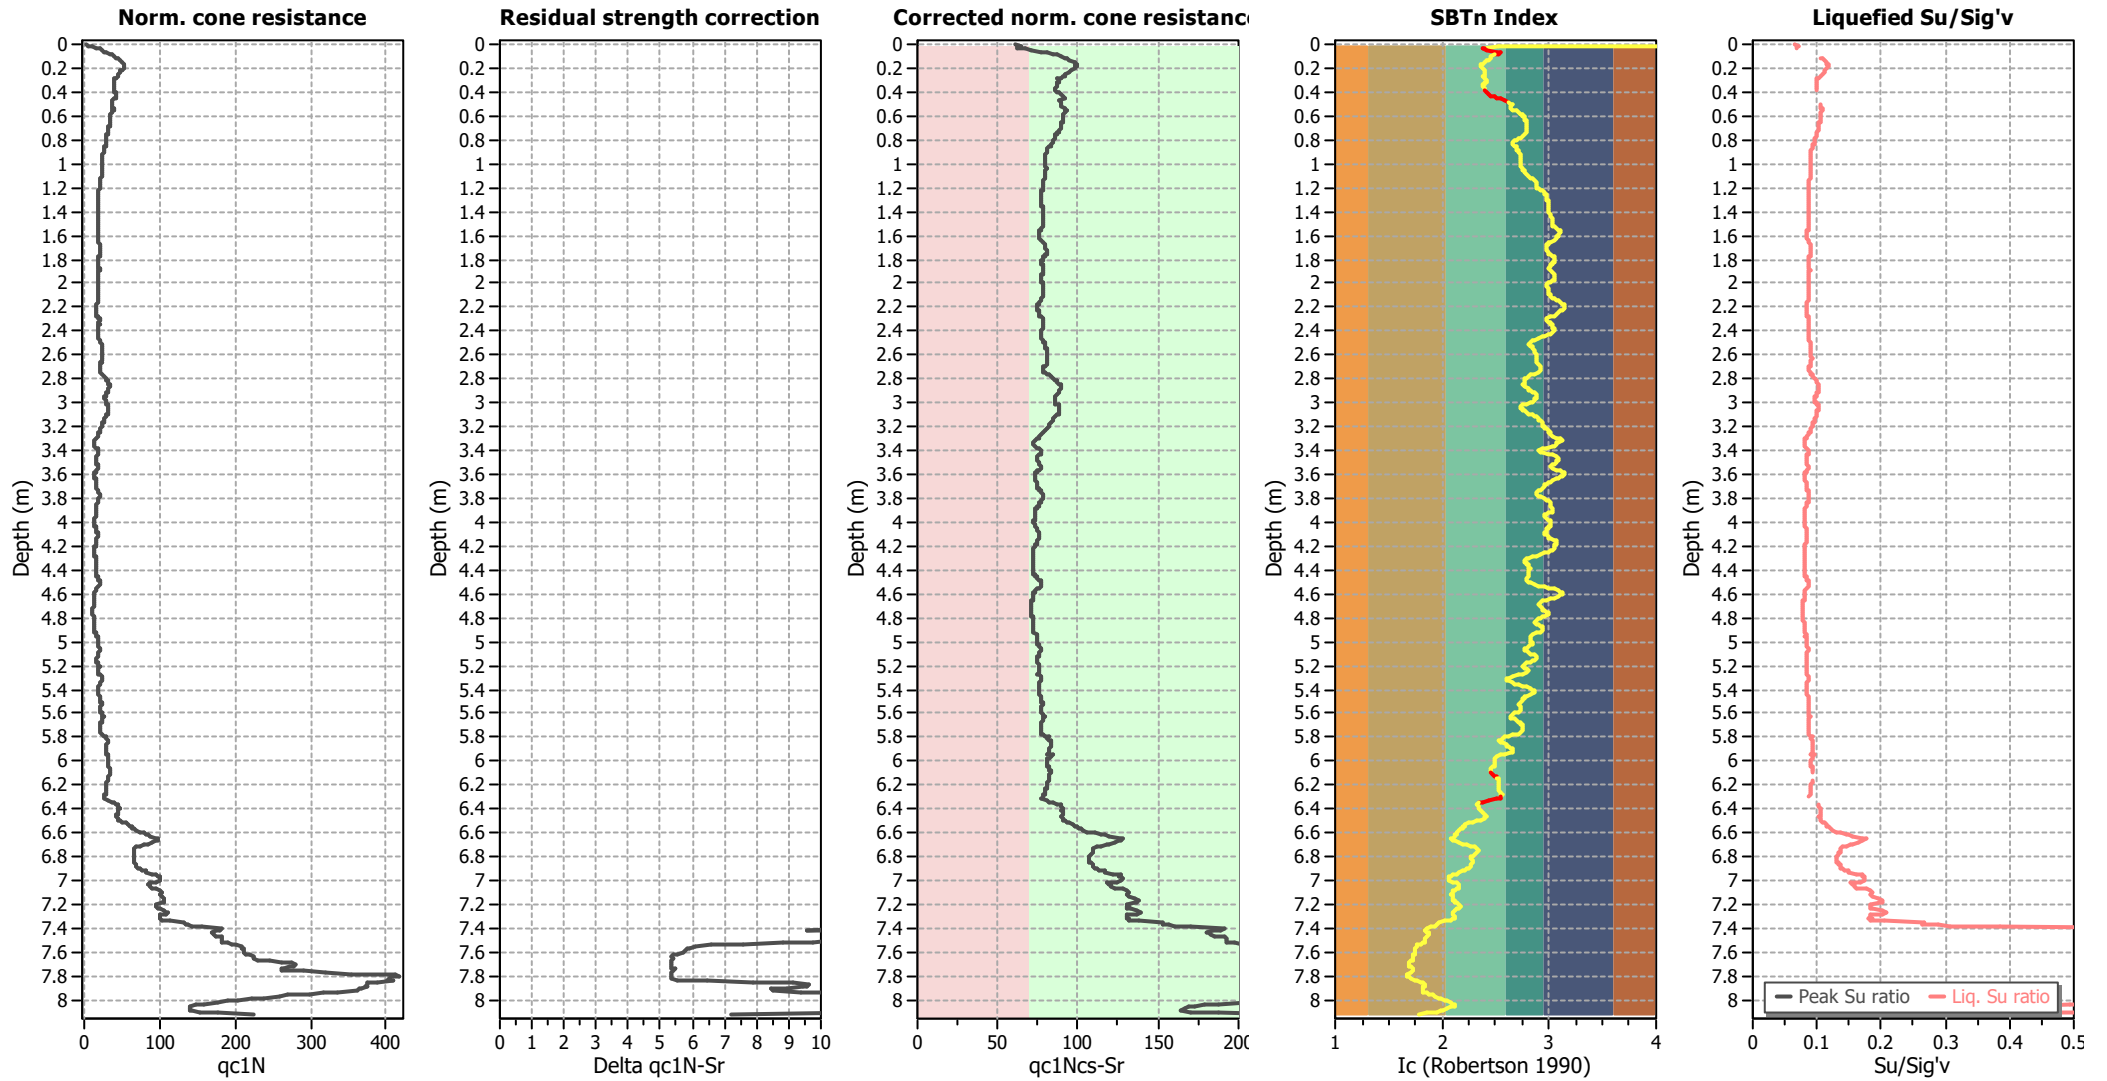

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

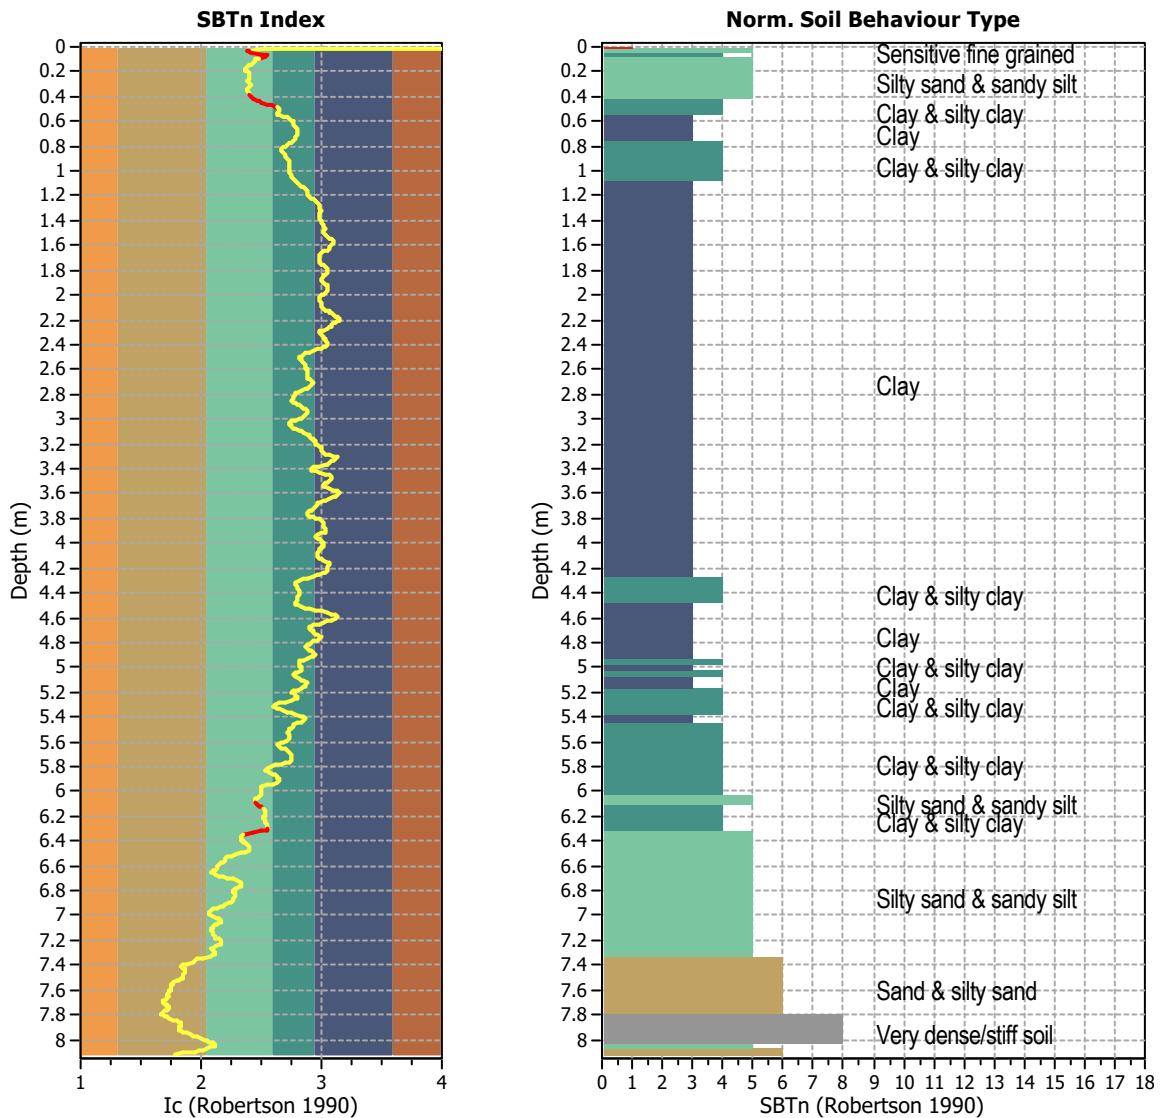


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 813
 Total points excluded: 31
 Exclusion percentage: 3.81%
 Number of layers detected: 5


Estimation of post-earthquake settlements

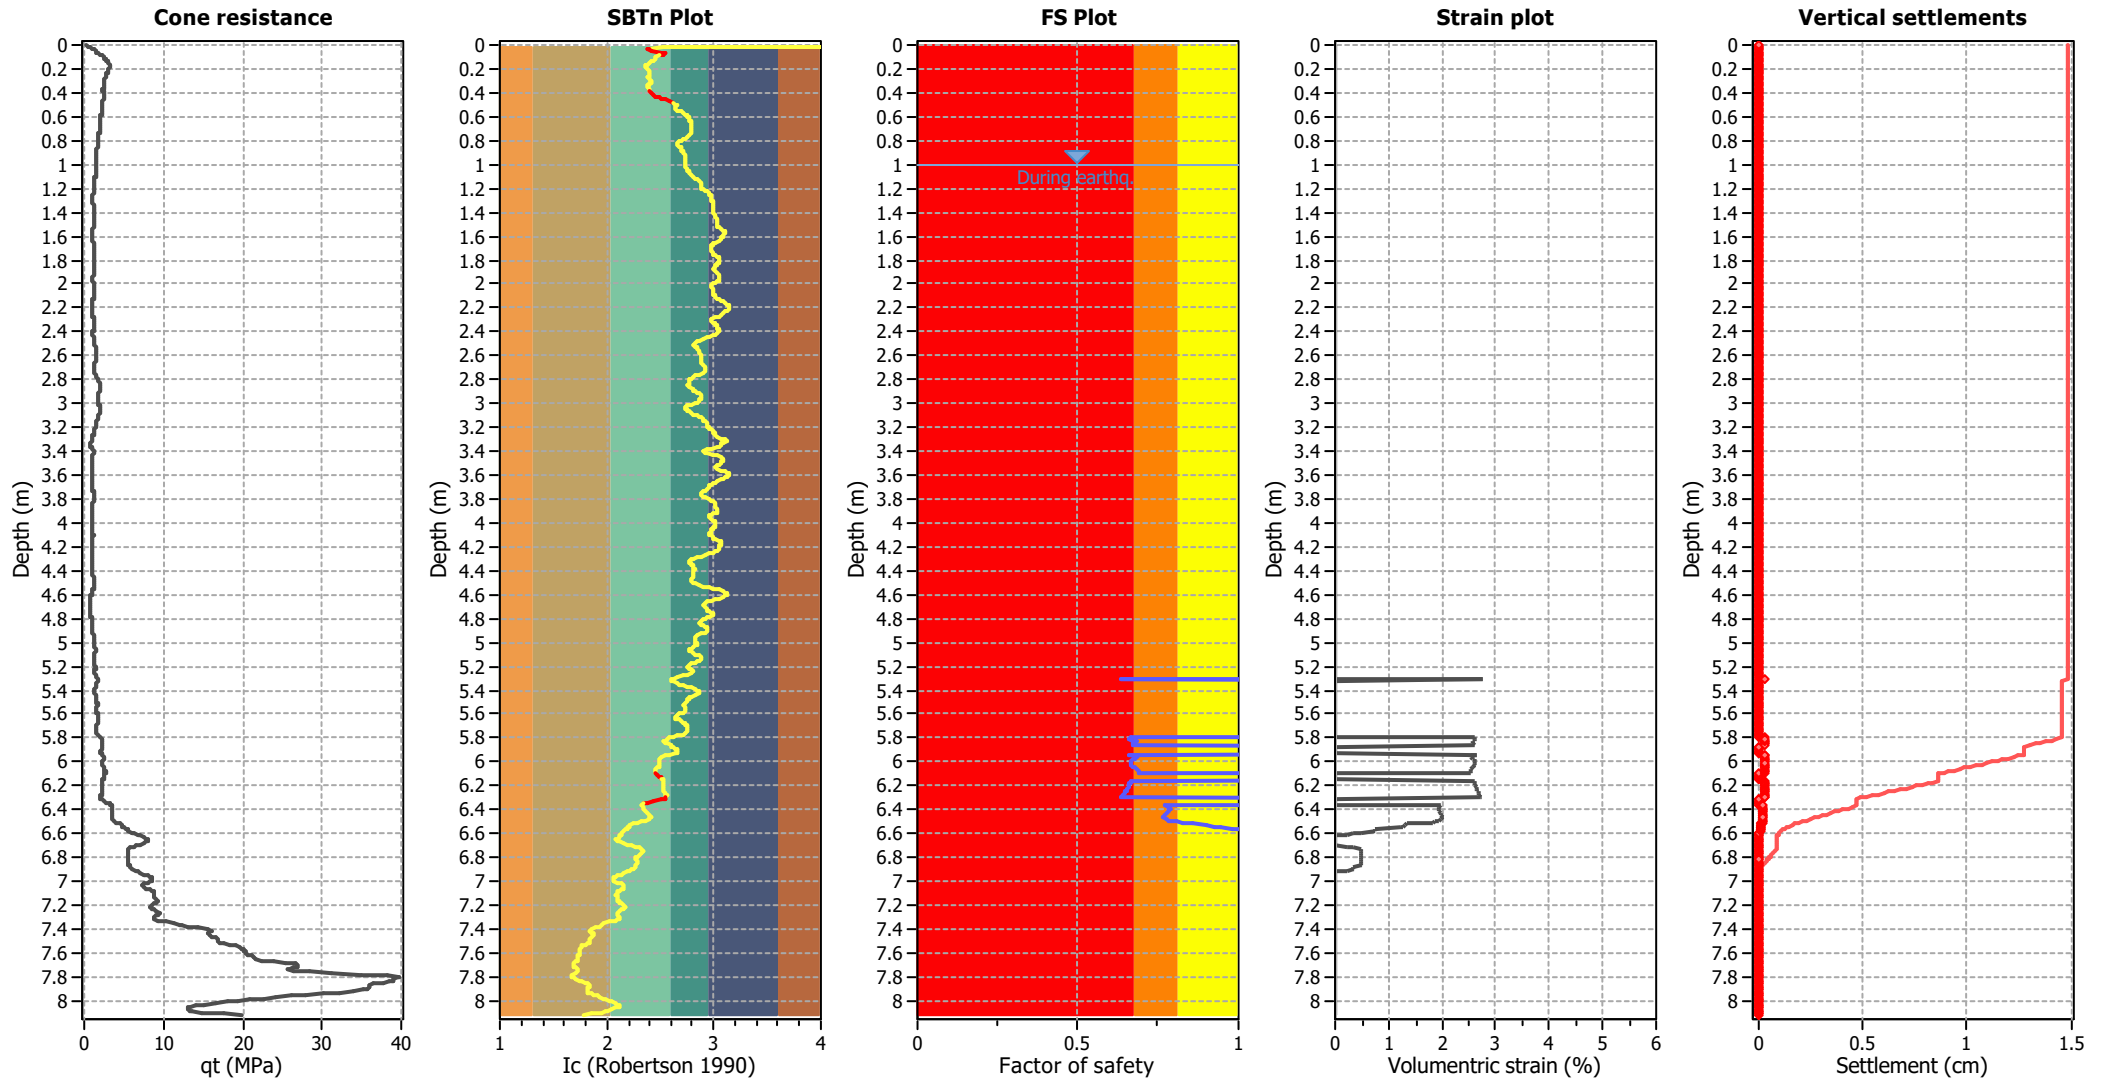

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

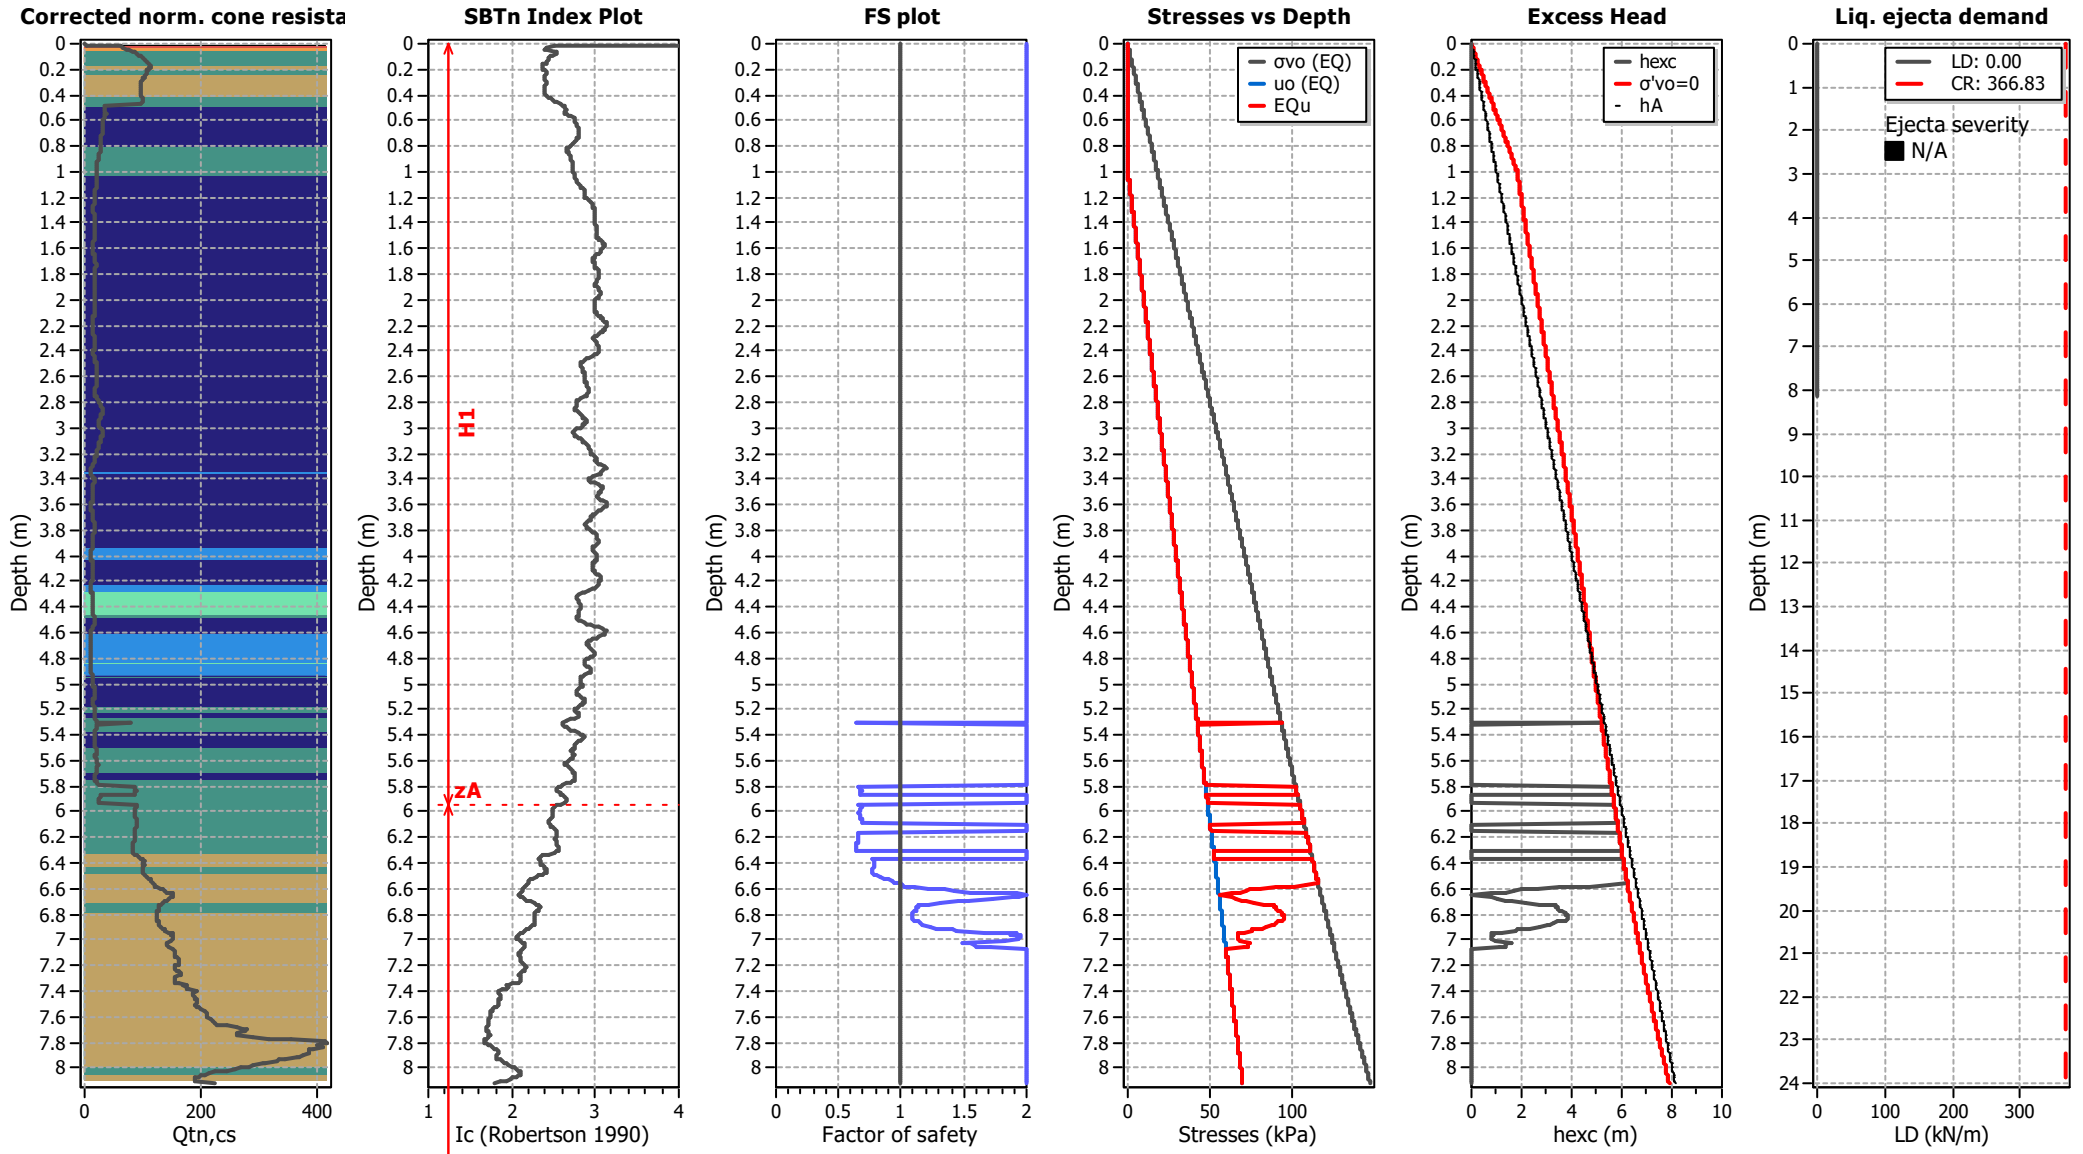

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT09

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

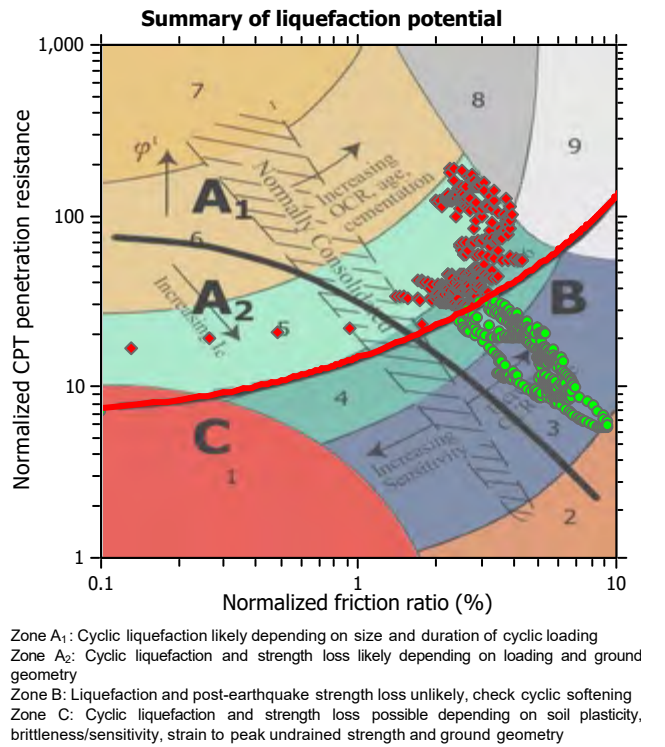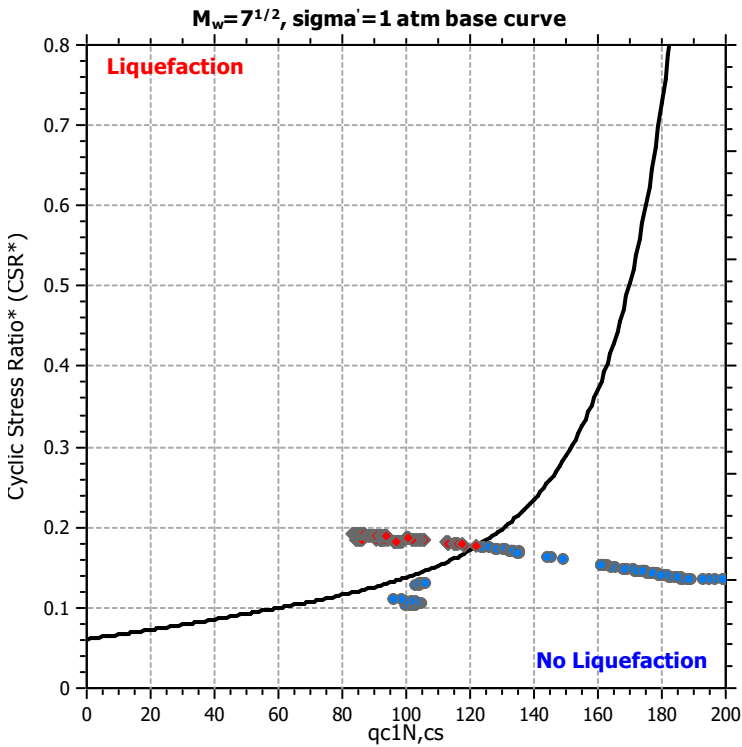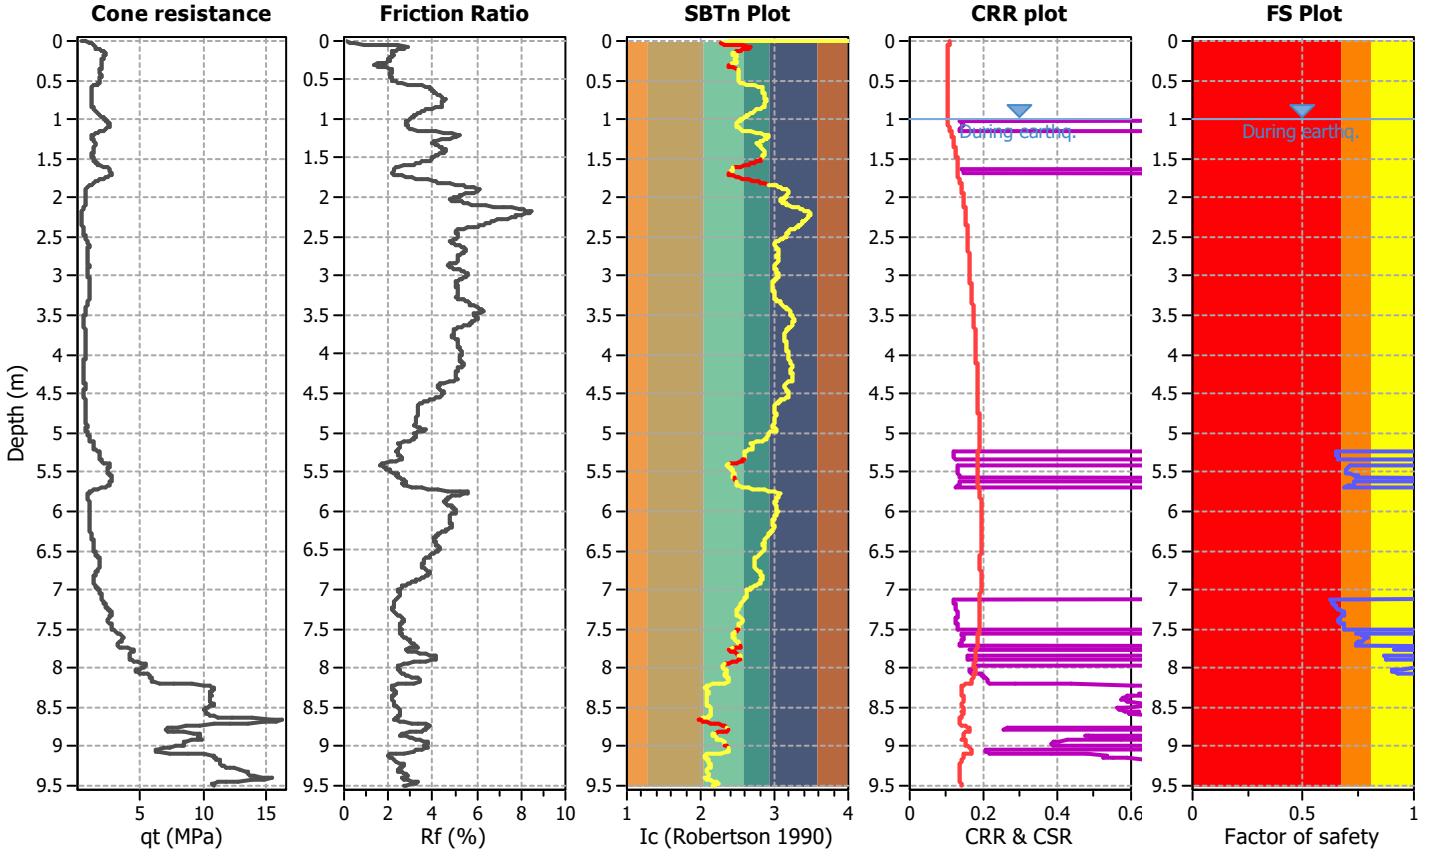

CPT basic interpretation plots

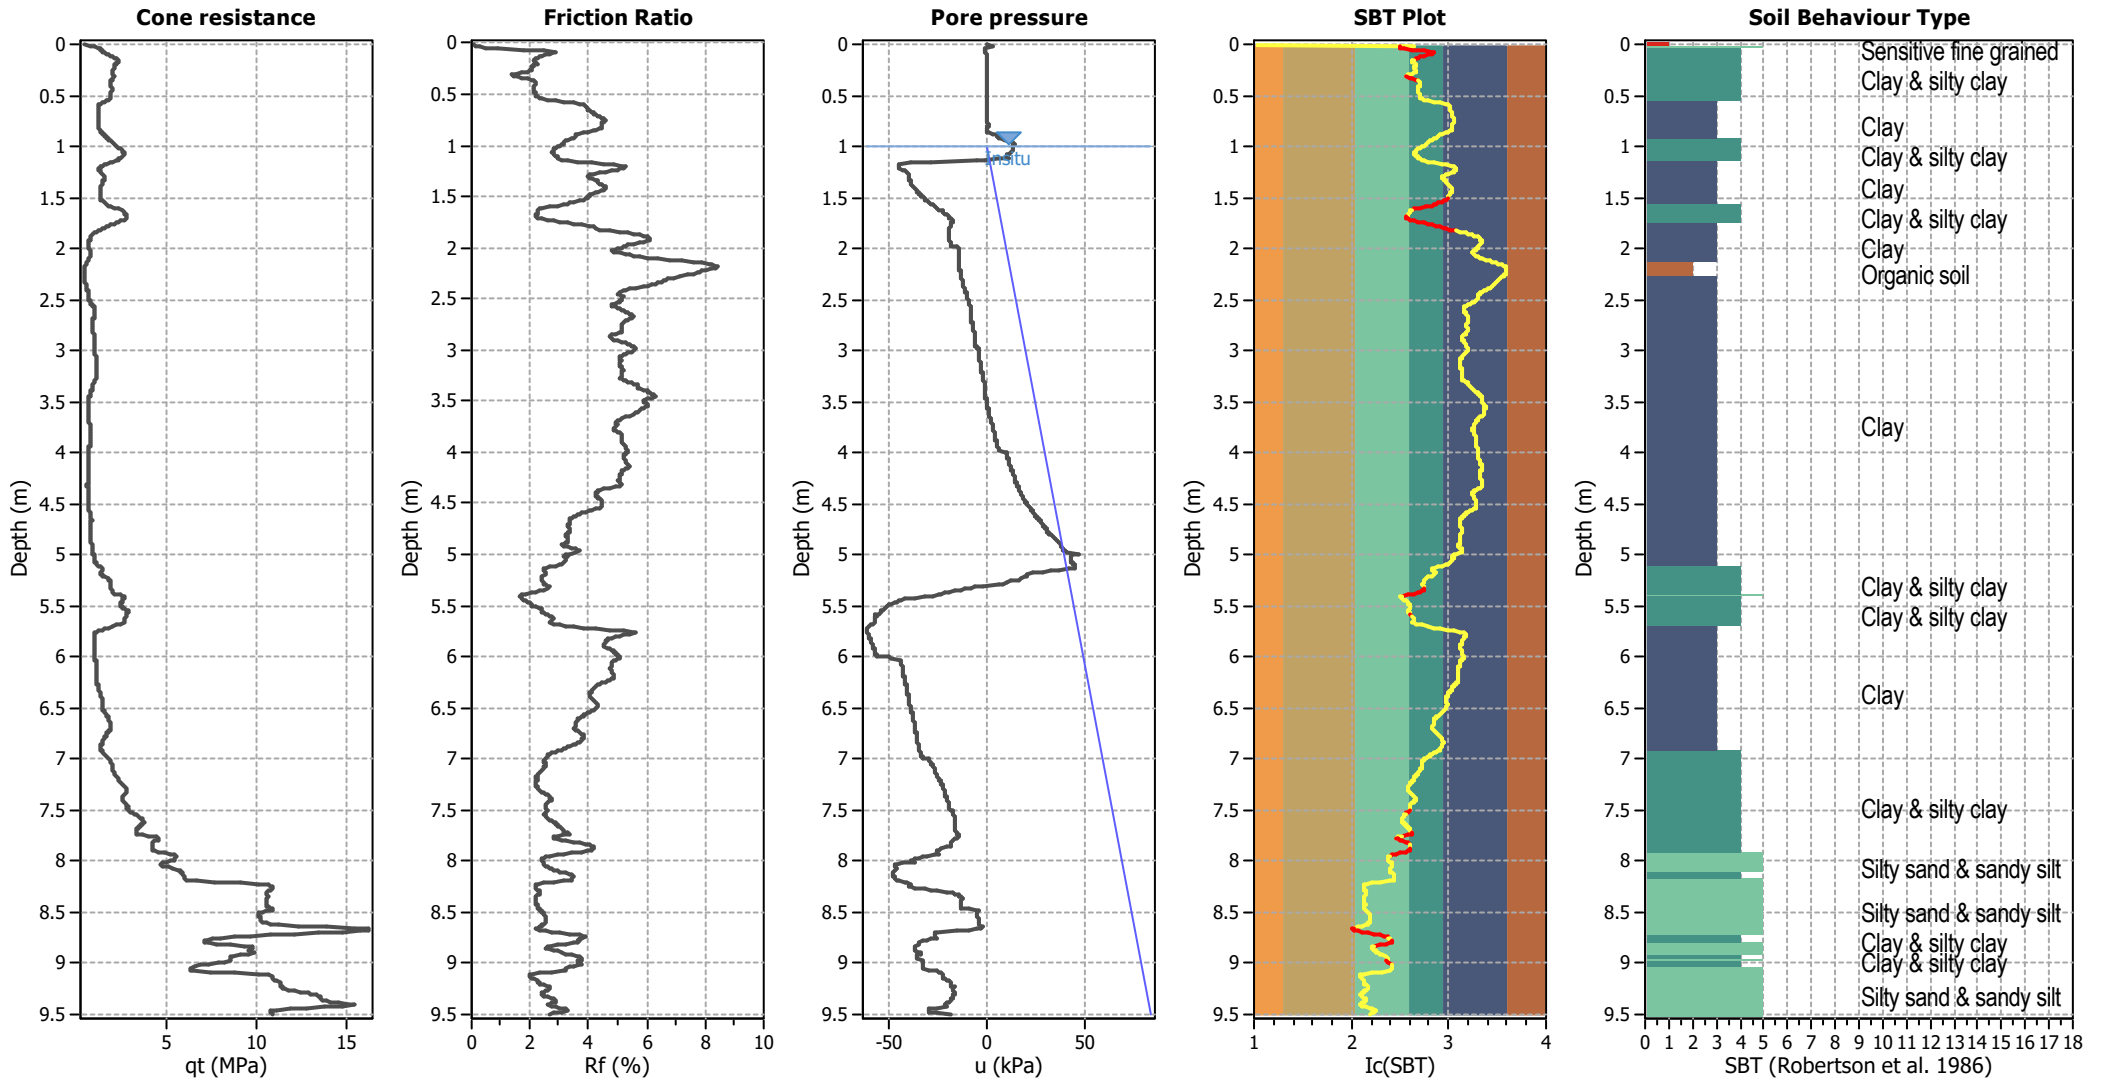


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

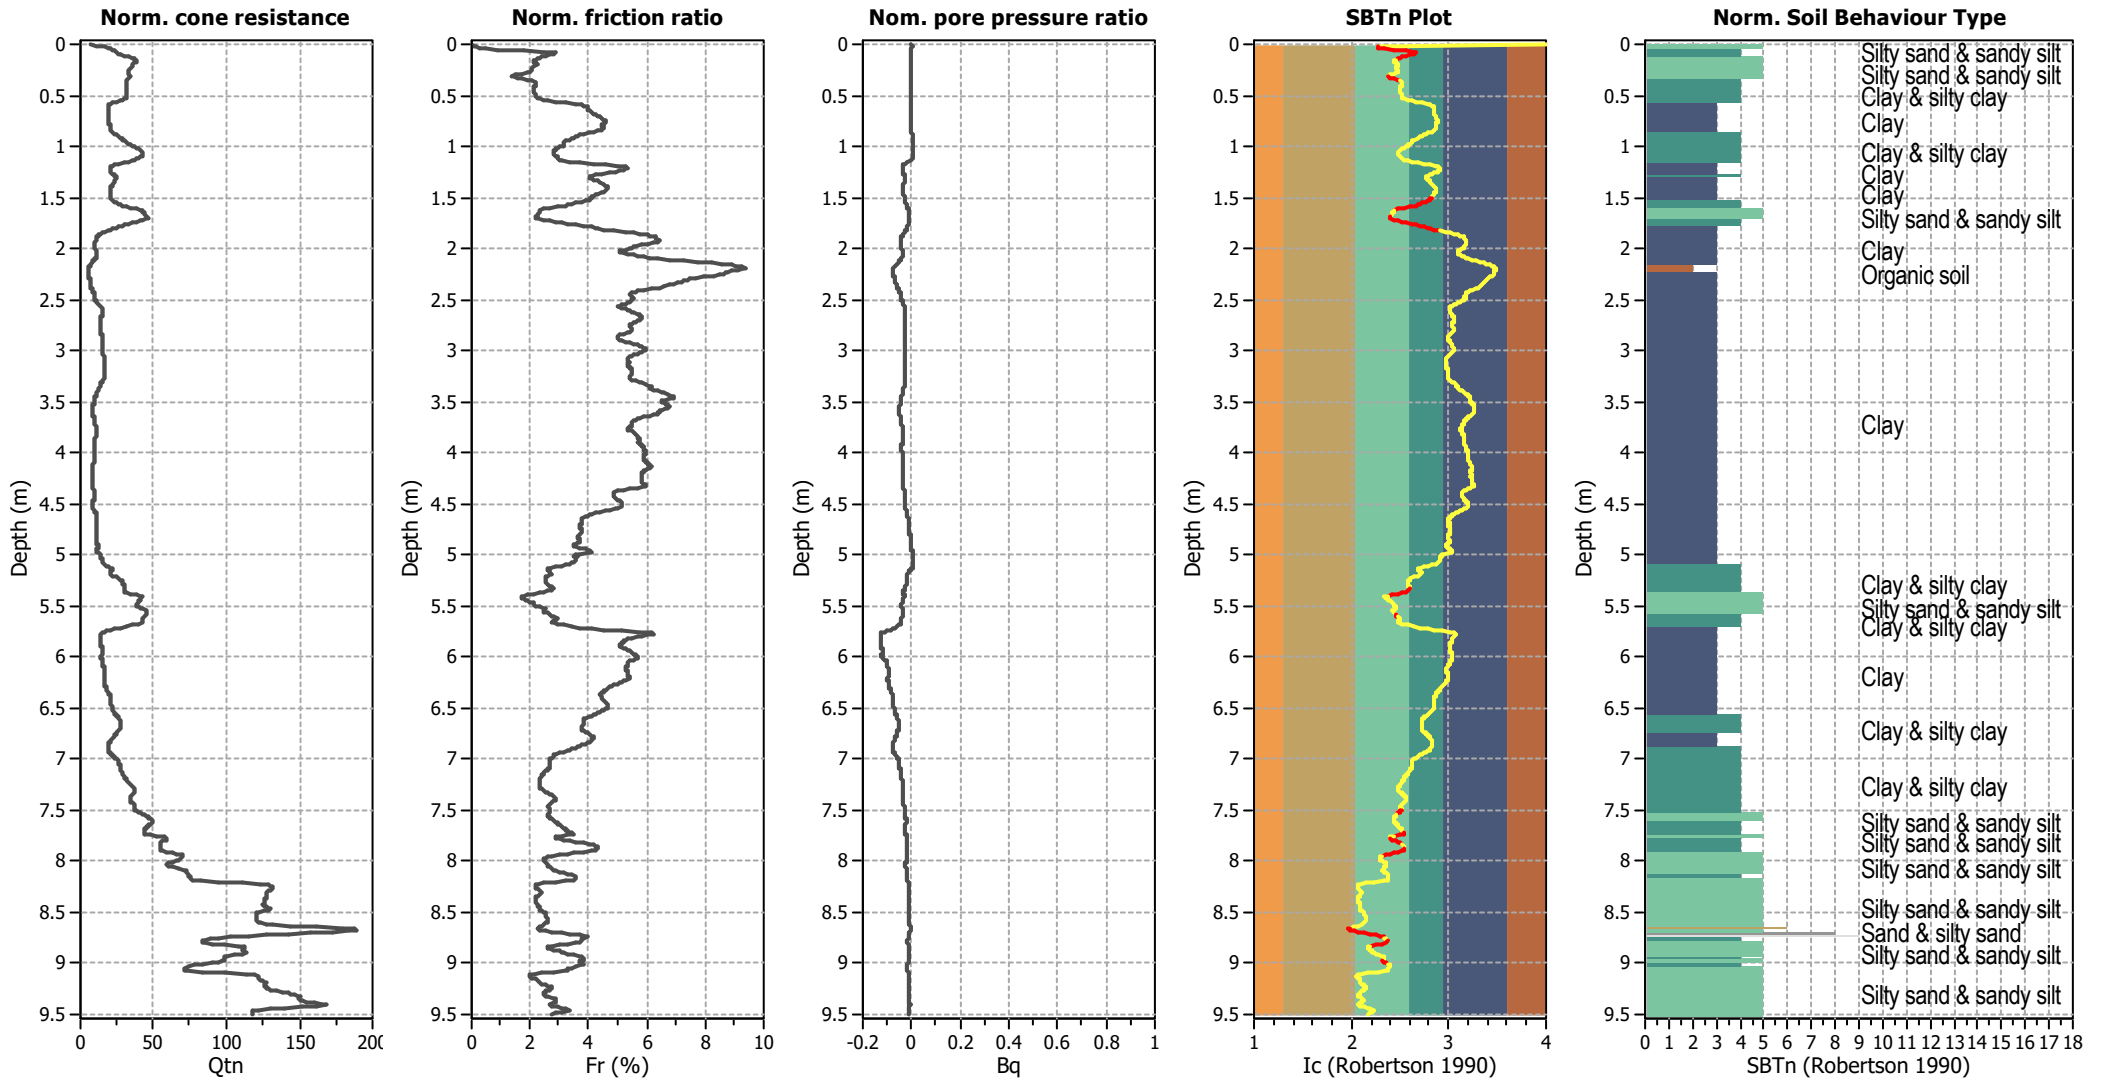


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

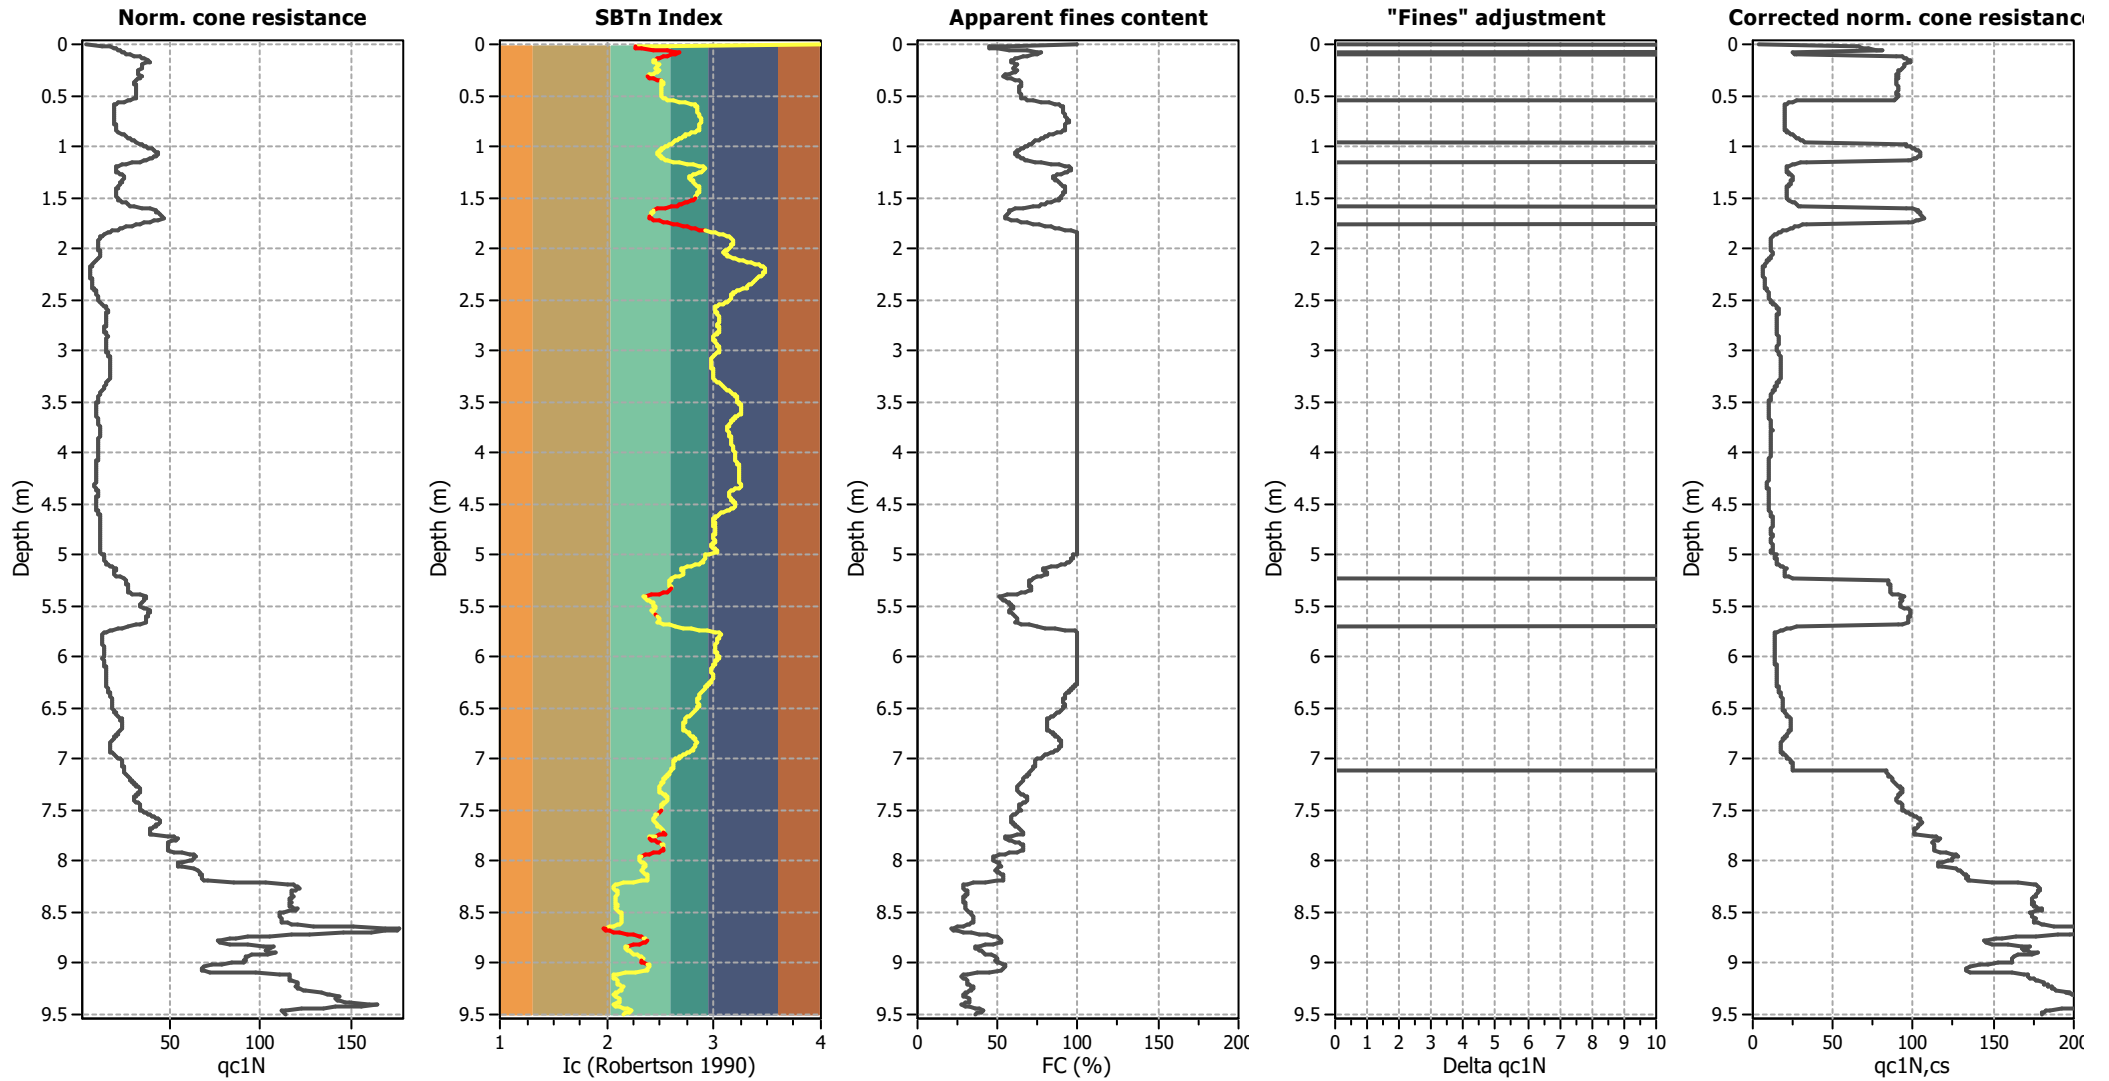

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

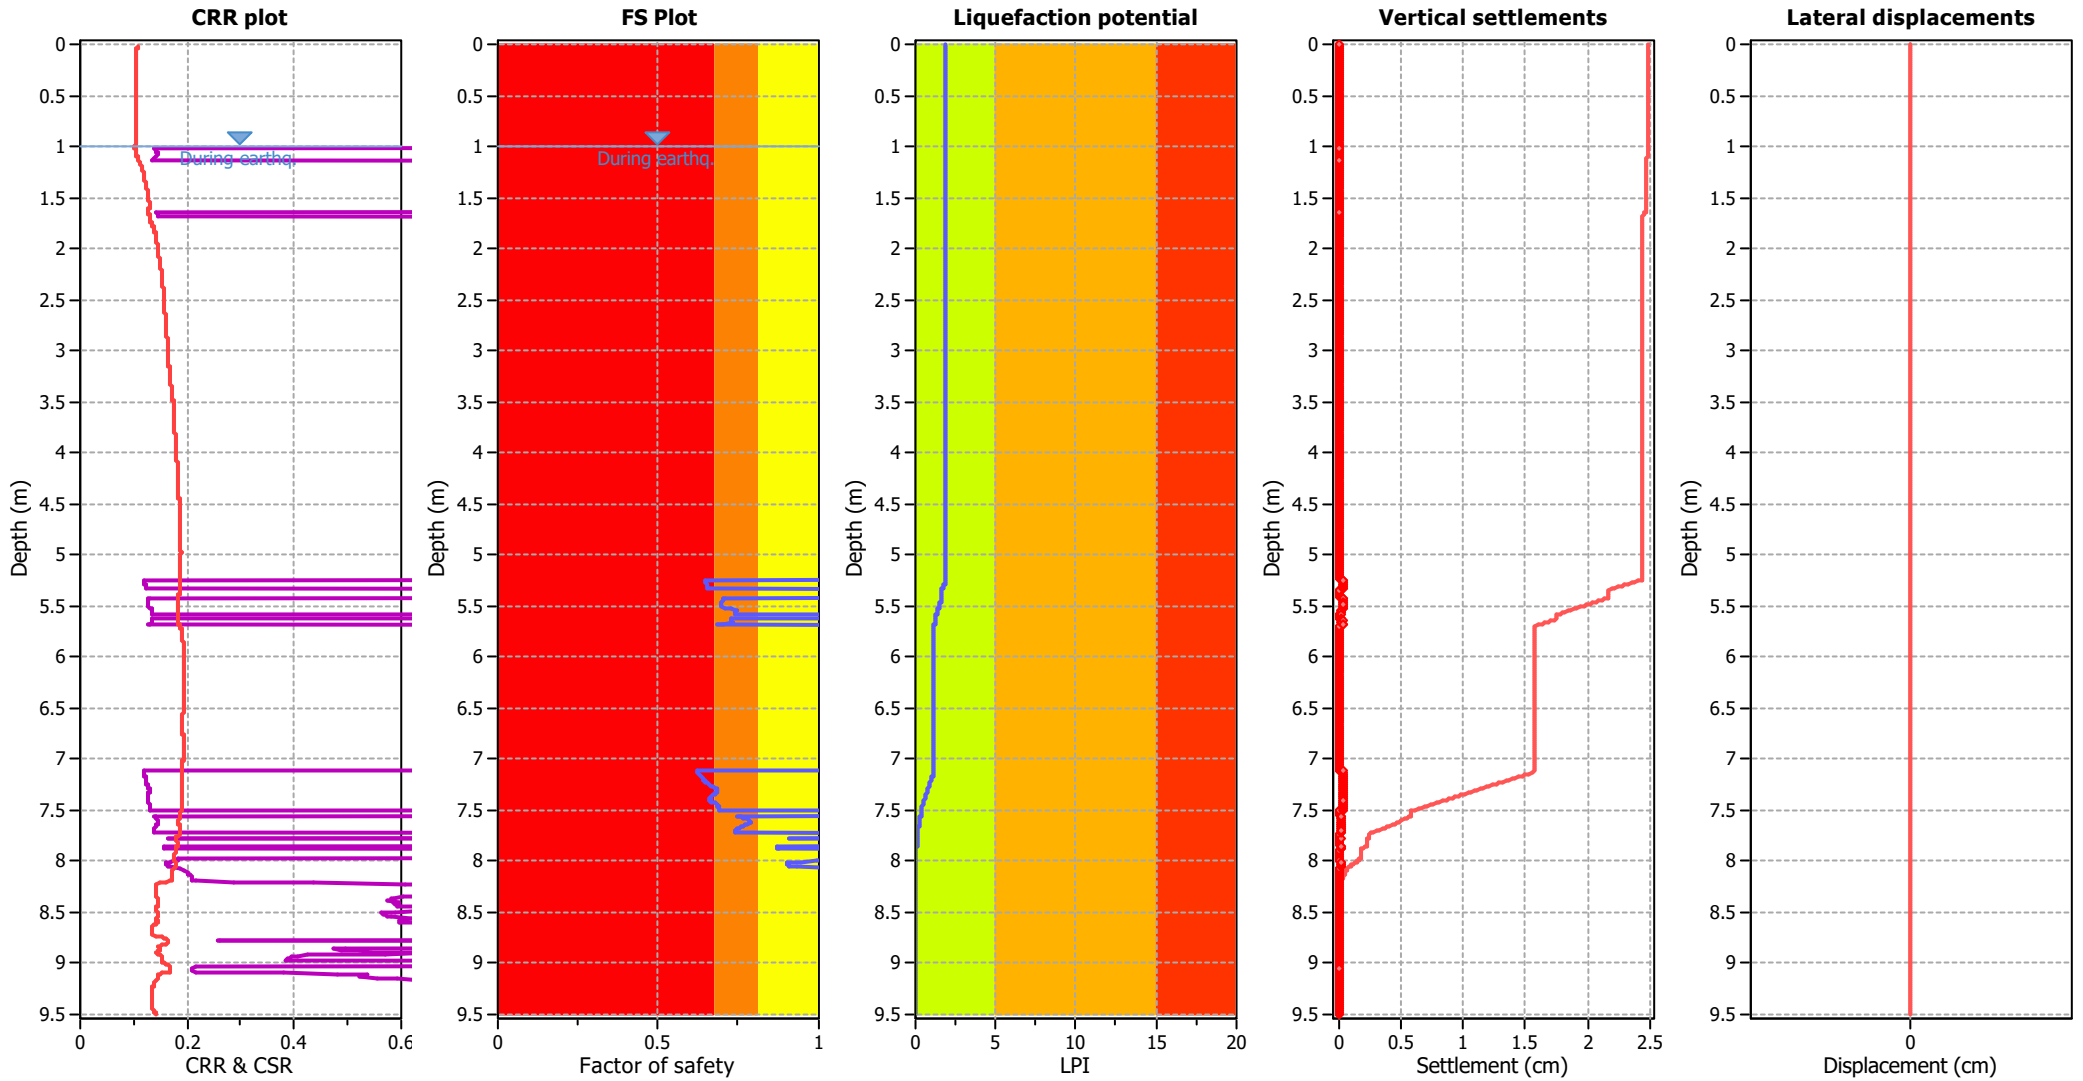

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

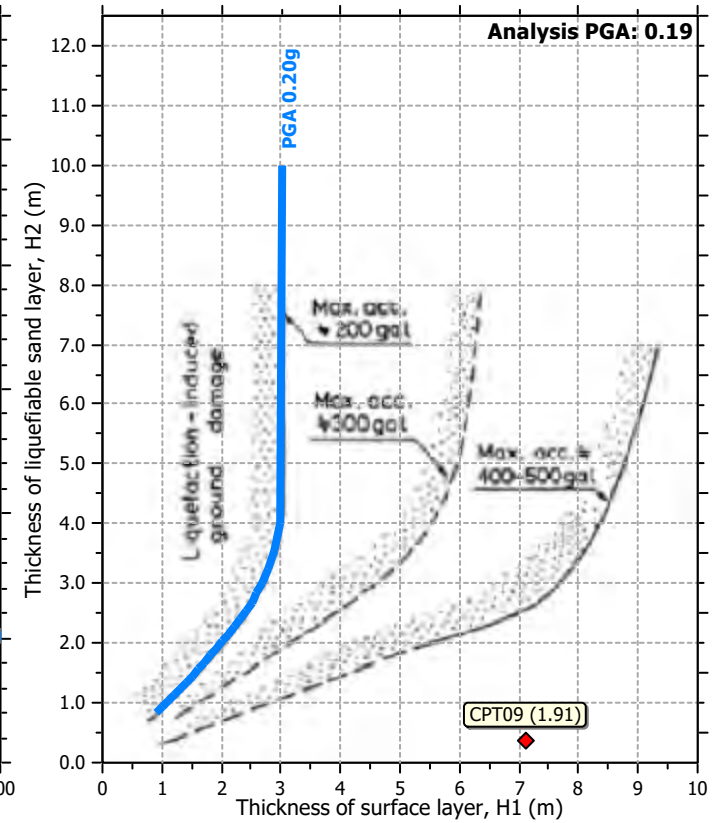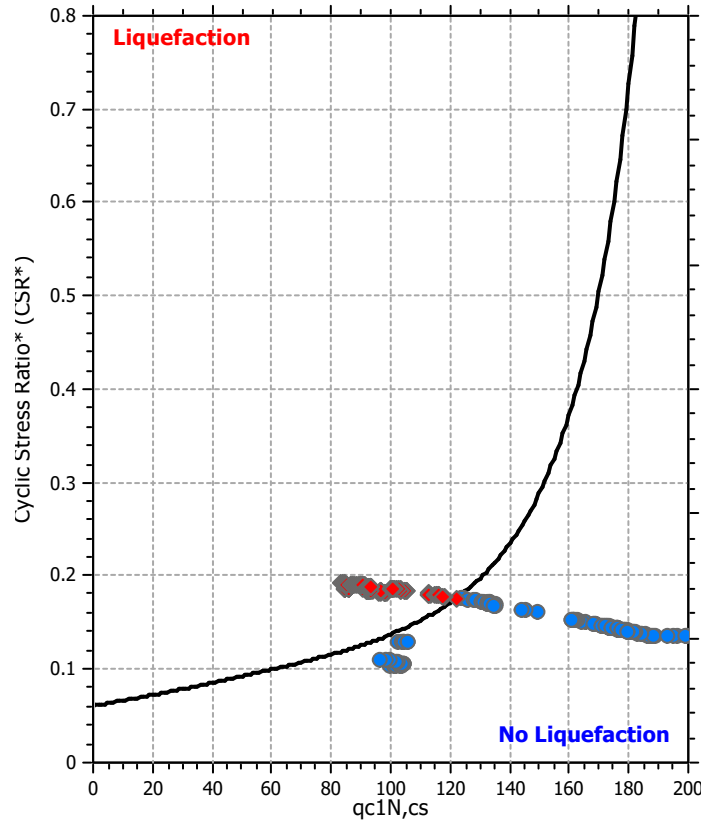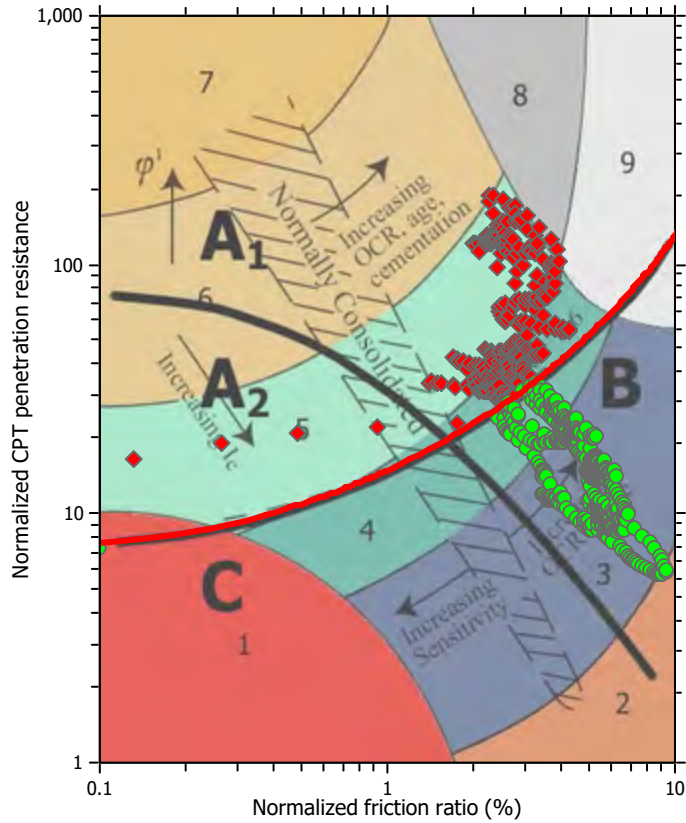

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

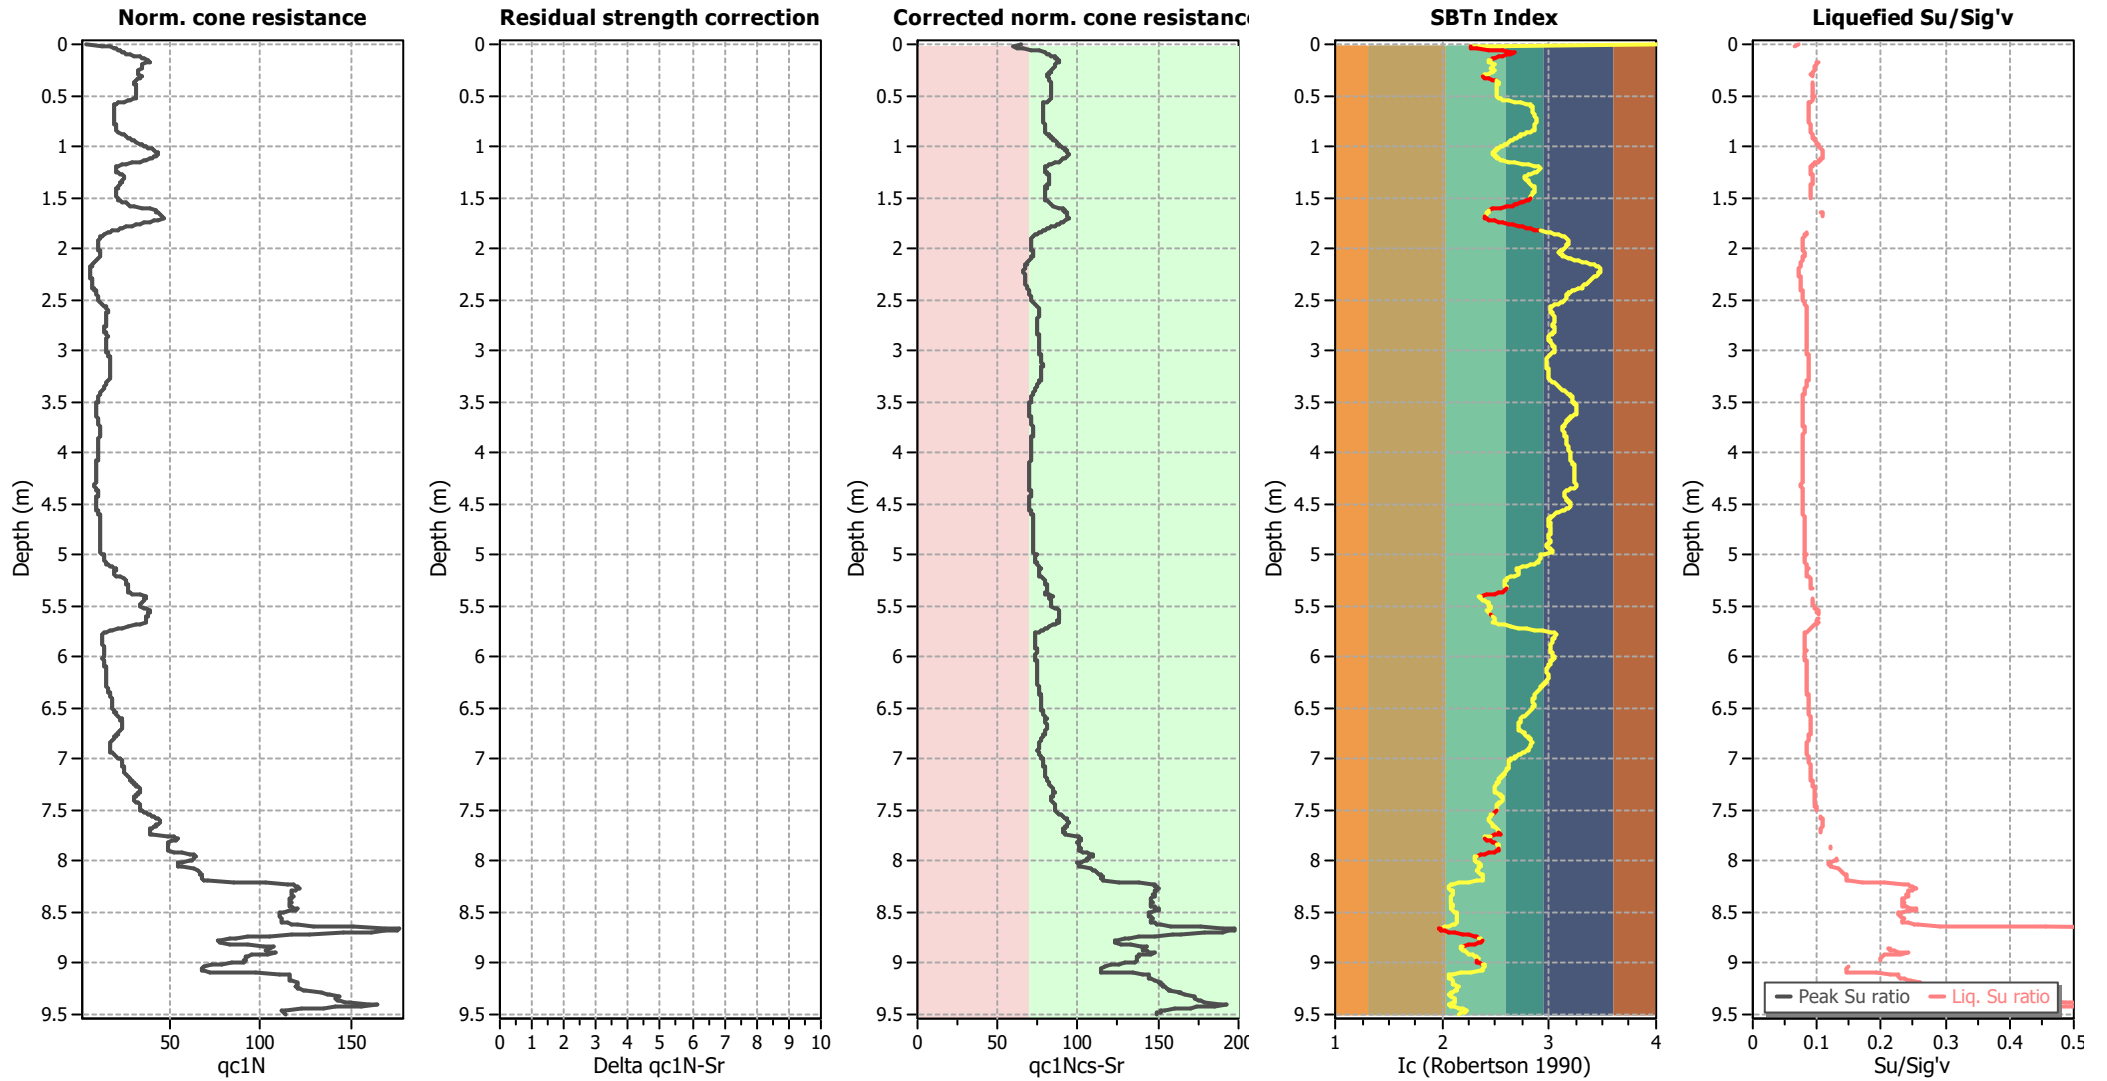

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

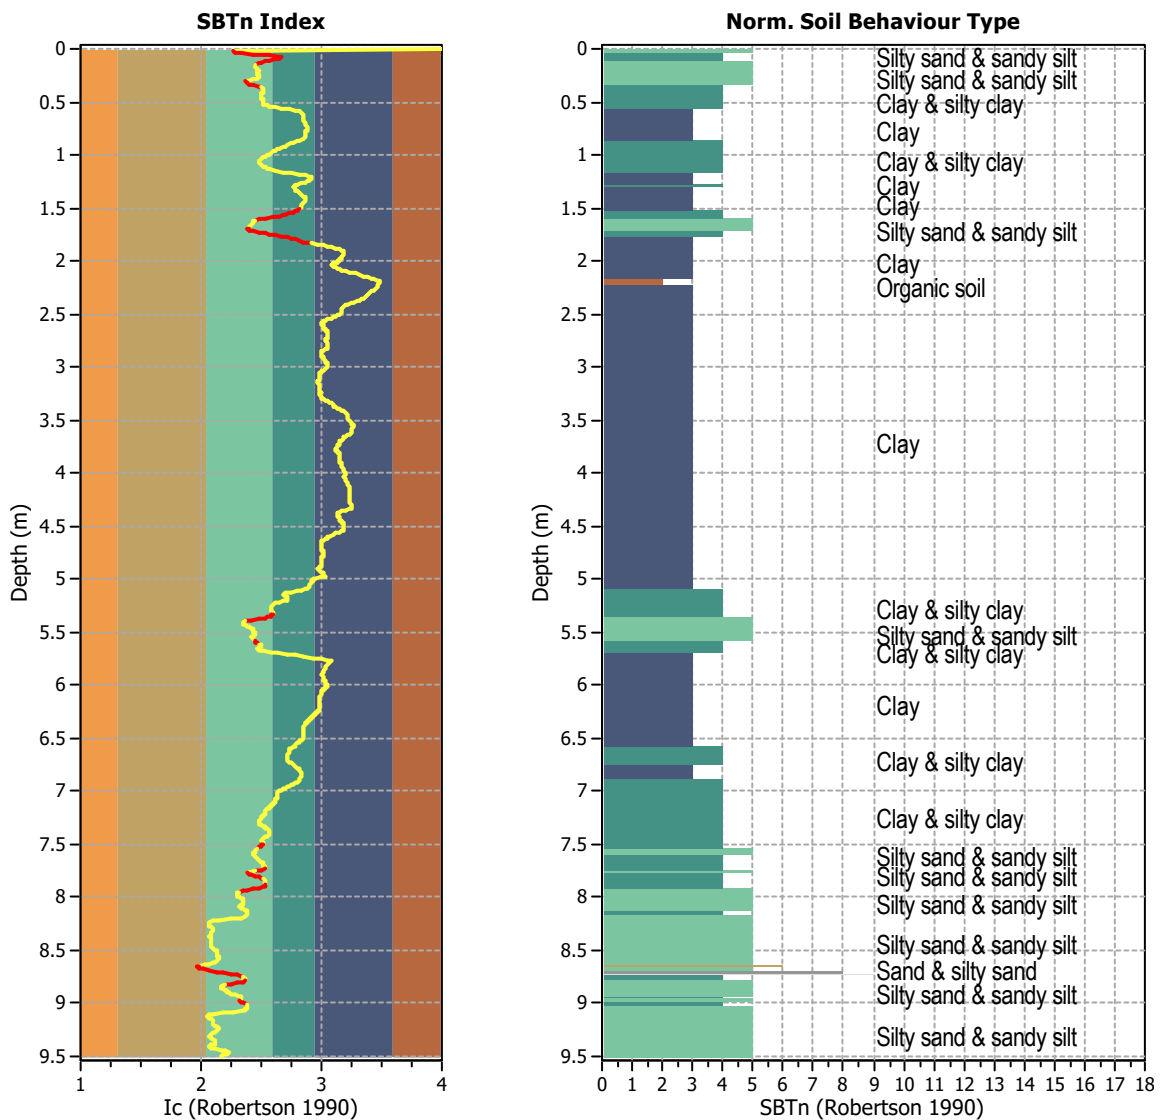


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 951
 Total points excluded: 106
 Exclusion percentage: 11.15%
 Number of layers detected: 14


Estimation of post-earthquake settlements

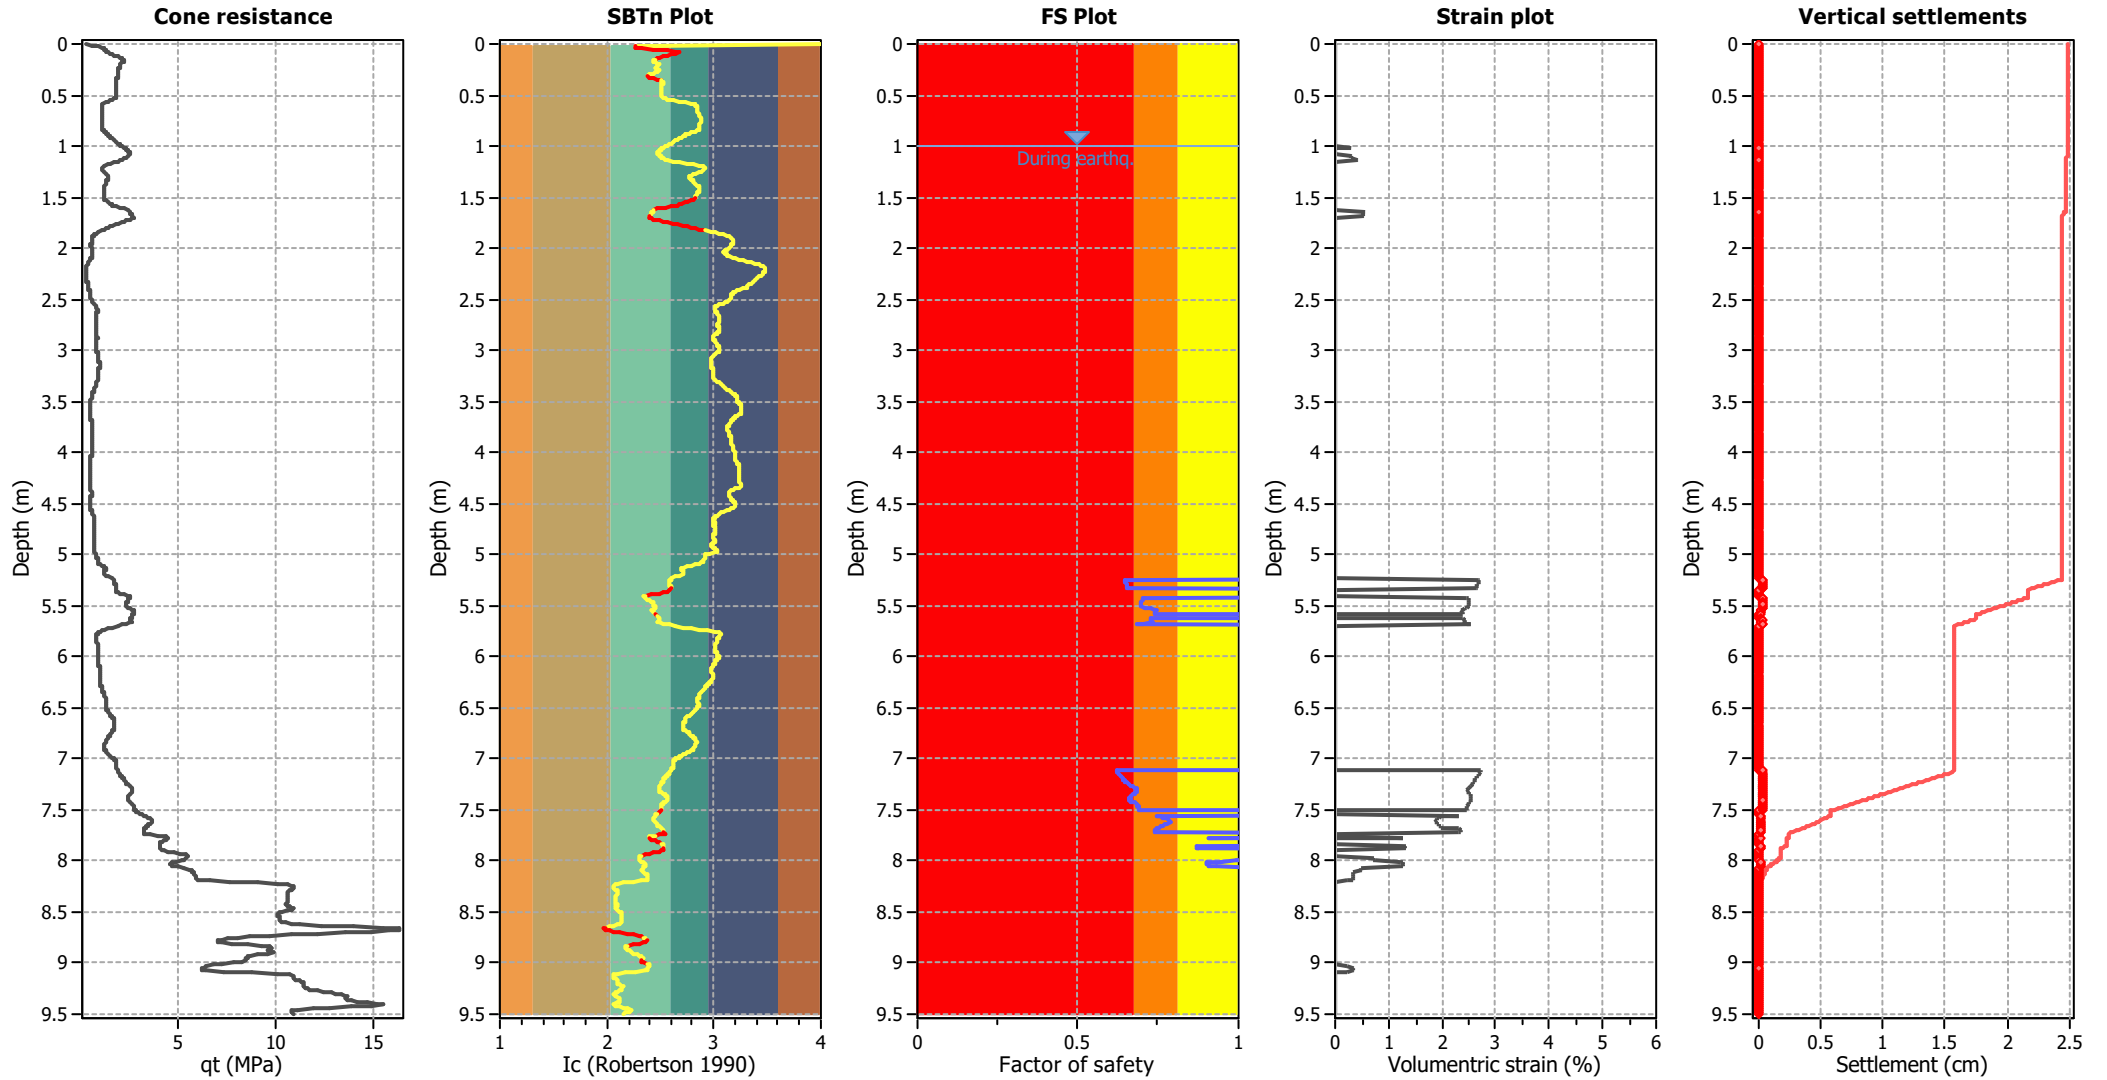

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

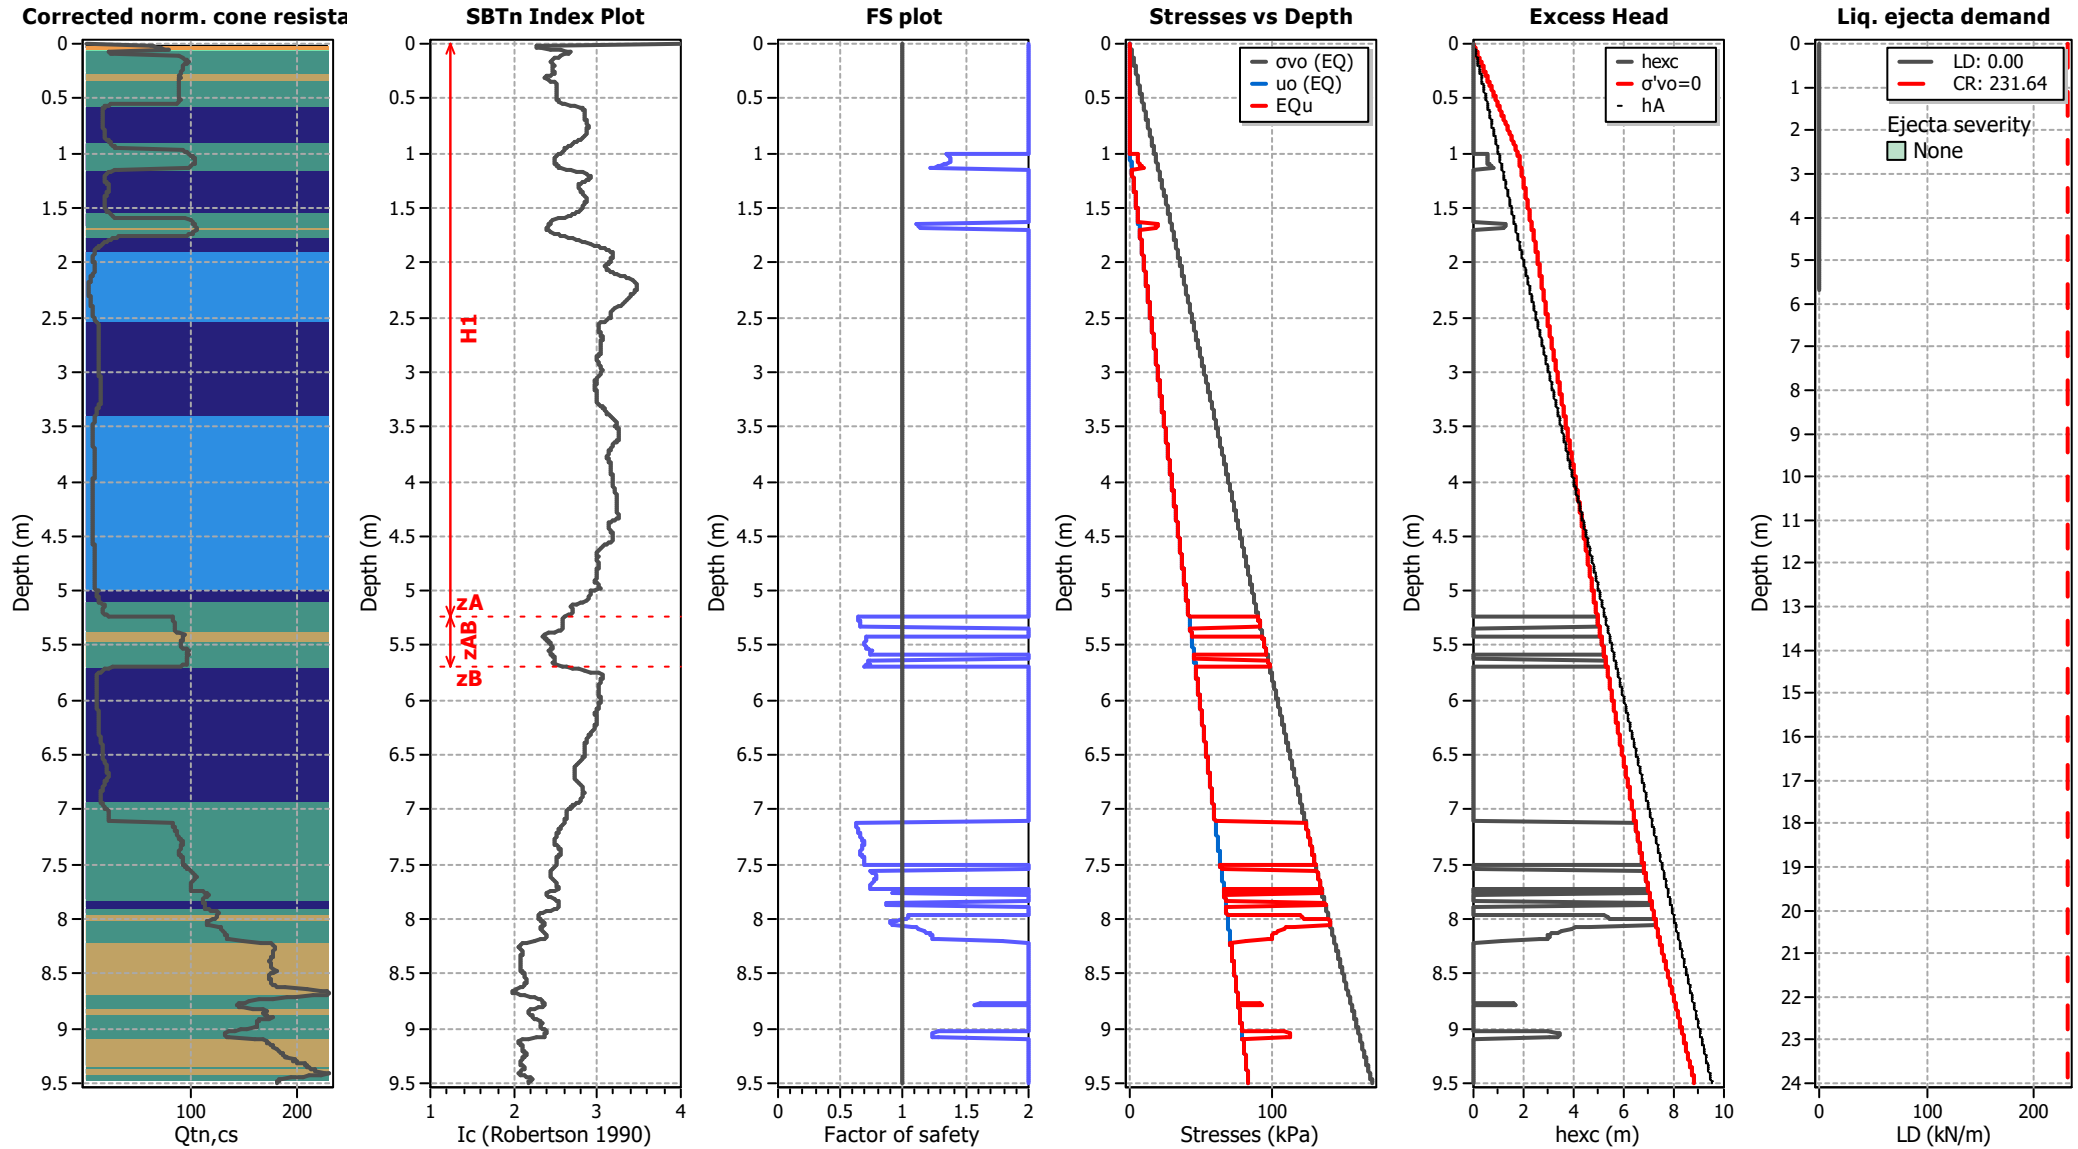

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT09A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Unit cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

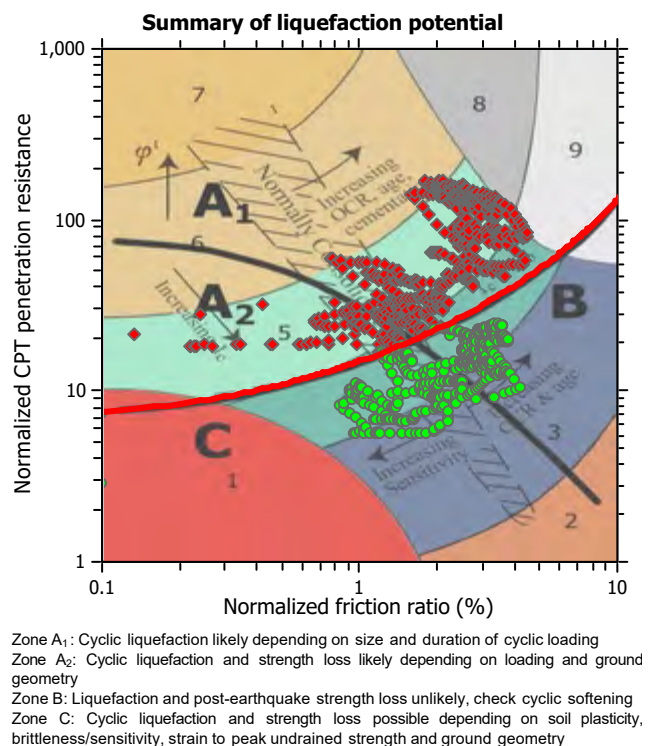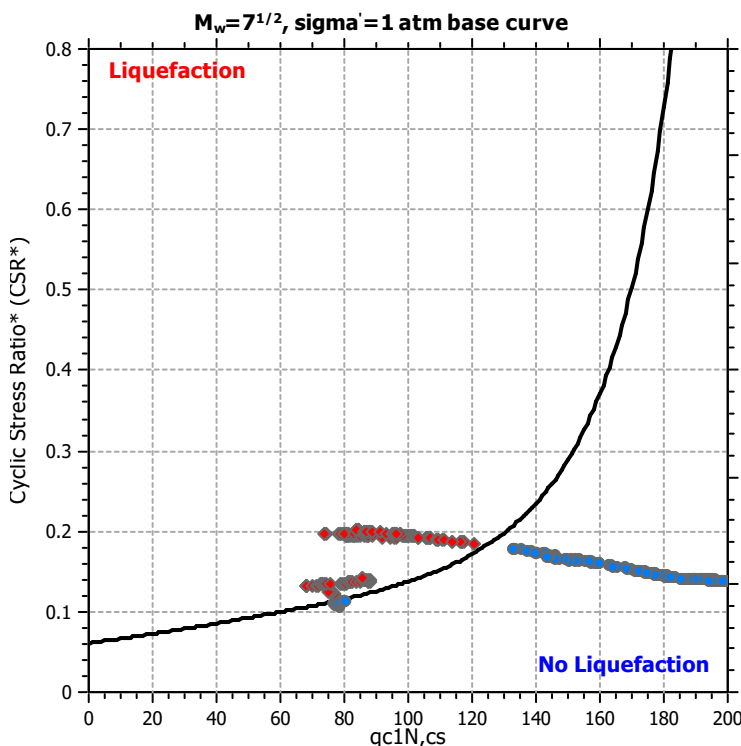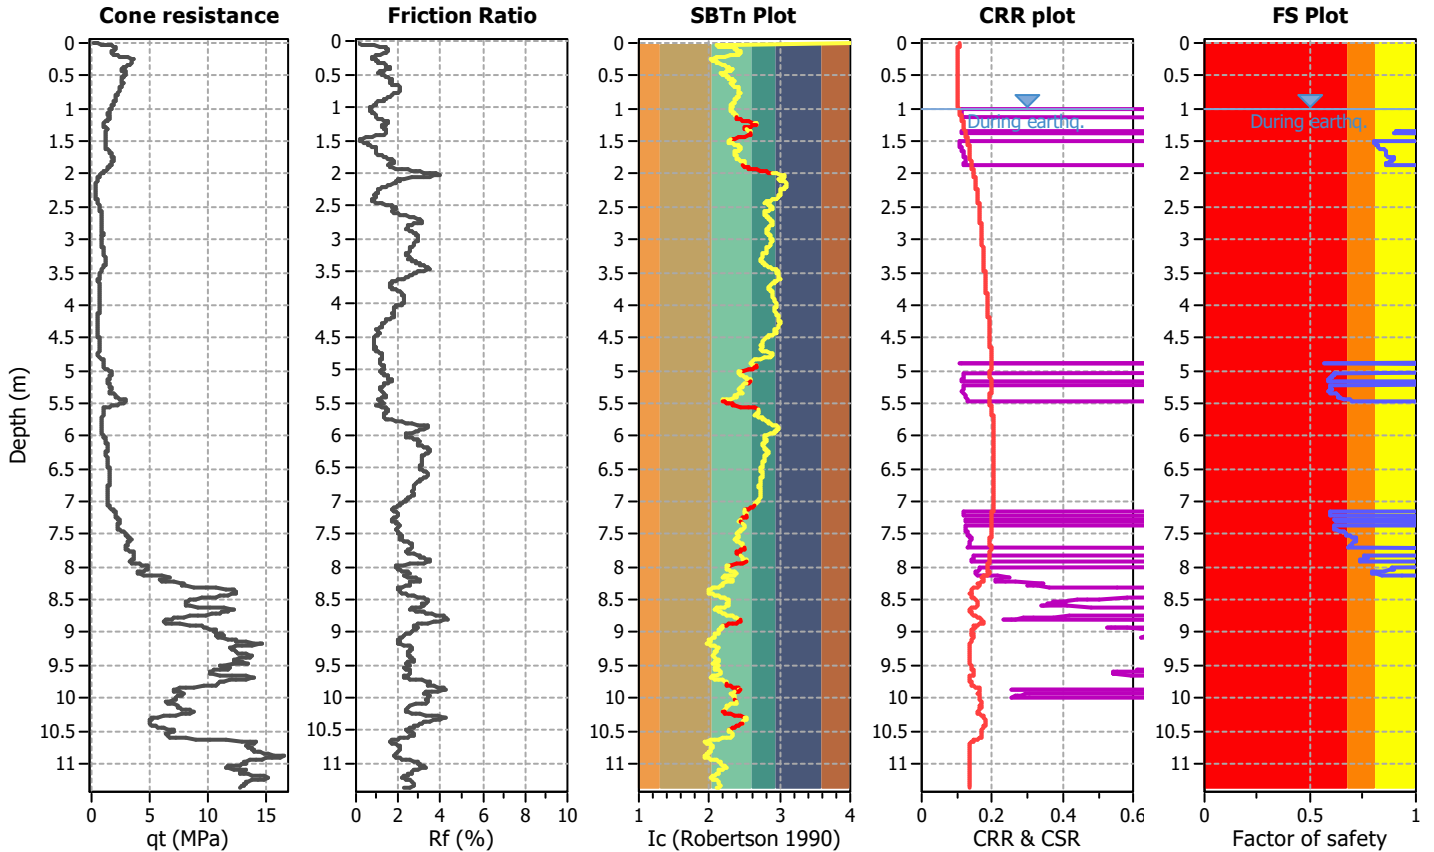

CPT basic interpretation plots

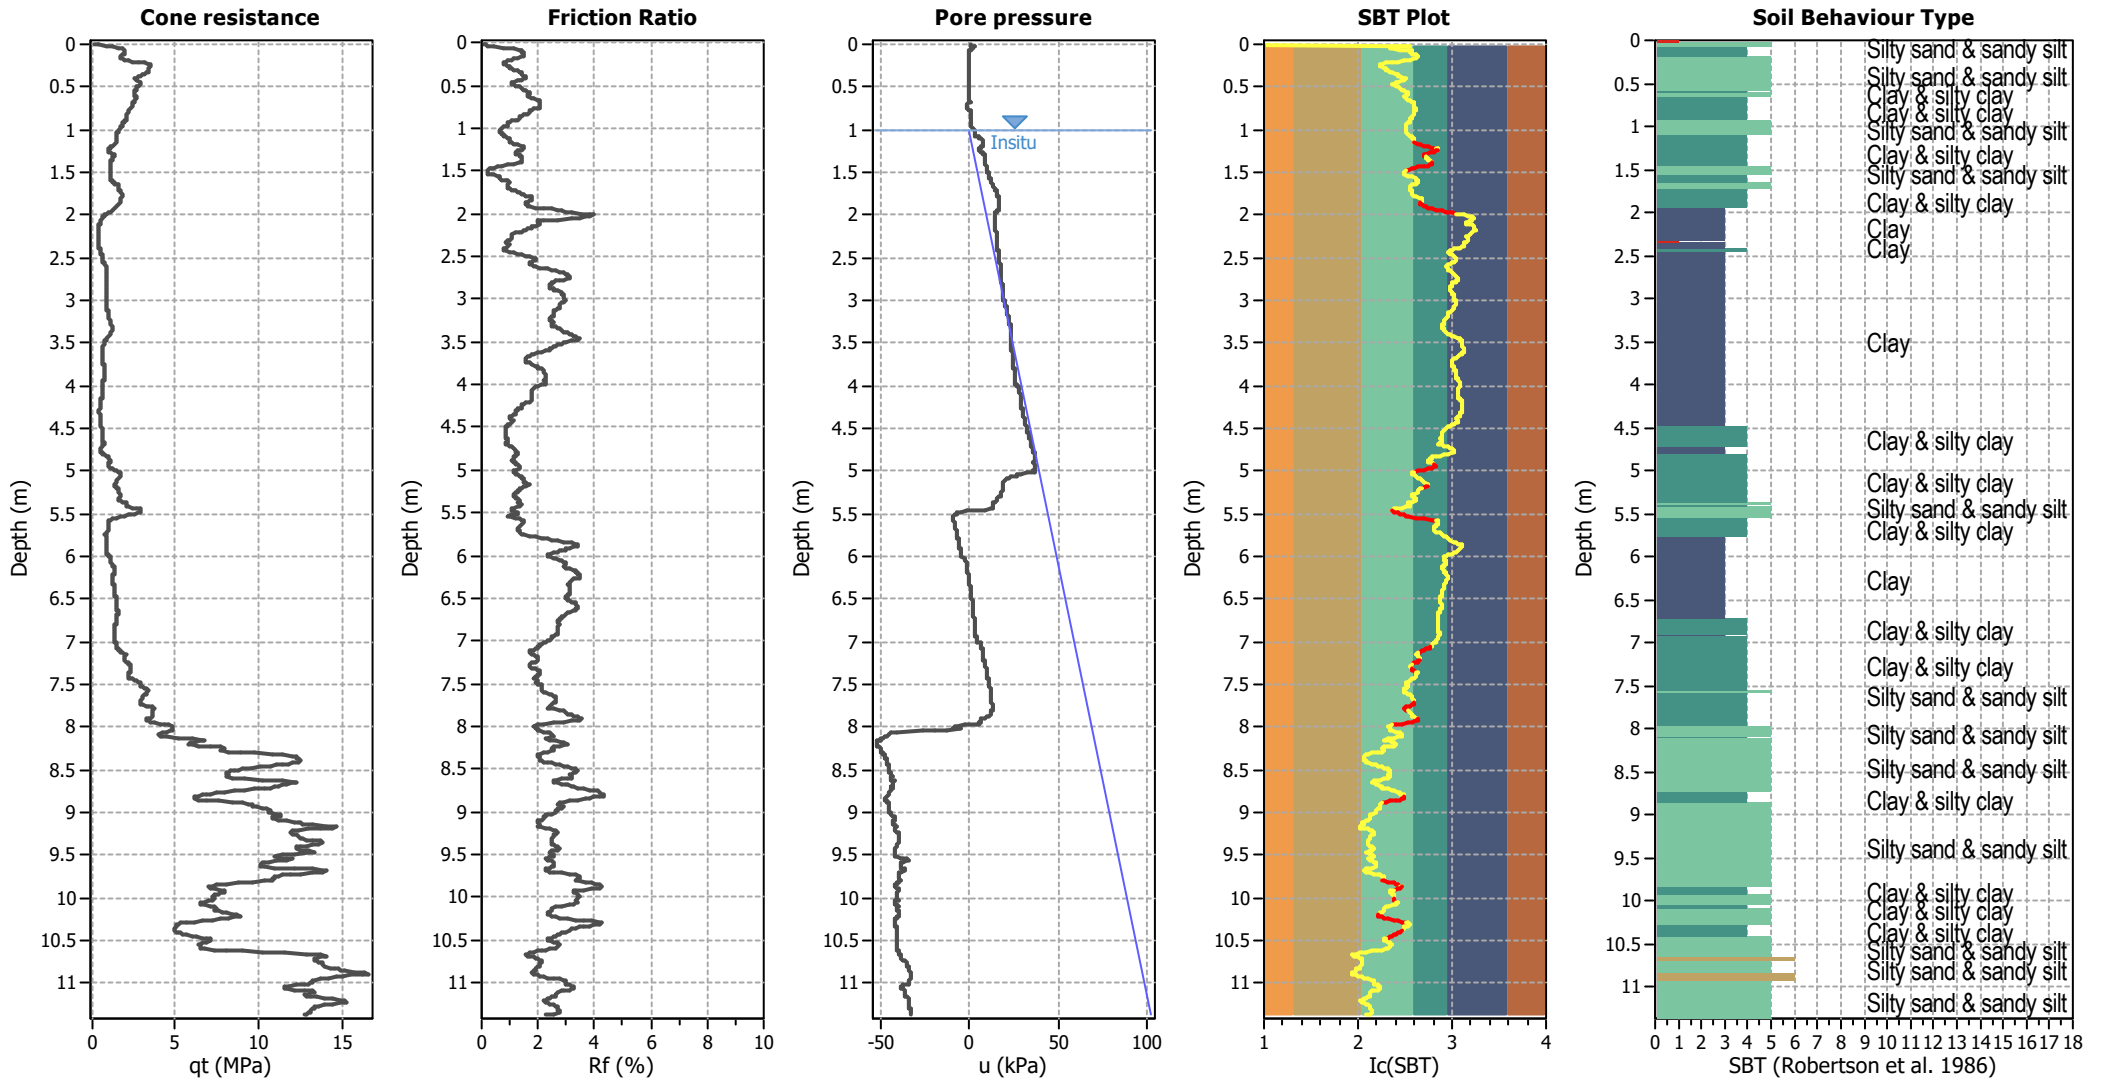


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

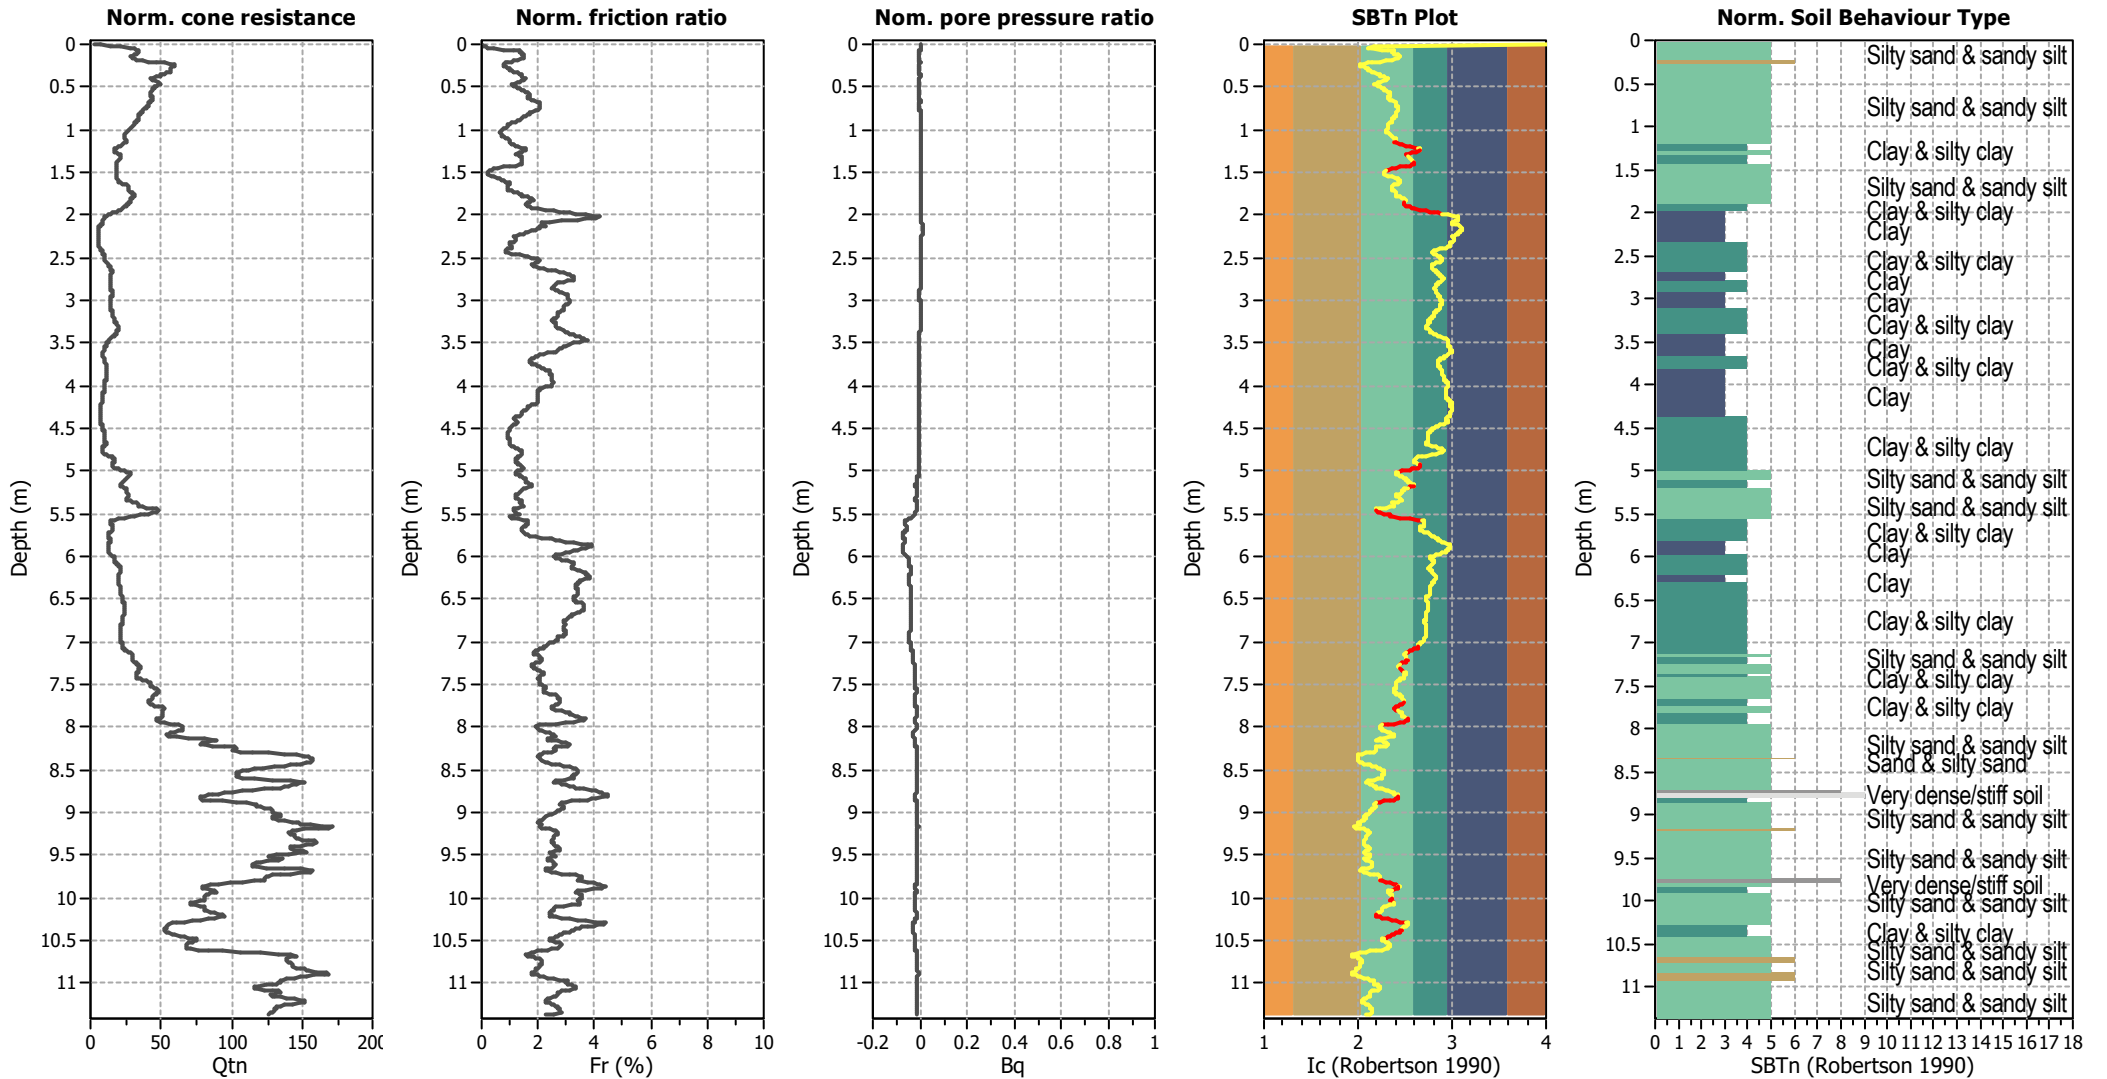


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

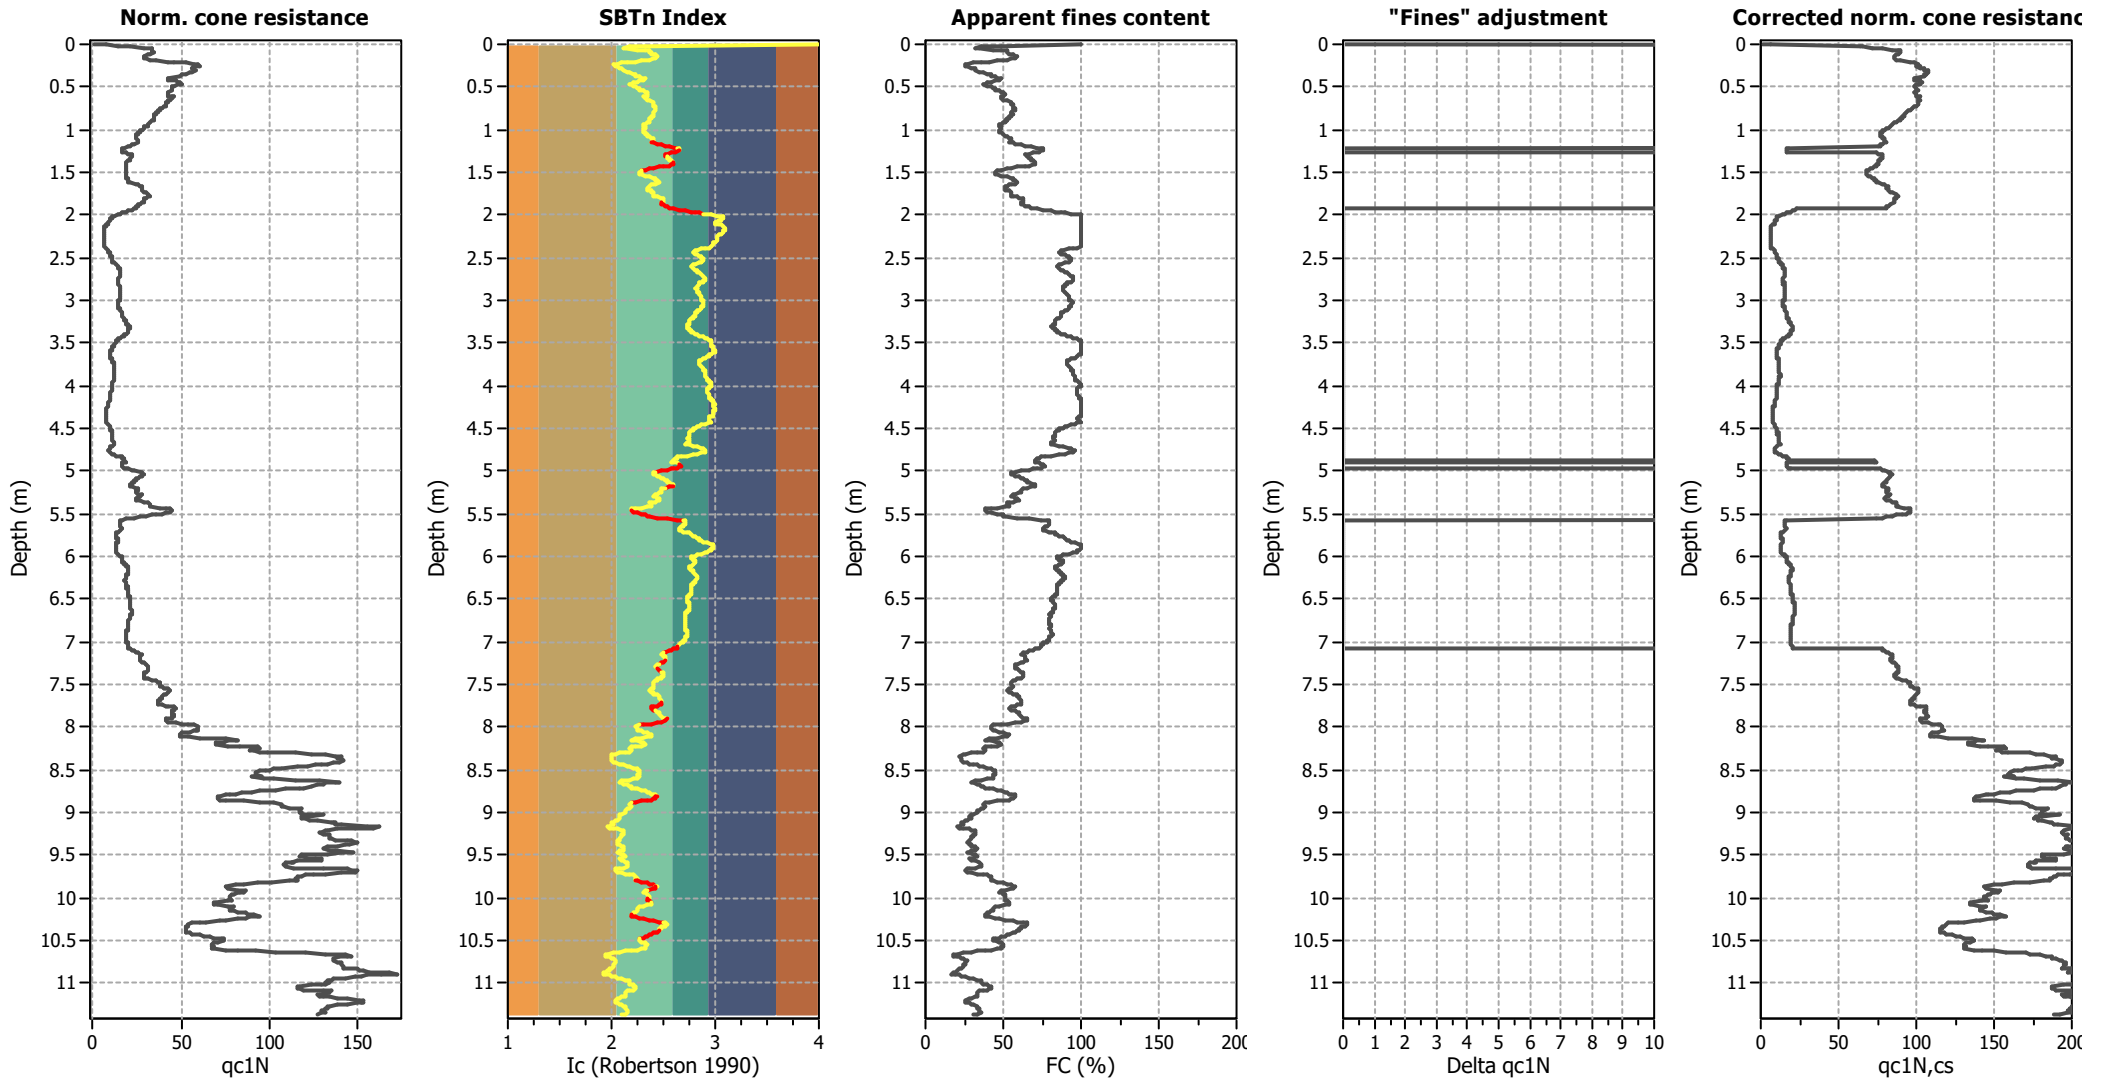

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

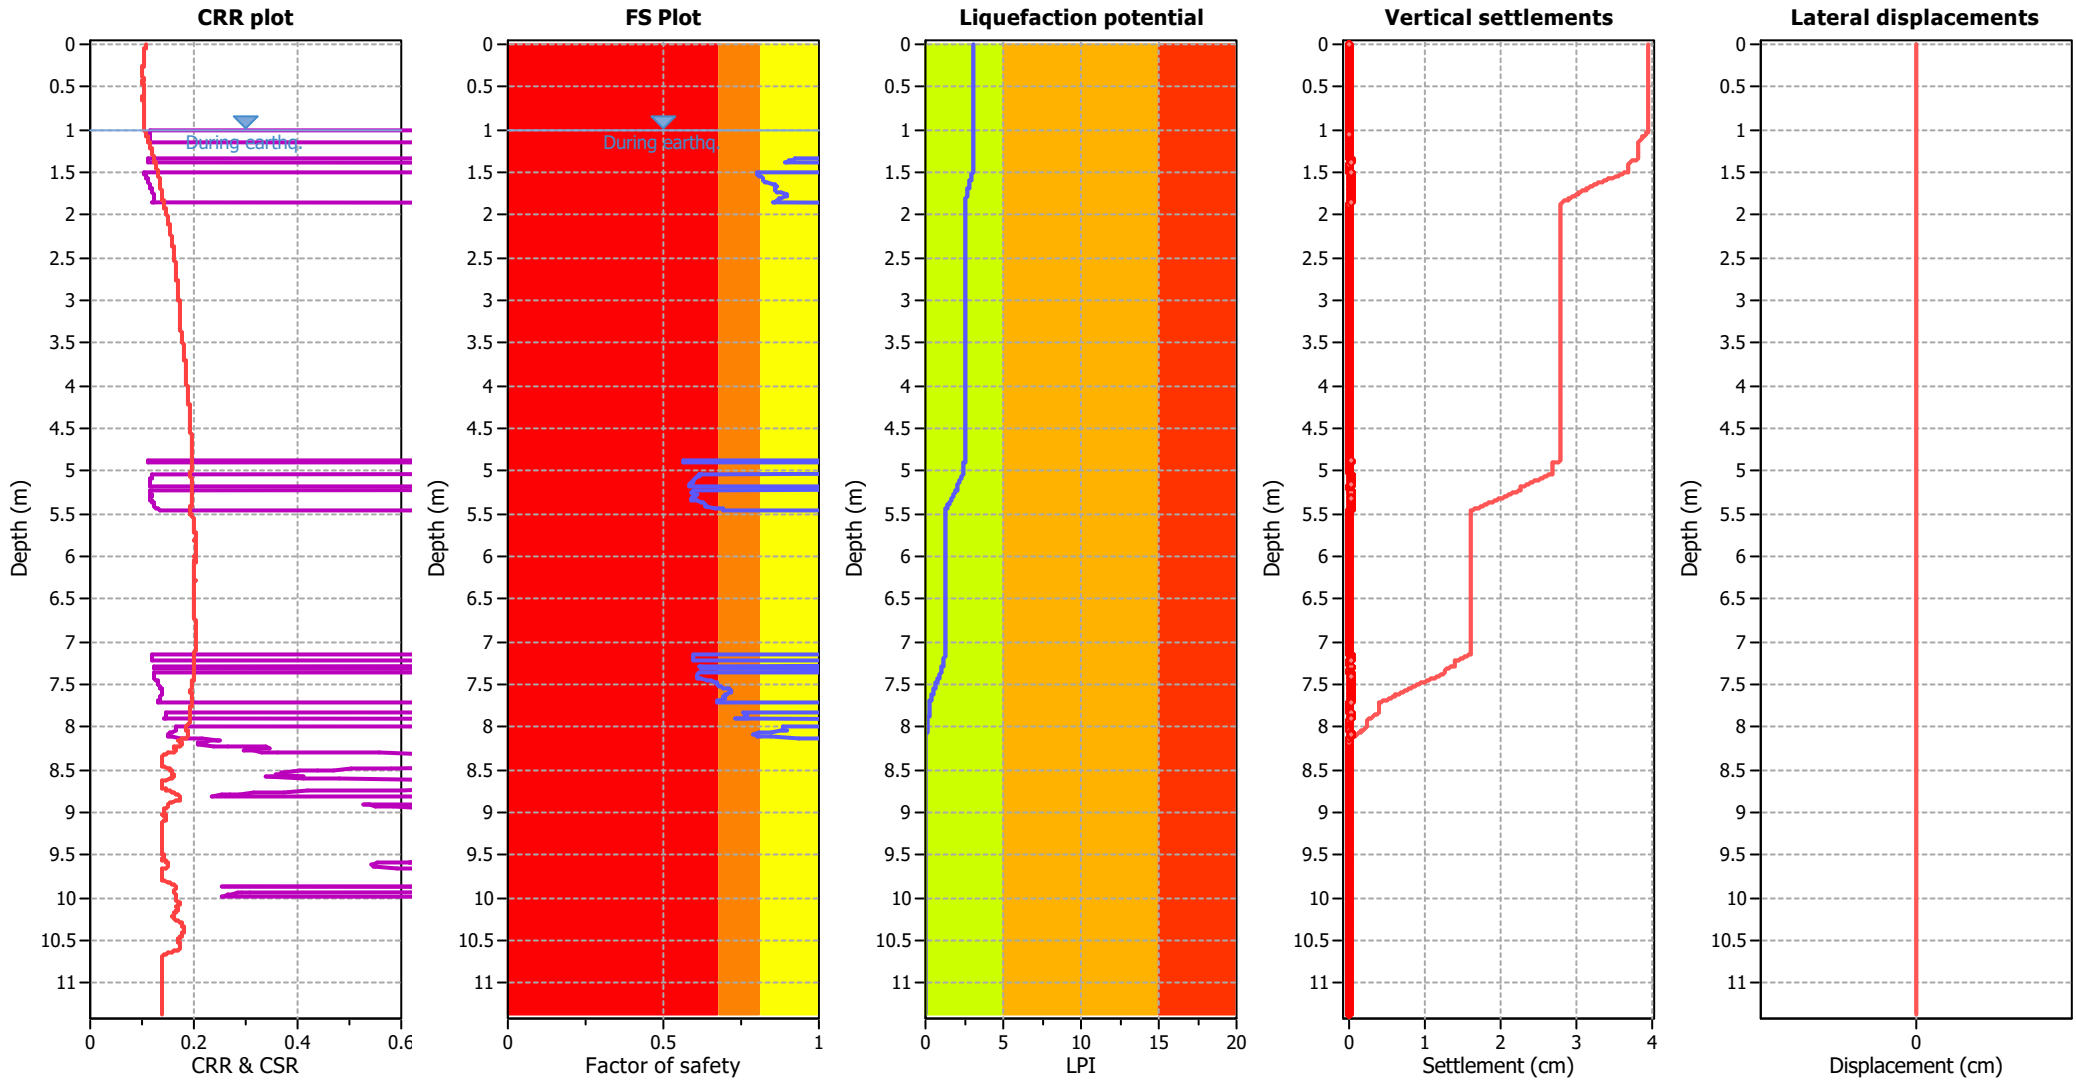

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

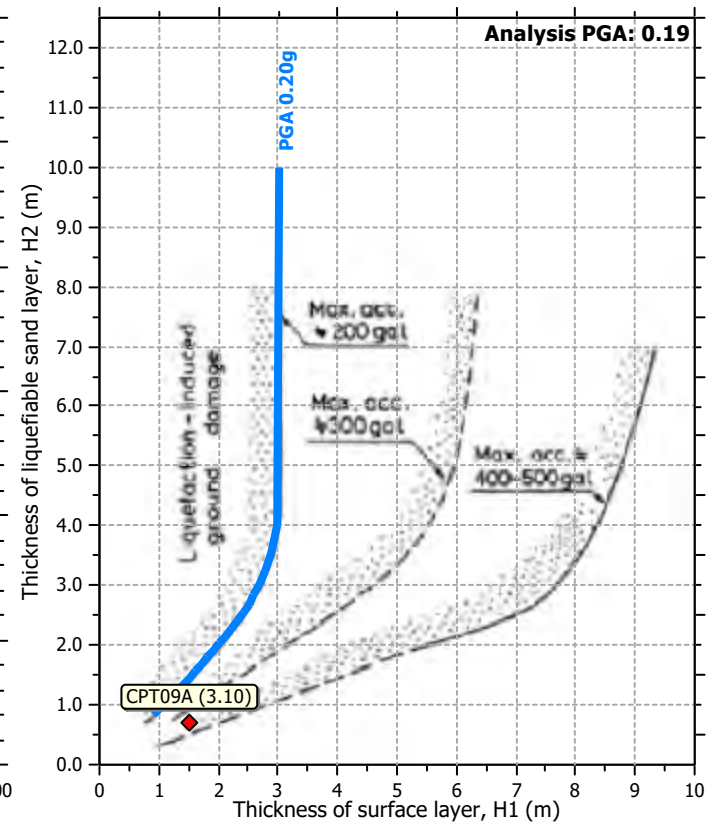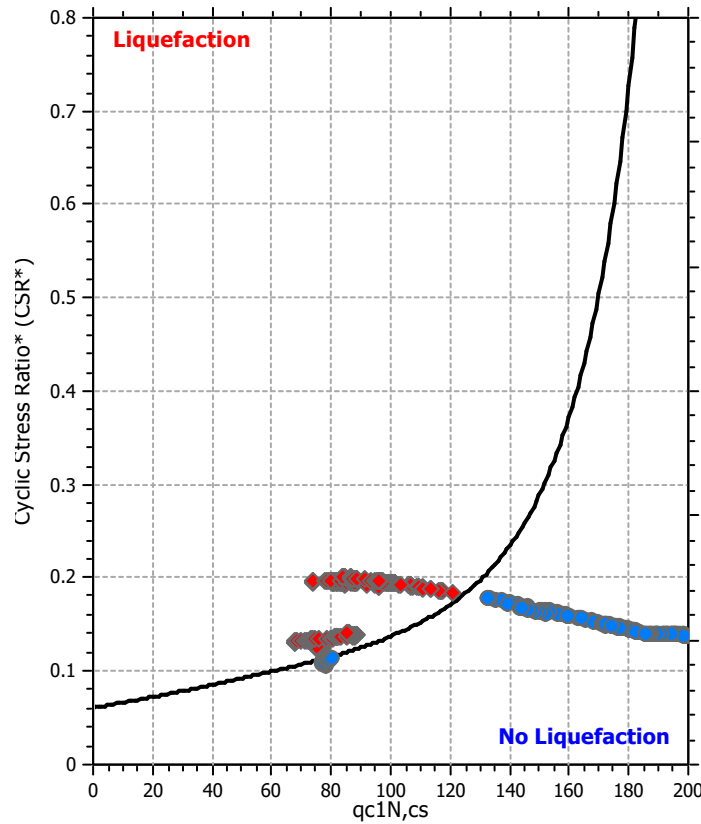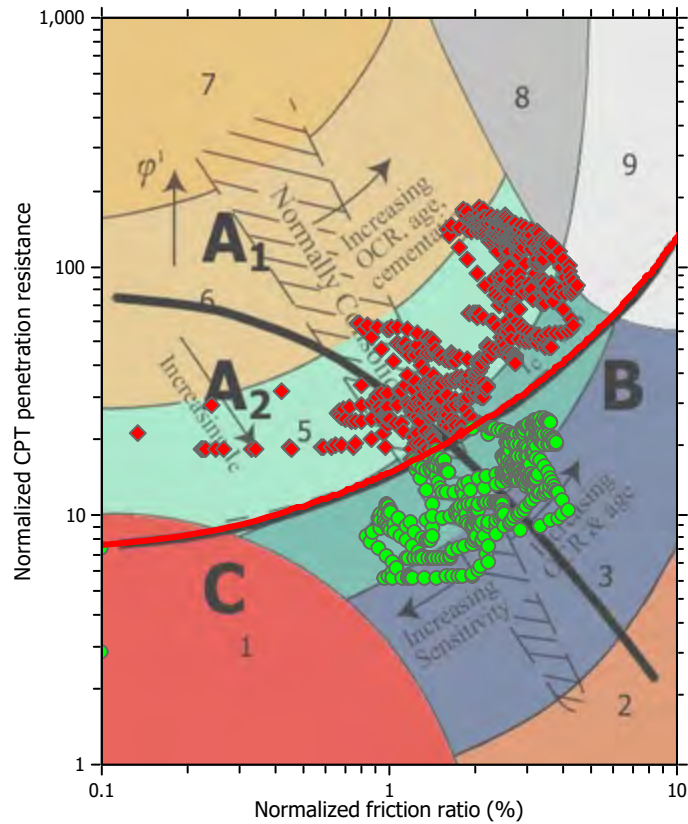

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

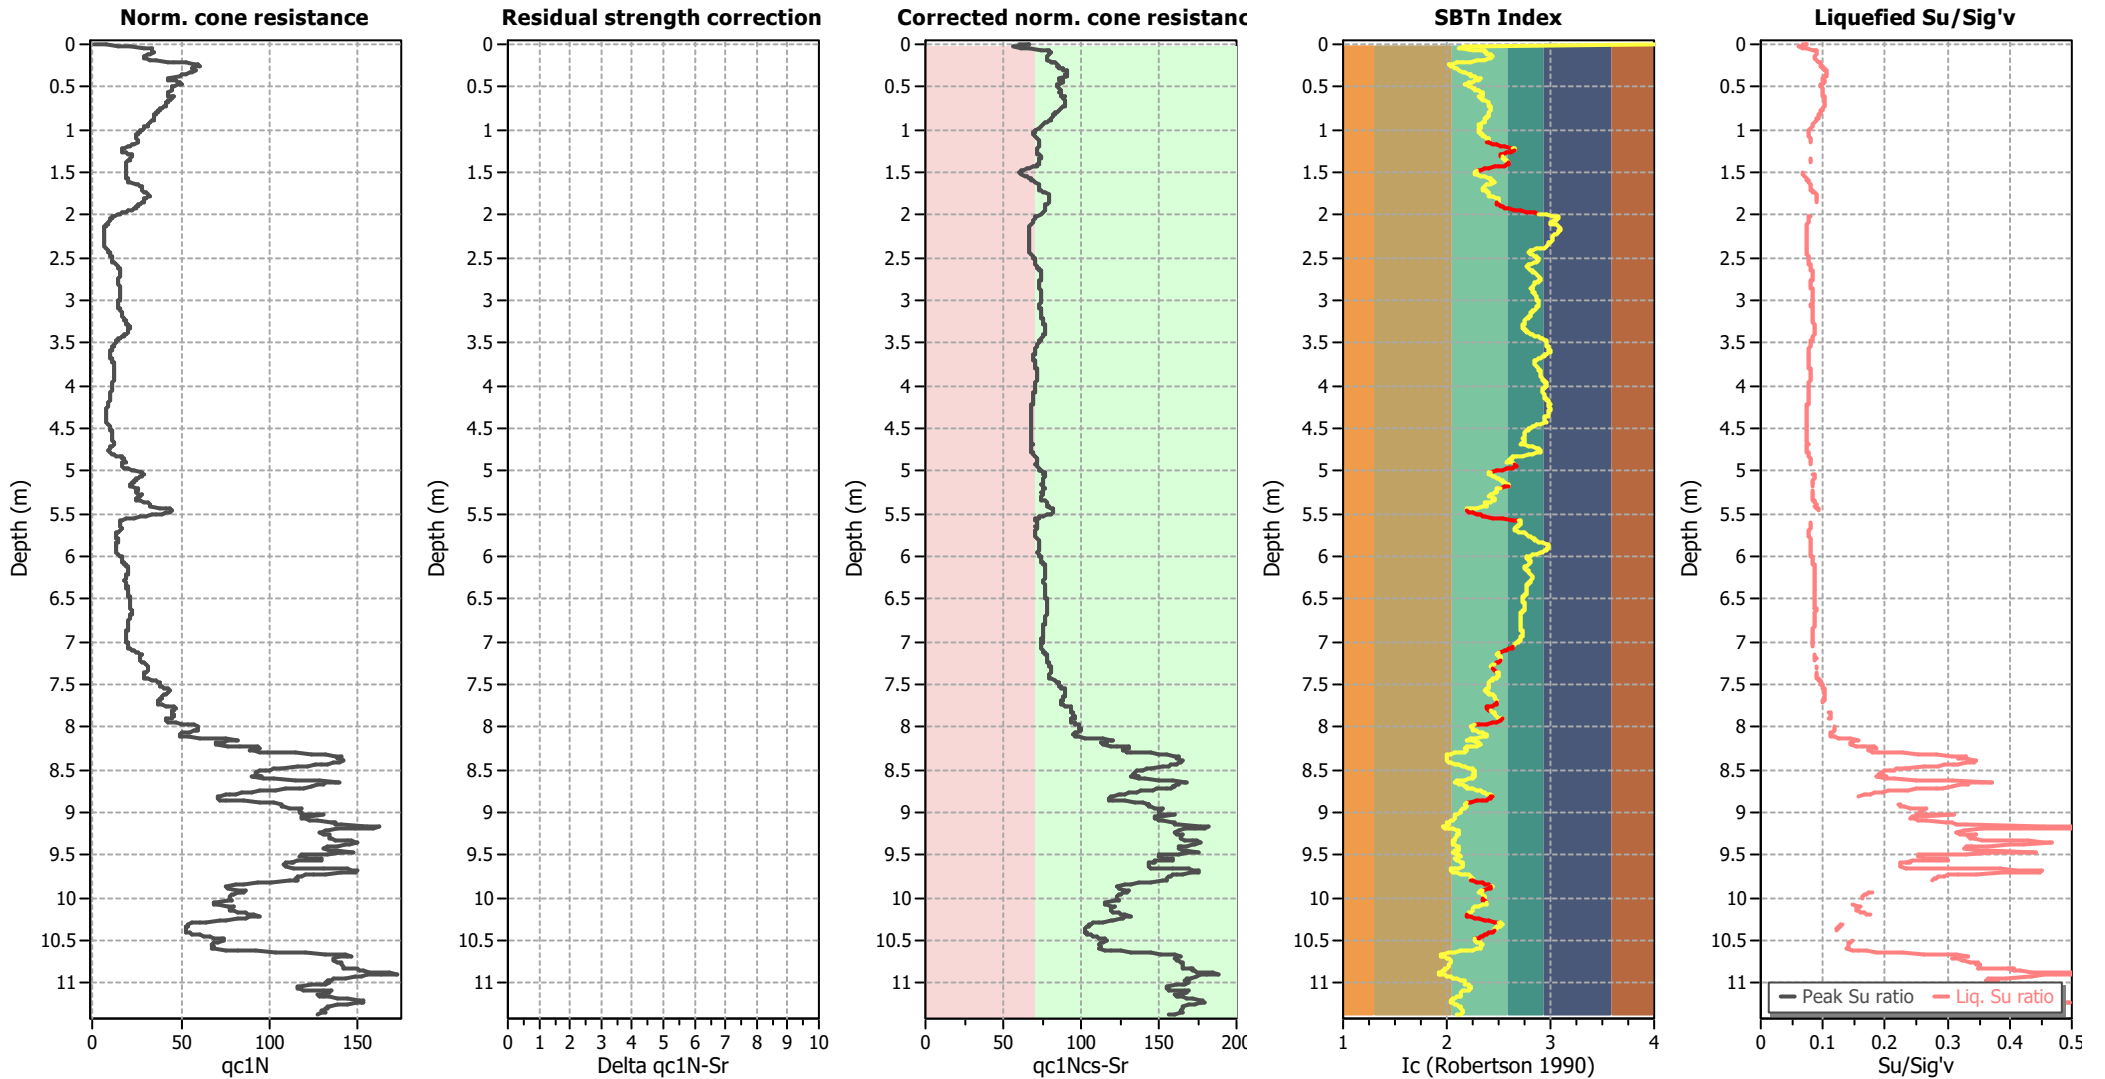

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

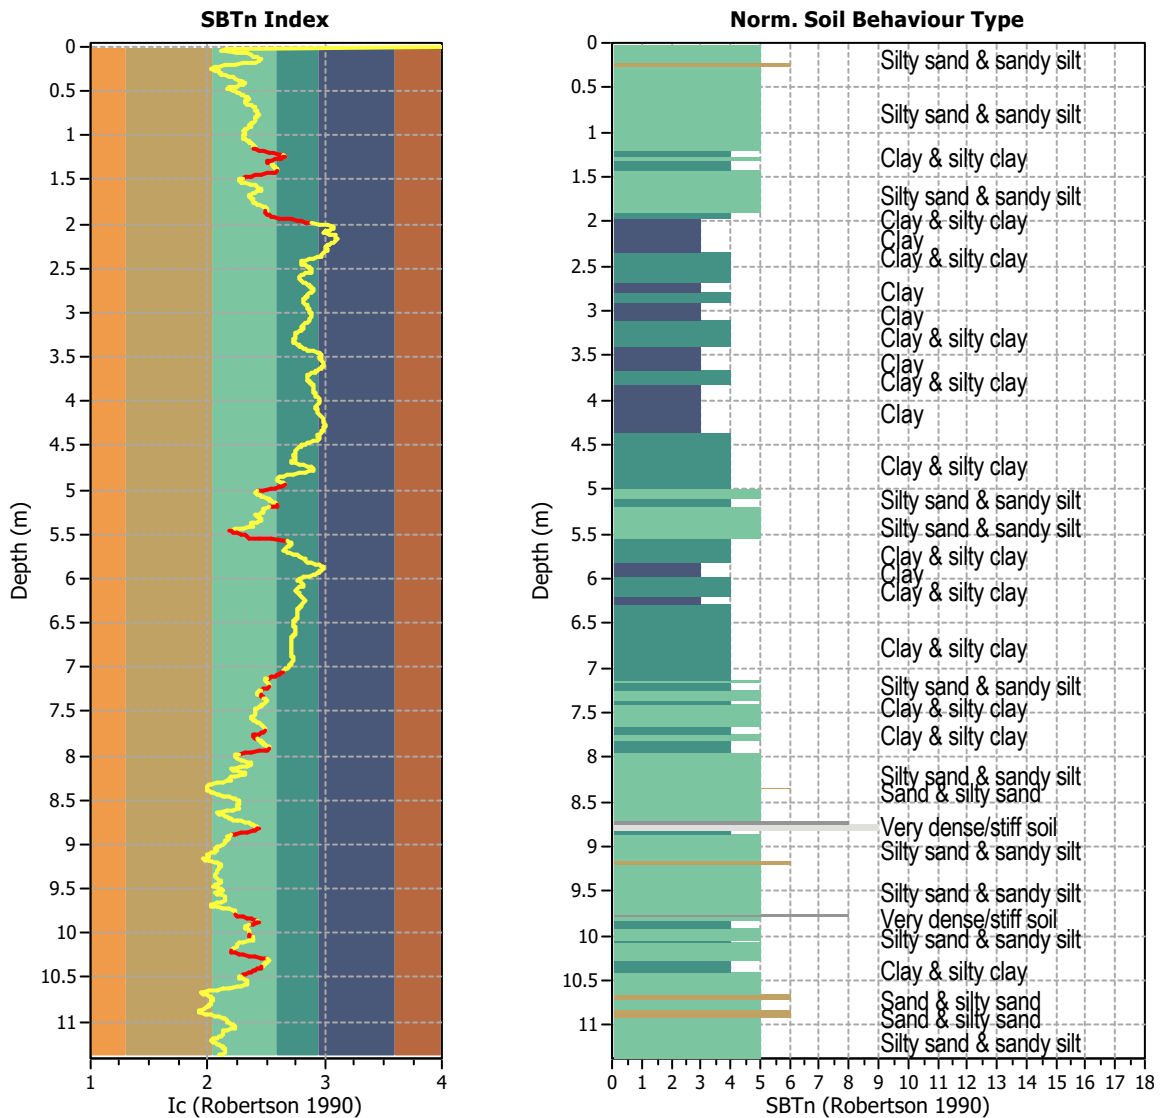


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1138
 Total points excluded: 150
 Exclusion percentage: 13.18%
 Number of layers detected: 20


Estimation of post-earthquake settlements

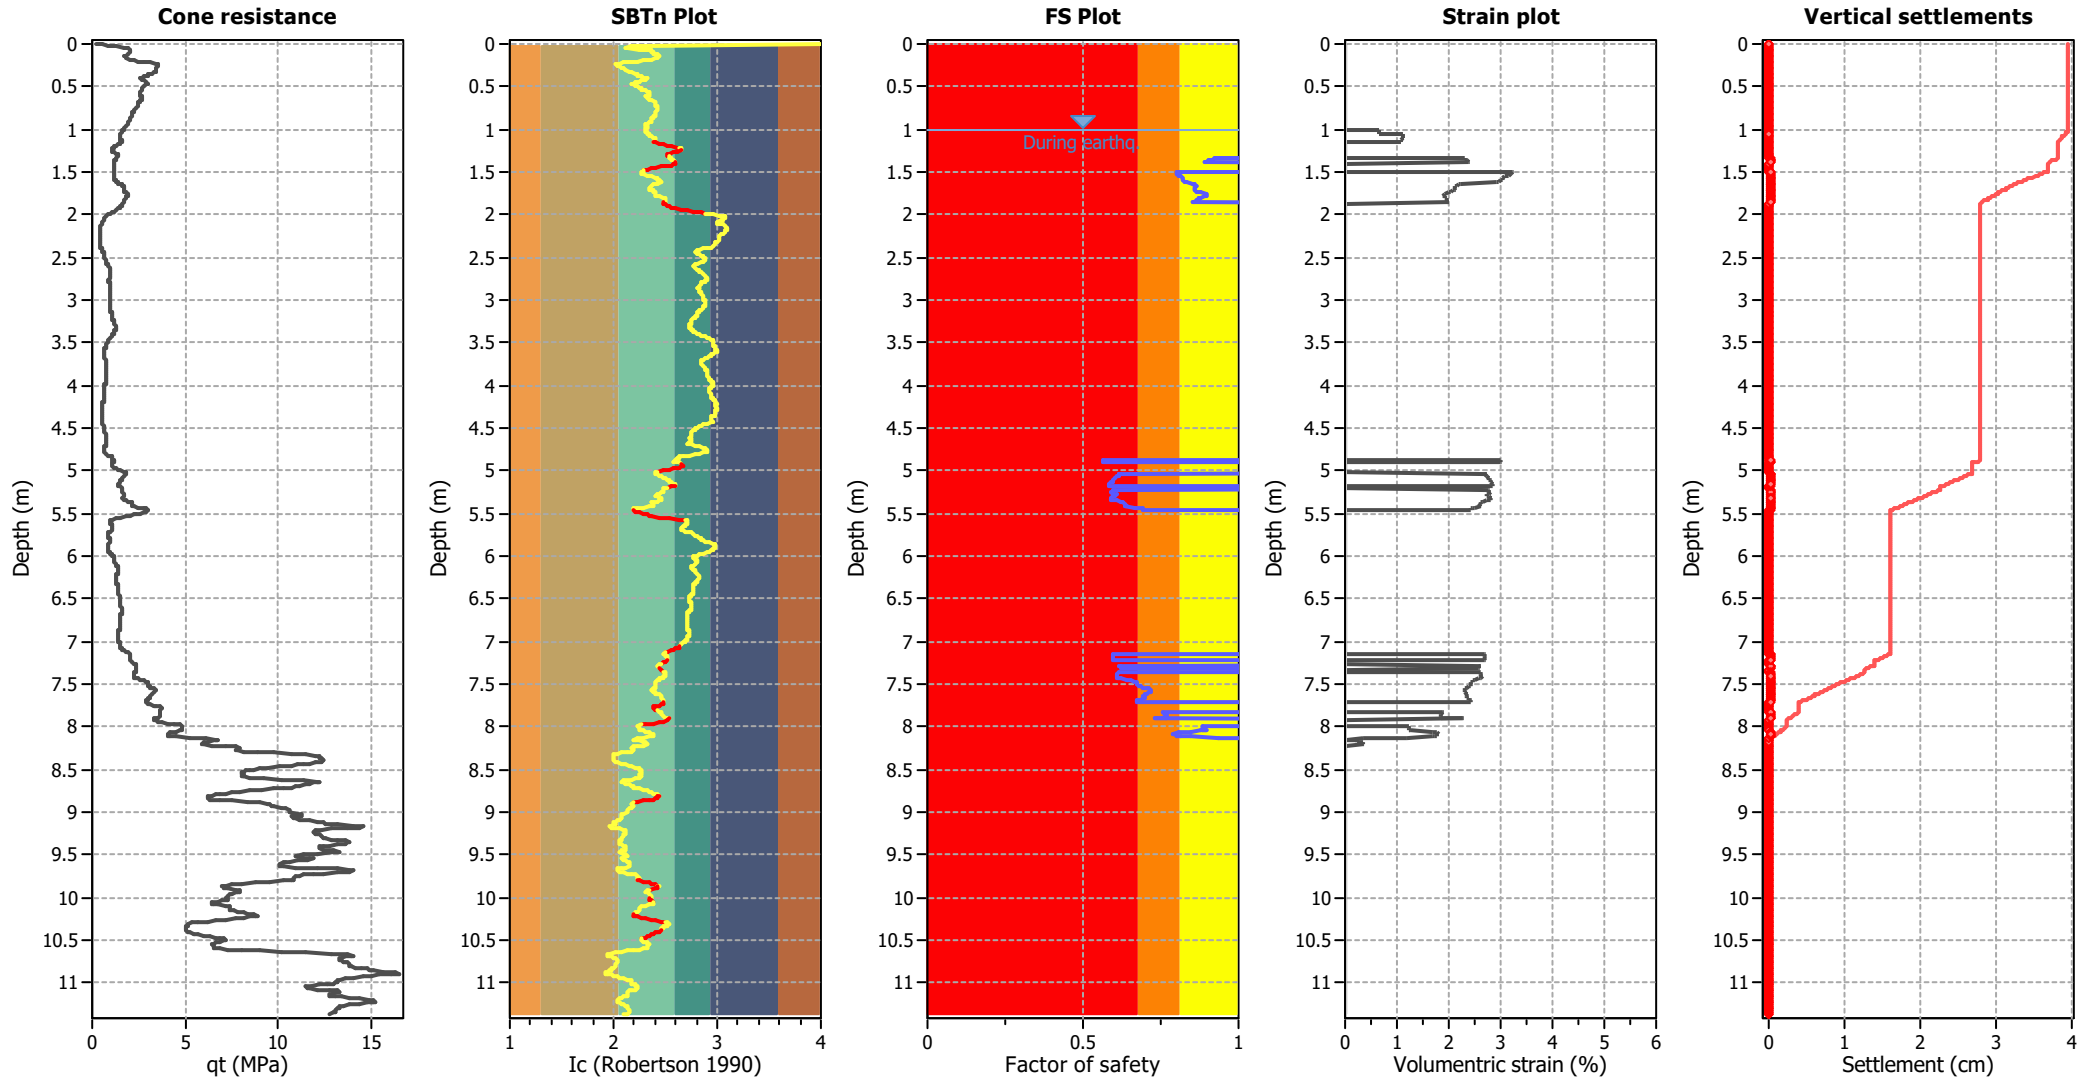

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

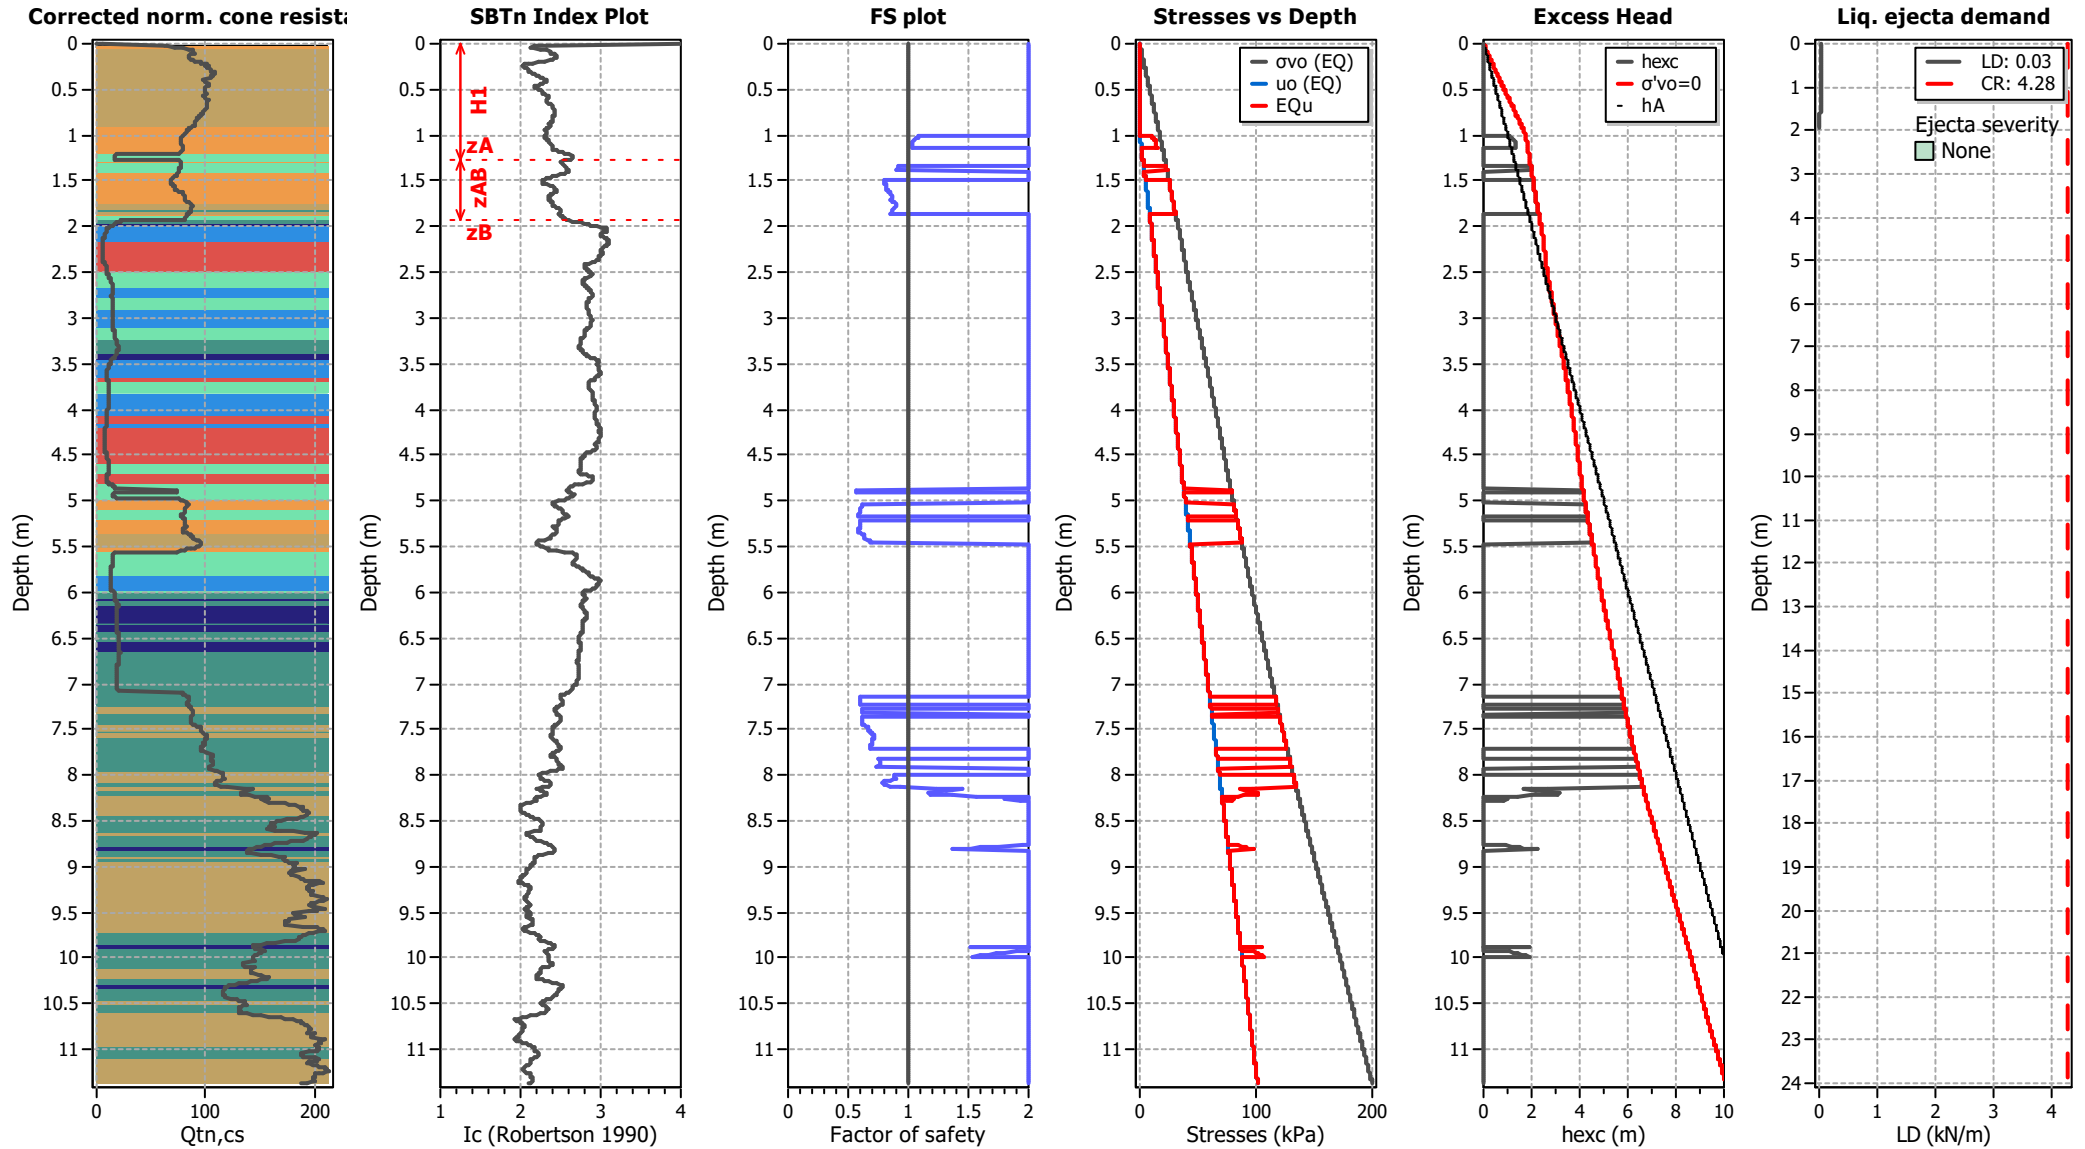

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT10

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

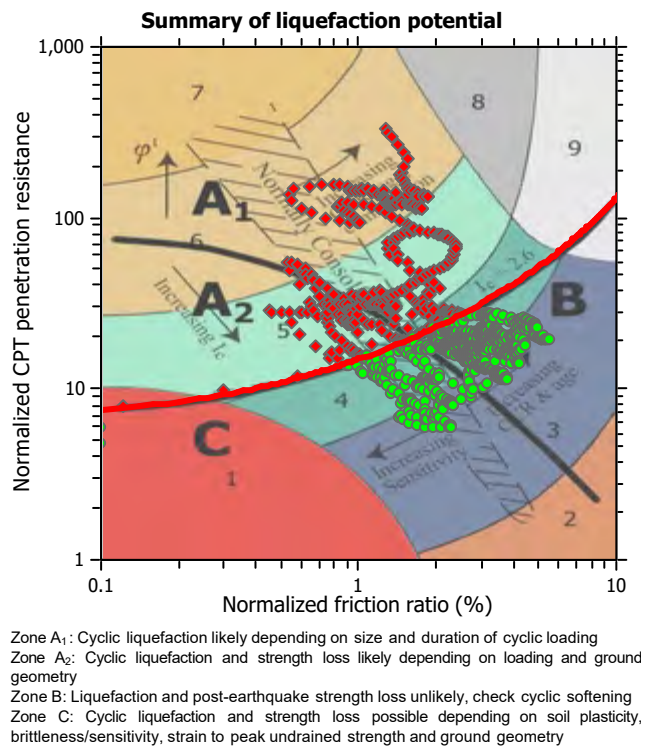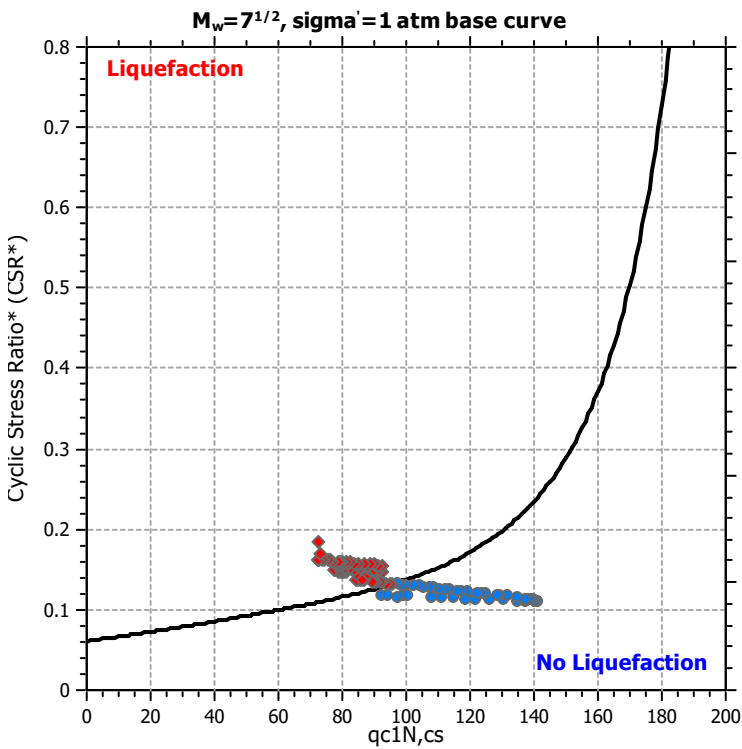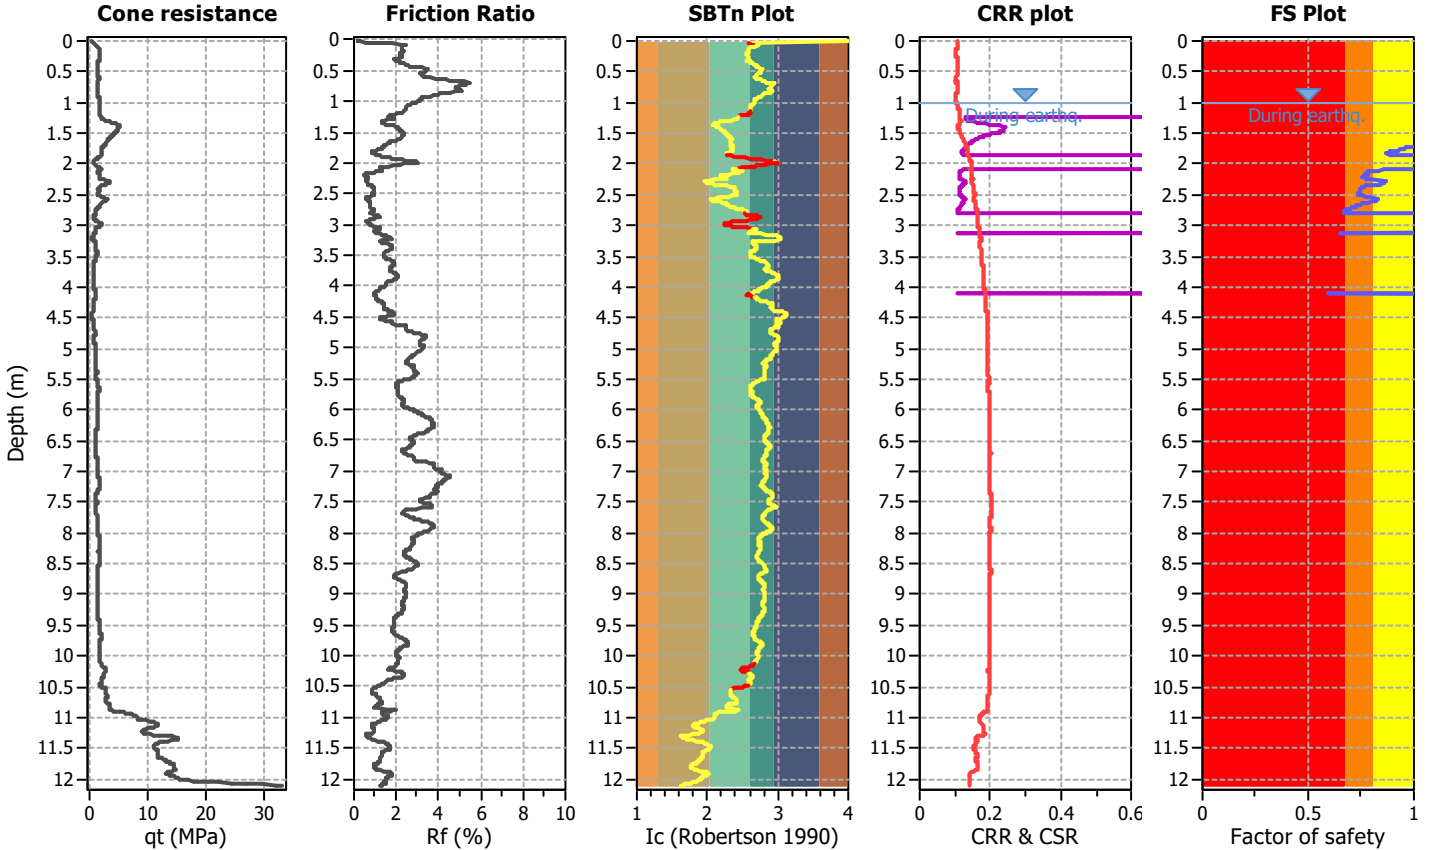

CPT basic interpretation plots

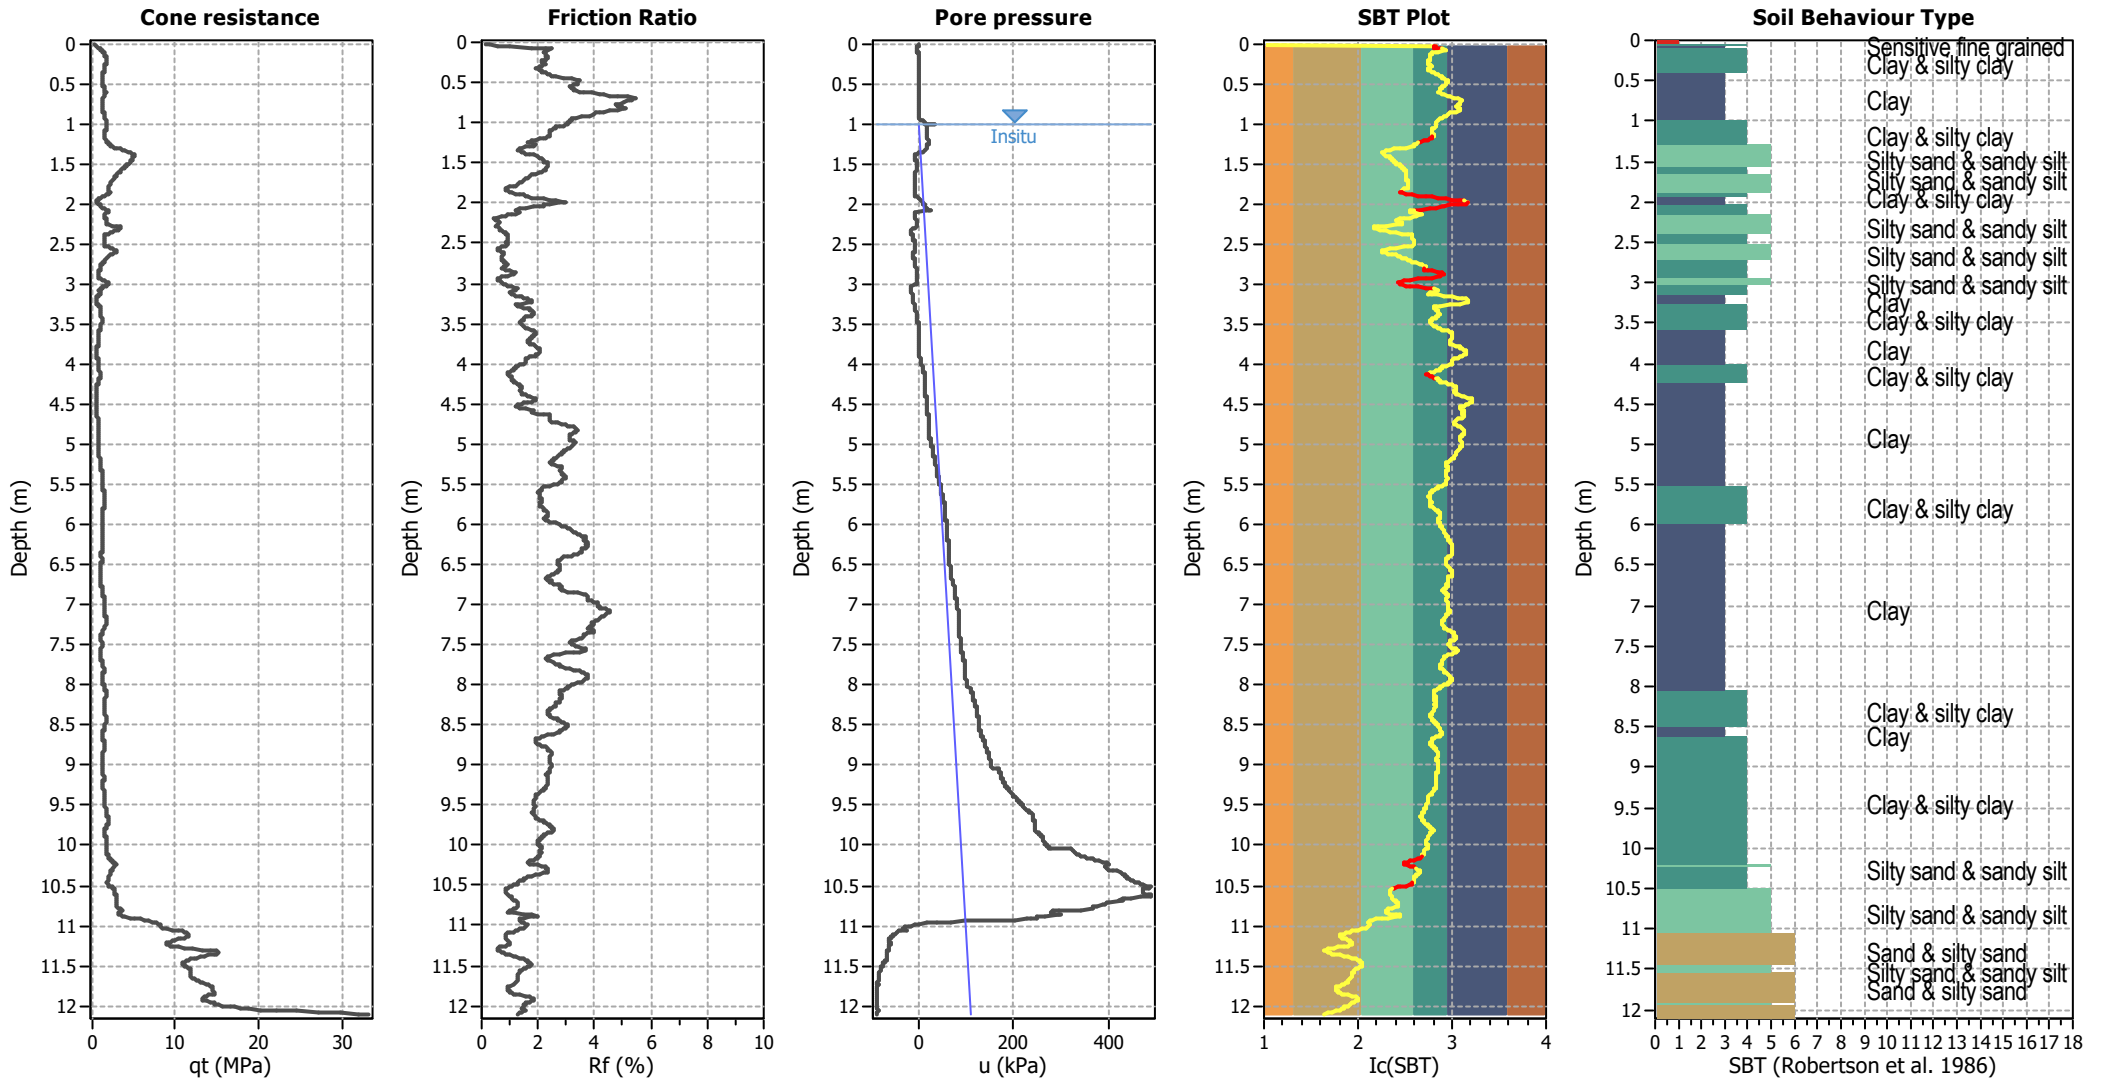


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

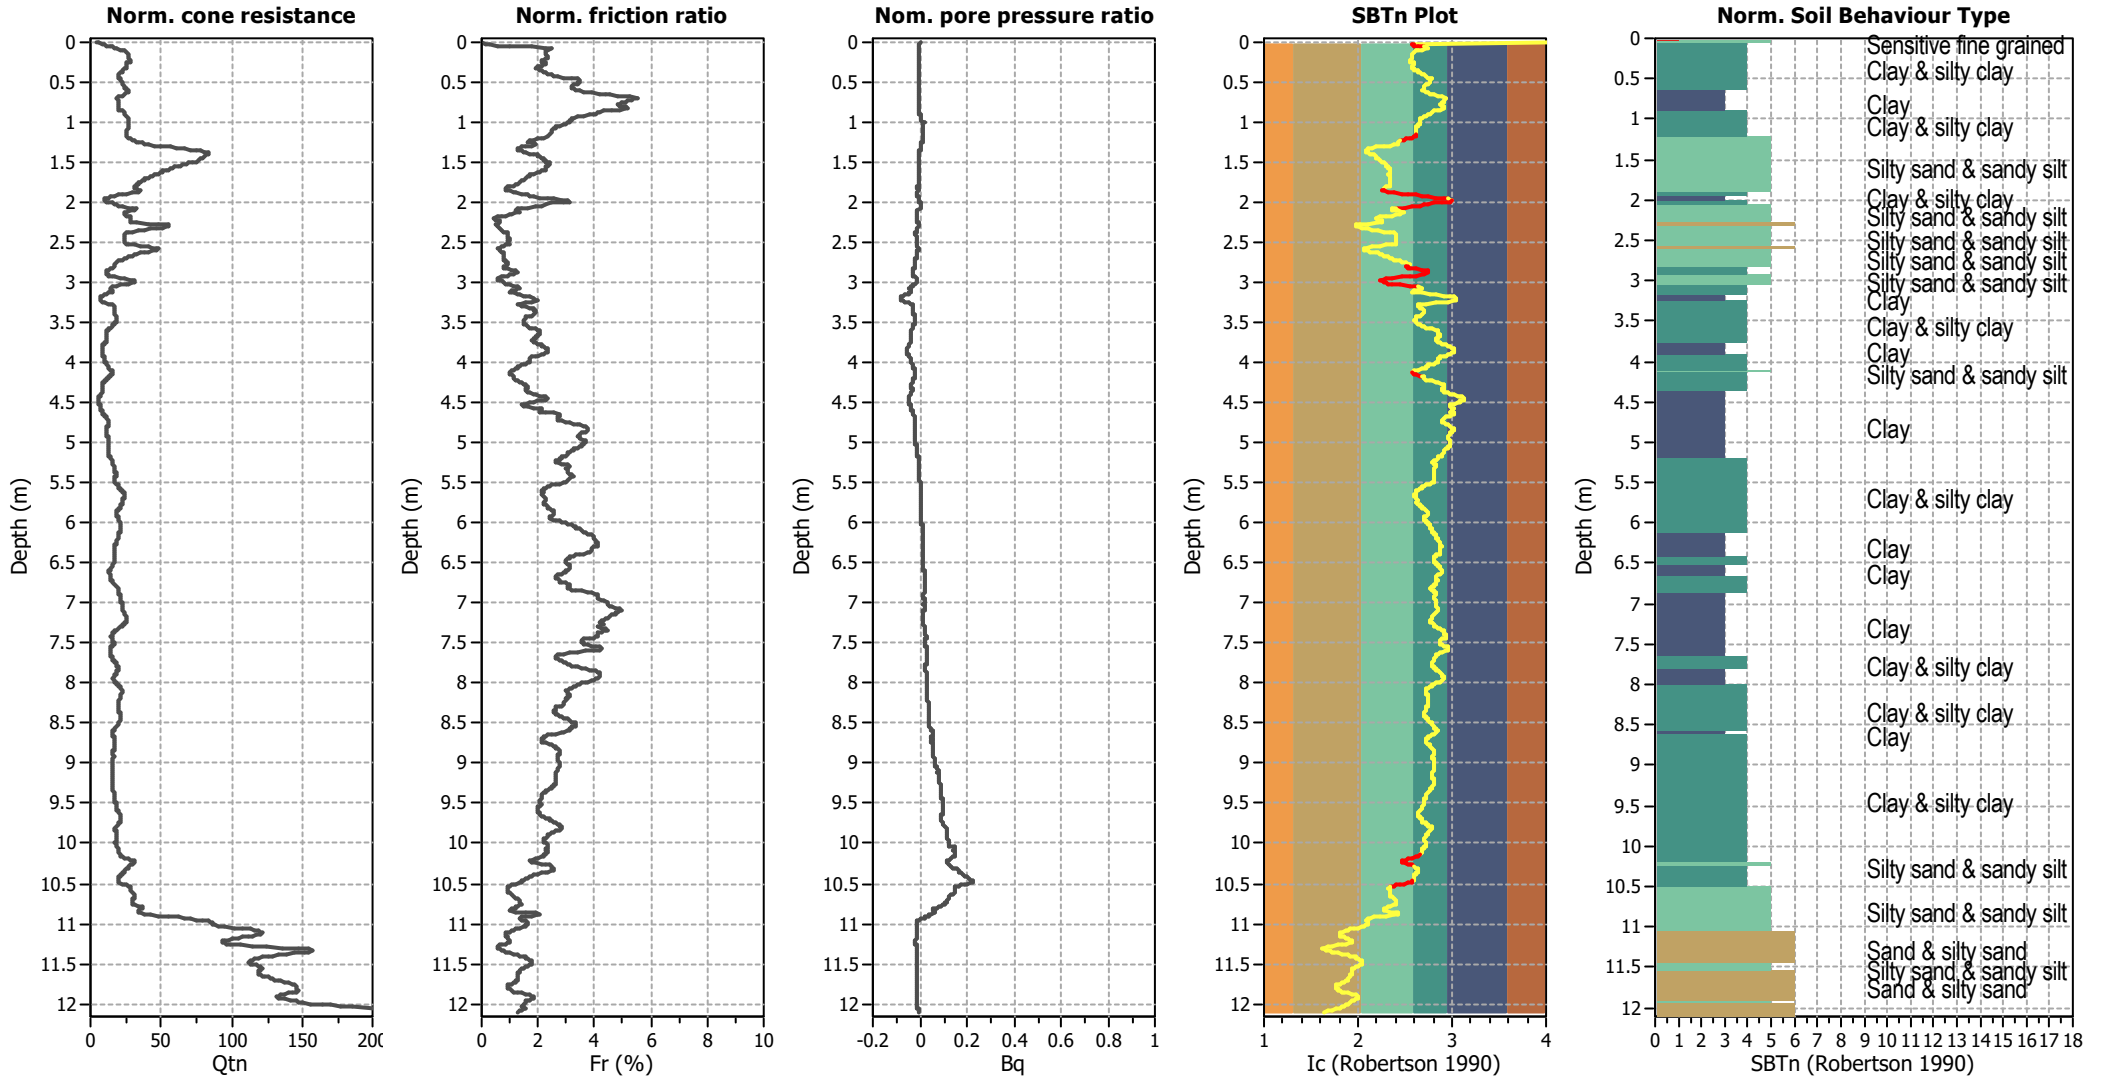


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

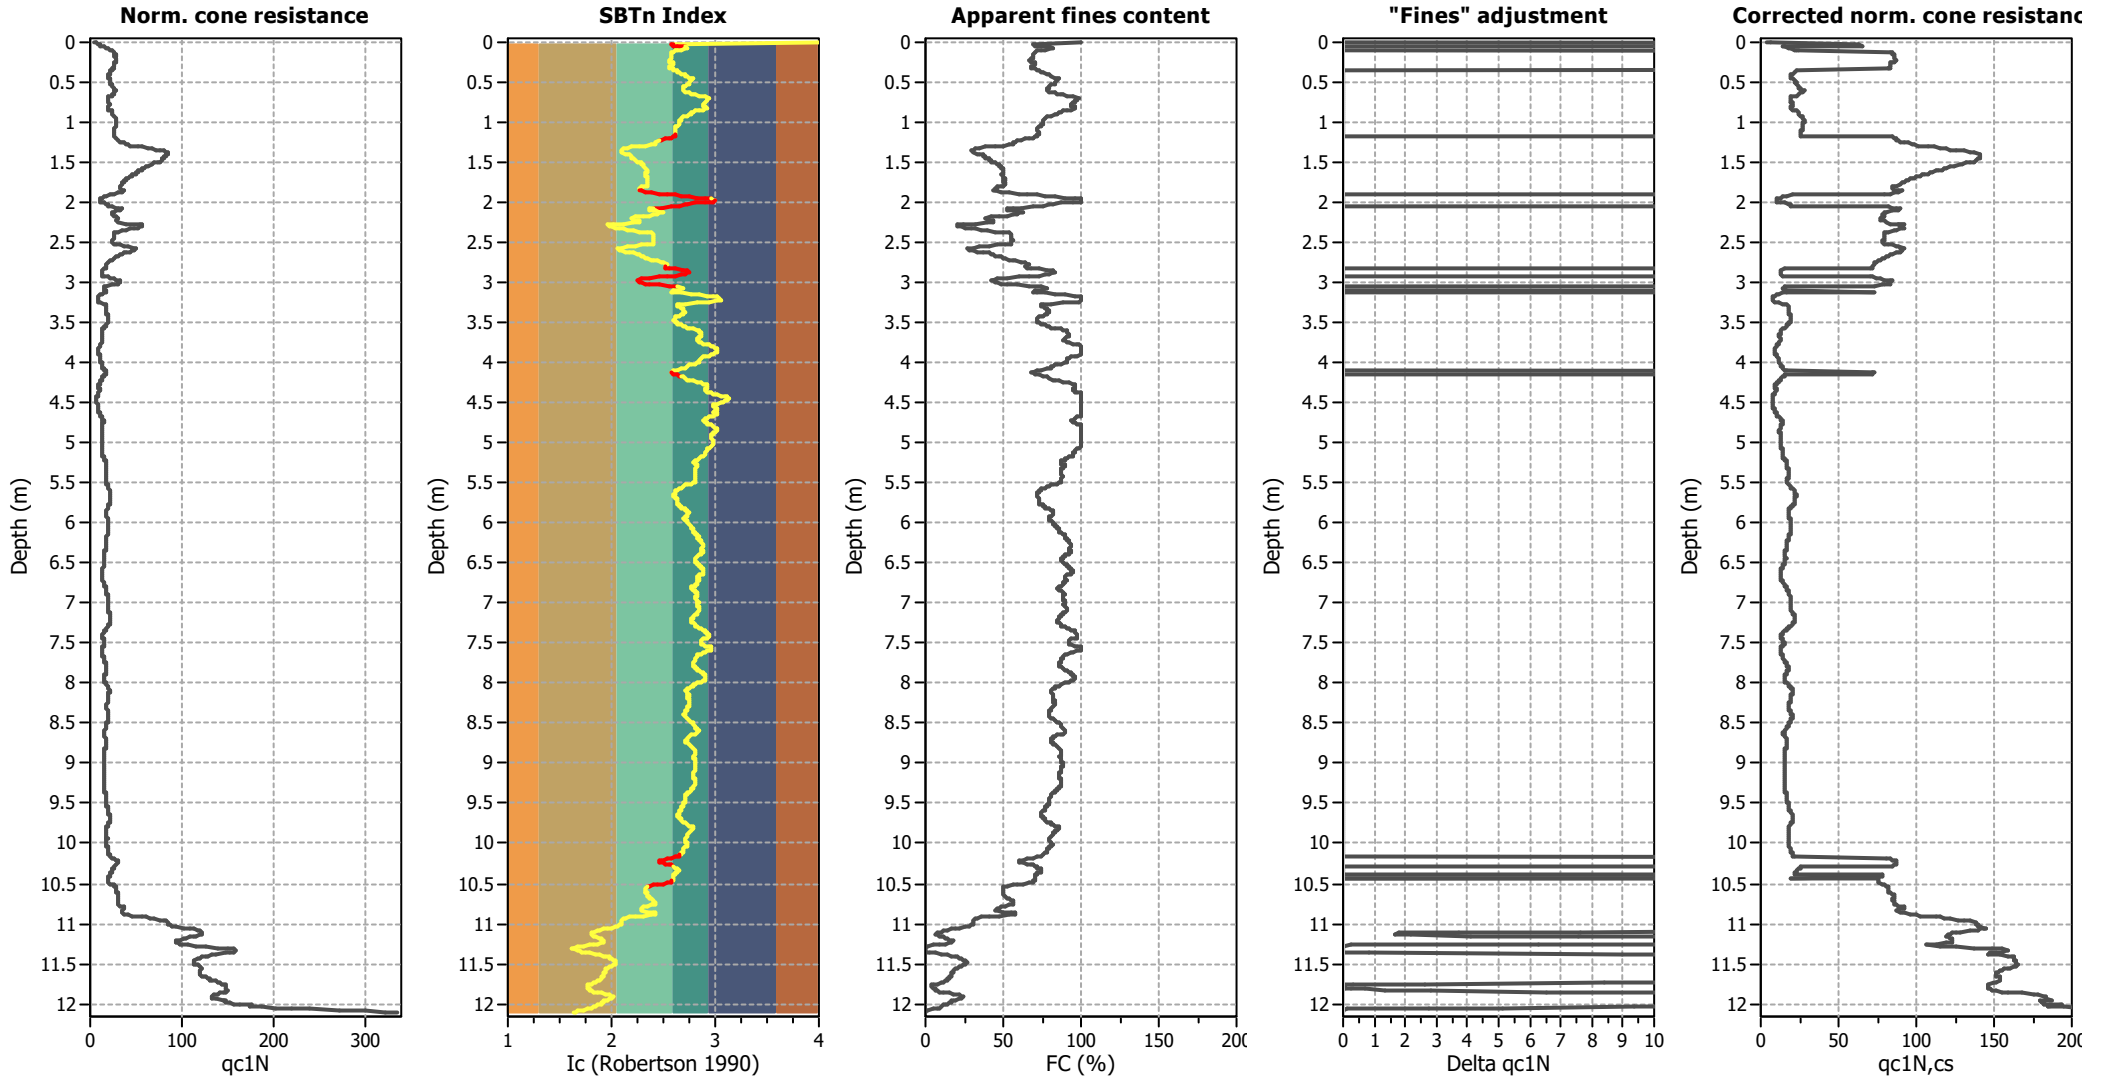

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

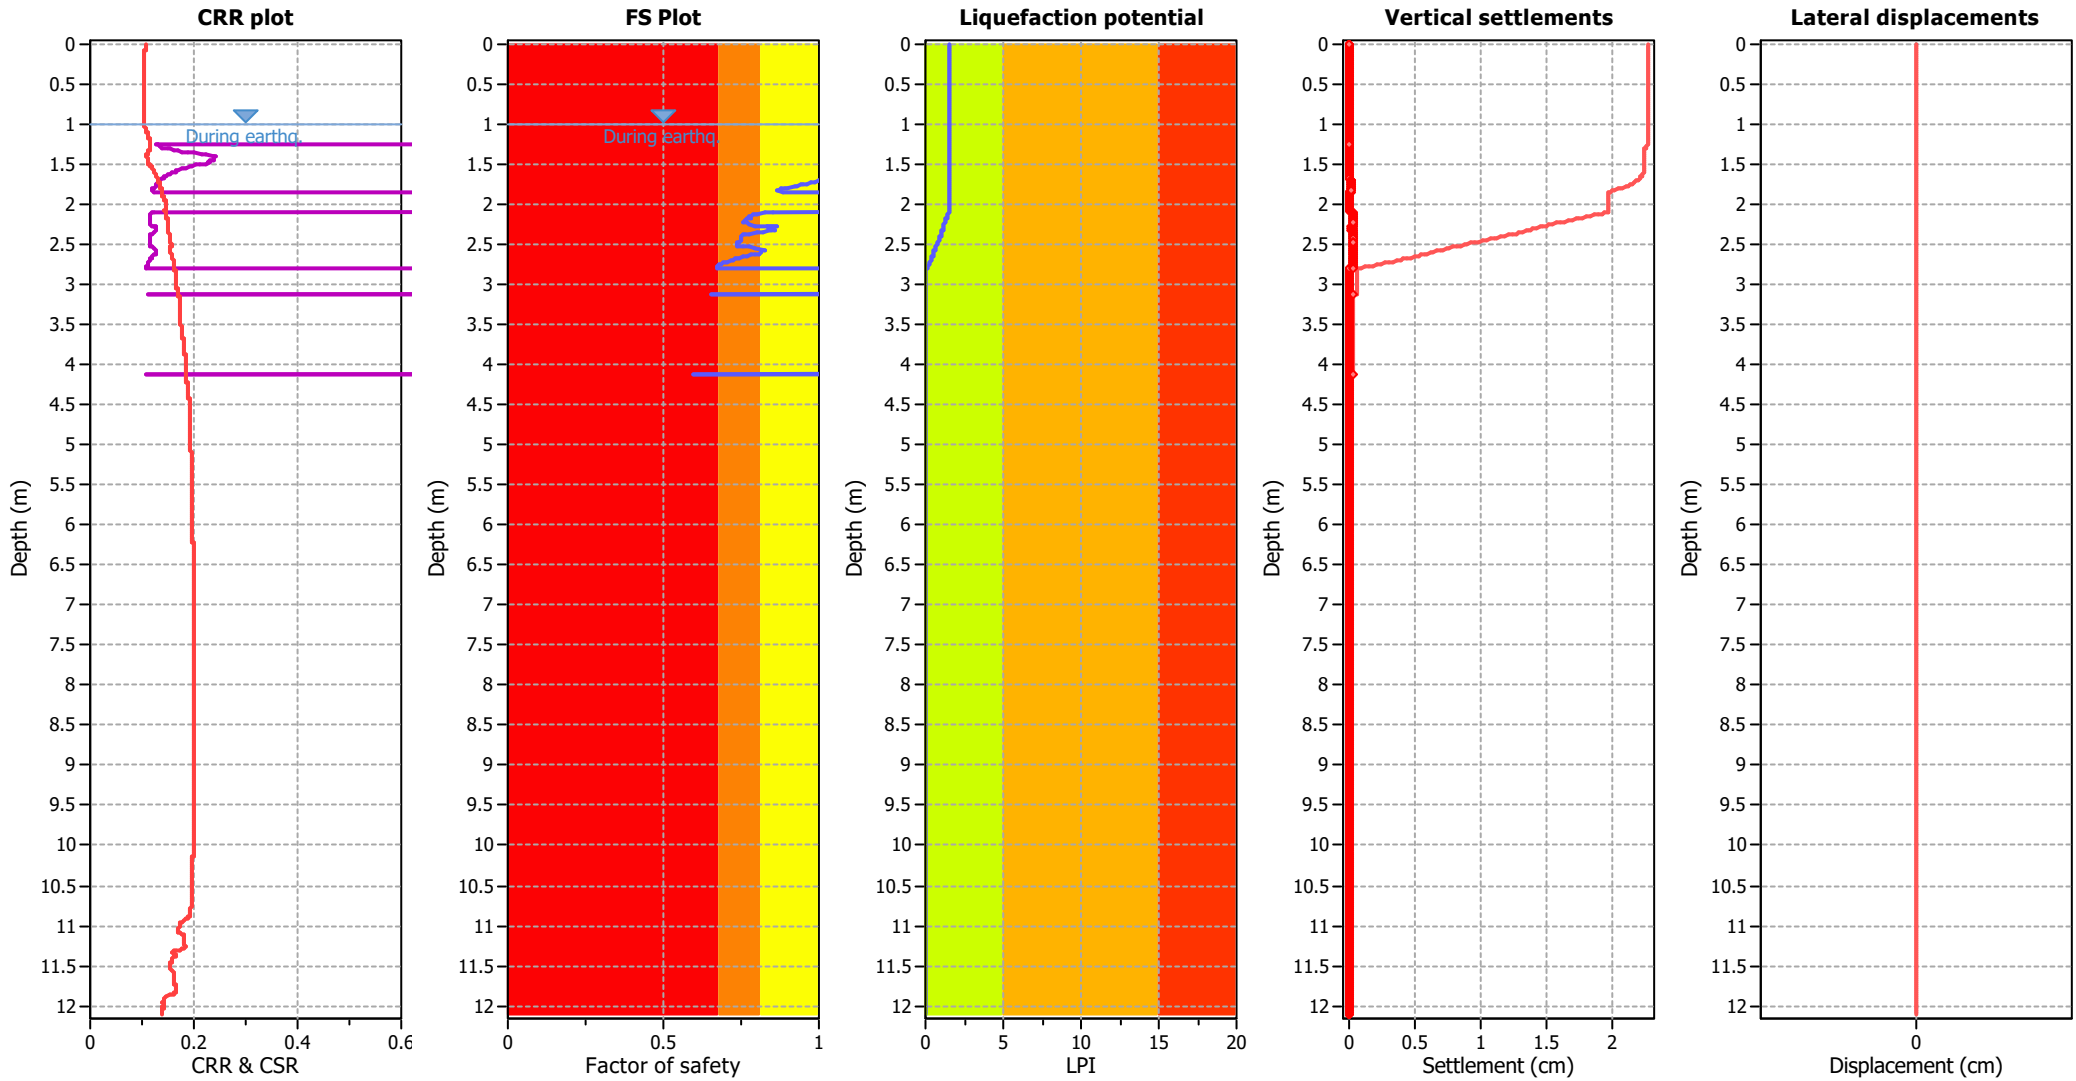

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

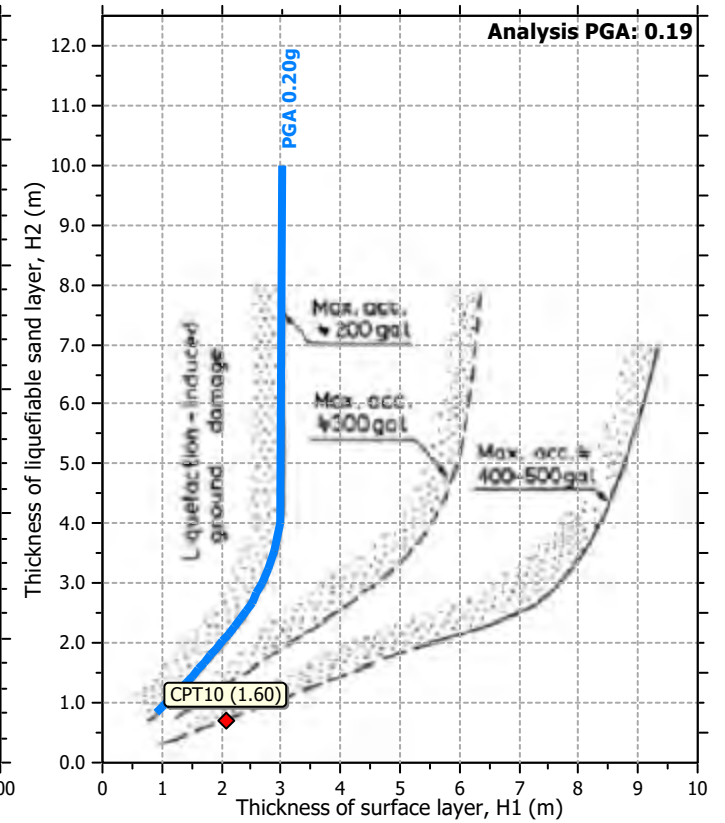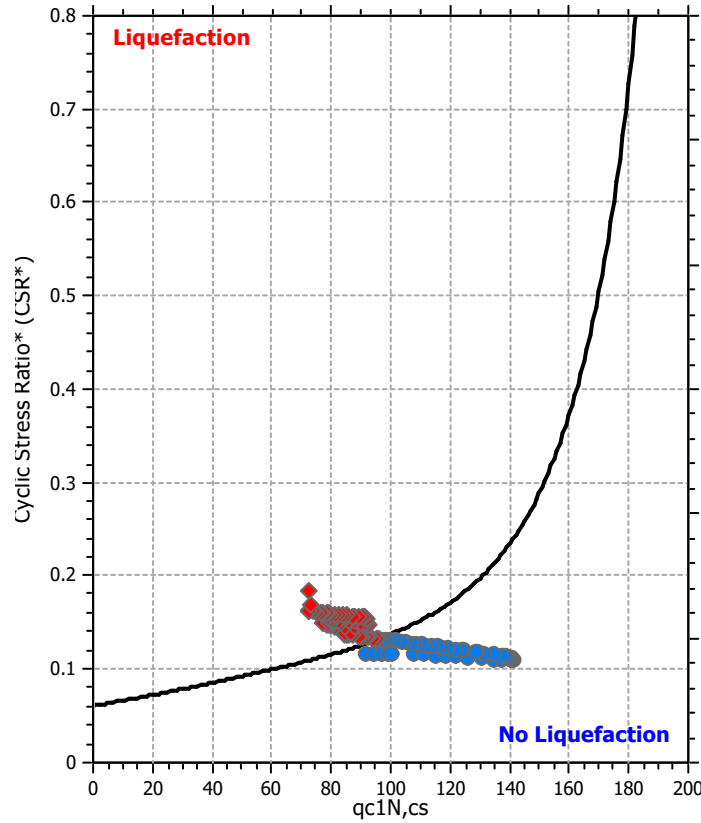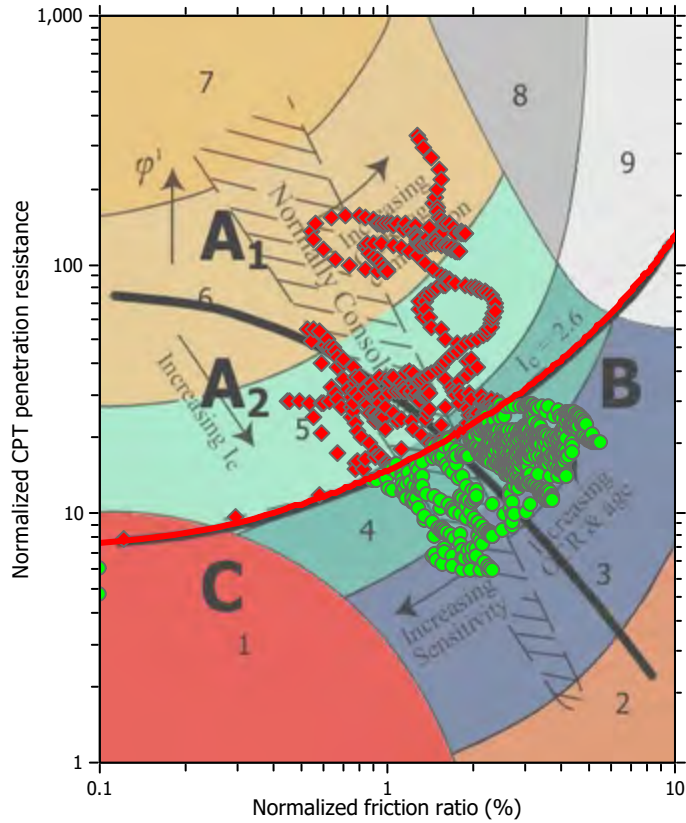

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

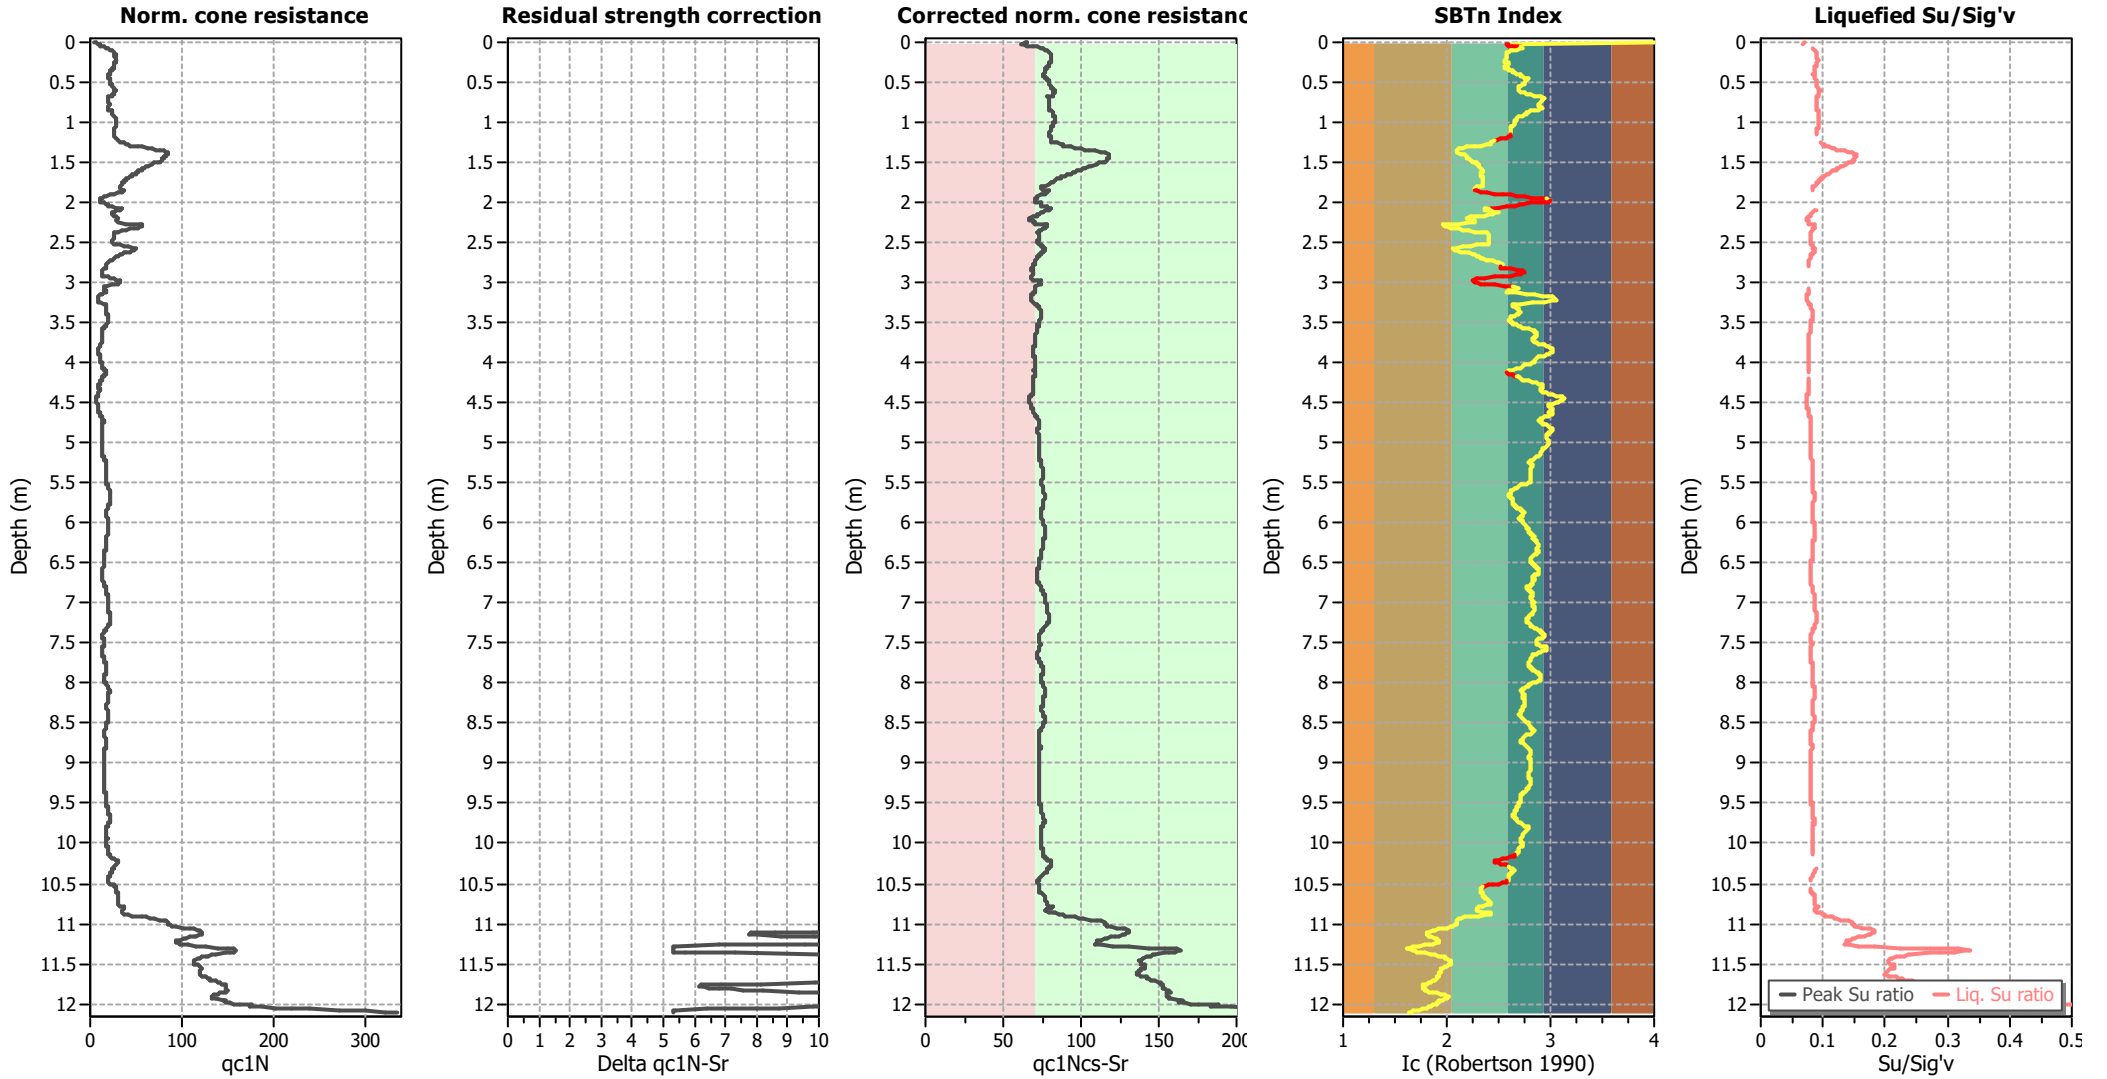

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

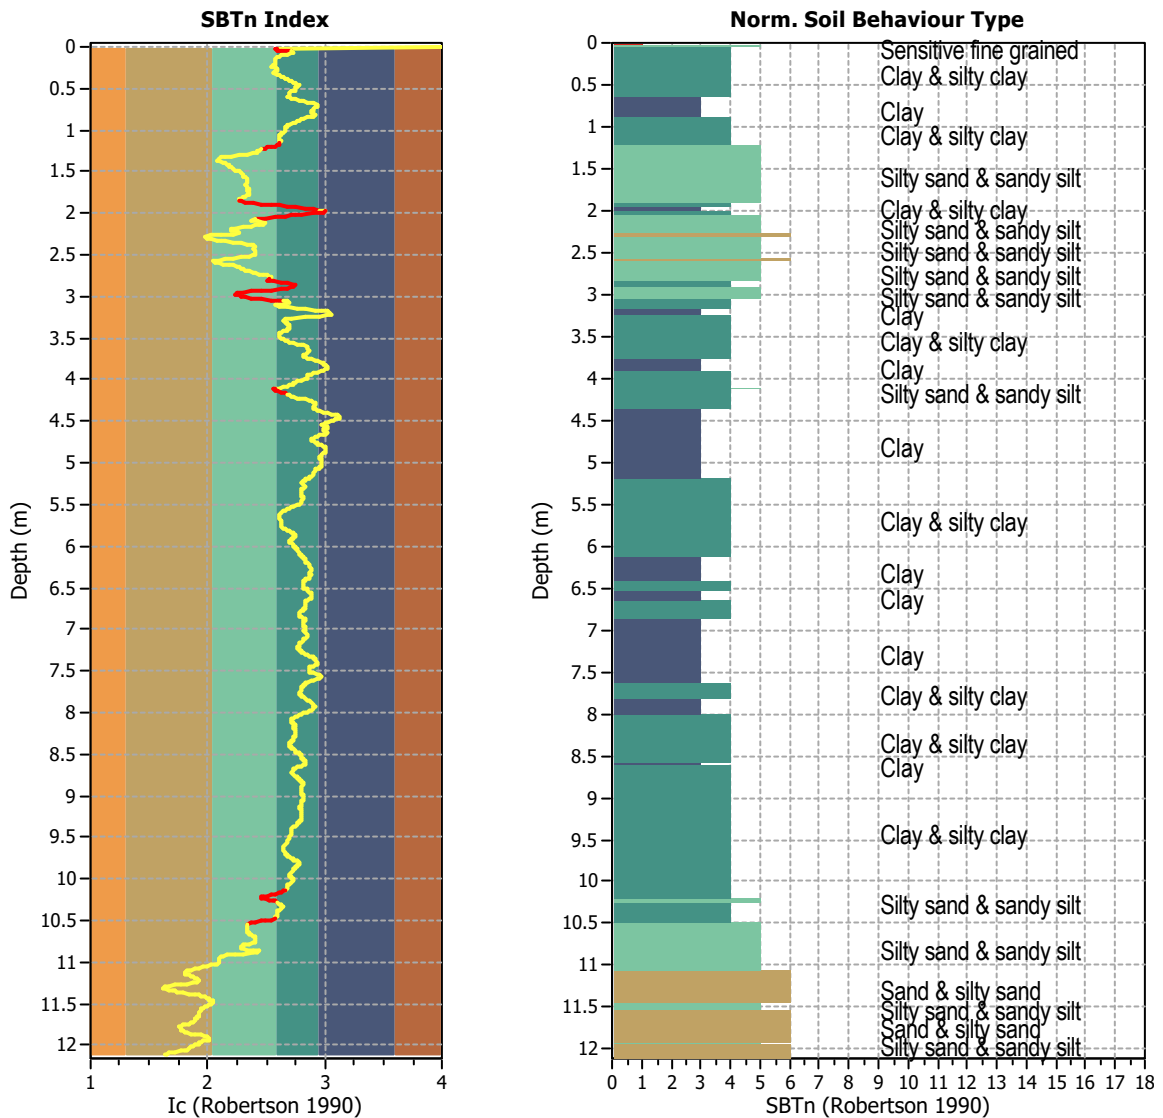


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1212
 Total points excluded: 94
 Exclusion percentage: 7.76%
 Number of layers detected: 11


Estimation of post-earthquake settlements

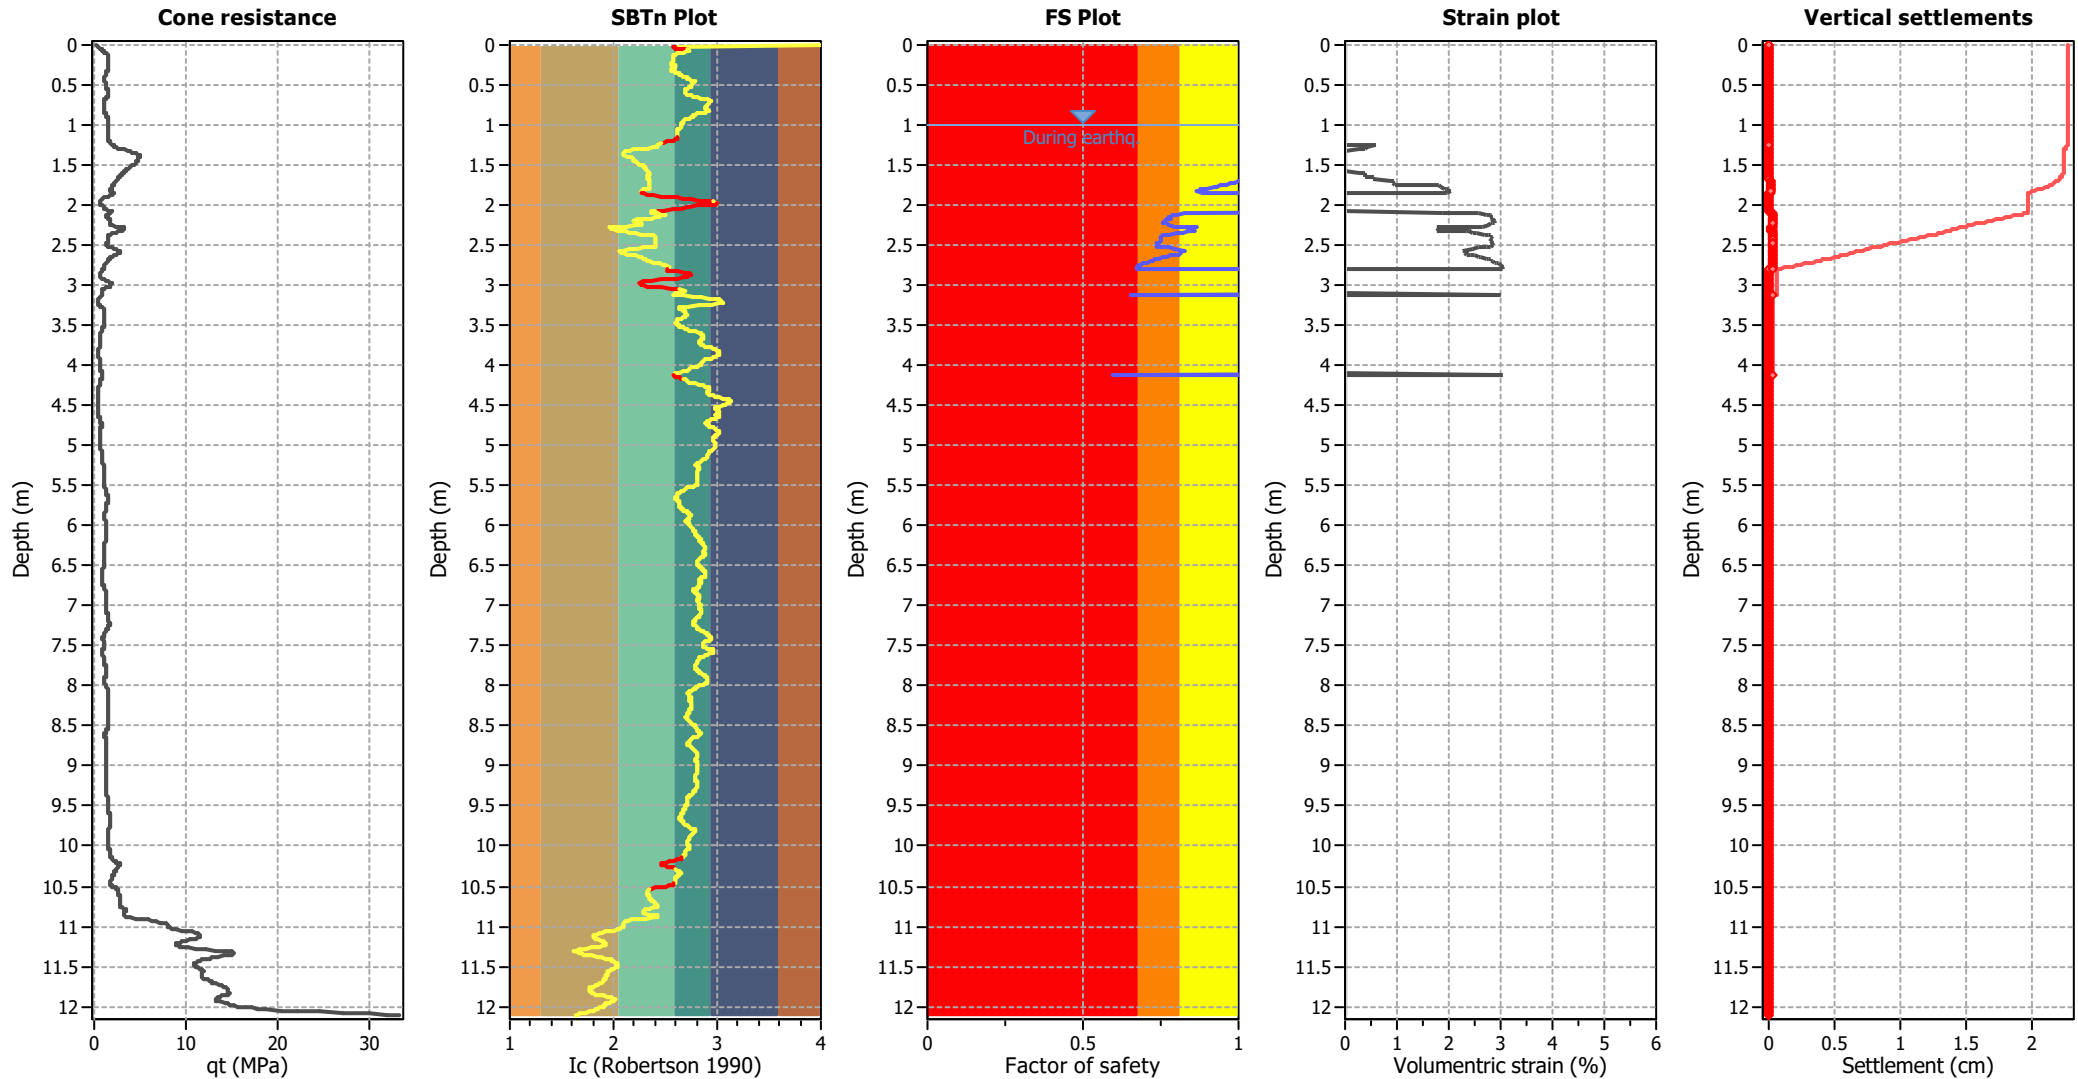

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

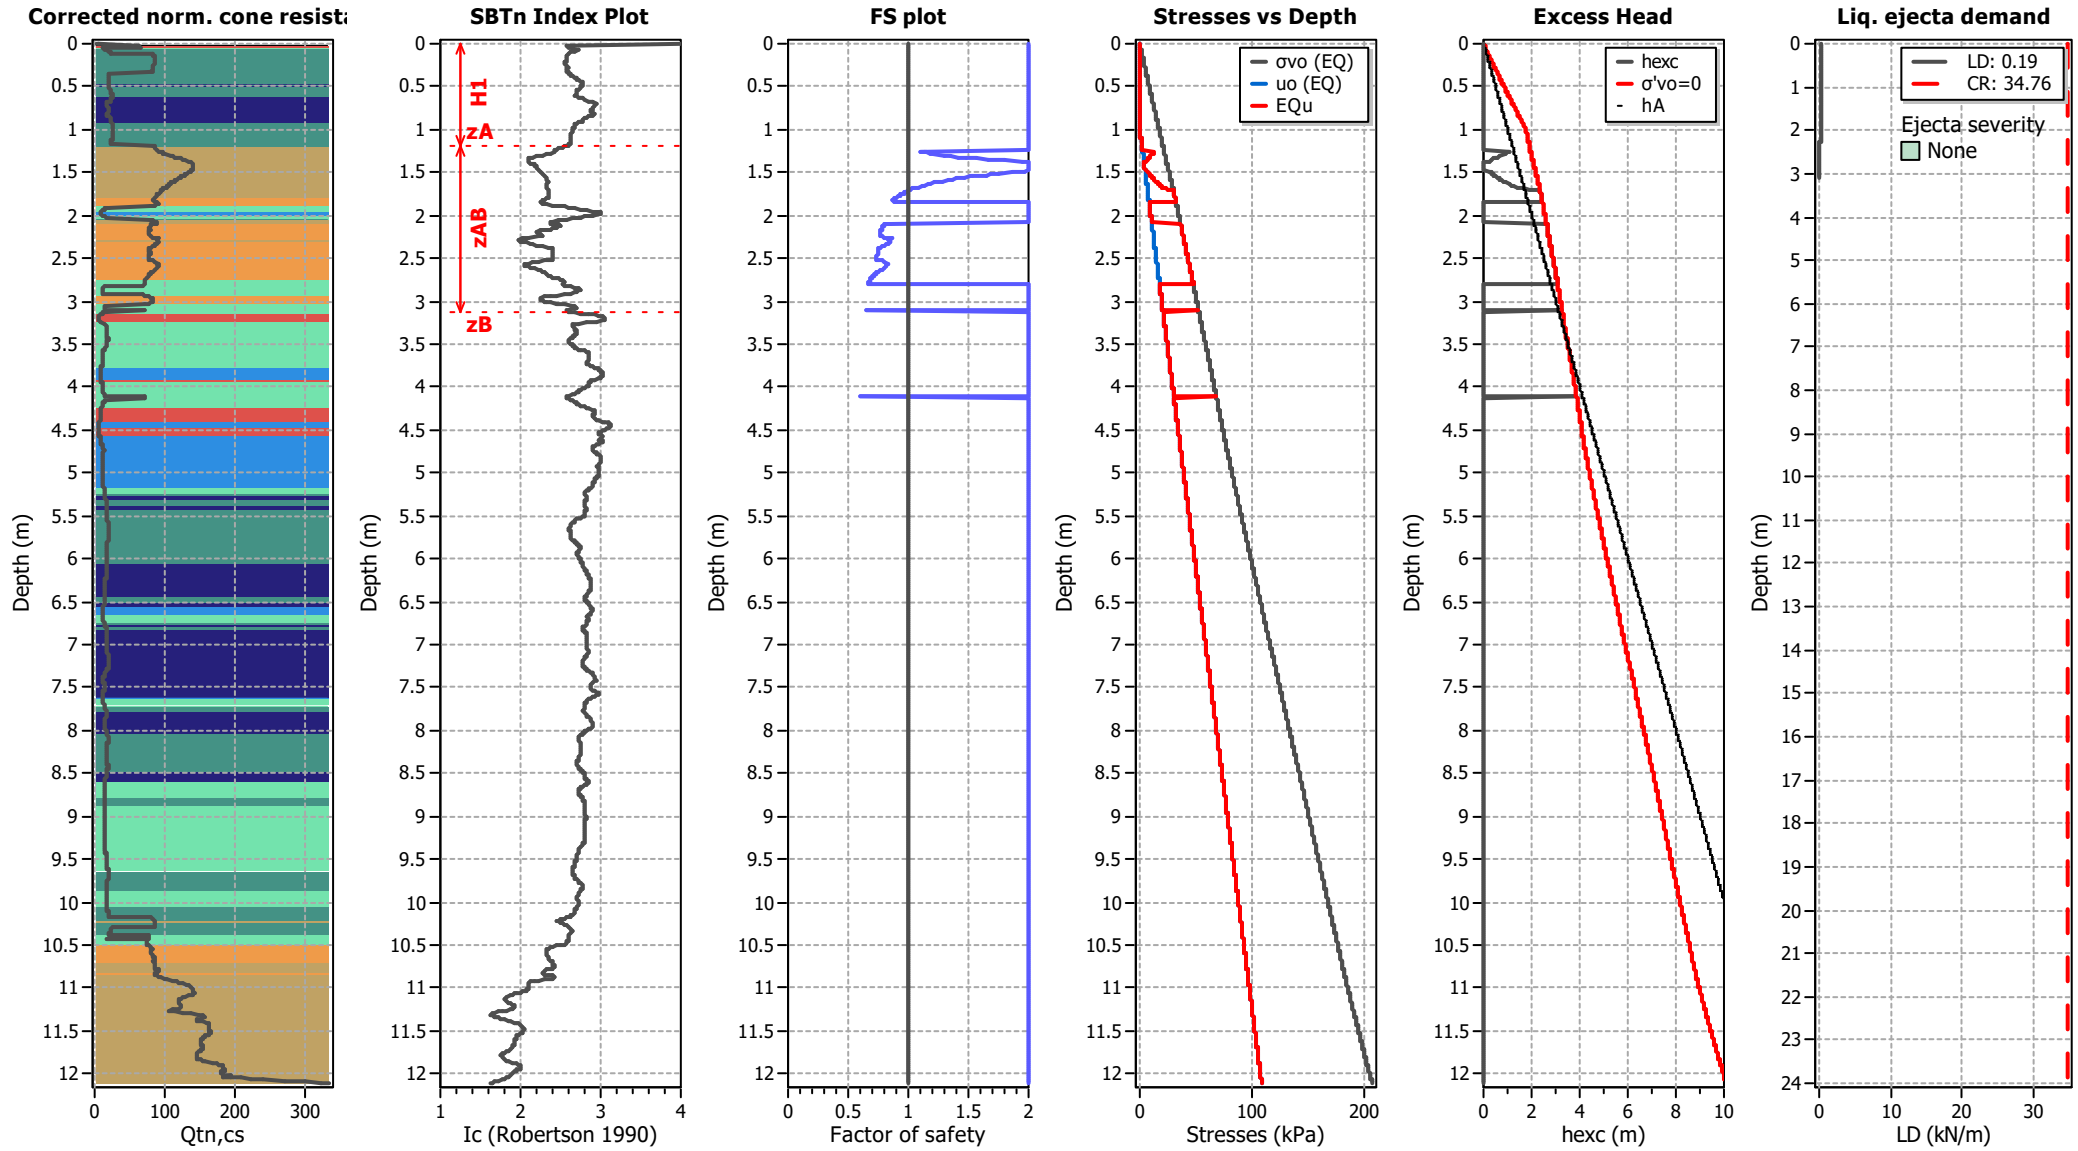

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT11

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

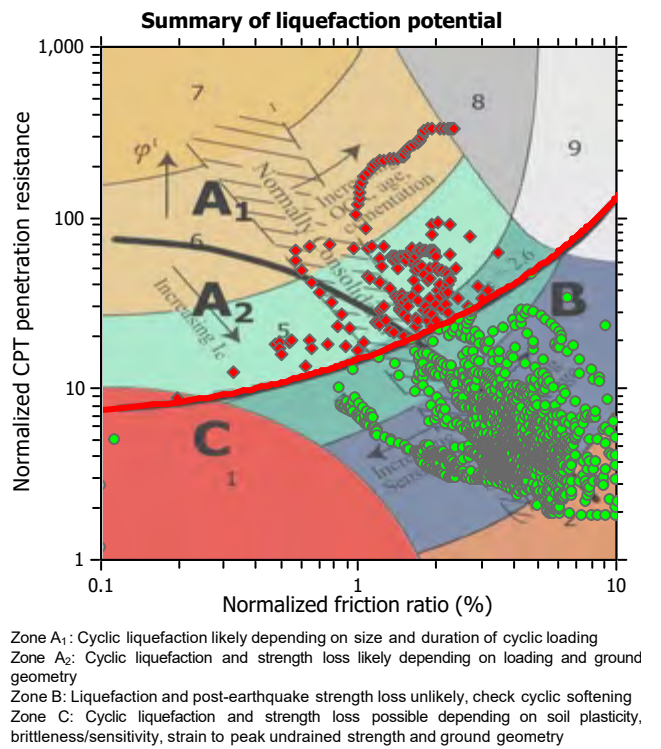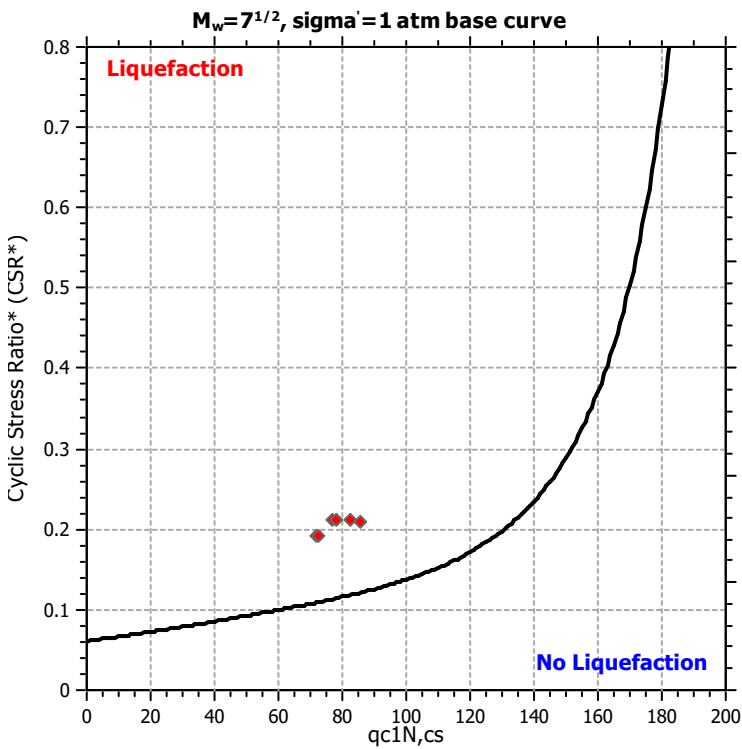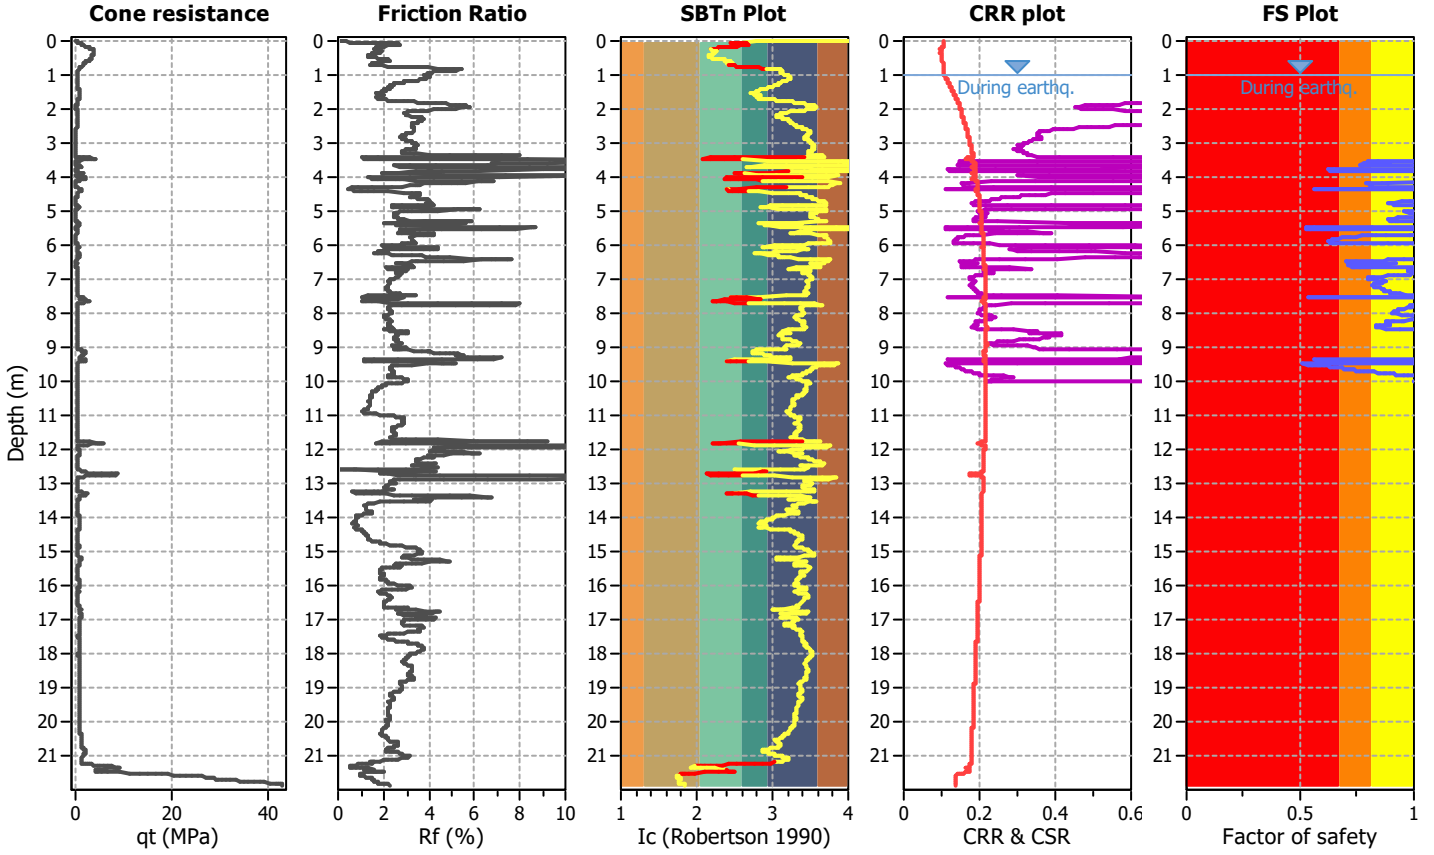

CPT basic interpretation plots

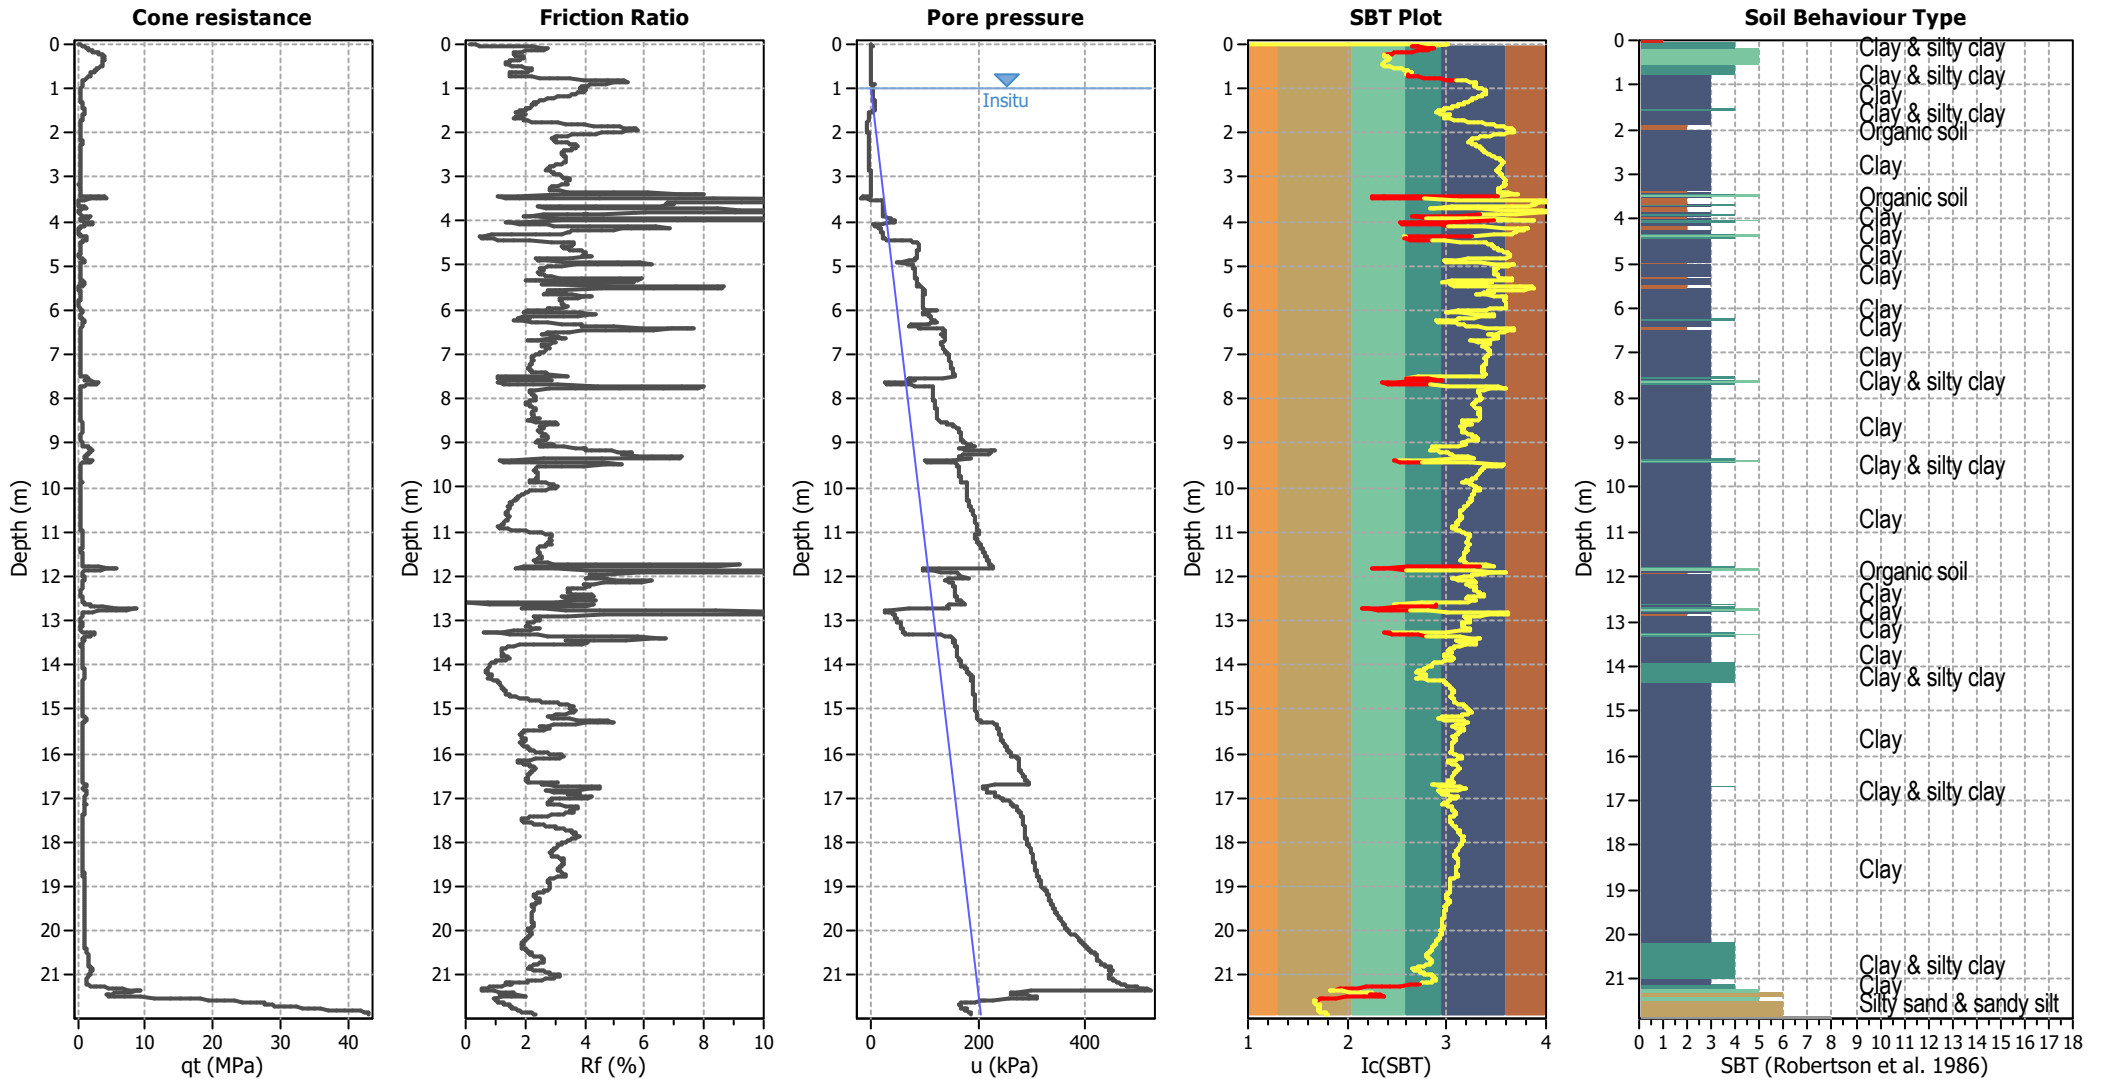


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

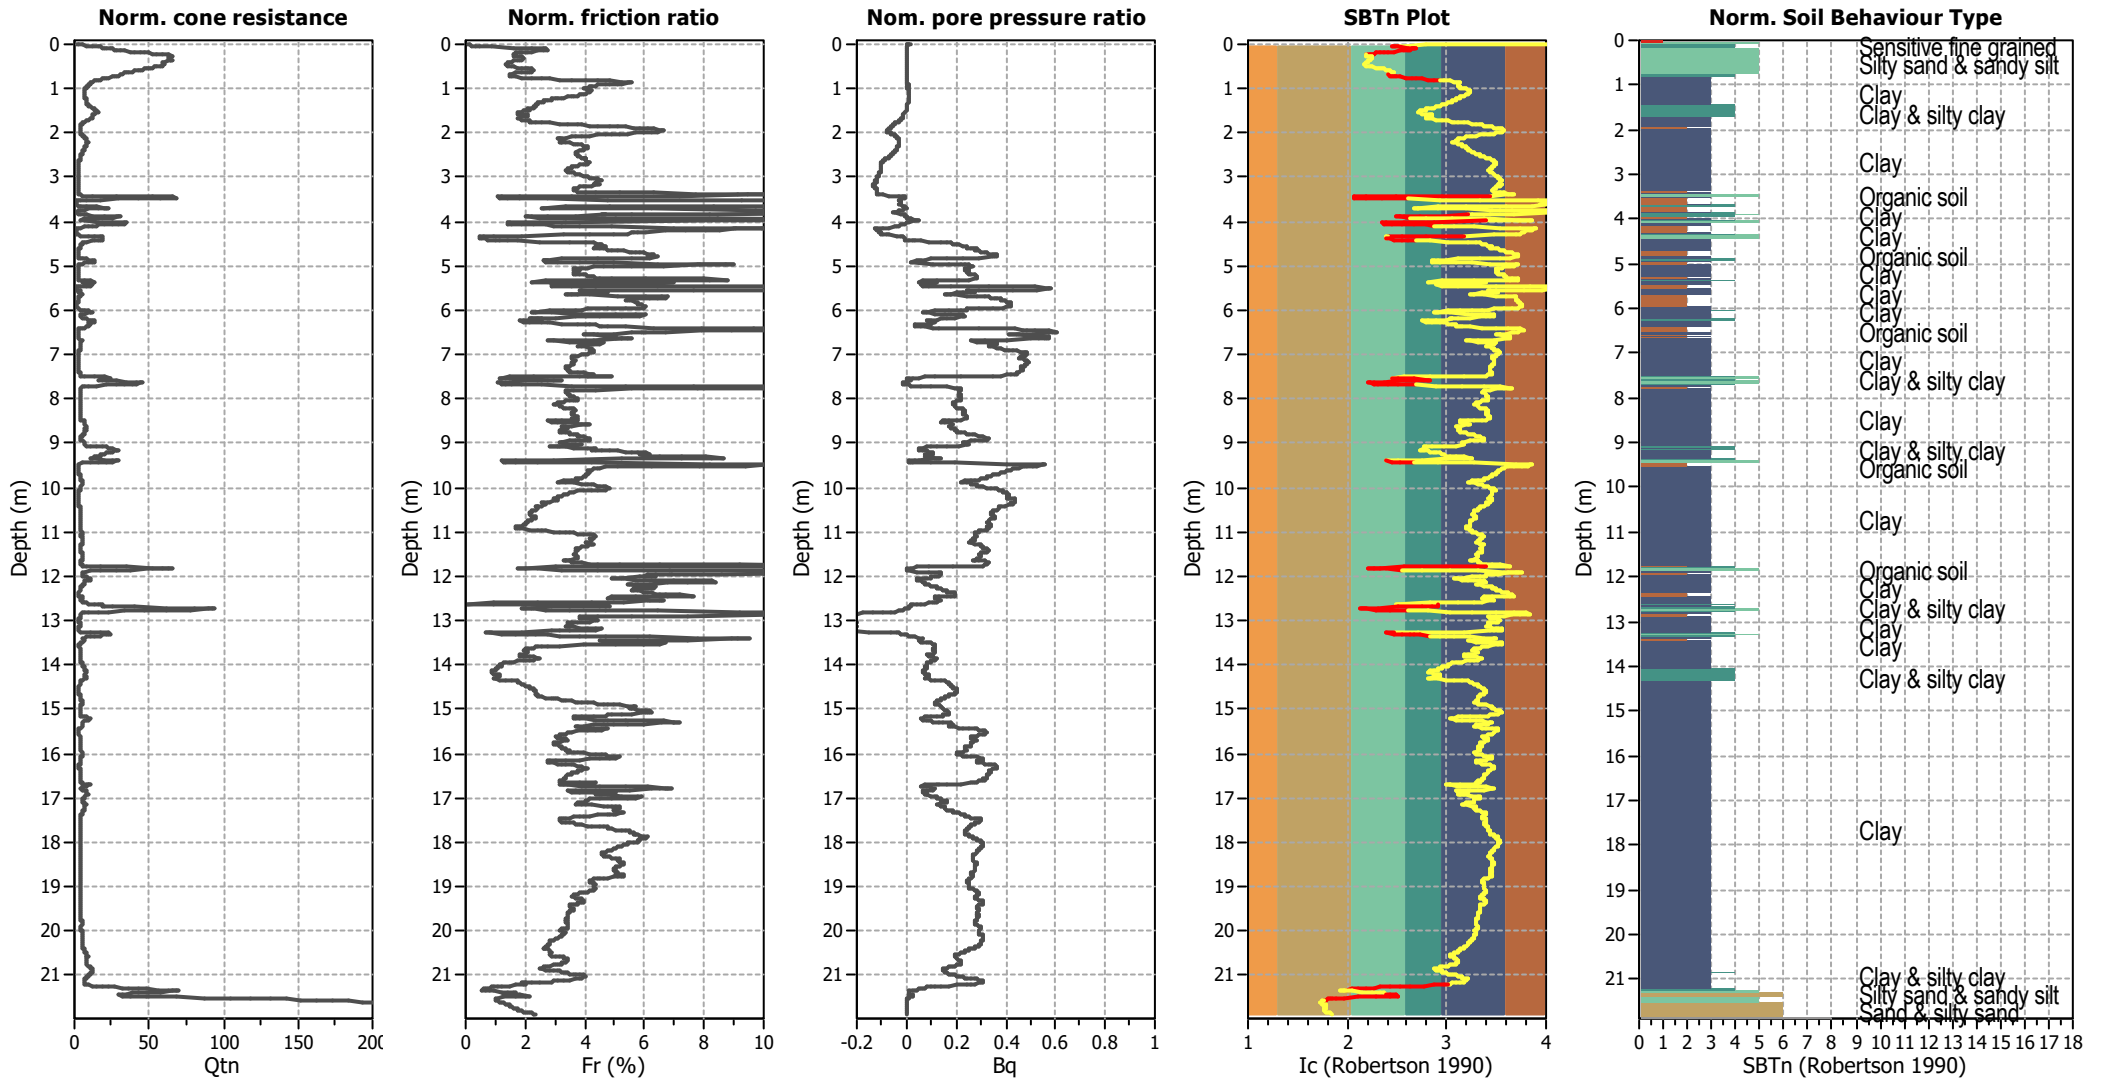


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

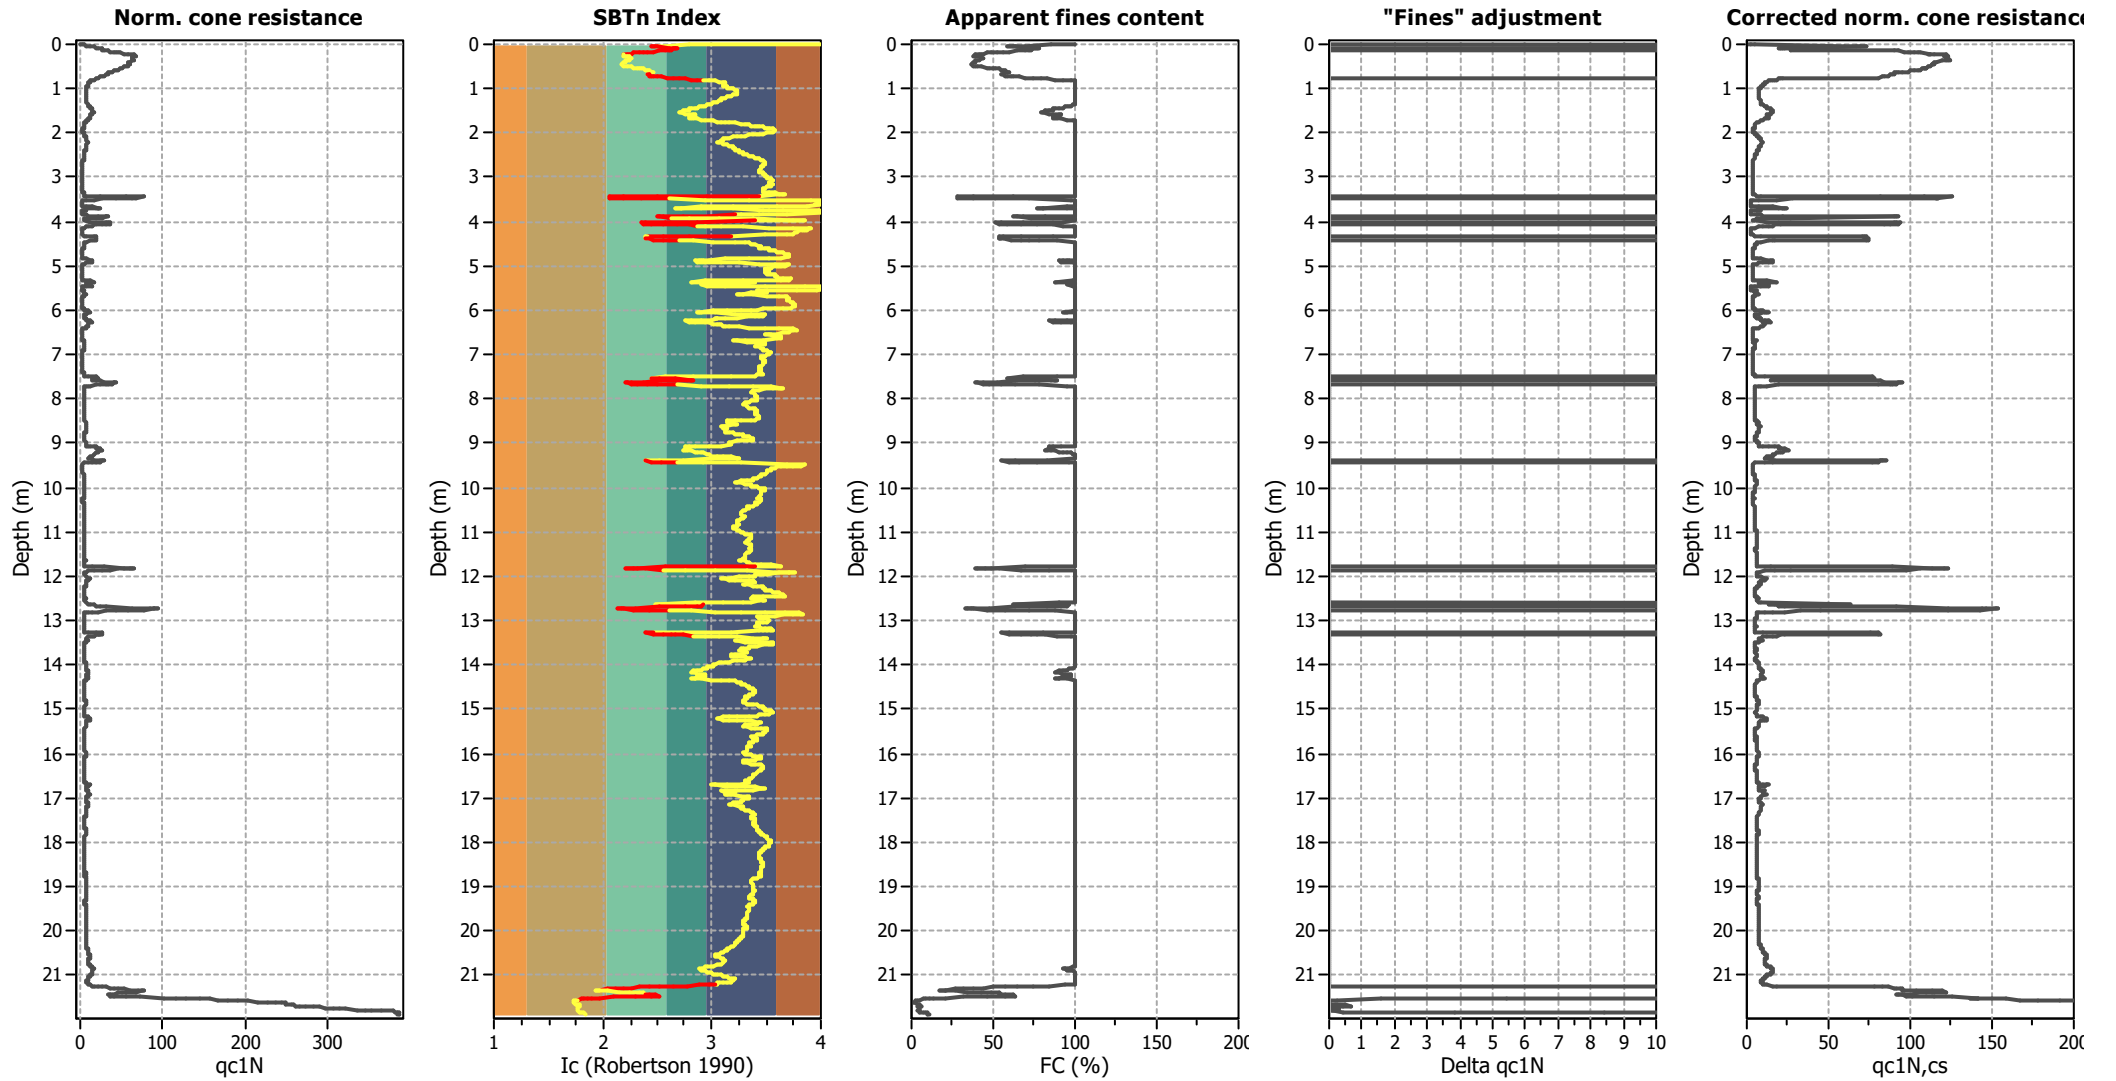

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

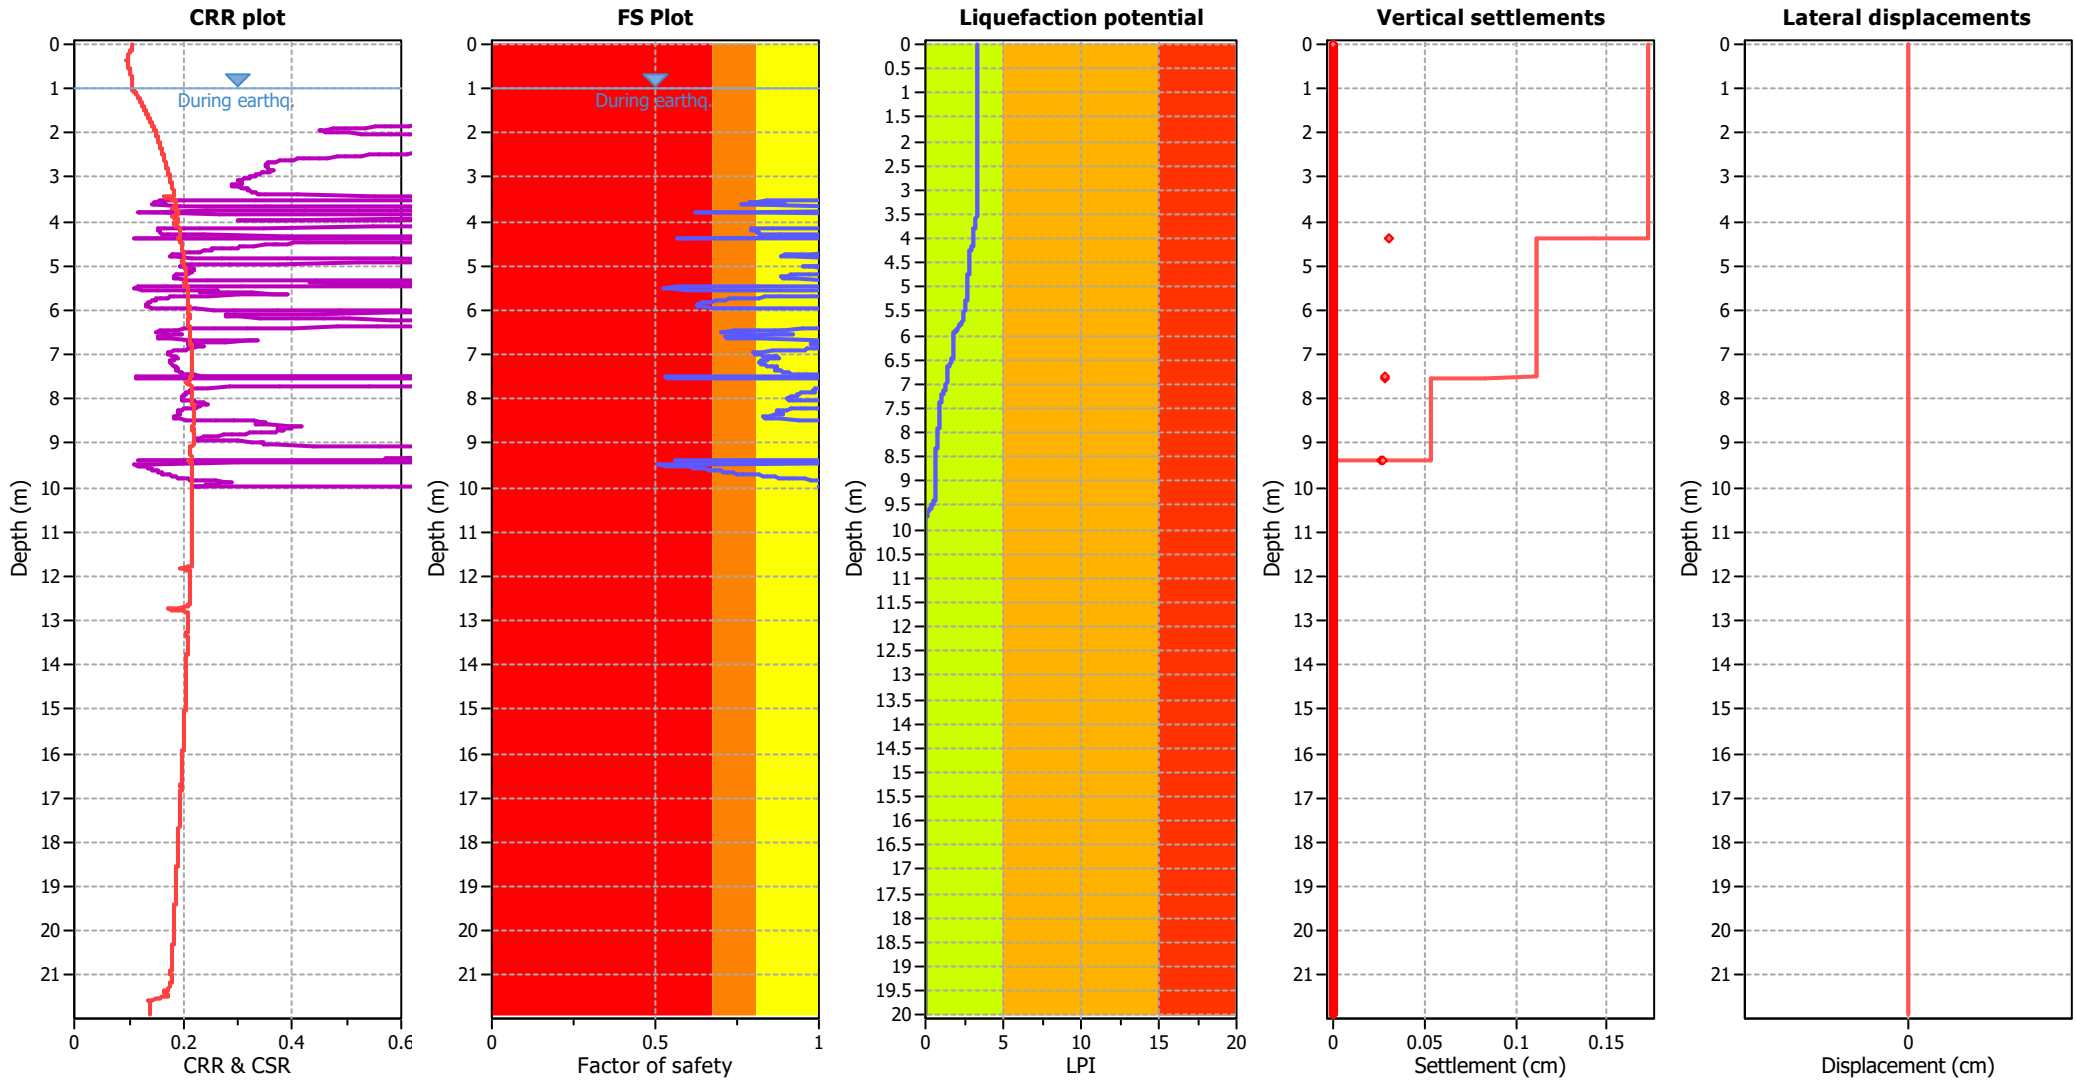

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

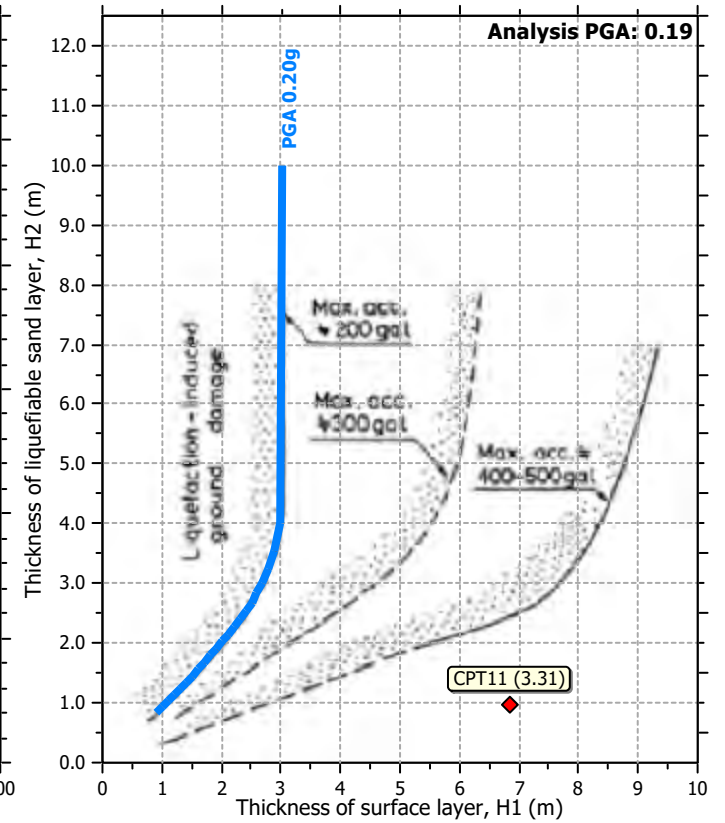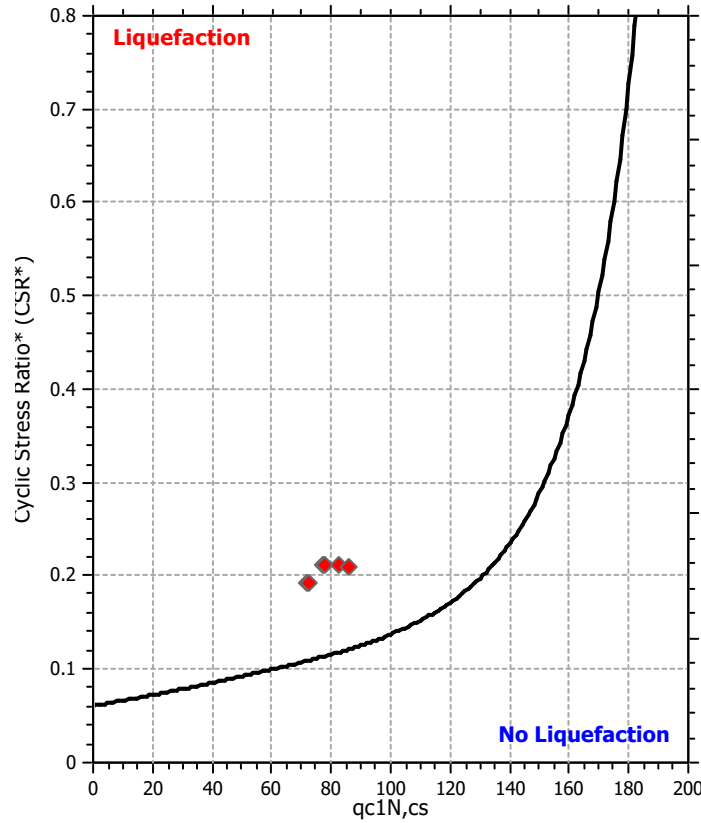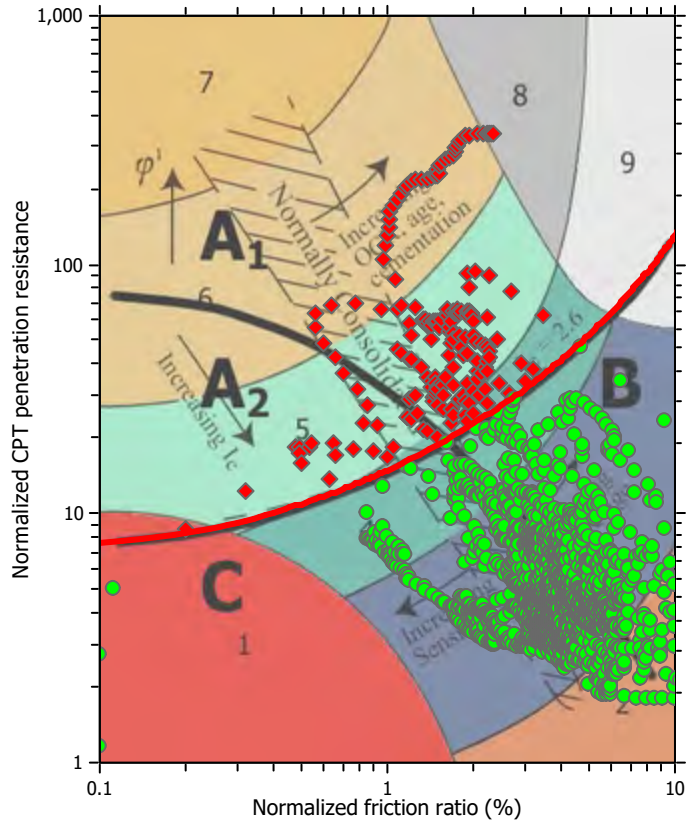

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

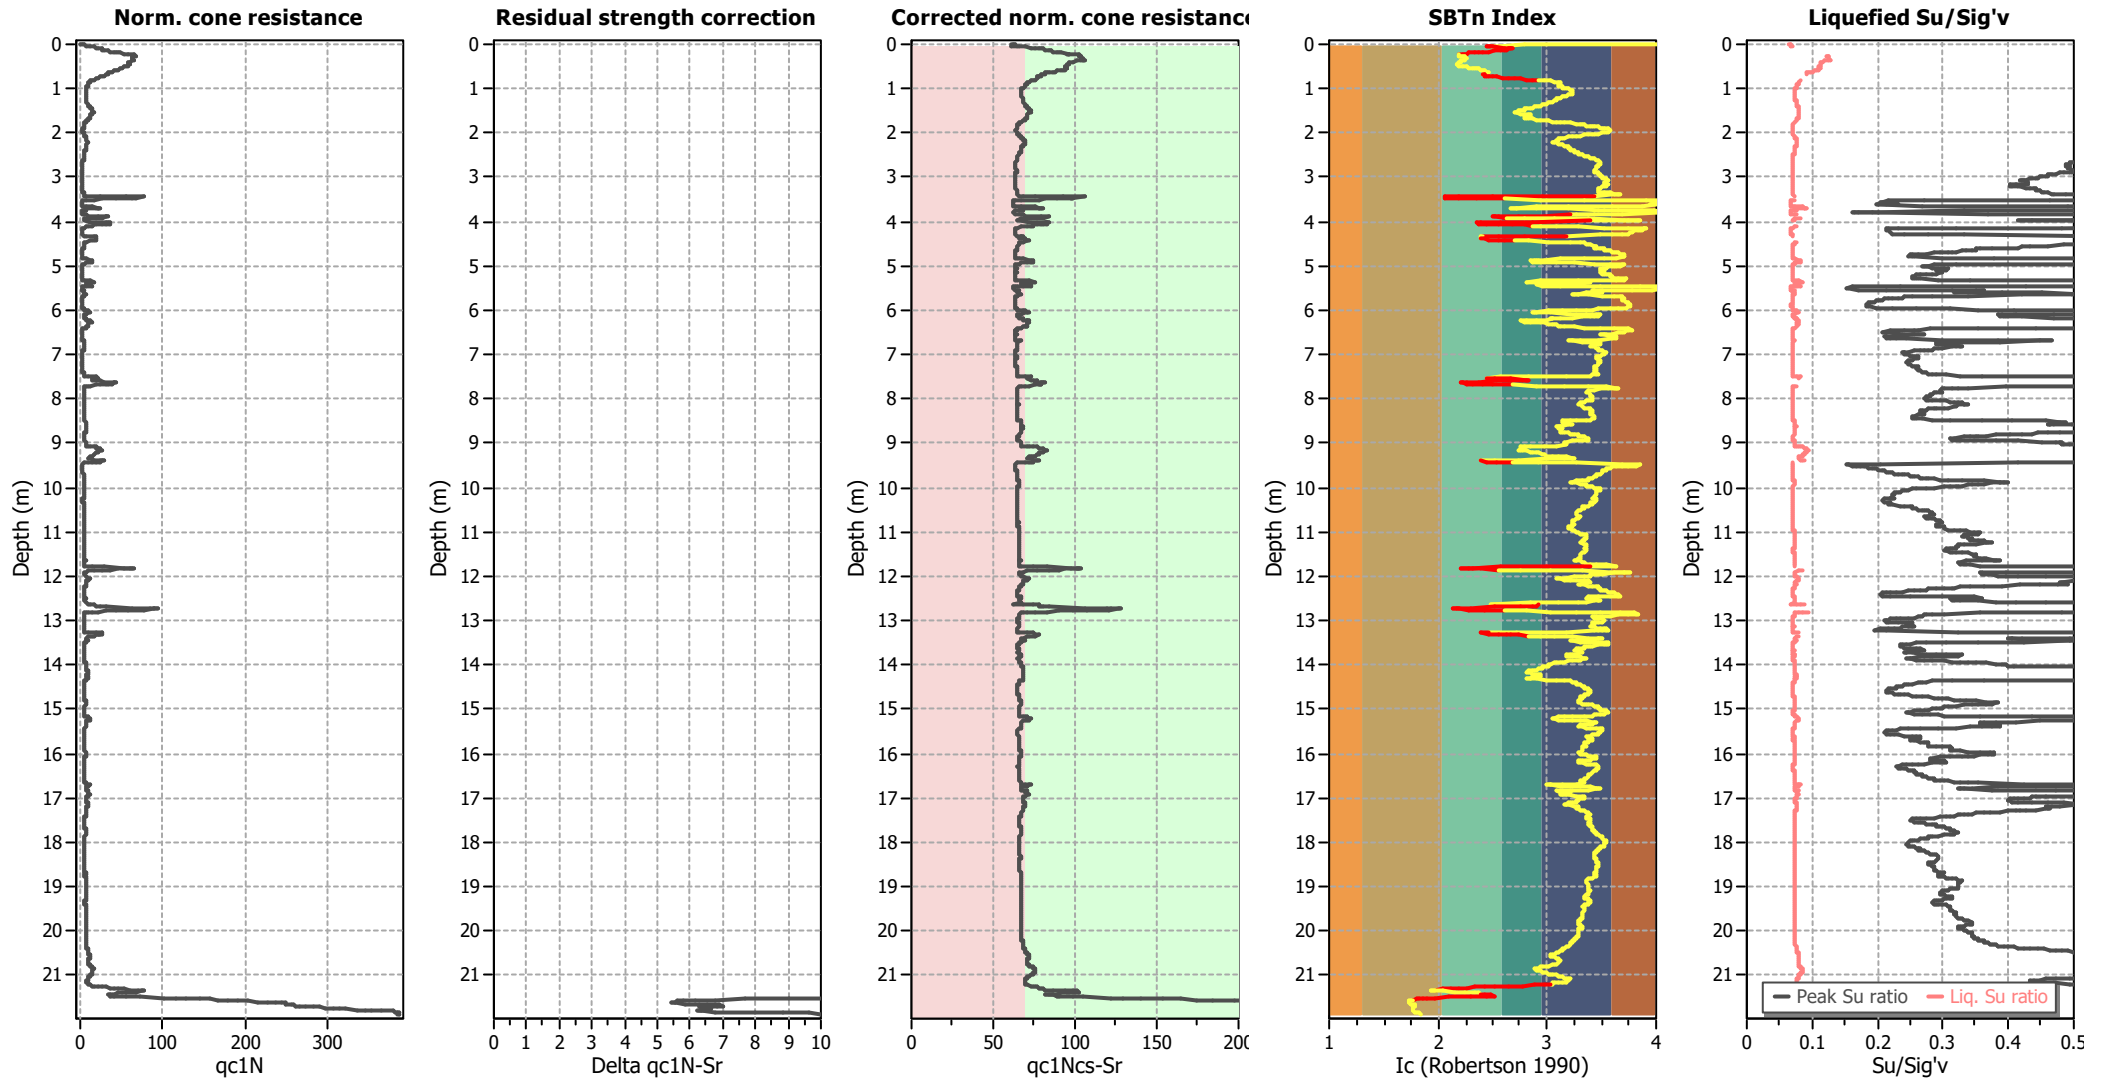

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

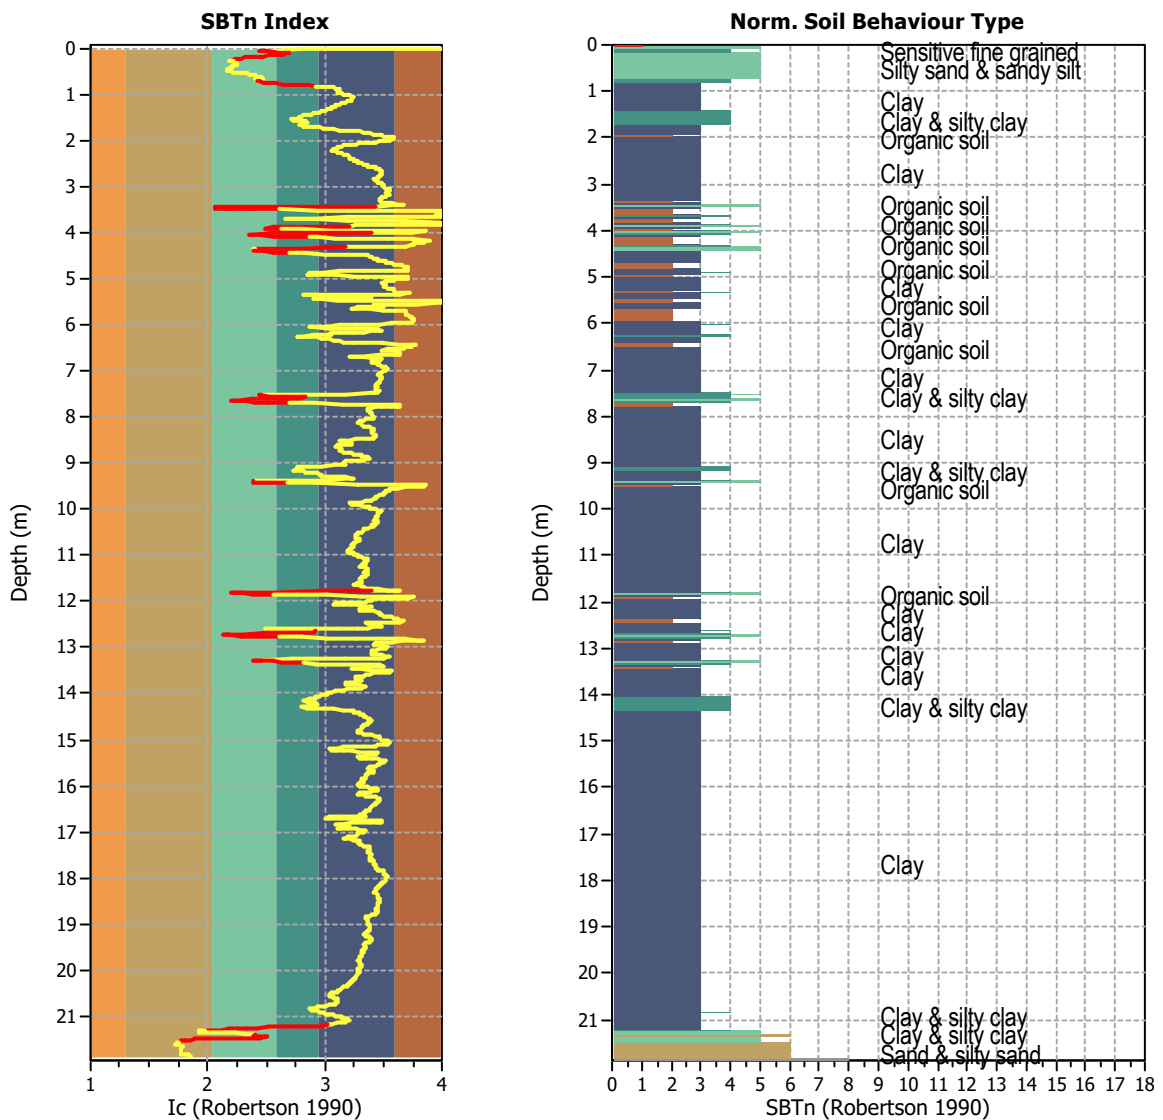


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2189
 Total points excluded: 161
 Exclusion percentage: 7.35%
 Number of layers detected: 23


Estimation of post-earthquake settlements

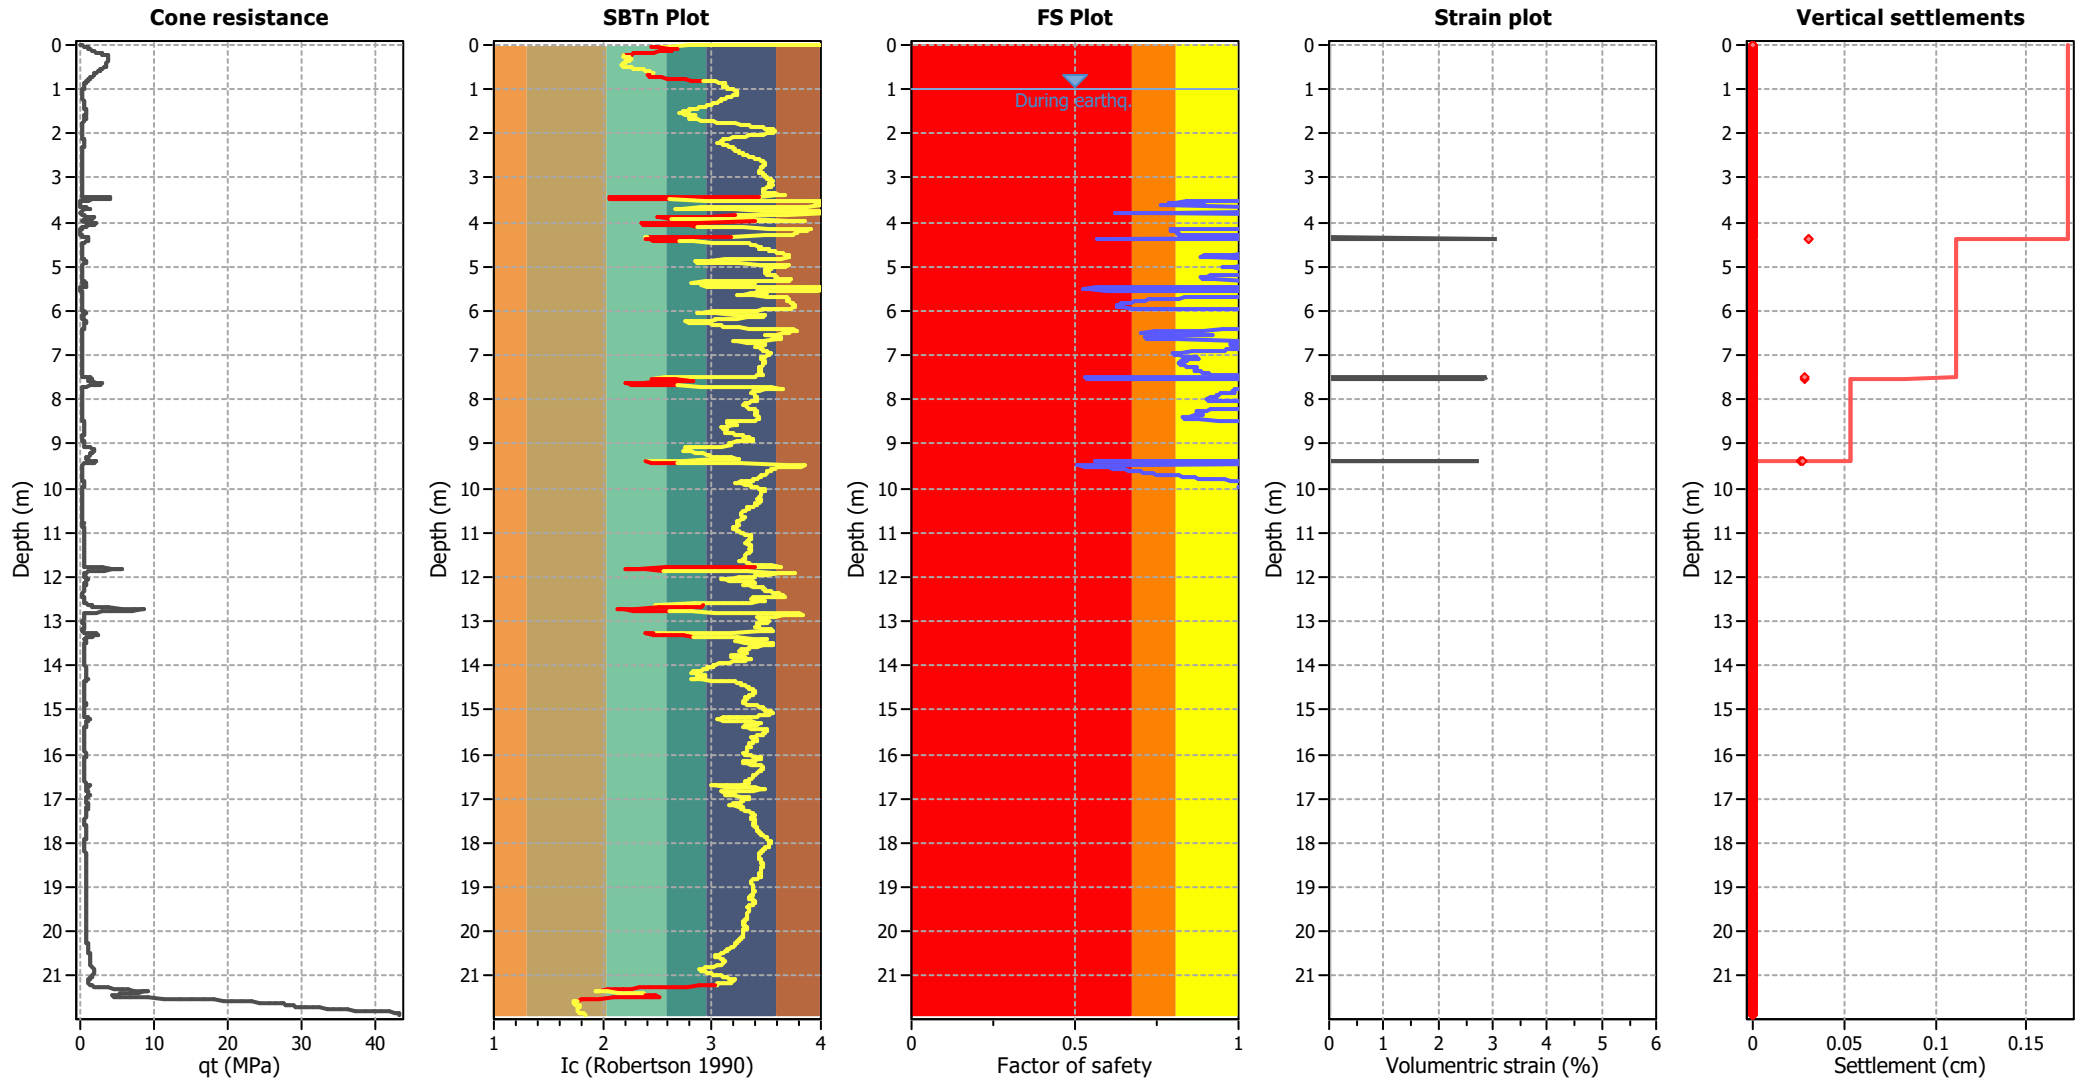

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

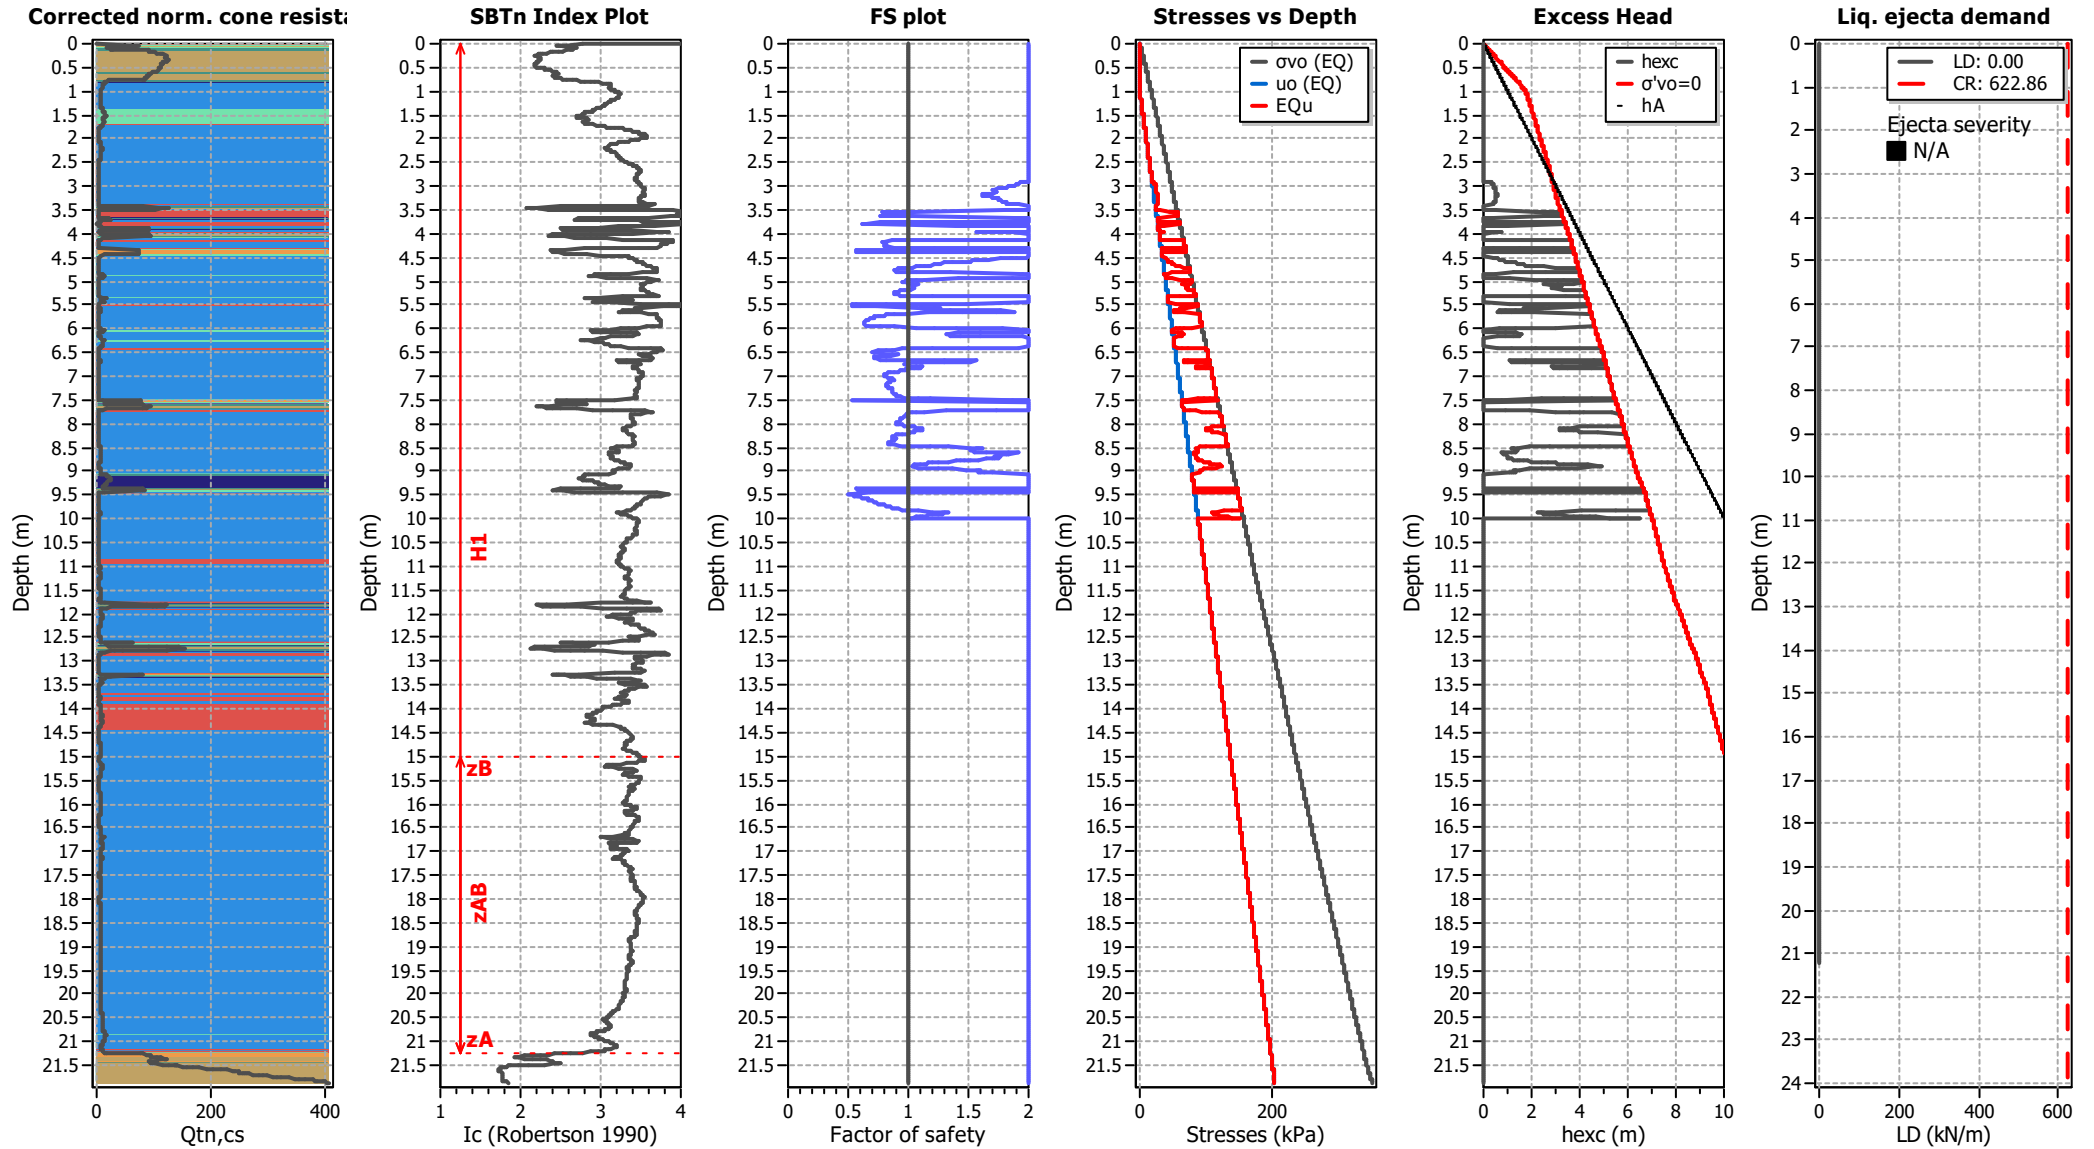

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT12

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

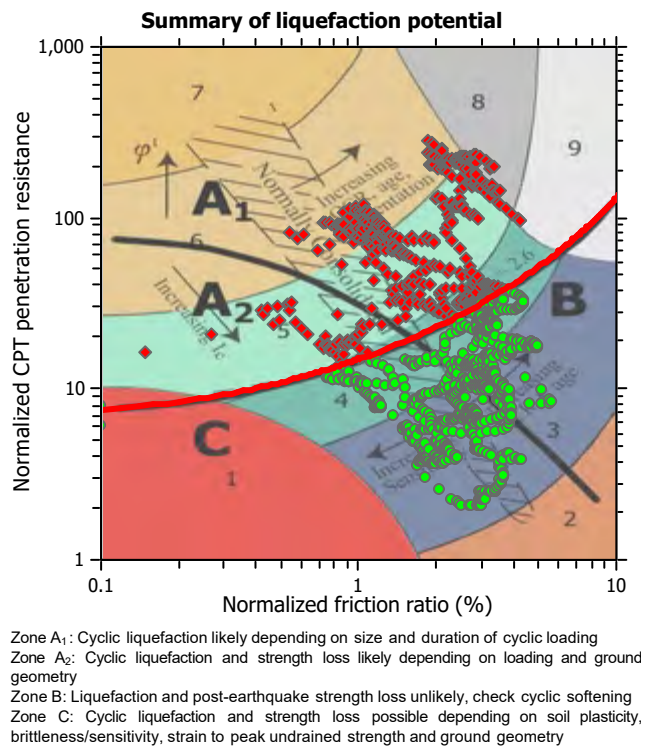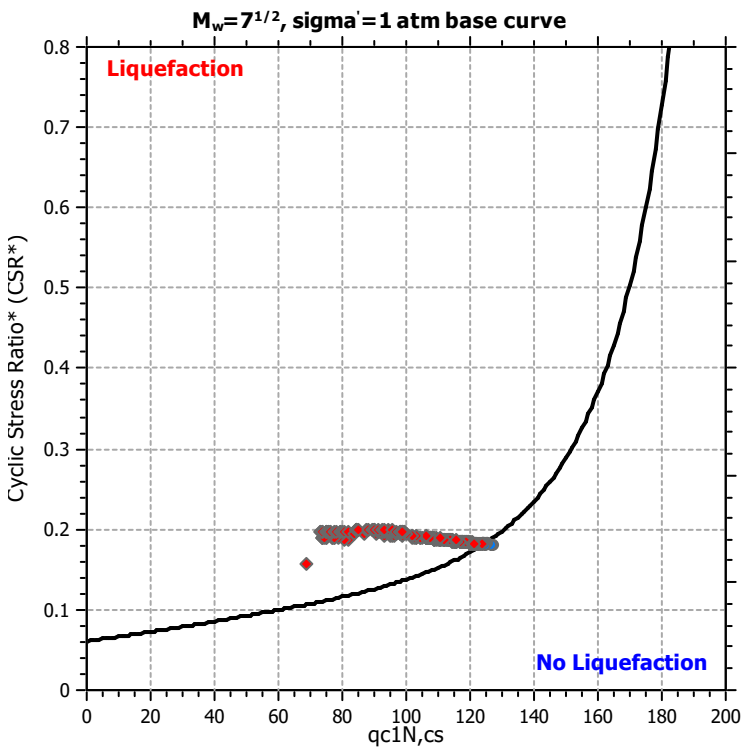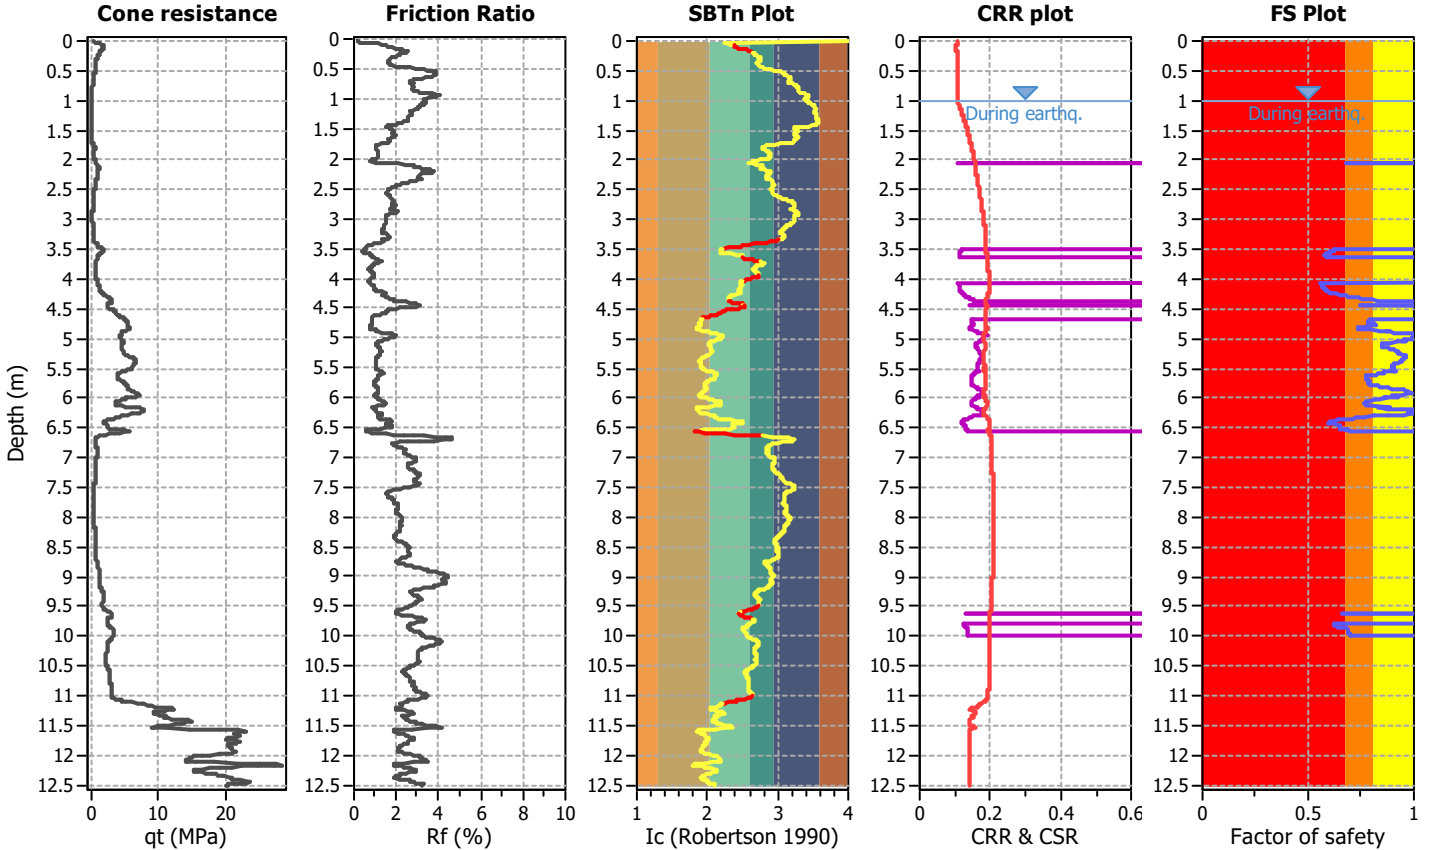

CPT basic interpretation plots

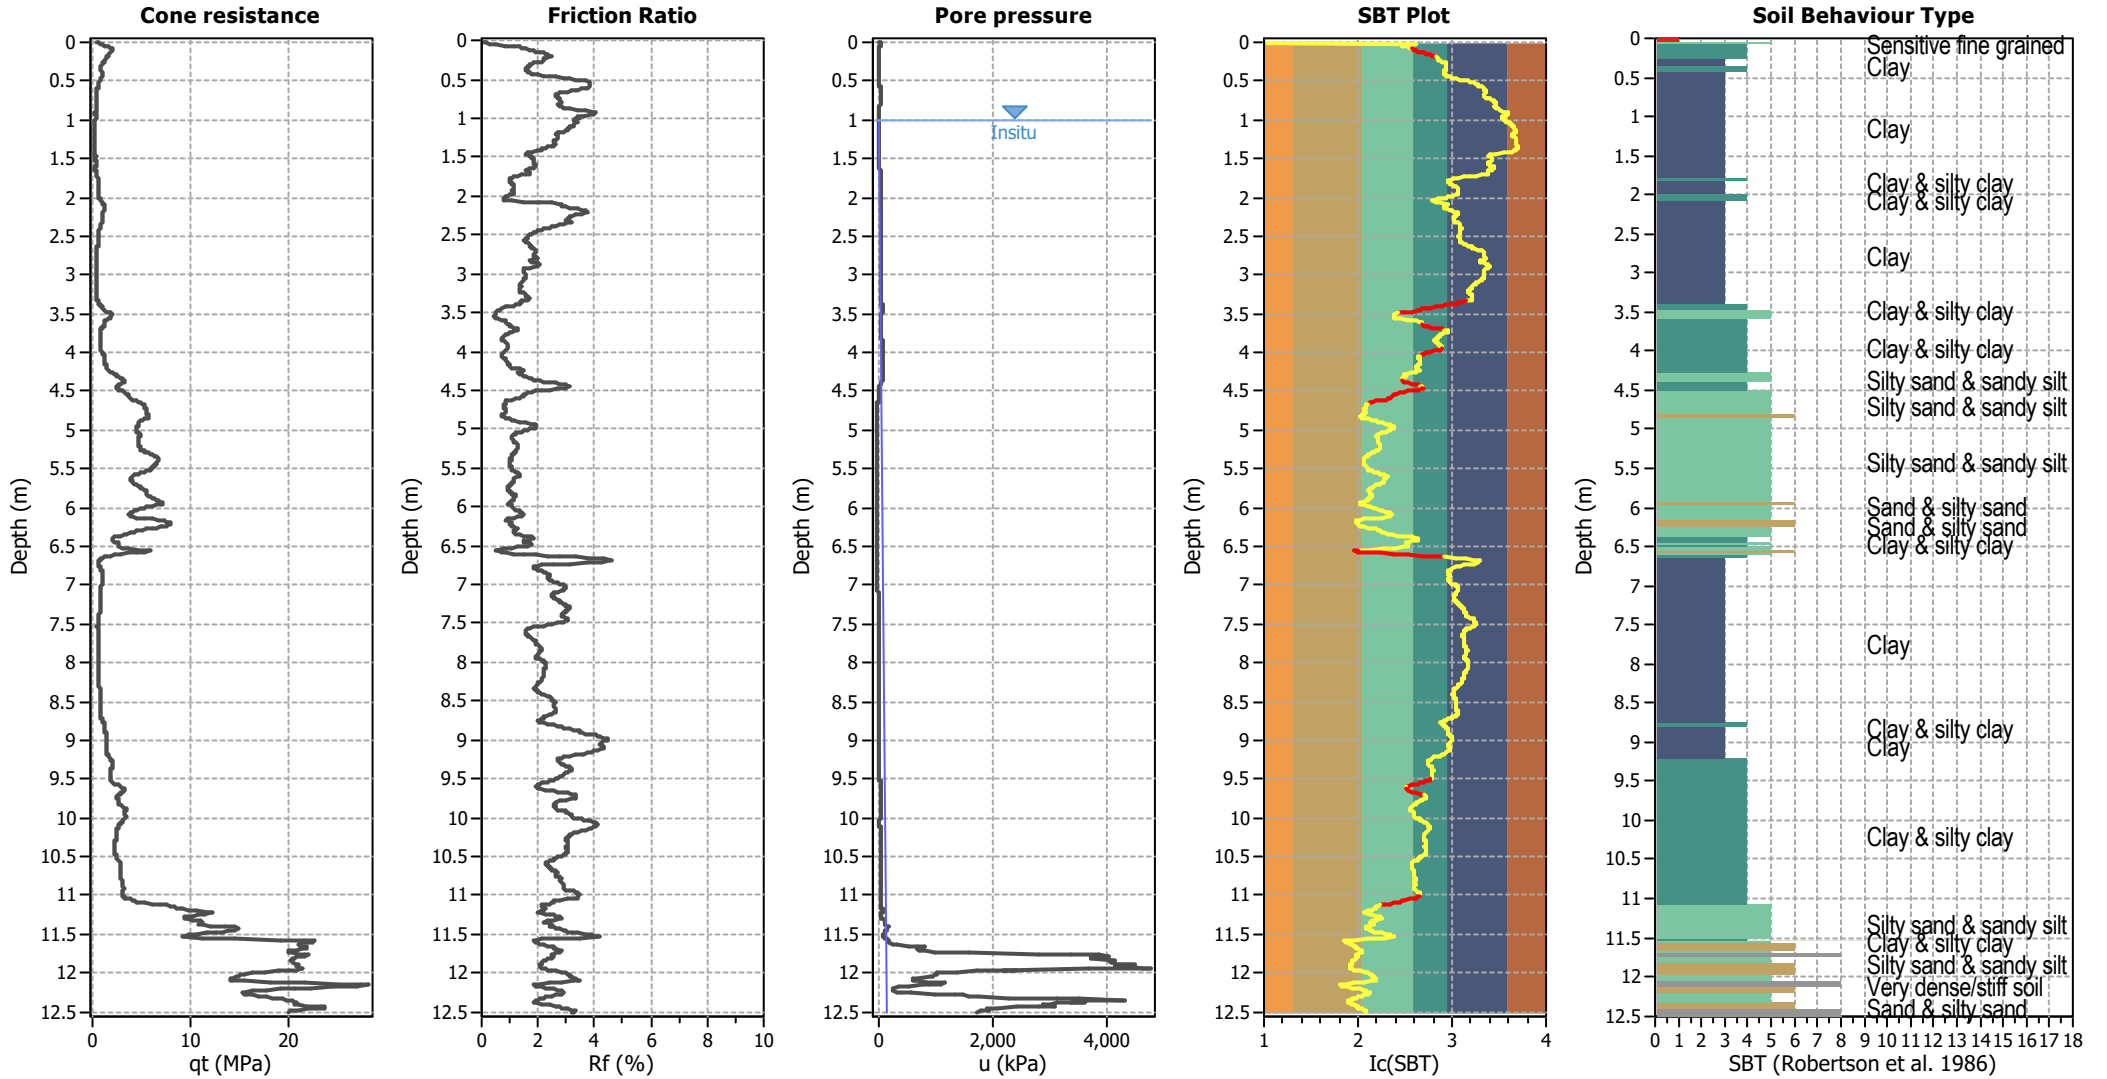


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

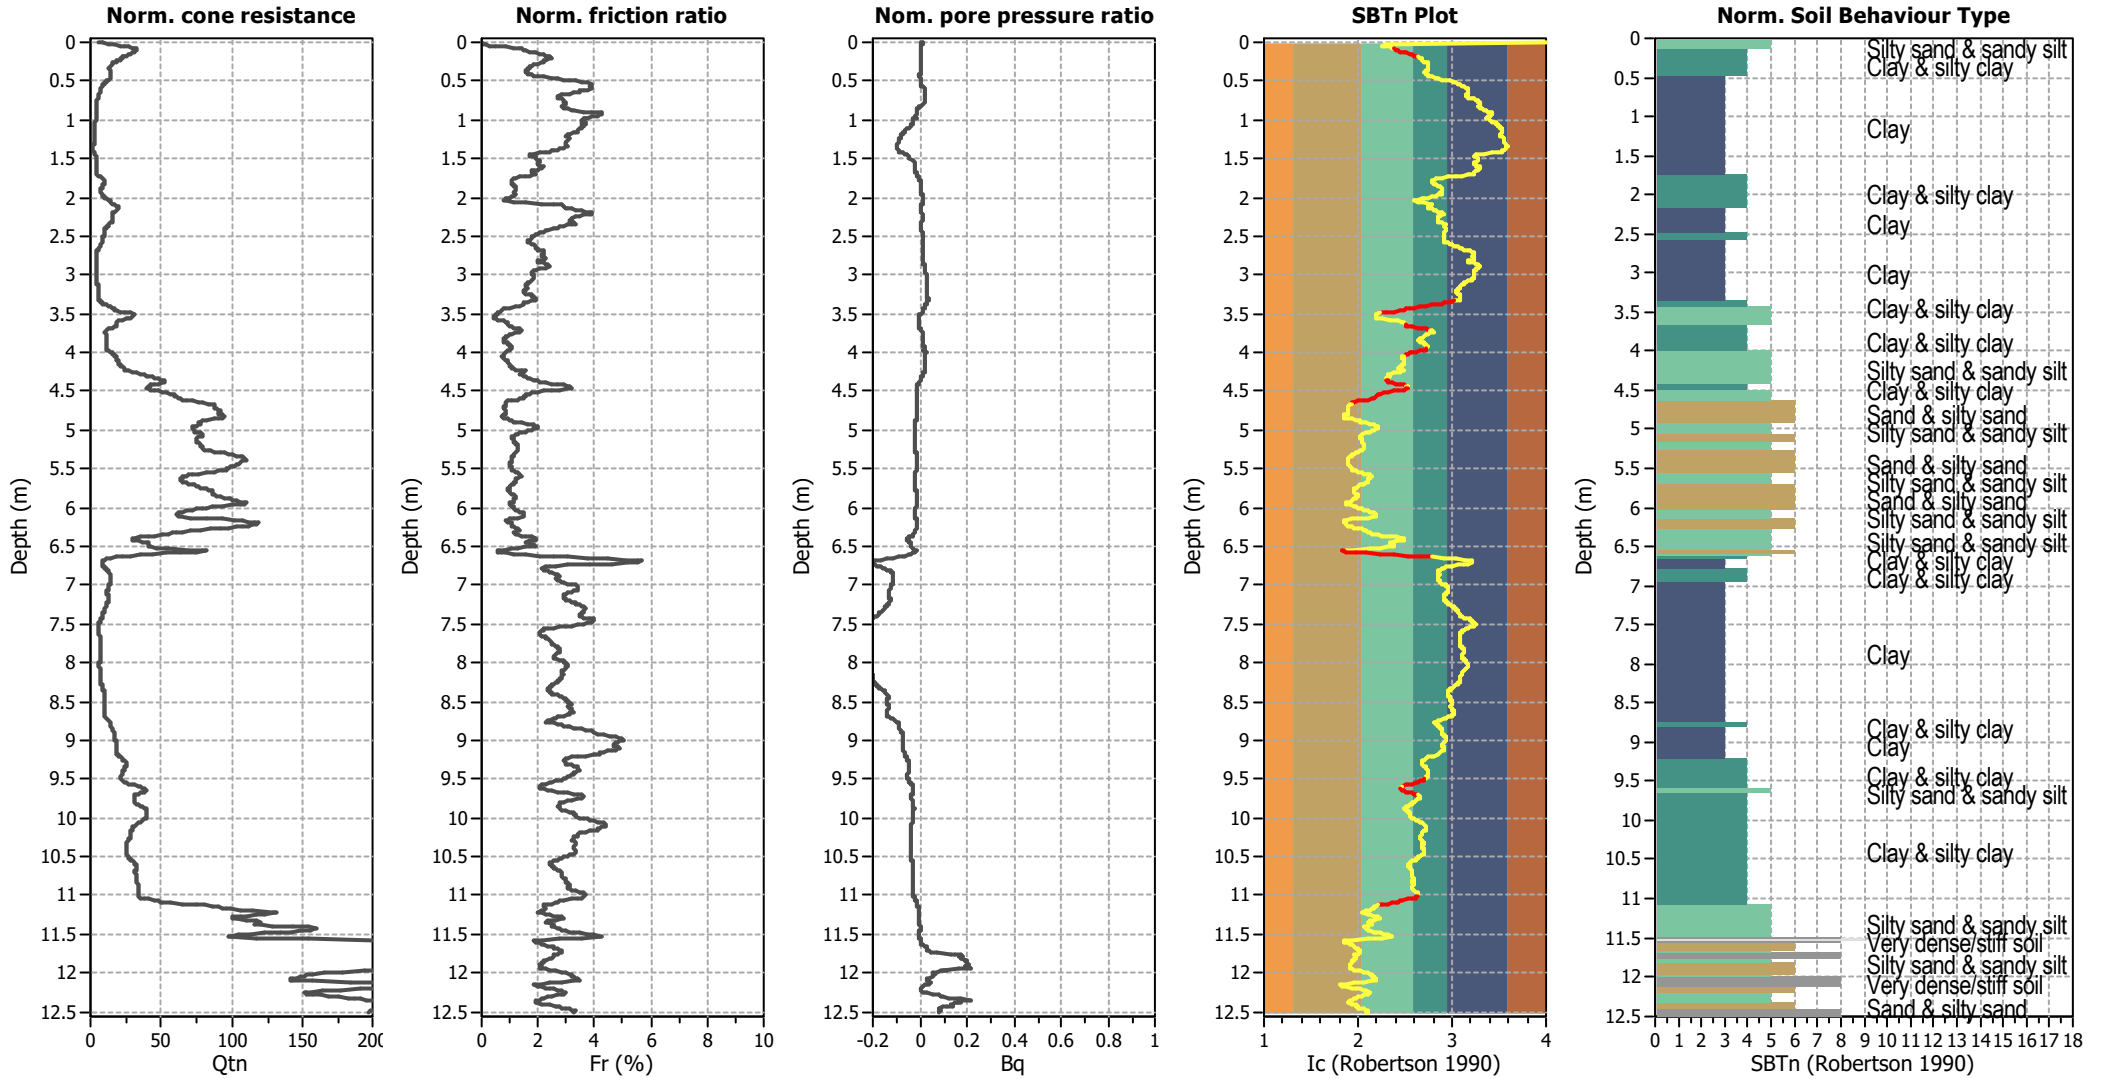


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

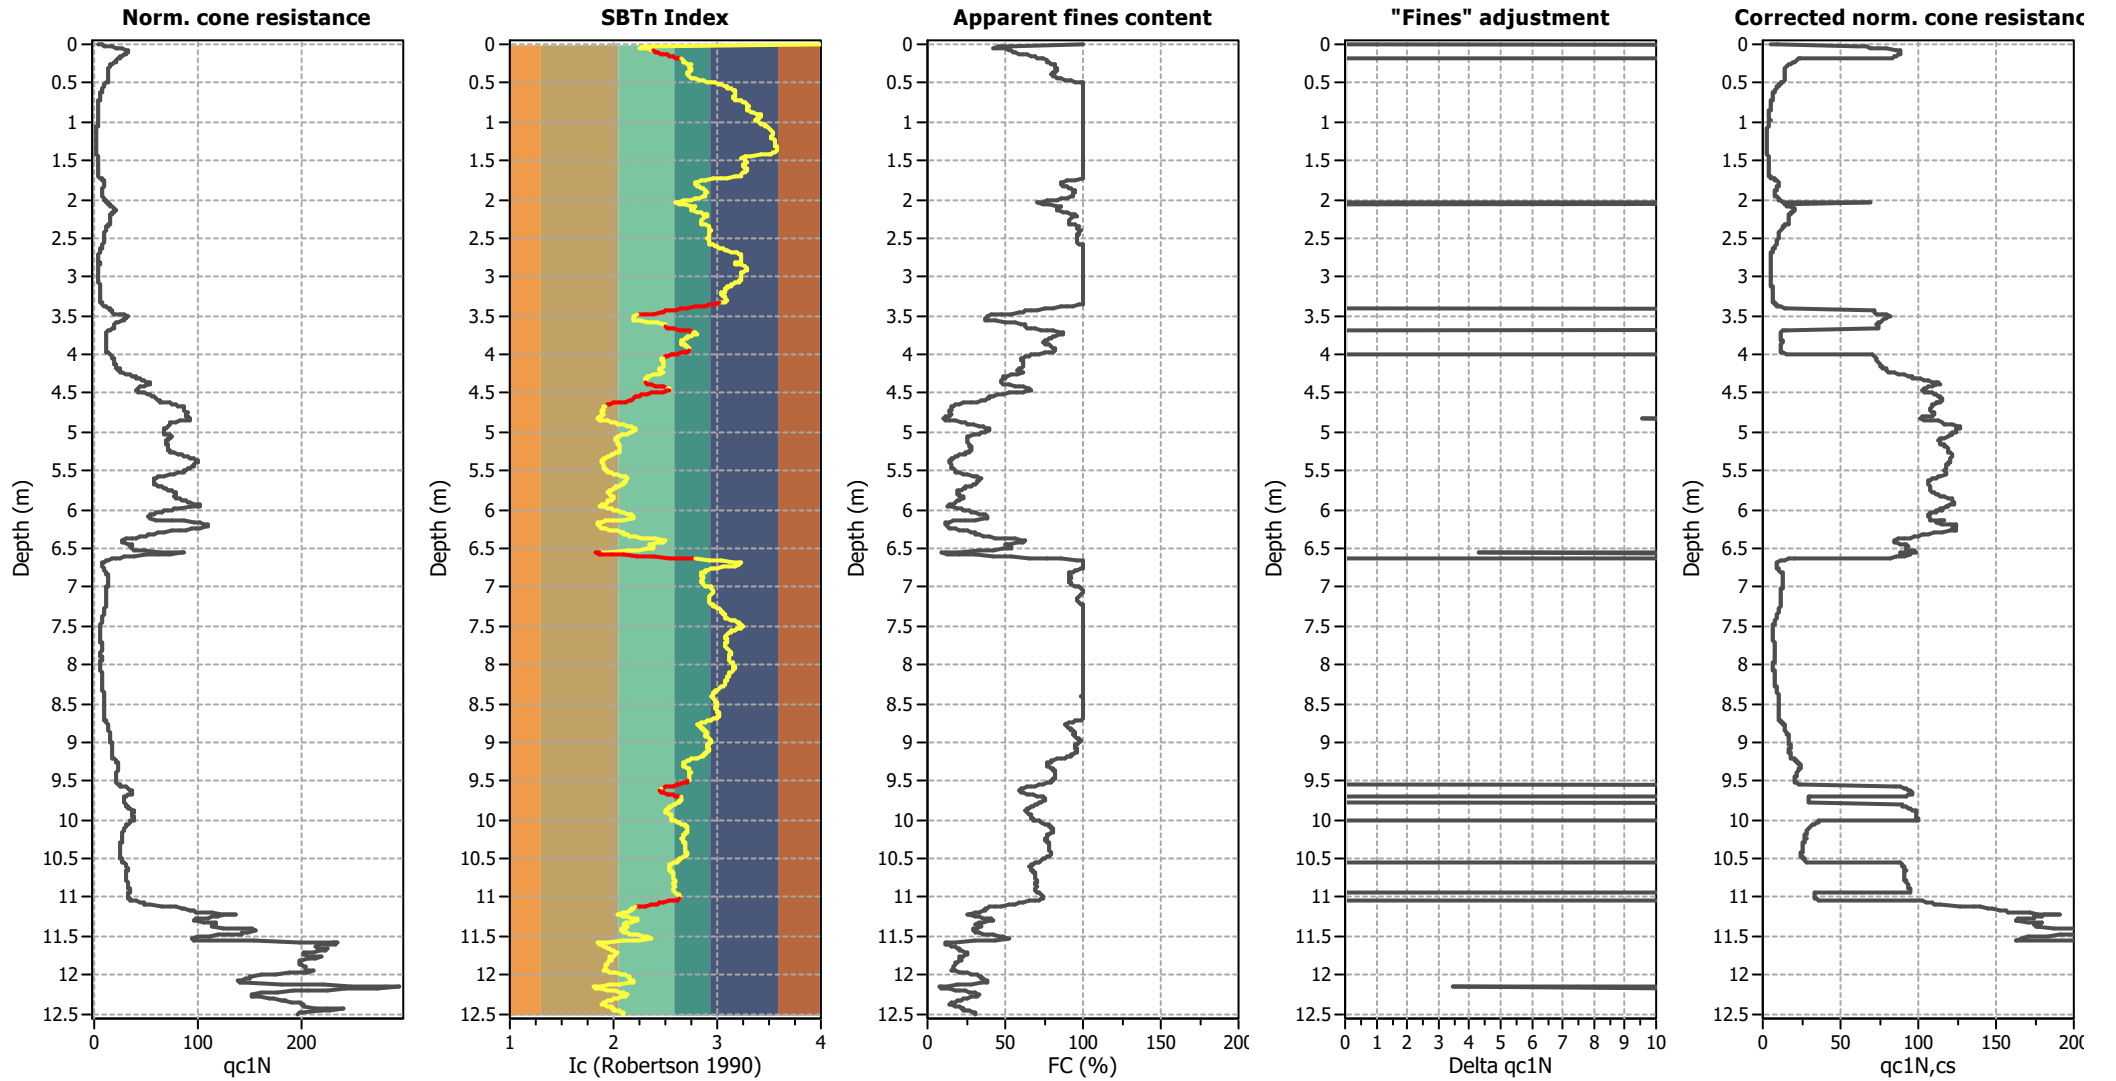

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

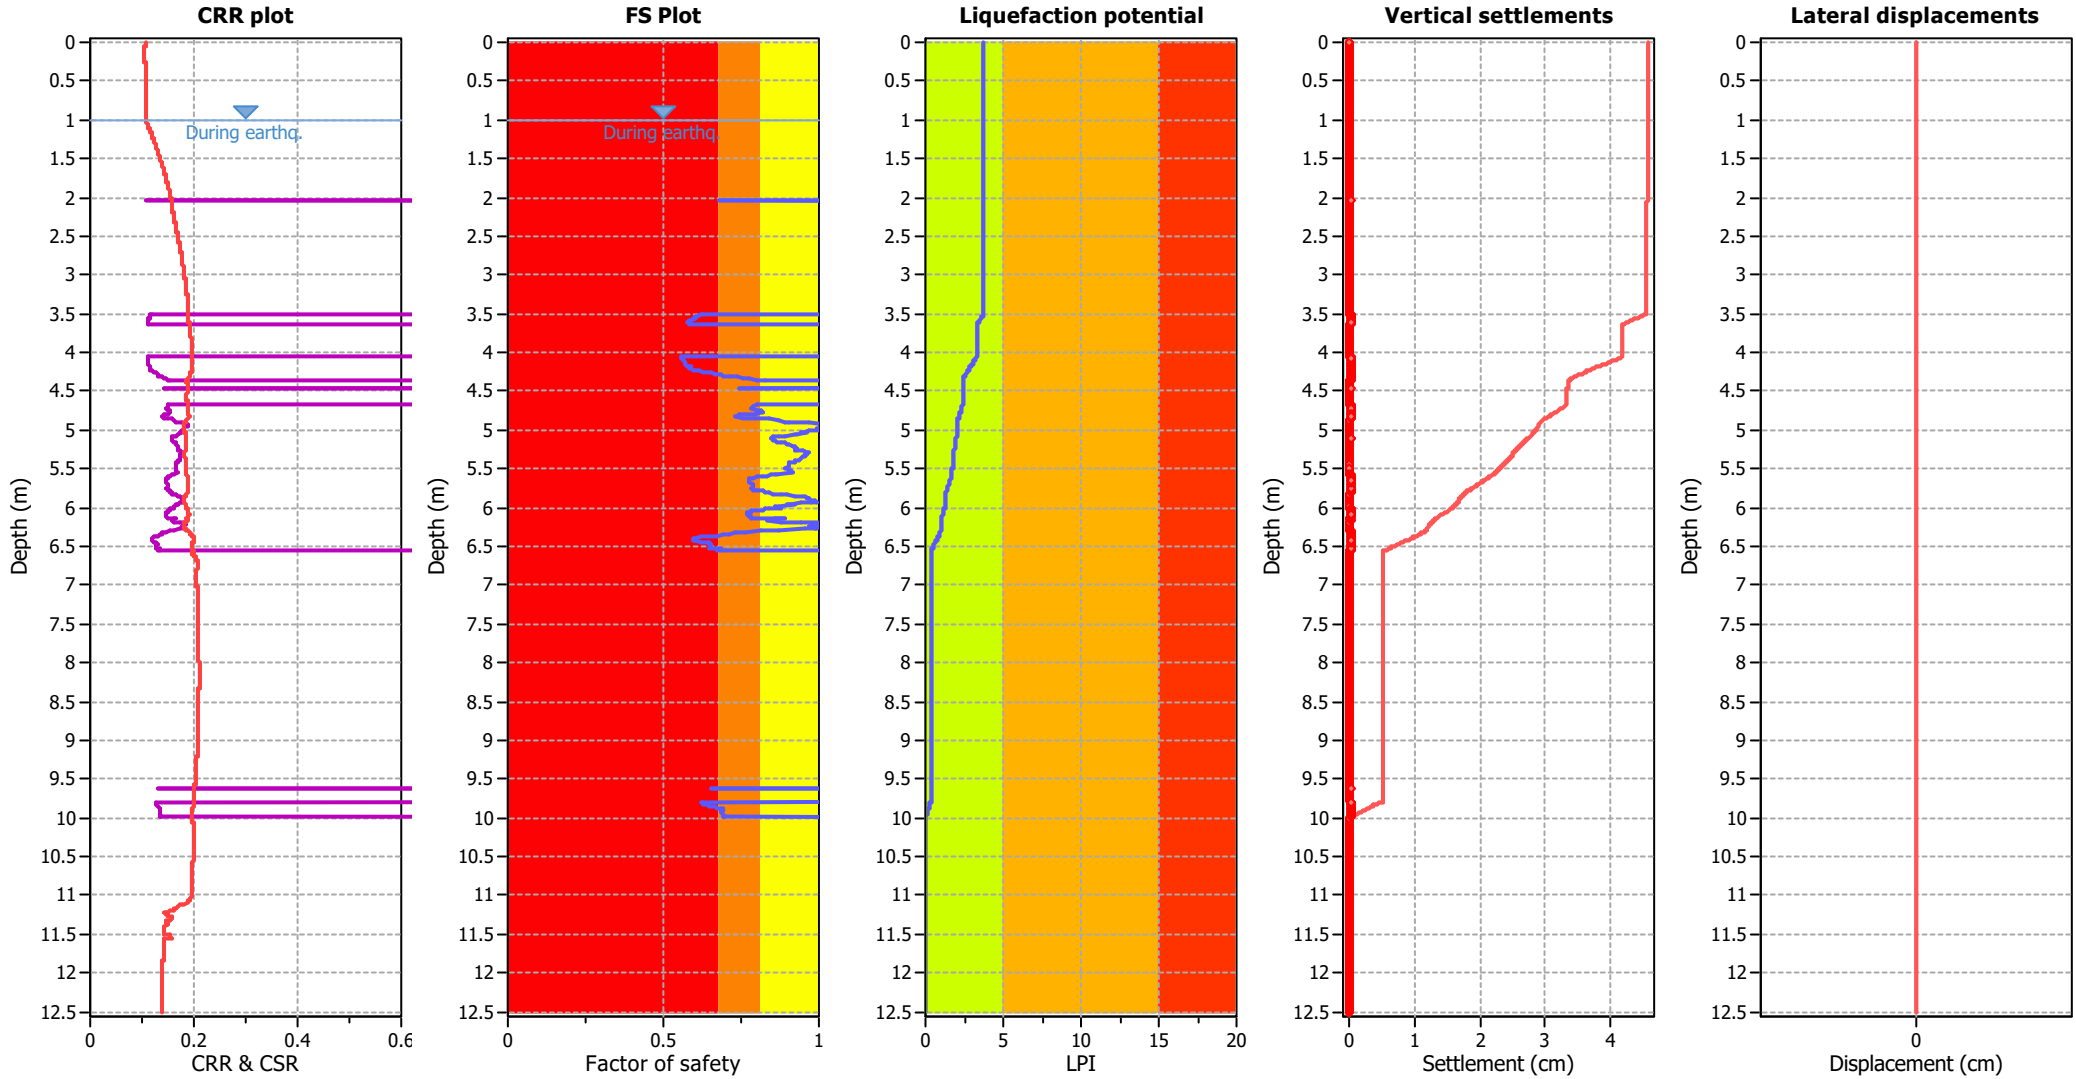

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

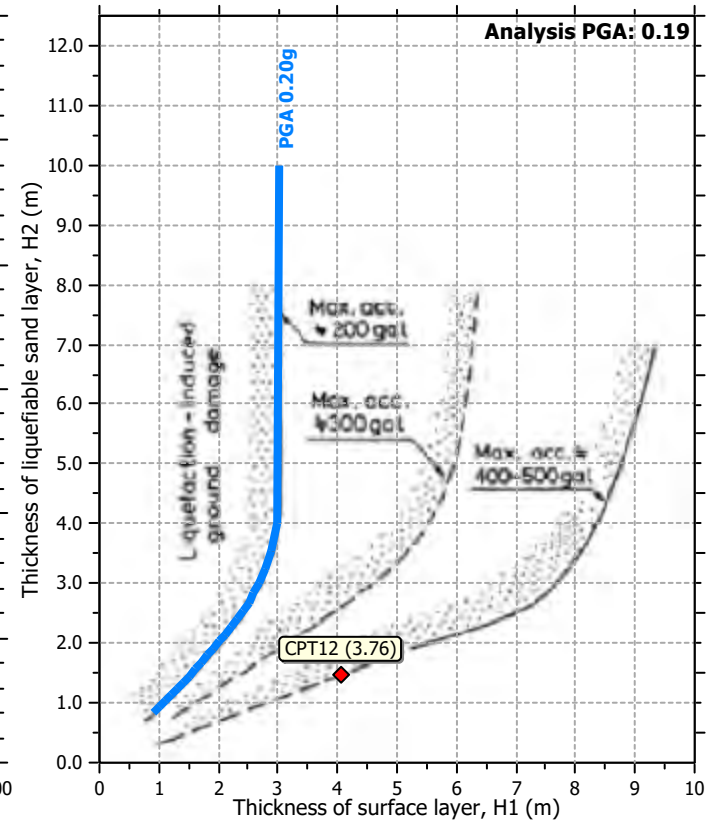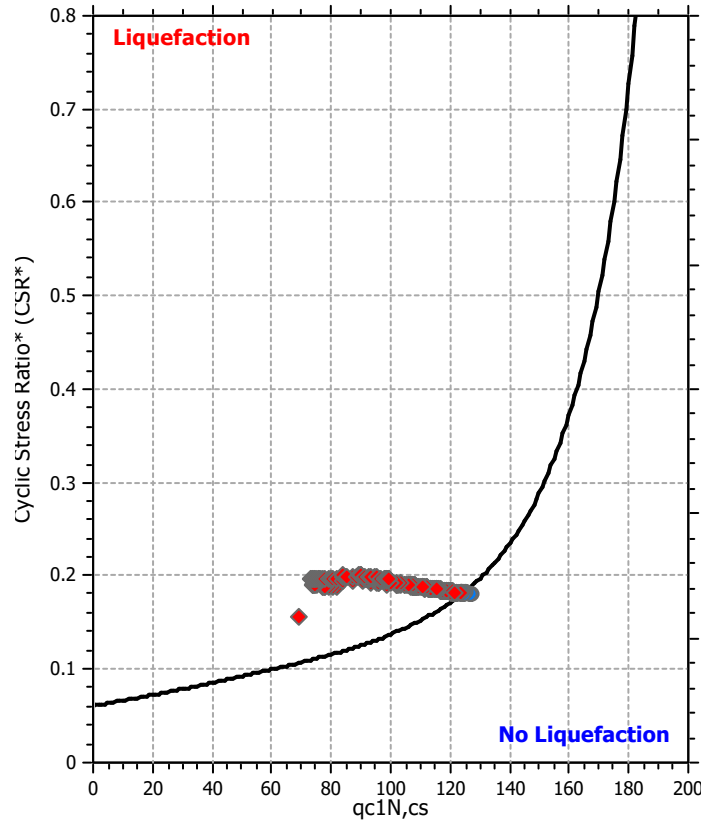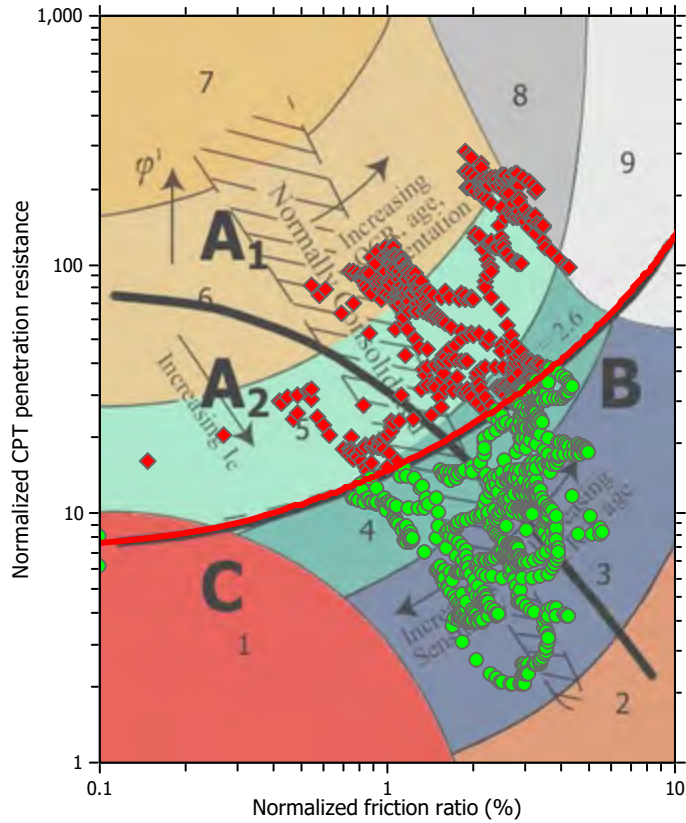

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

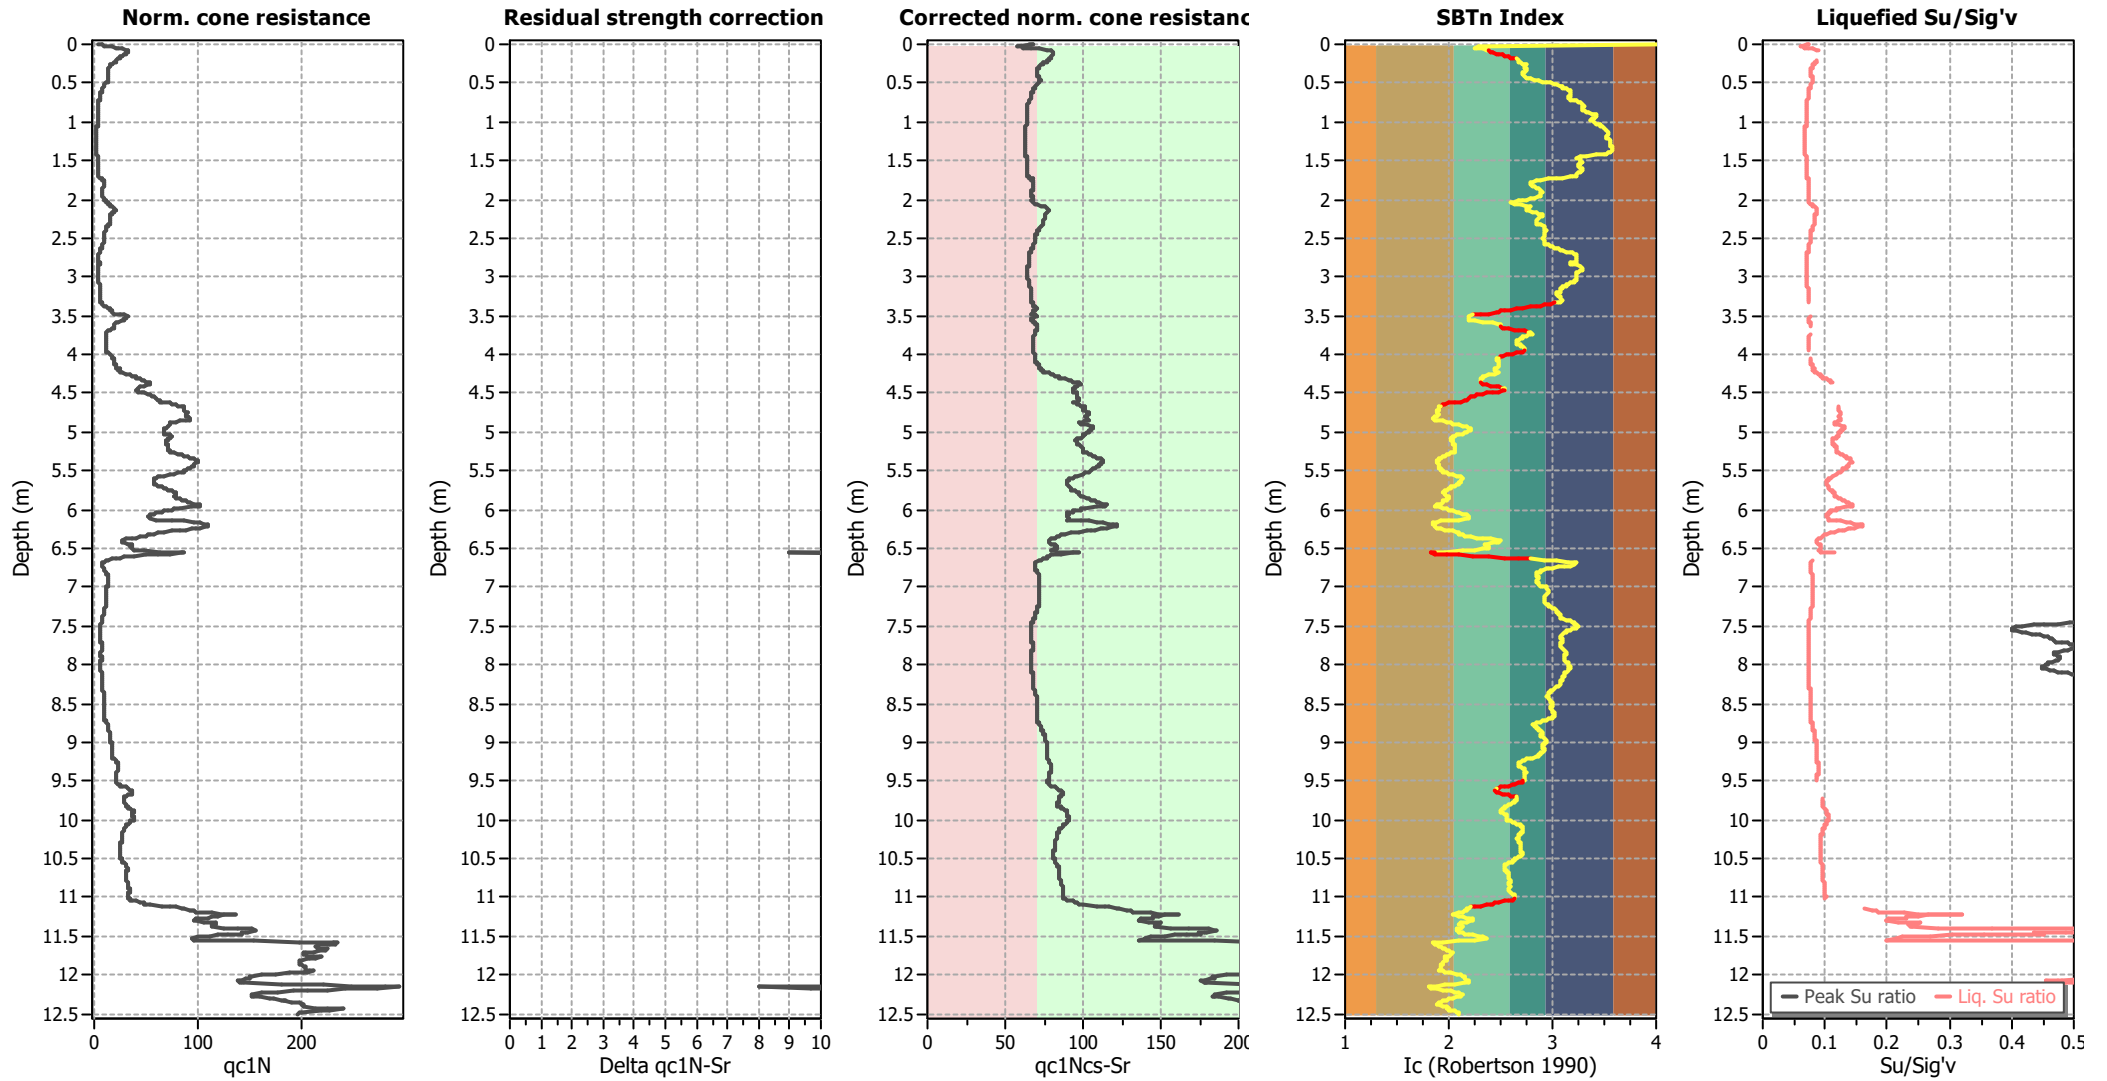

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

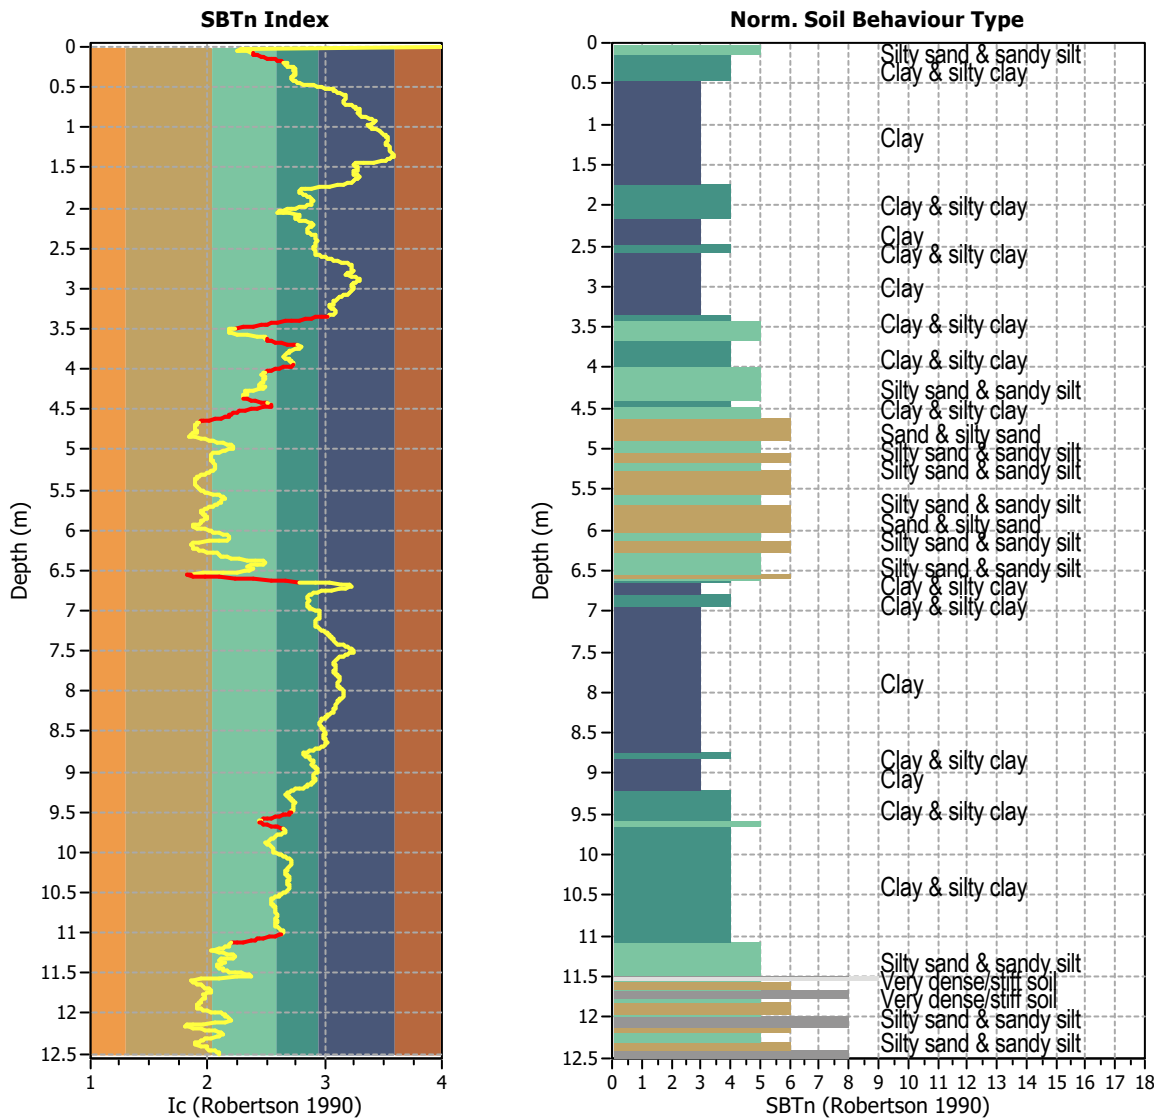


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1252
 Total points excluded: 122
 Exclusion percentage: 9.74%
 Number of layers detected: 10


Estimation of post-earthquake settlements

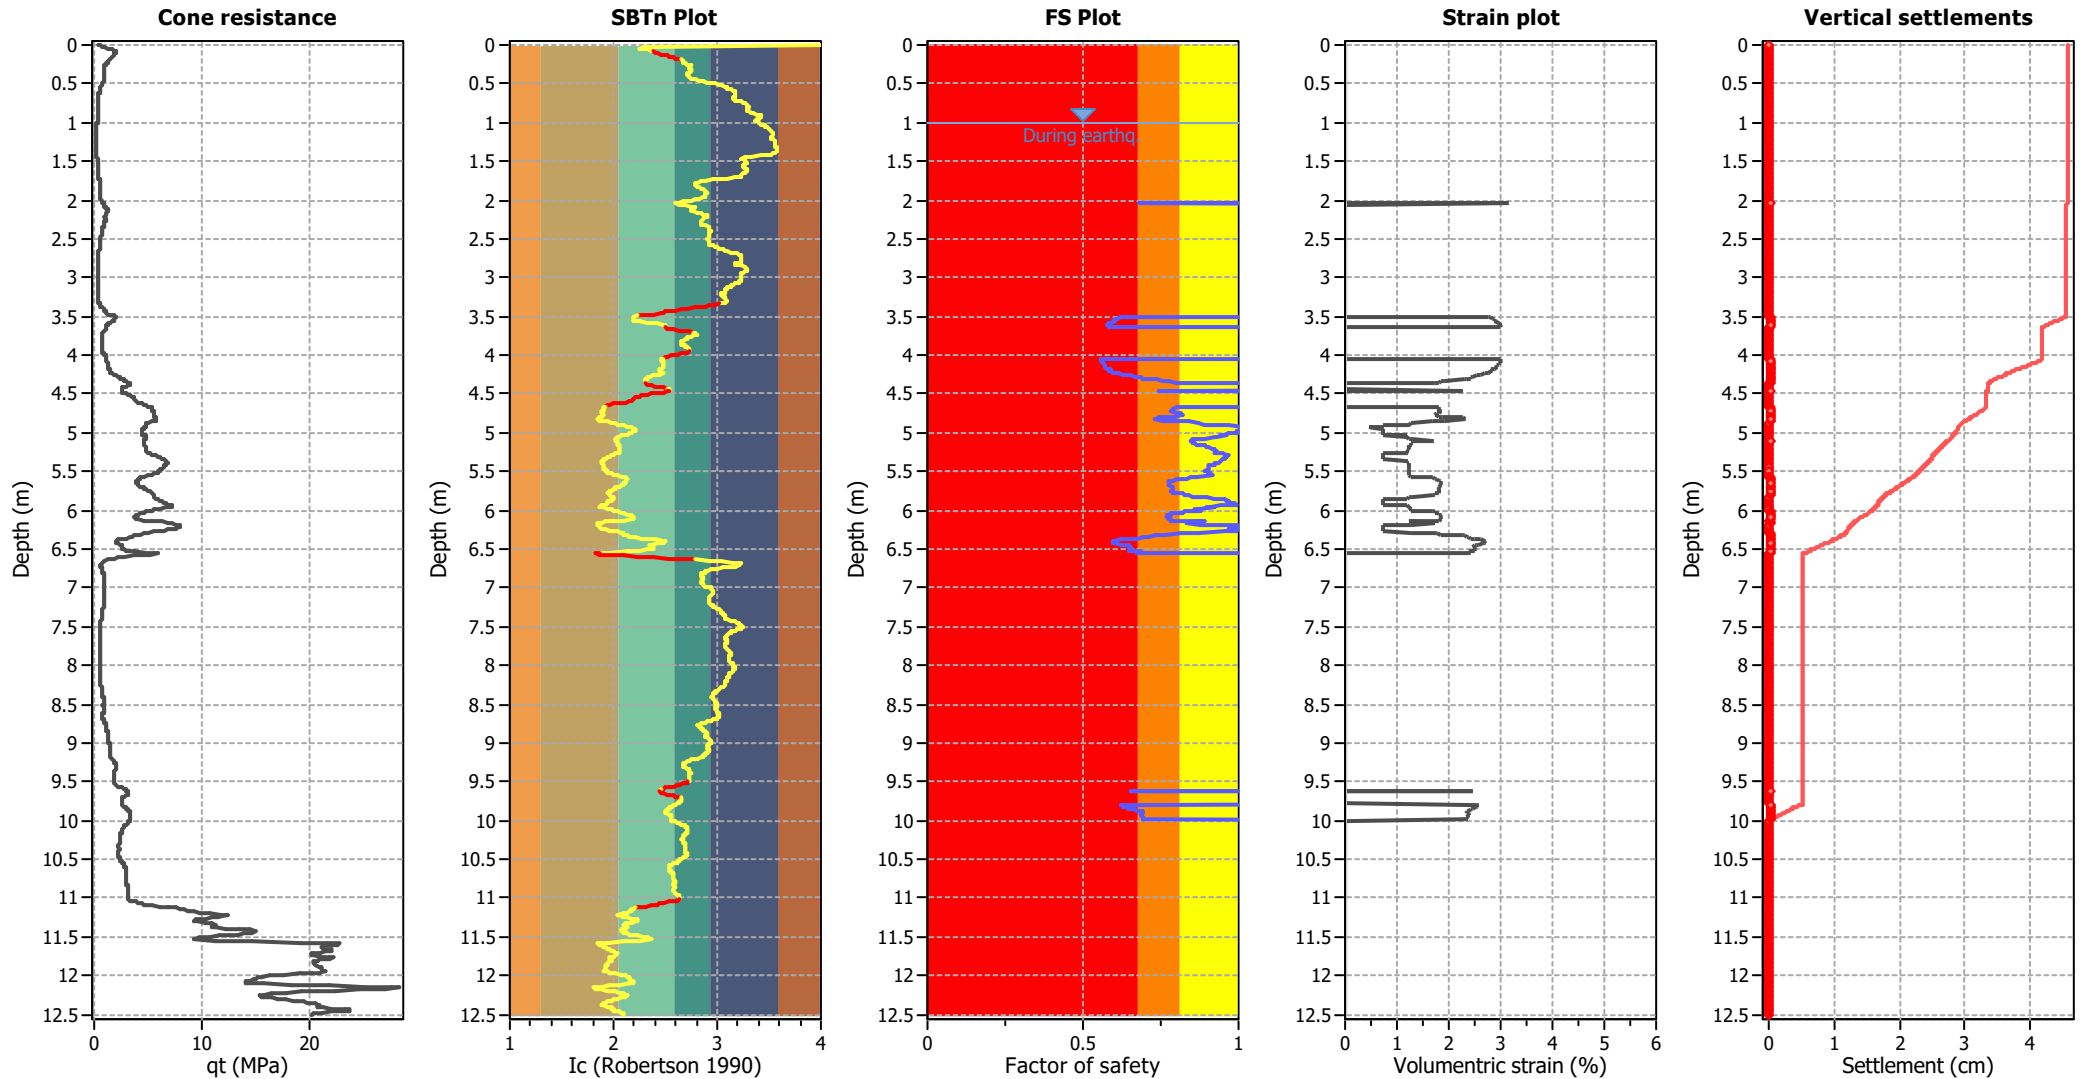

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

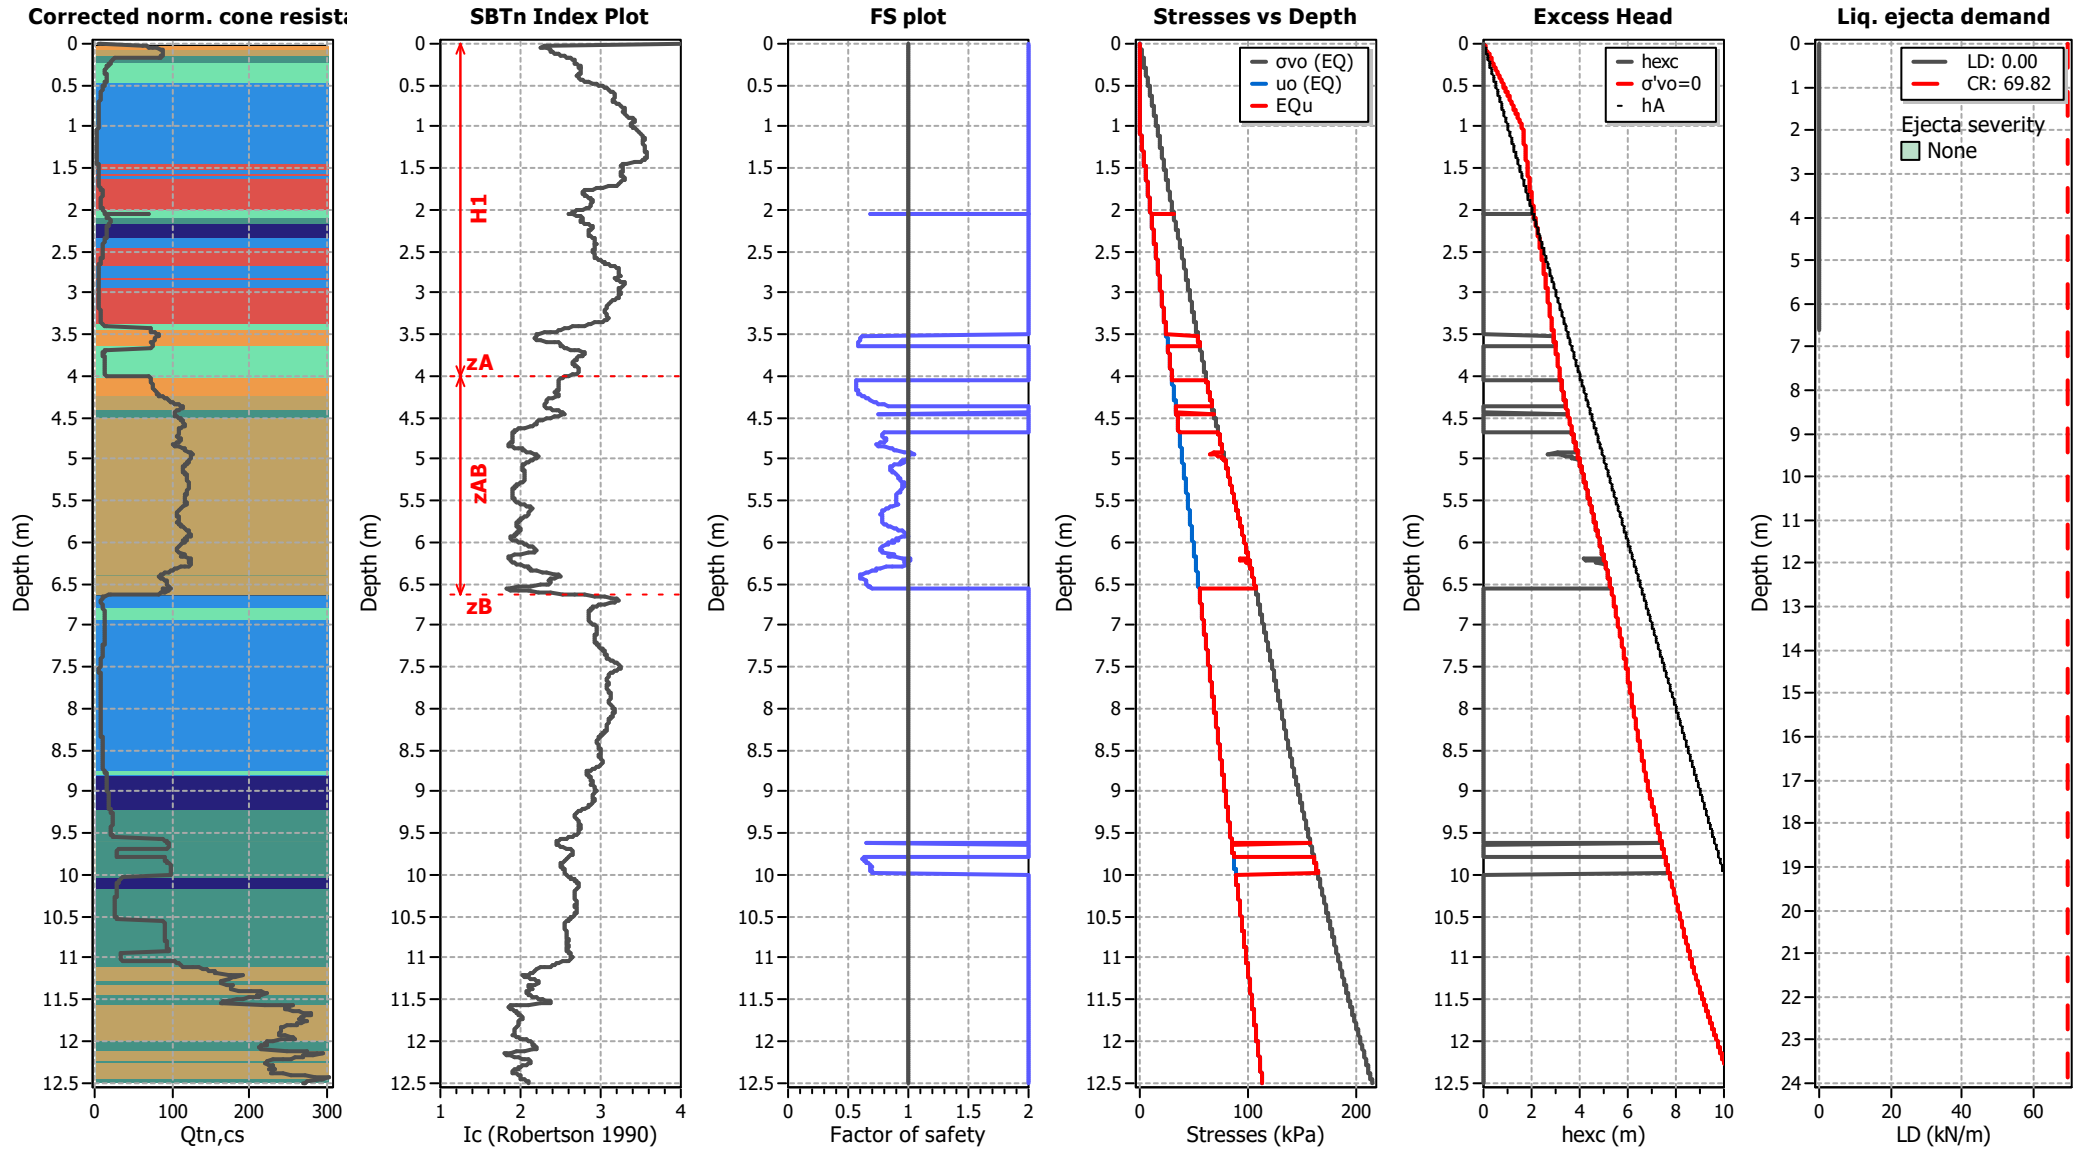

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT13A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

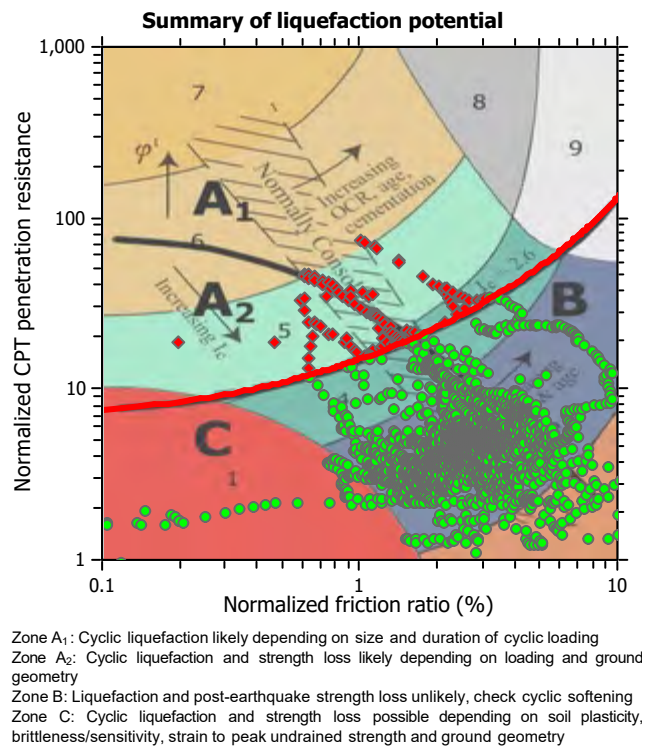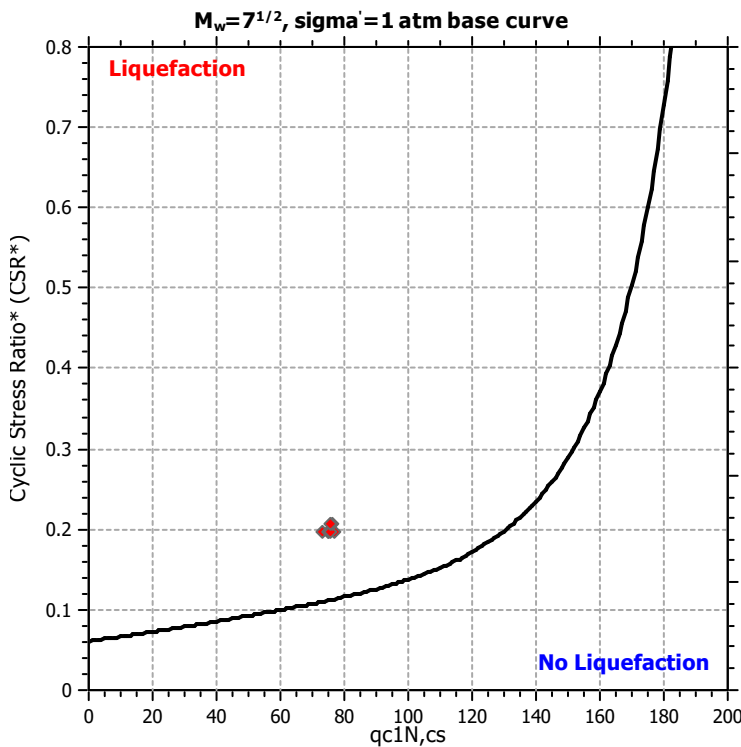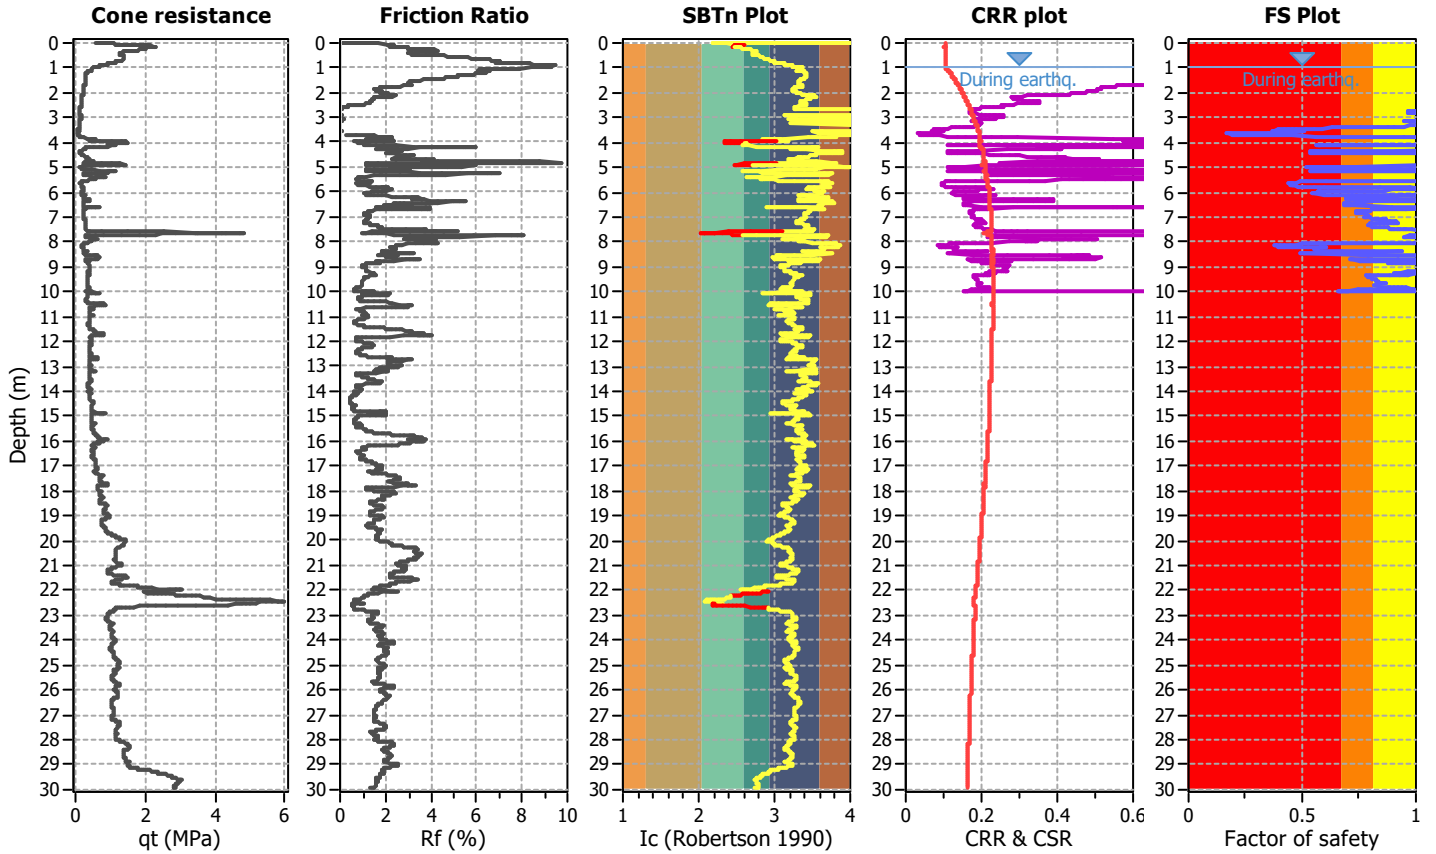

CPT basic interpretation plots

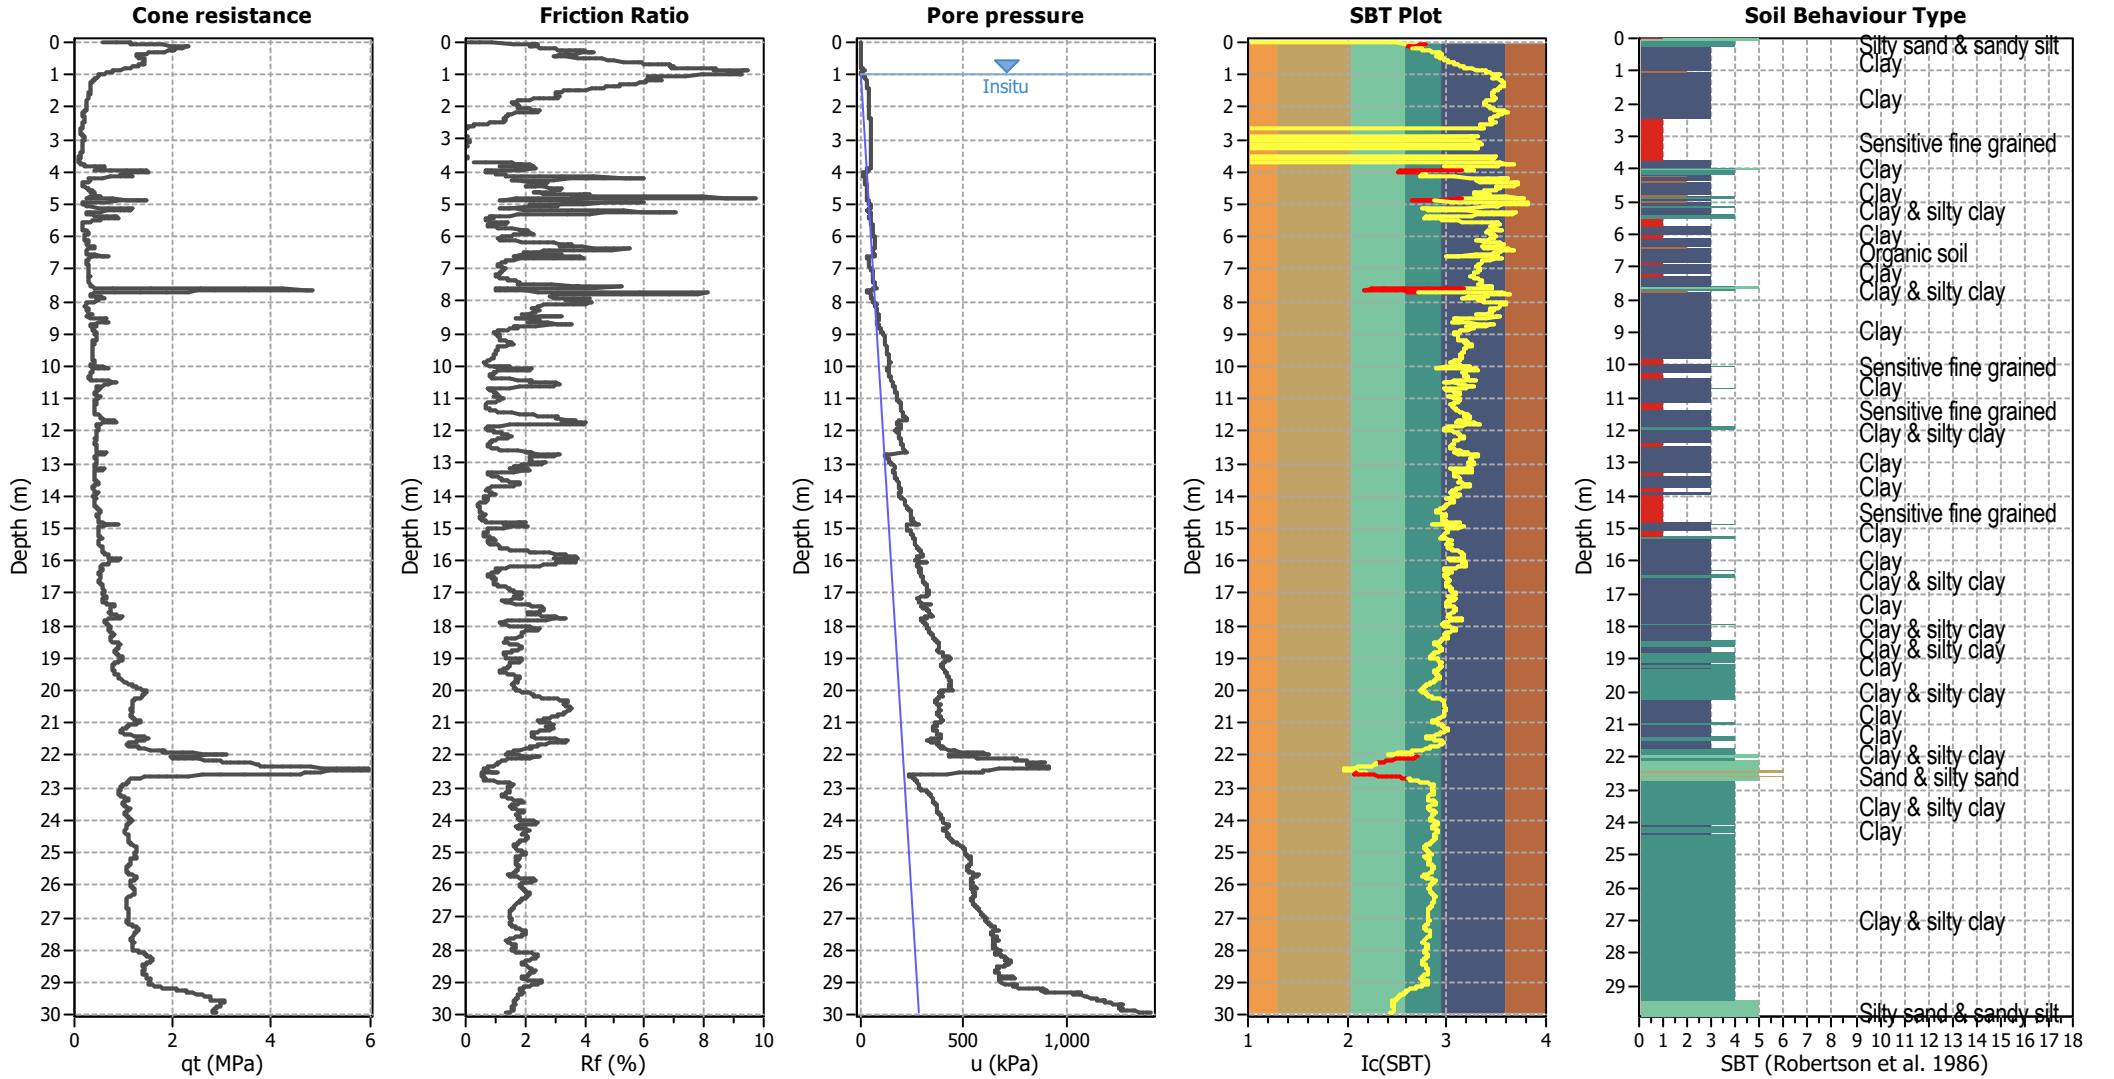


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

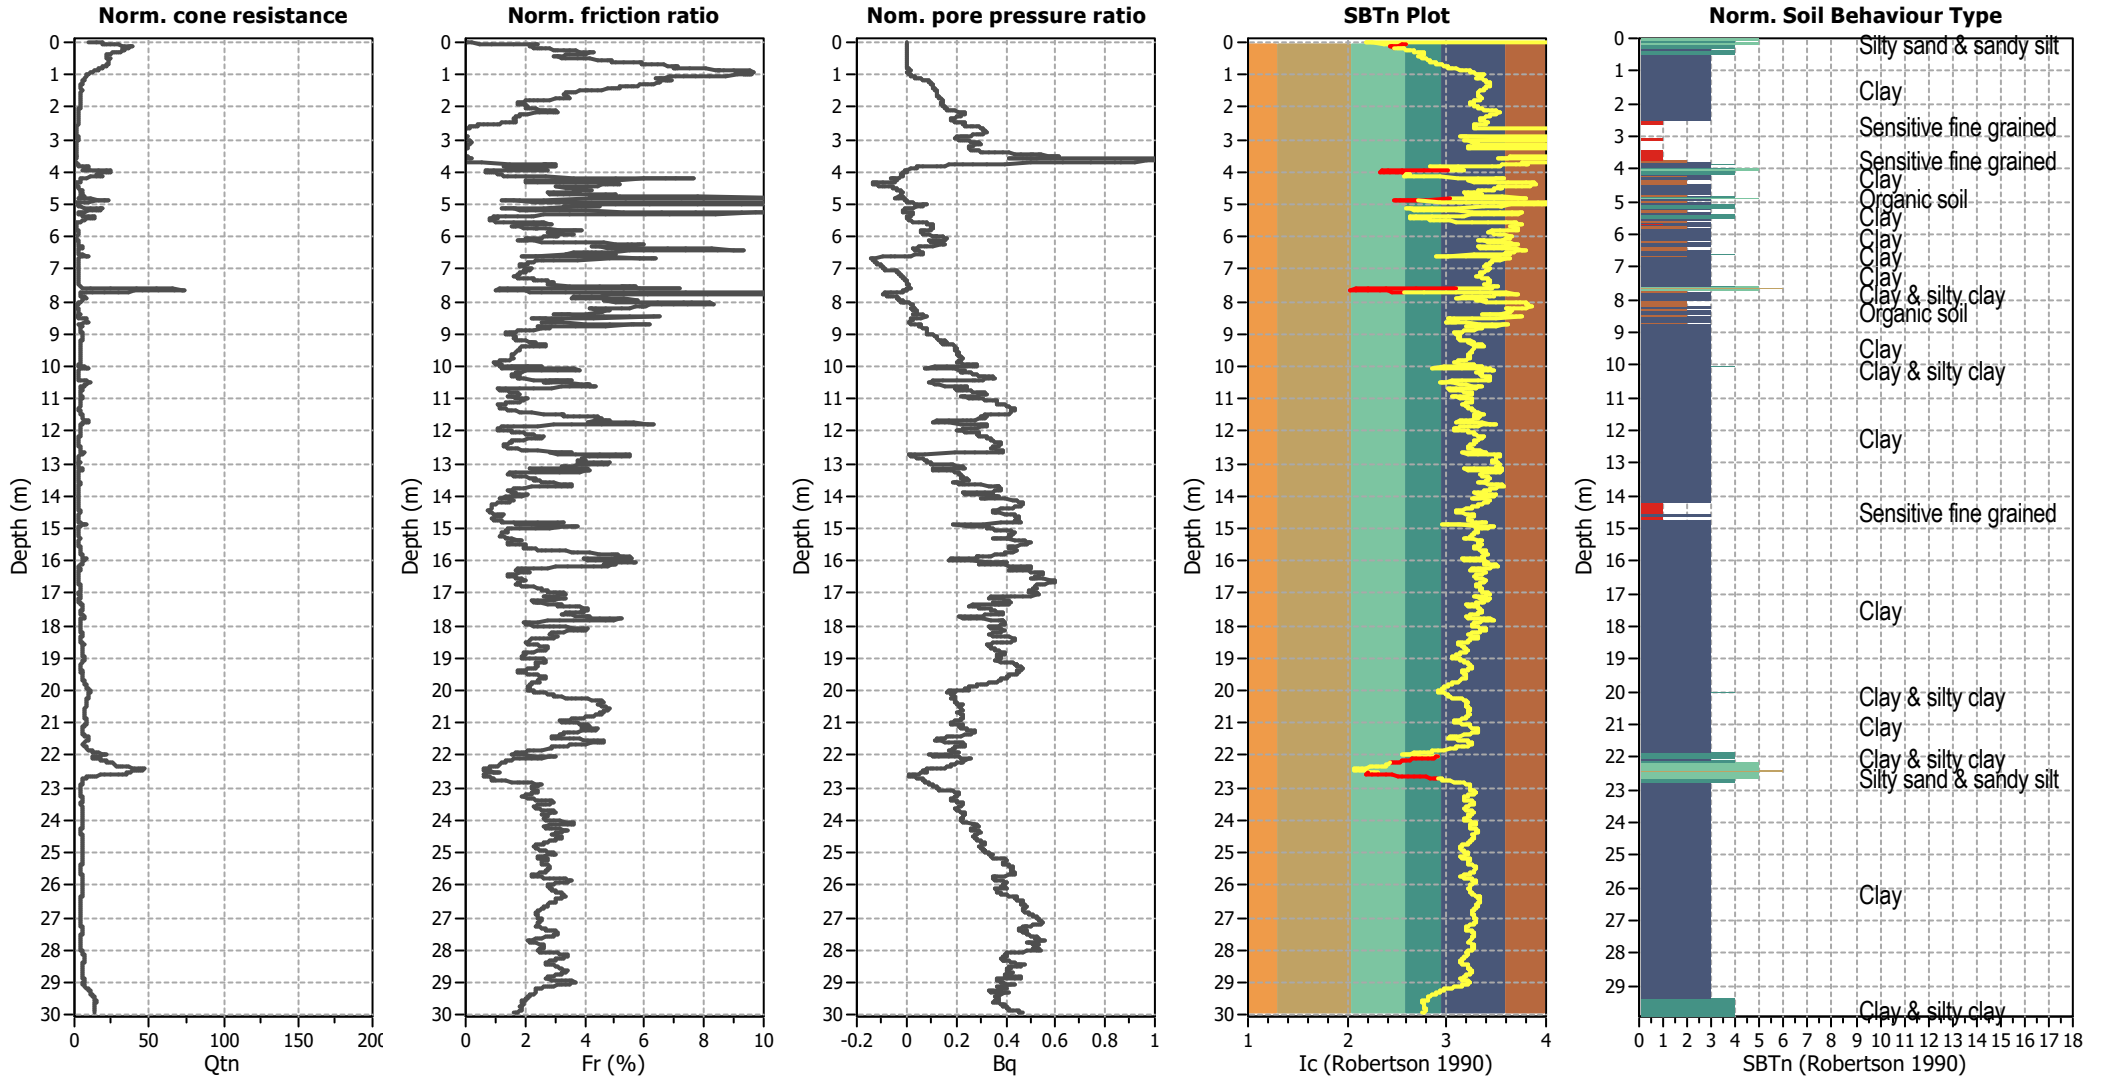


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

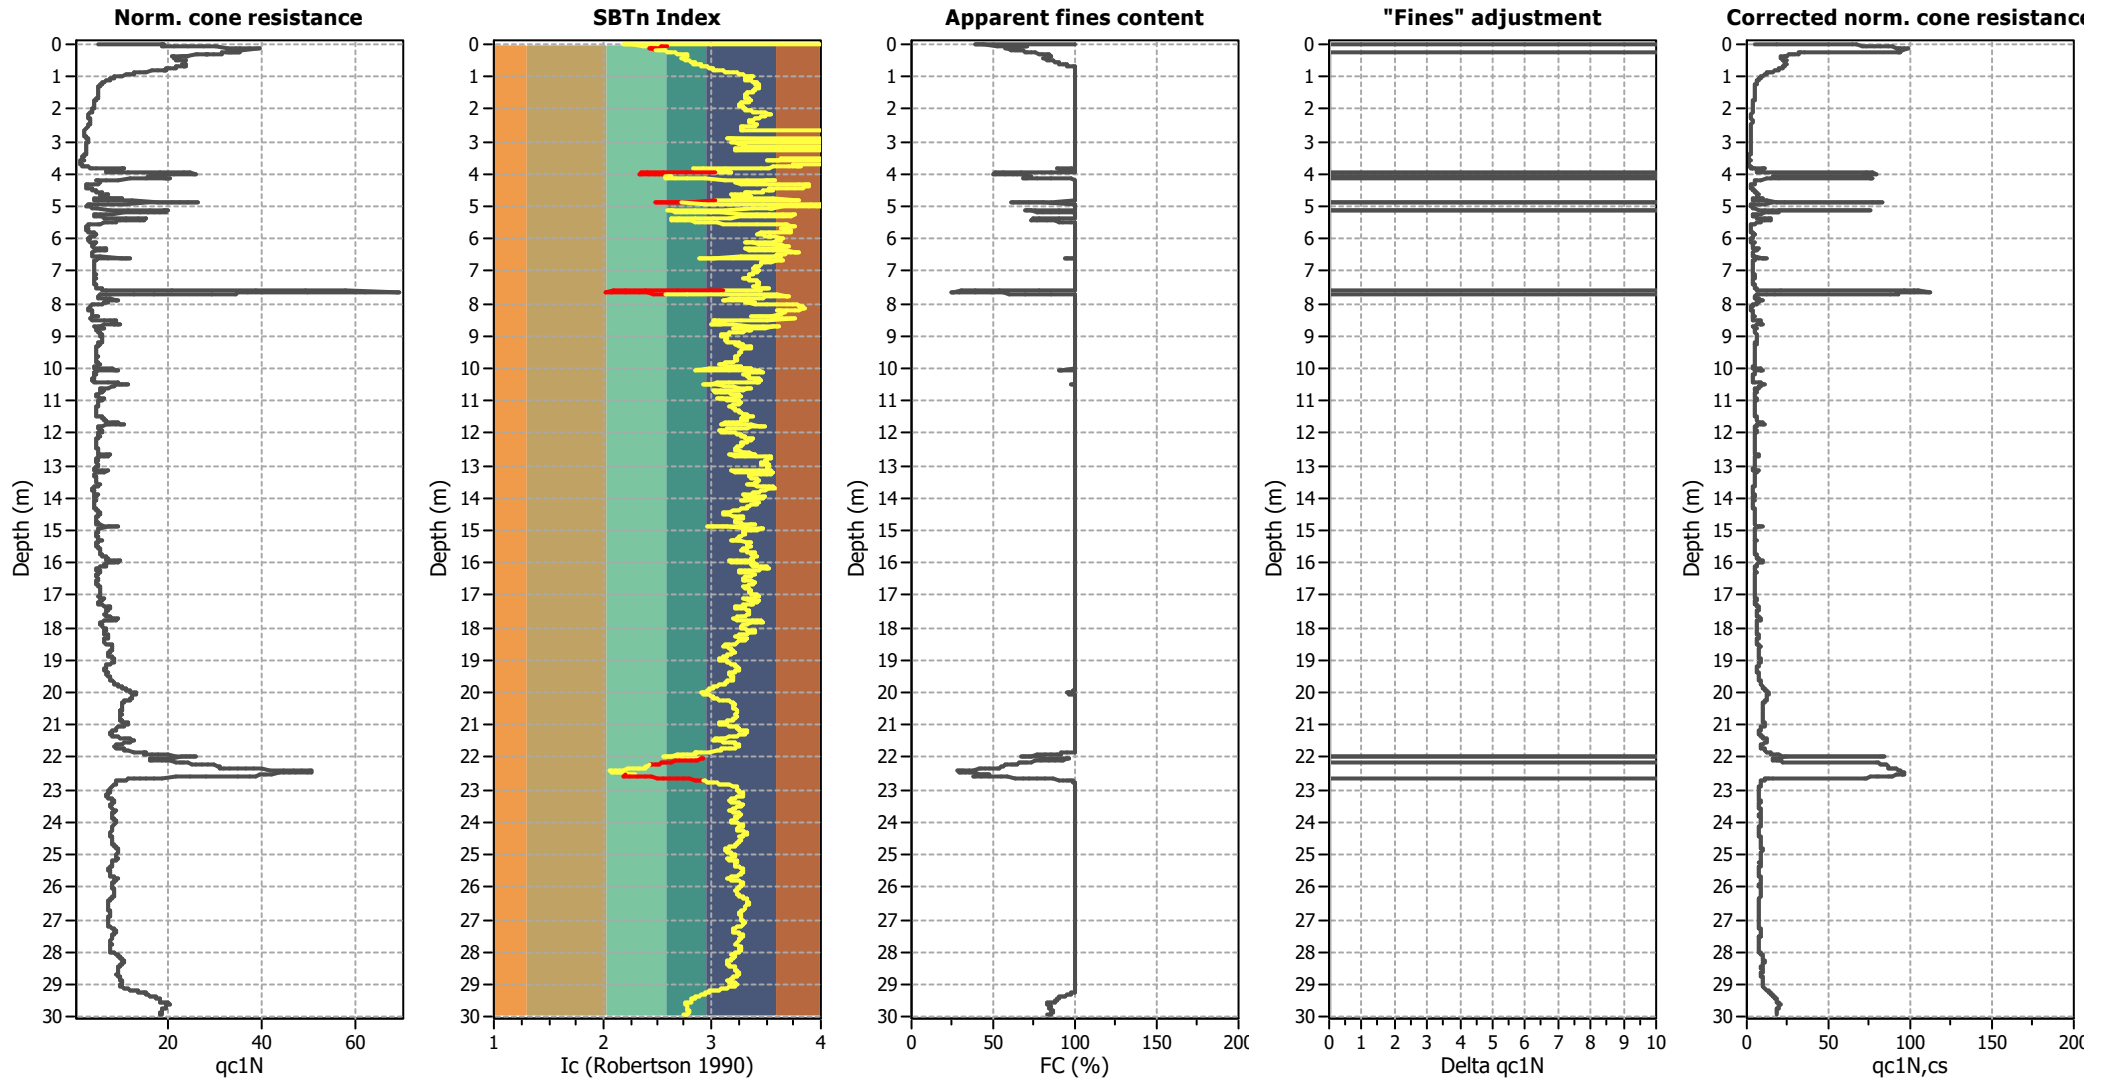

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

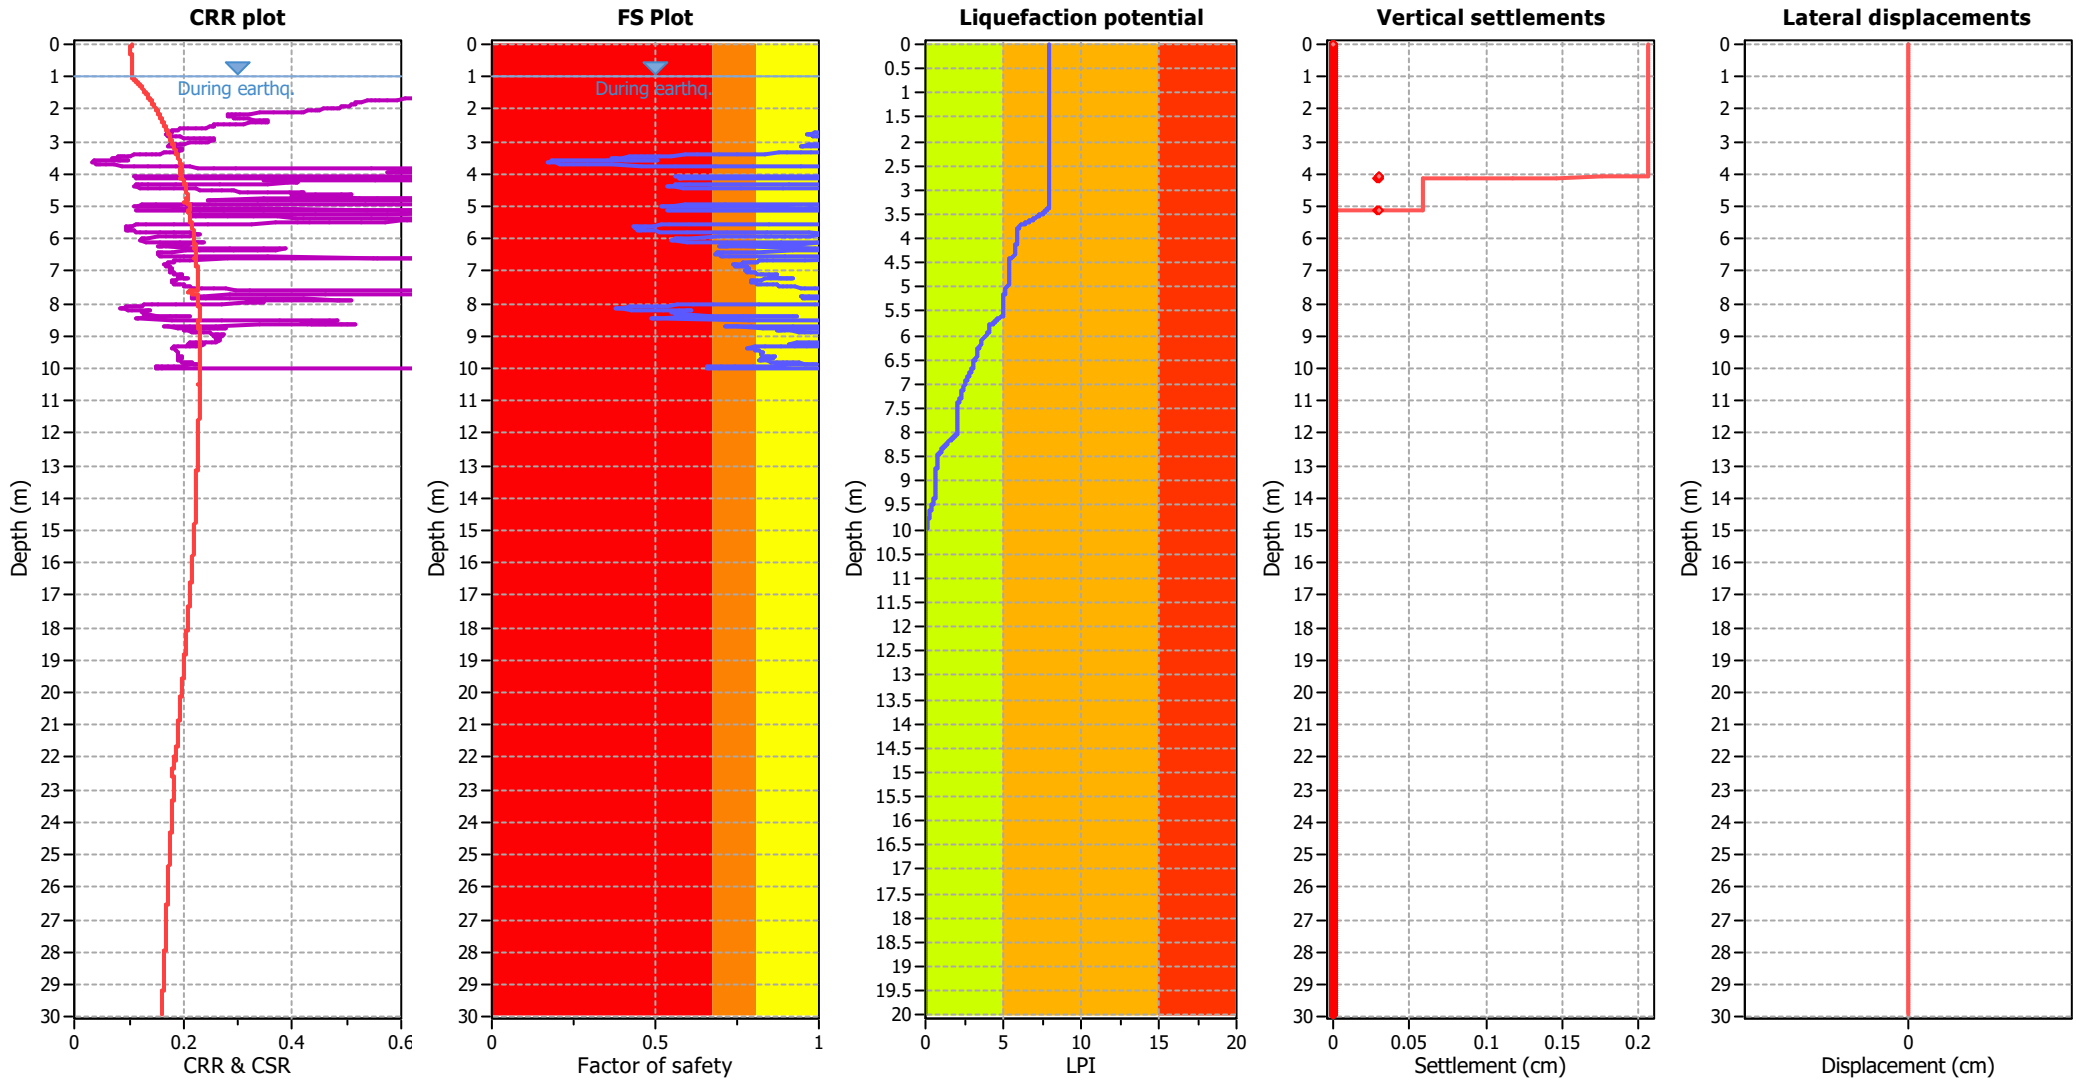

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

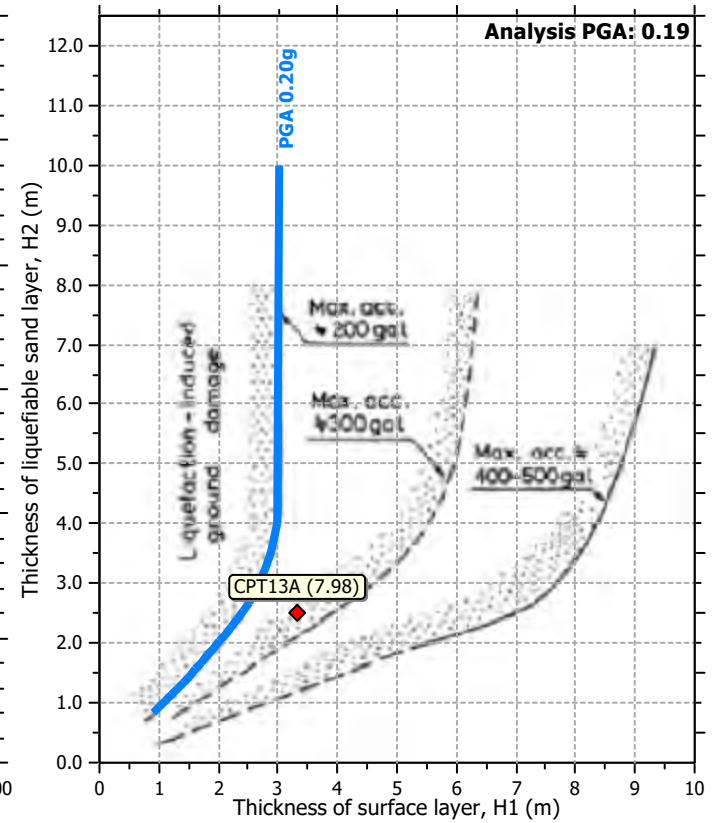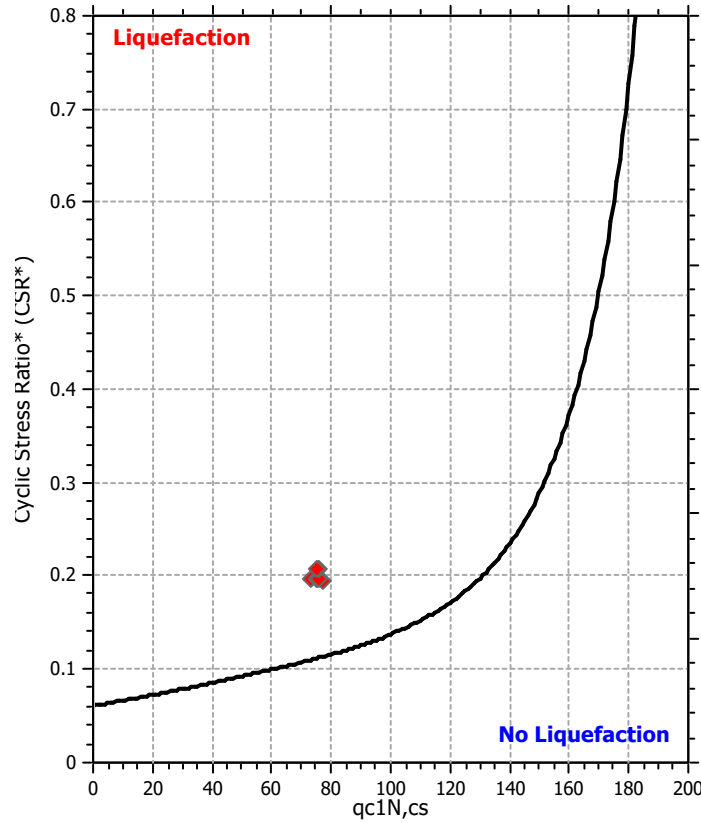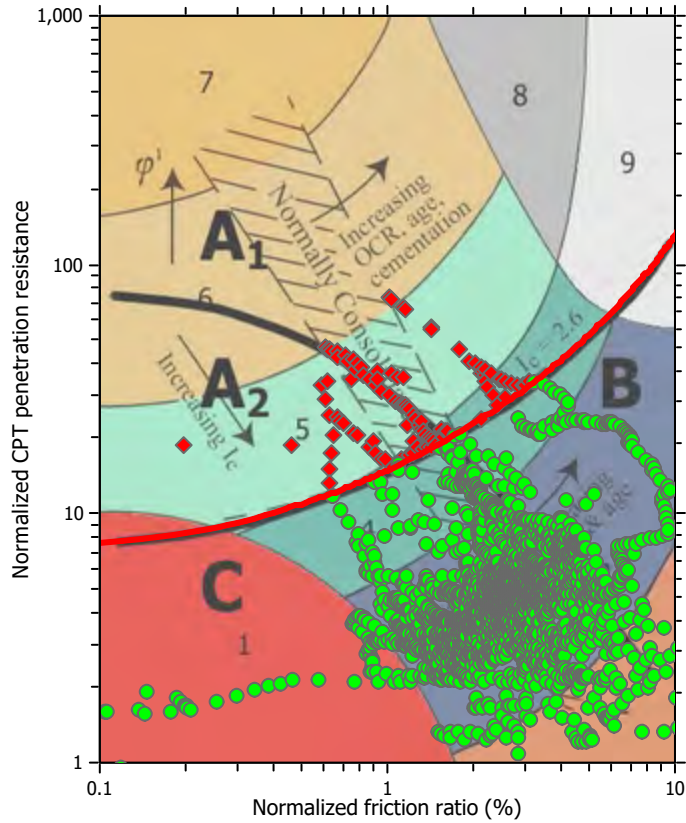

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

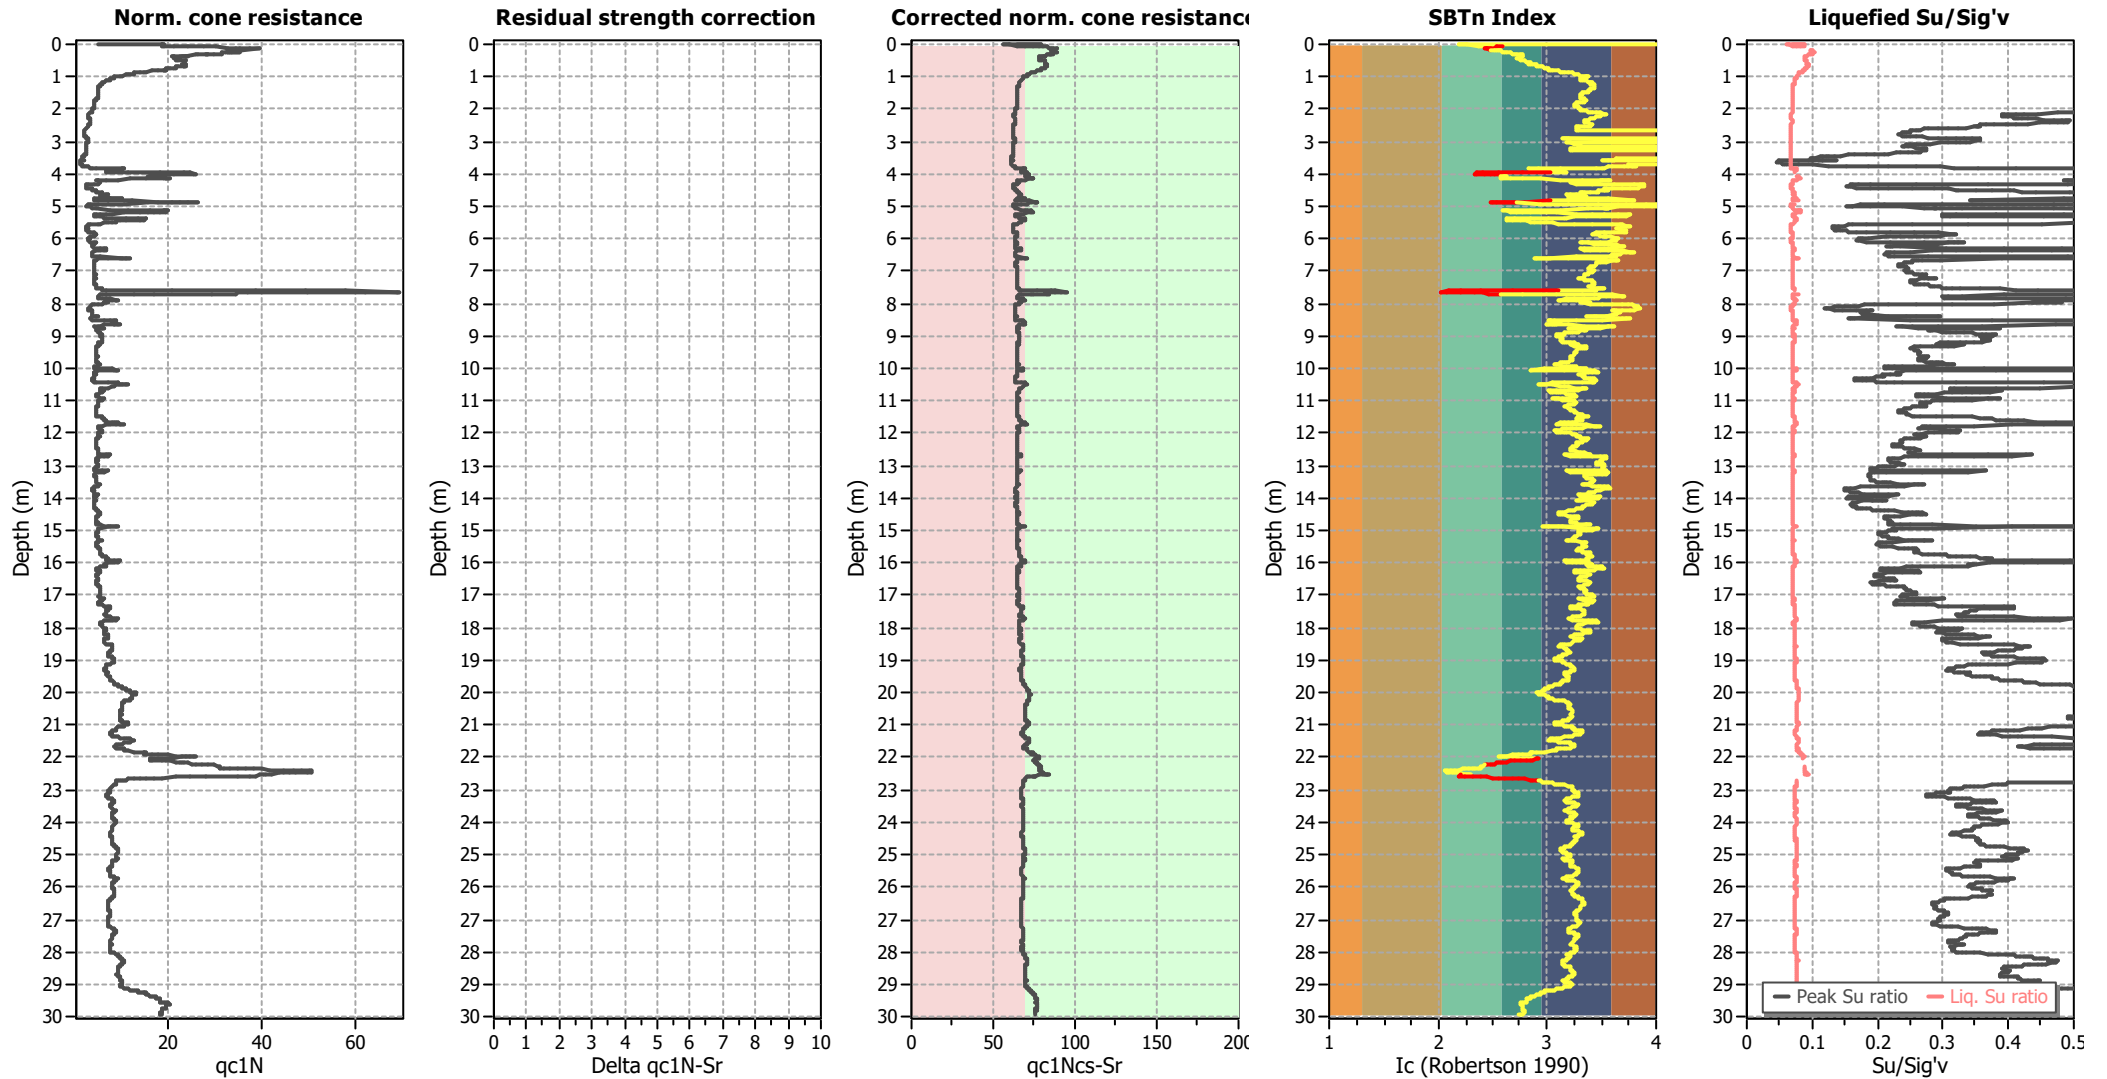

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

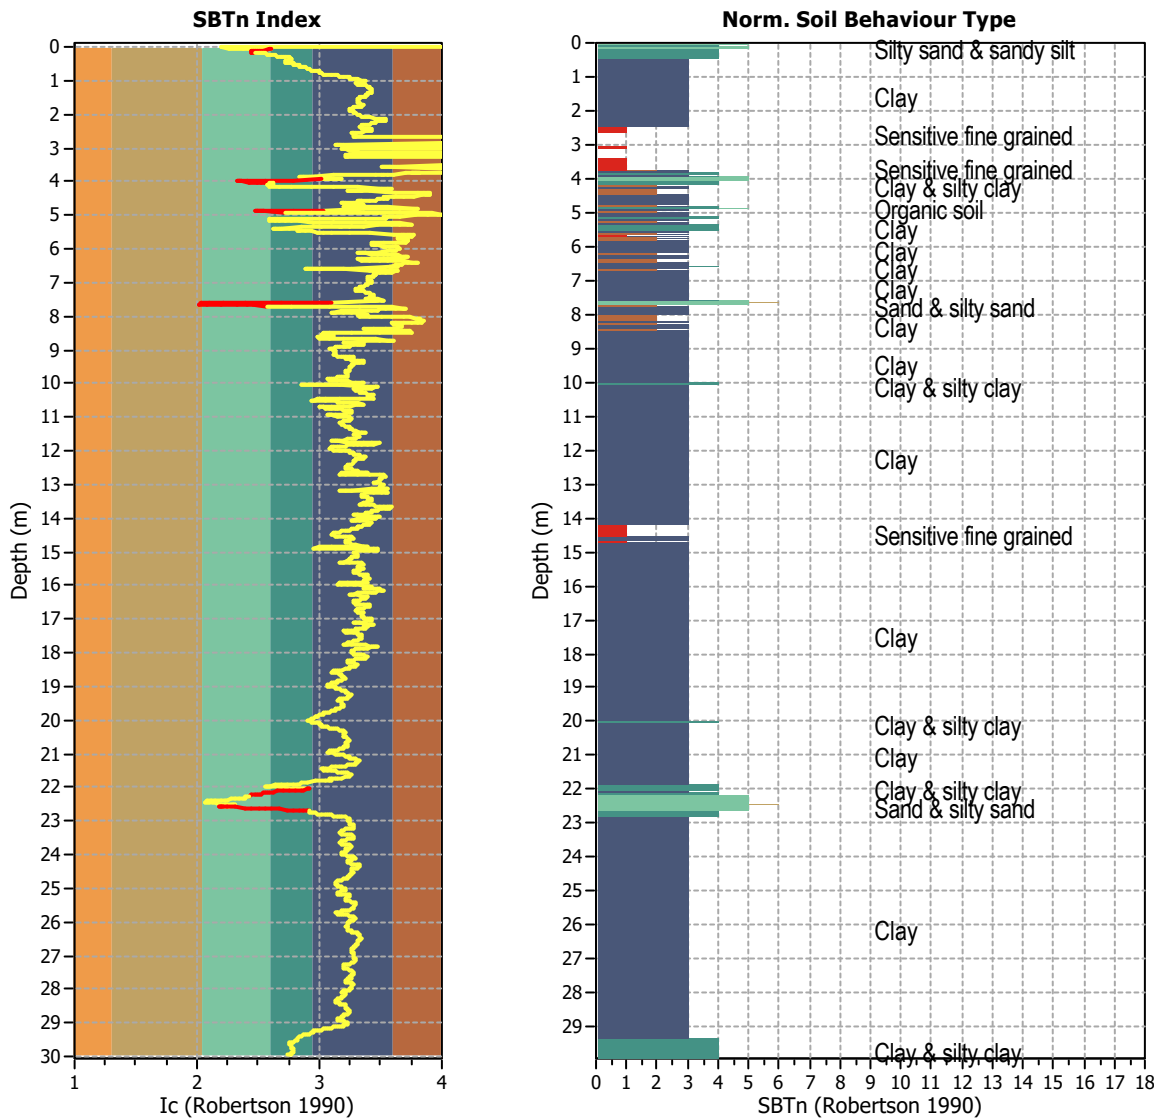


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2994
 Total points excluded: 84
 Exclusion percentage: 2.81%
 Number of layers detected: 10


Estimation of post-earthquake settlements

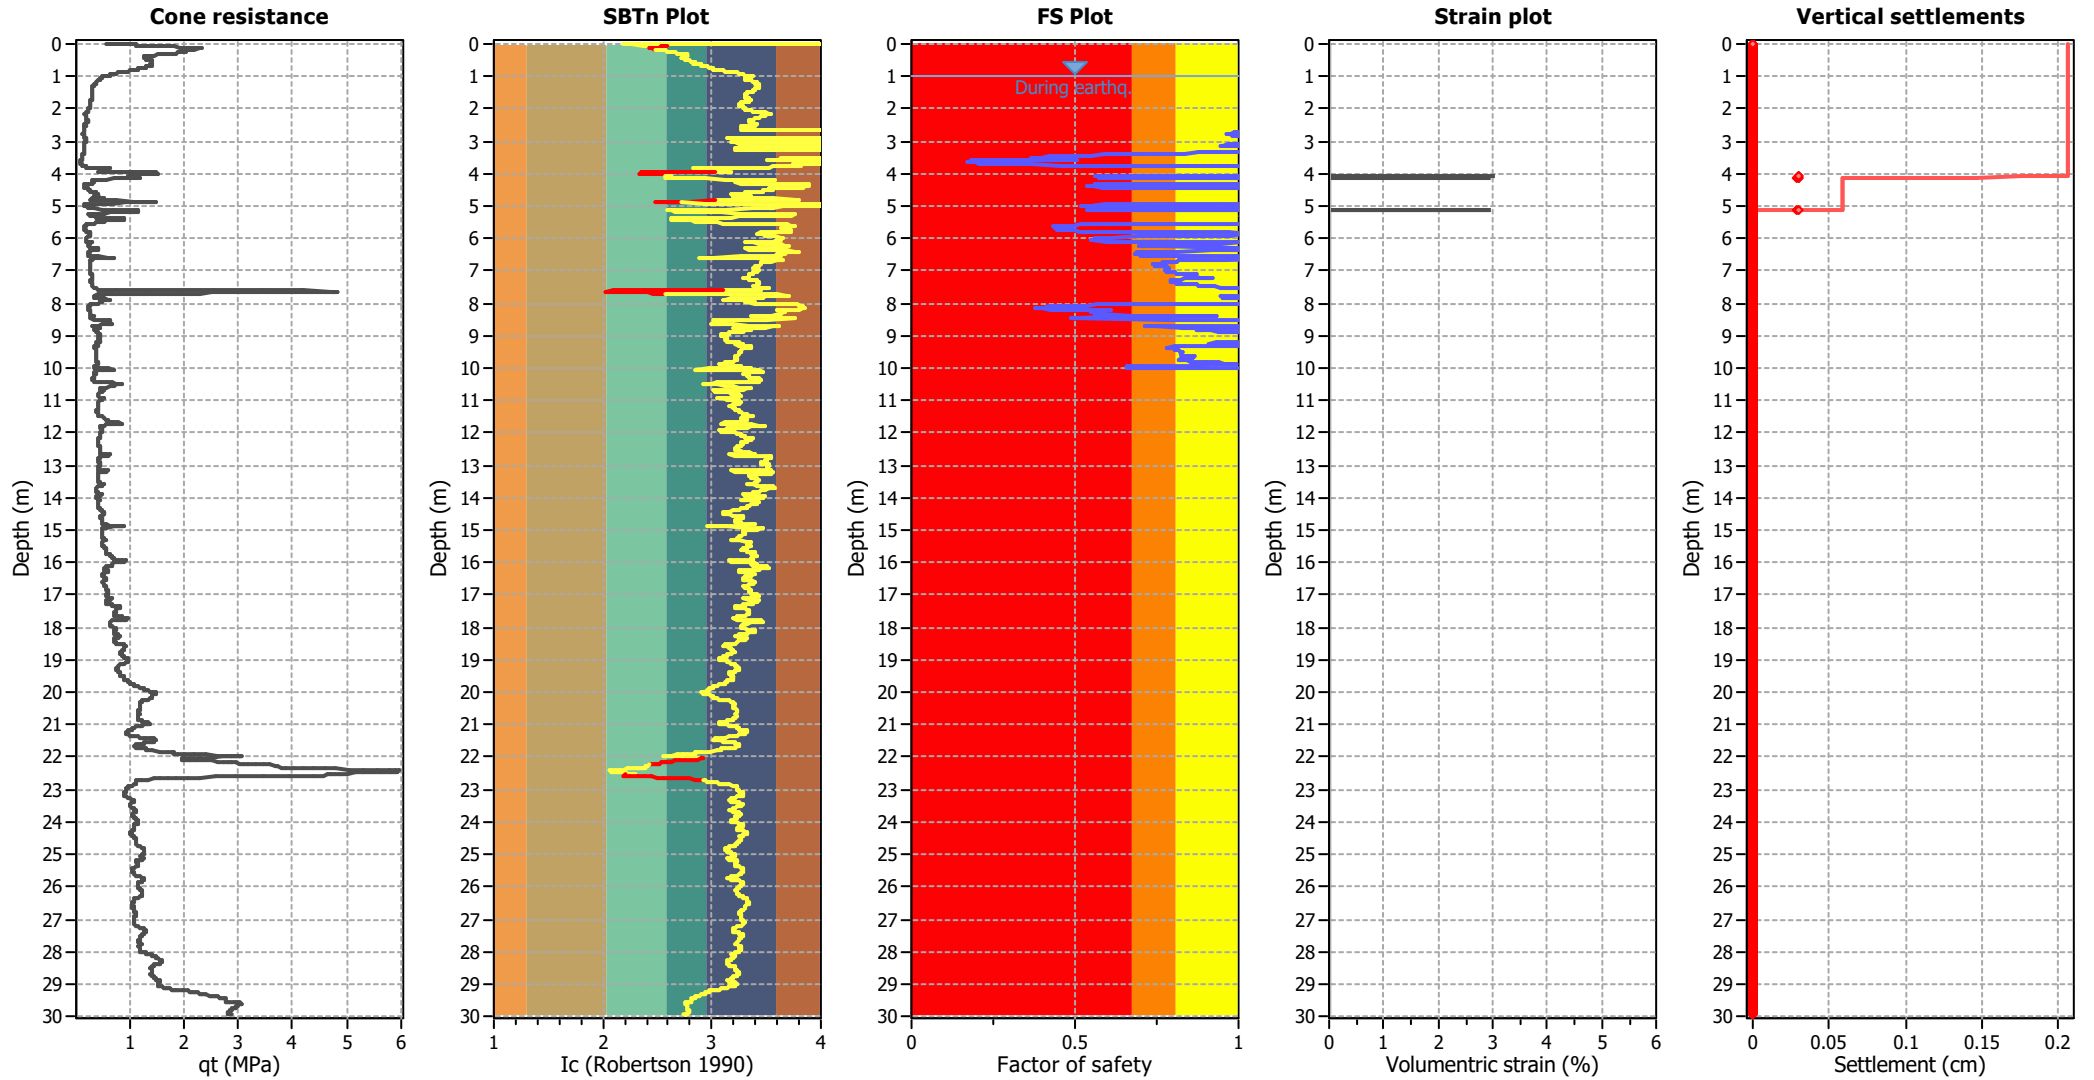

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

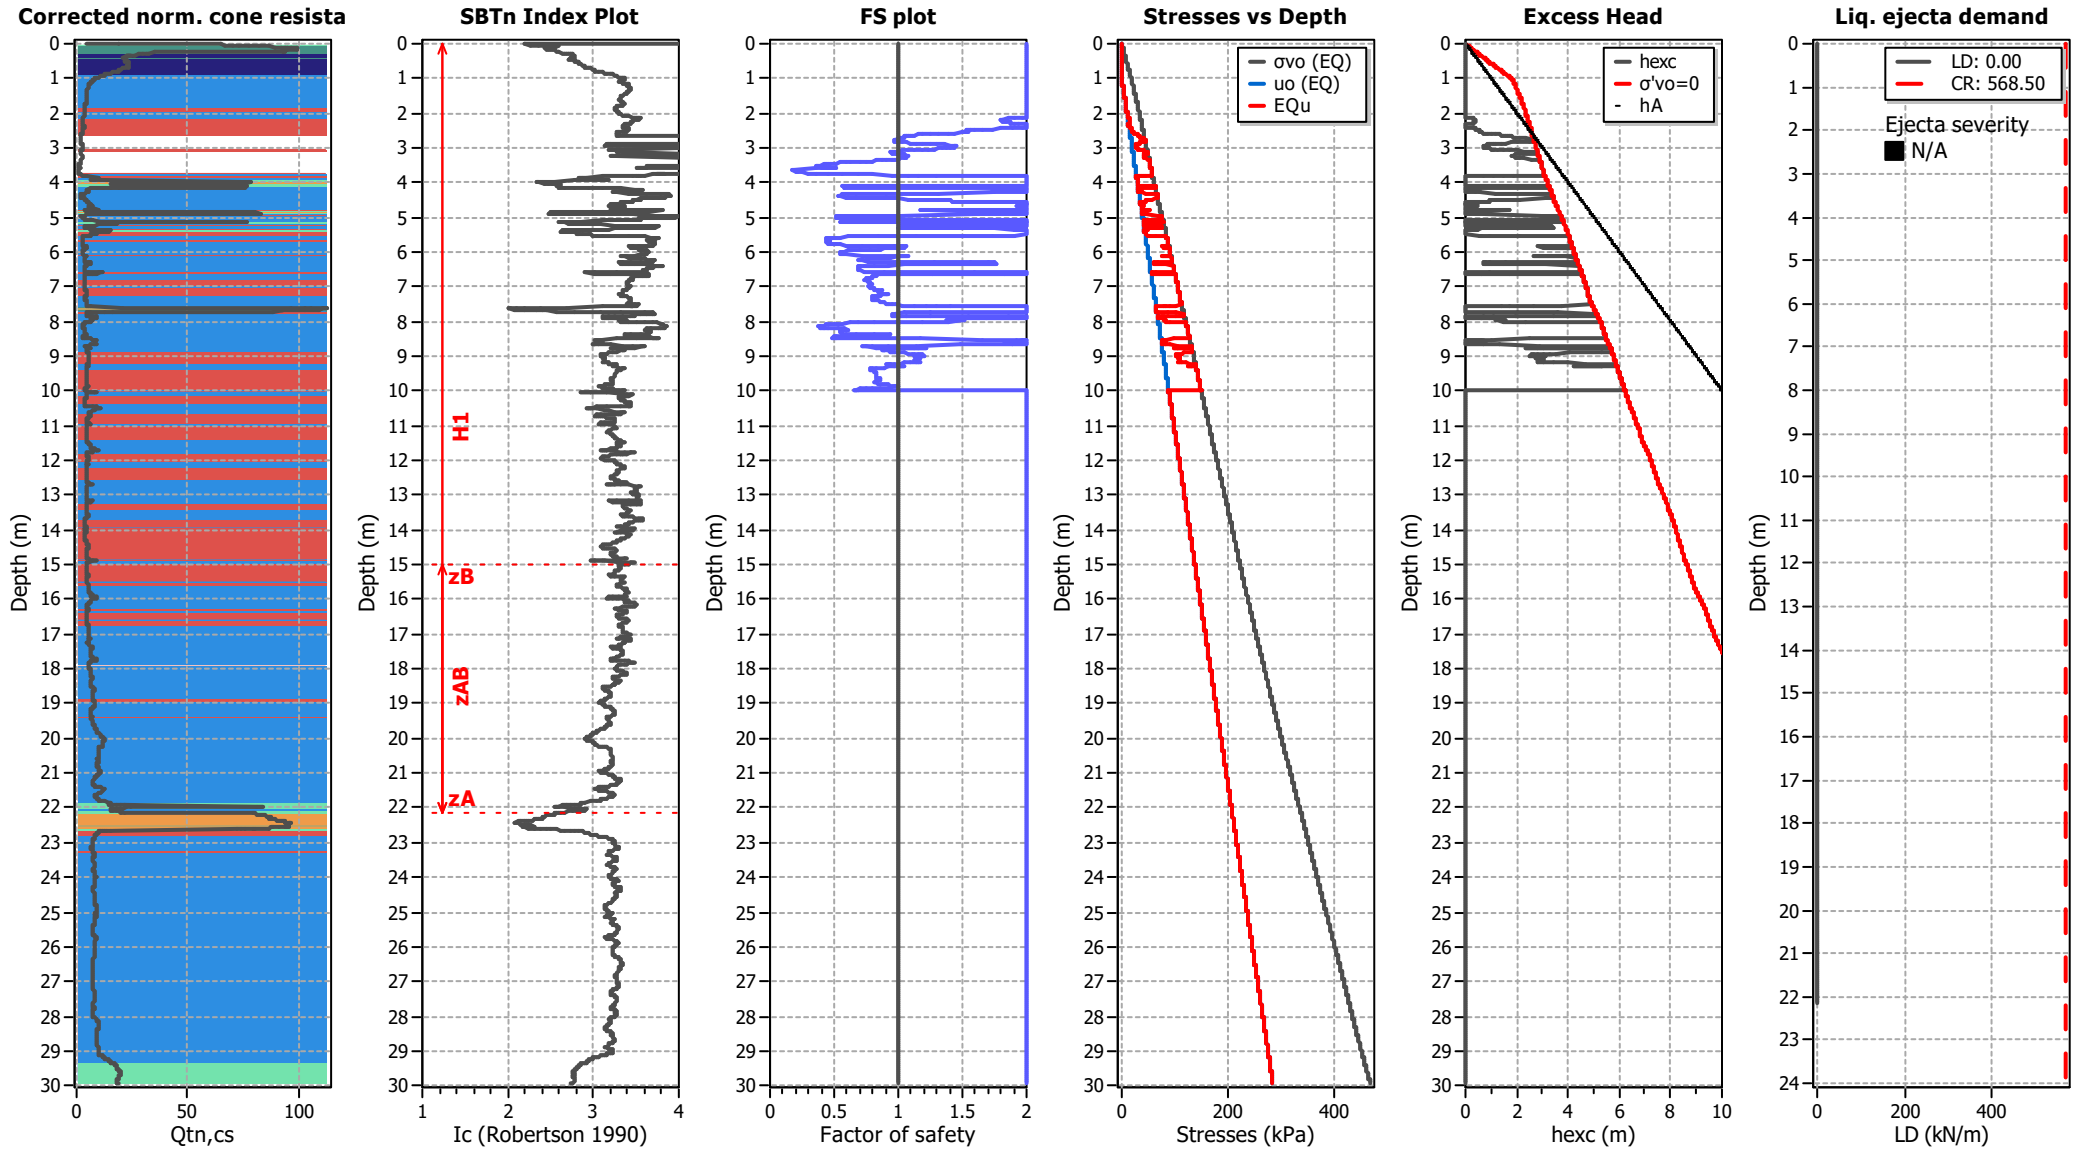

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT14

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

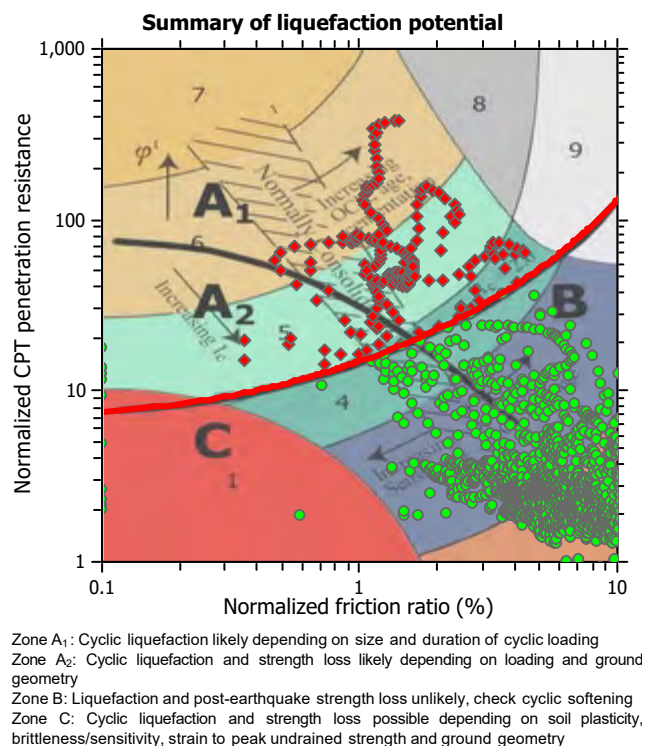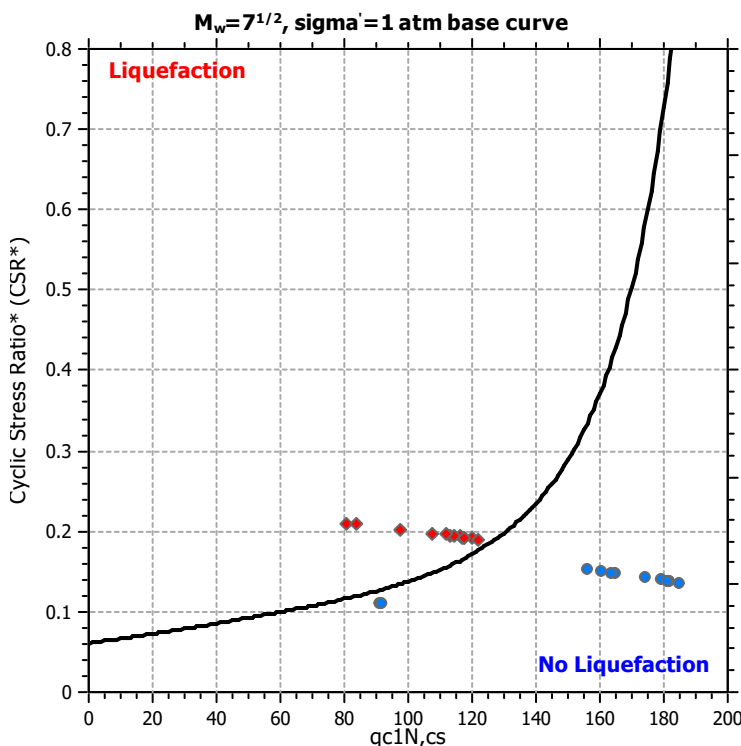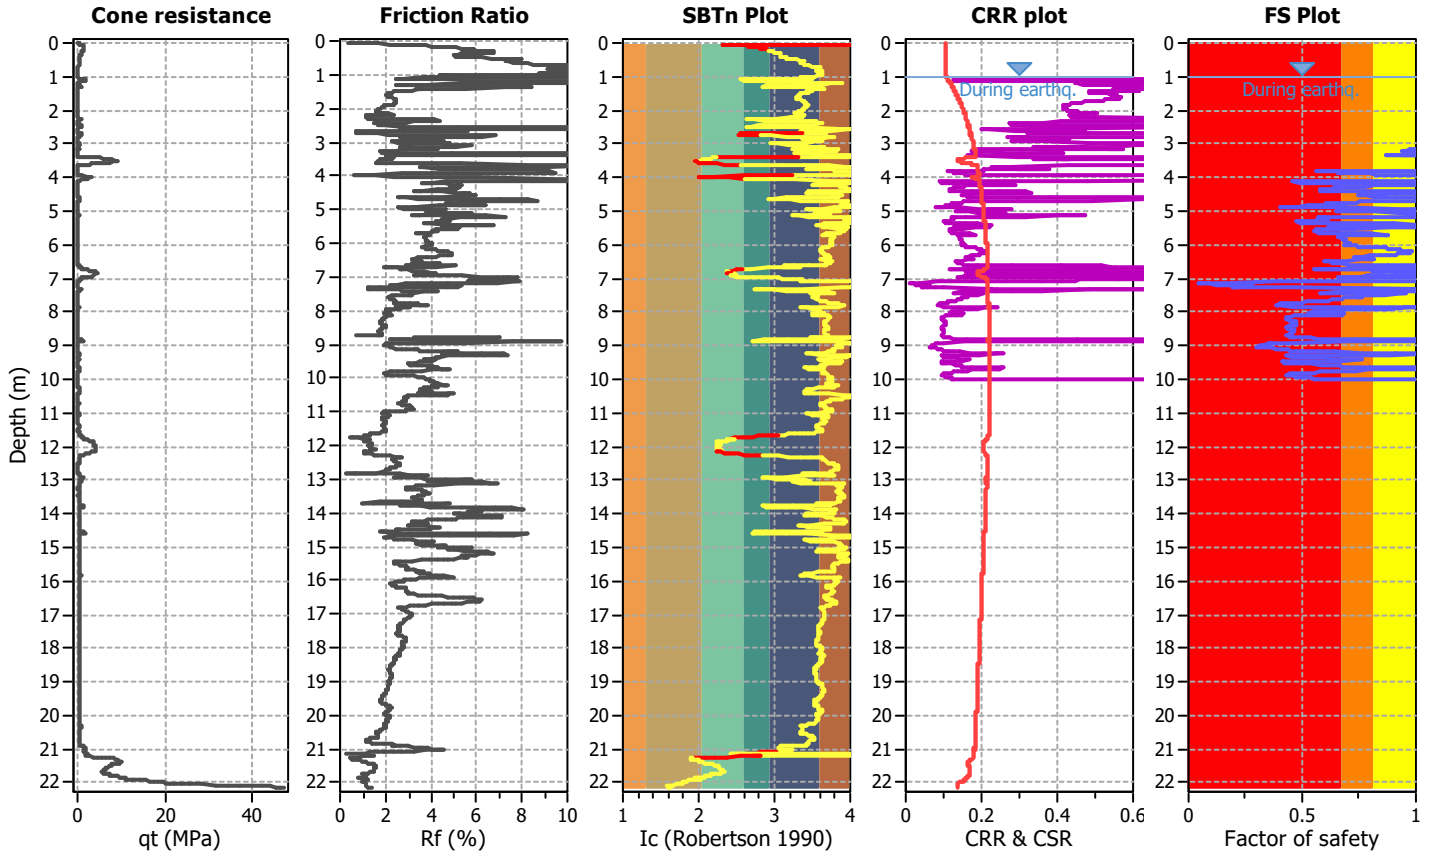

CPT basic interpretation plots

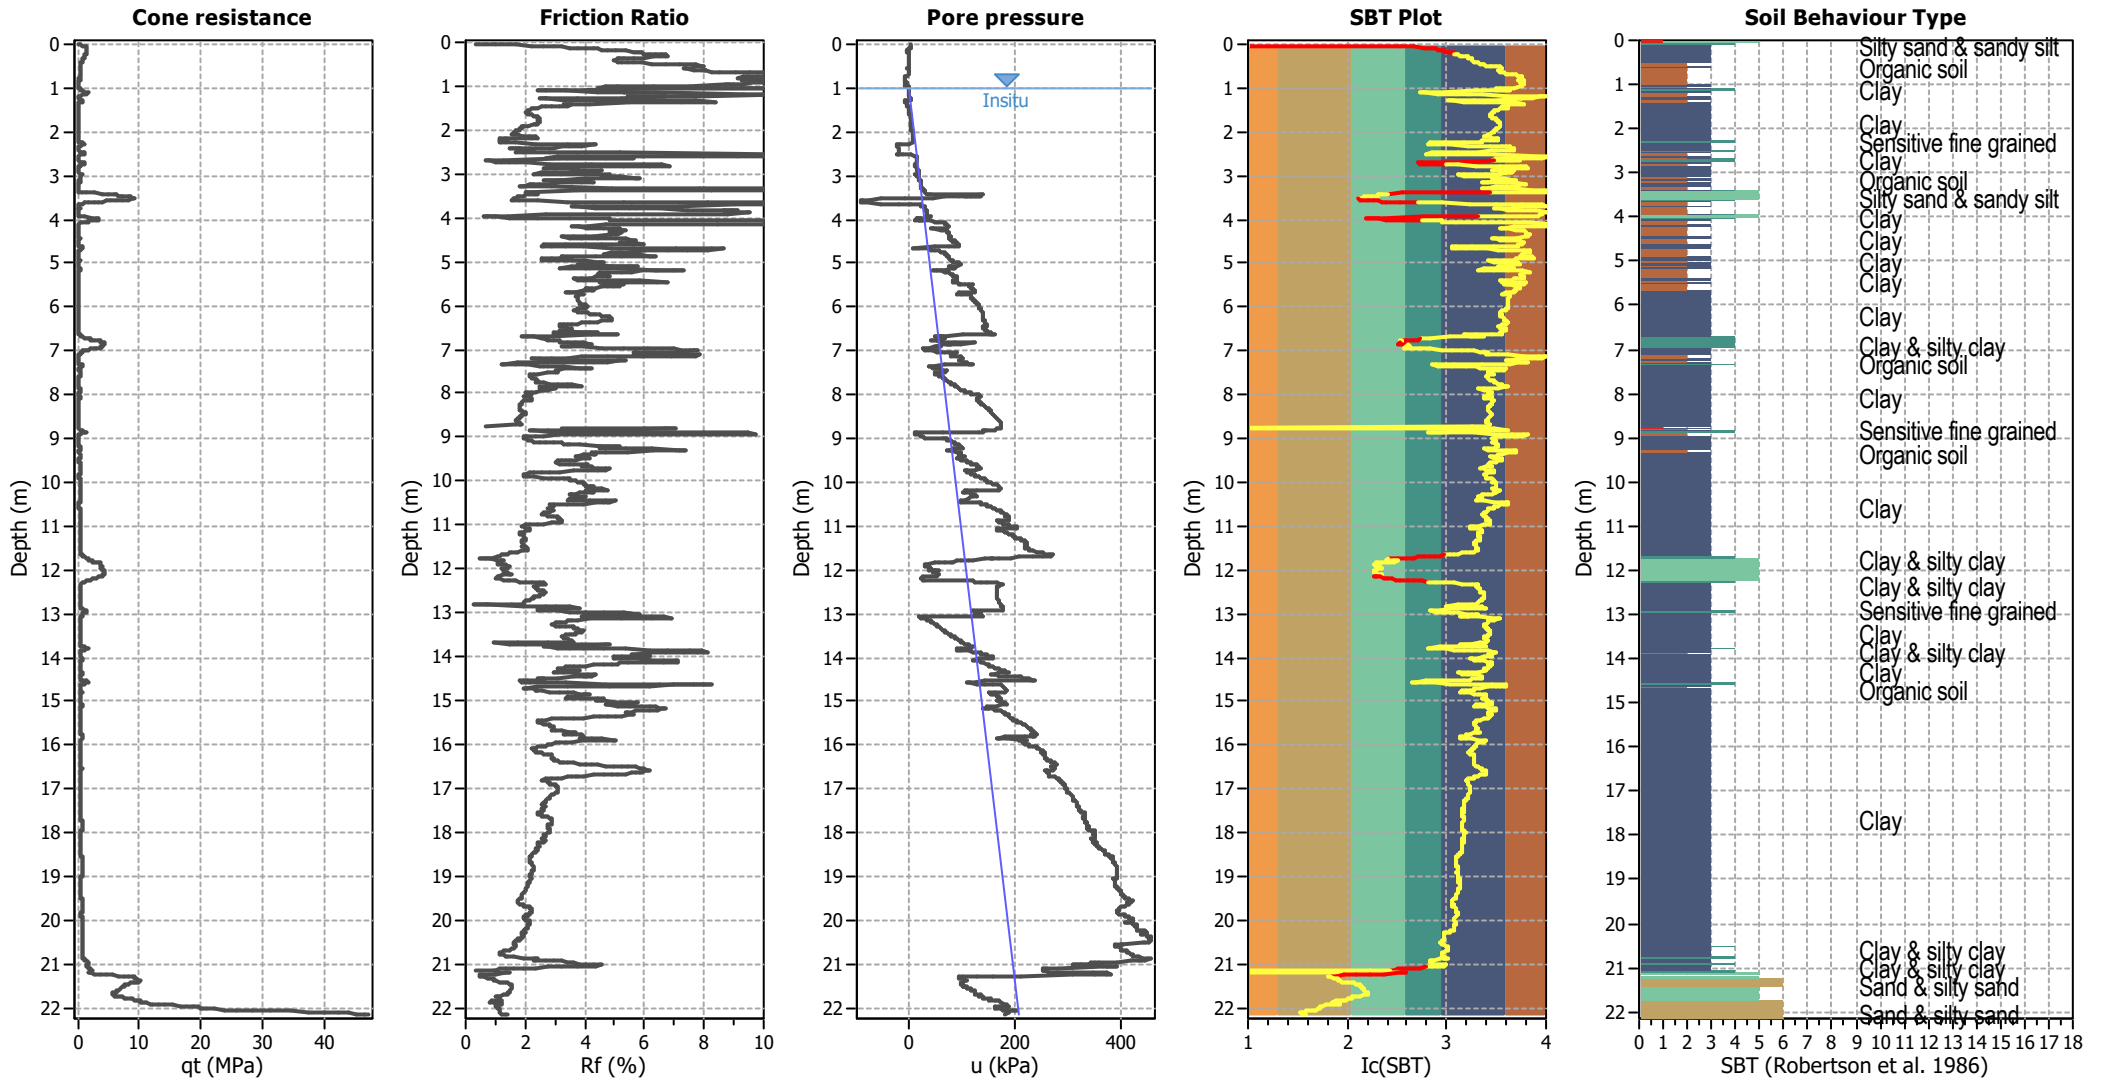


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

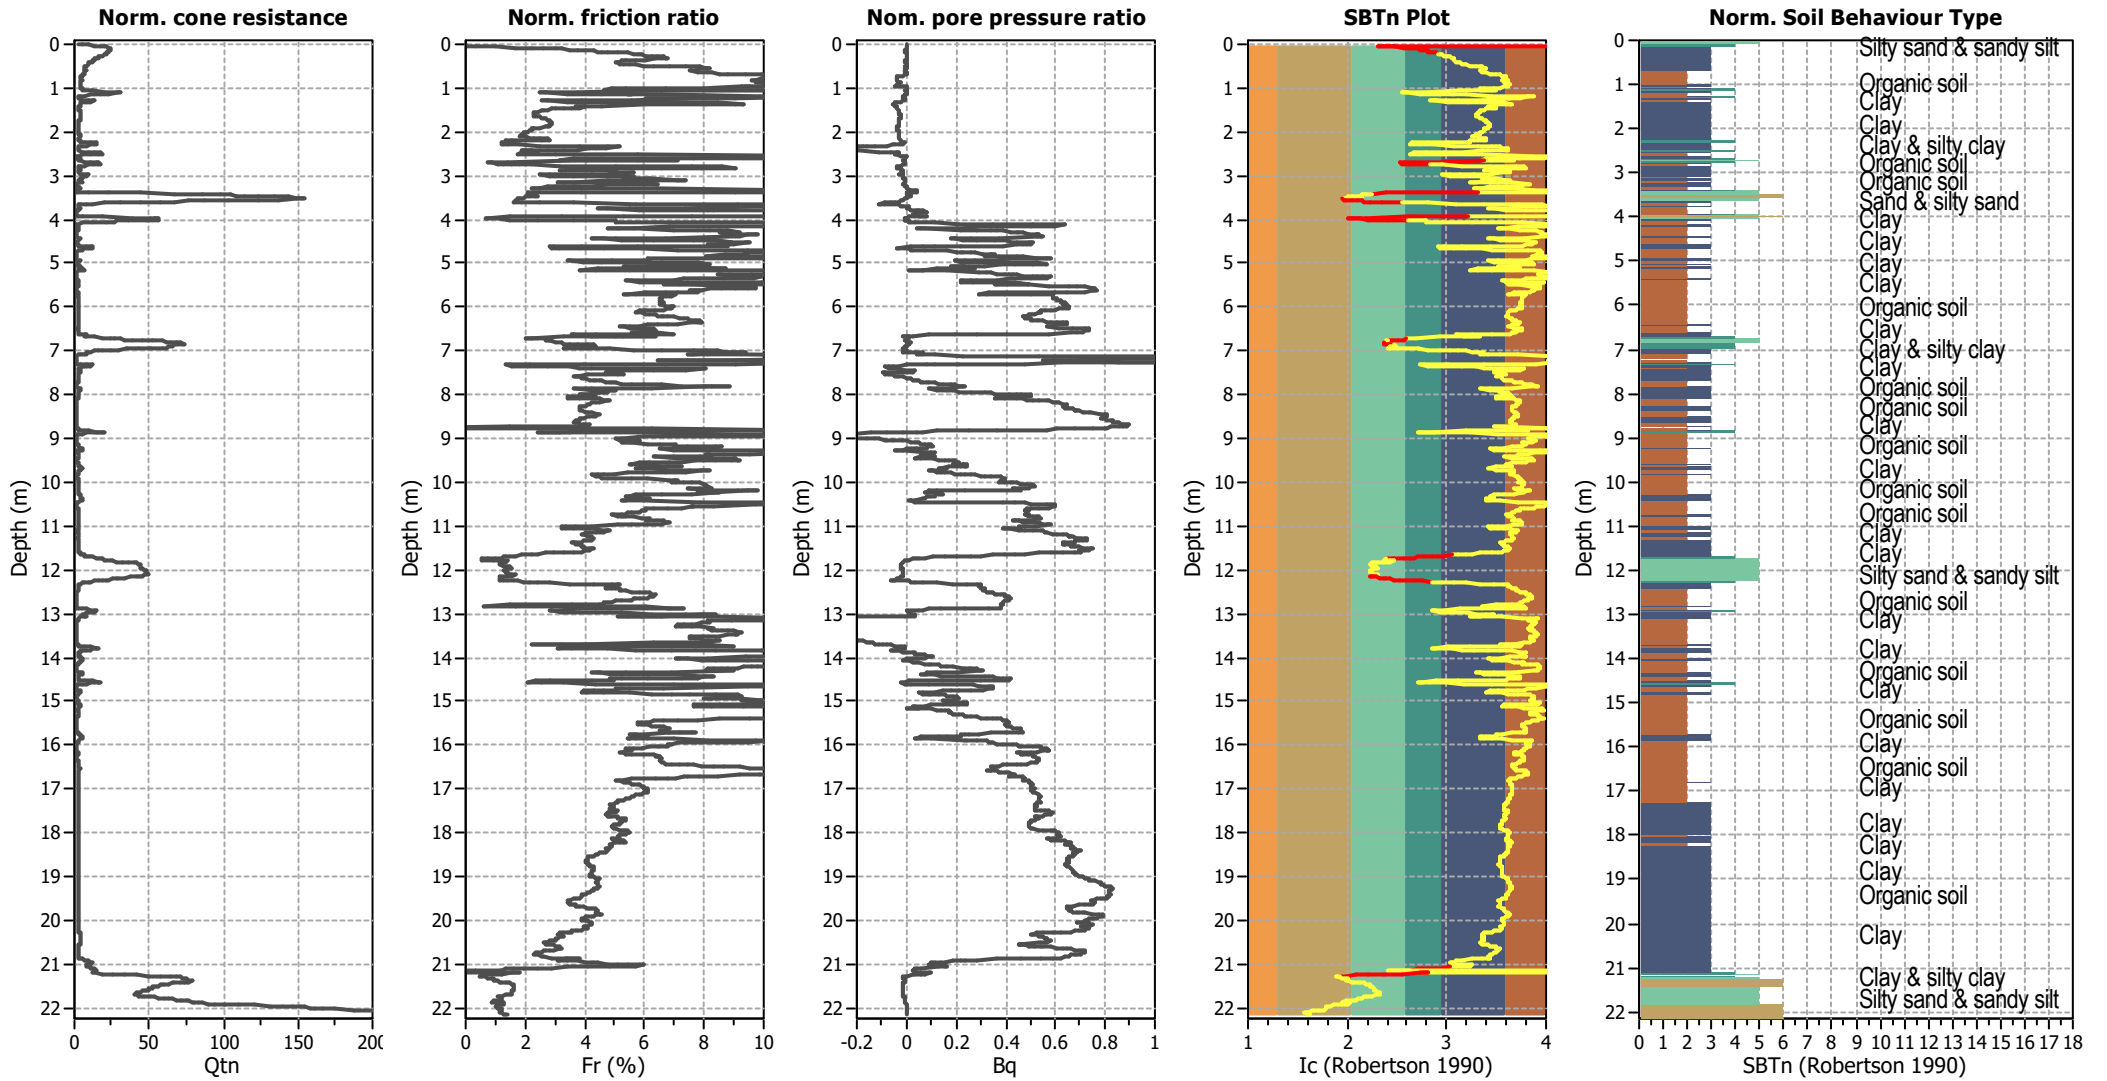


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

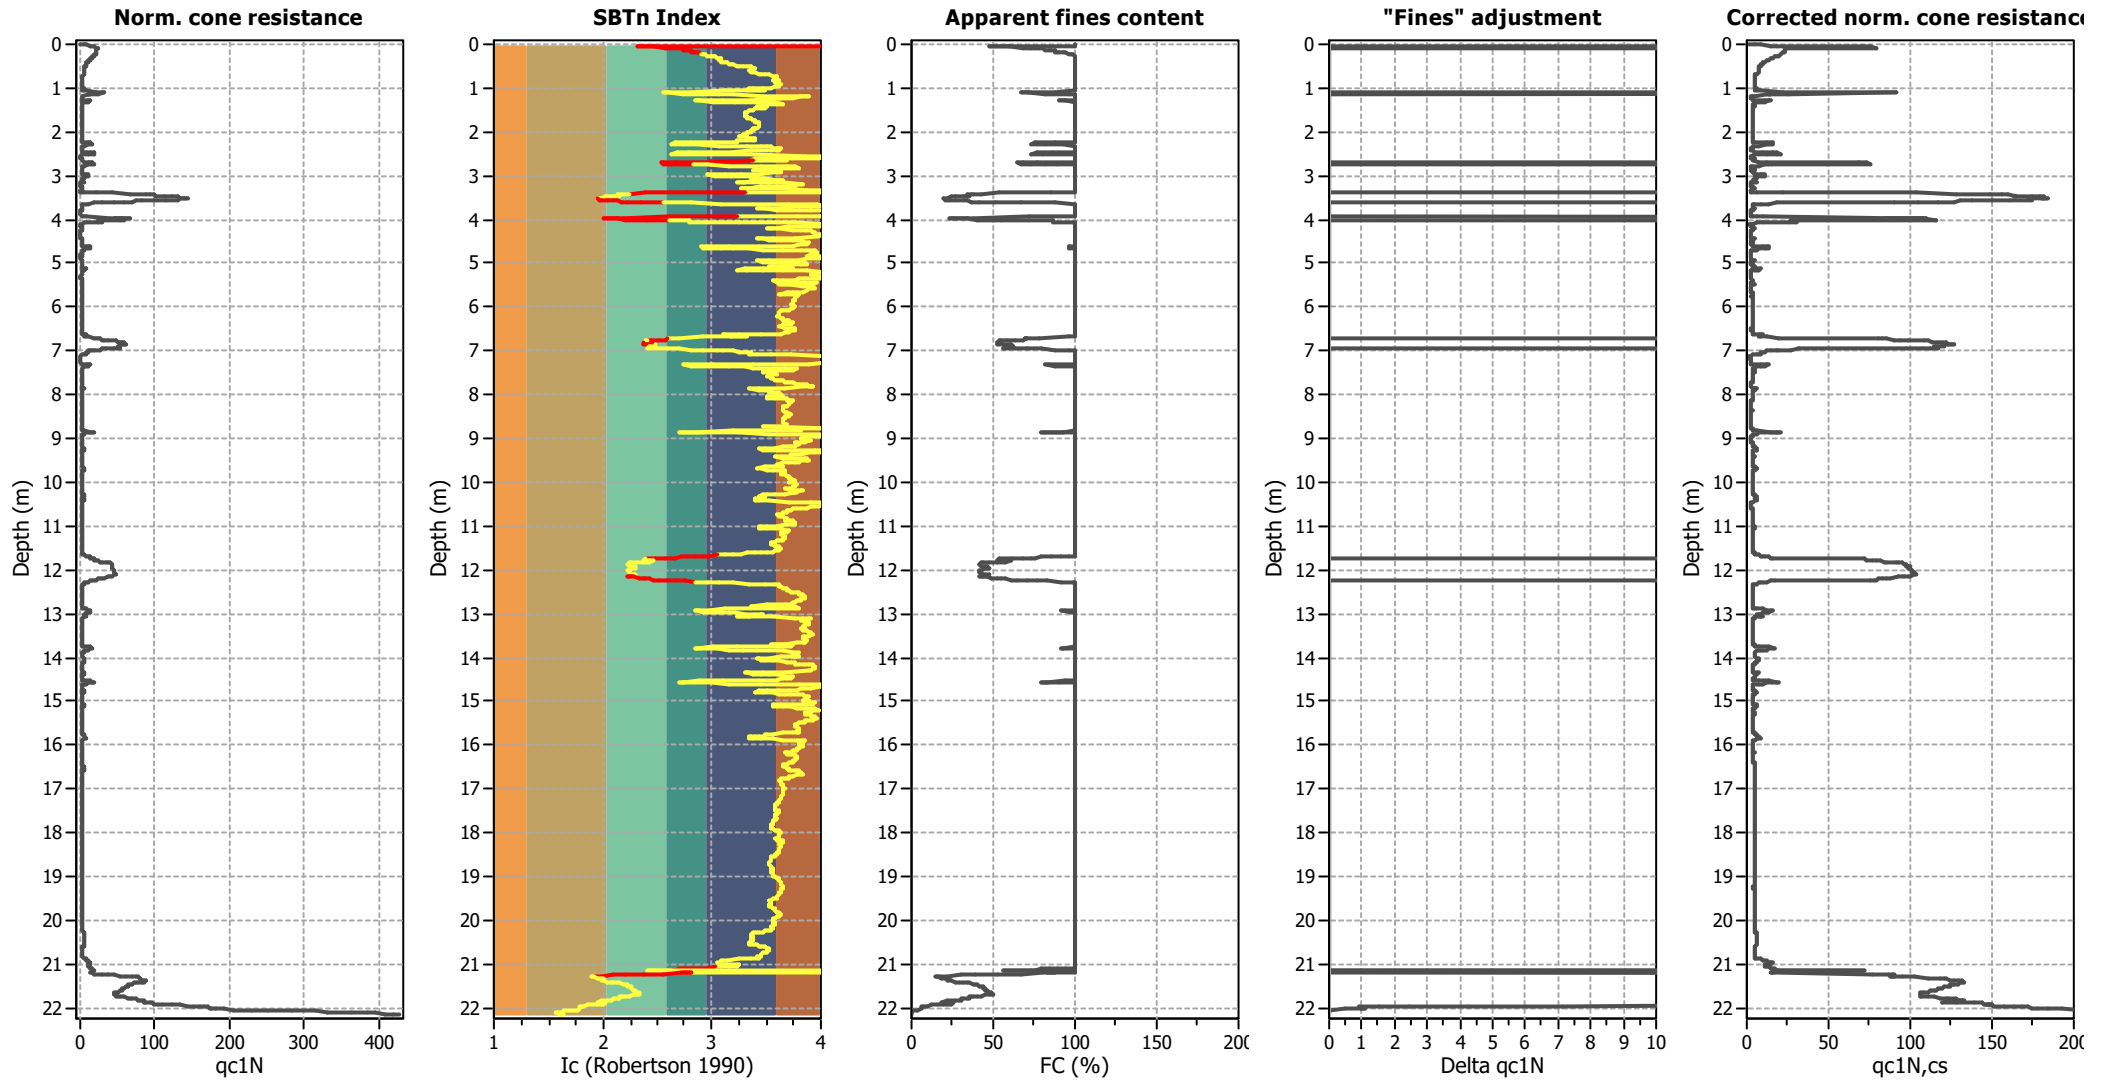

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

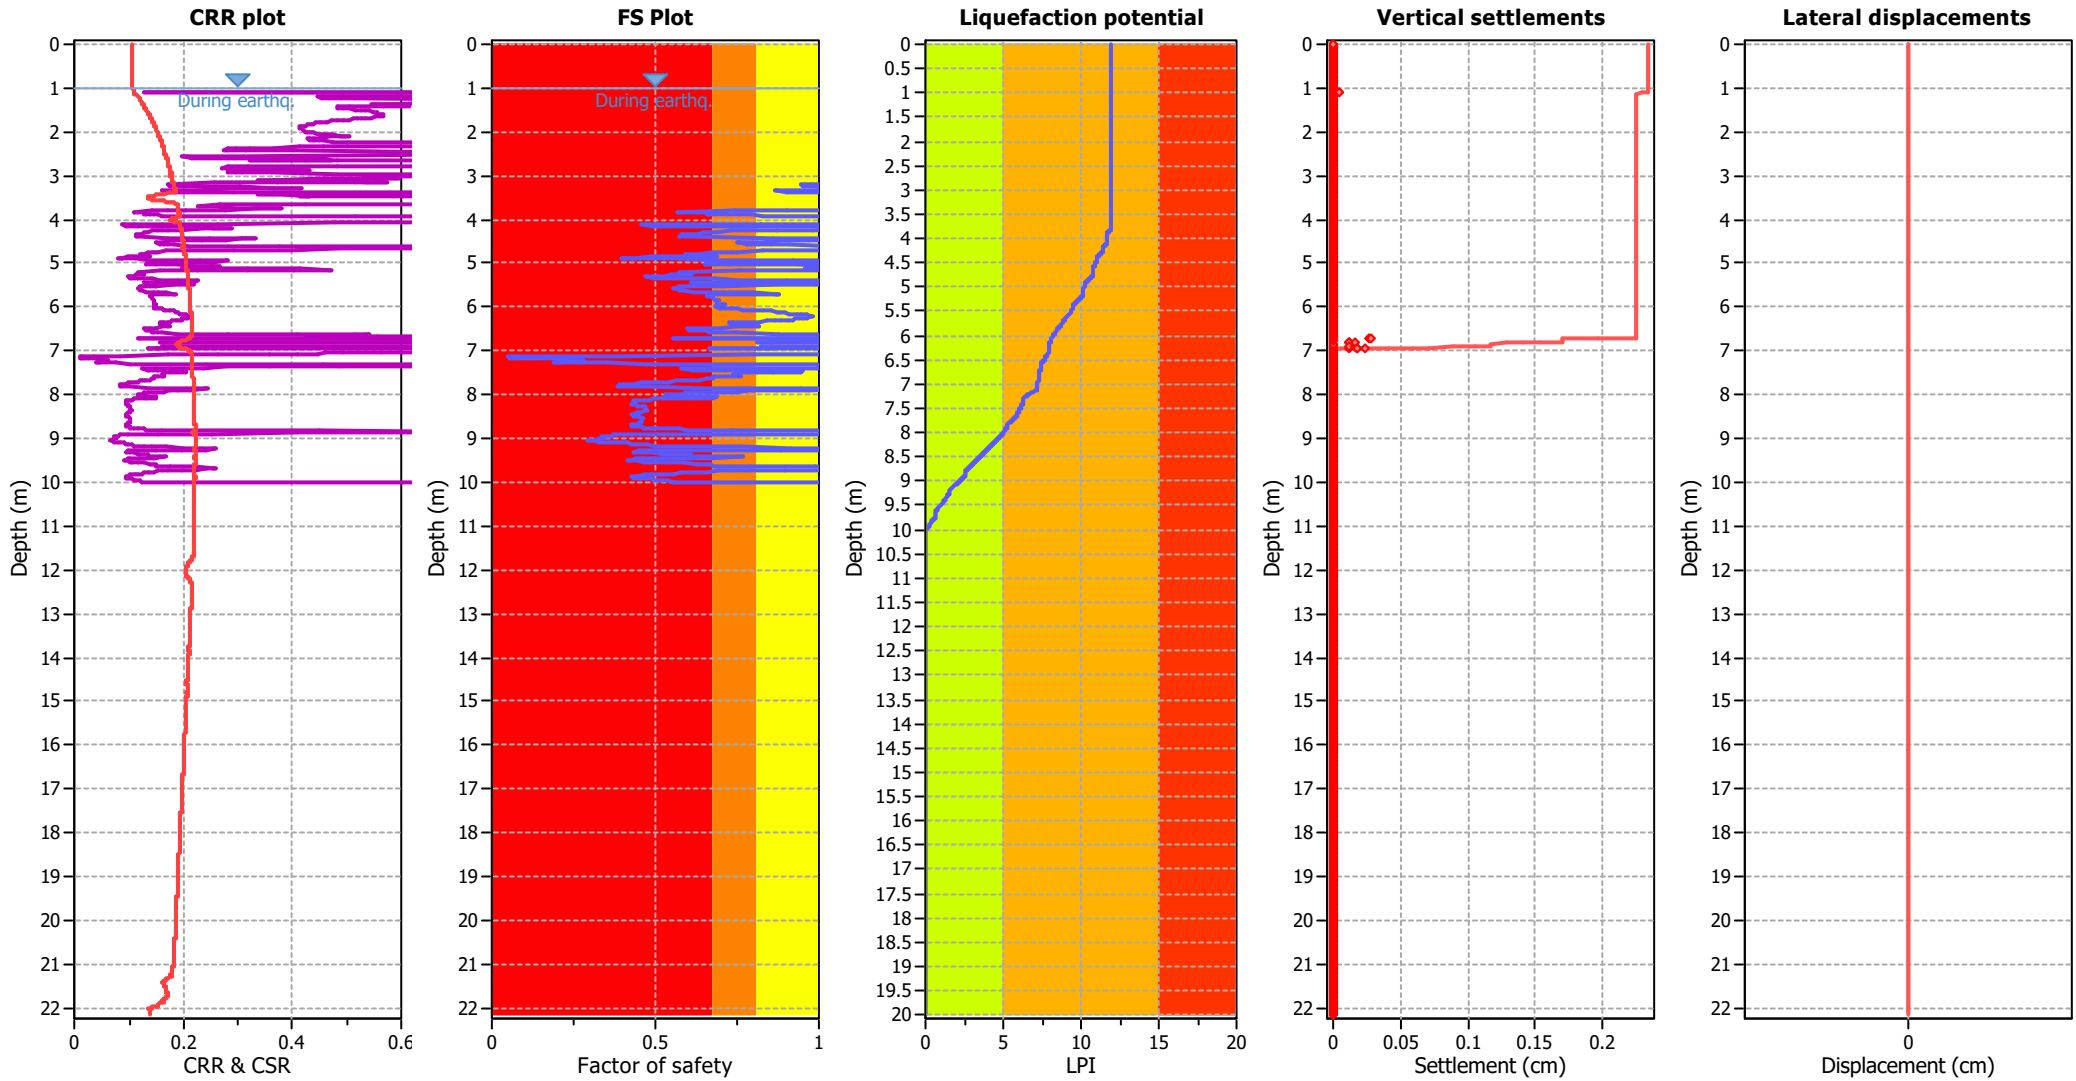

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m
Fines correction method:	B&I (2014)	Average results interval:	3
Points to test:	Based on Ic value	Ic cut-off value:	2.60
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT
Peak ground acceleration:	0.19	Use fill:	No
Depth to water table (insitu):	1.00 m	Fill height:	N/A

Fill weight:	N/A
Transition detect. applied:	Yes
K_{σ} applied:	Yes
Clay like behavior applied:	Sand & Clay
Limit depth applied:	Yes
Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

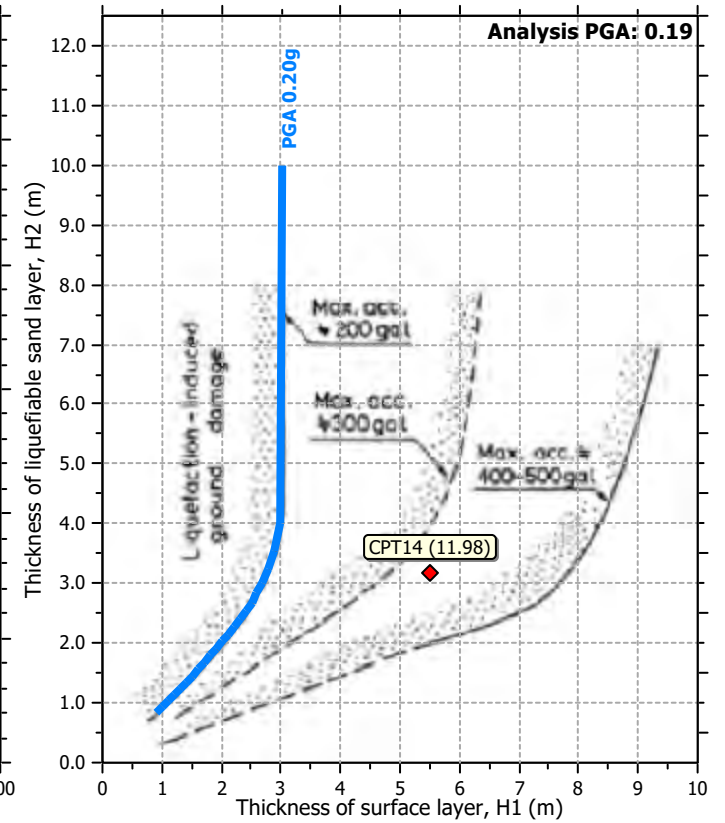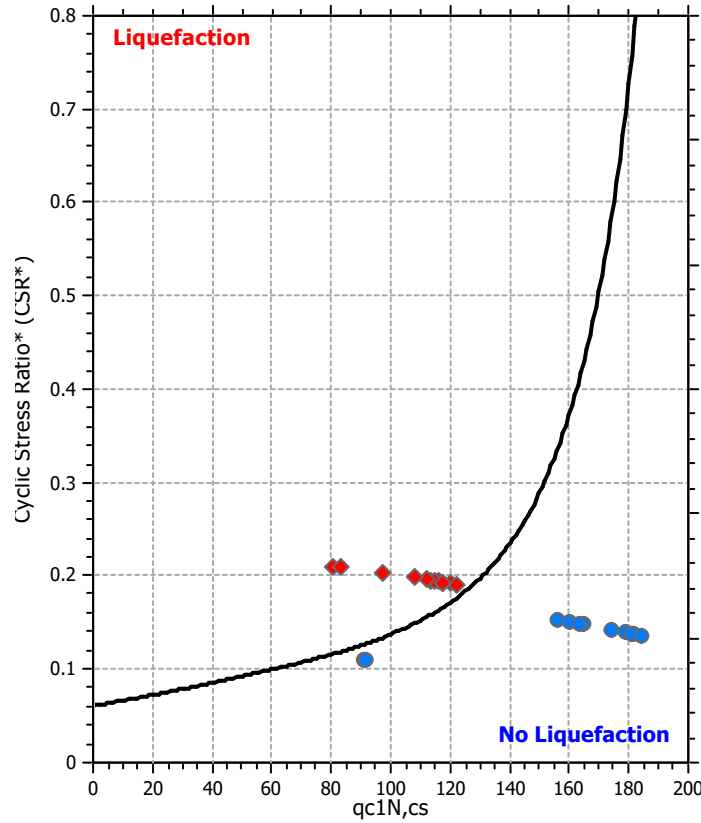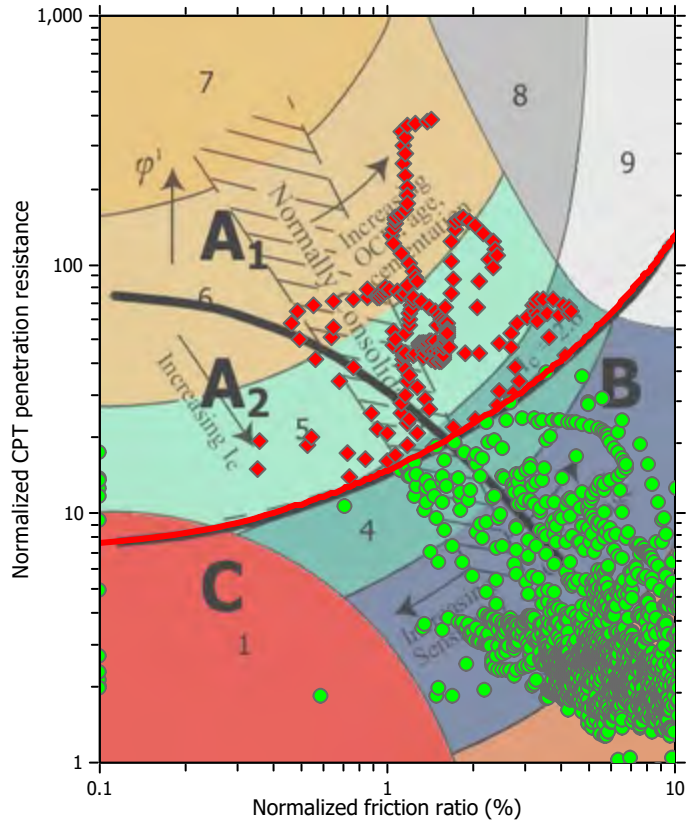

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

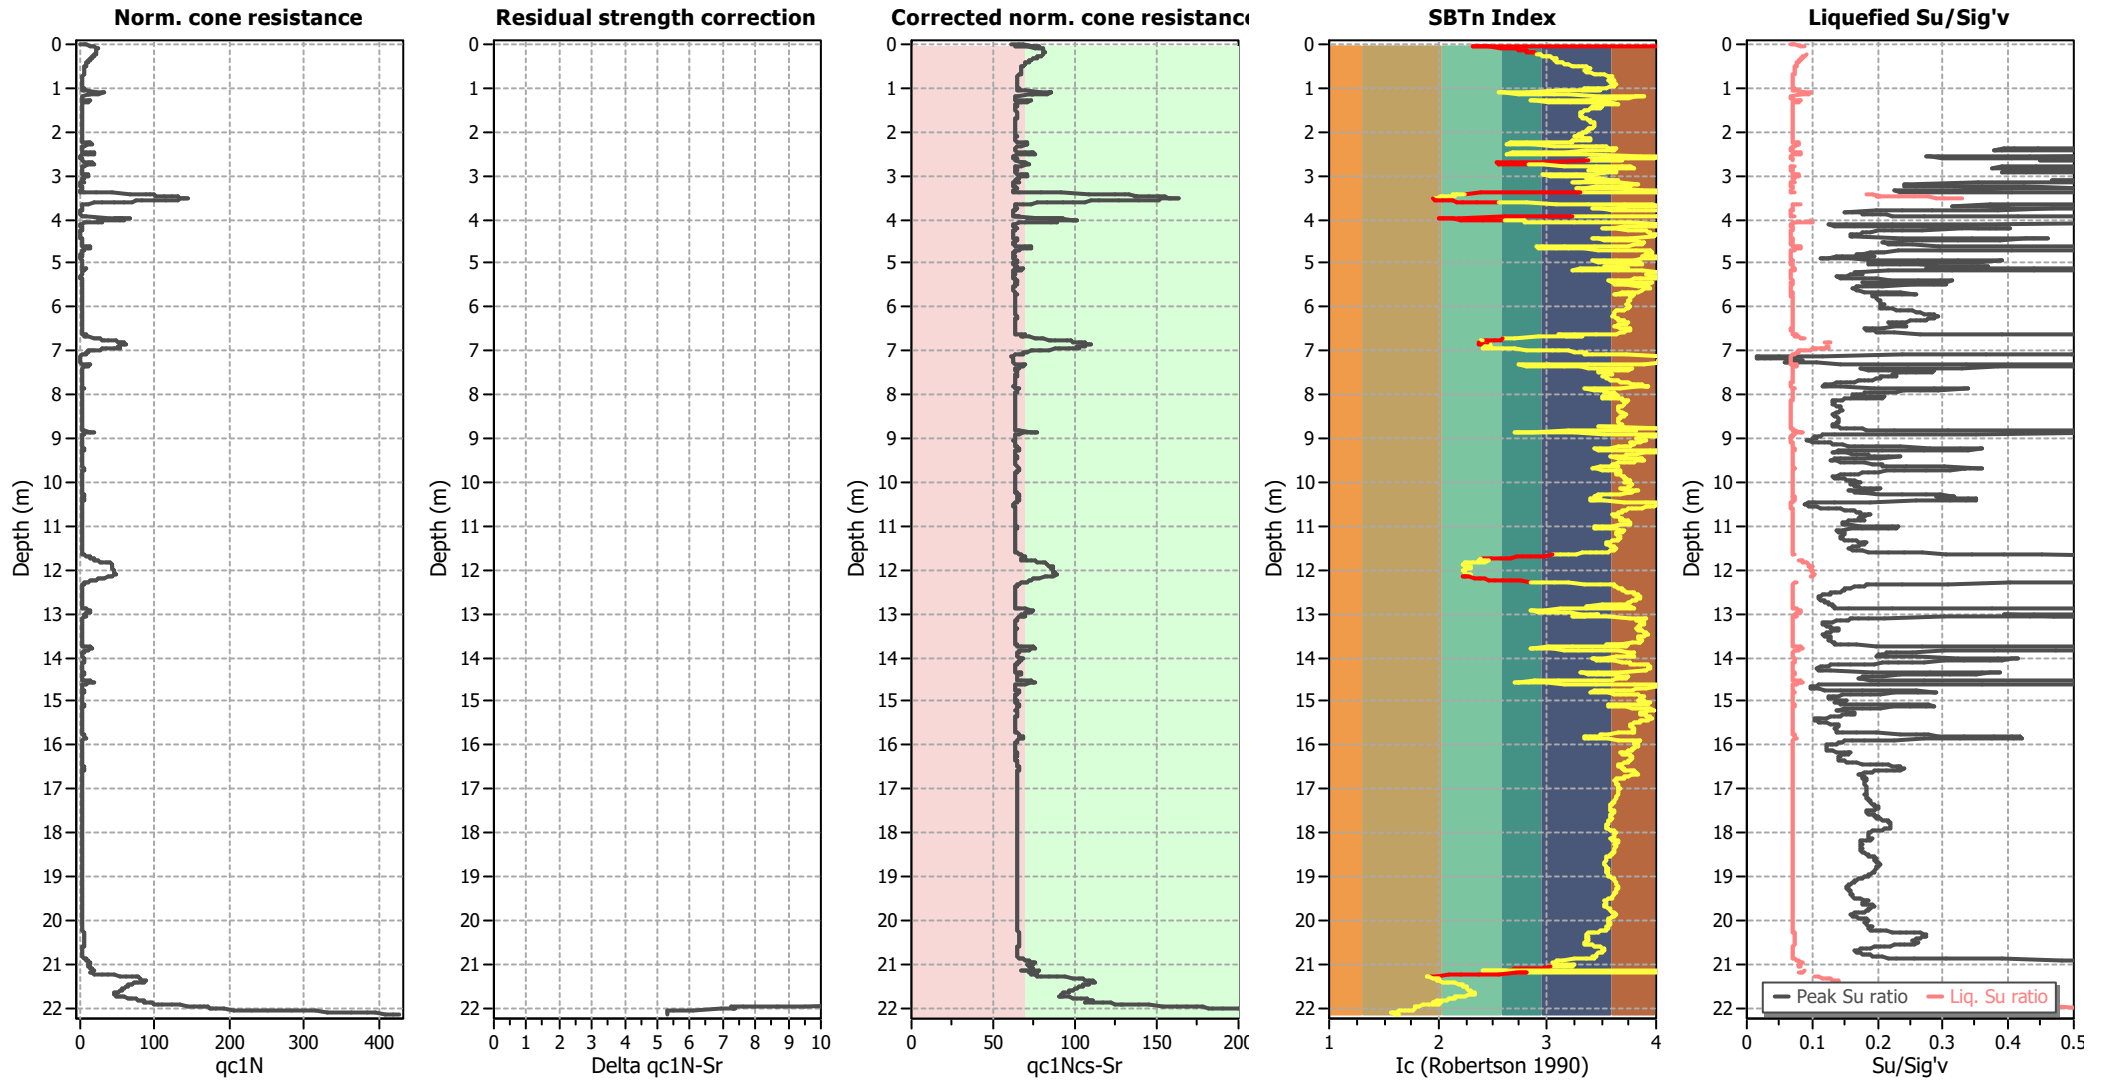

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

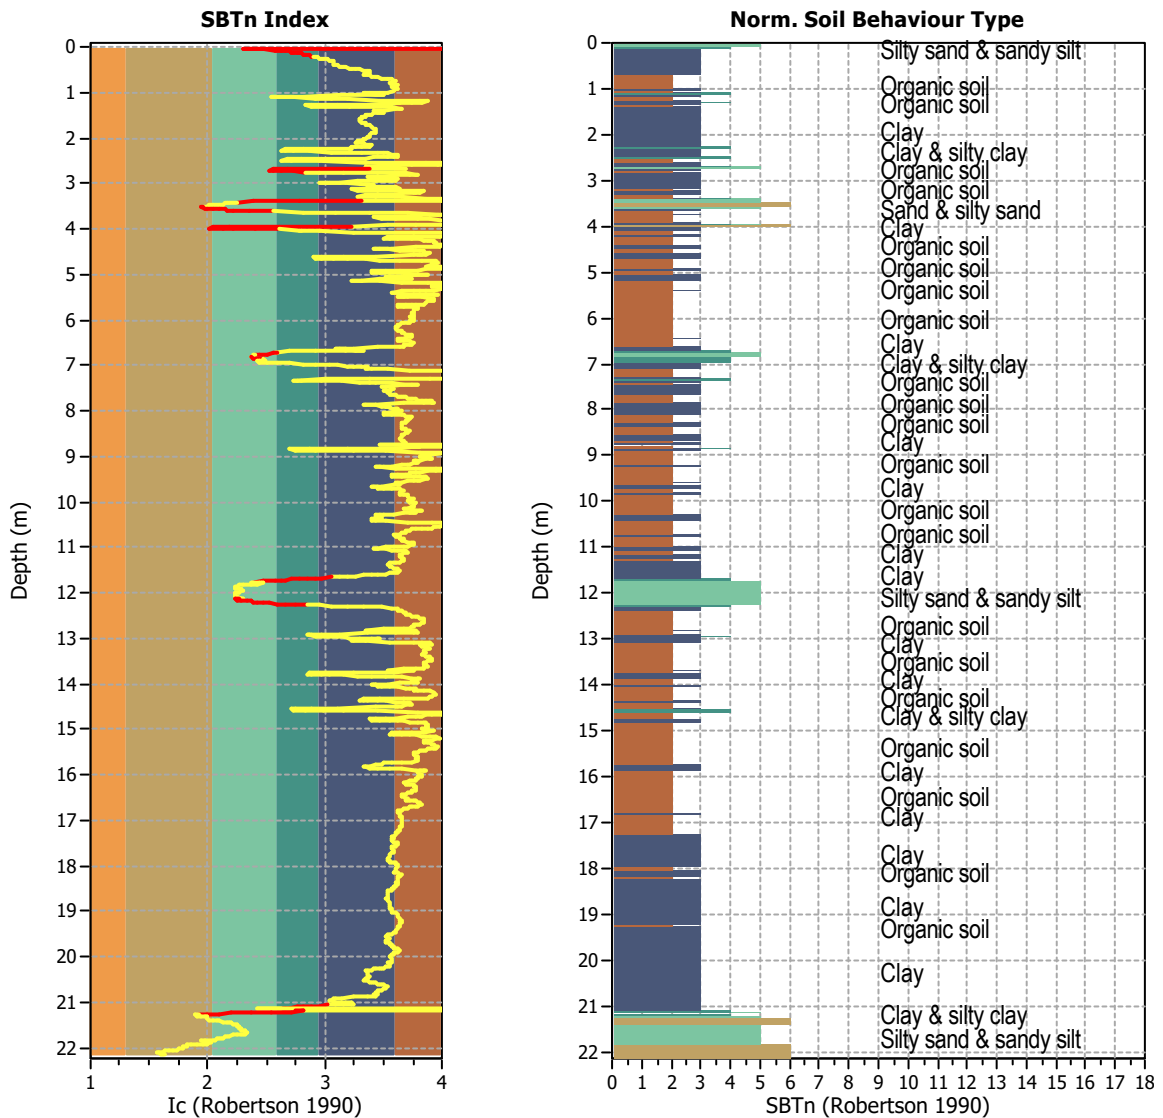


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2216
 Total points excluded: 107
 Exclusion percentage: 4.83%
 Number of layers detected: 13


Estimation of post-earthquake settlements

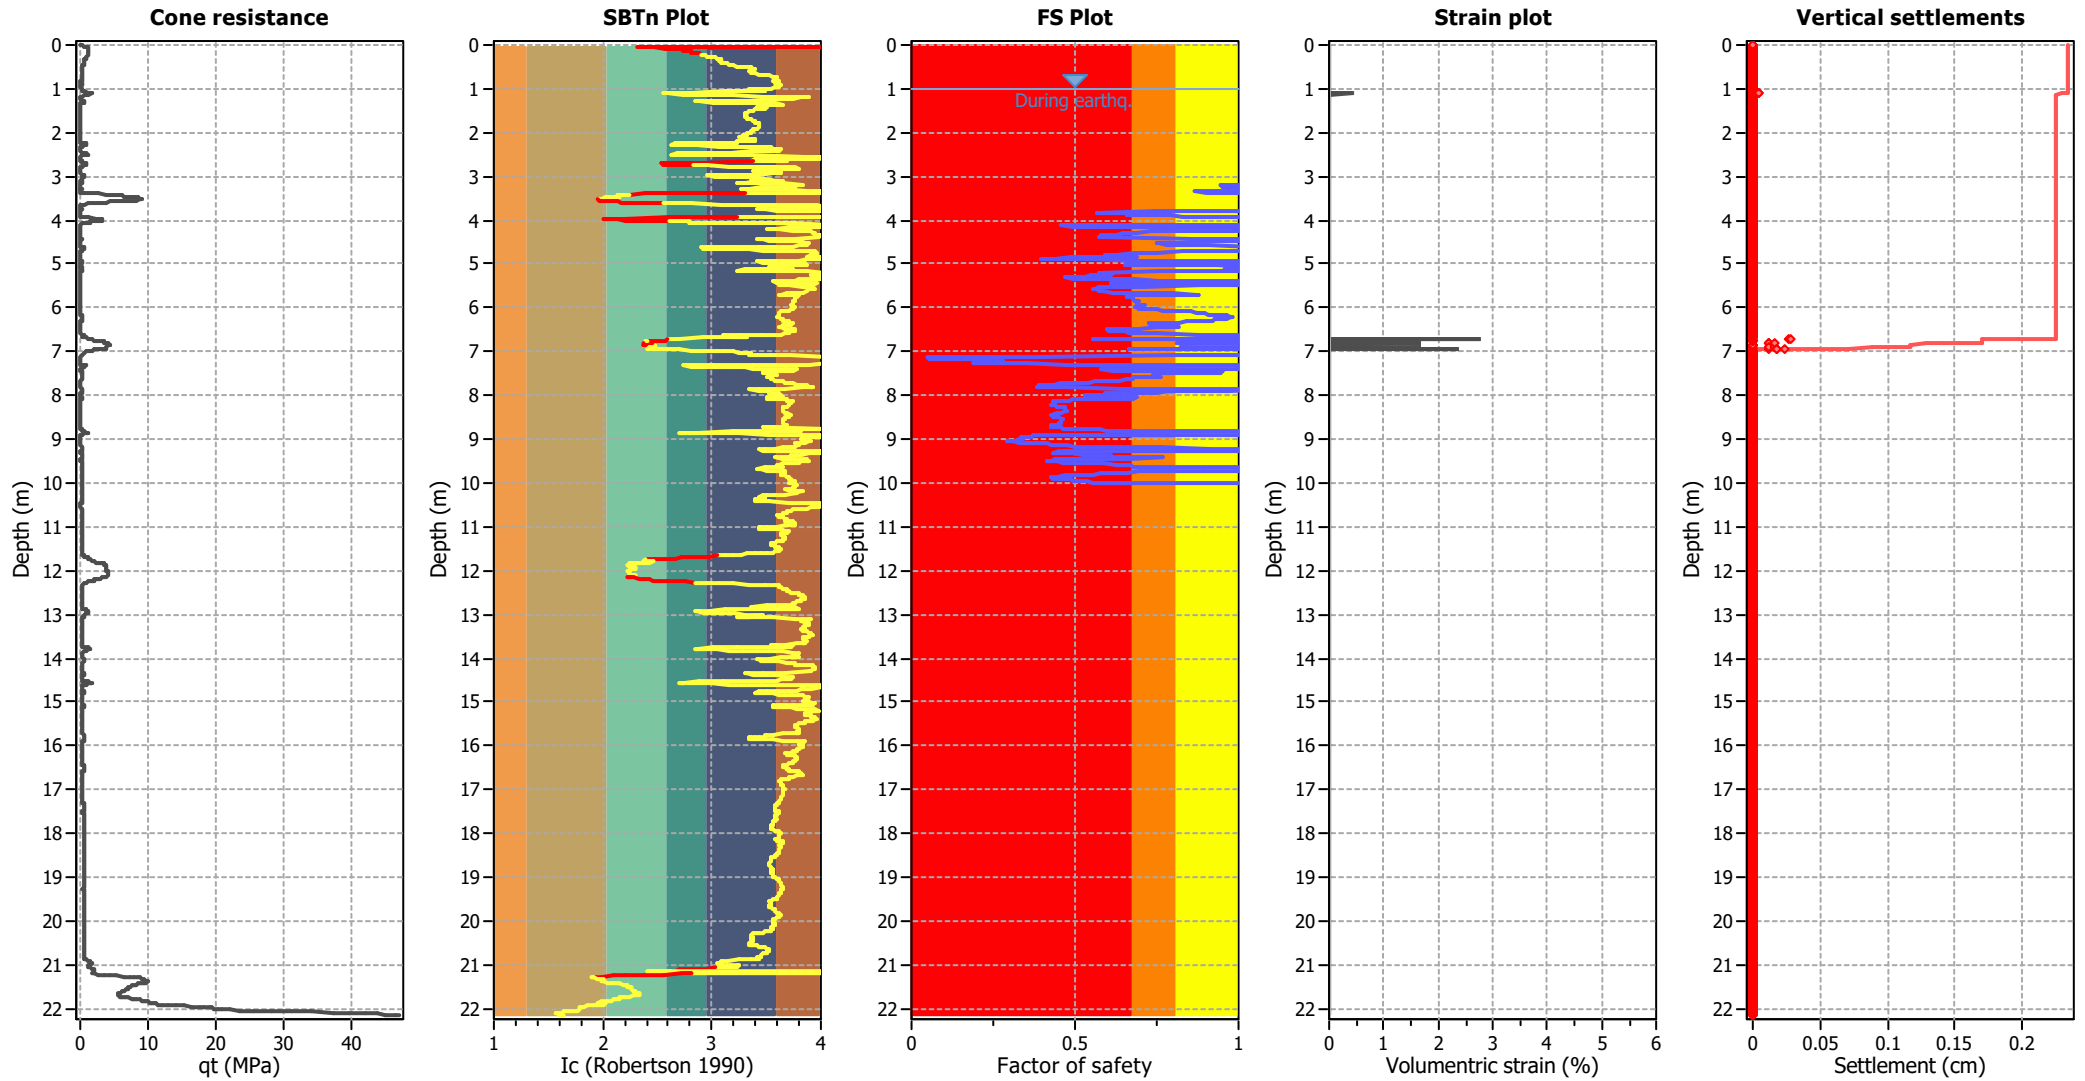

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

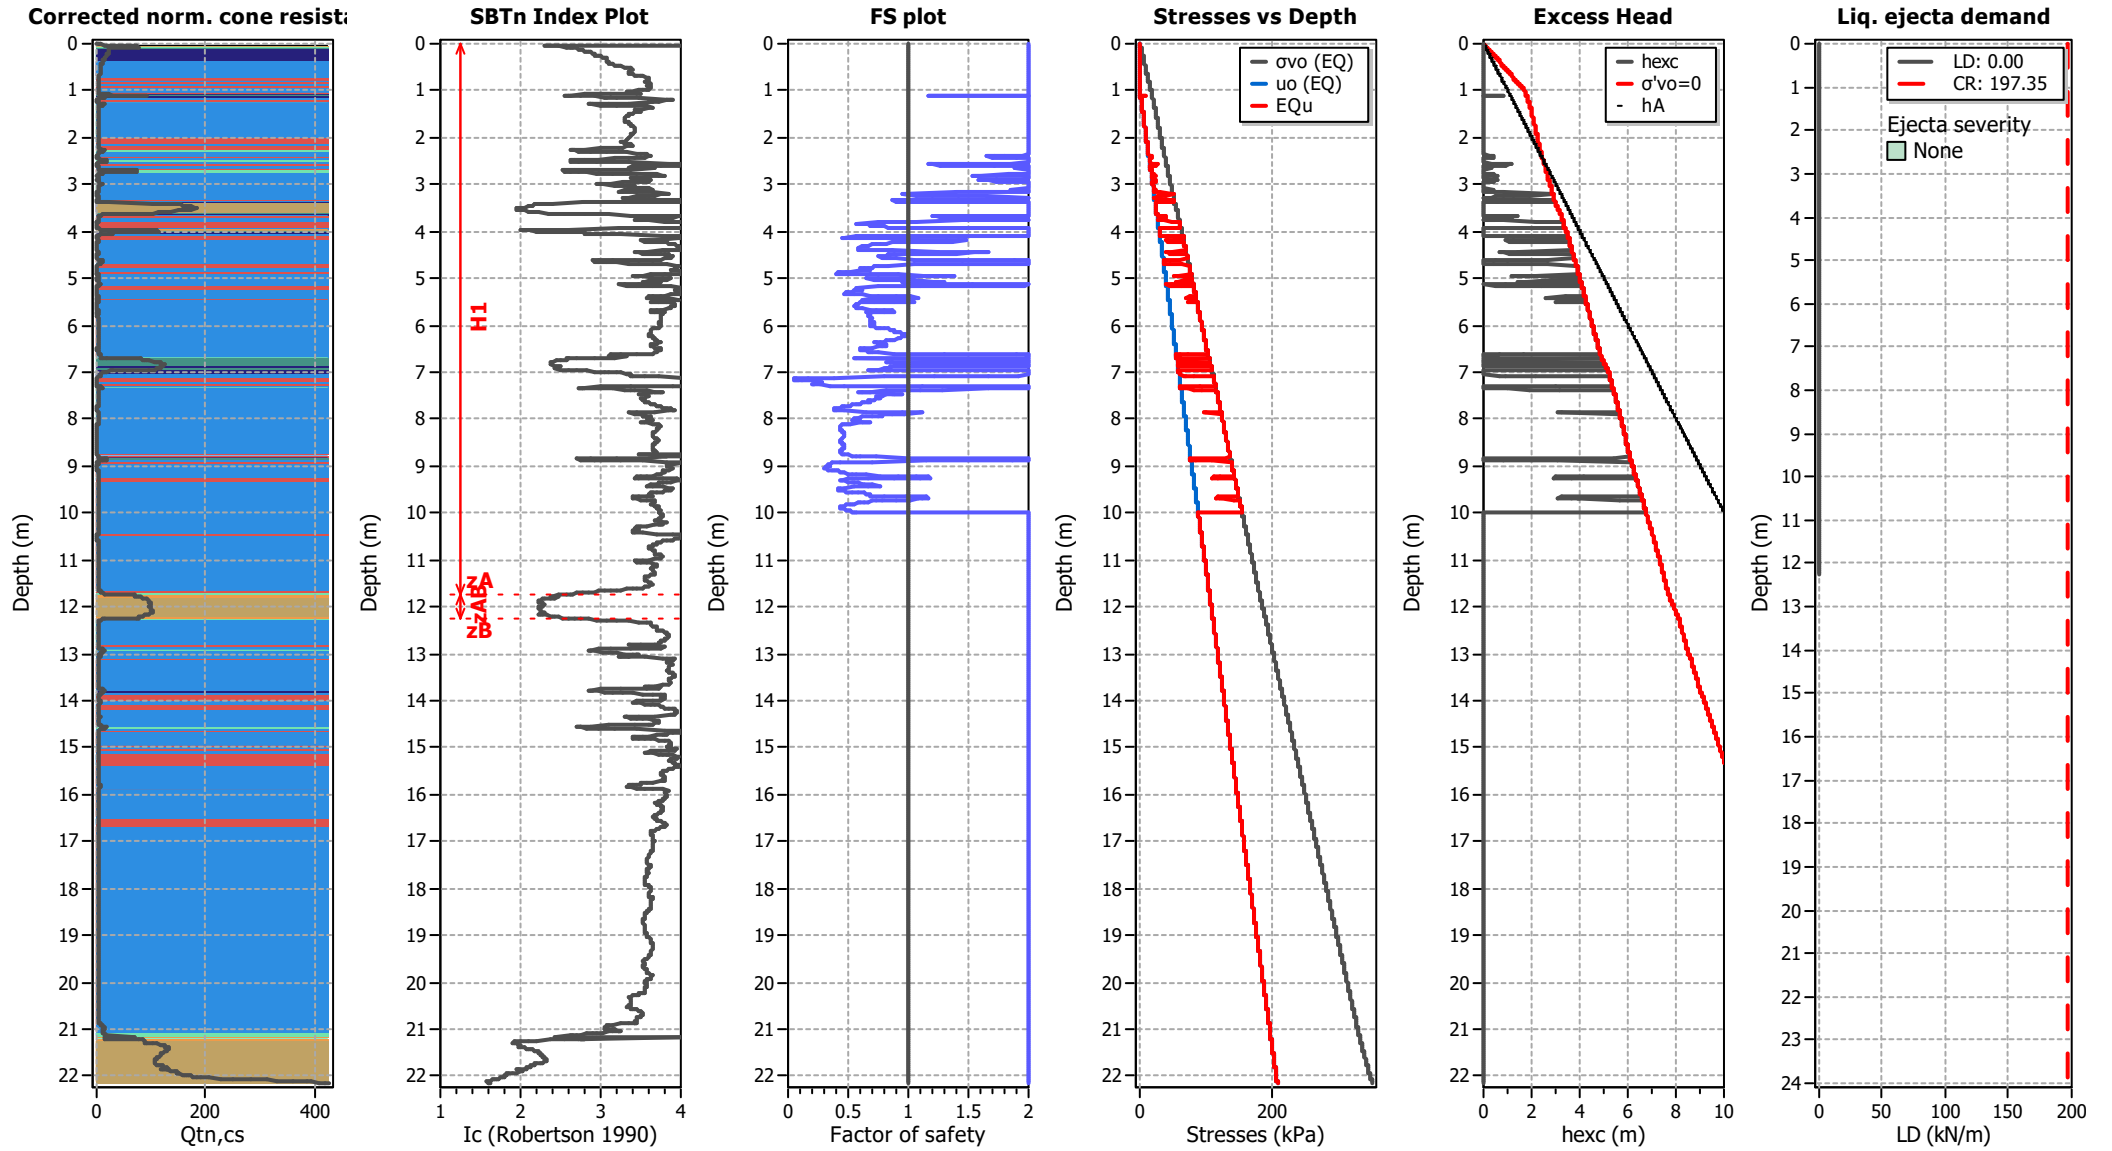

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT15

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

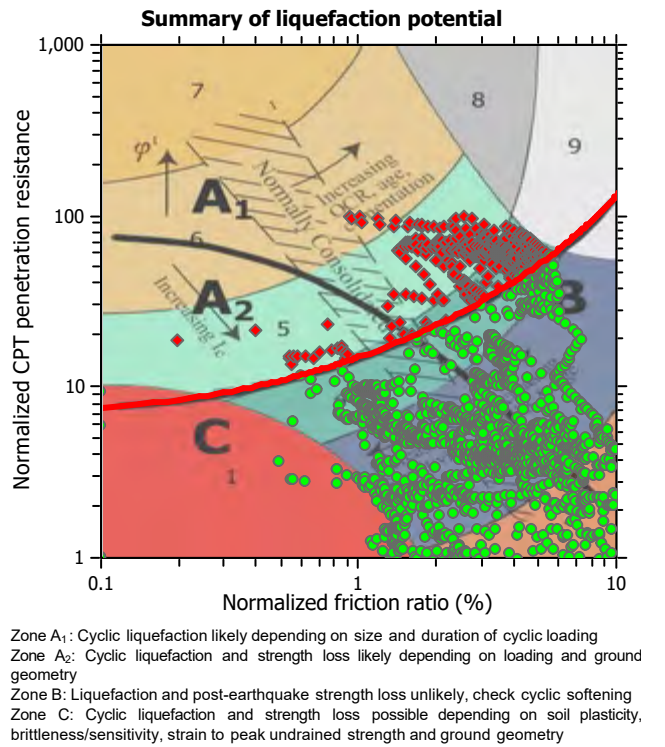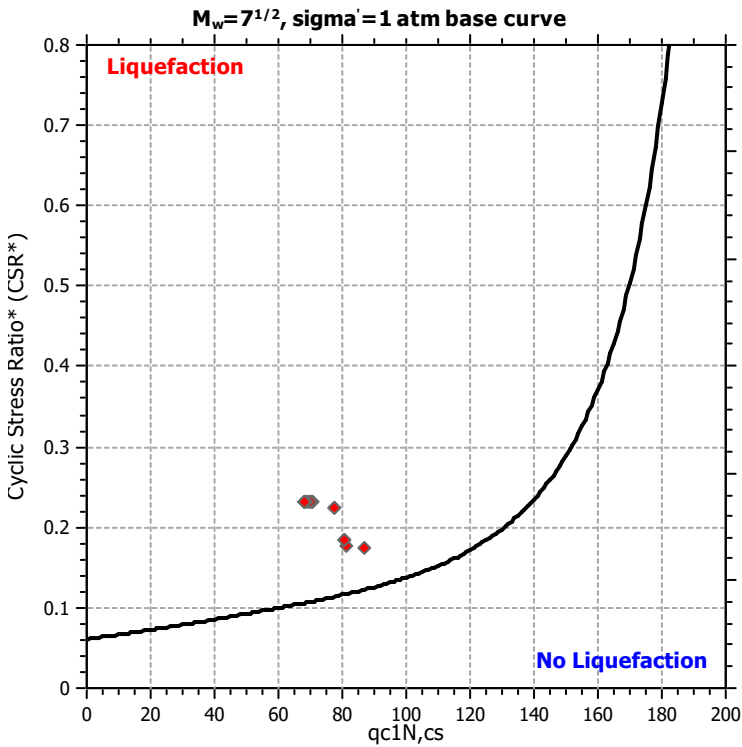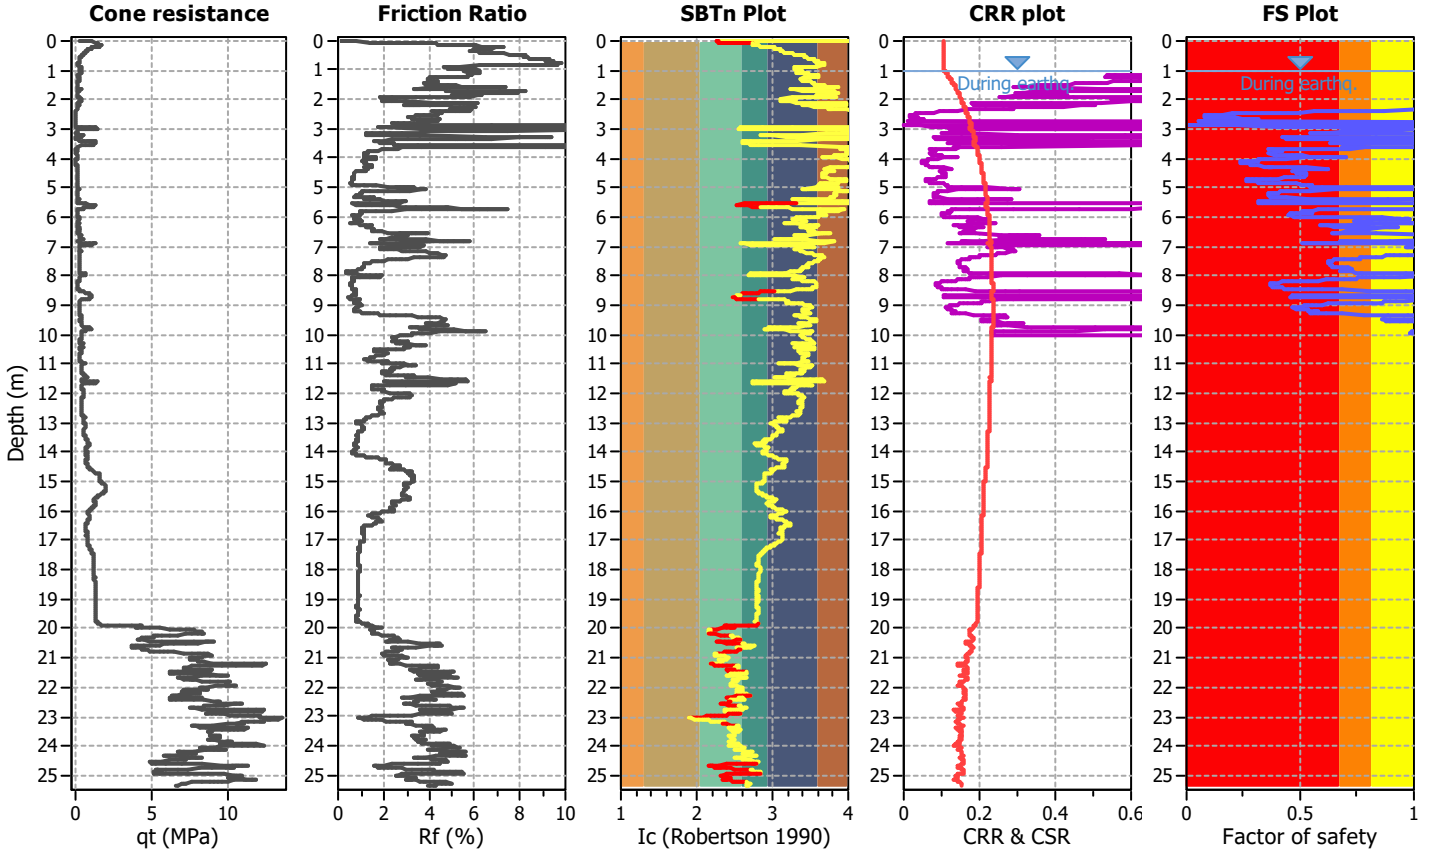

CPT basic interpretation plots

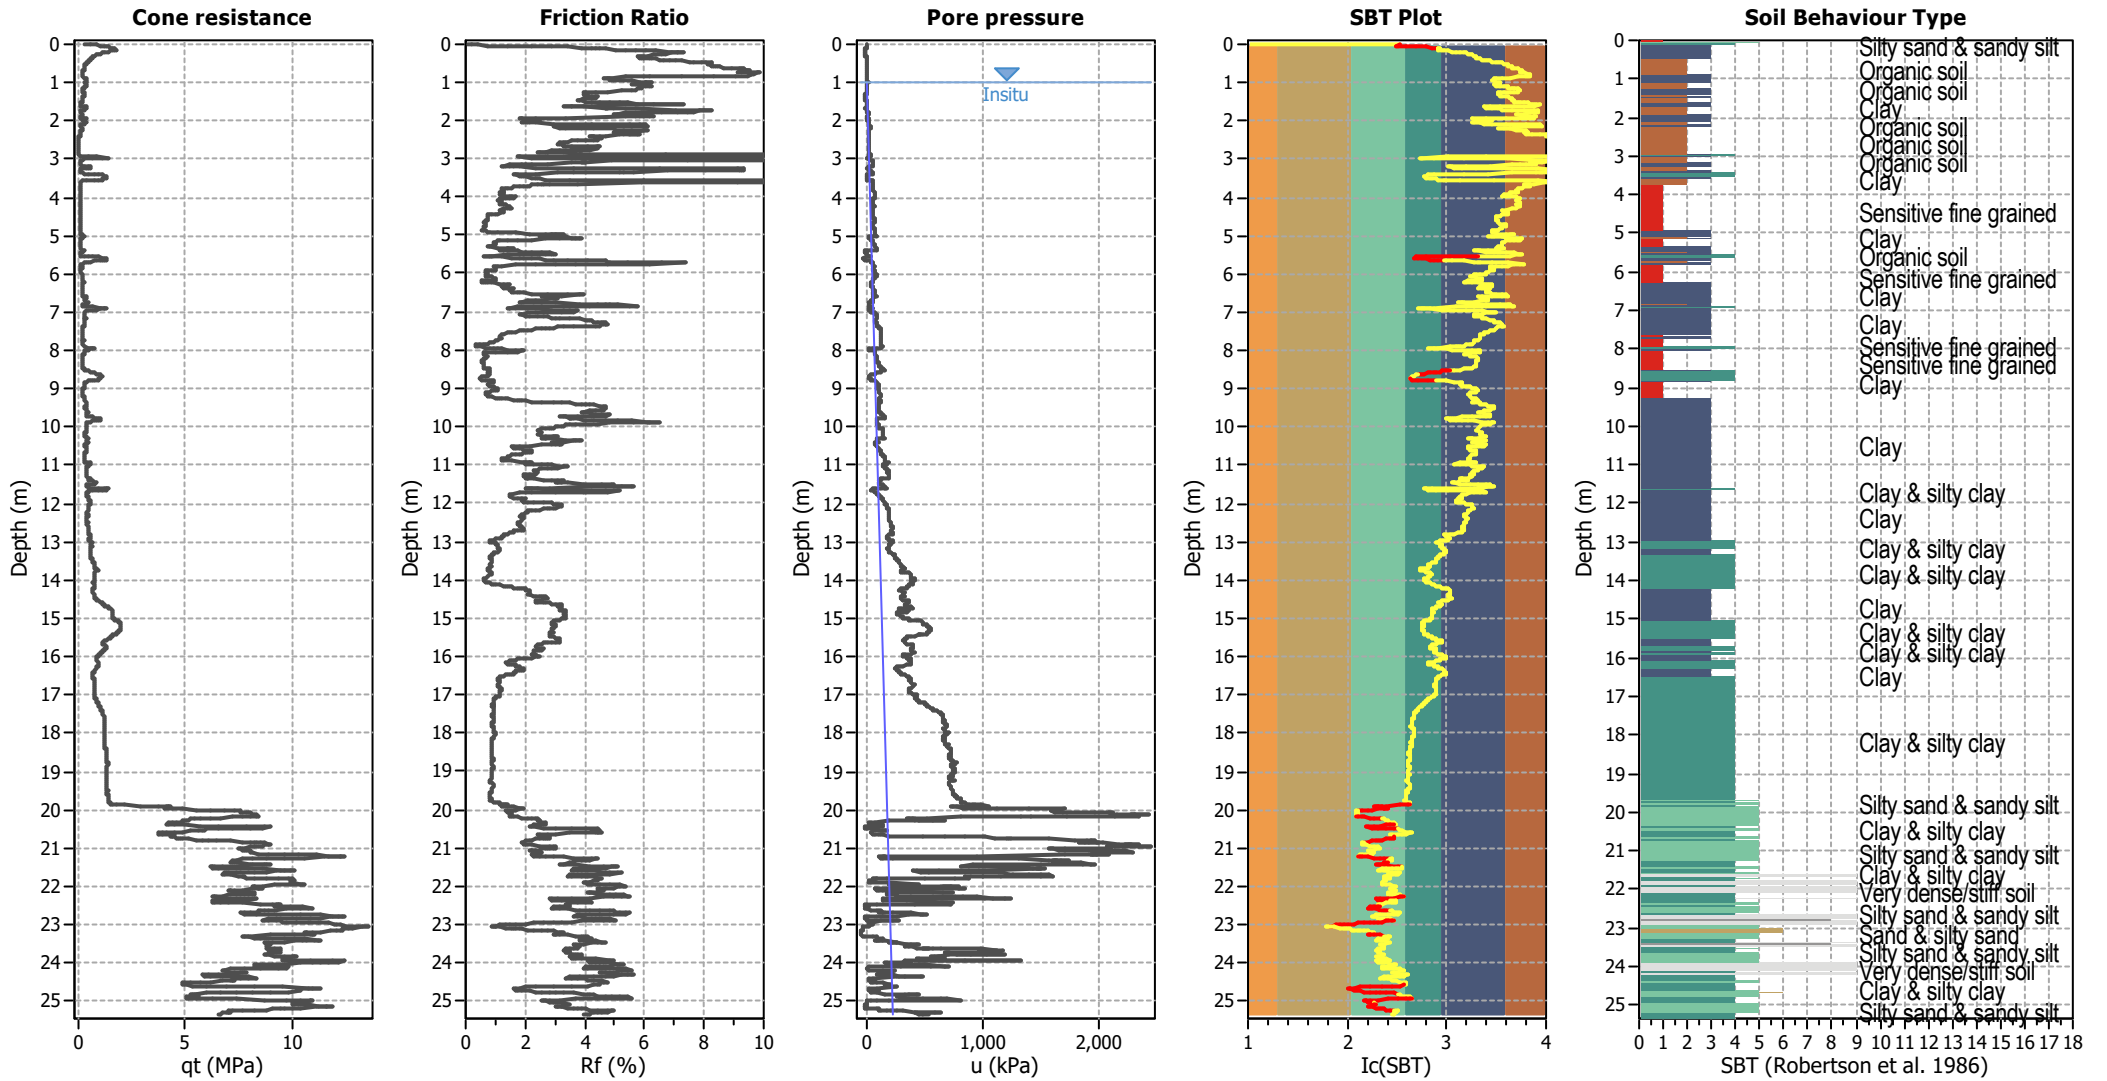


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

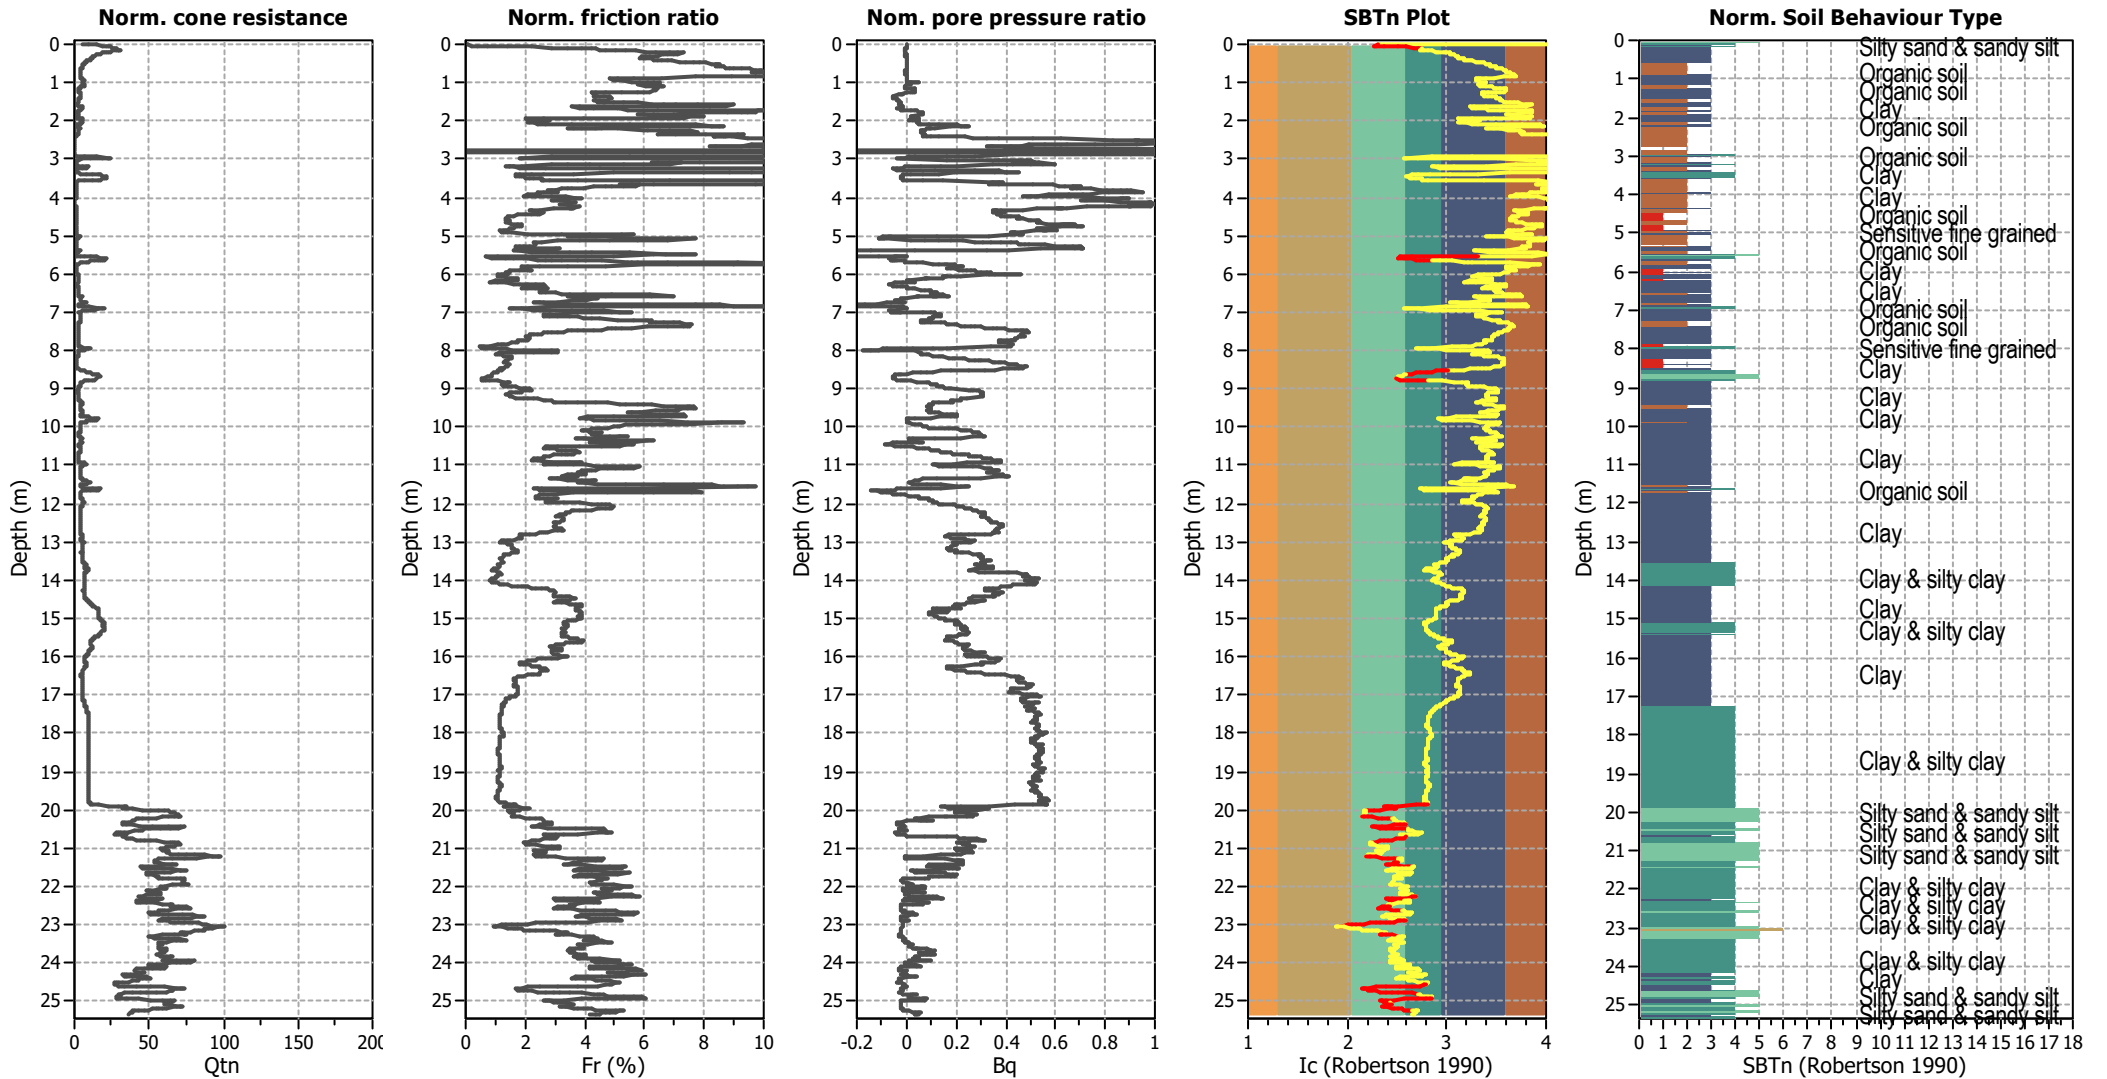


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

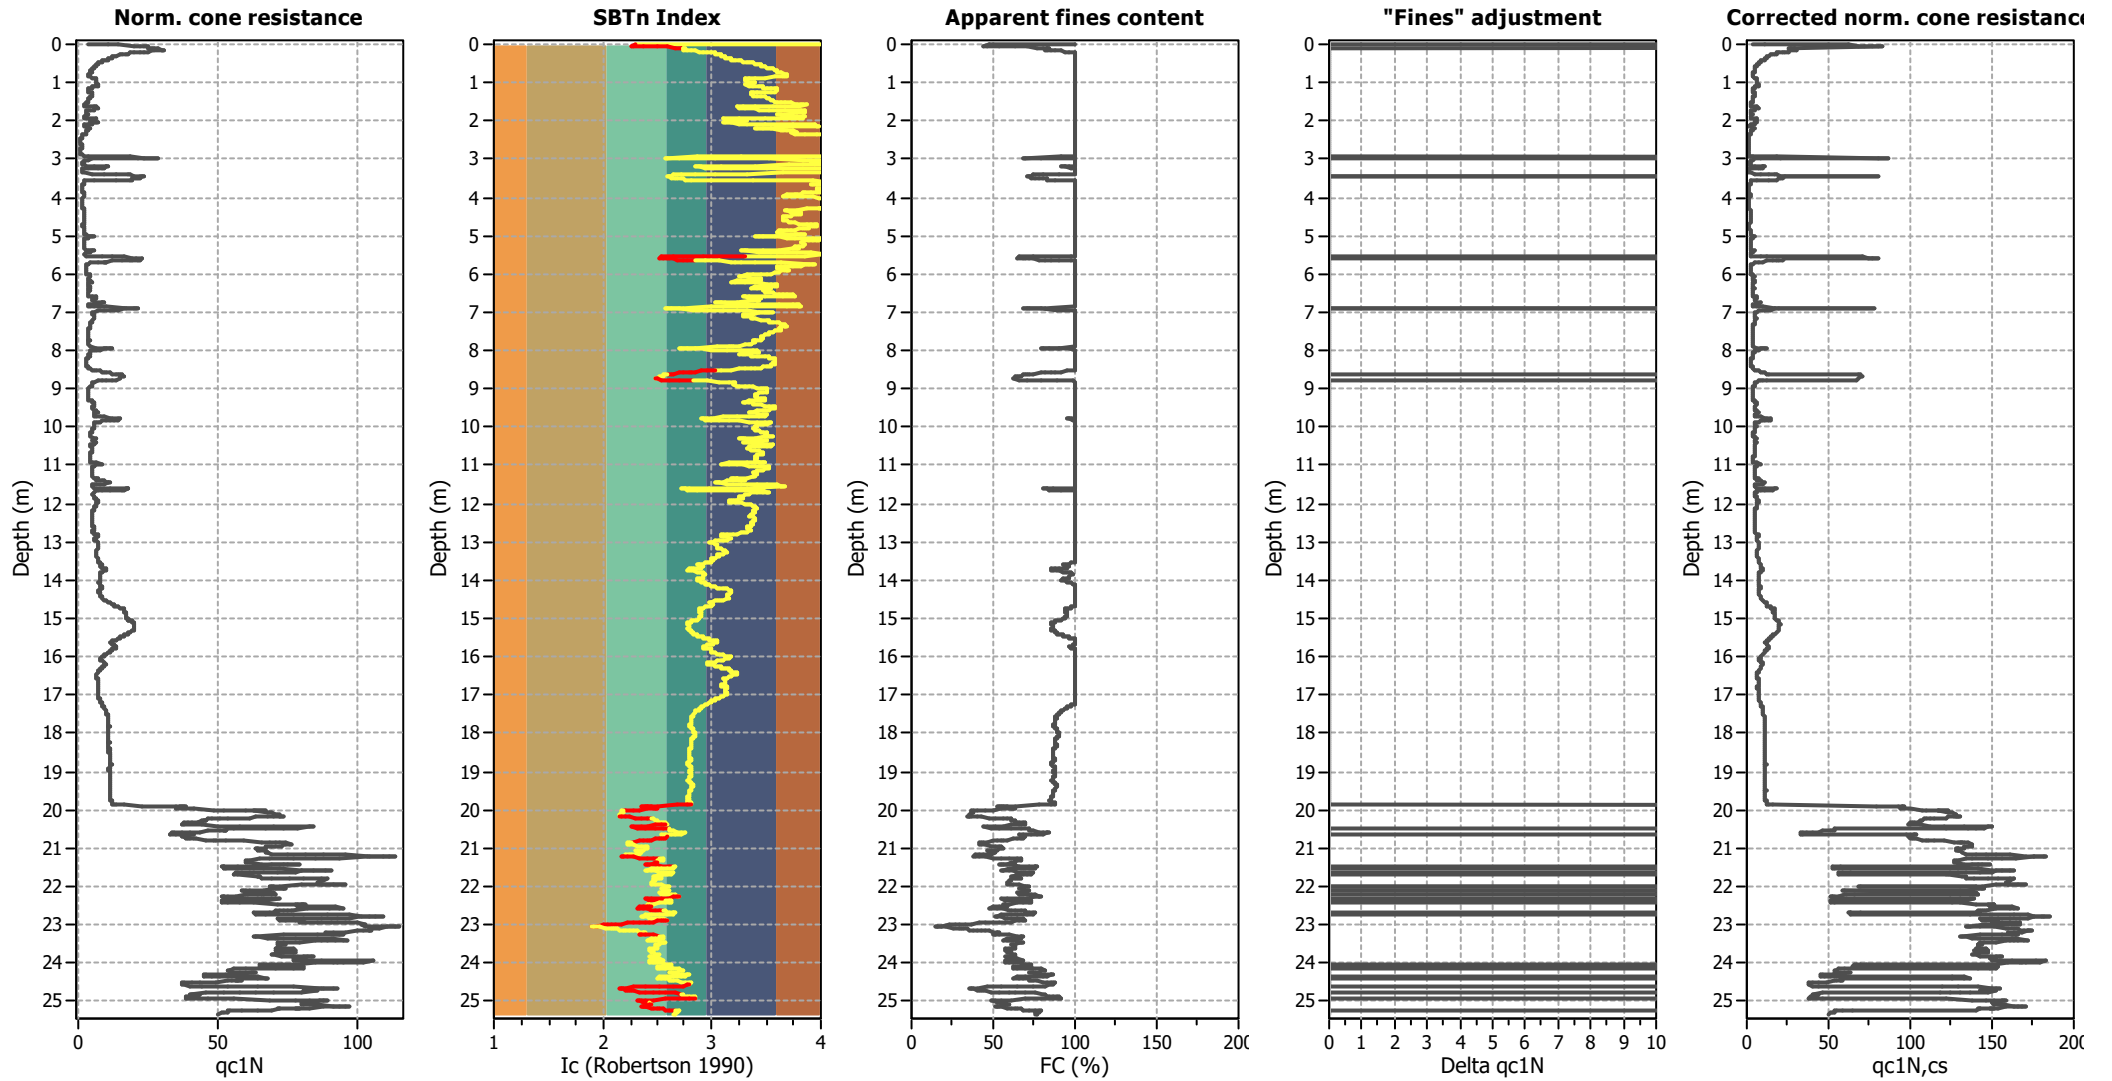

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

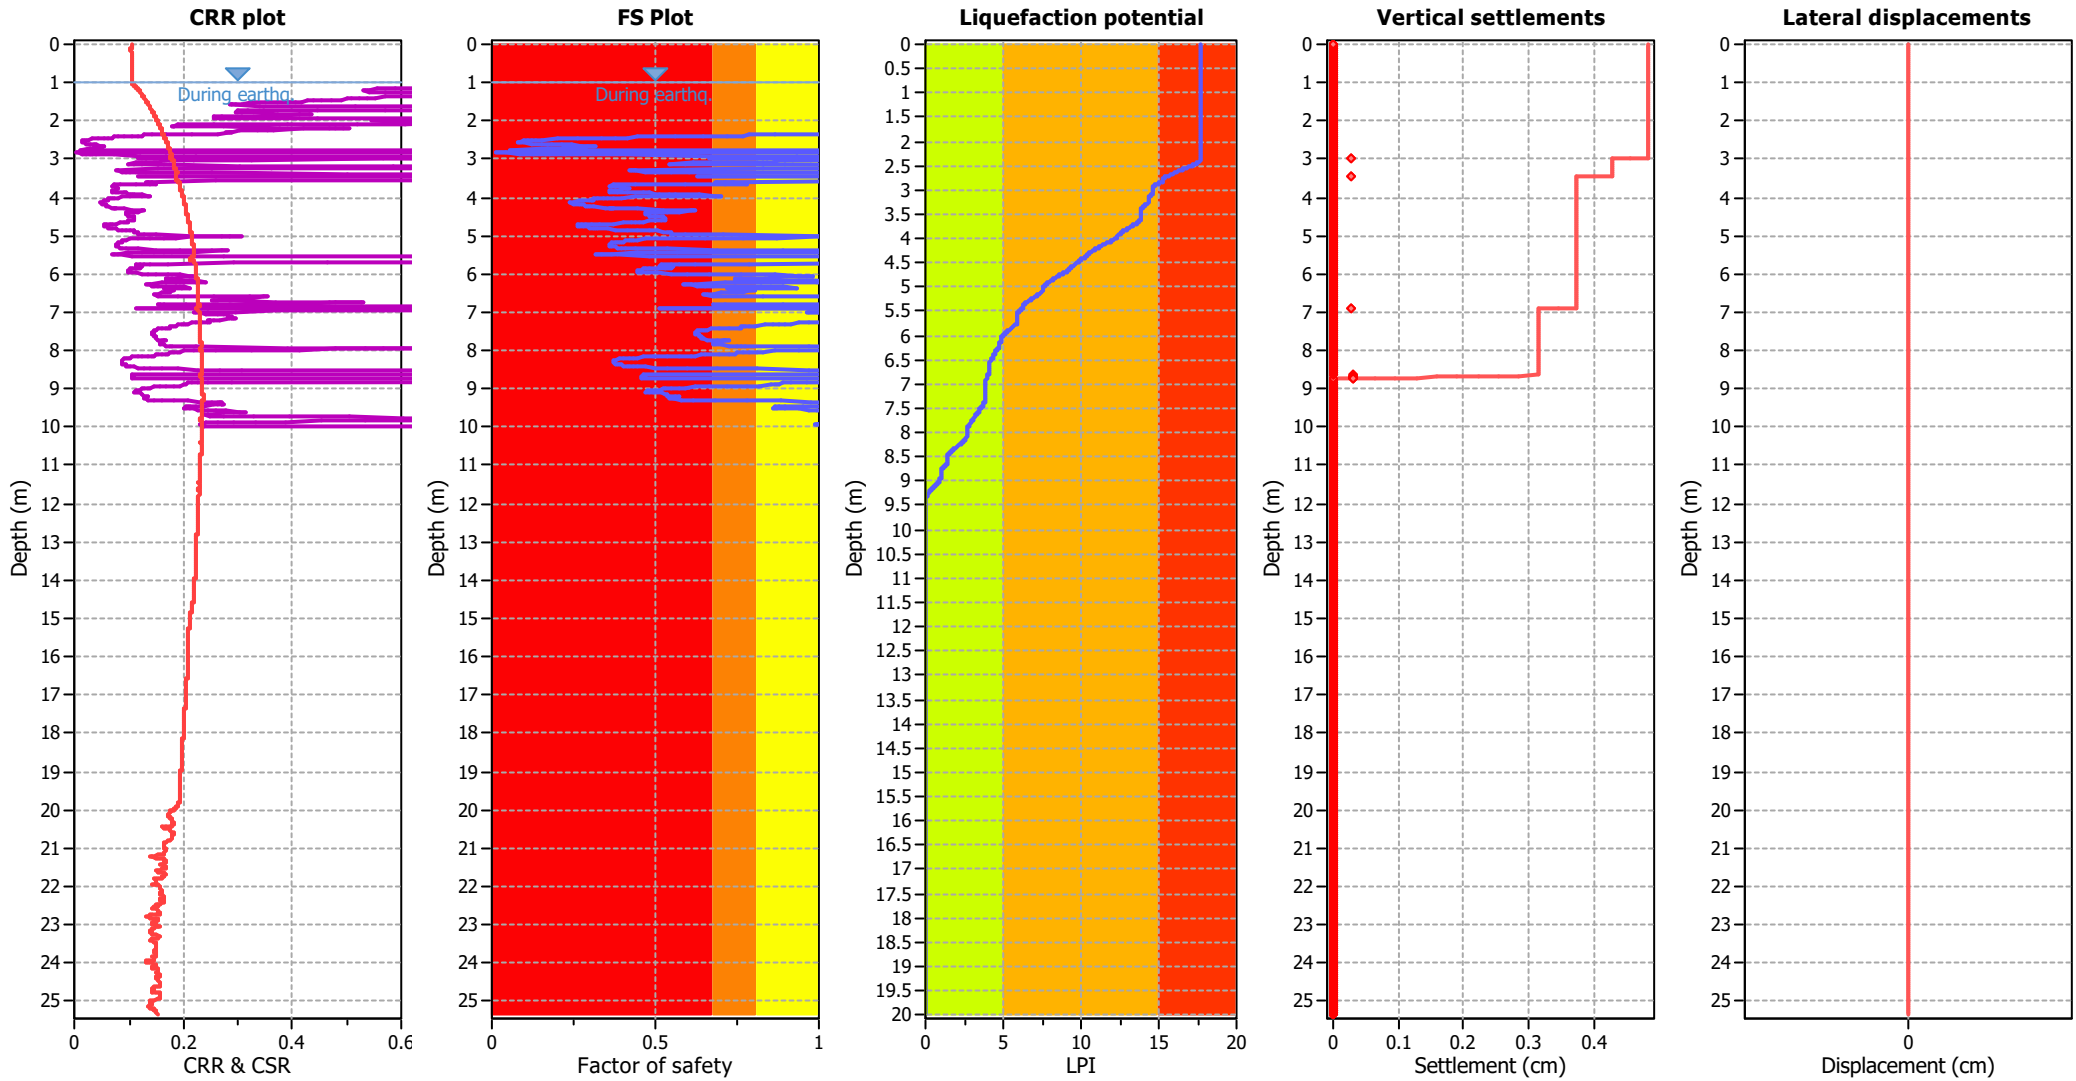

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

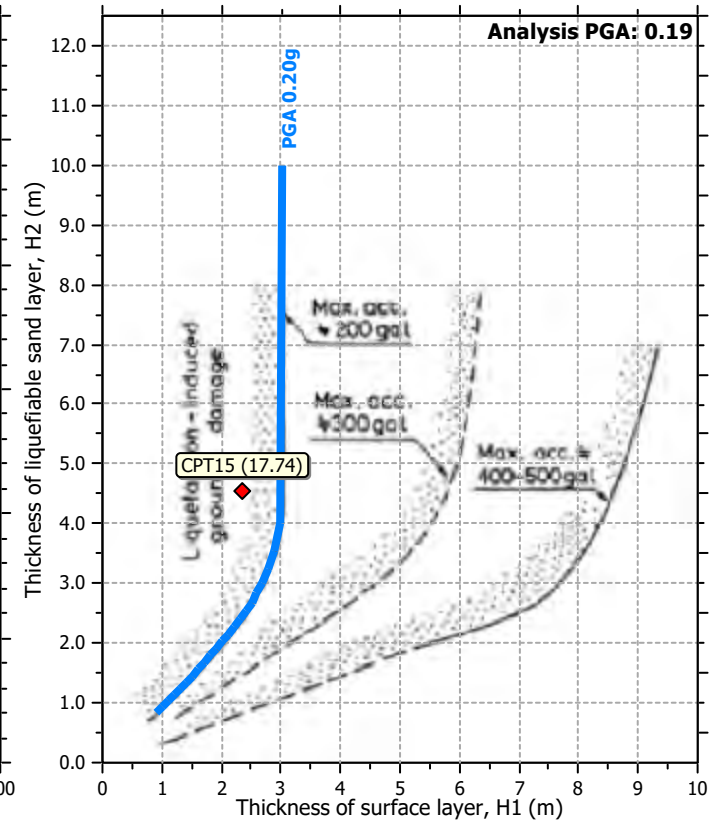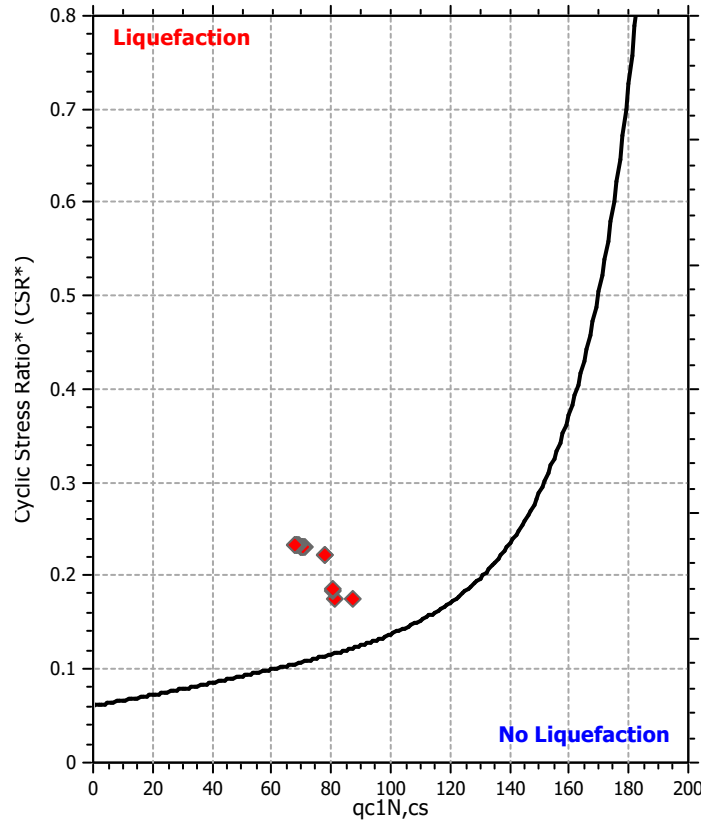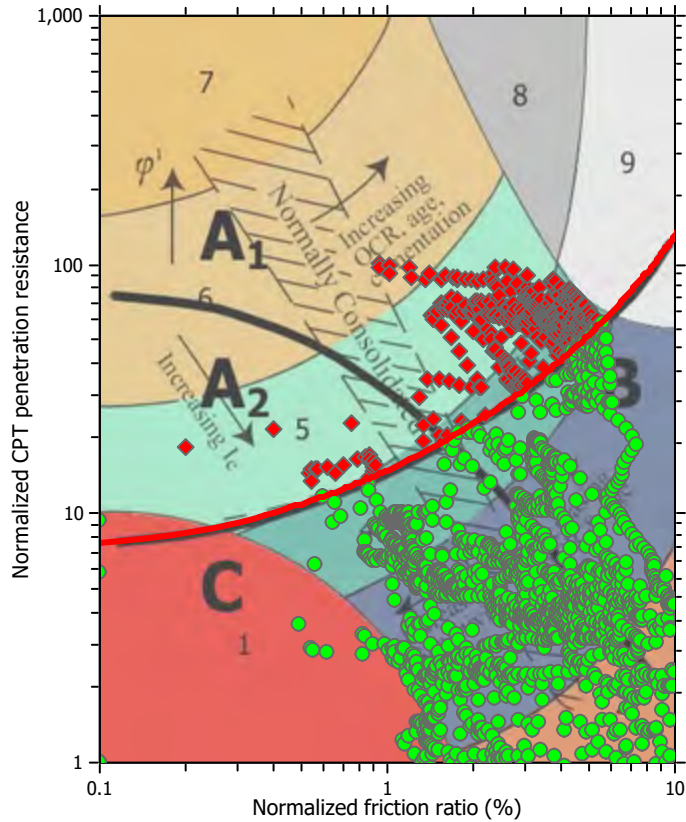

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

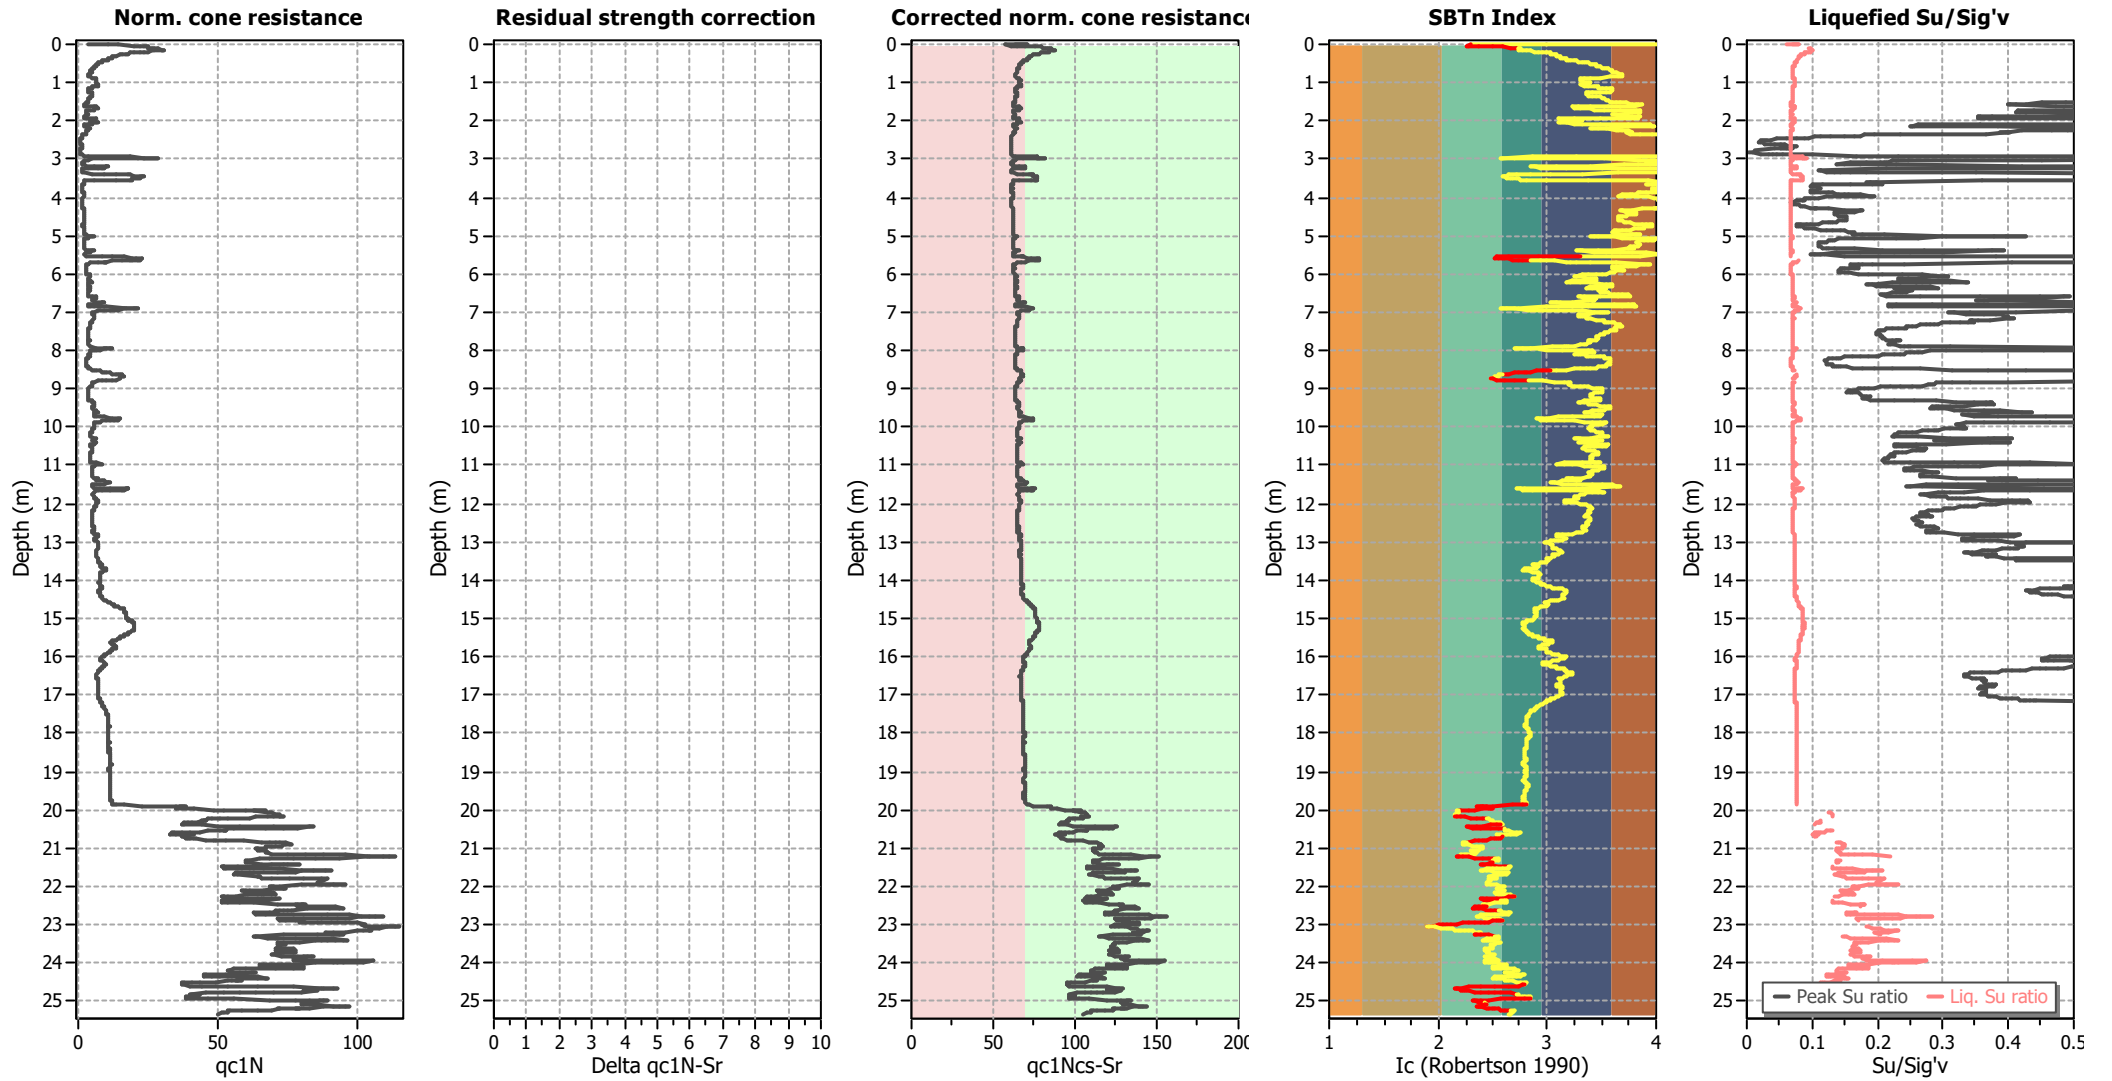

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

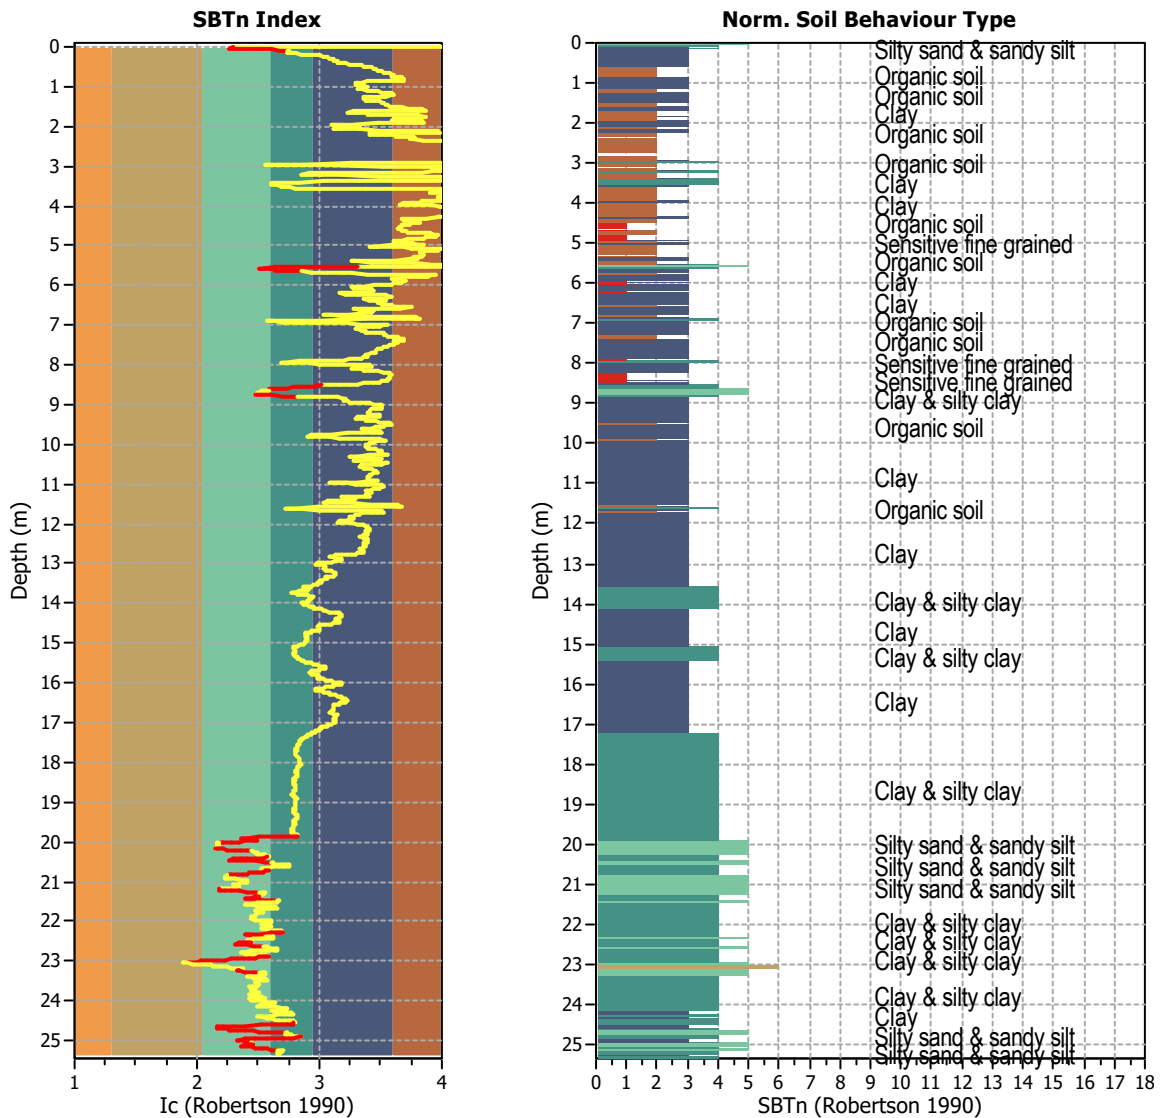

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	2536
I_c maximum check value:	3.00	Total points excluded:	230
I_c change ratio value:	0.0100	Exclusion percentage:	9.07%
Minimum number of points in layer:	4	Number of layers detected:	27


Estimation of post-earthquake settlements

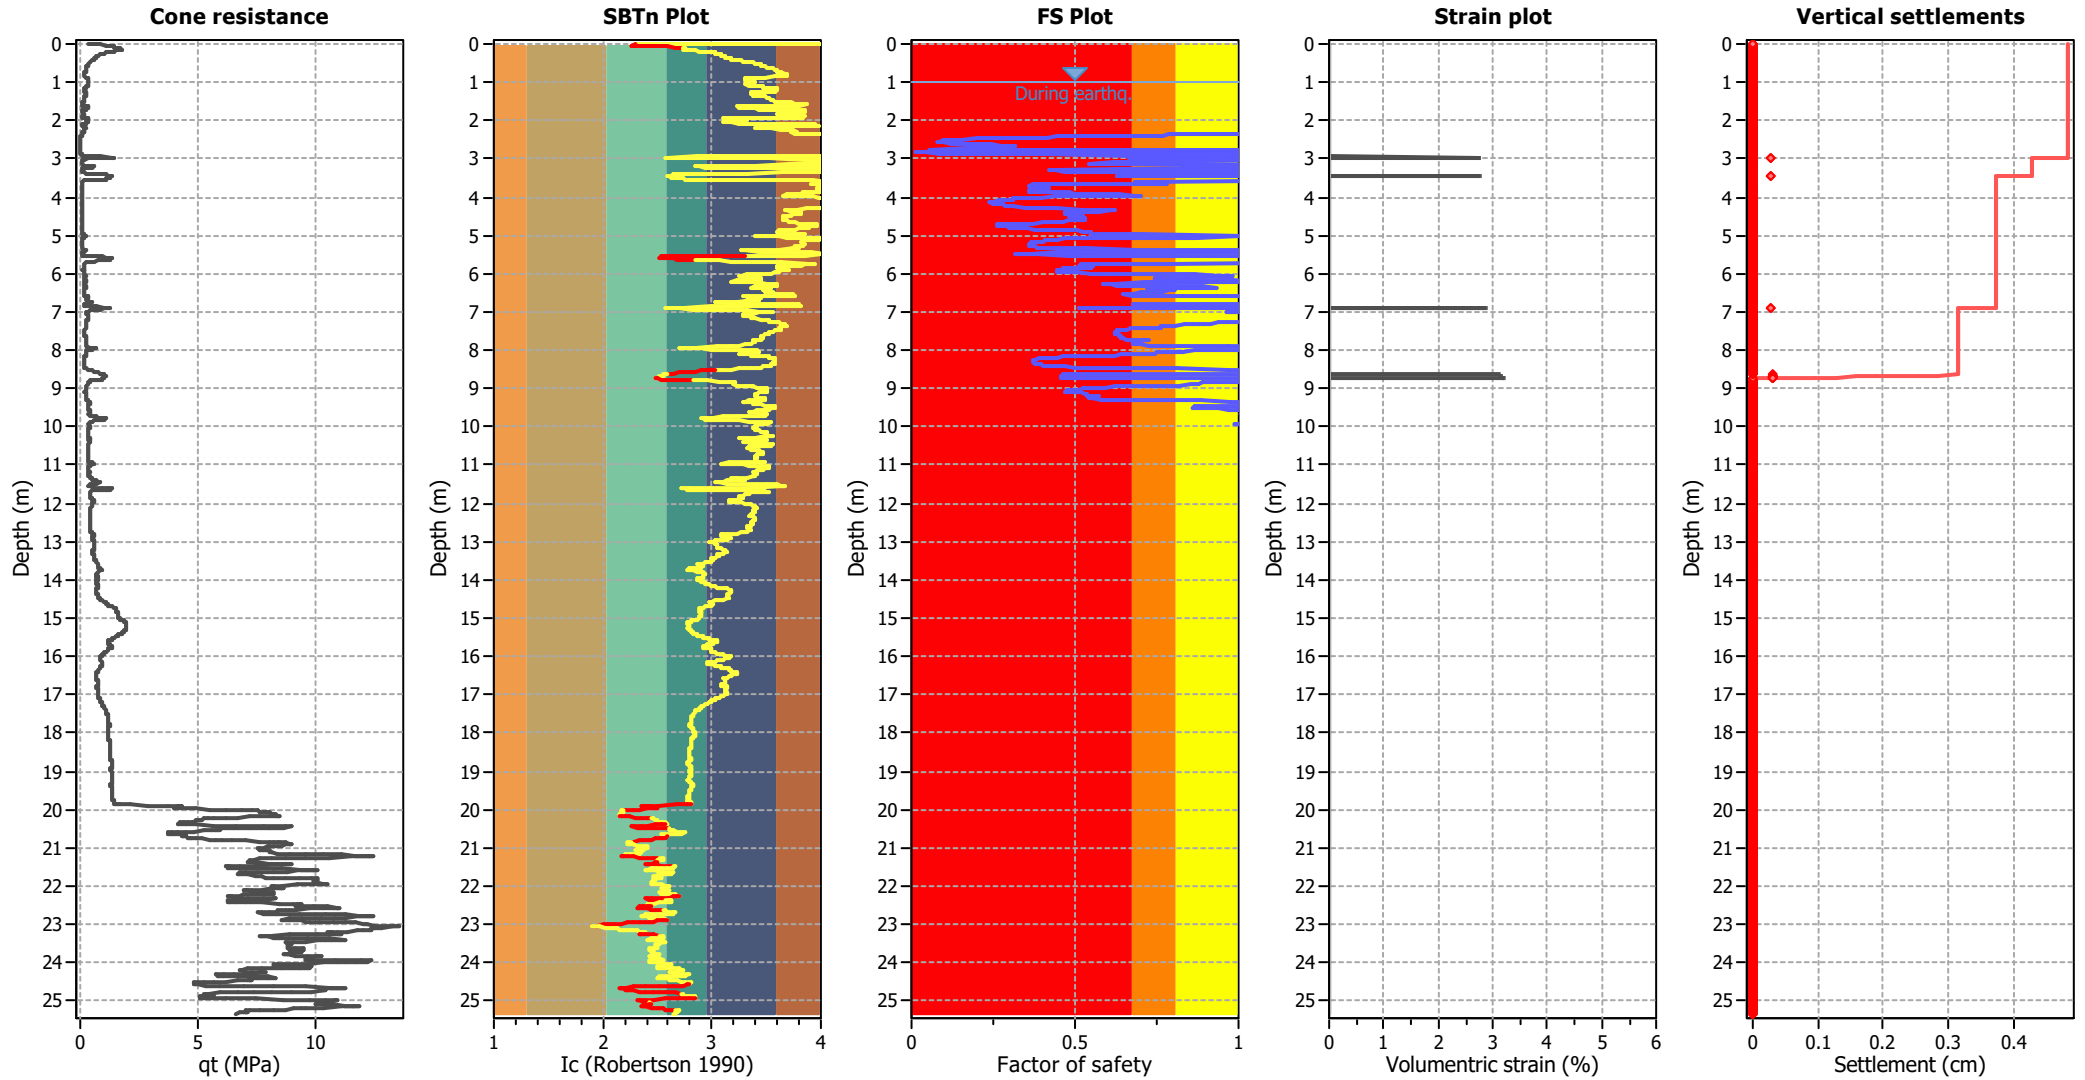

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

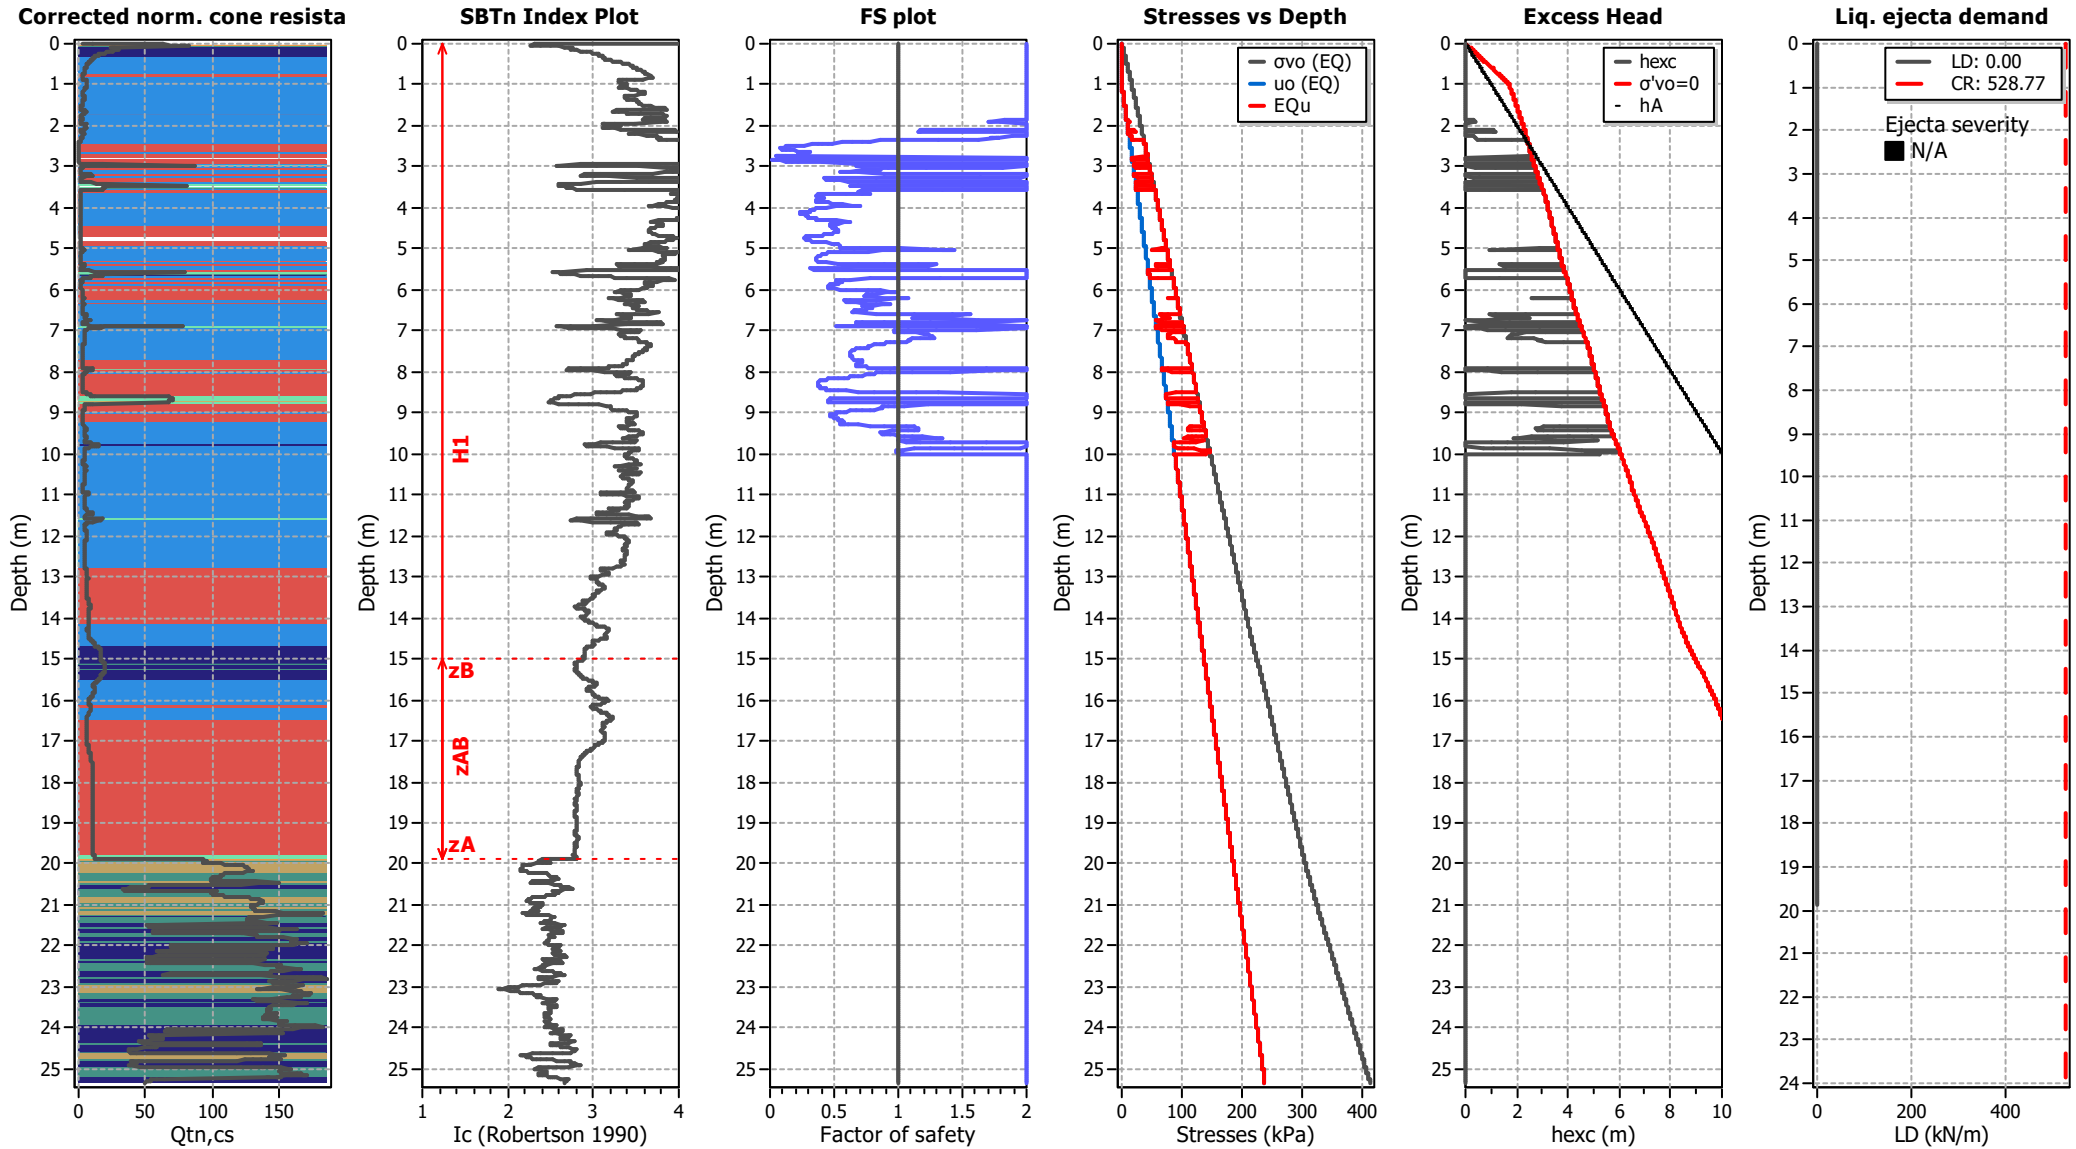

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT16

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

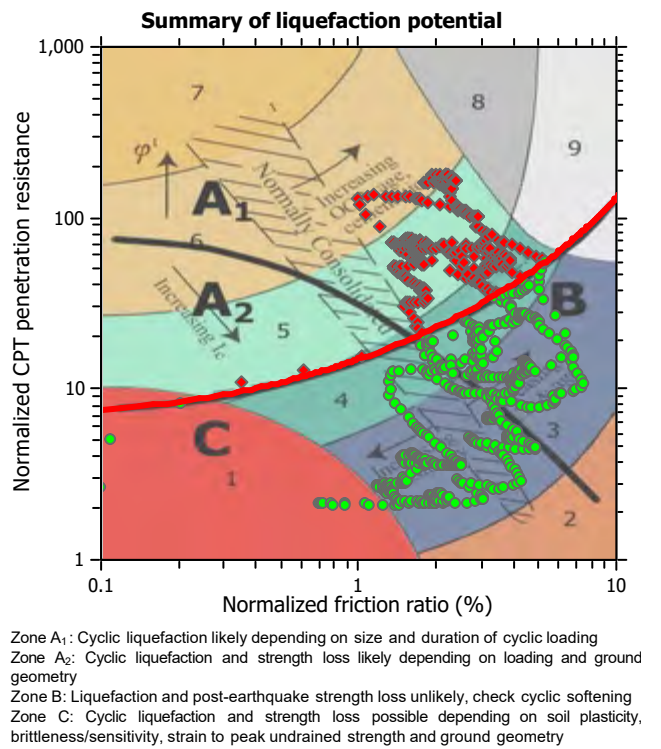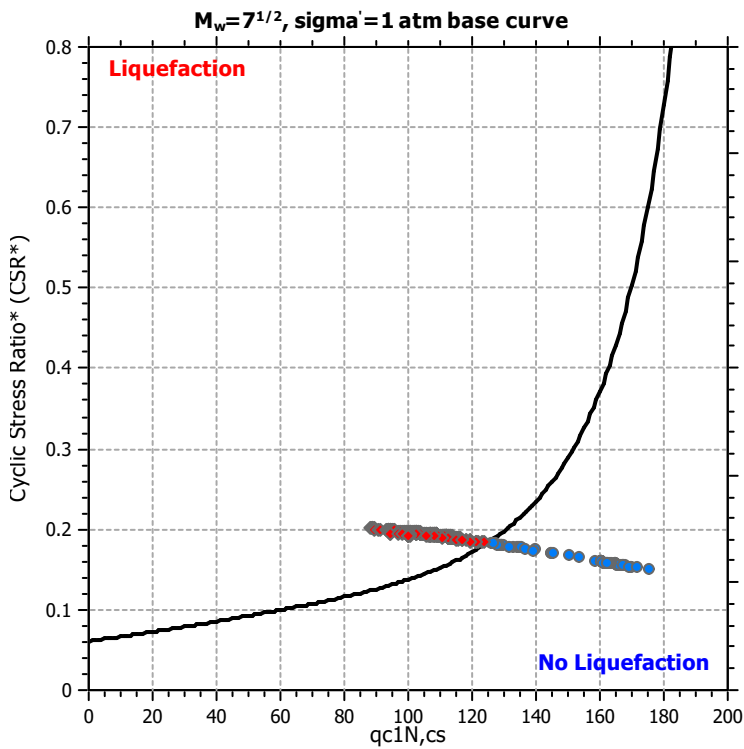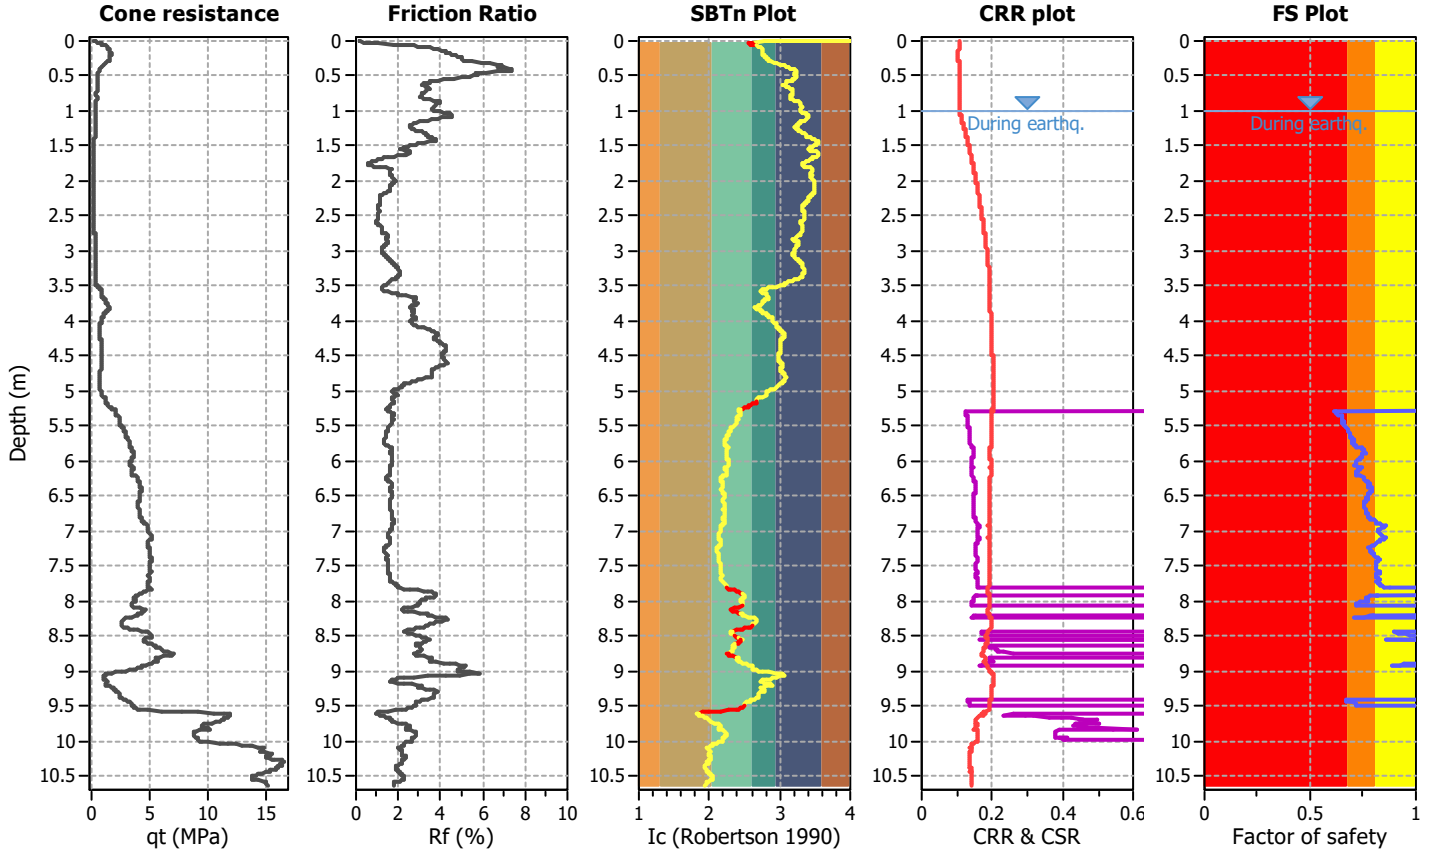

CPT basic interpretation plots

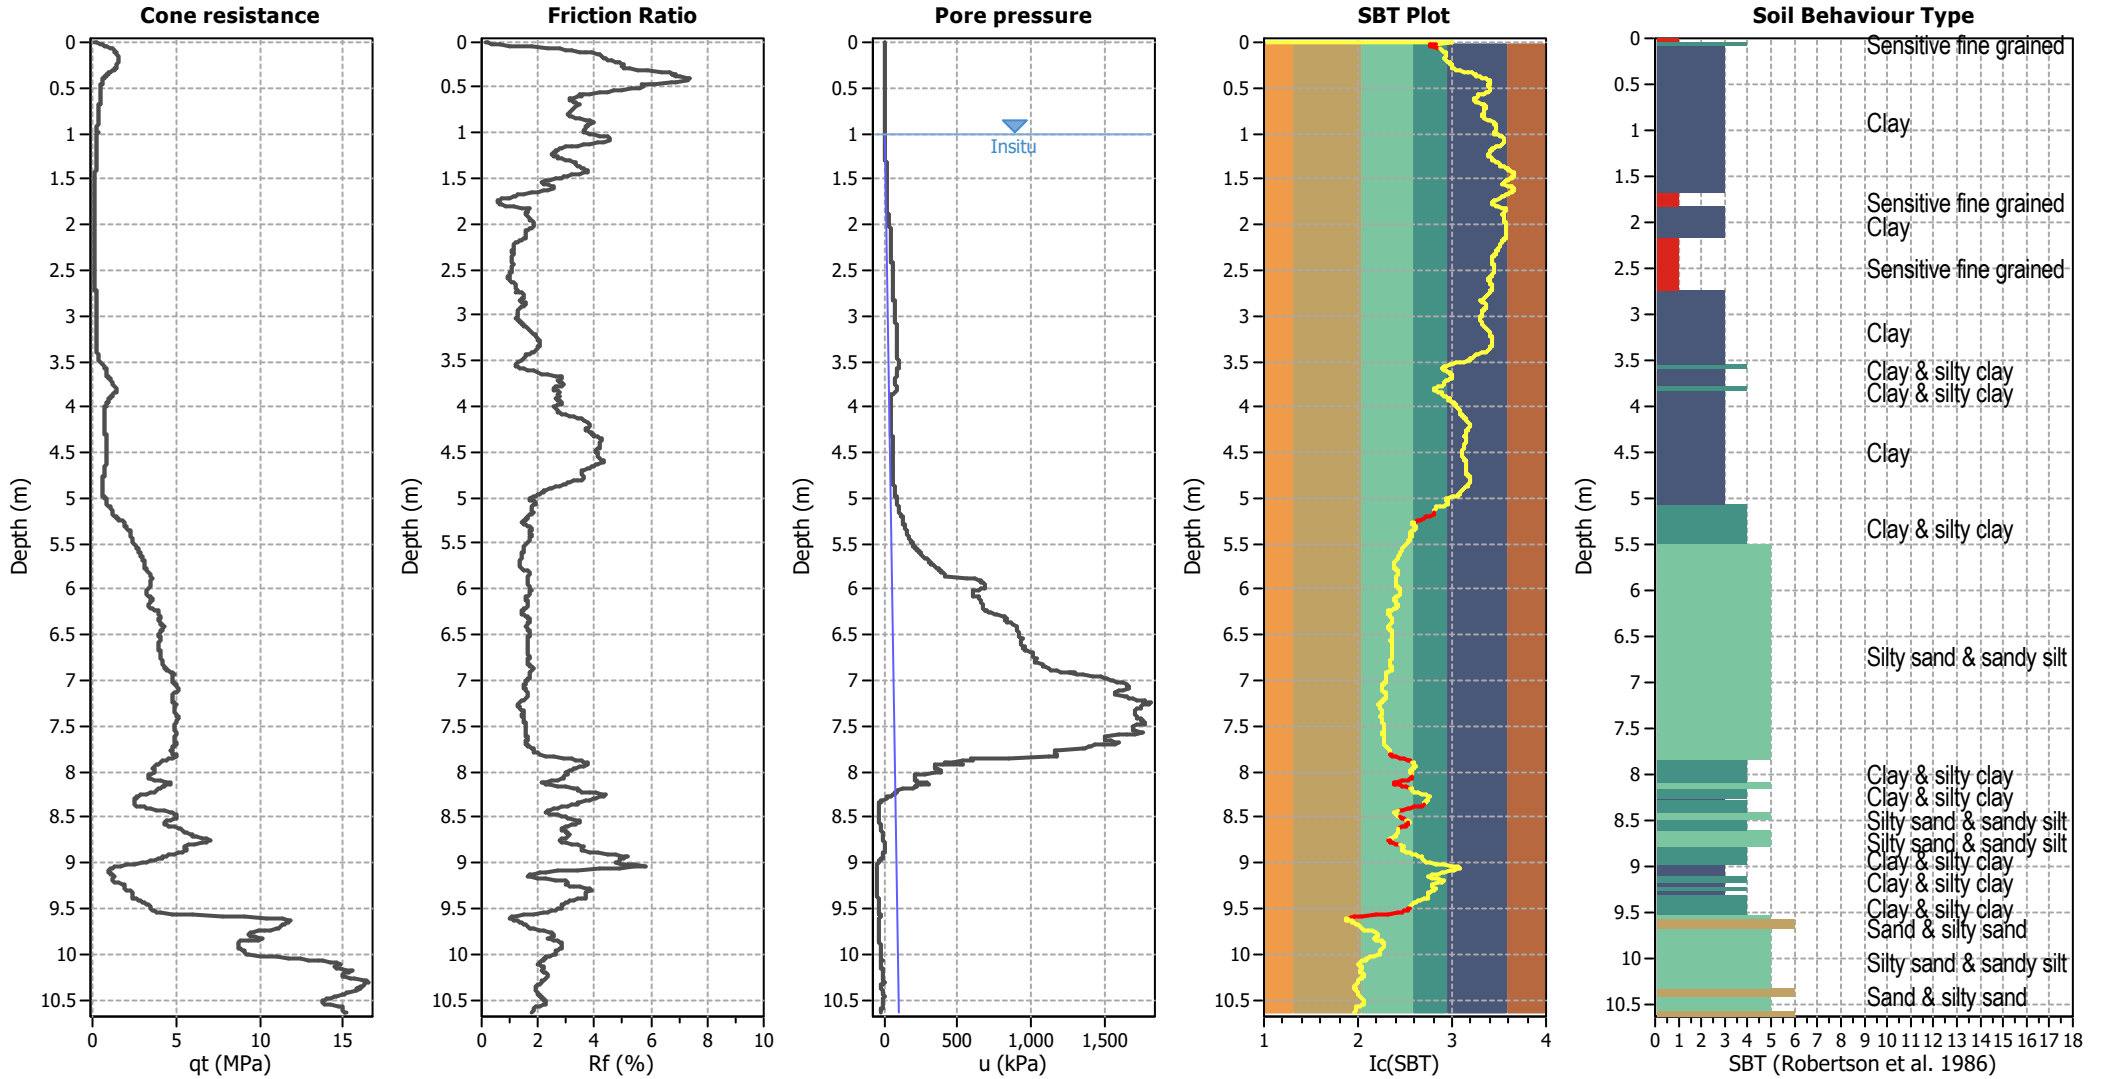


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained

CPT basic interpretation plots (normalized)

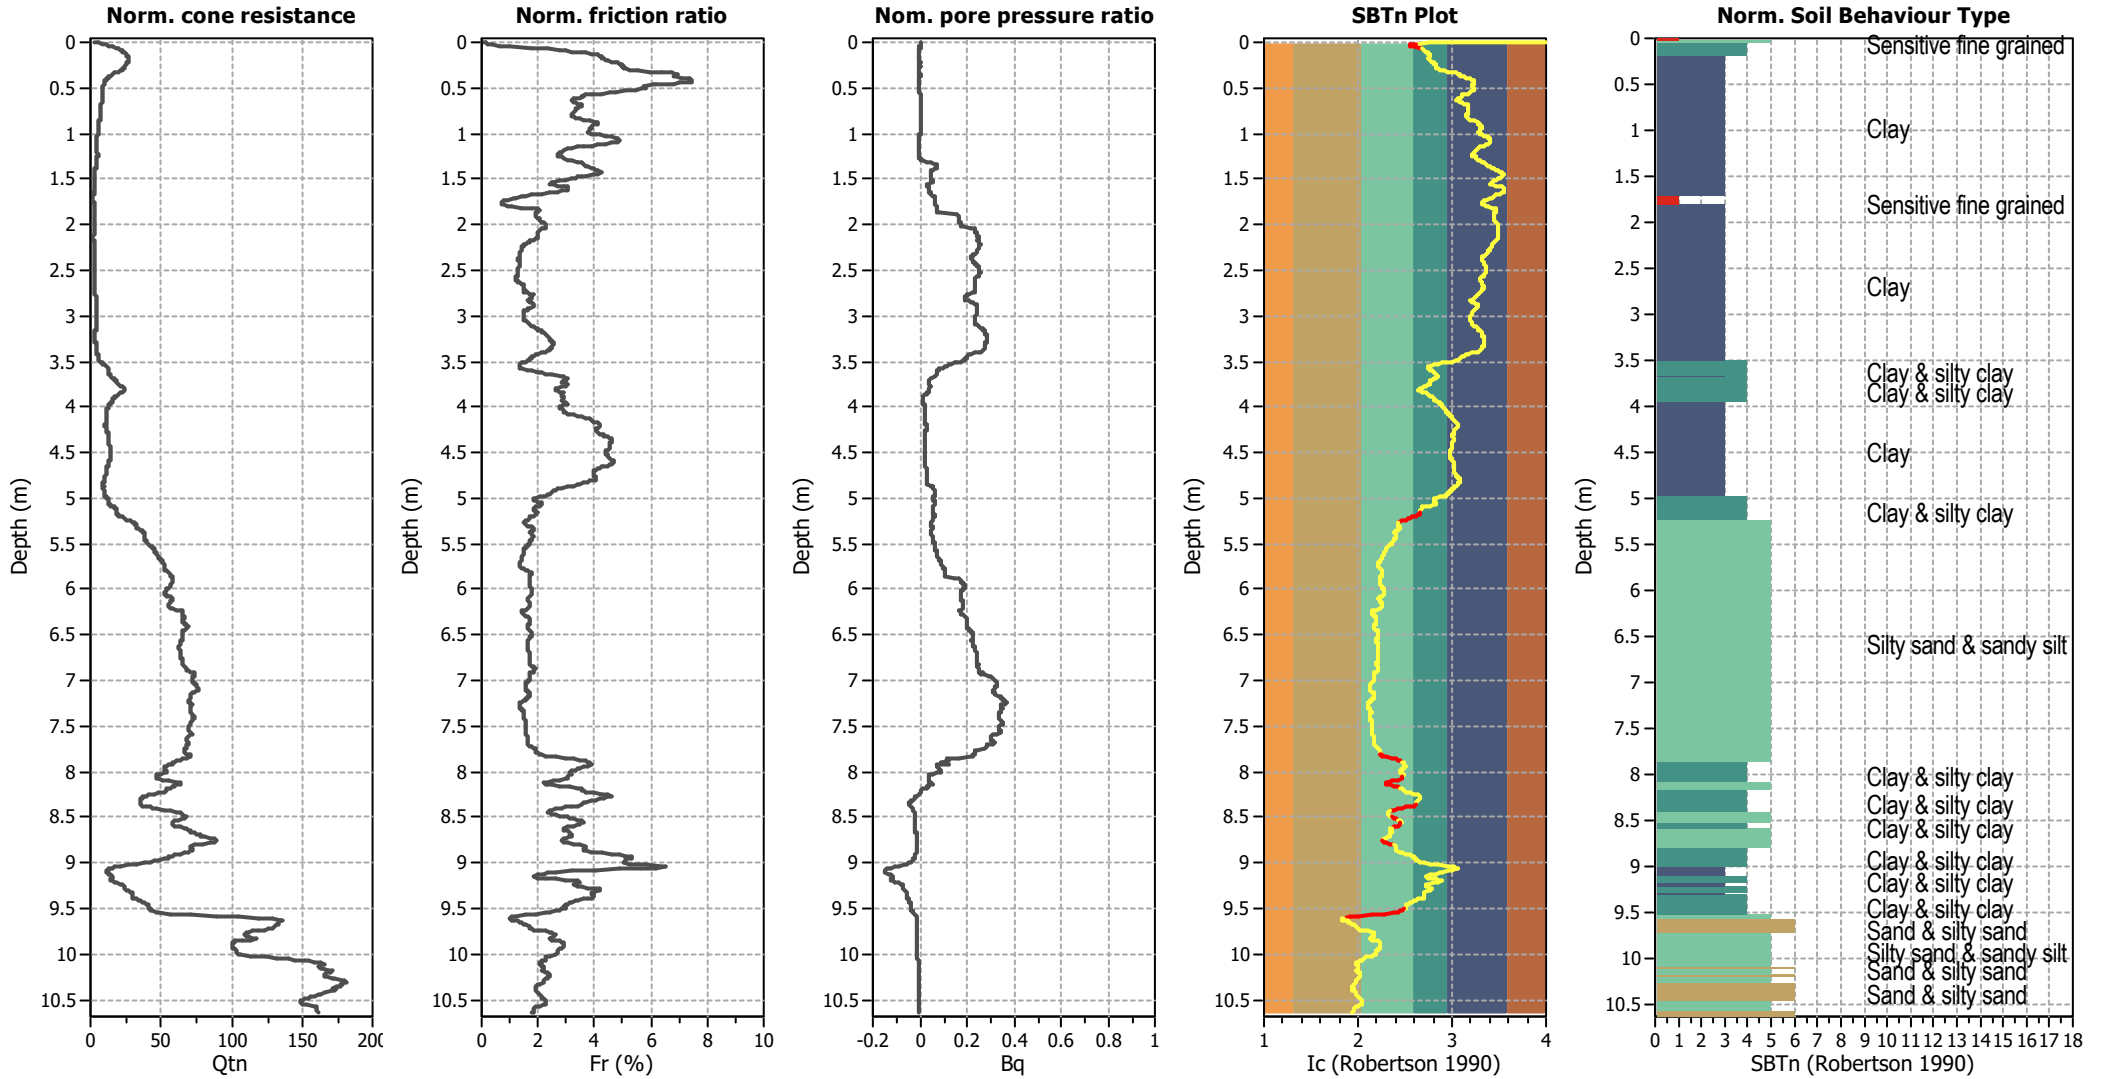


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

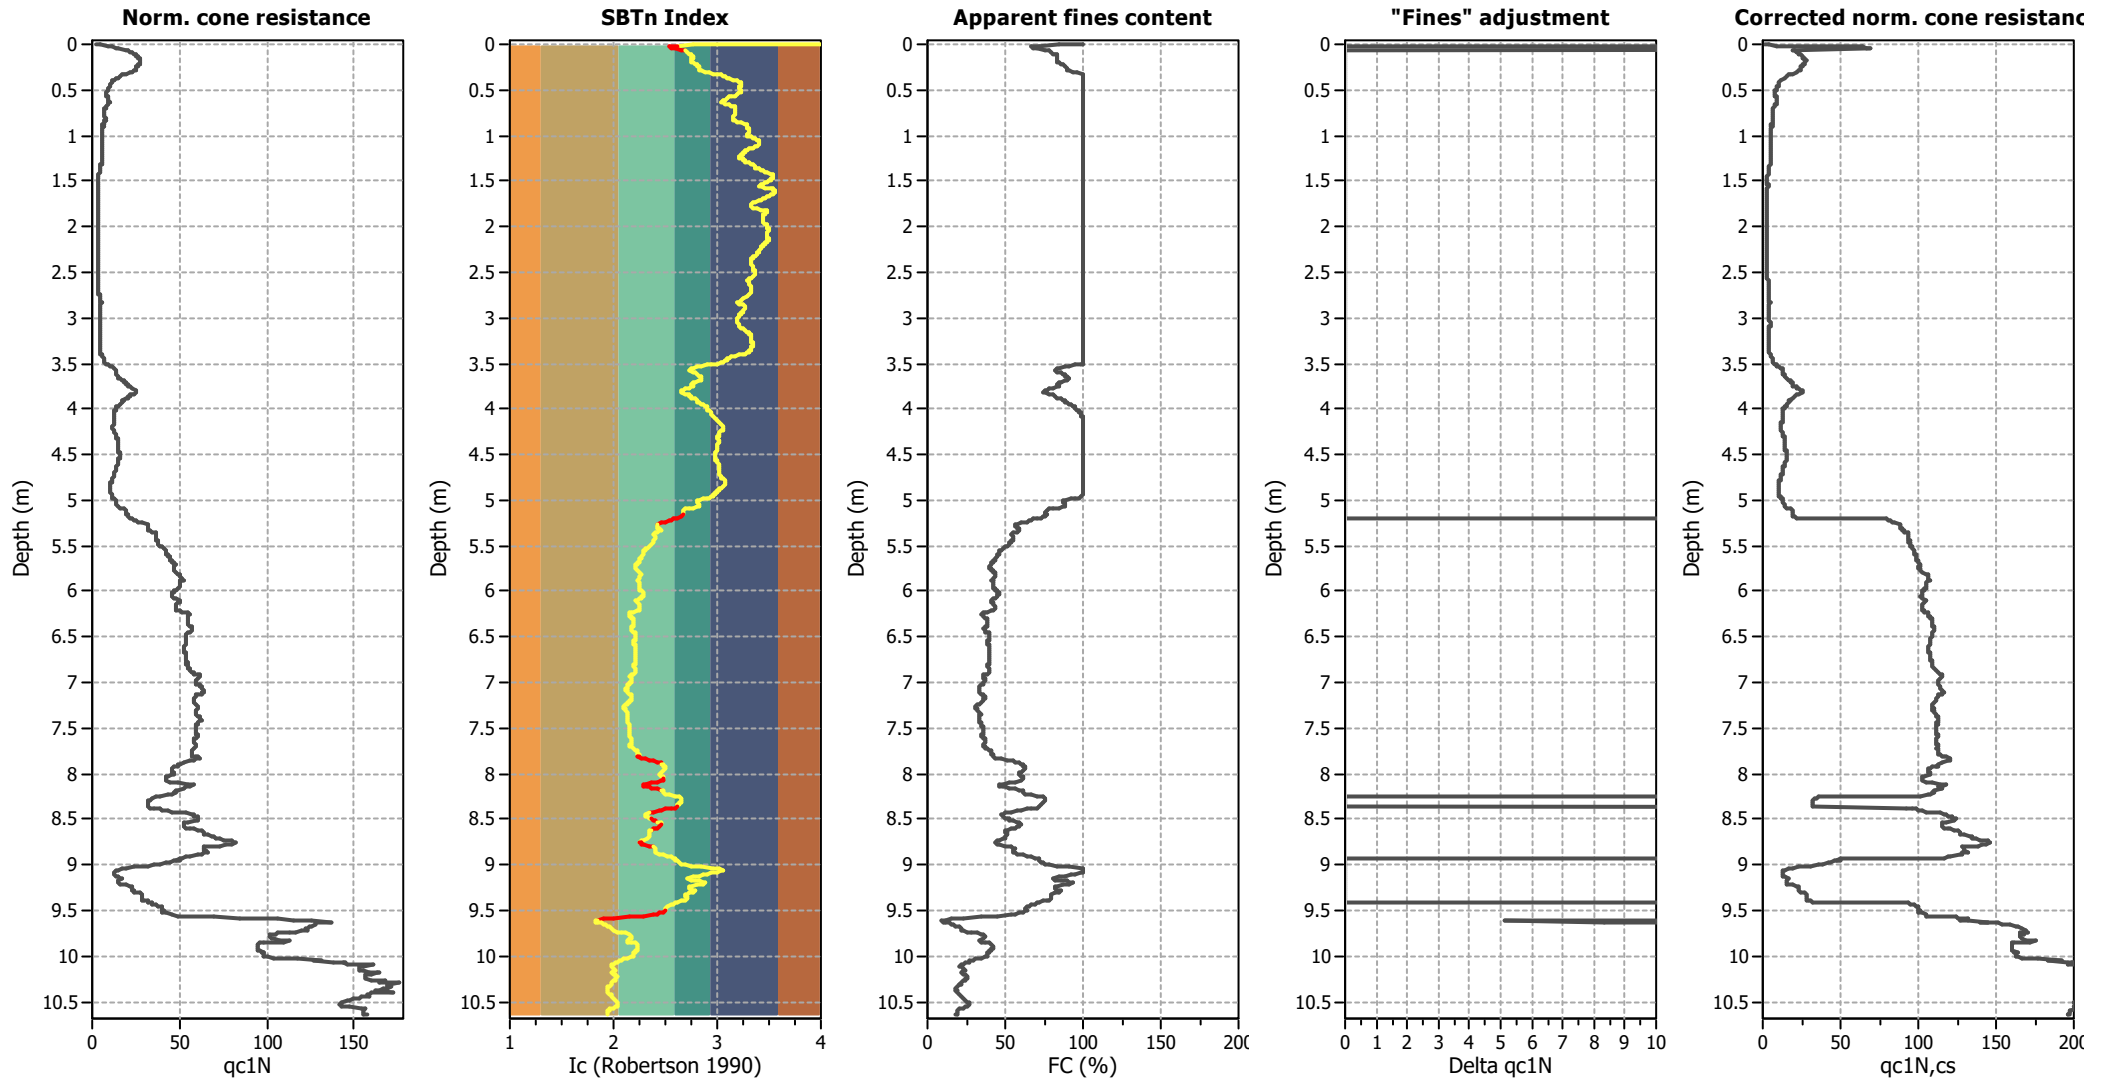

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

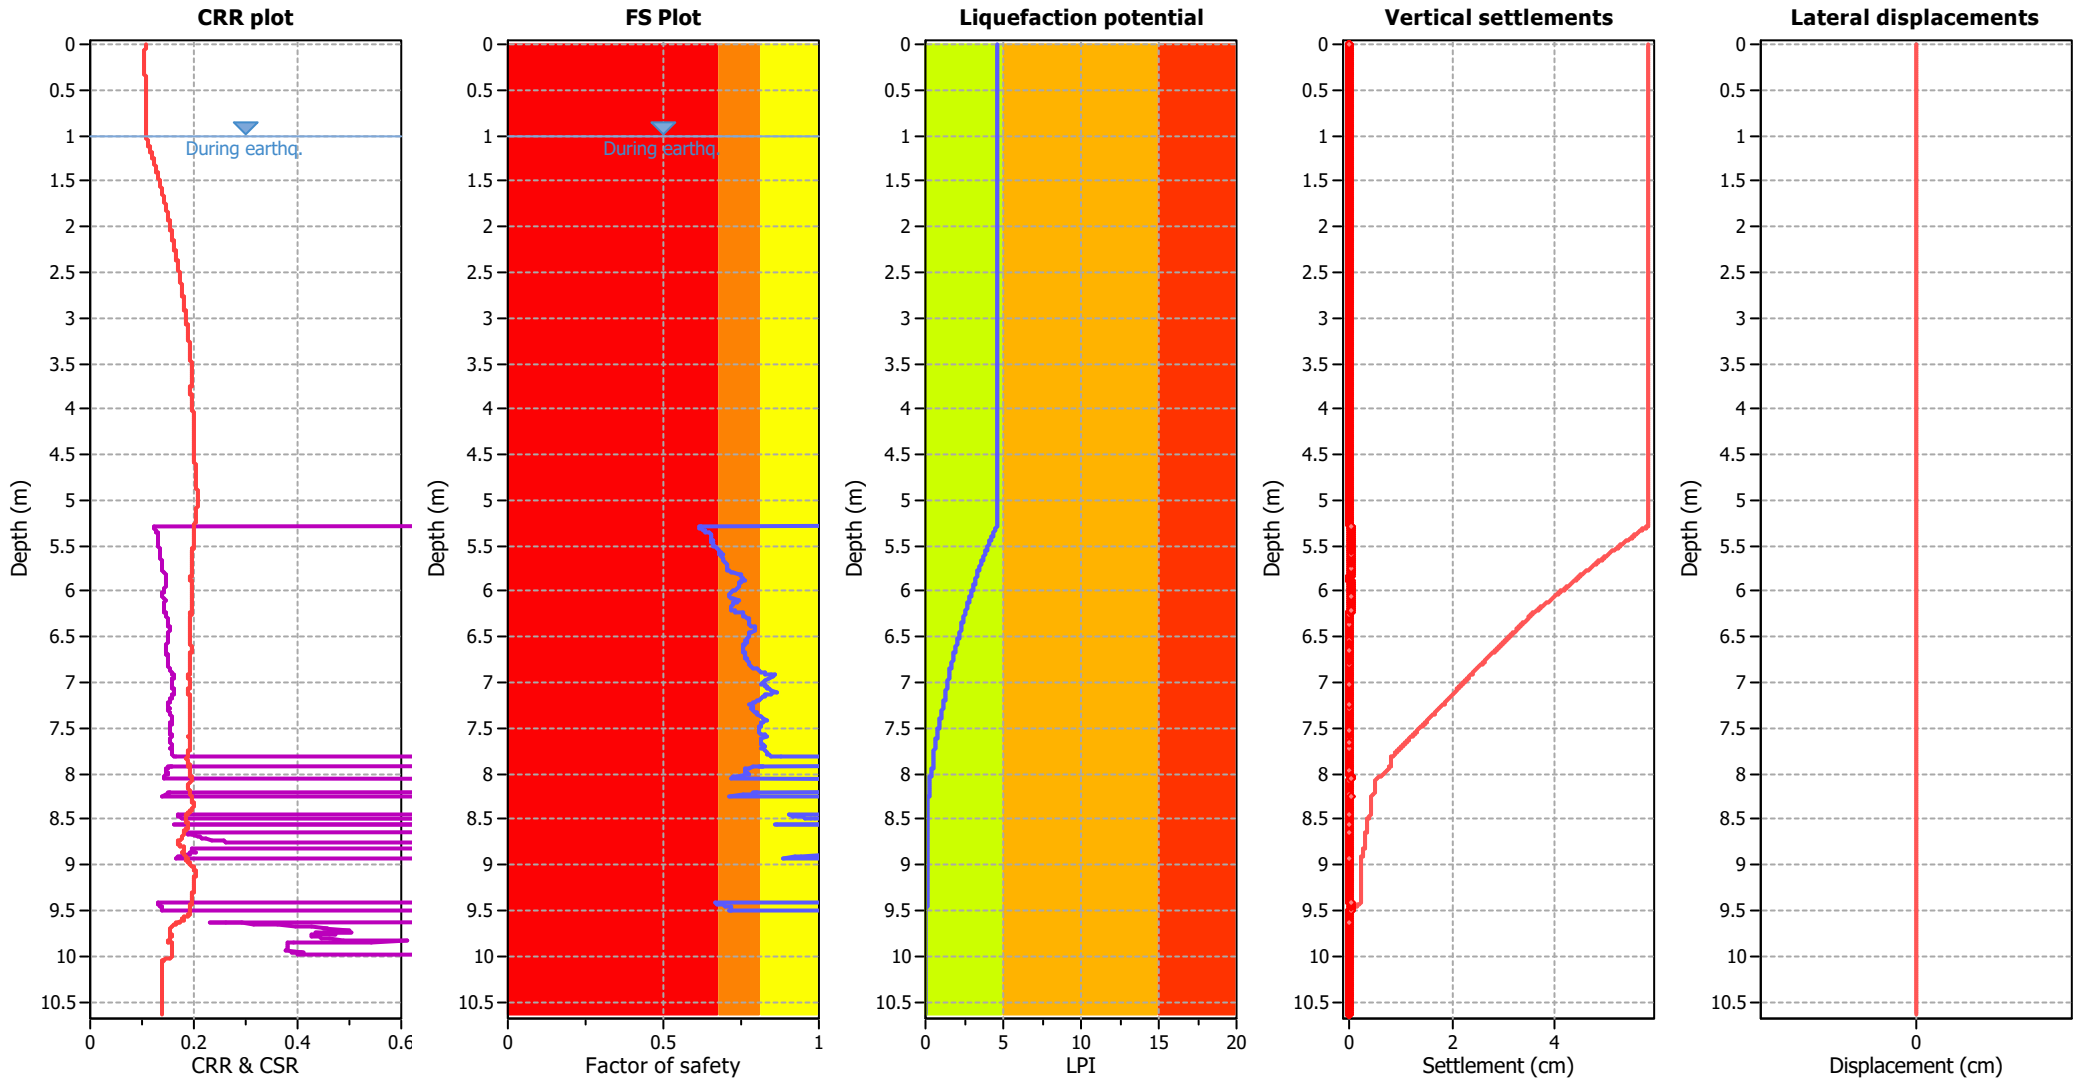

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

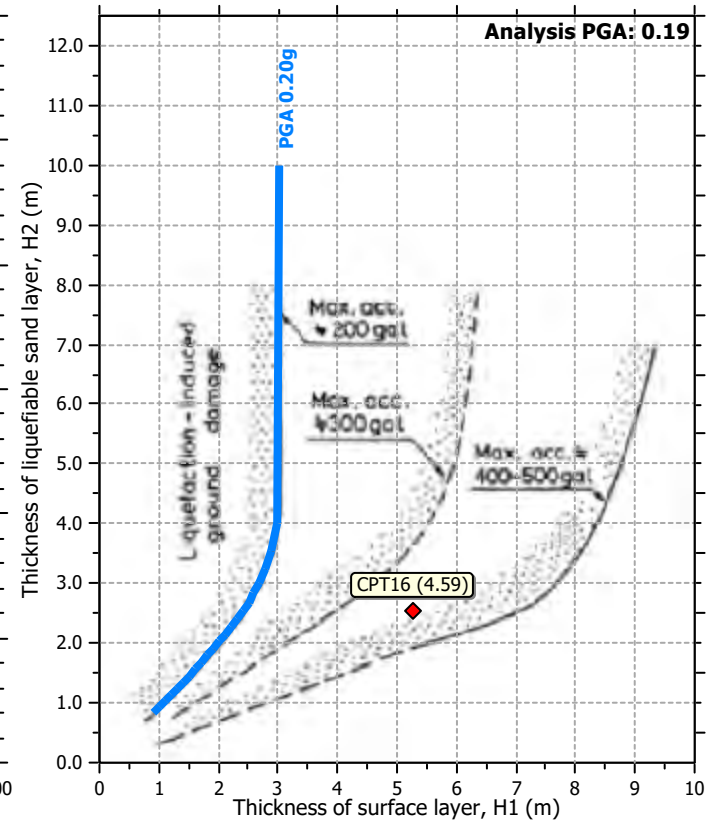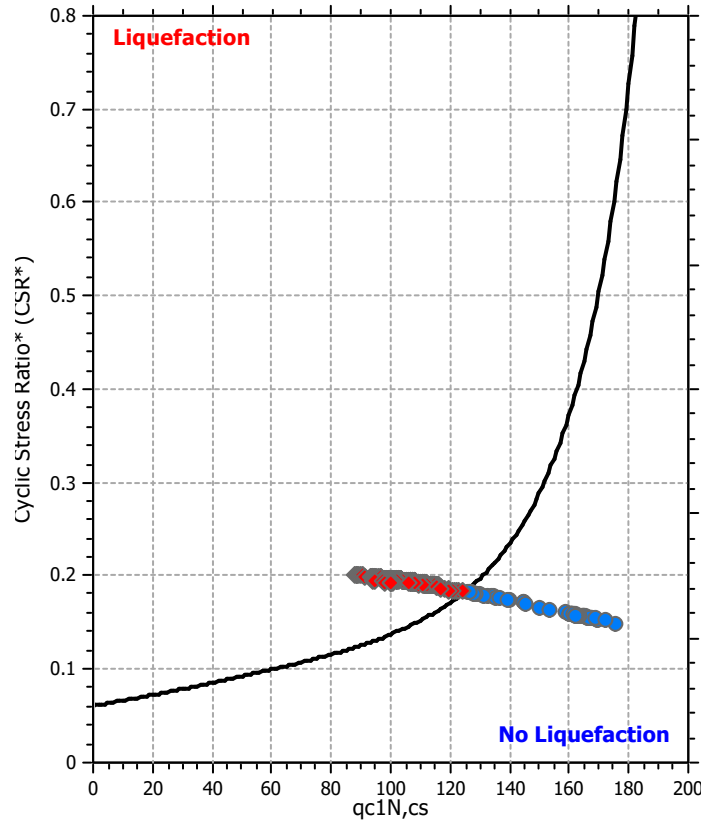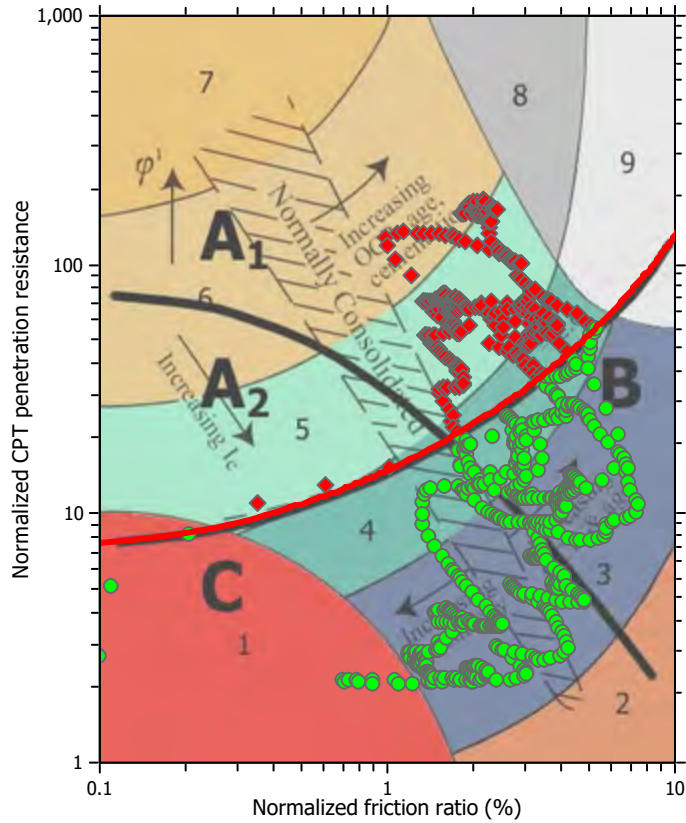

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

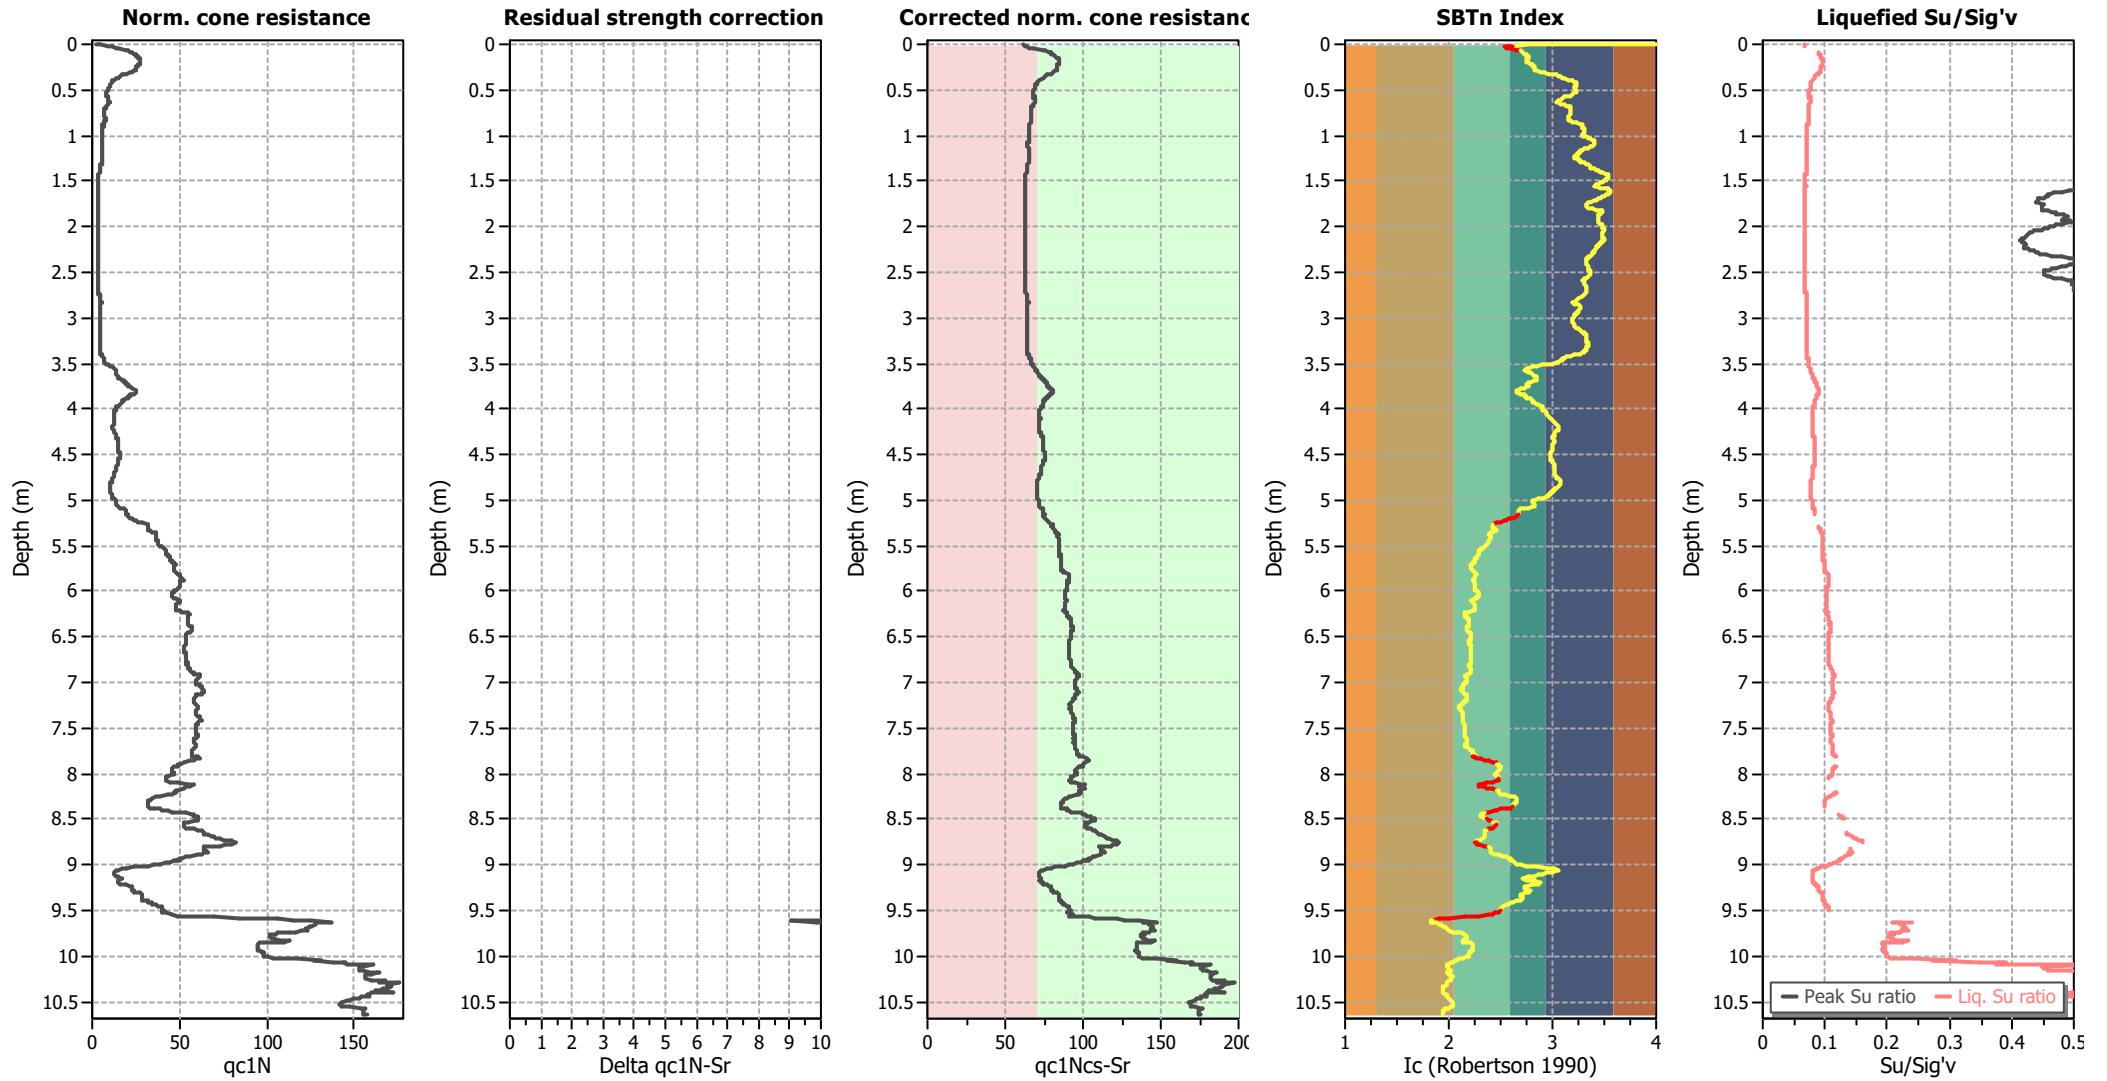

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

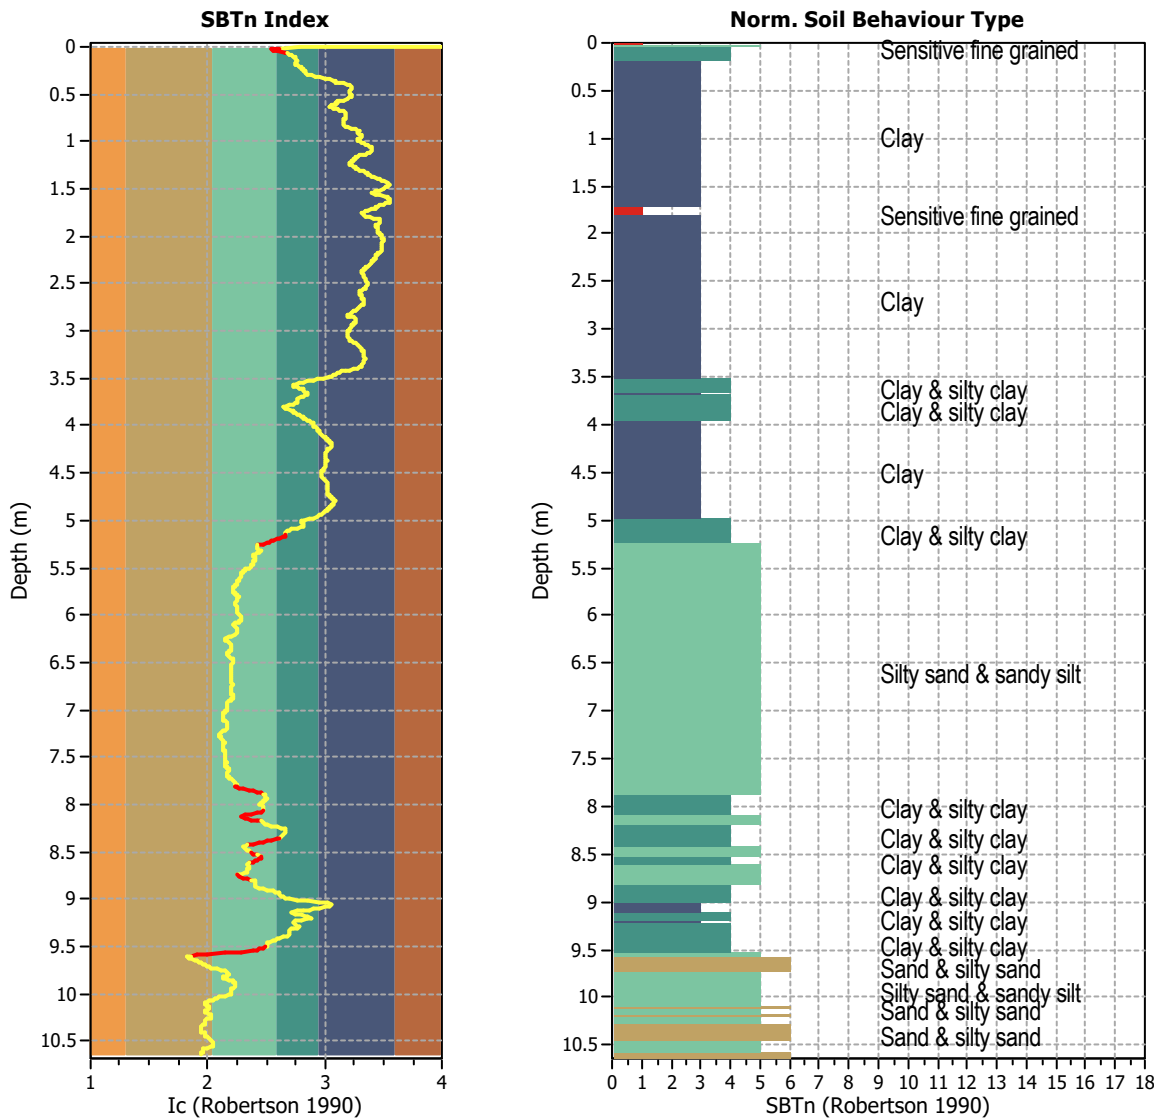


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1065
 Total points excluded: 76
 Exclusion percentage: 7.14%
 Number of layers detected: 10


Estimation of post-earthquake settlements

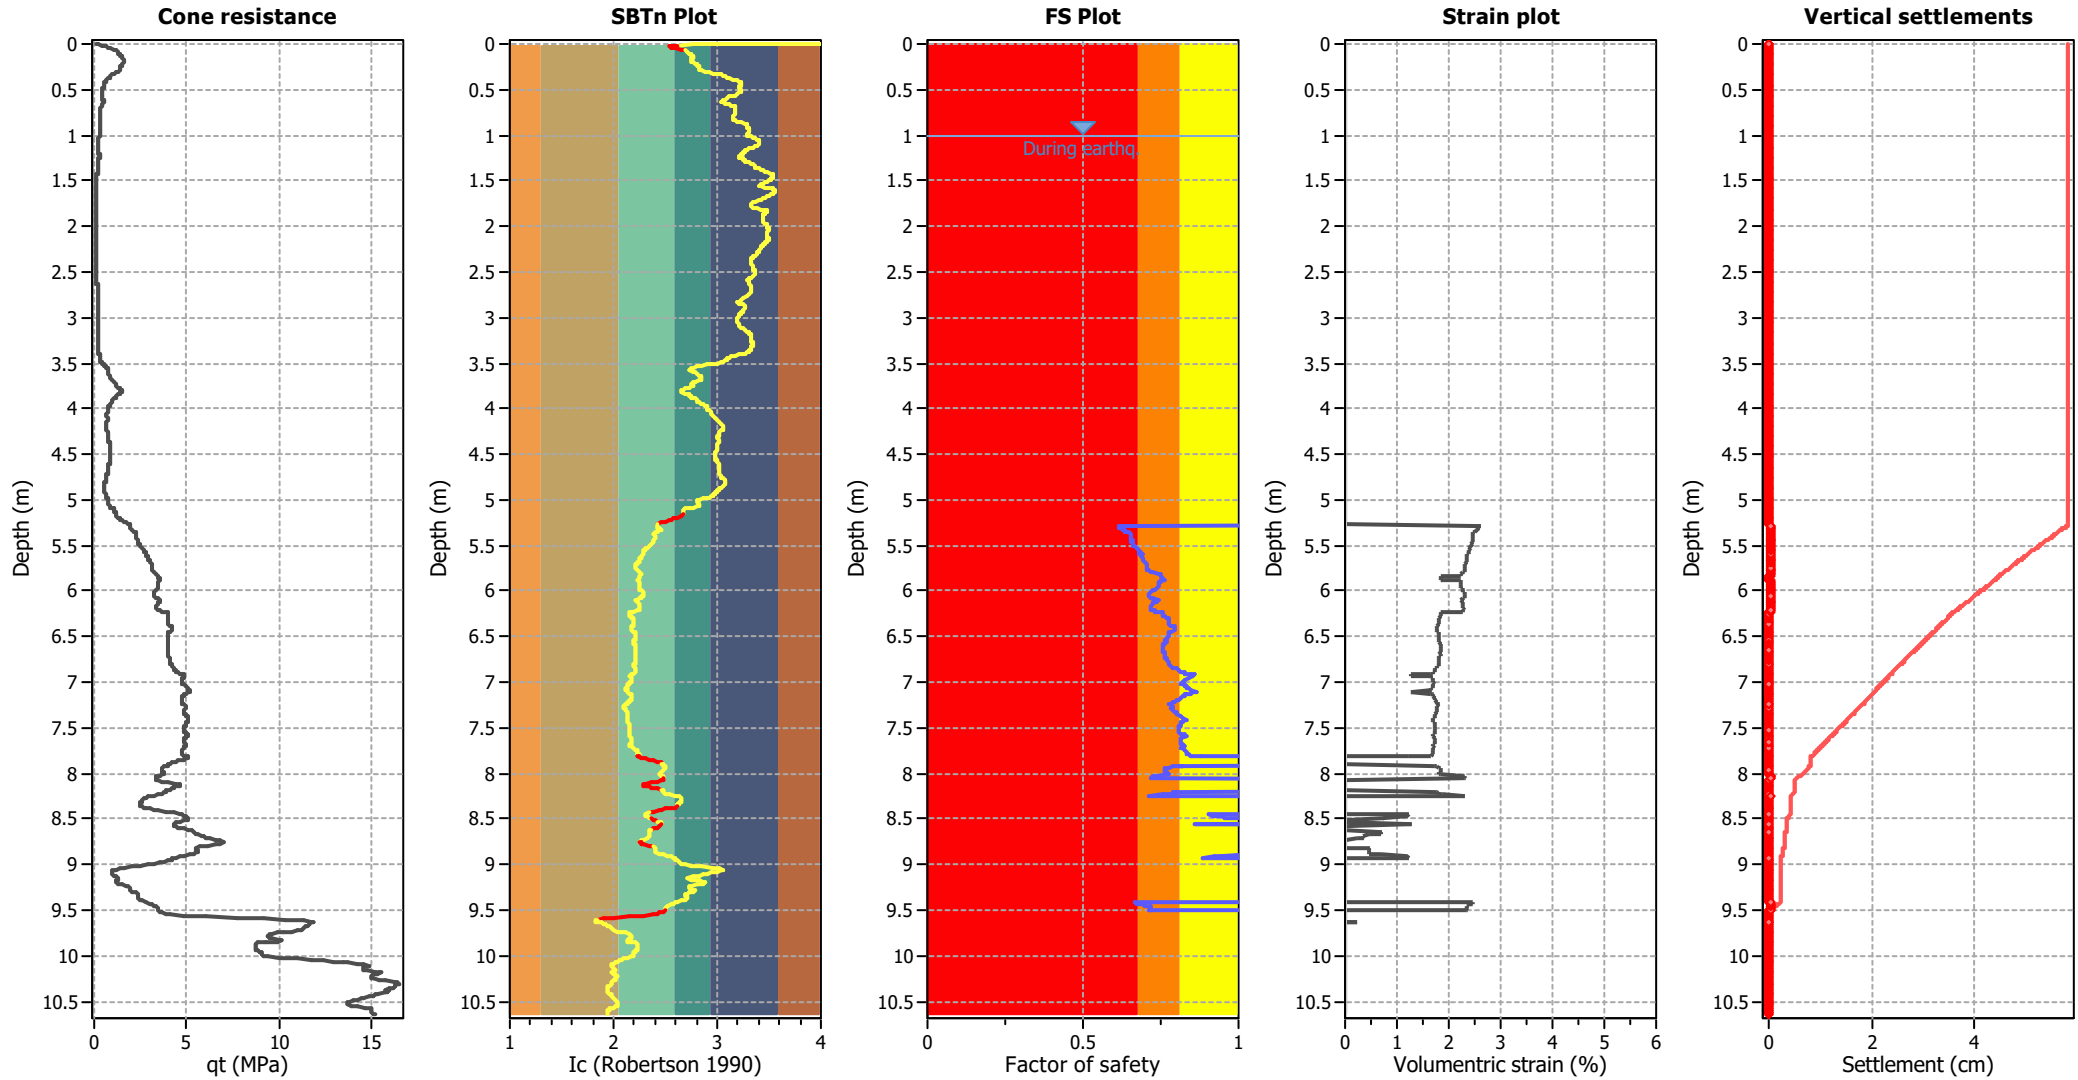

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

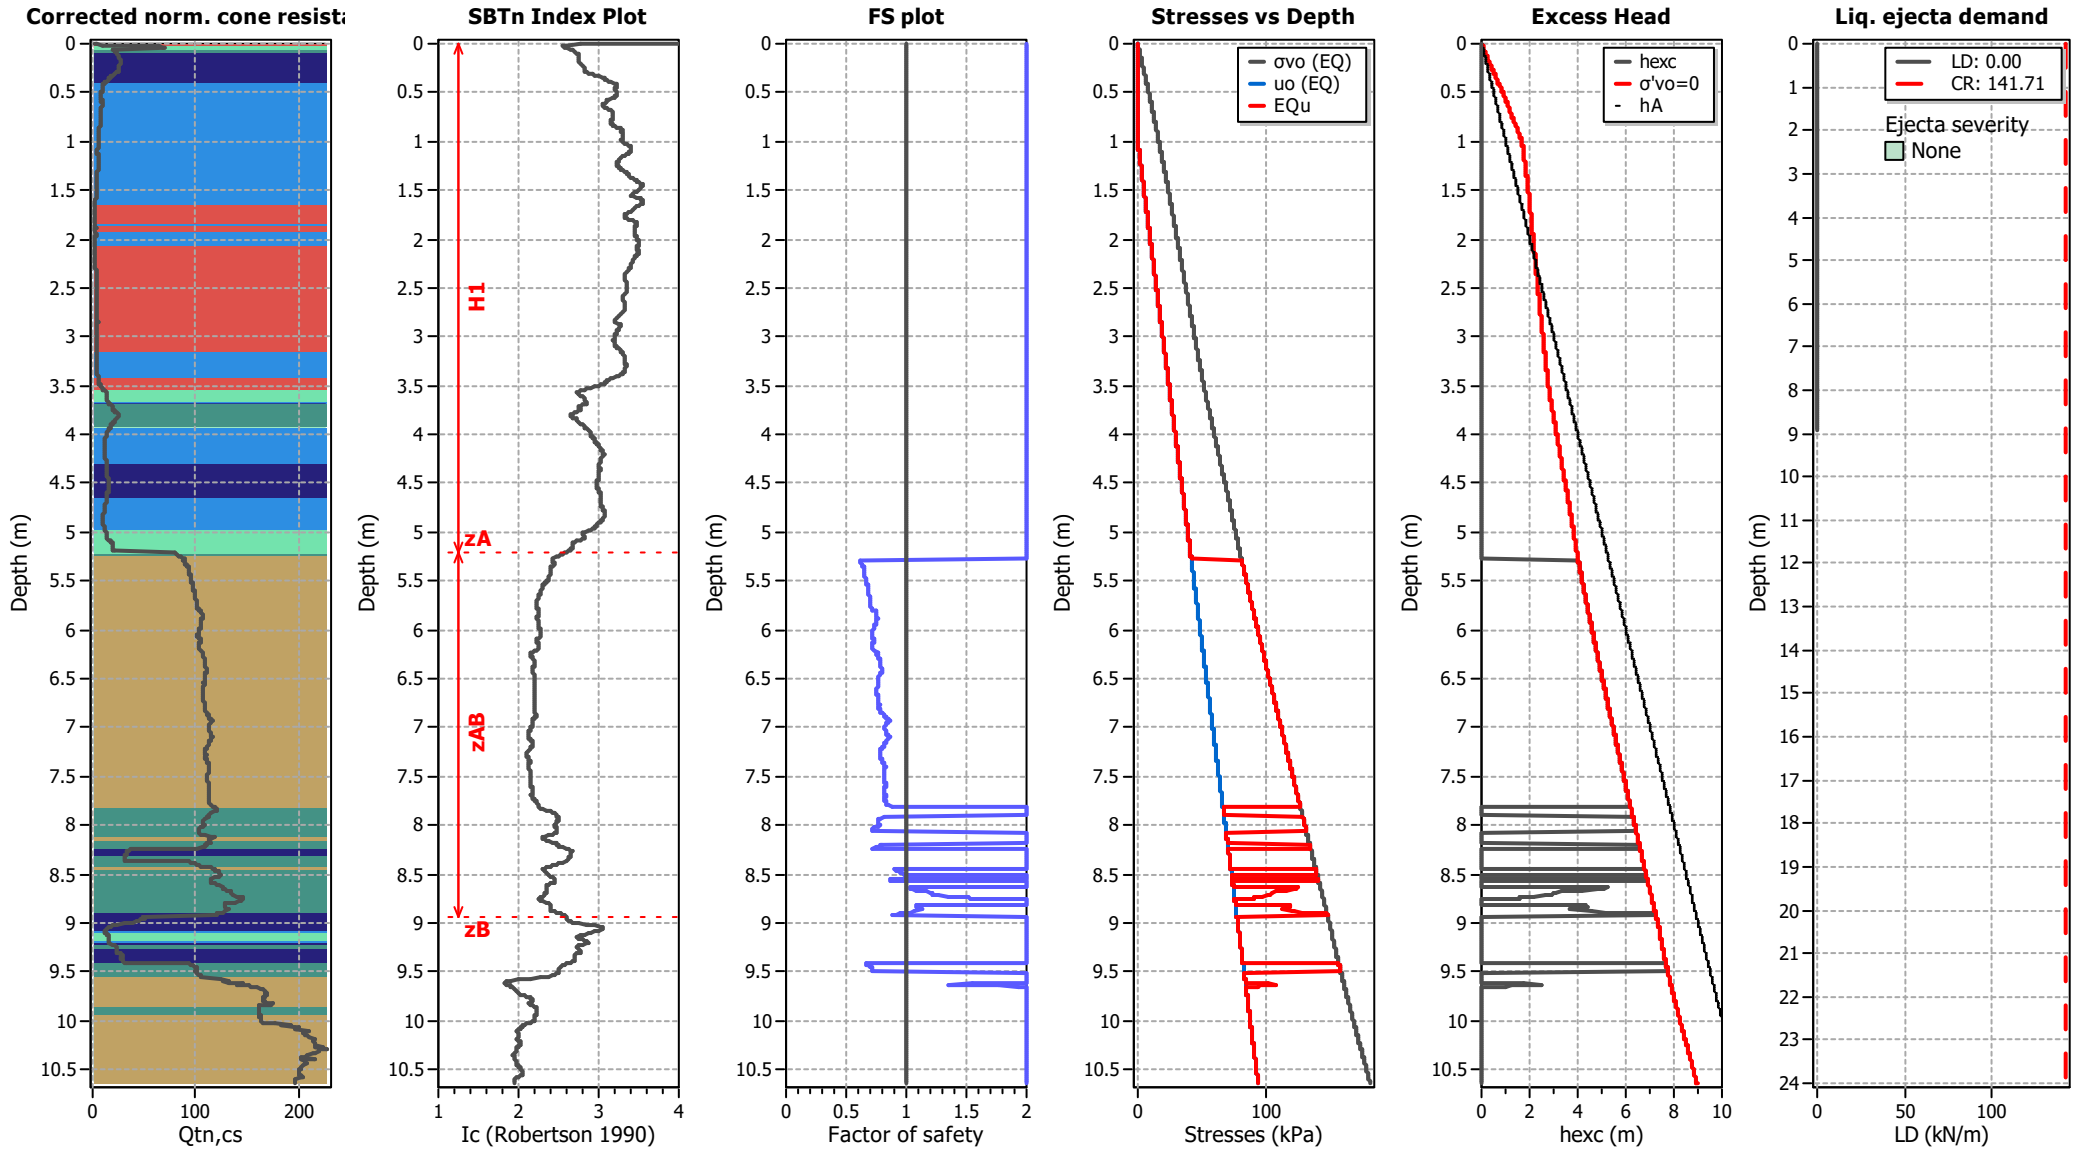

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT17

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

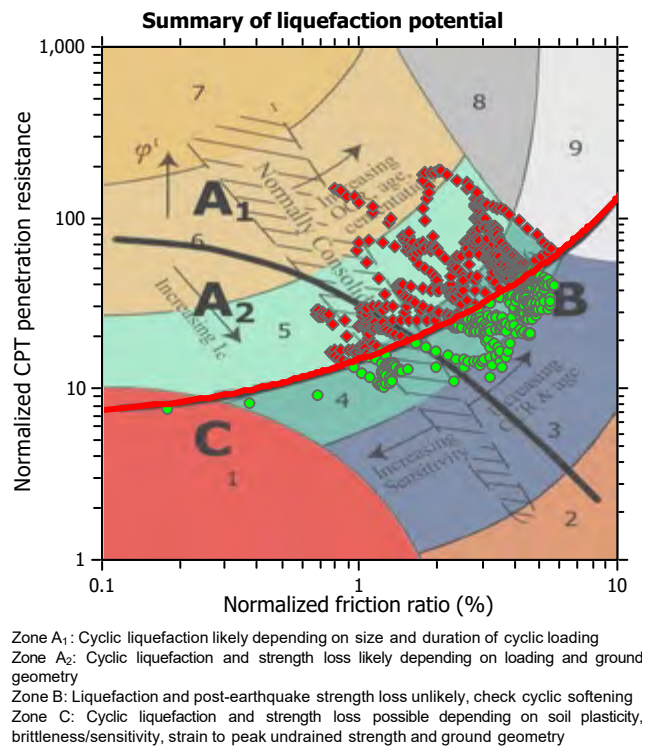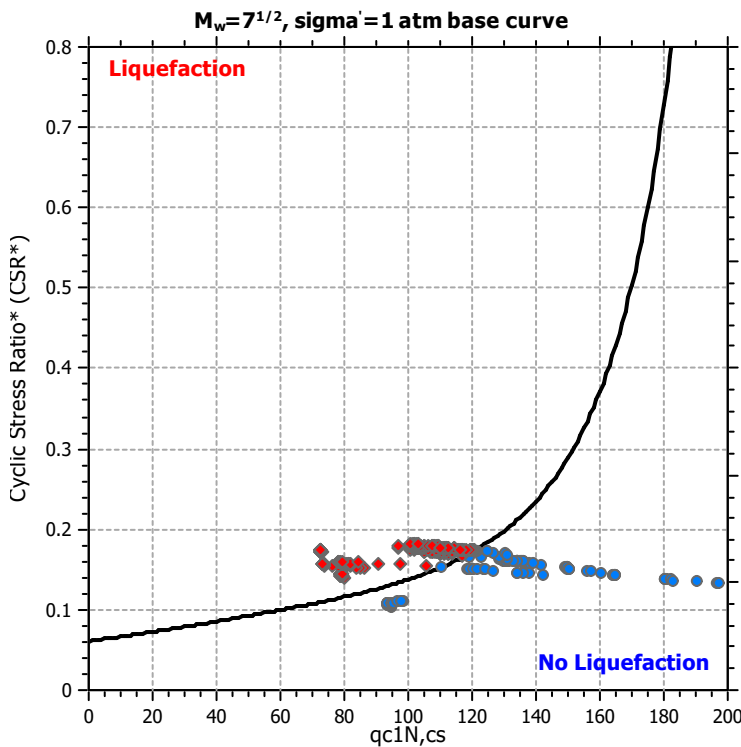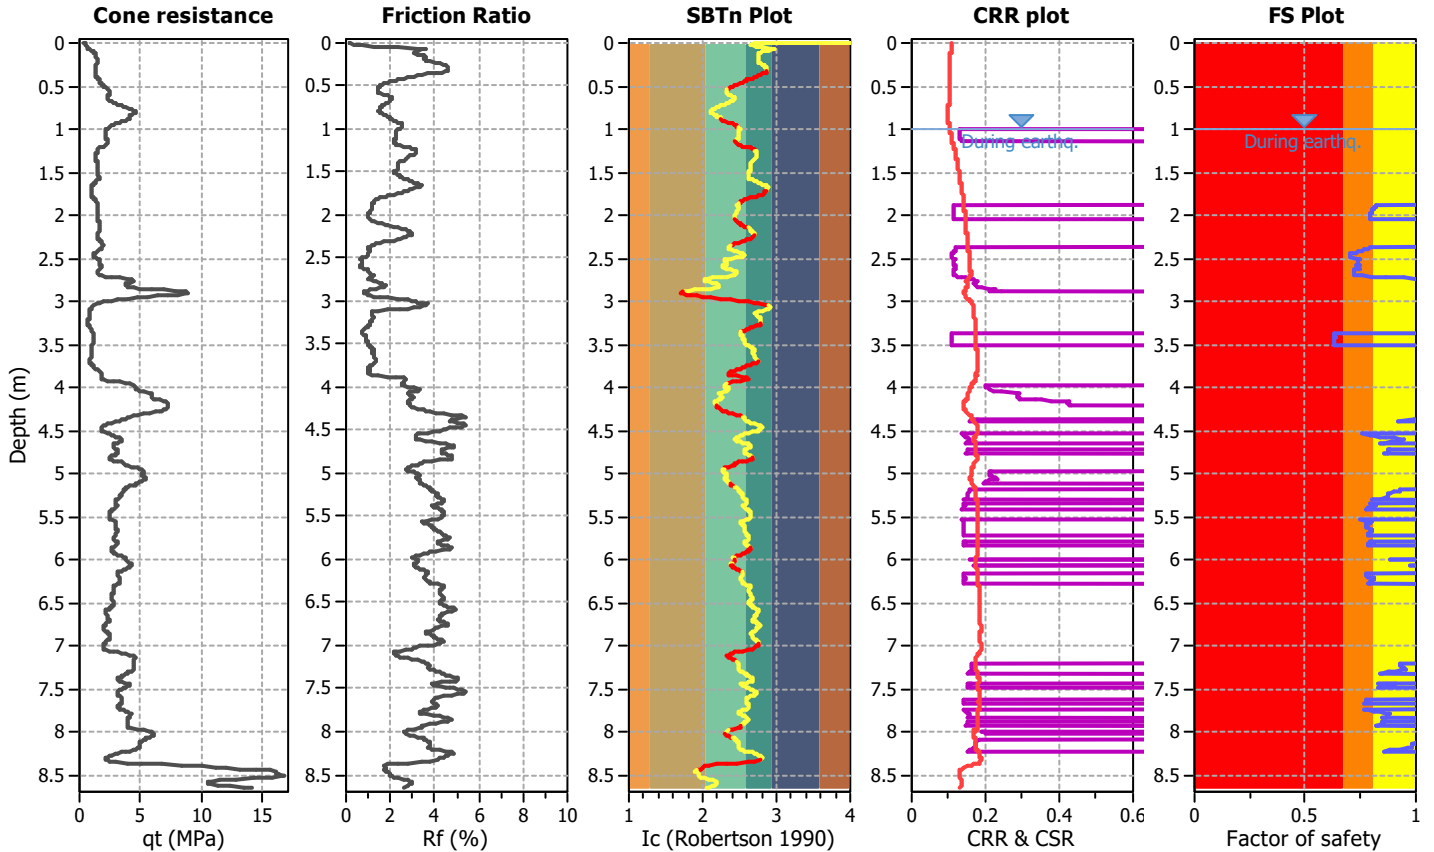

CPT basic interpretation plots

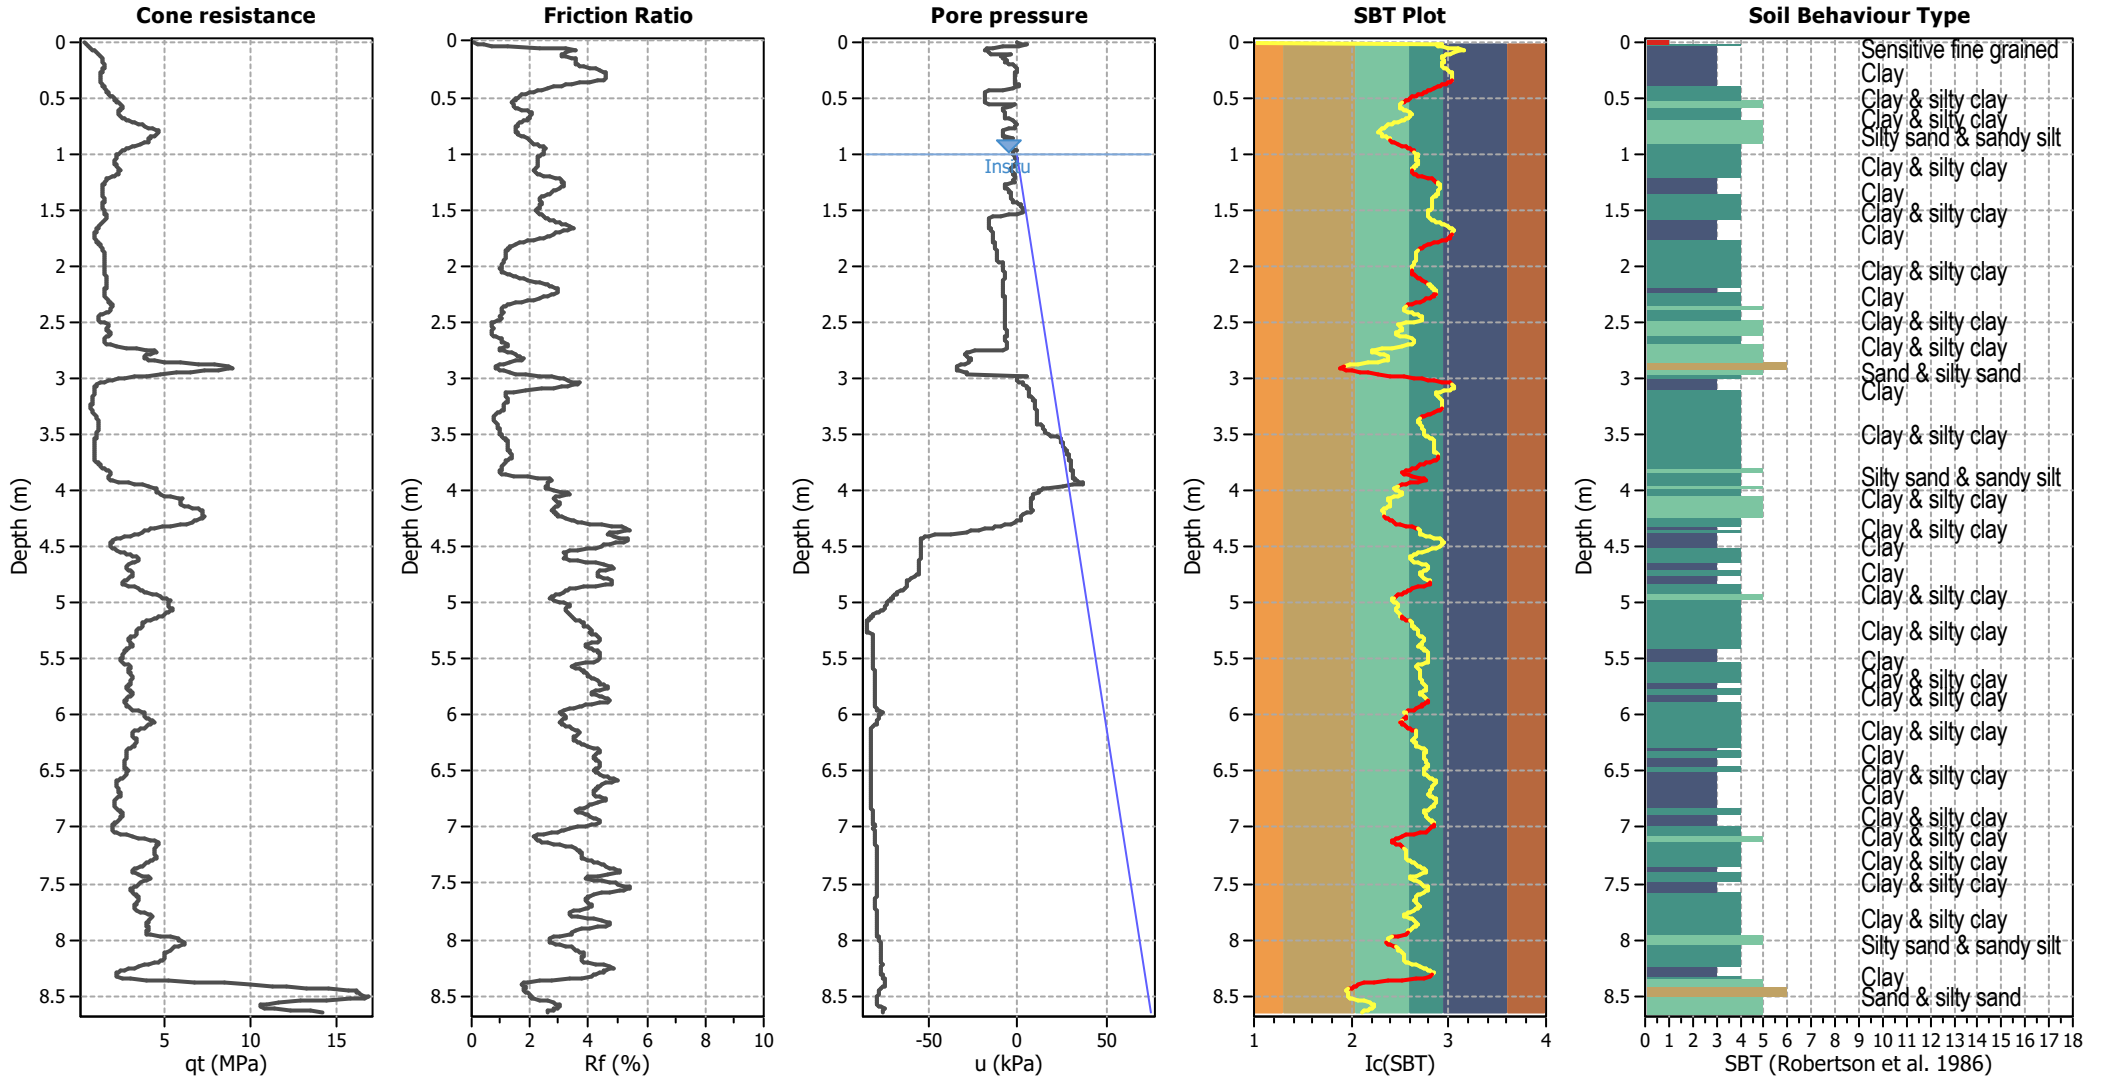


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

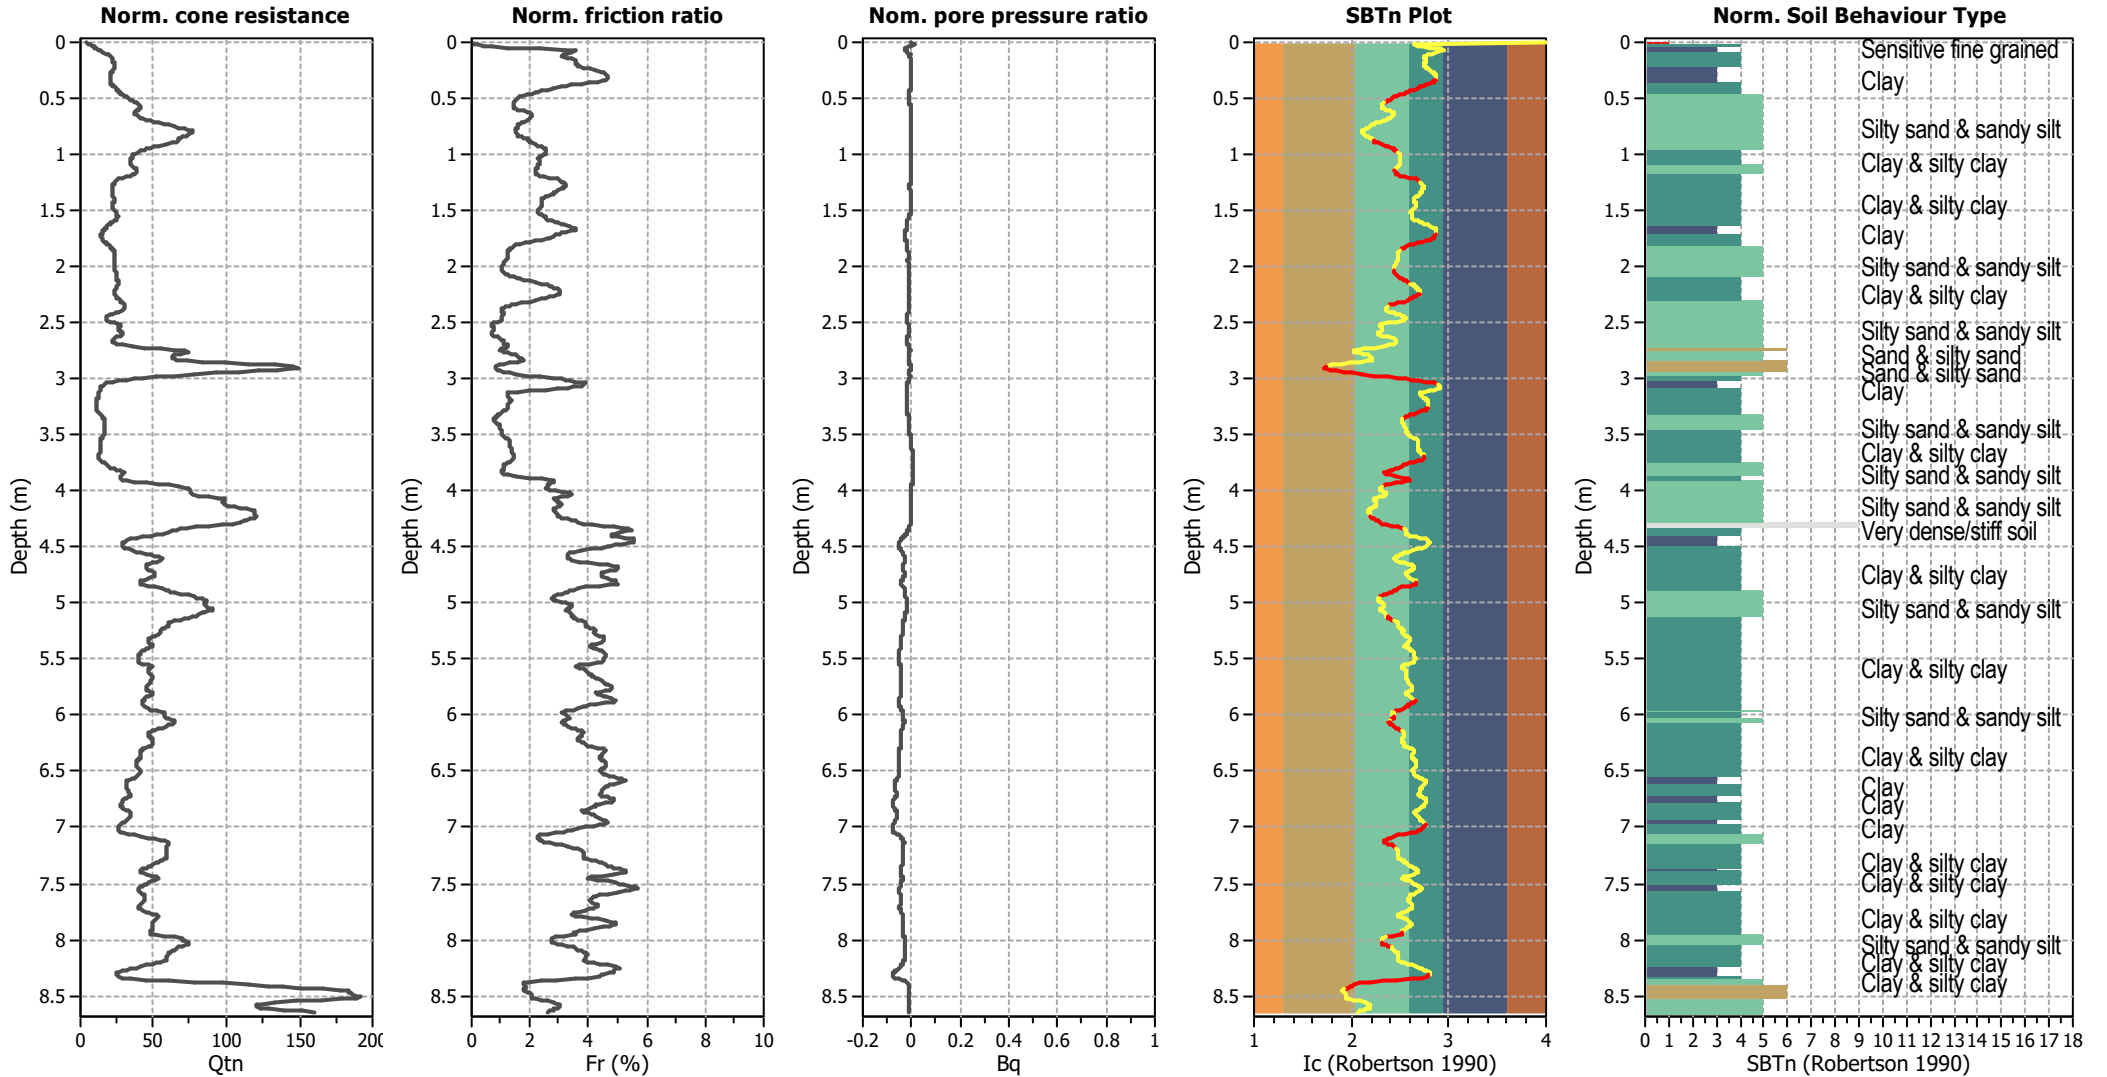


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

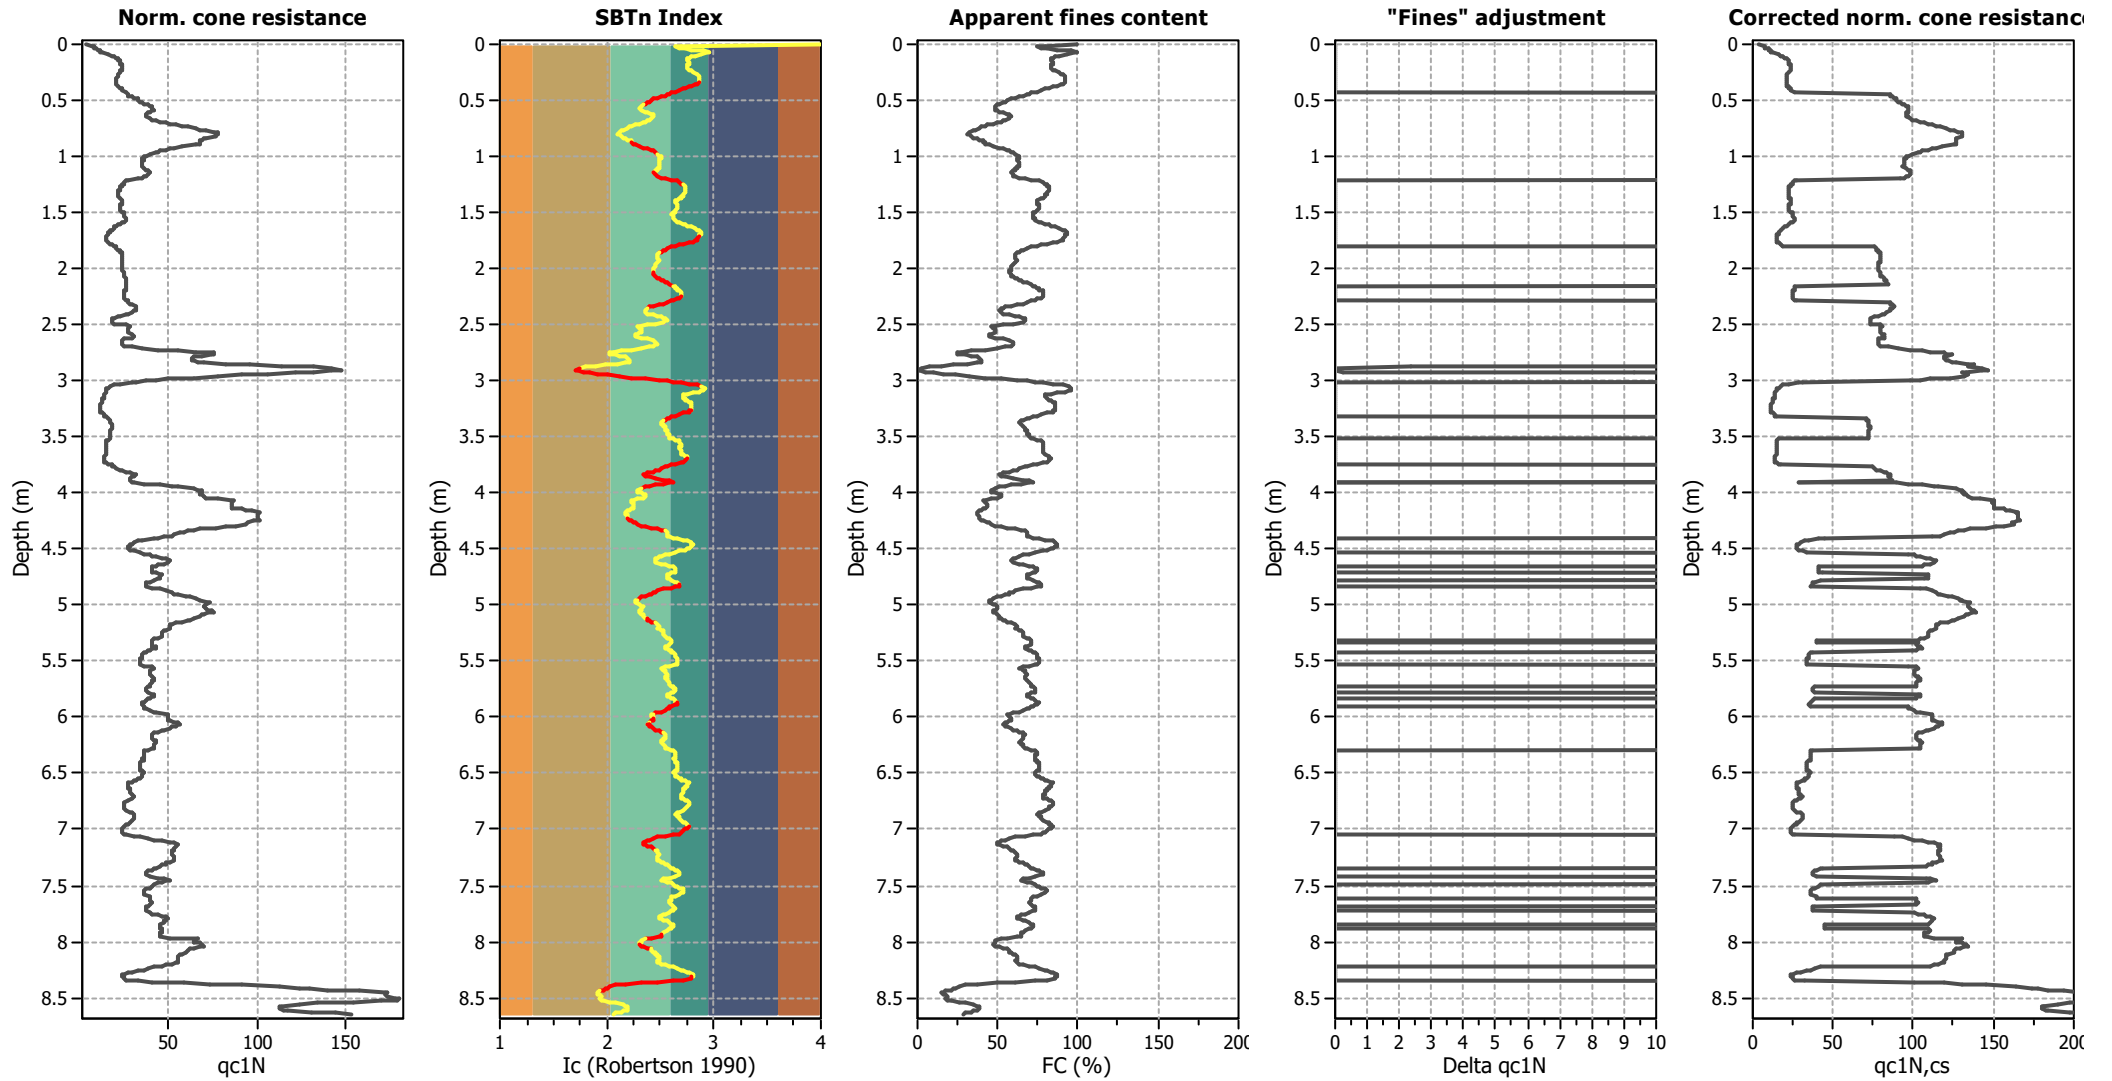

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

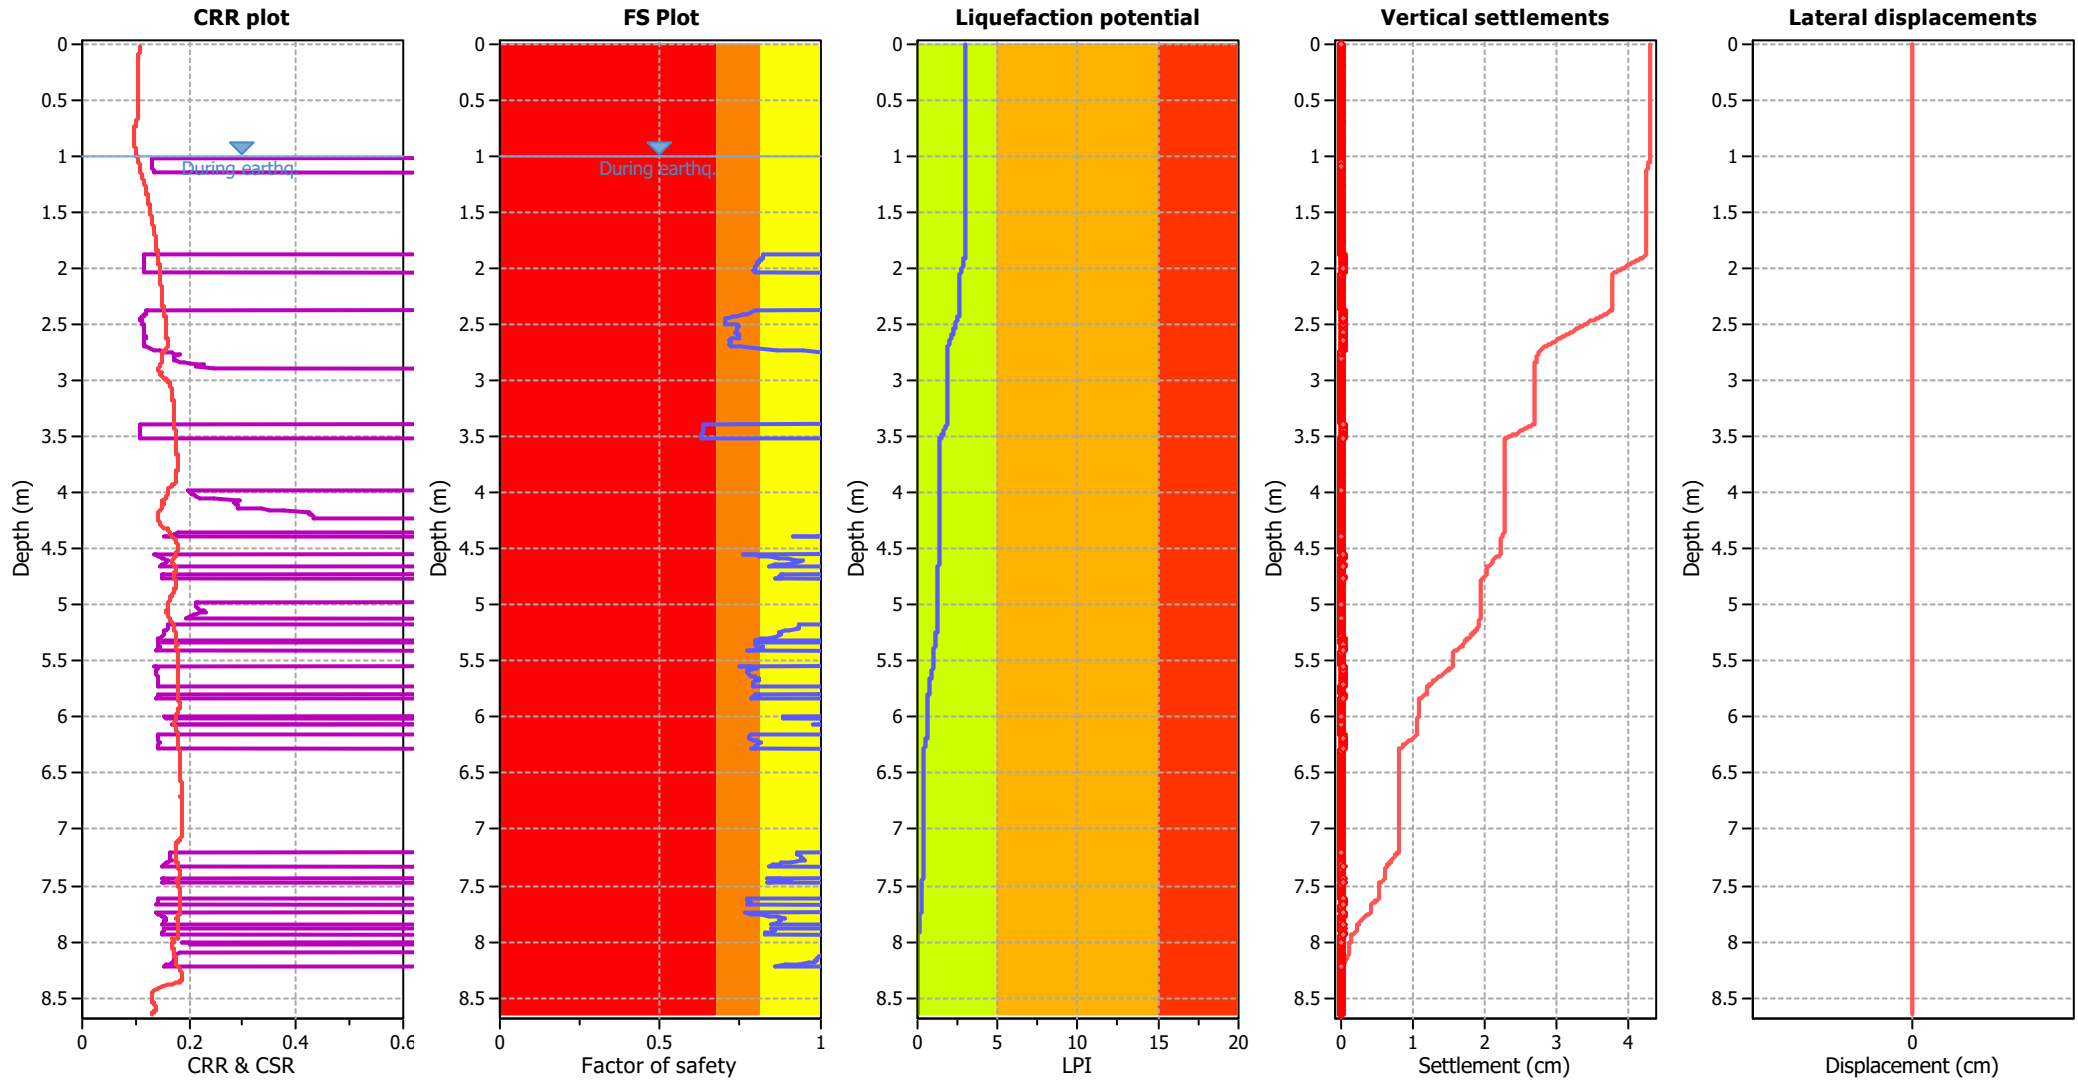

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

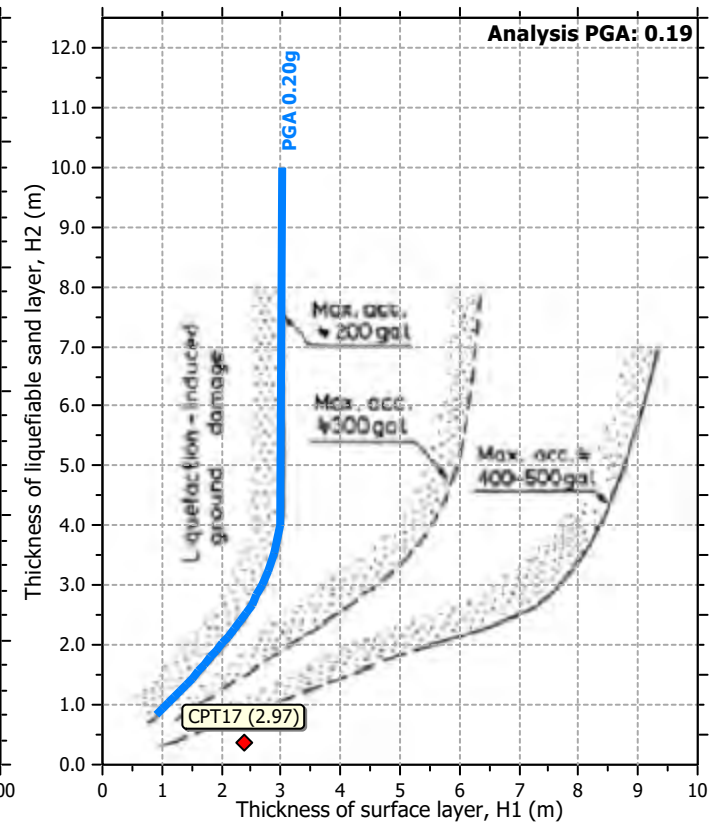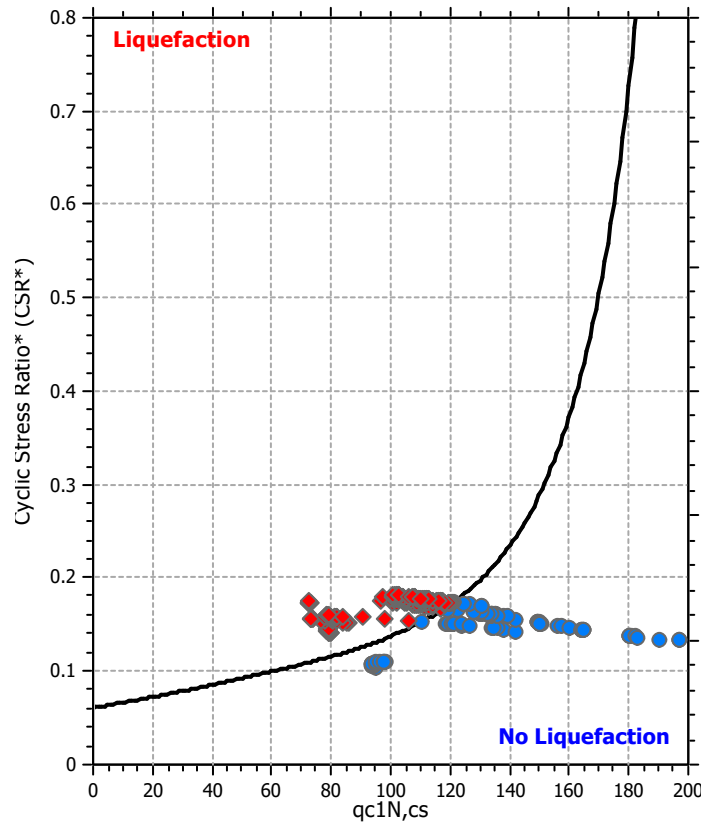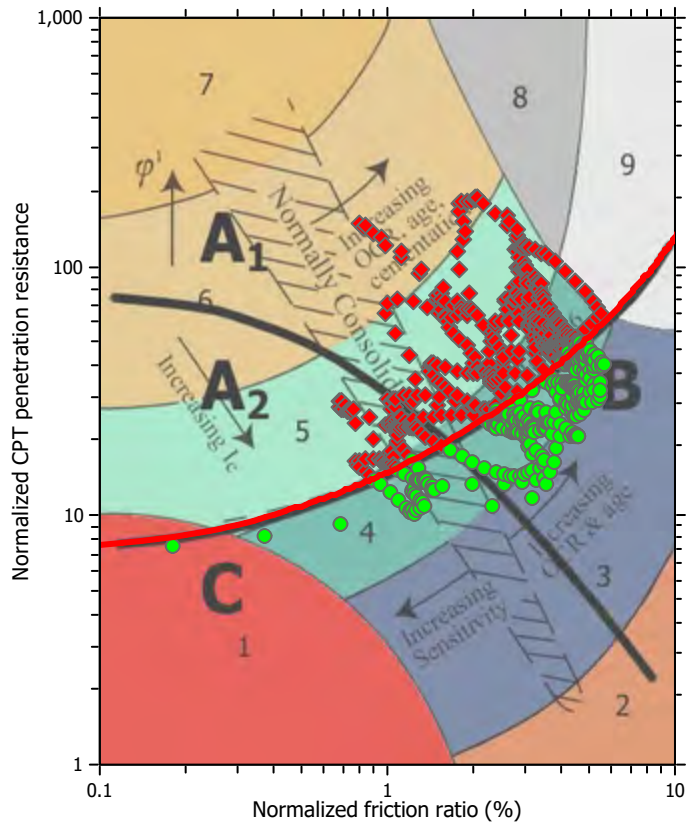

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

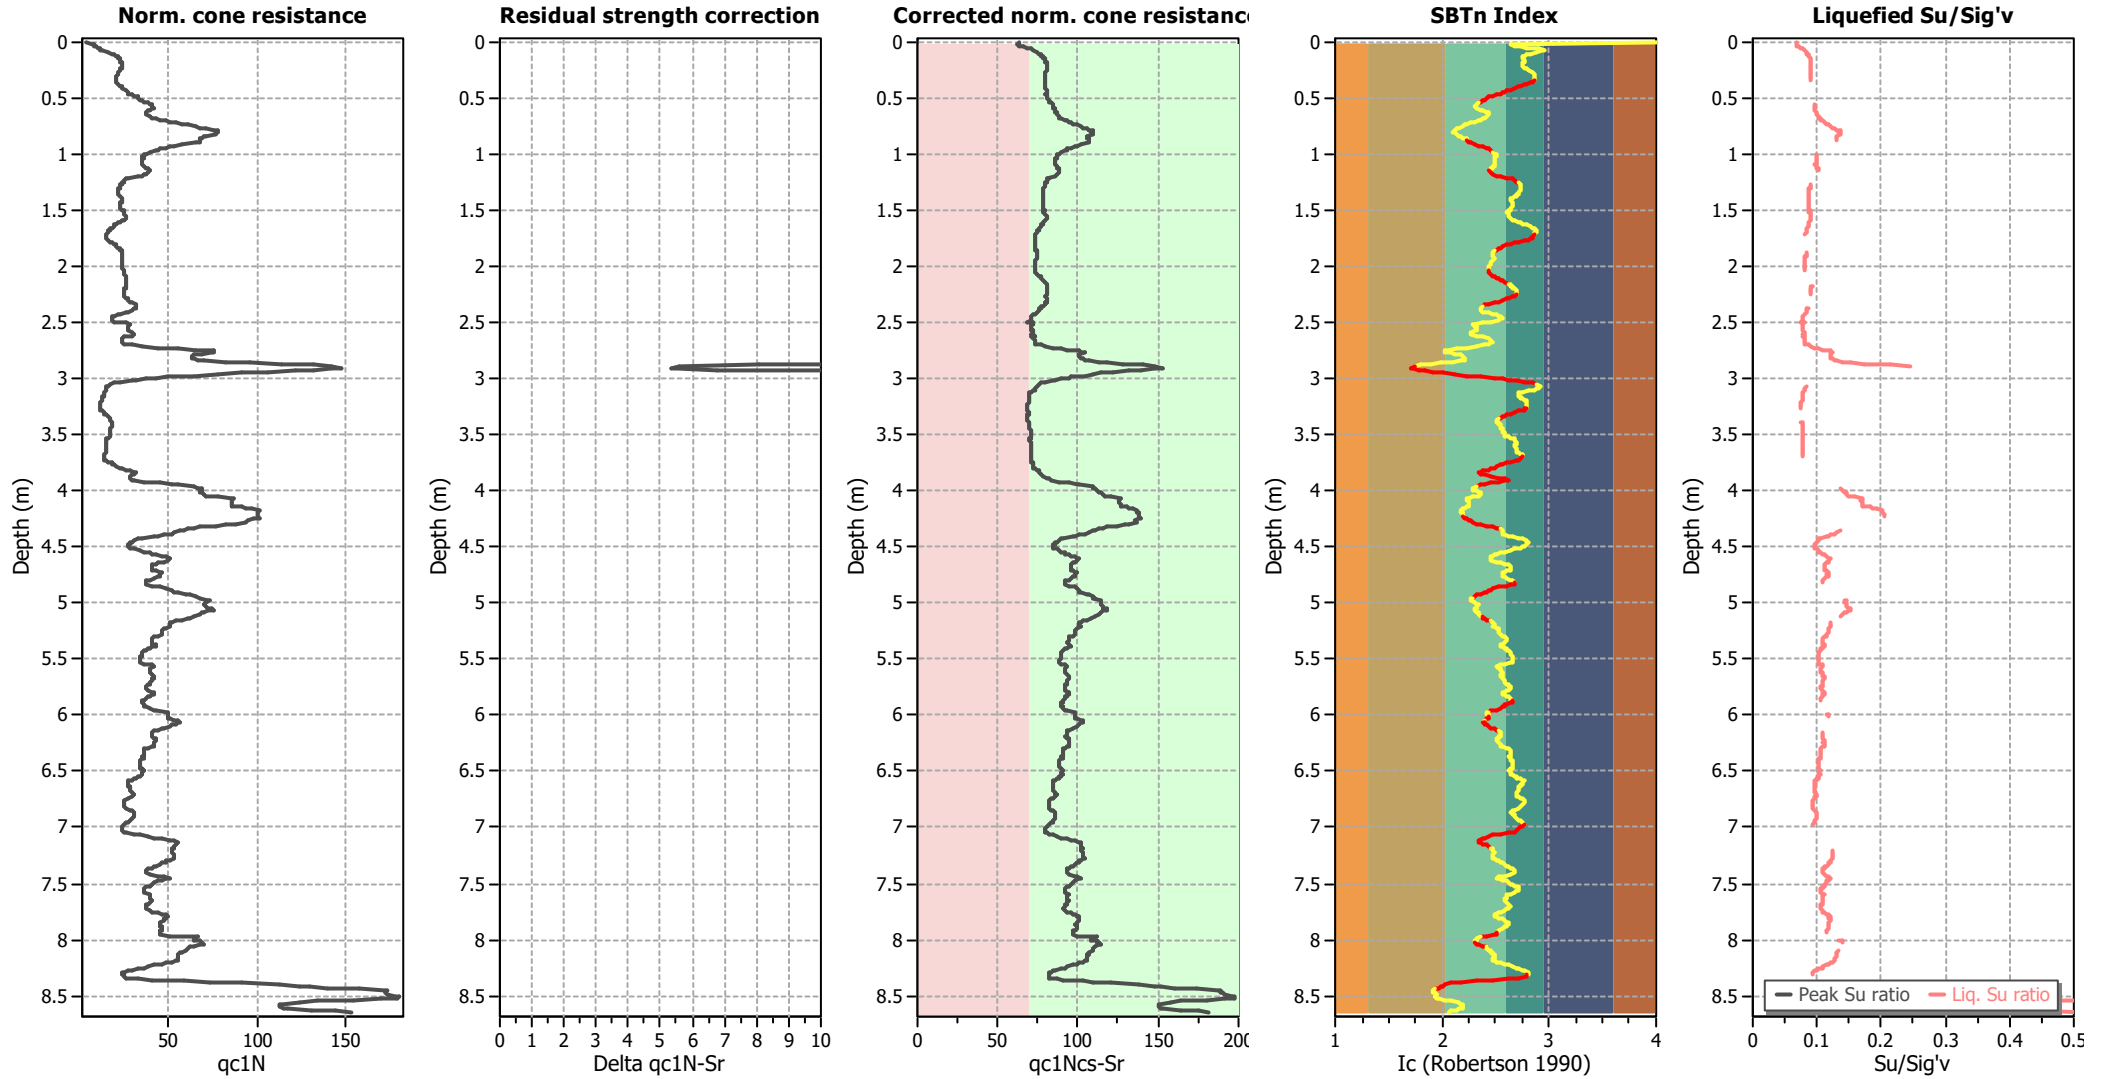

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

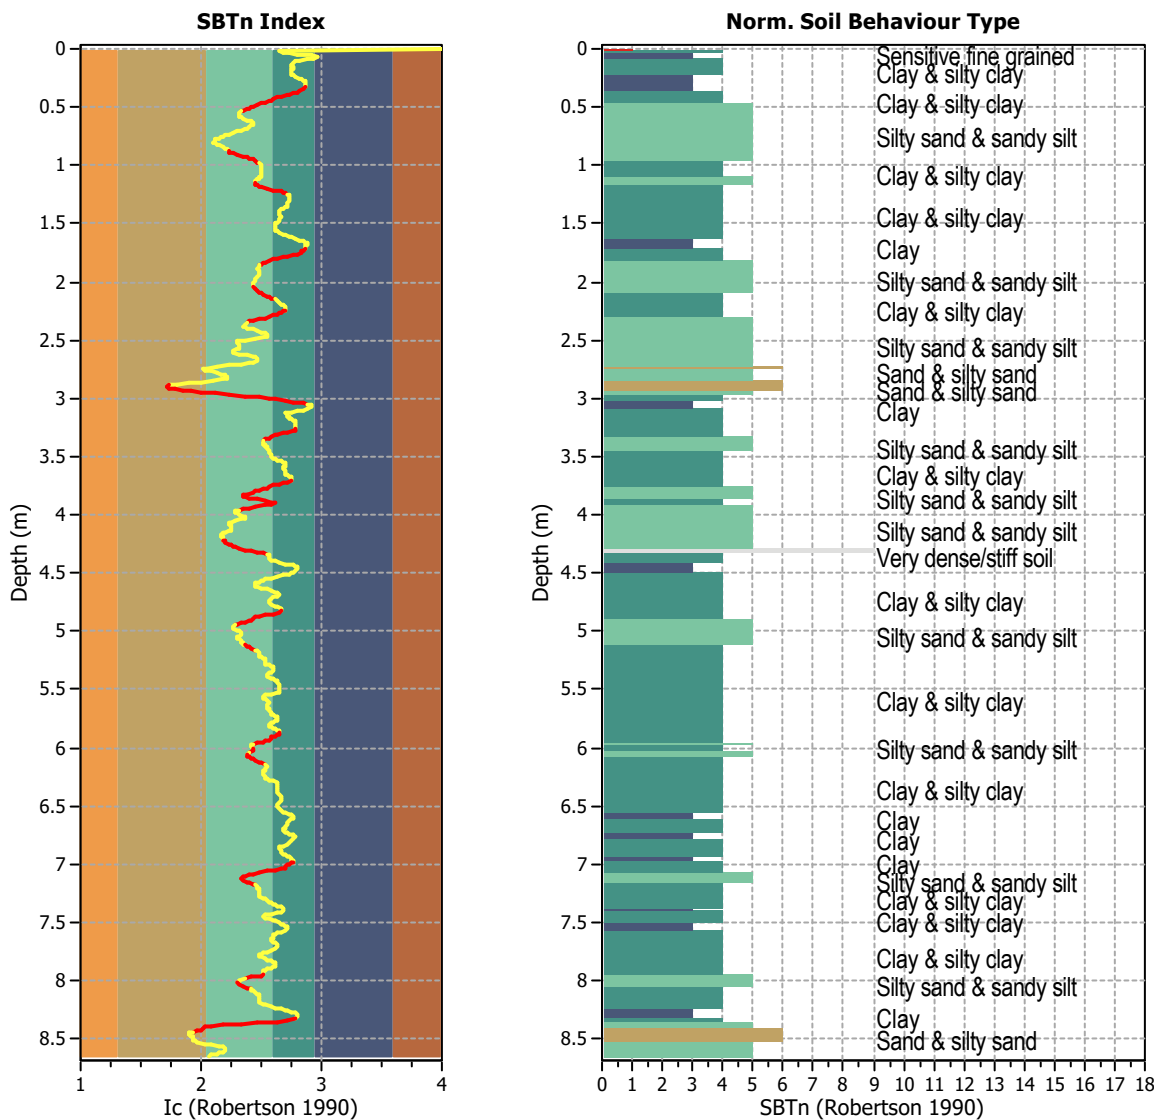


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 866
 Total points excluded: 241
 Exclusion percentage: 27.83%
 Number of layers detected: 22


Estimation of post-earthquake settlements

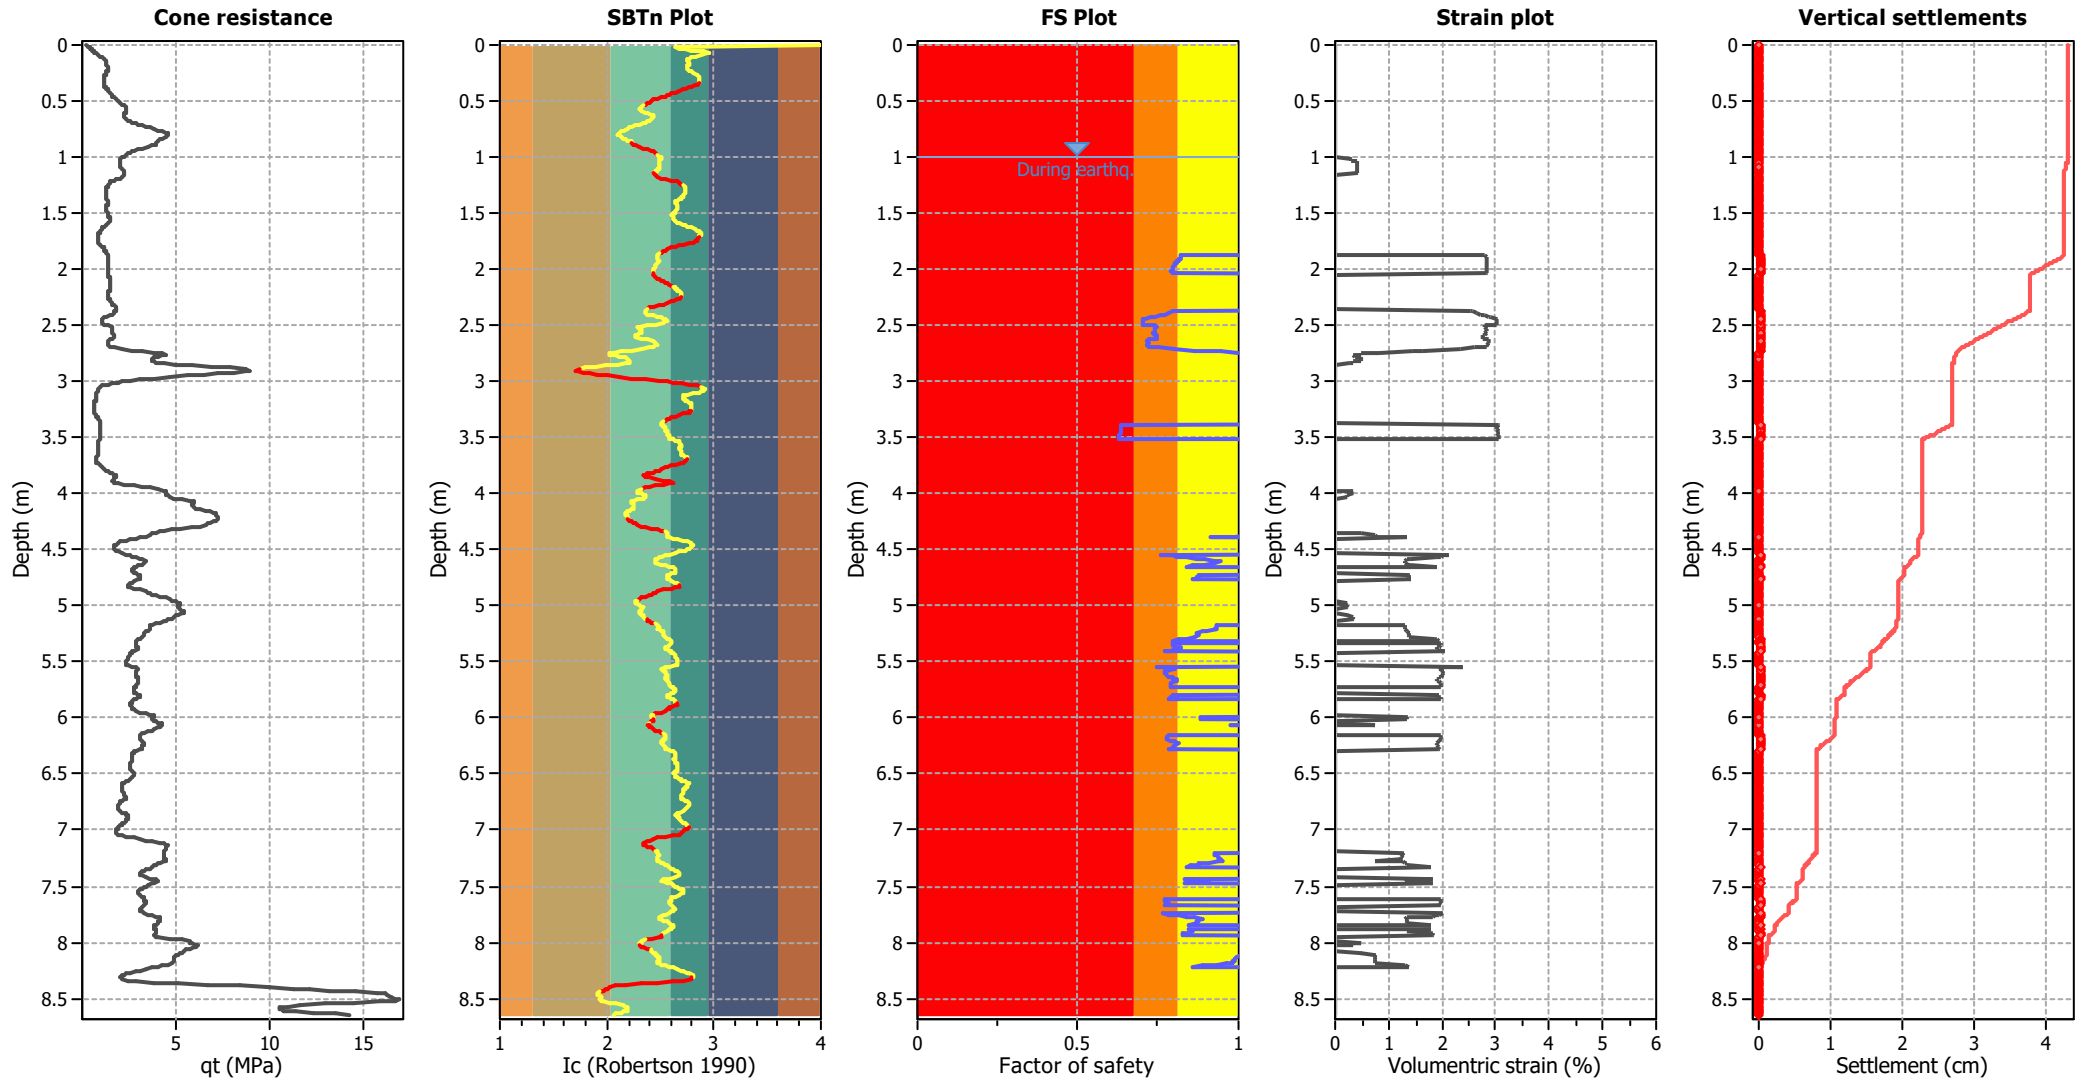

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

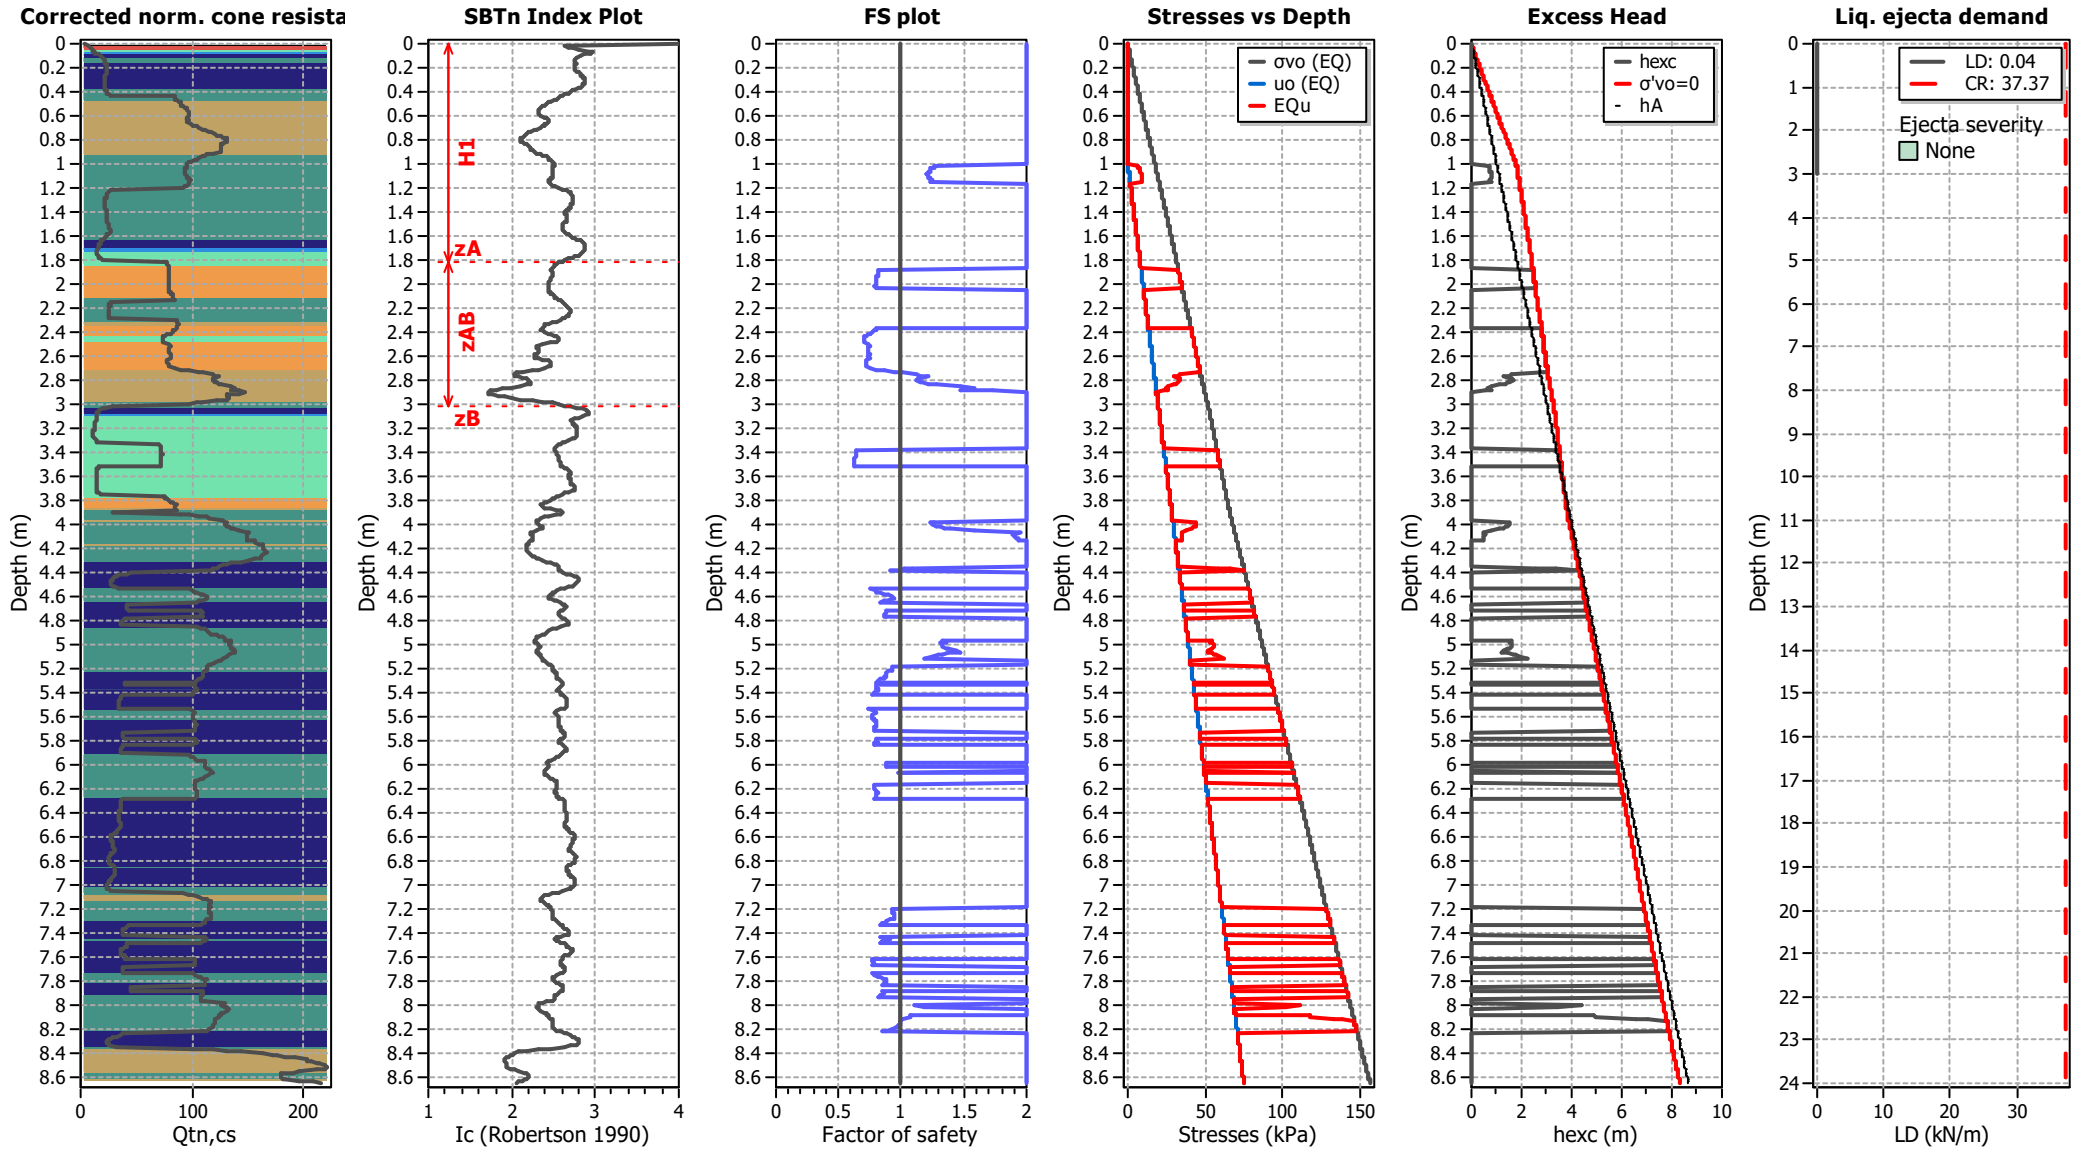

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT18

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

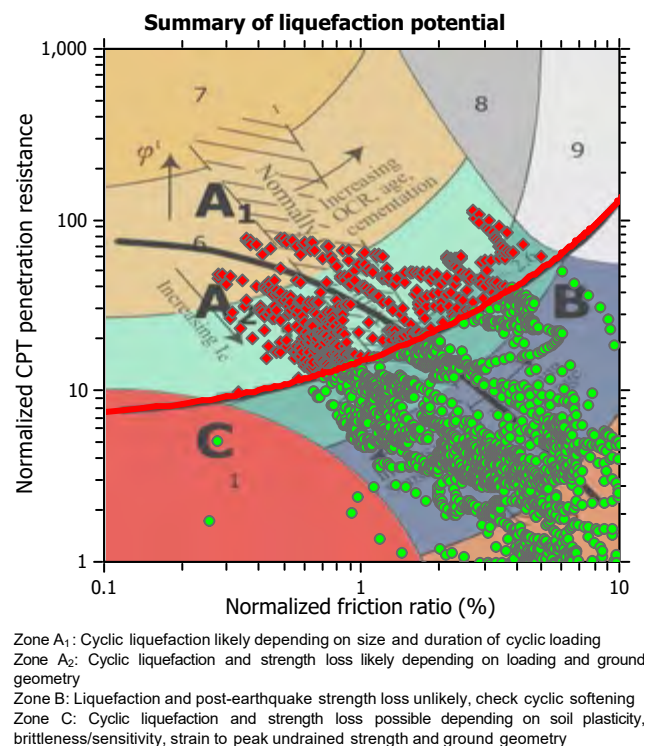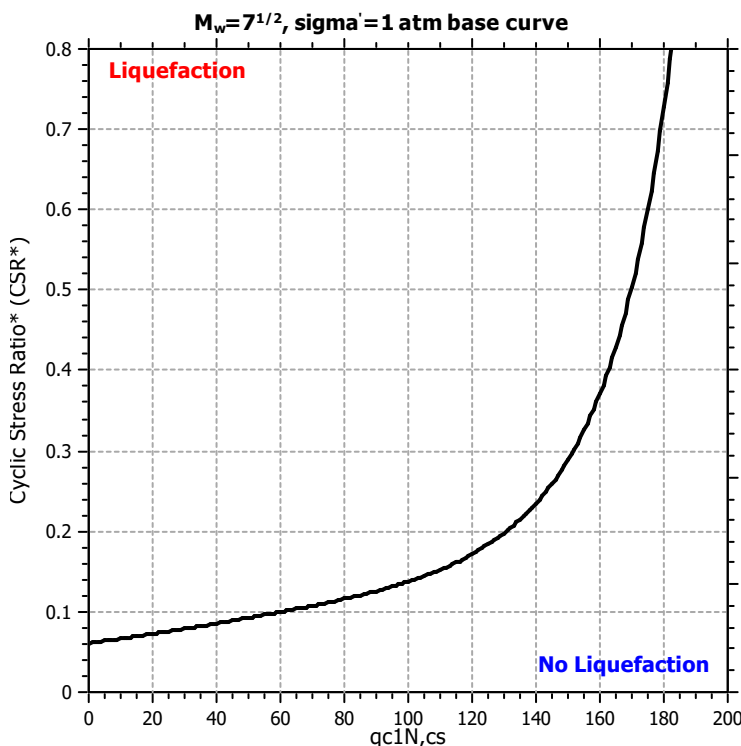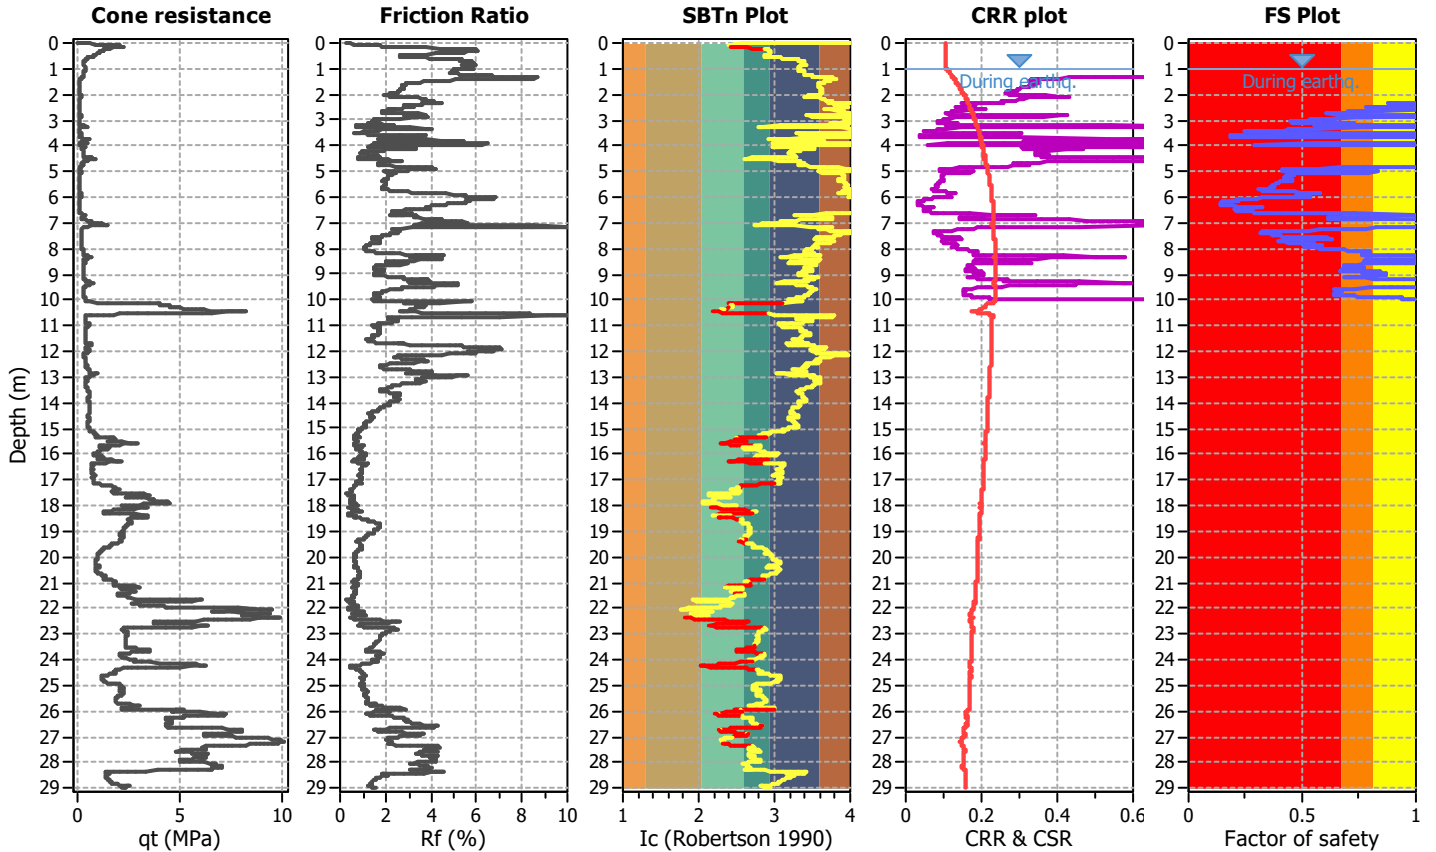

CPT basic interpretation plots

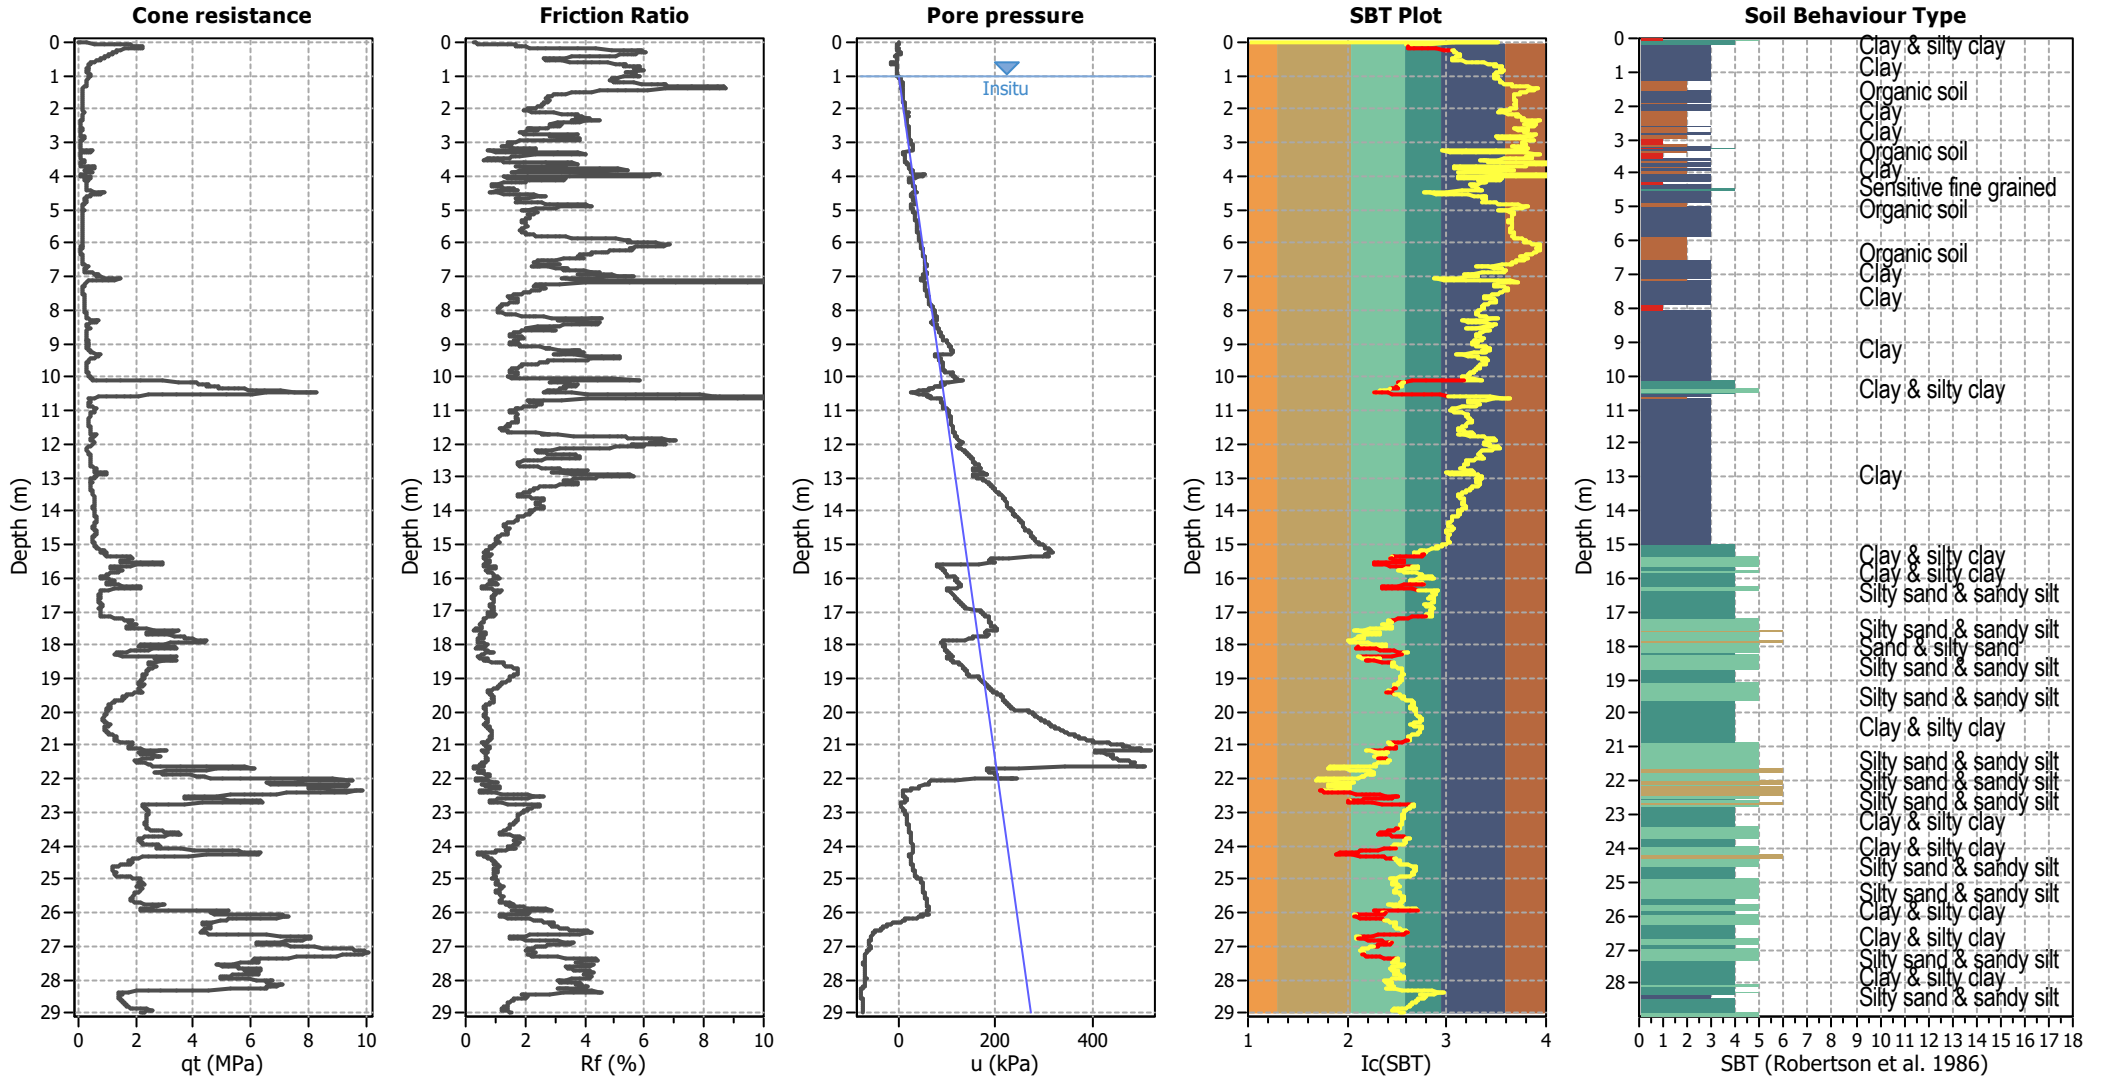


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

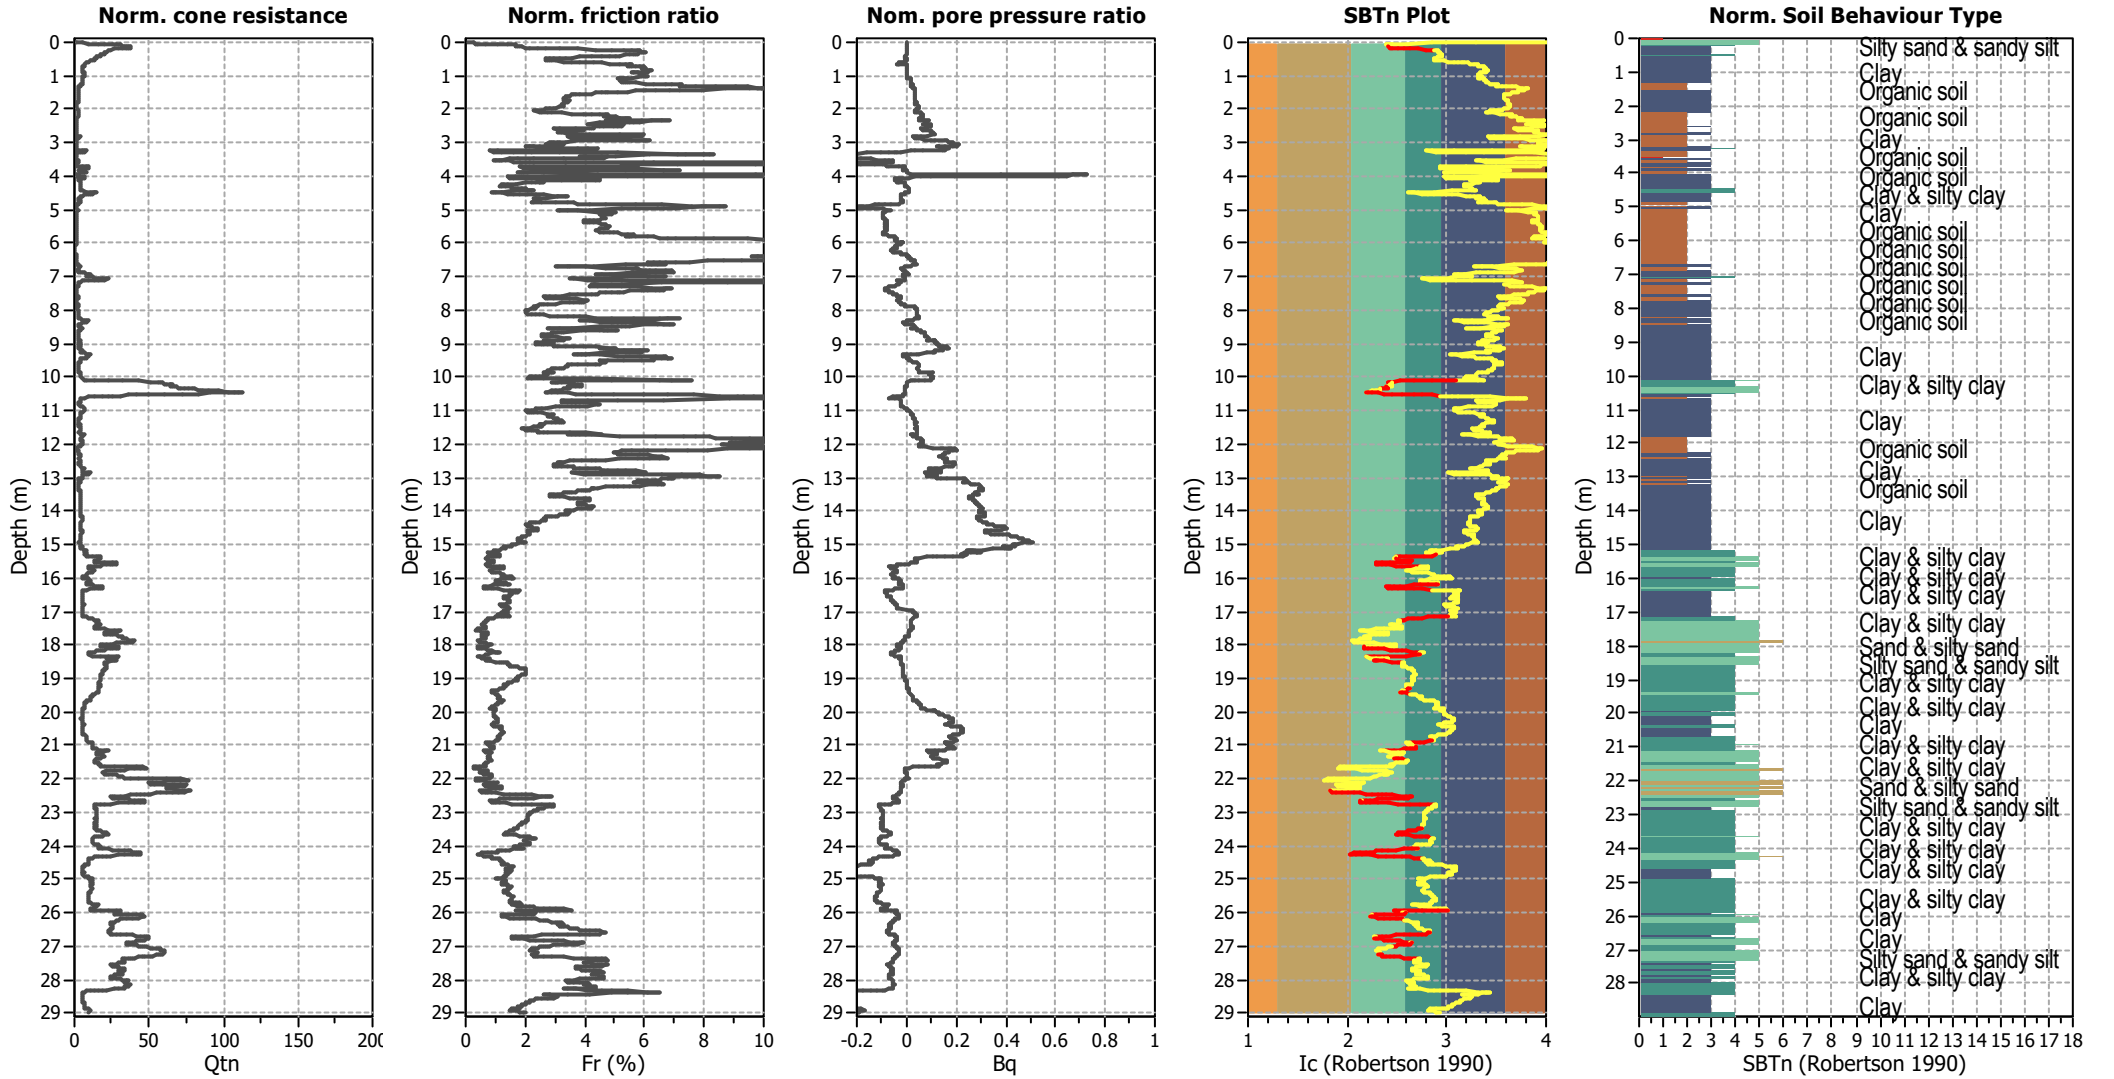


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

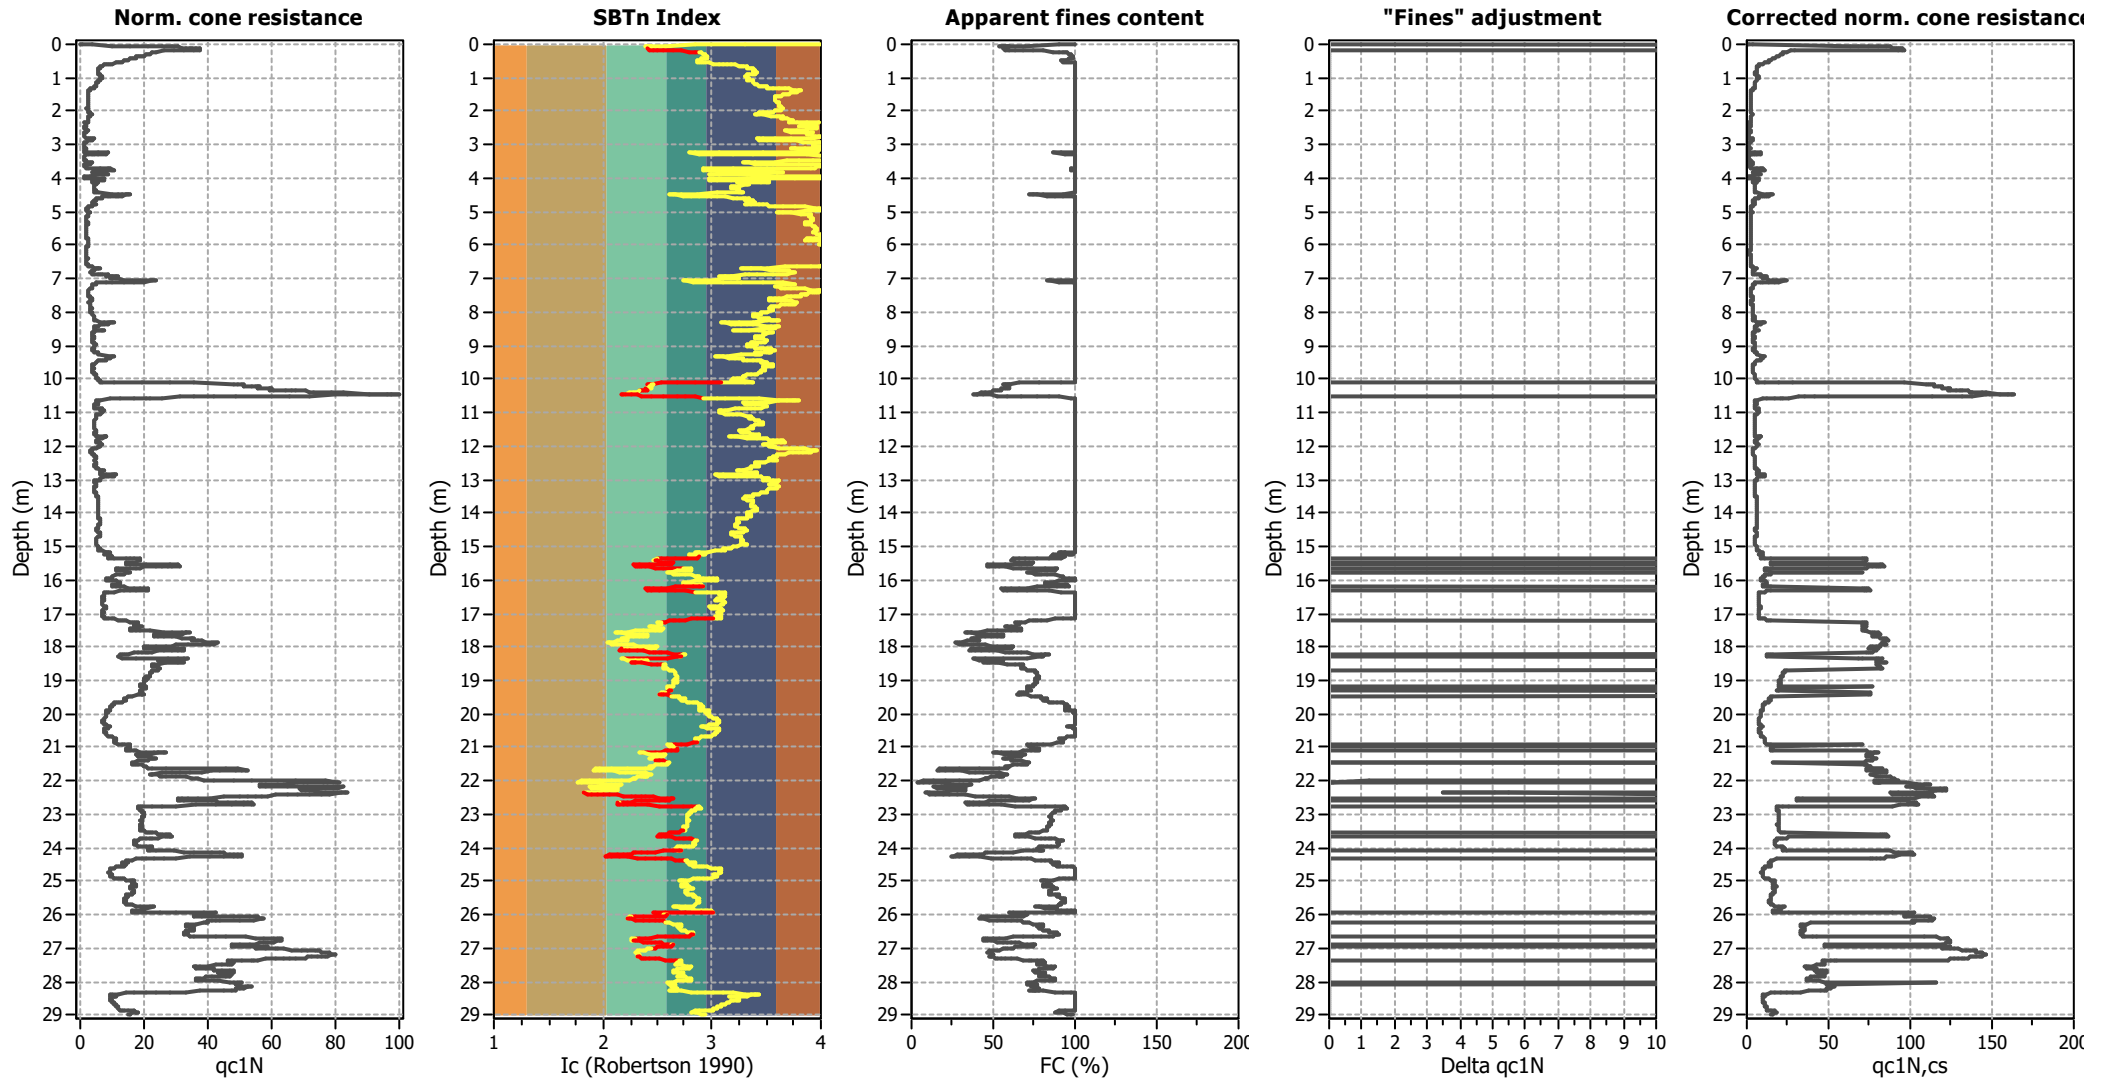

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

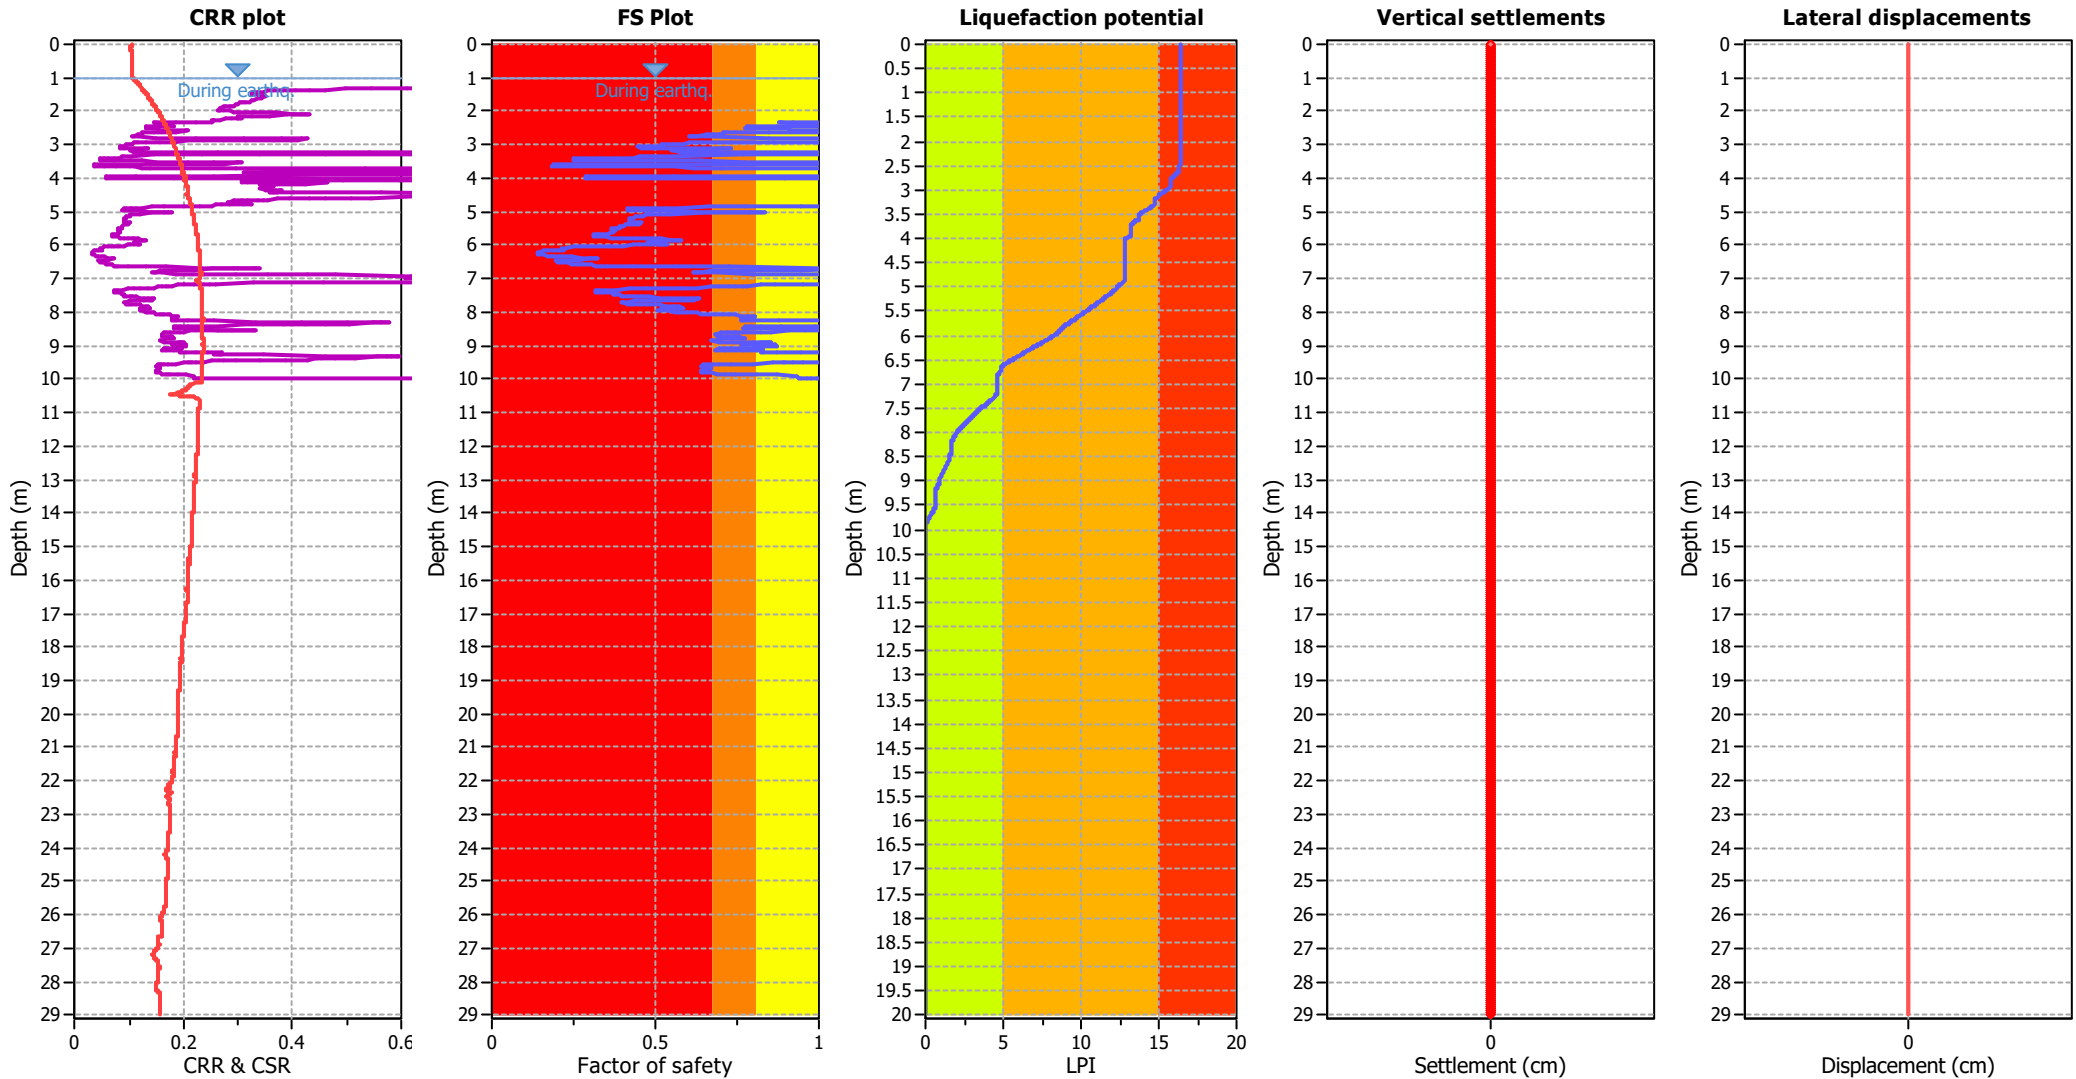

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

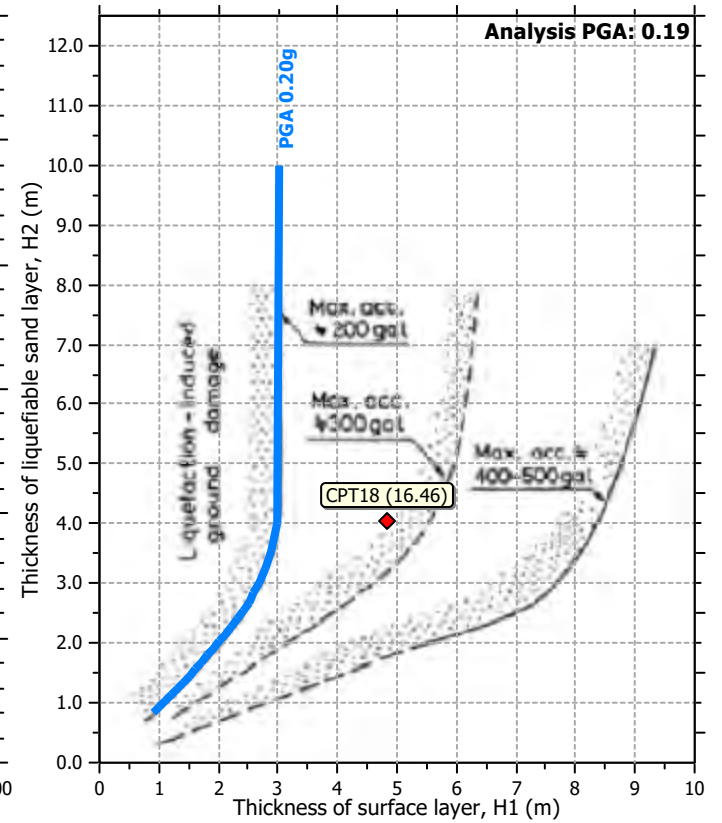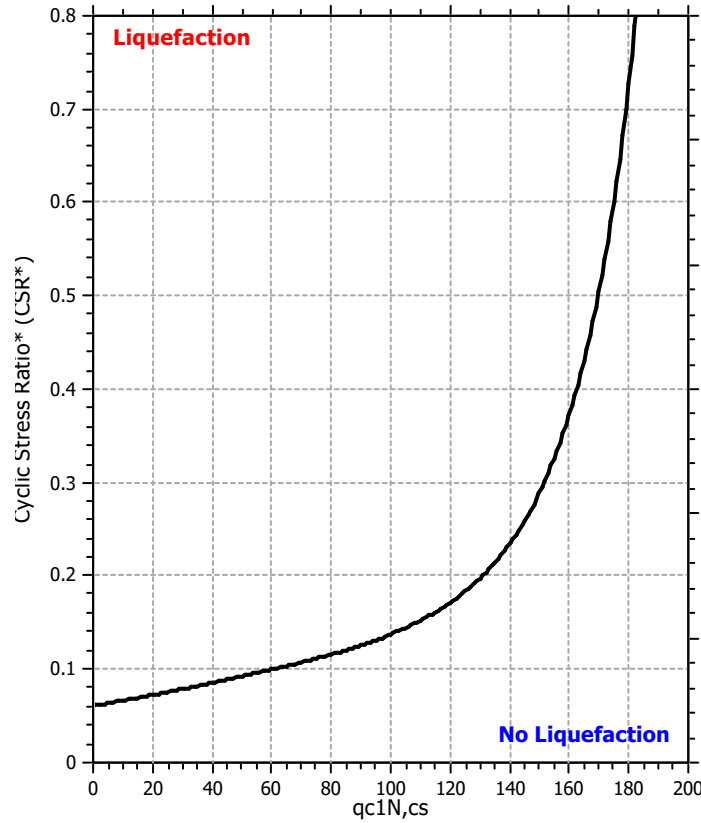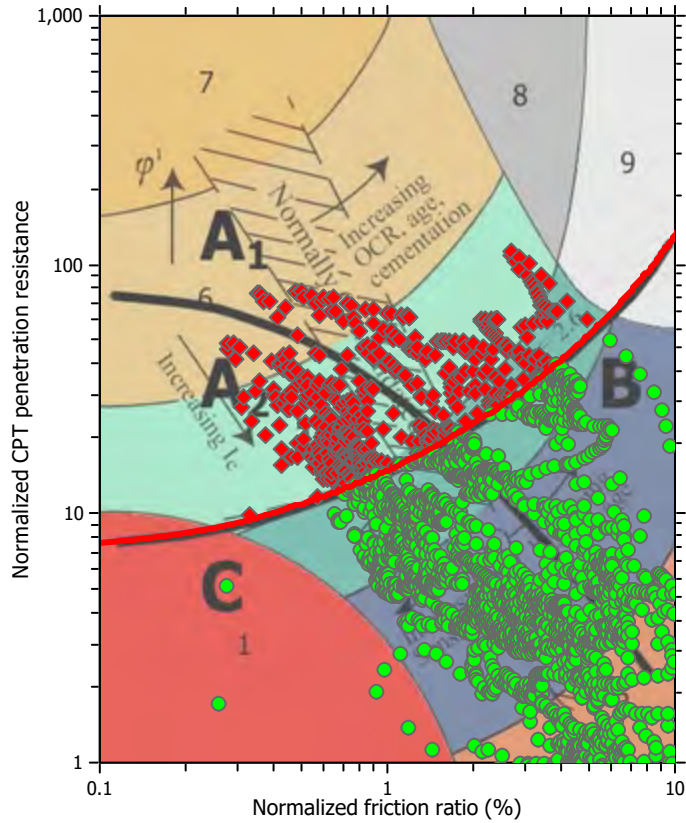

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

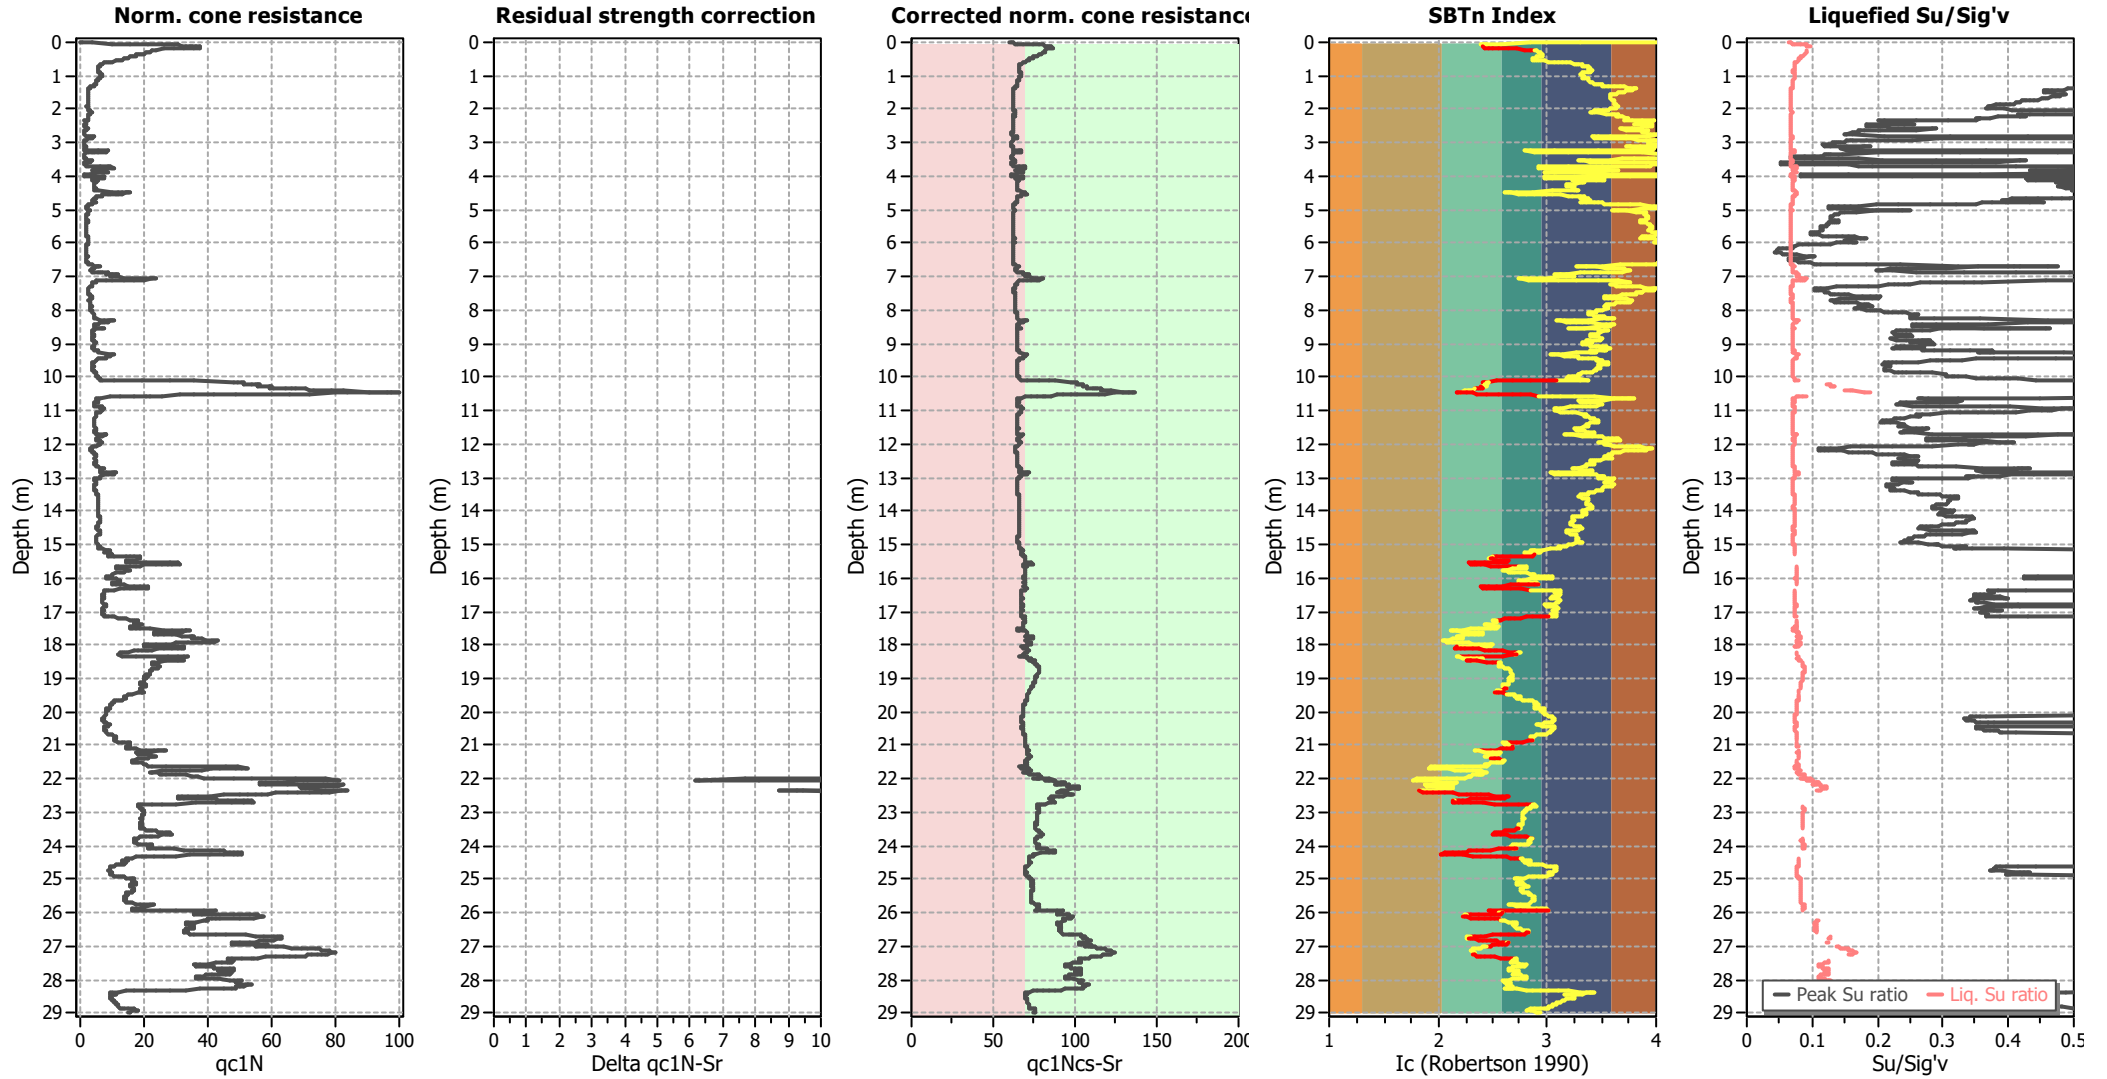

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

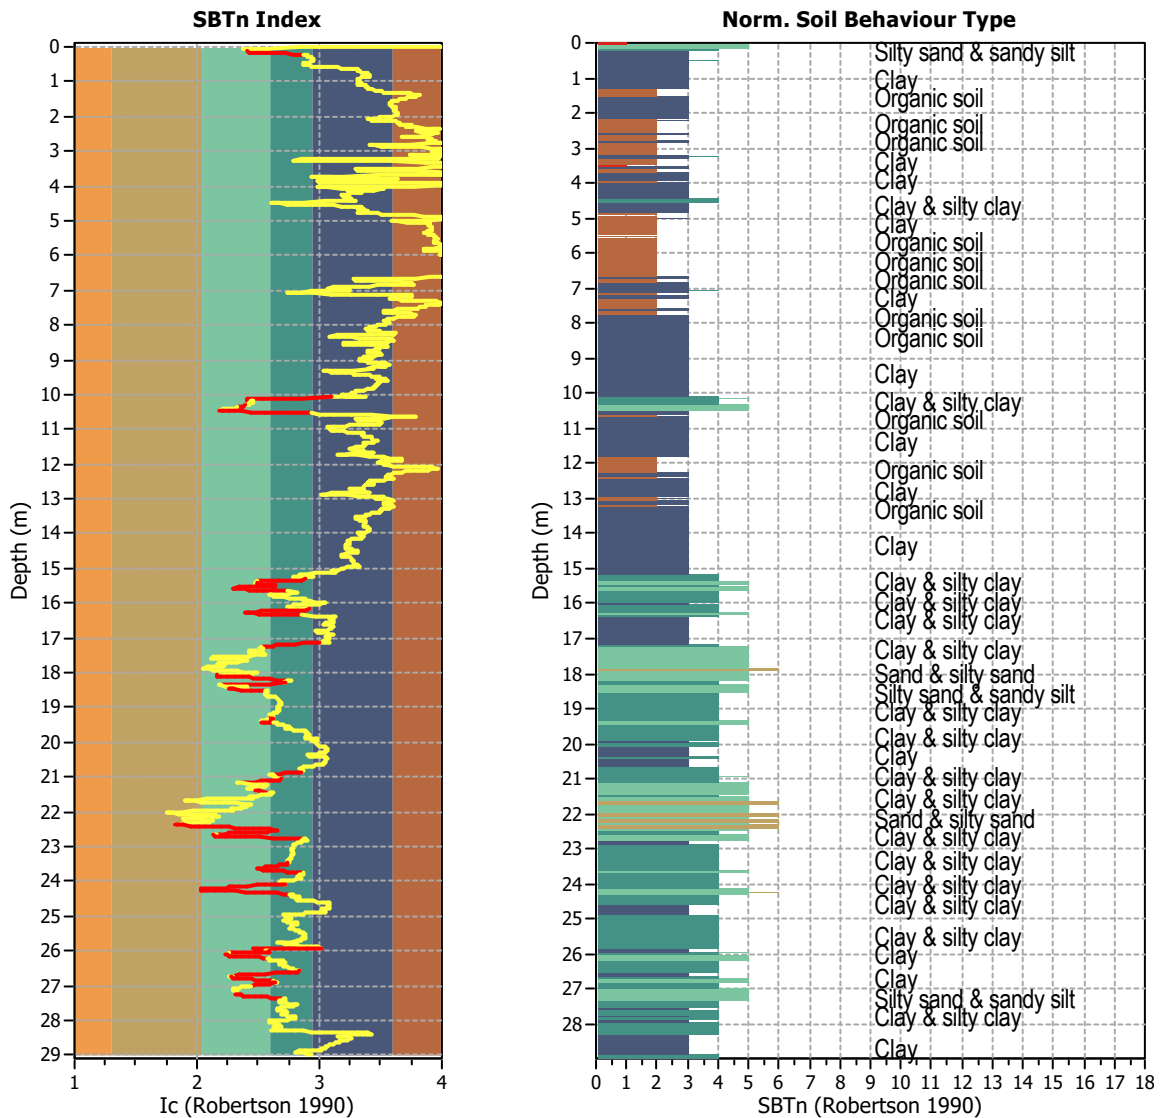


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2899
 Total points excluded: 351
 Exclusion percentage: 12.11%
 Number of layers detected: 35

Estimation of post-earthquake settlements

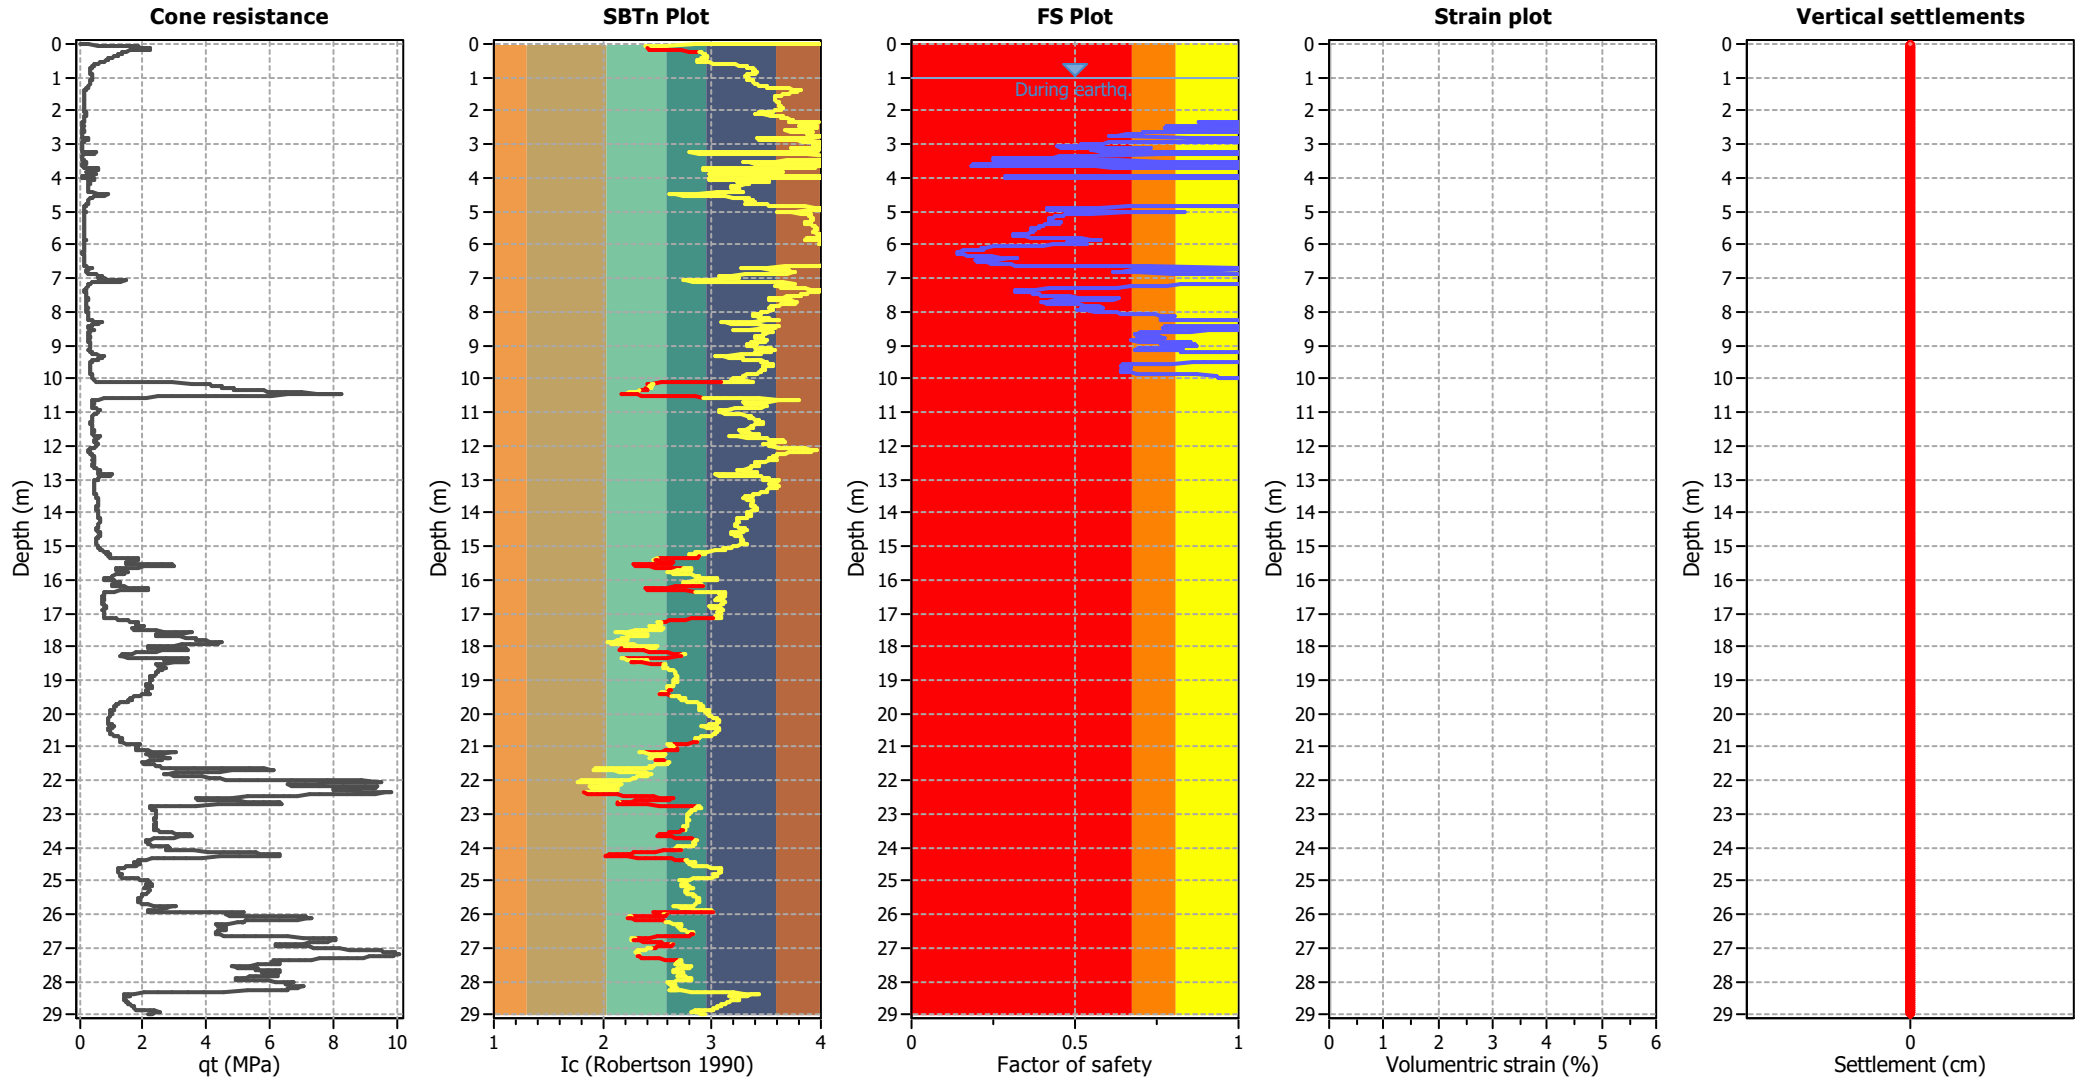


Abbreviations


- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation


Corrected norm. cone resista

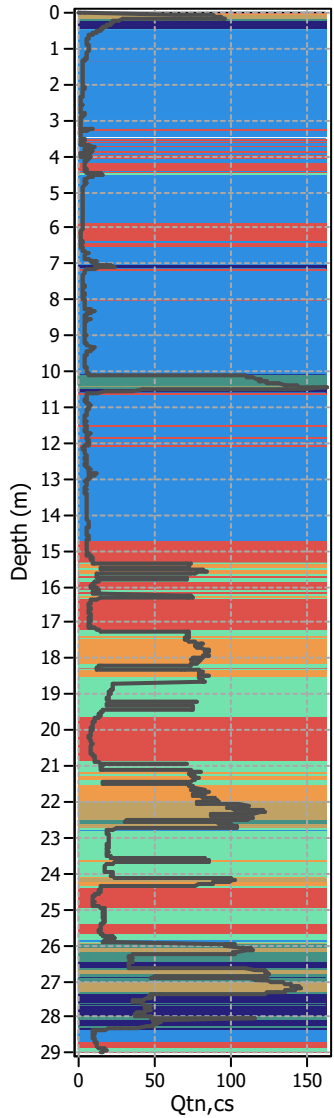


SBTn Index Plot

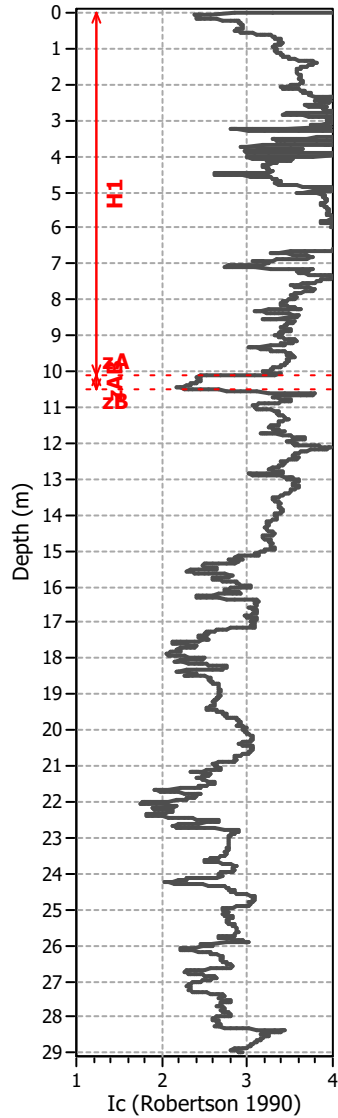


FS plot

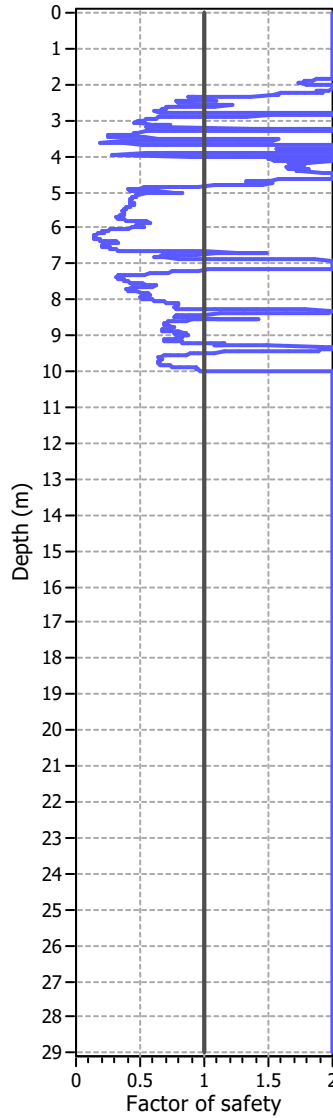


Stresses vs Depth

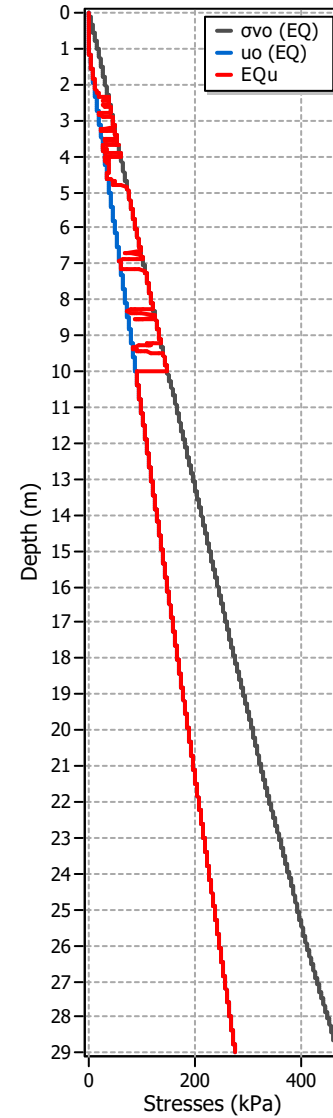

Excess Head

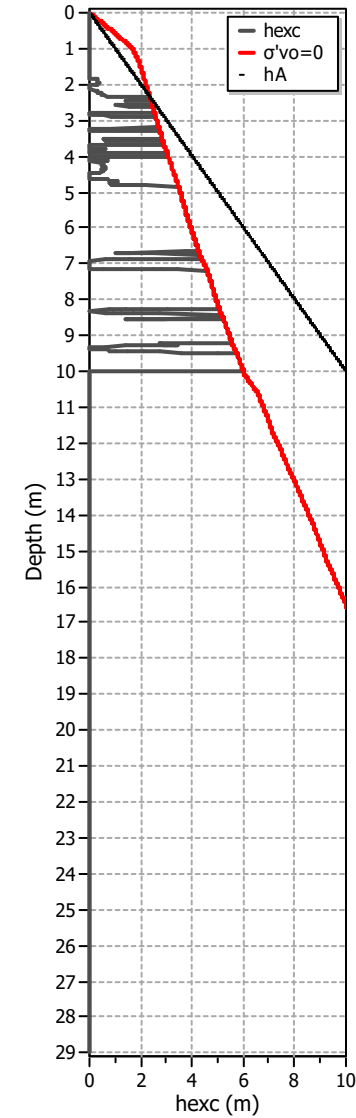

Liq. ejecta demand

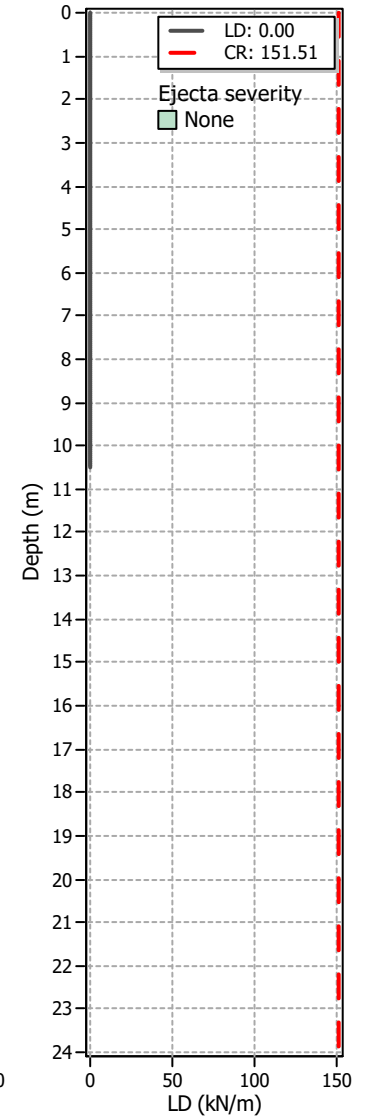

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT19A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

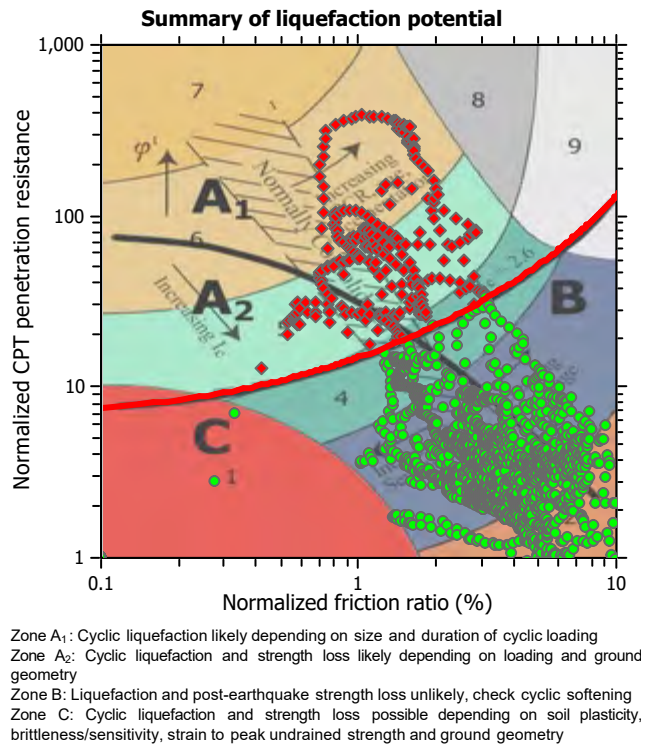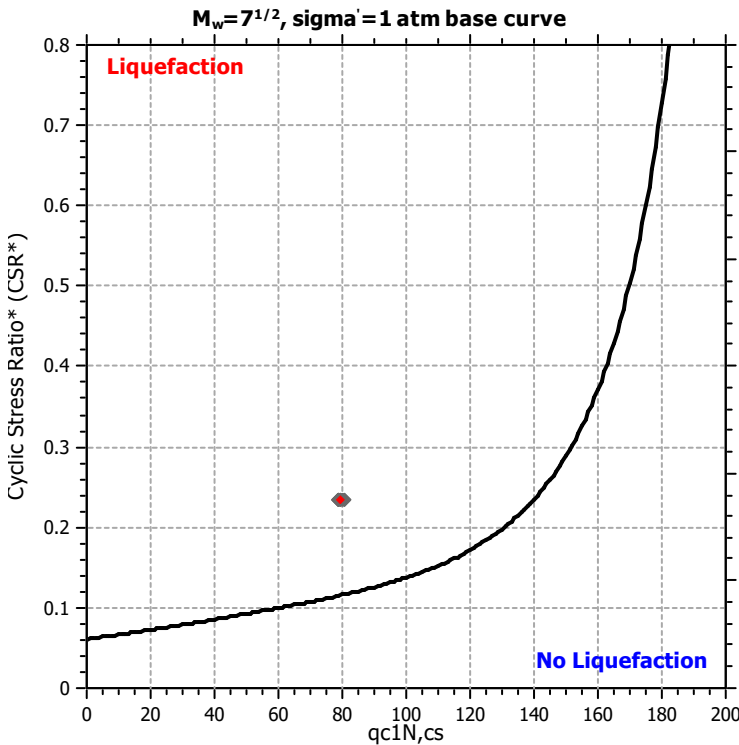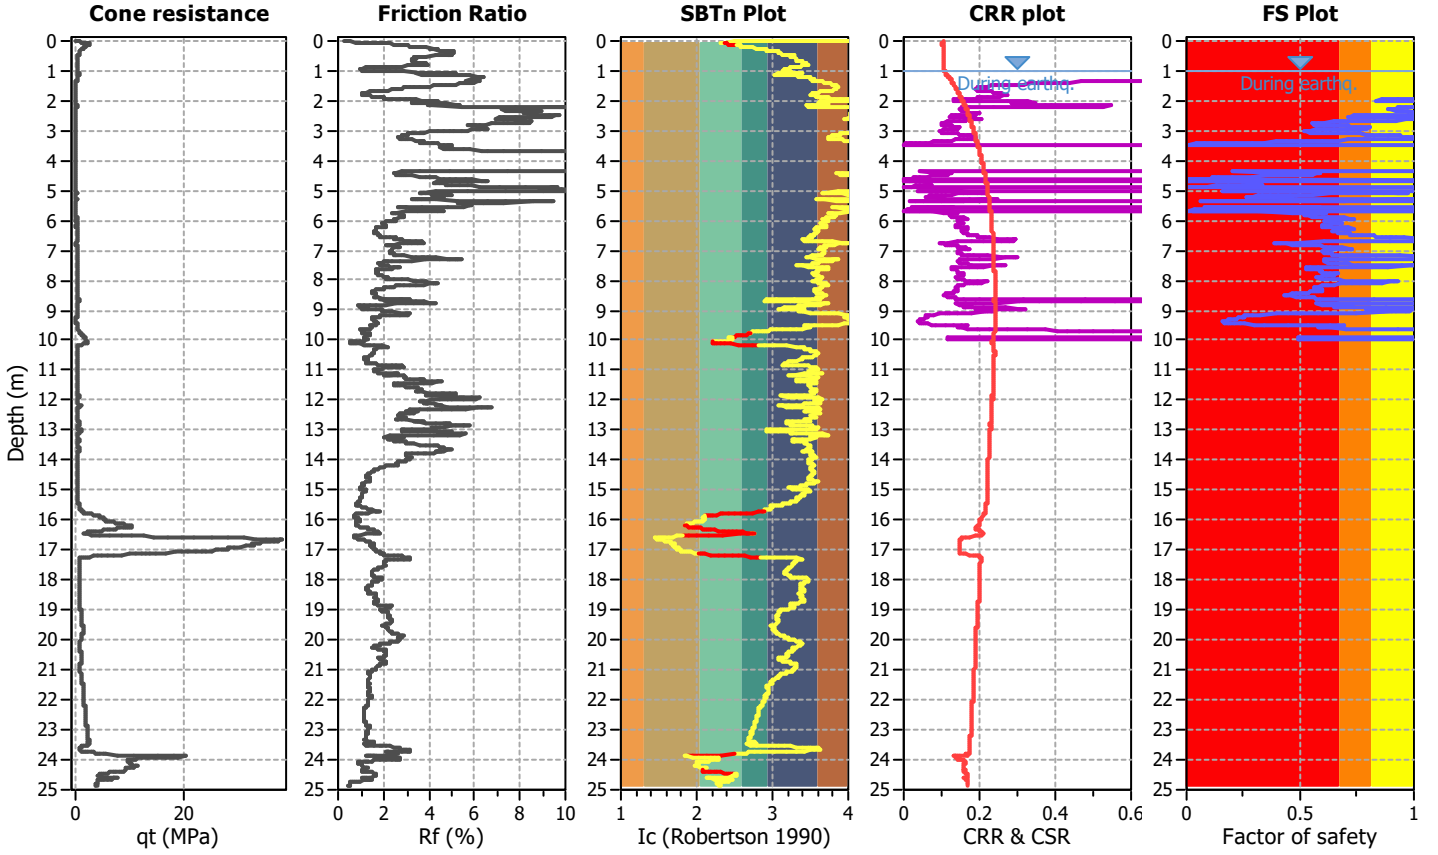

CPT basic interpretation plots

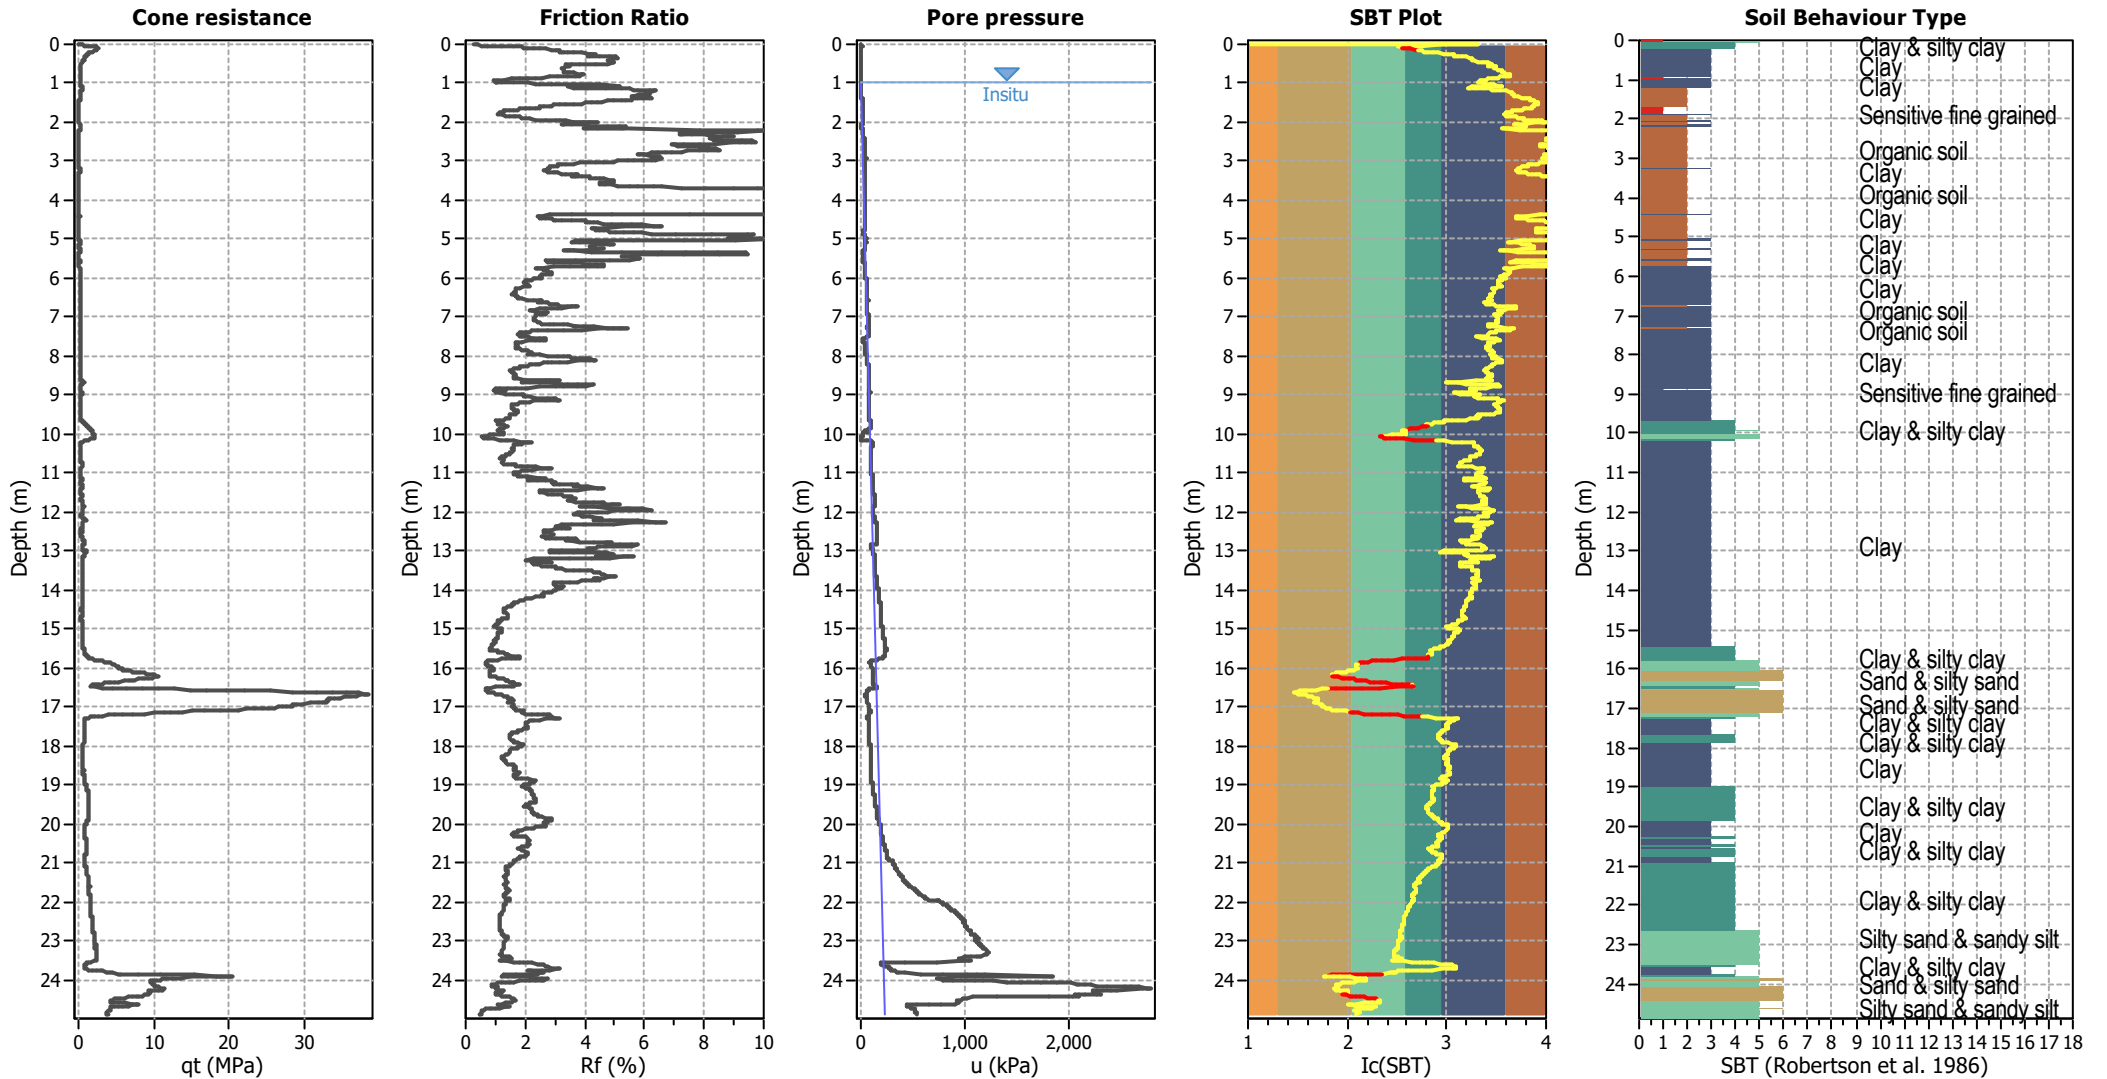


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

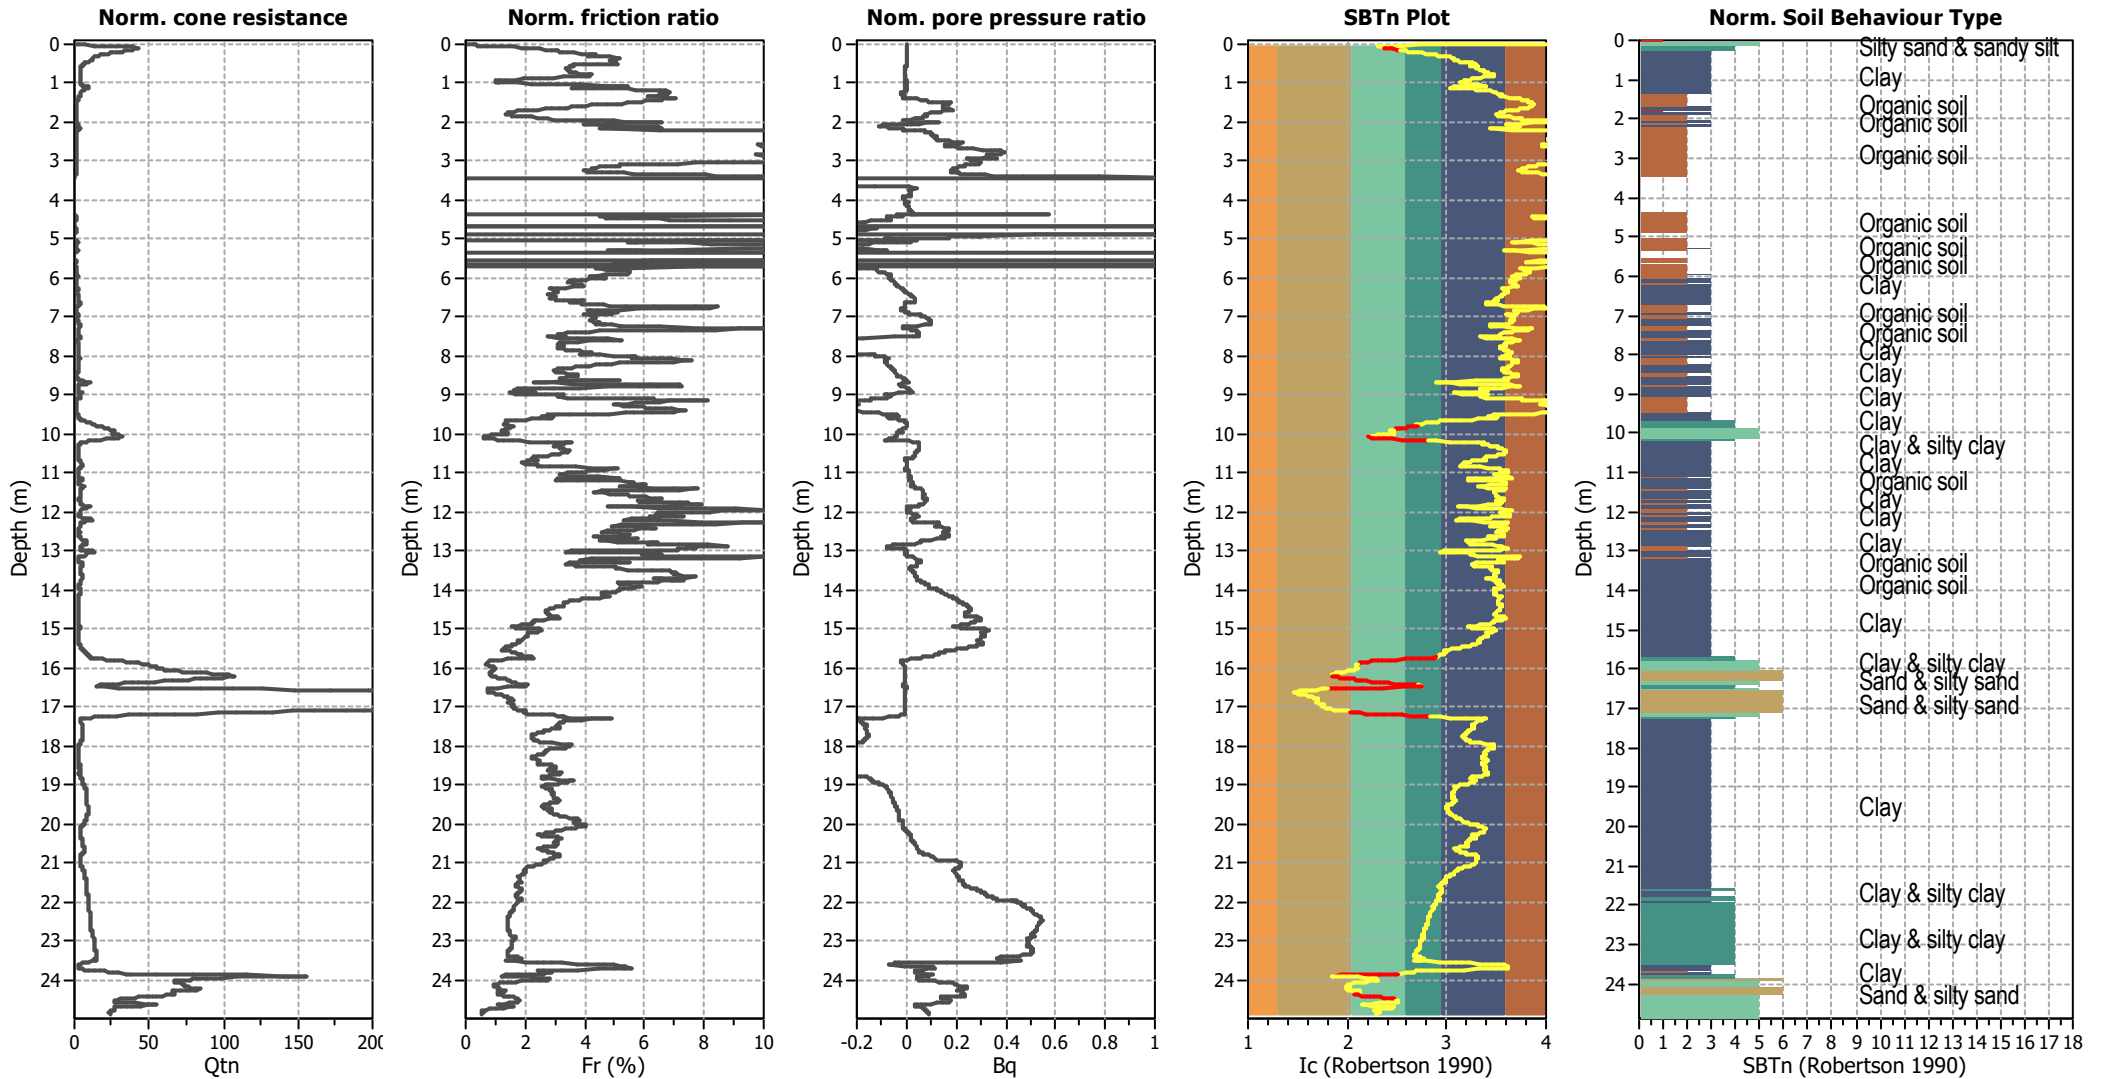


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

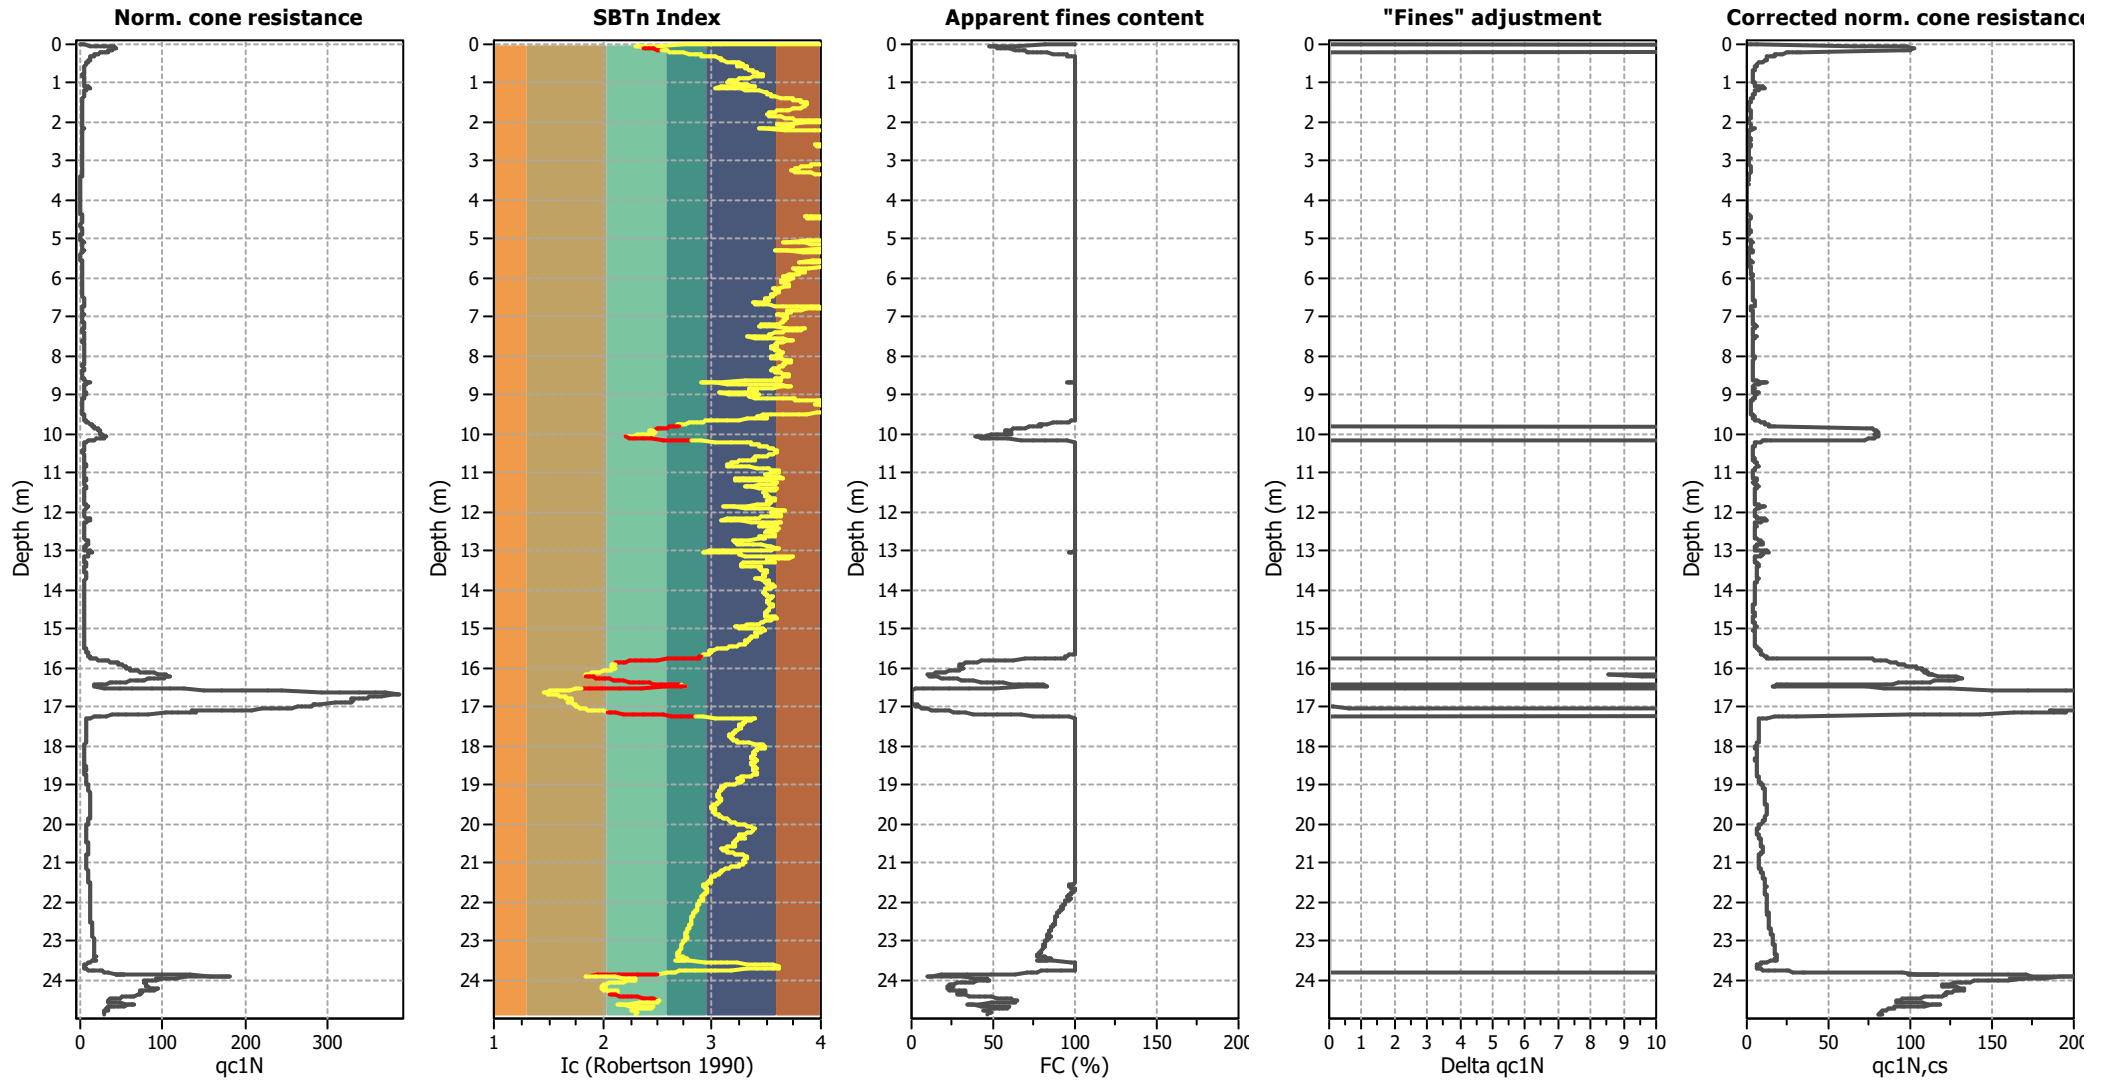

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

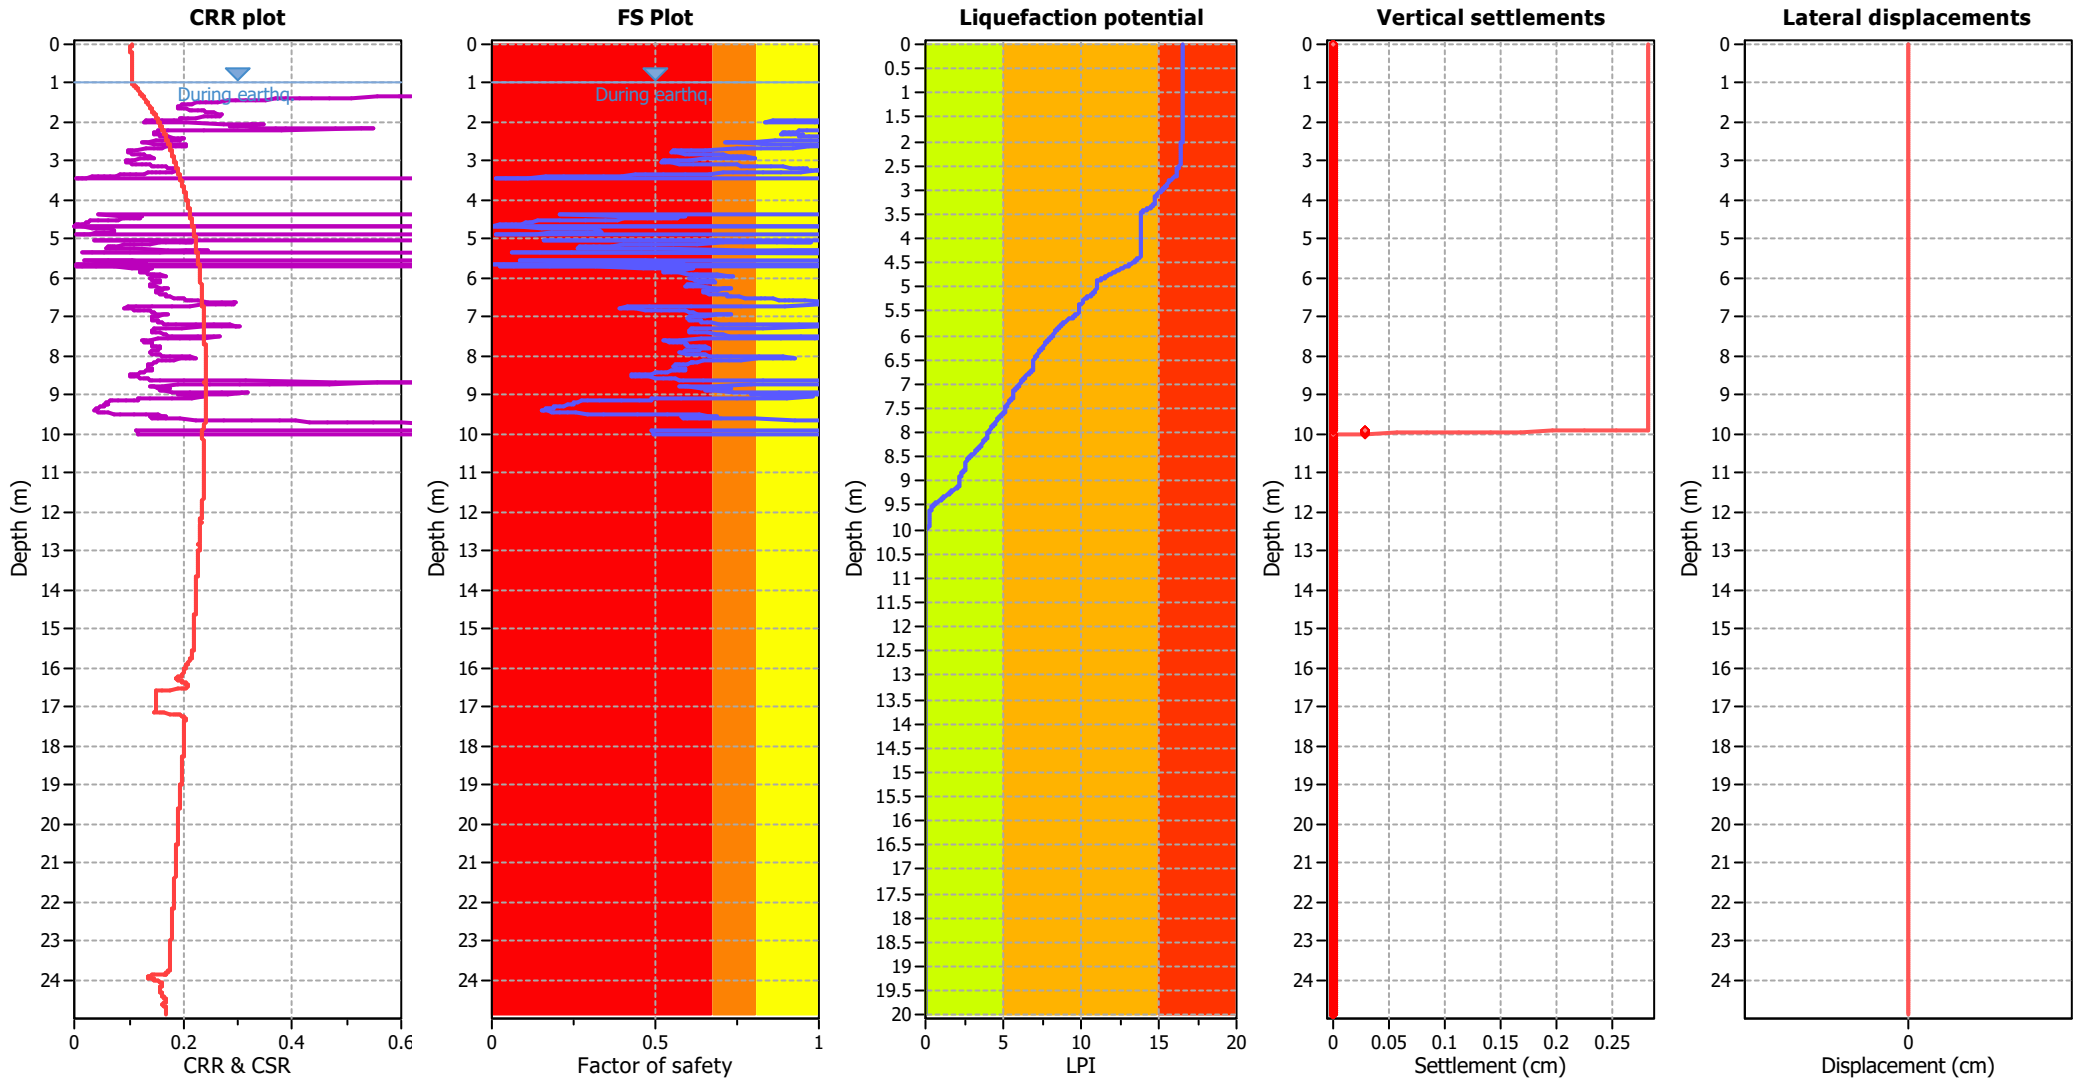

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

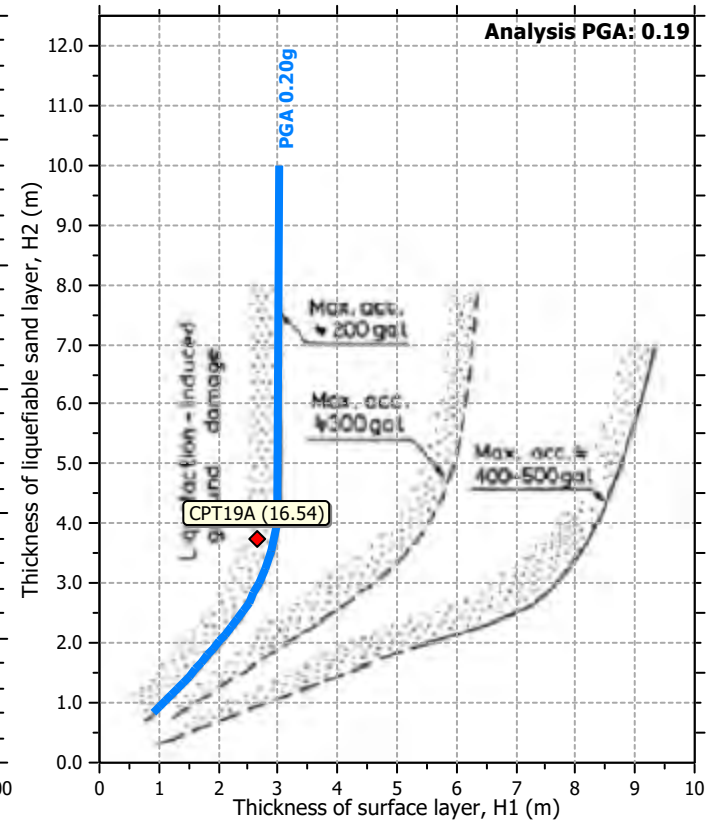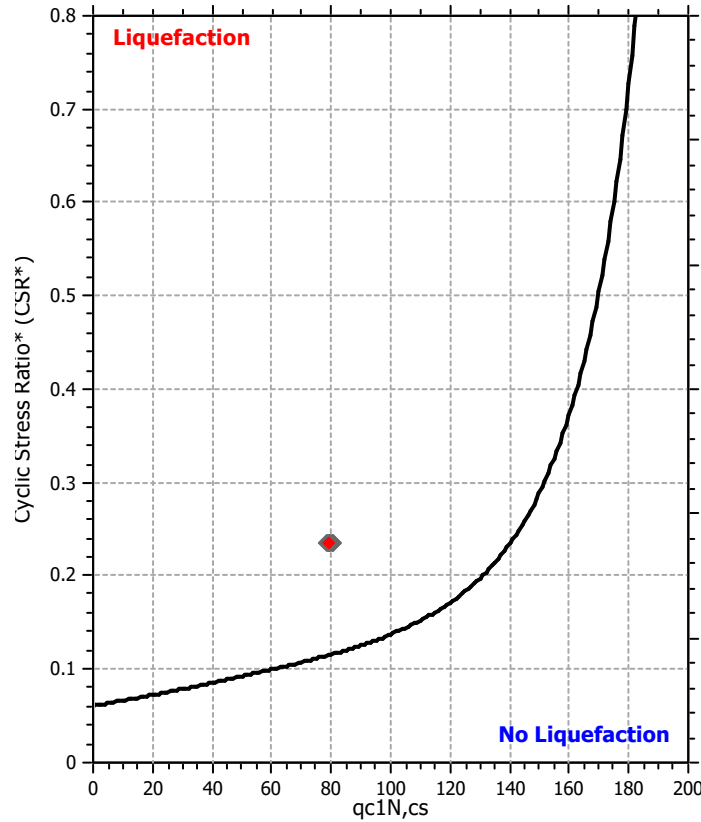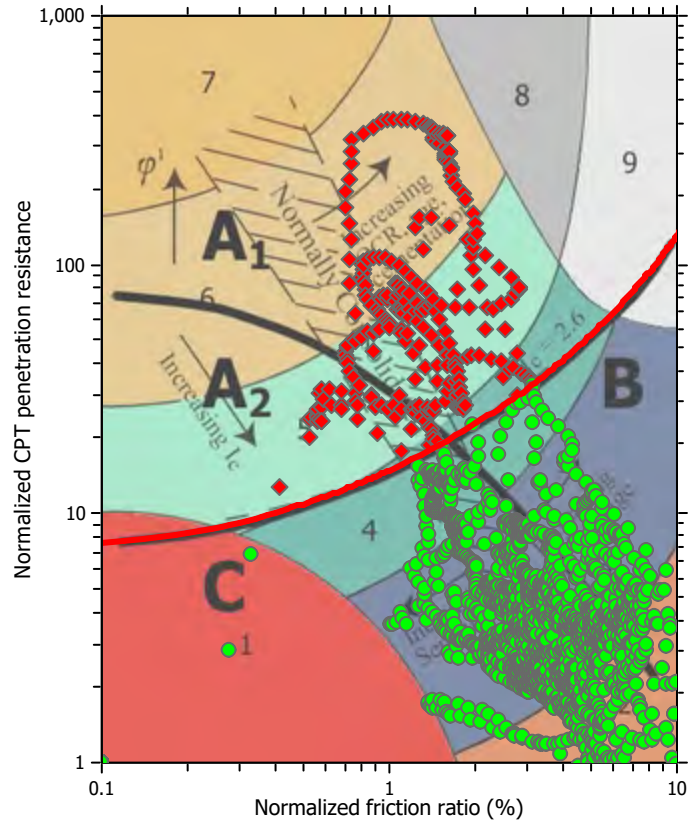

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

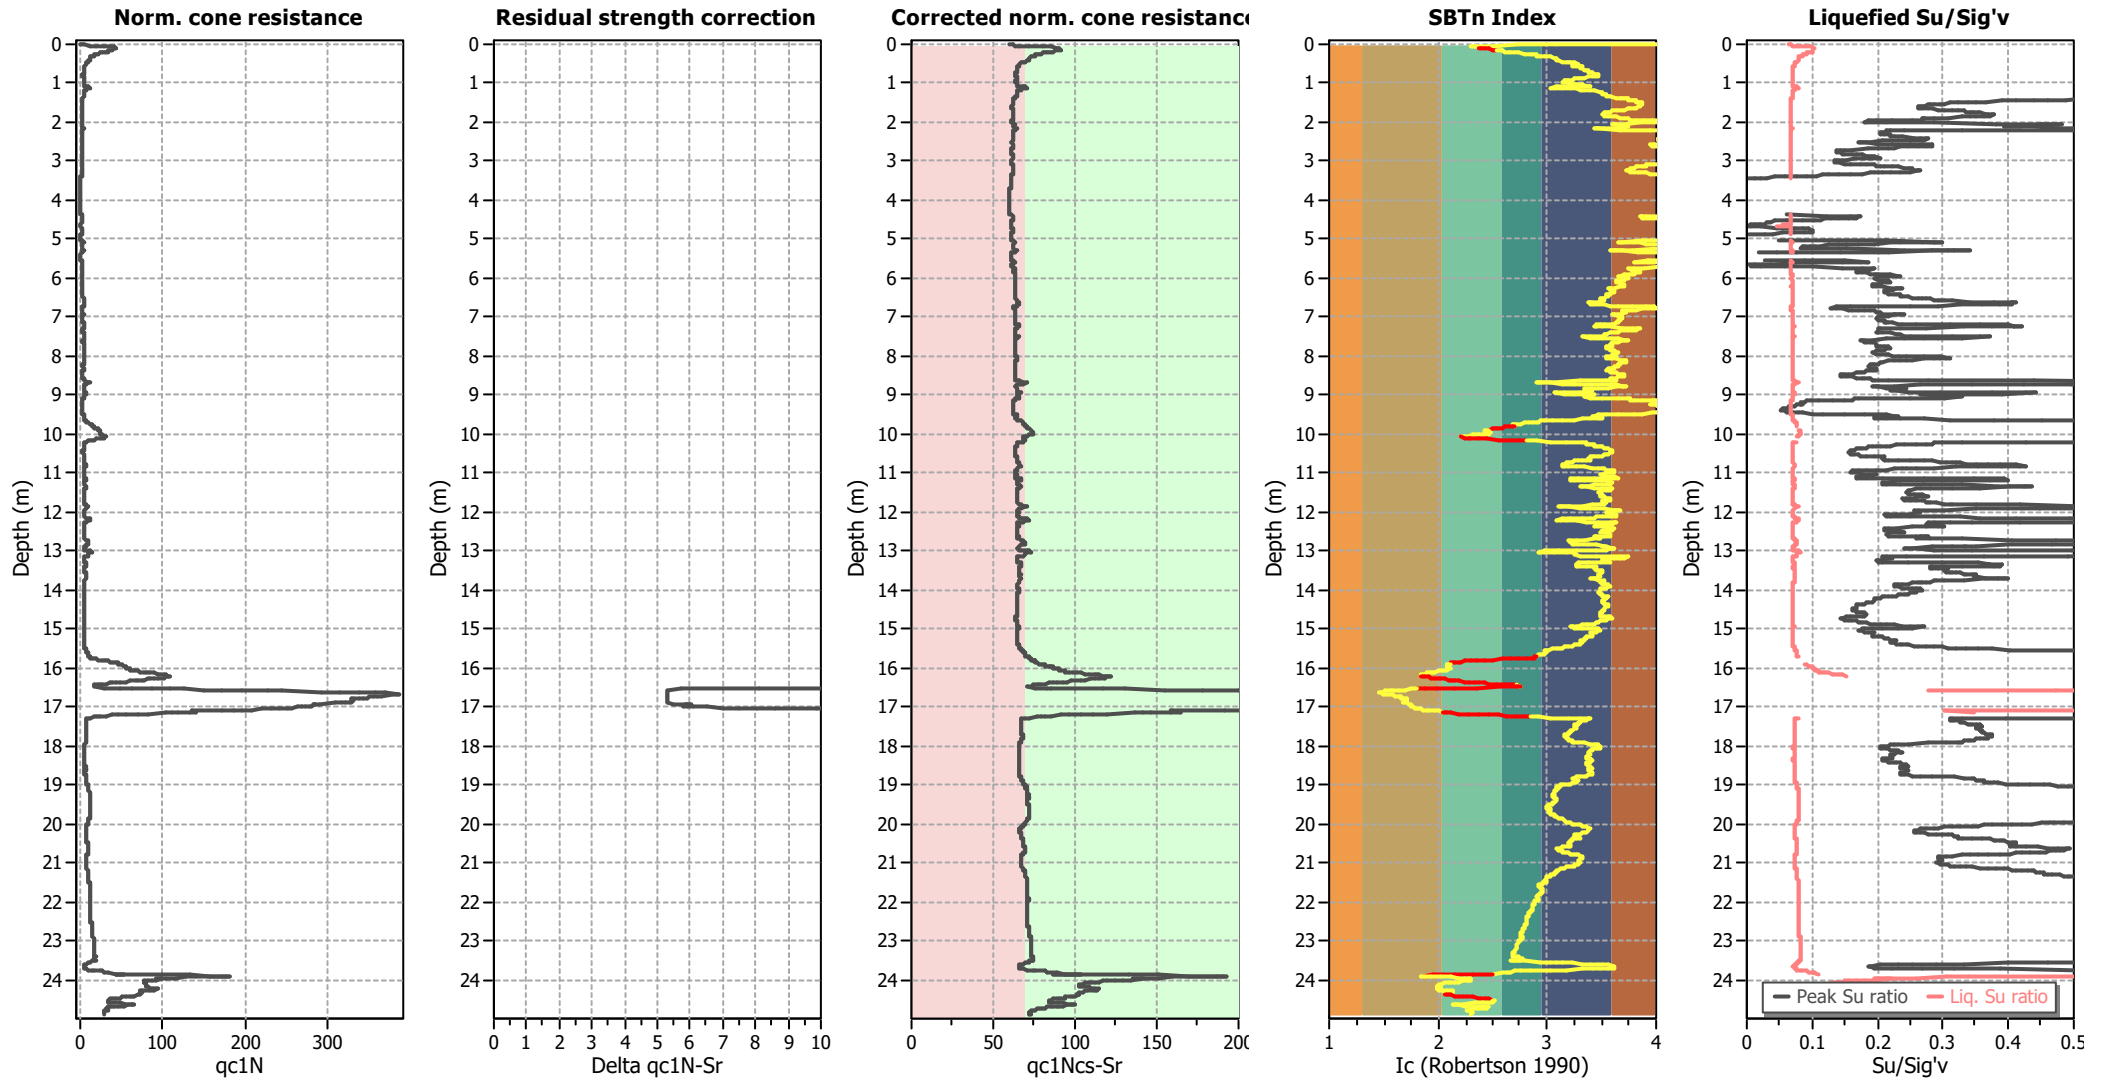

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

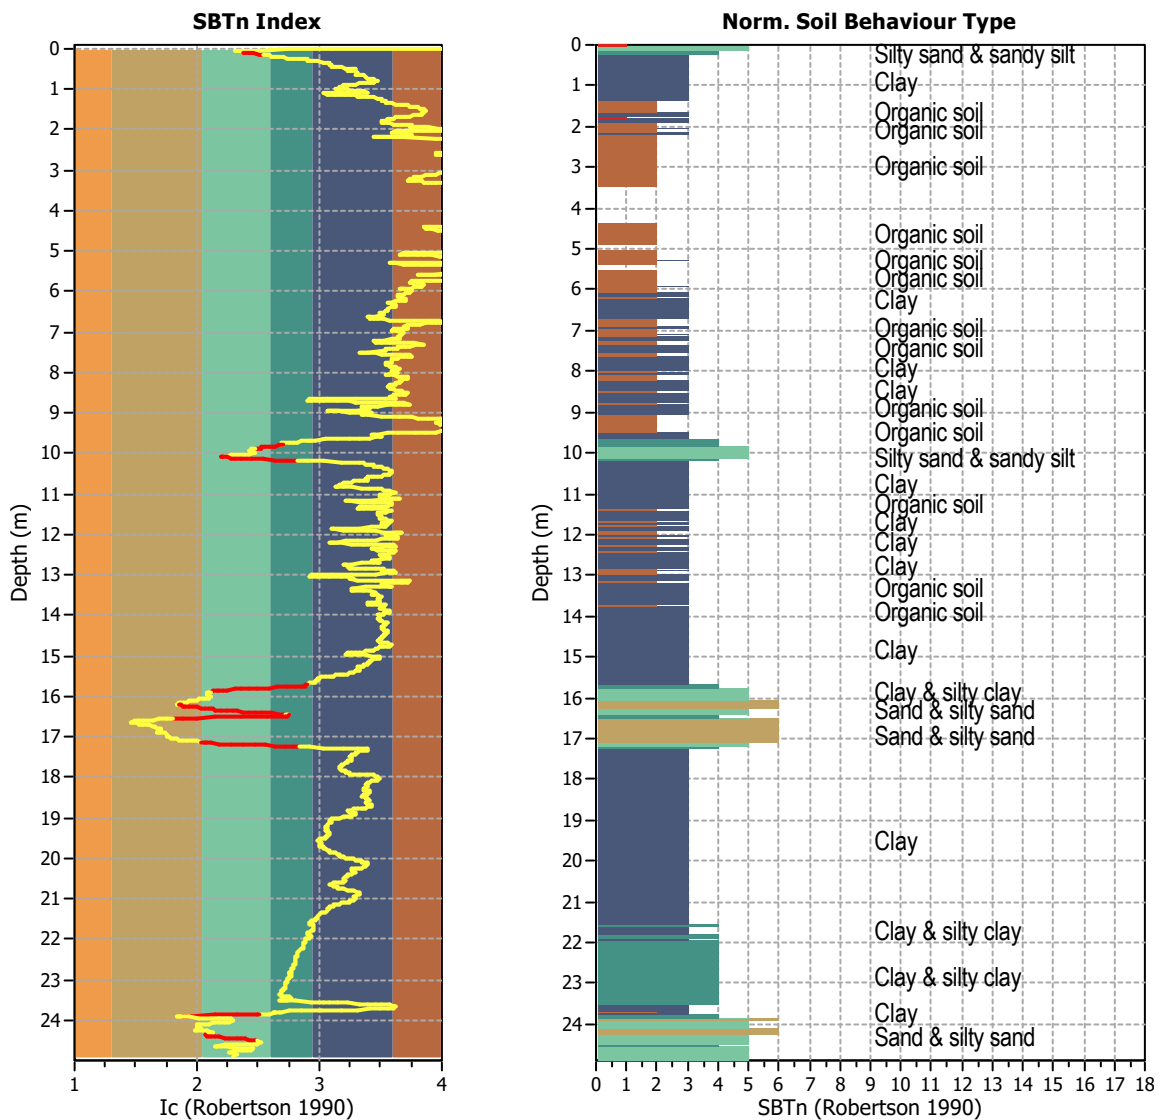


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 2490
 Total points excluded: 118
 Exclusion percentage: 4.74%
 Number of layers detected: 9


Estimation of post-earthquake settlements

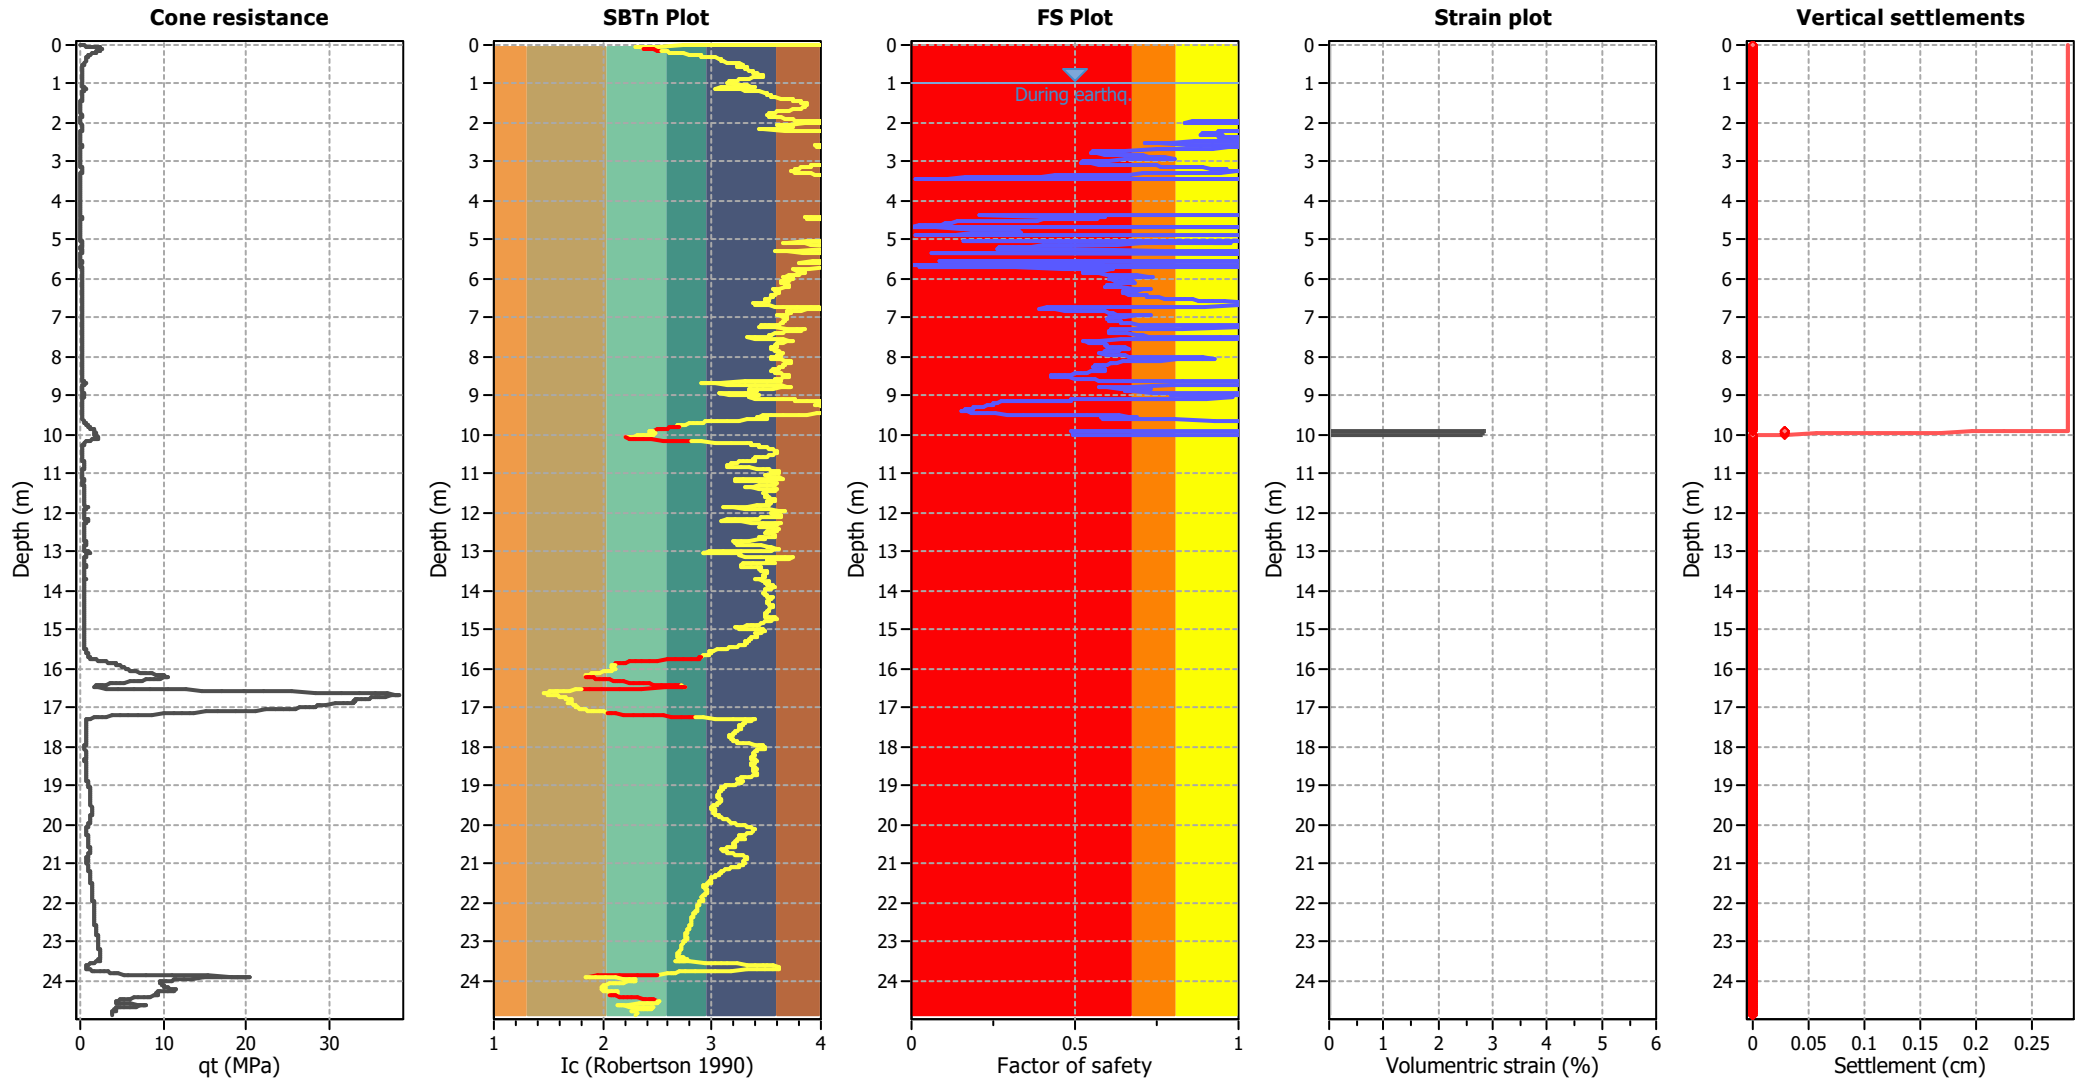

Abbreviations

- q_c : Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c : Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

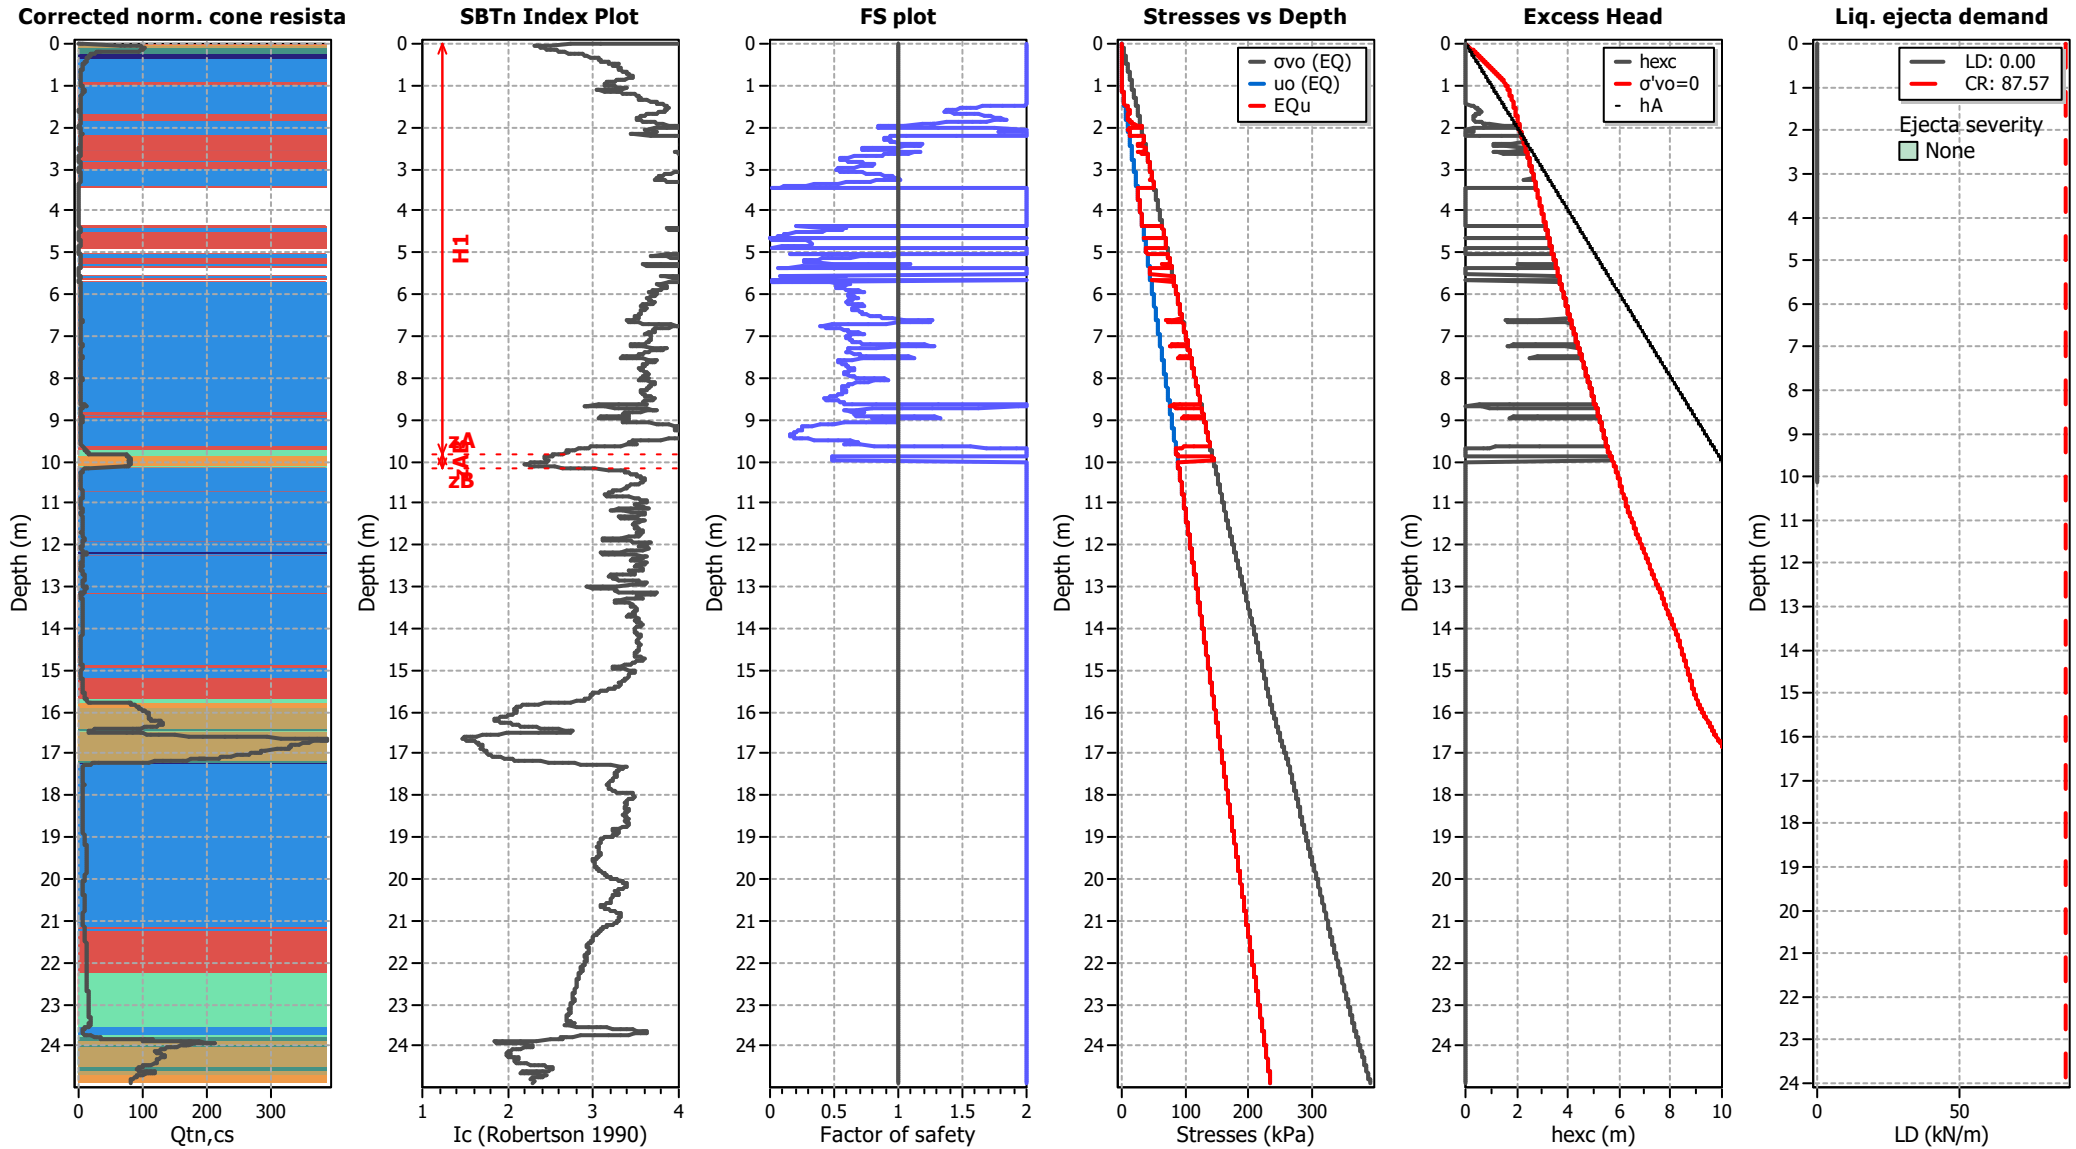

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT20

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

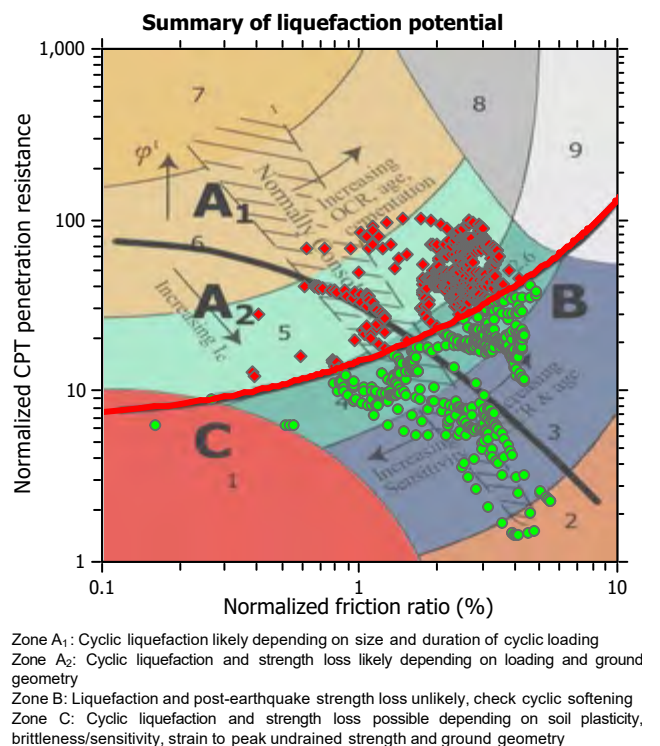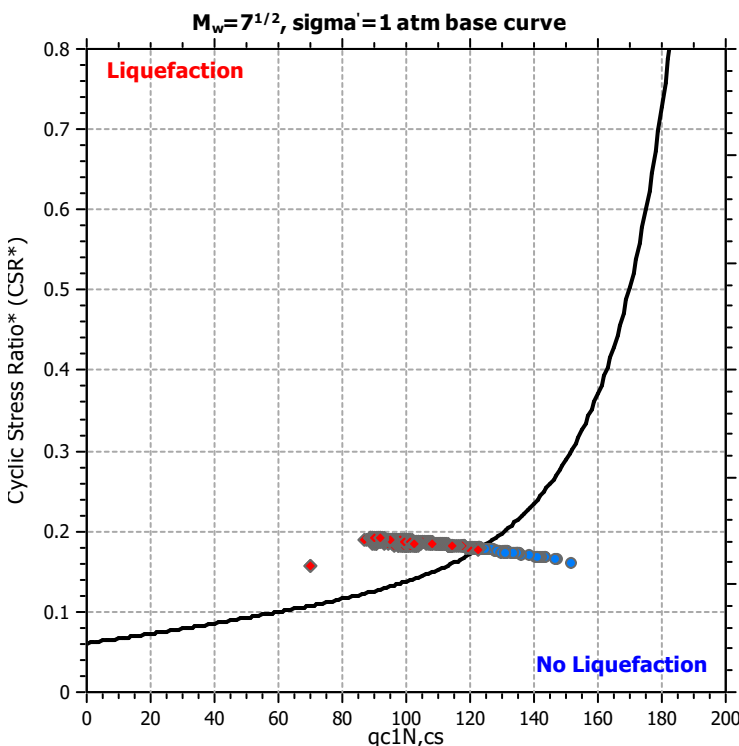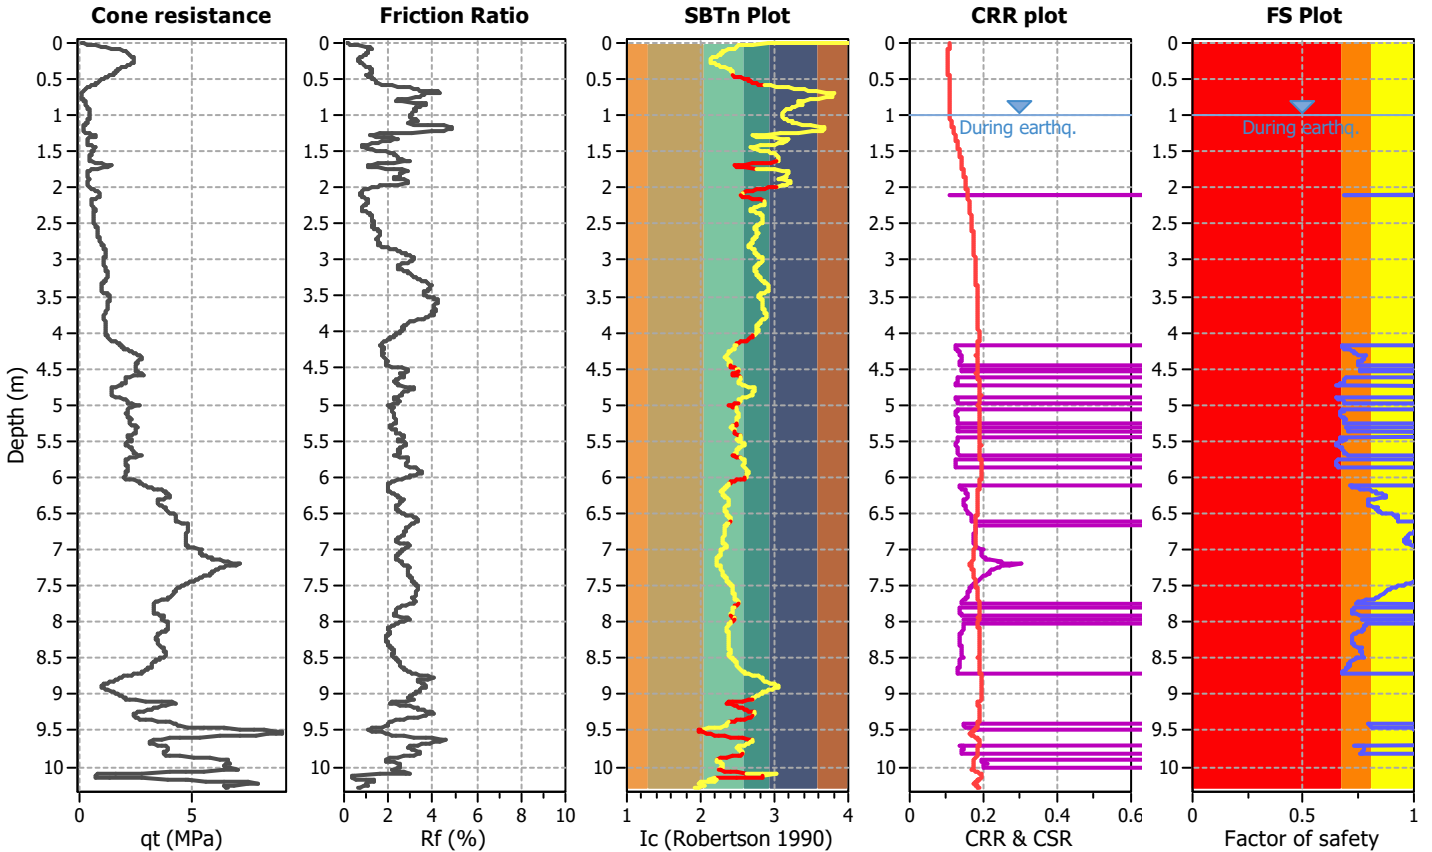

CPT basic interpretation plots

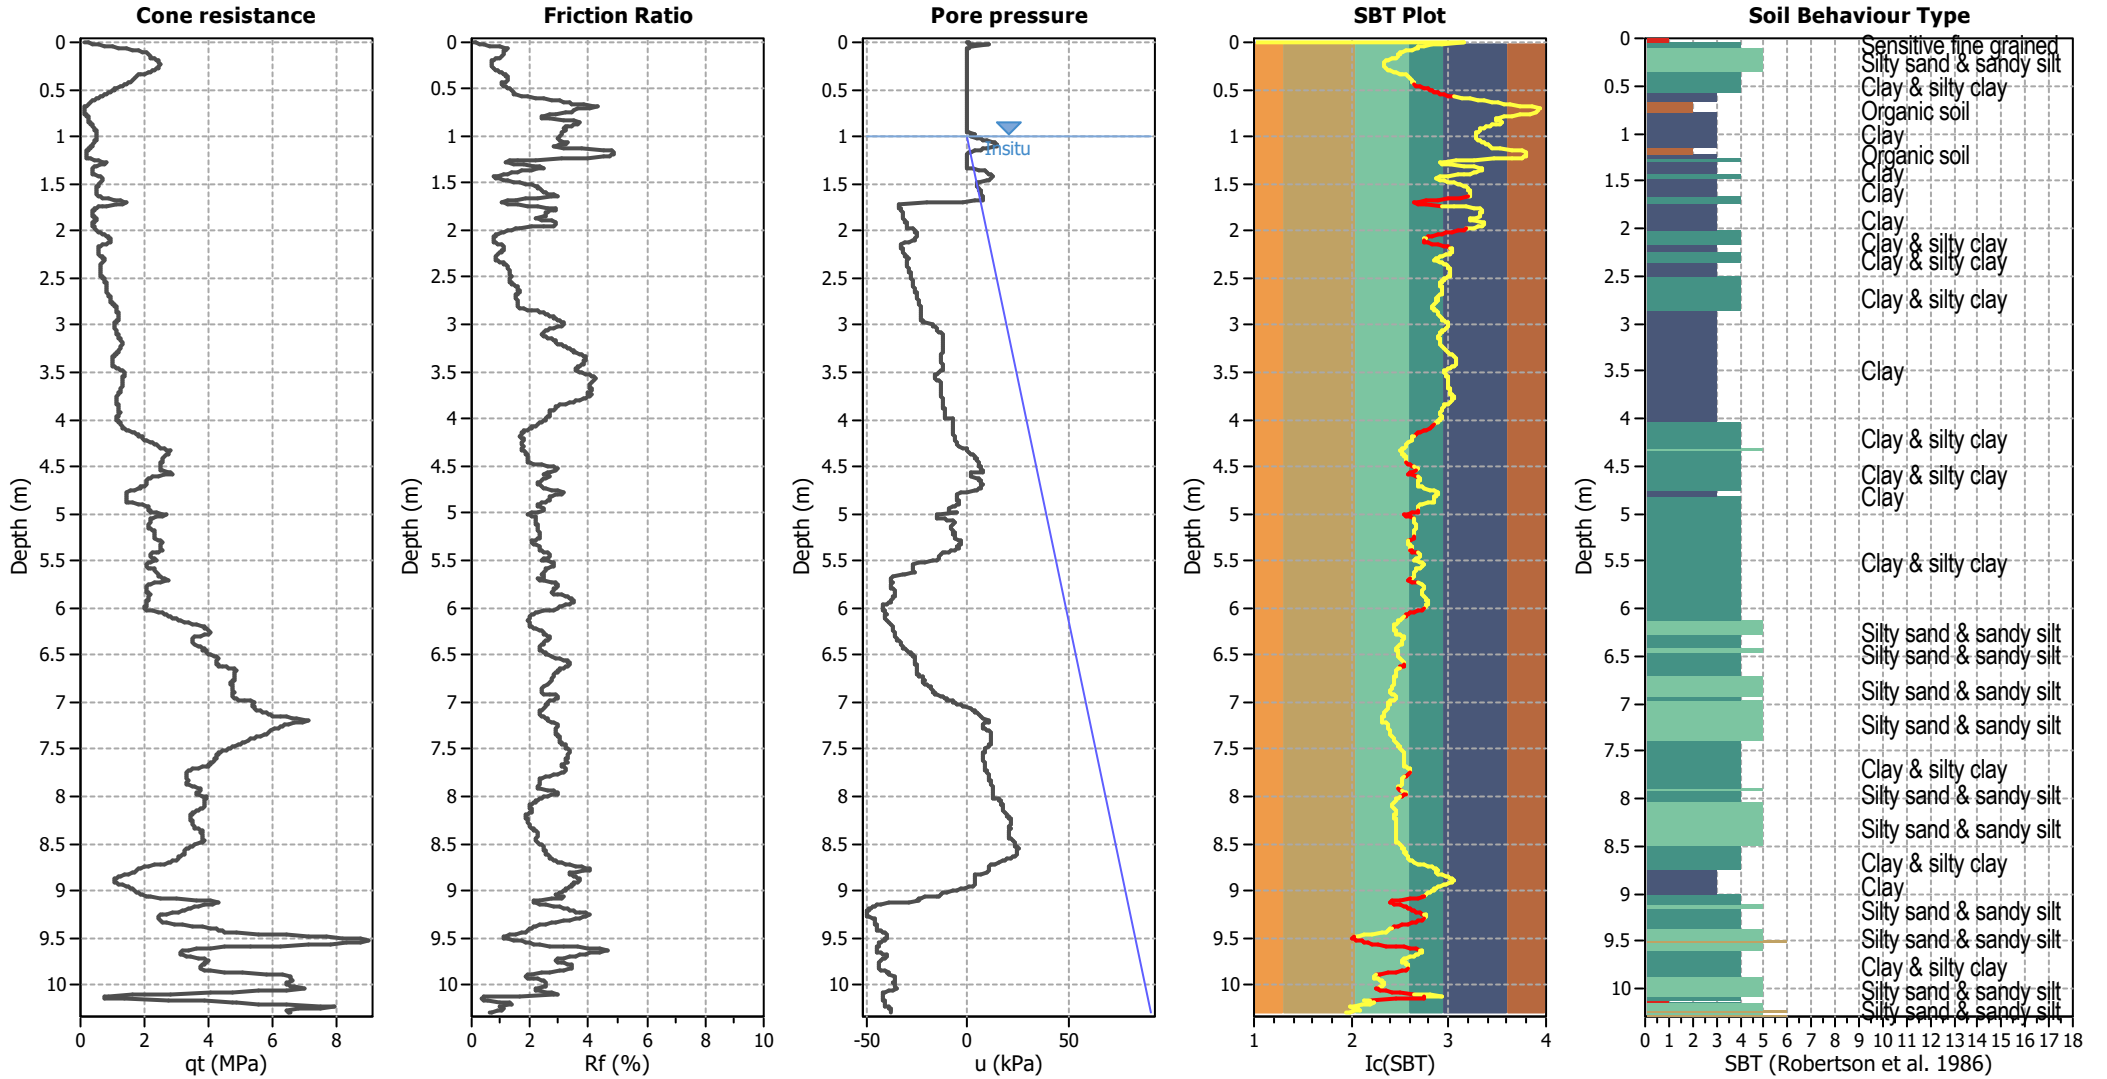


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

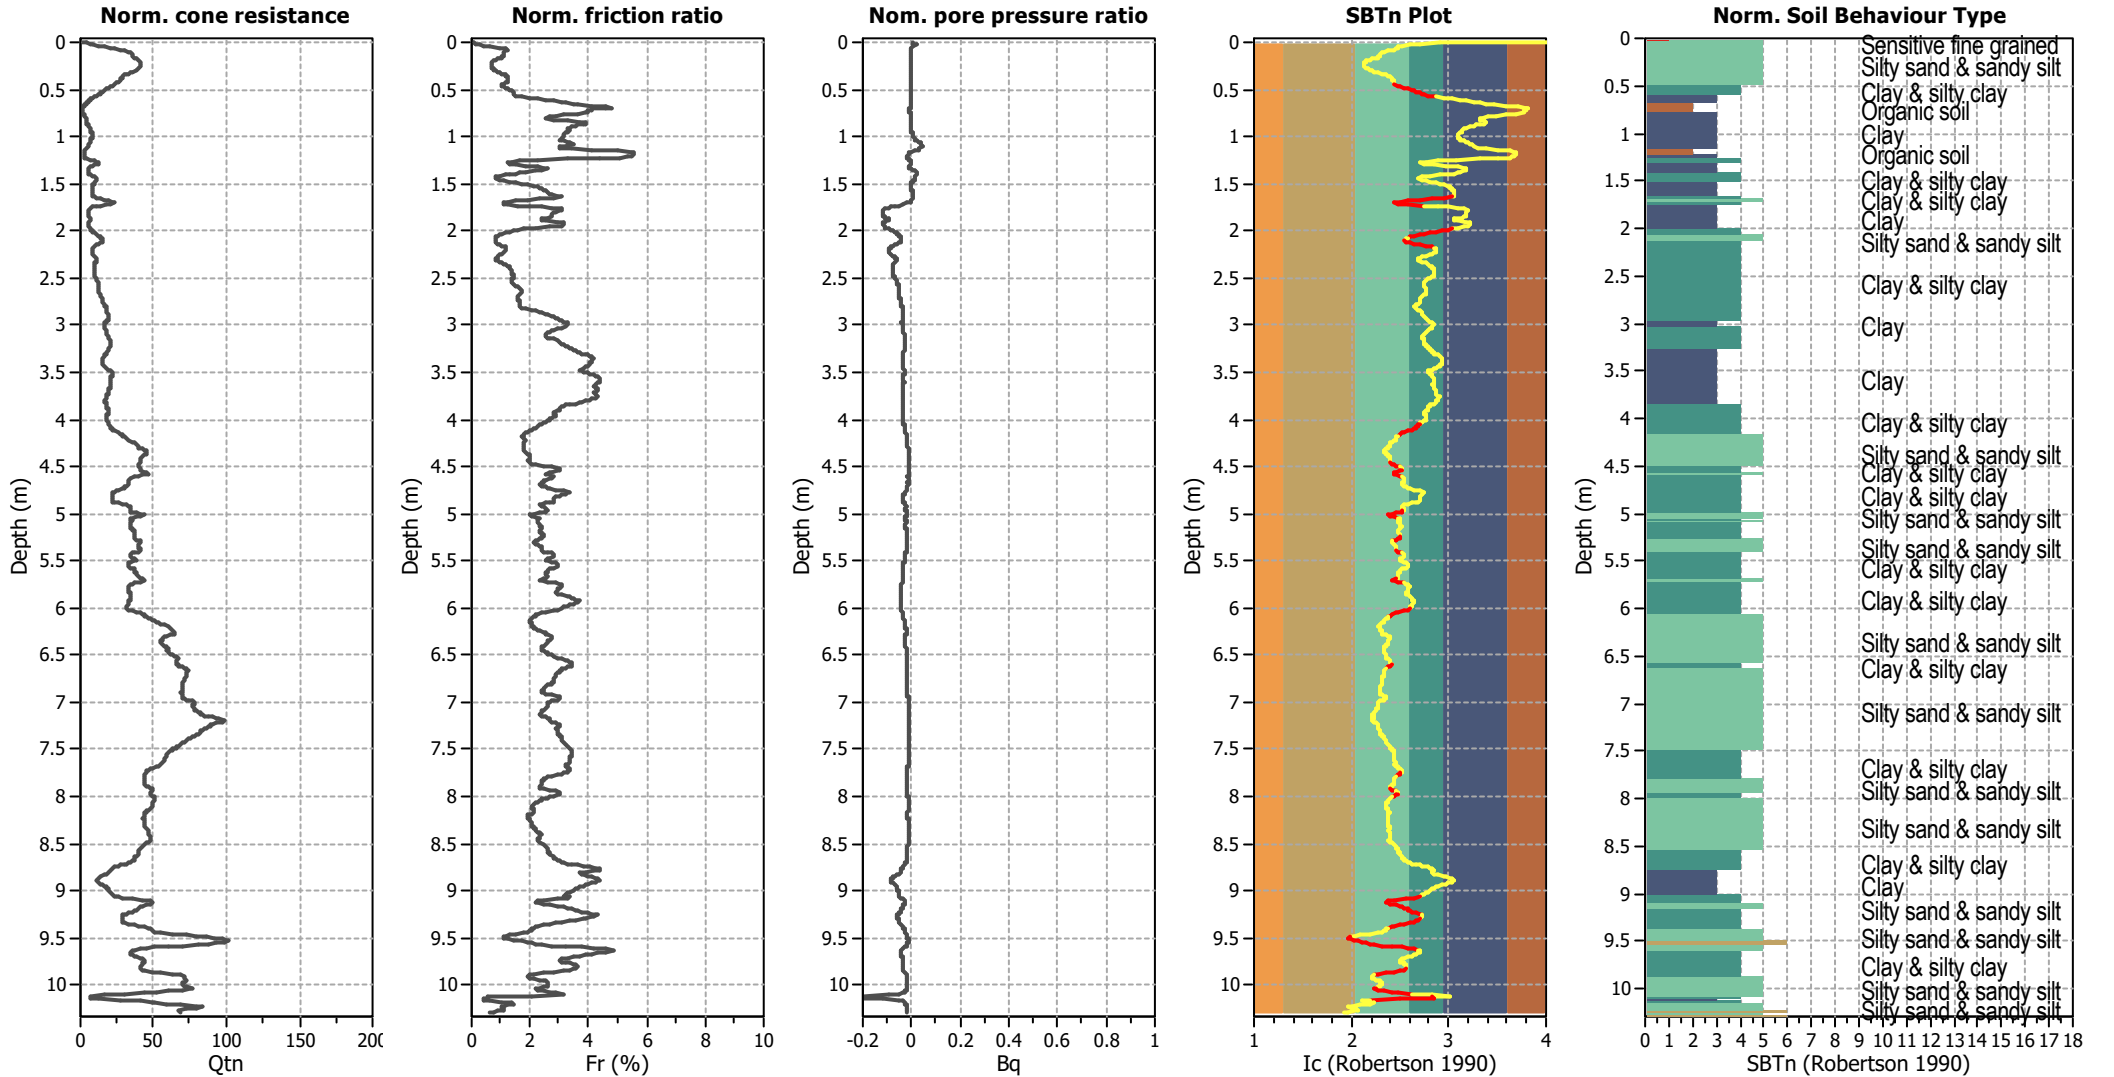


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

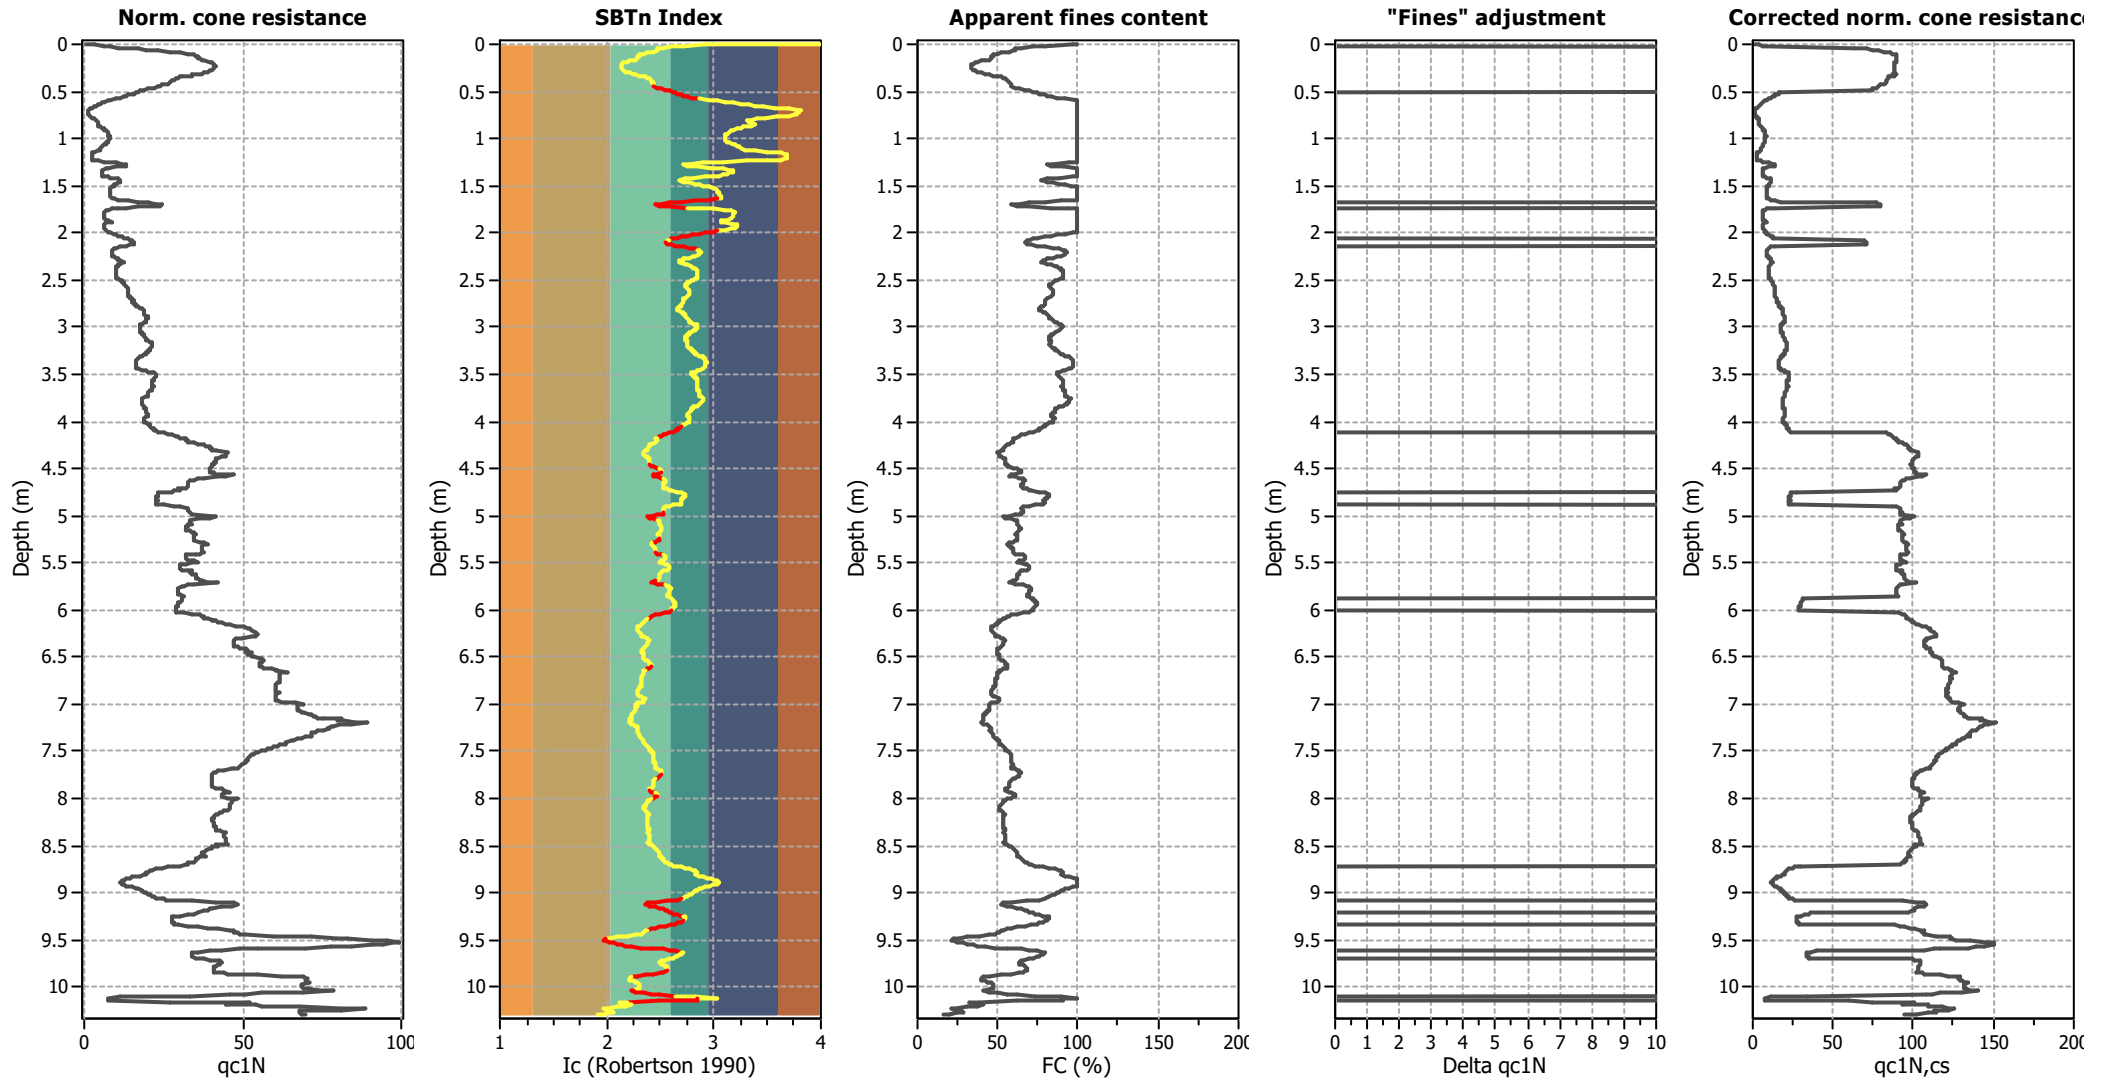

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

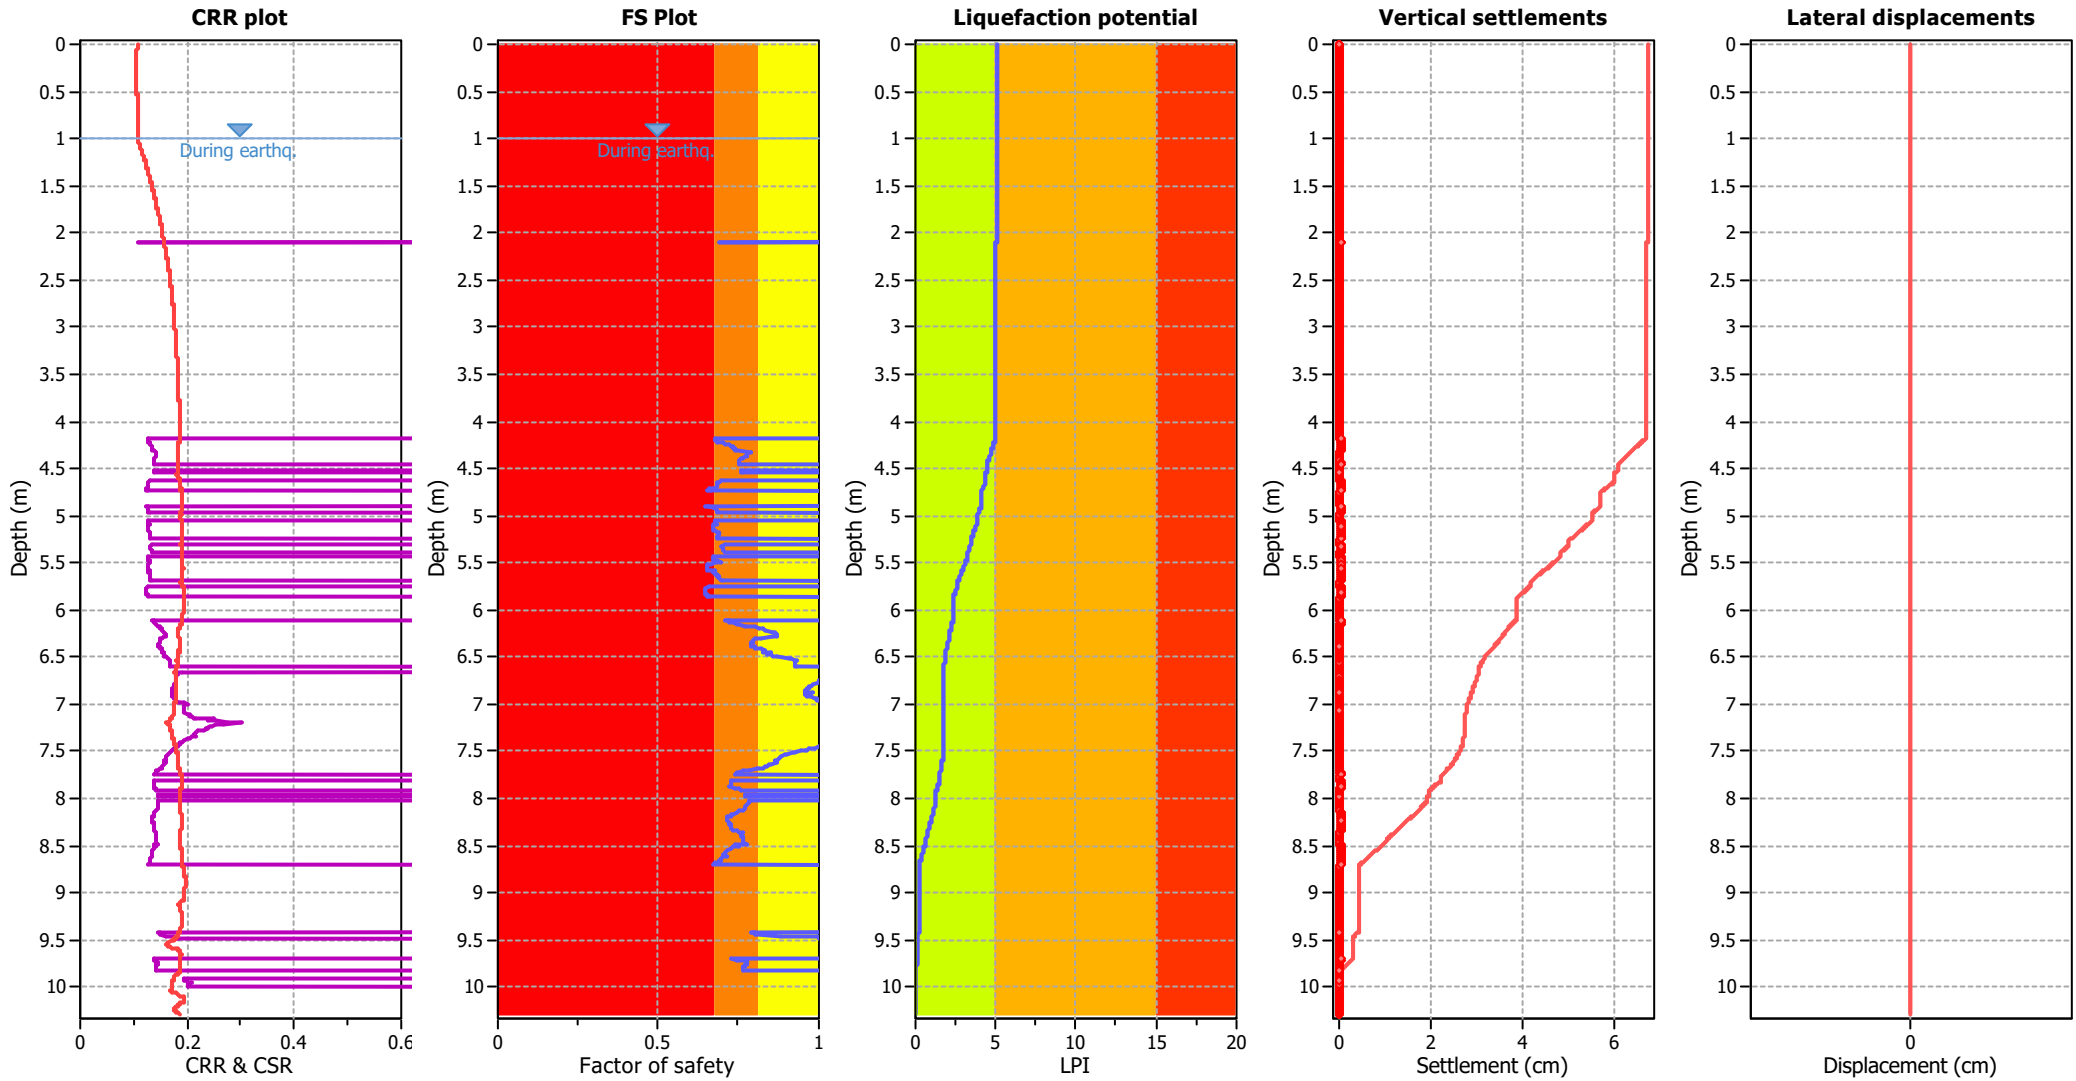

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

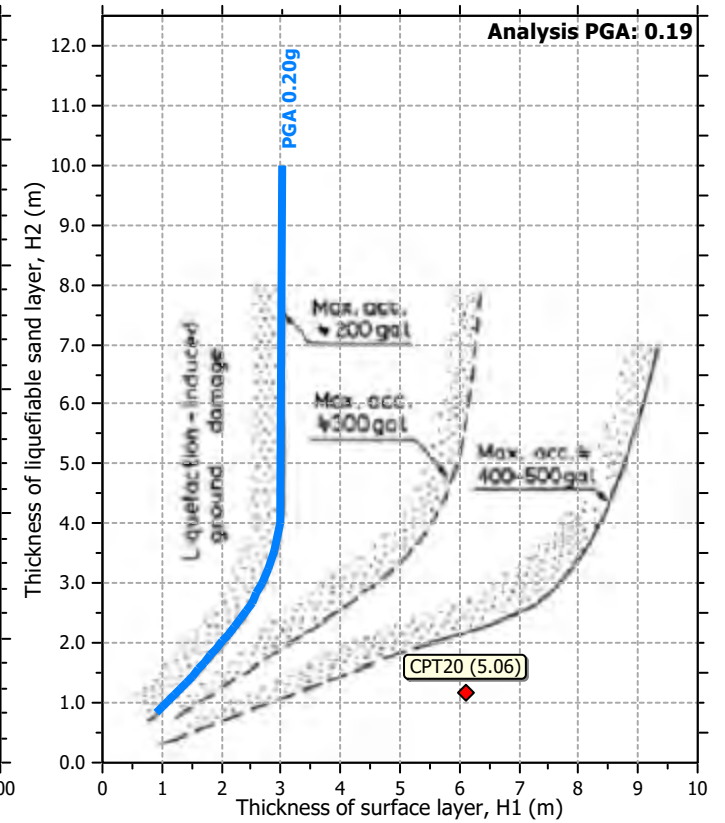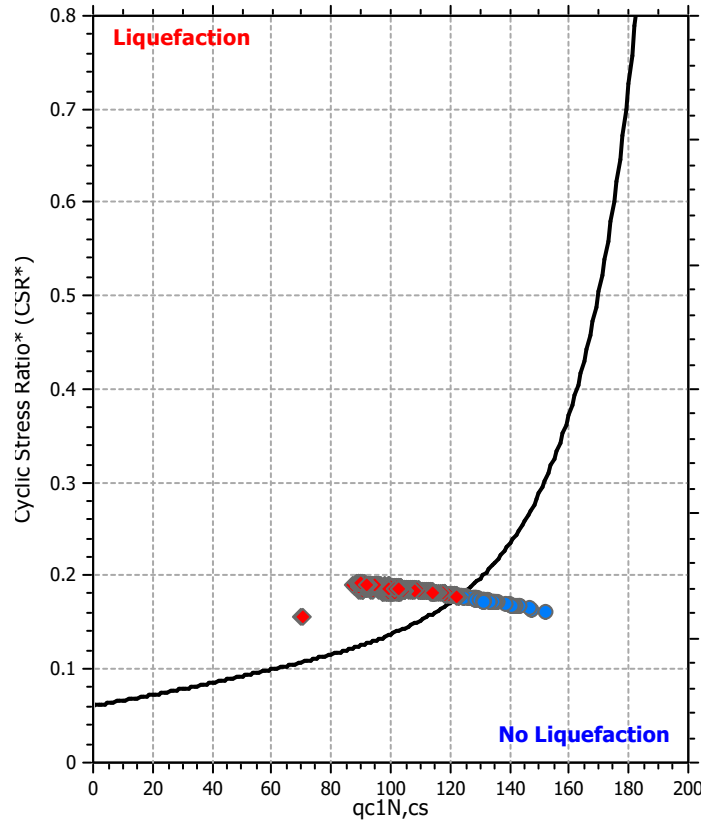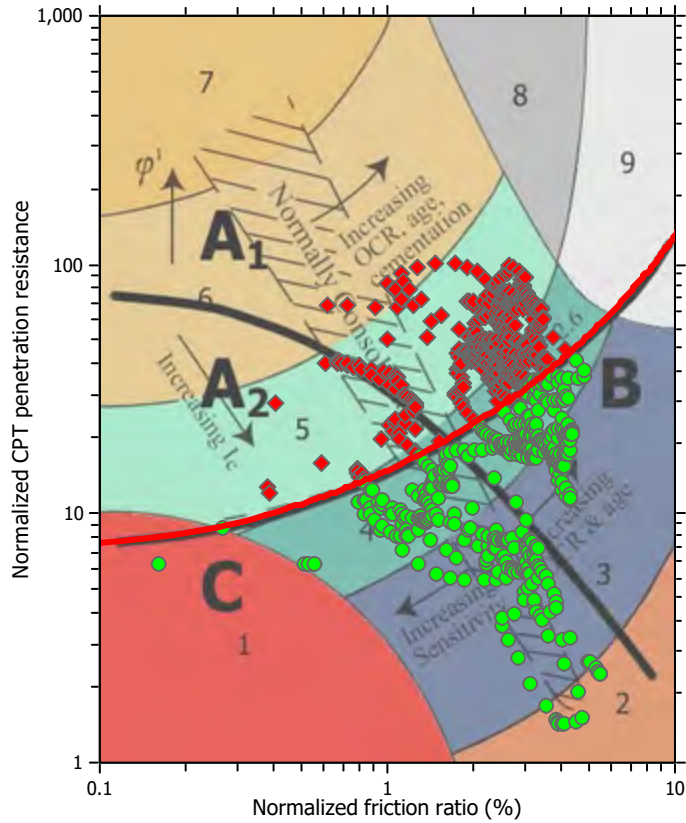

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

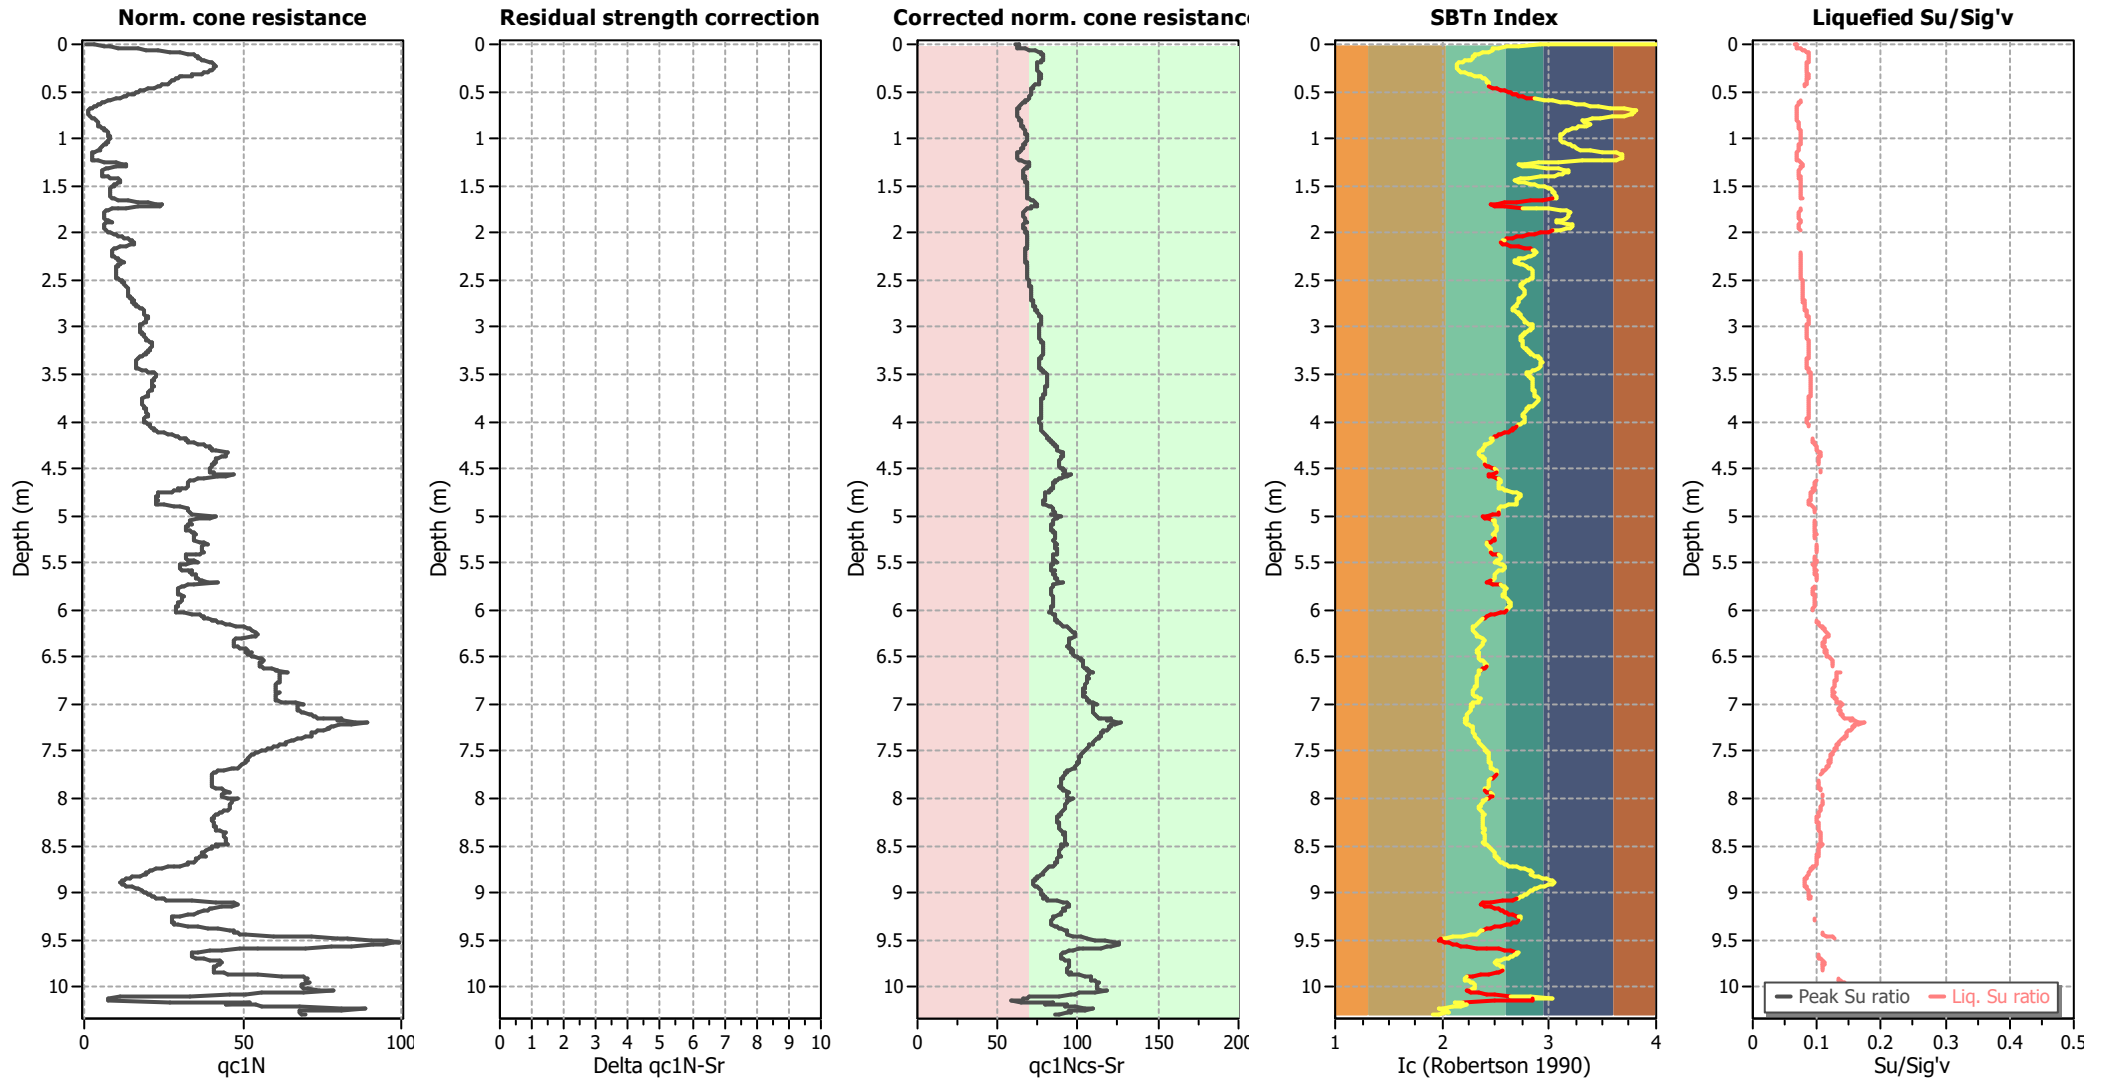

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

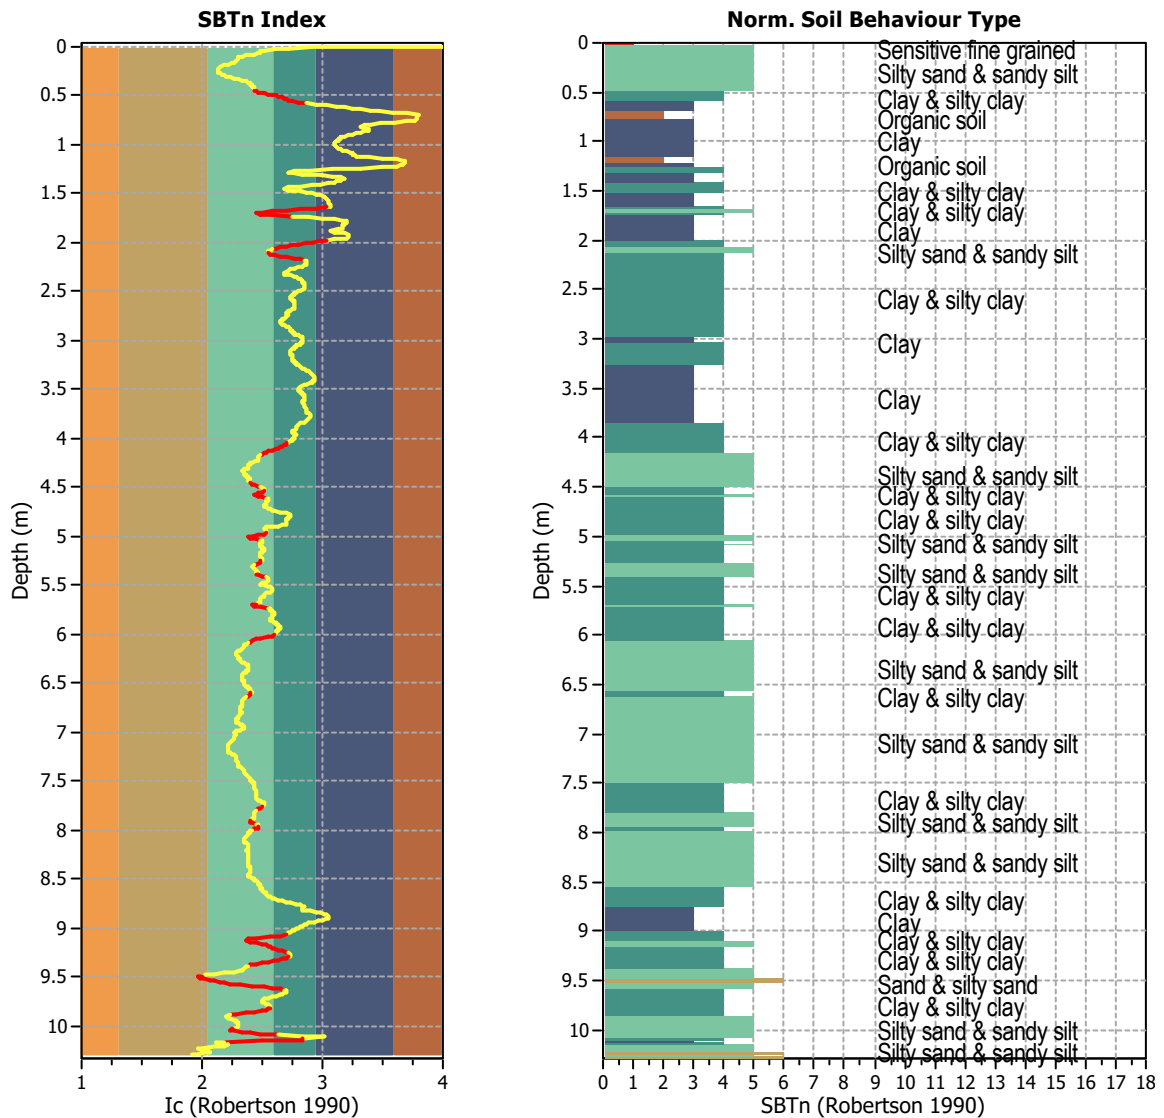


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1030
 Total points excluded: 190
 Exclusion percentage: 18.45%
 Number of layers detected: 26


Estimation of post-earthquake settlements

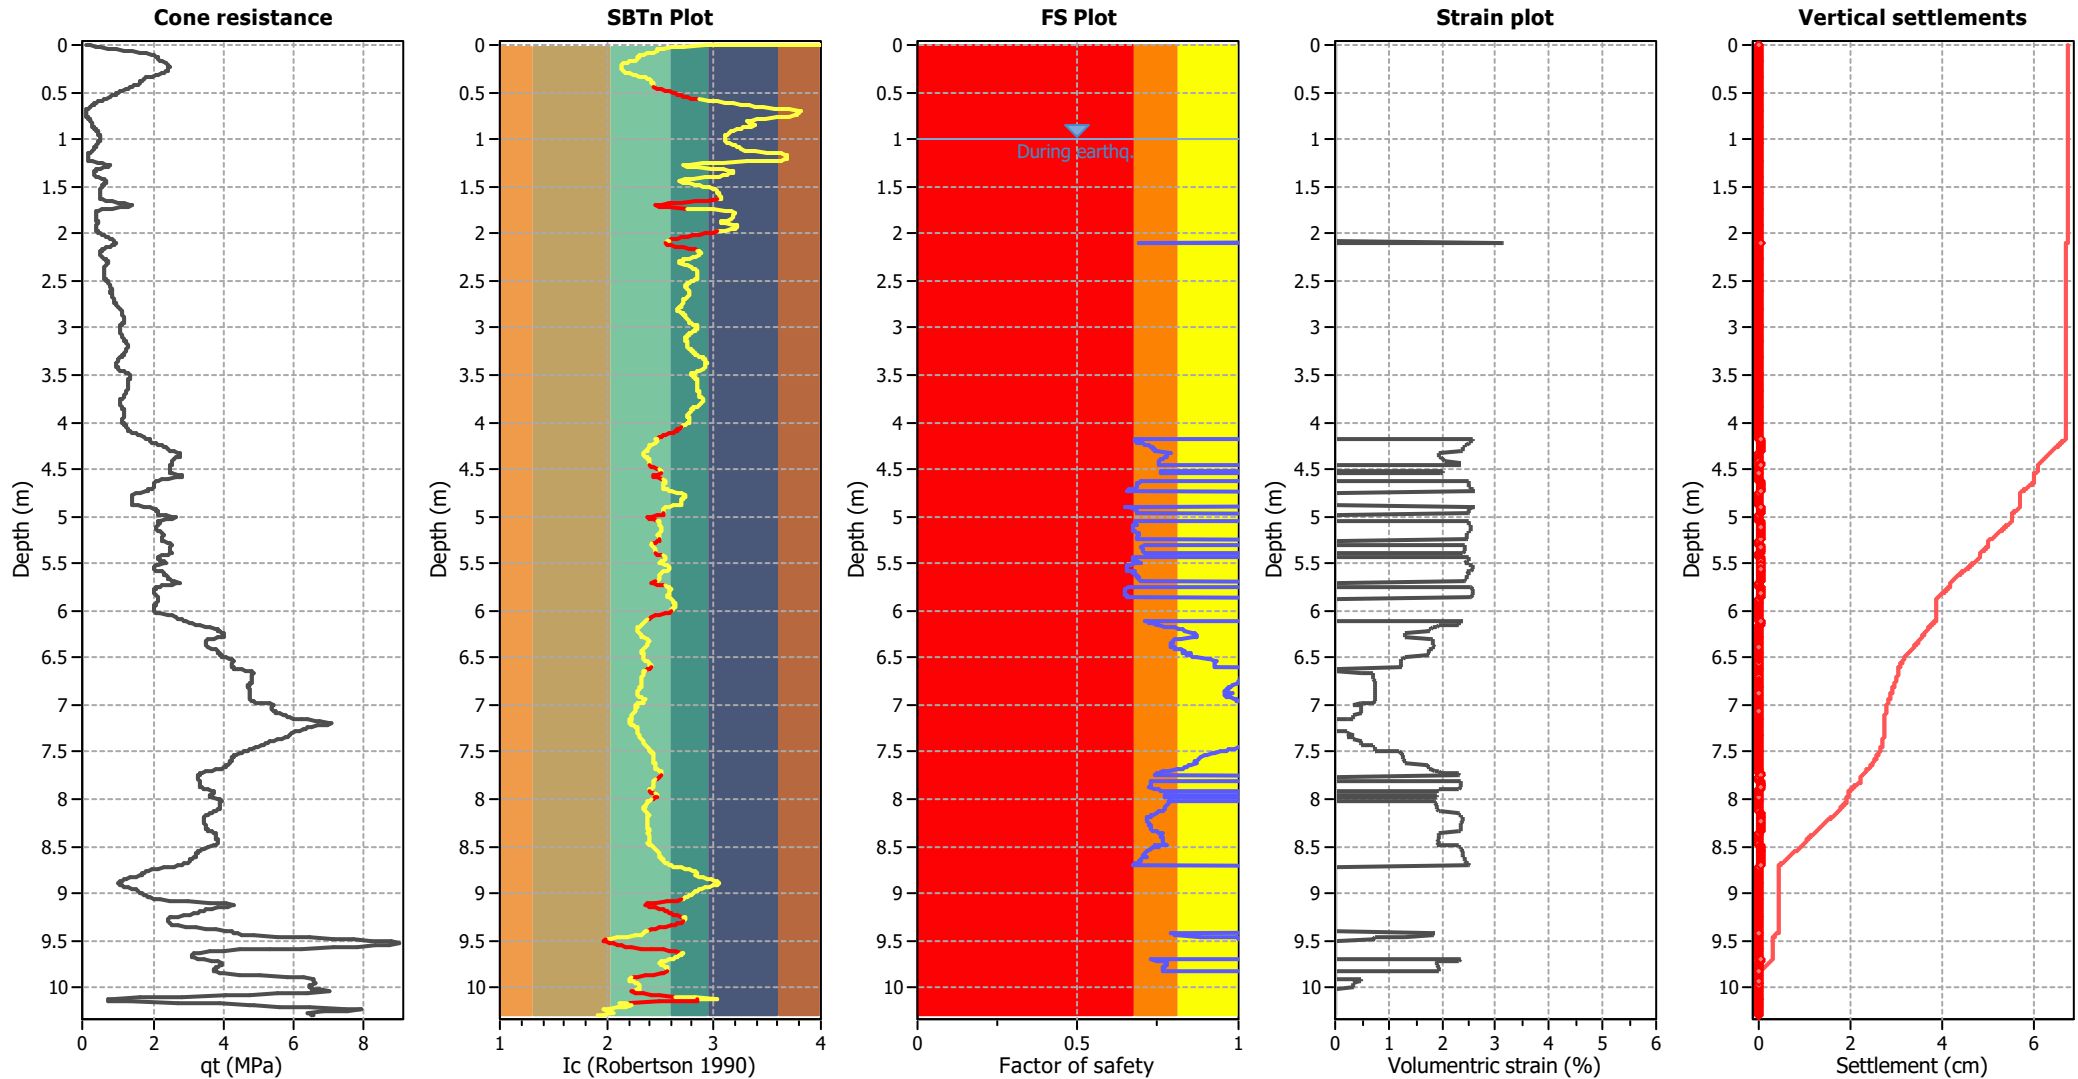

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

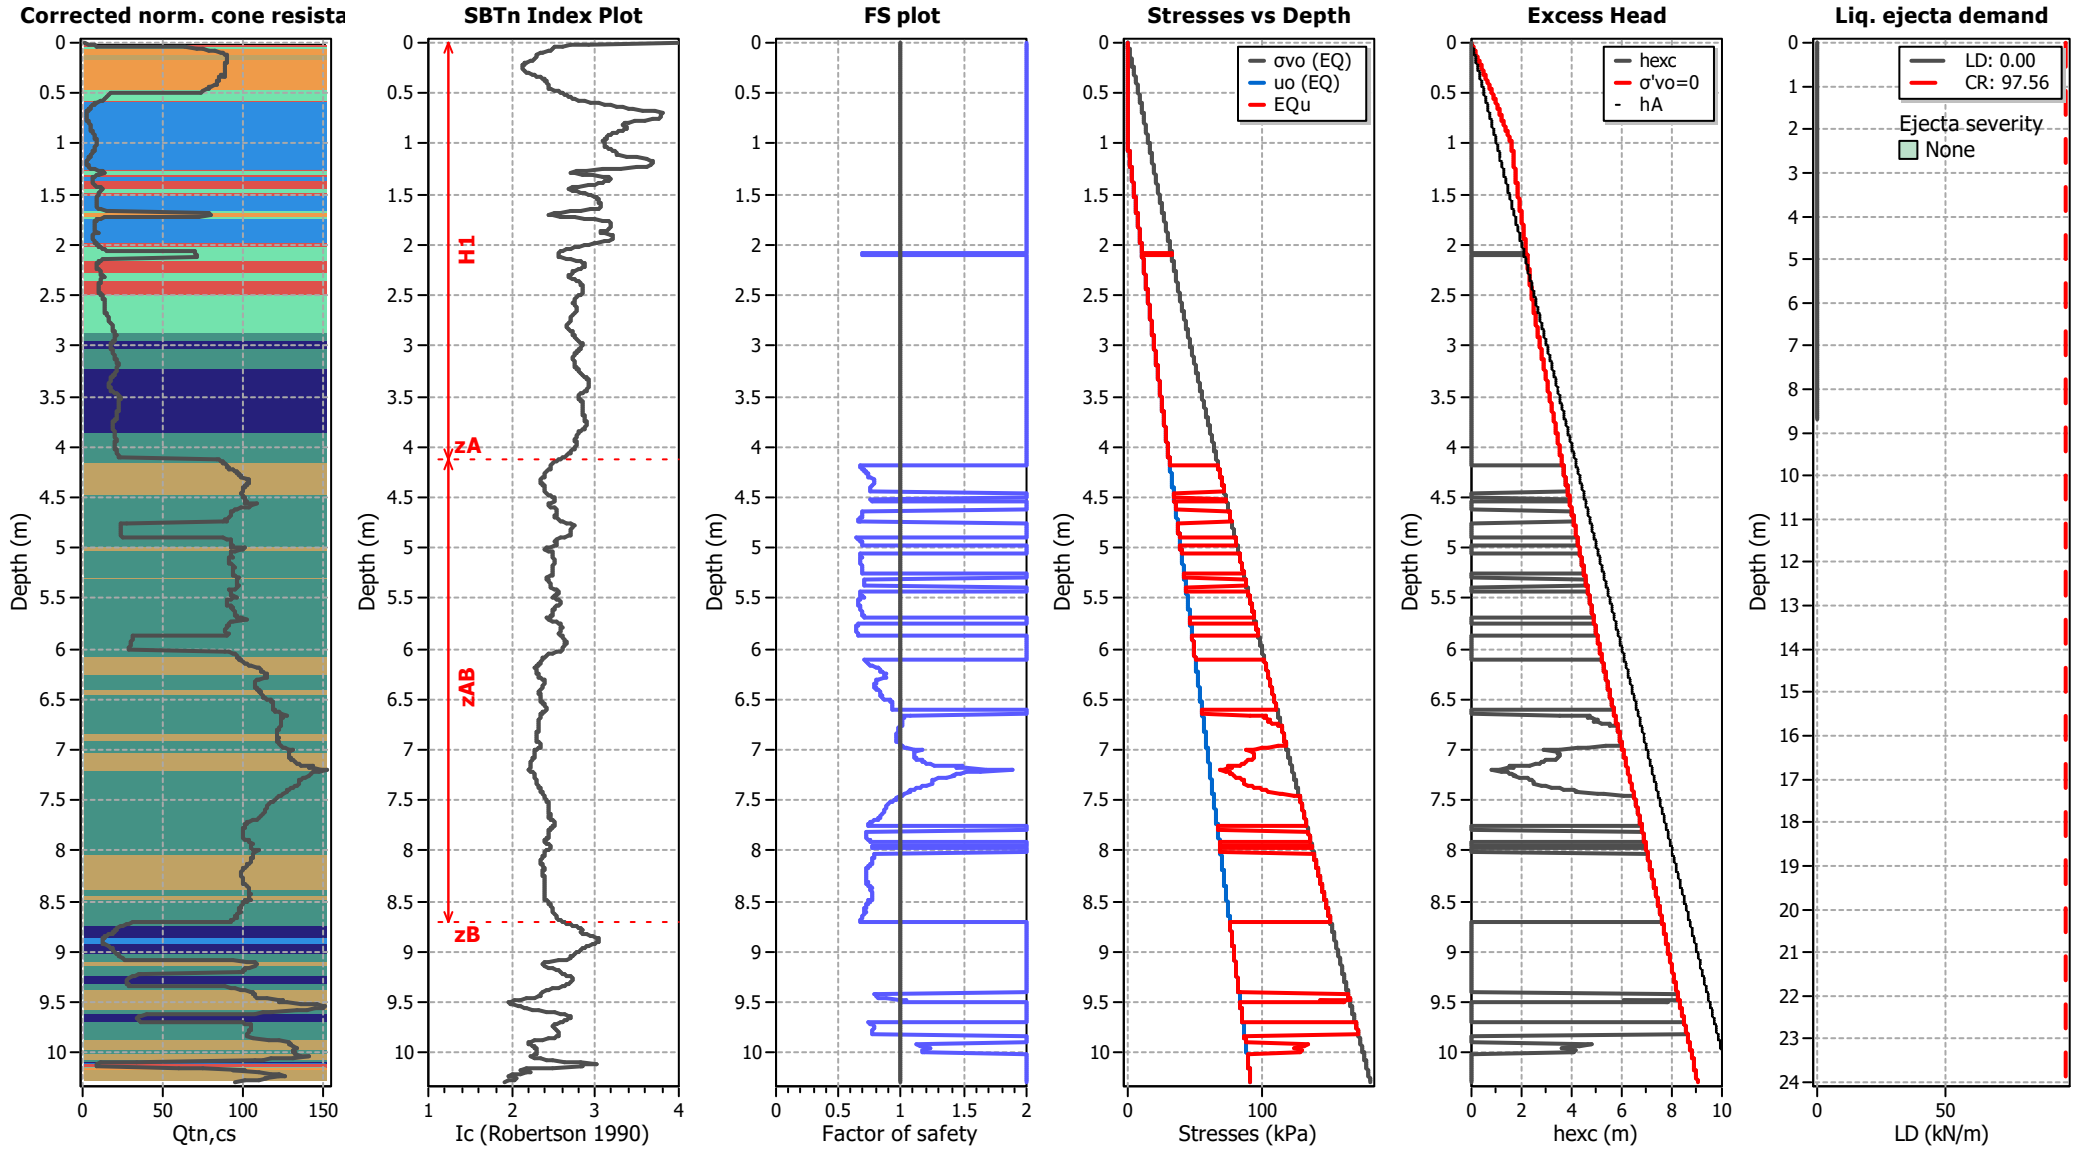

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT21A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

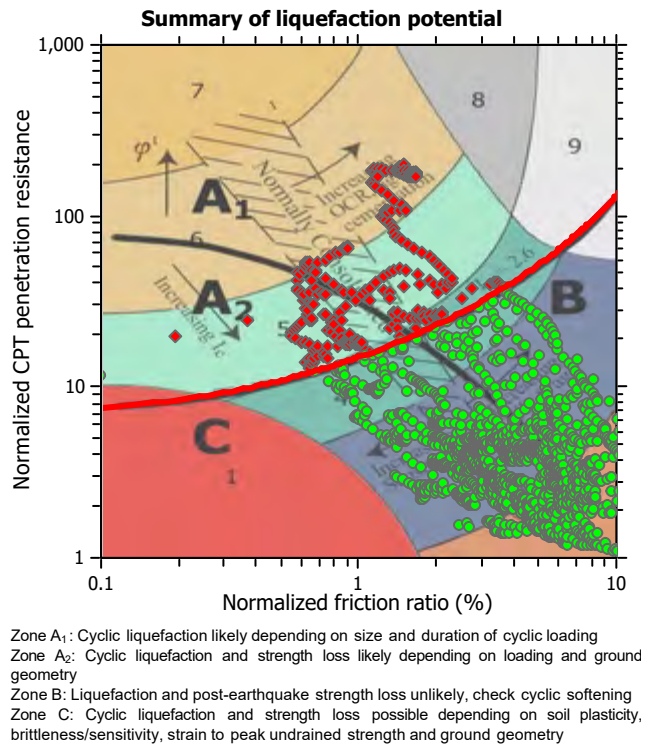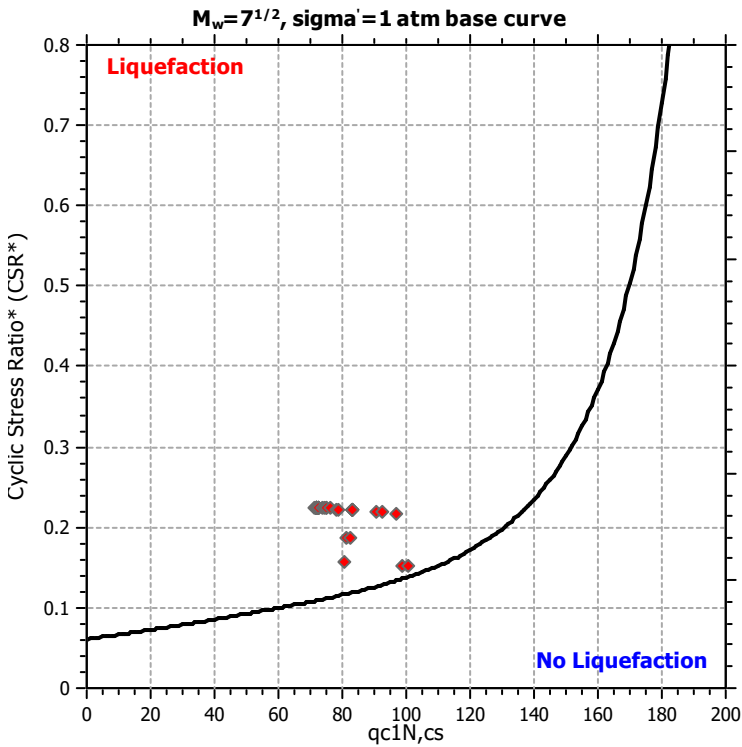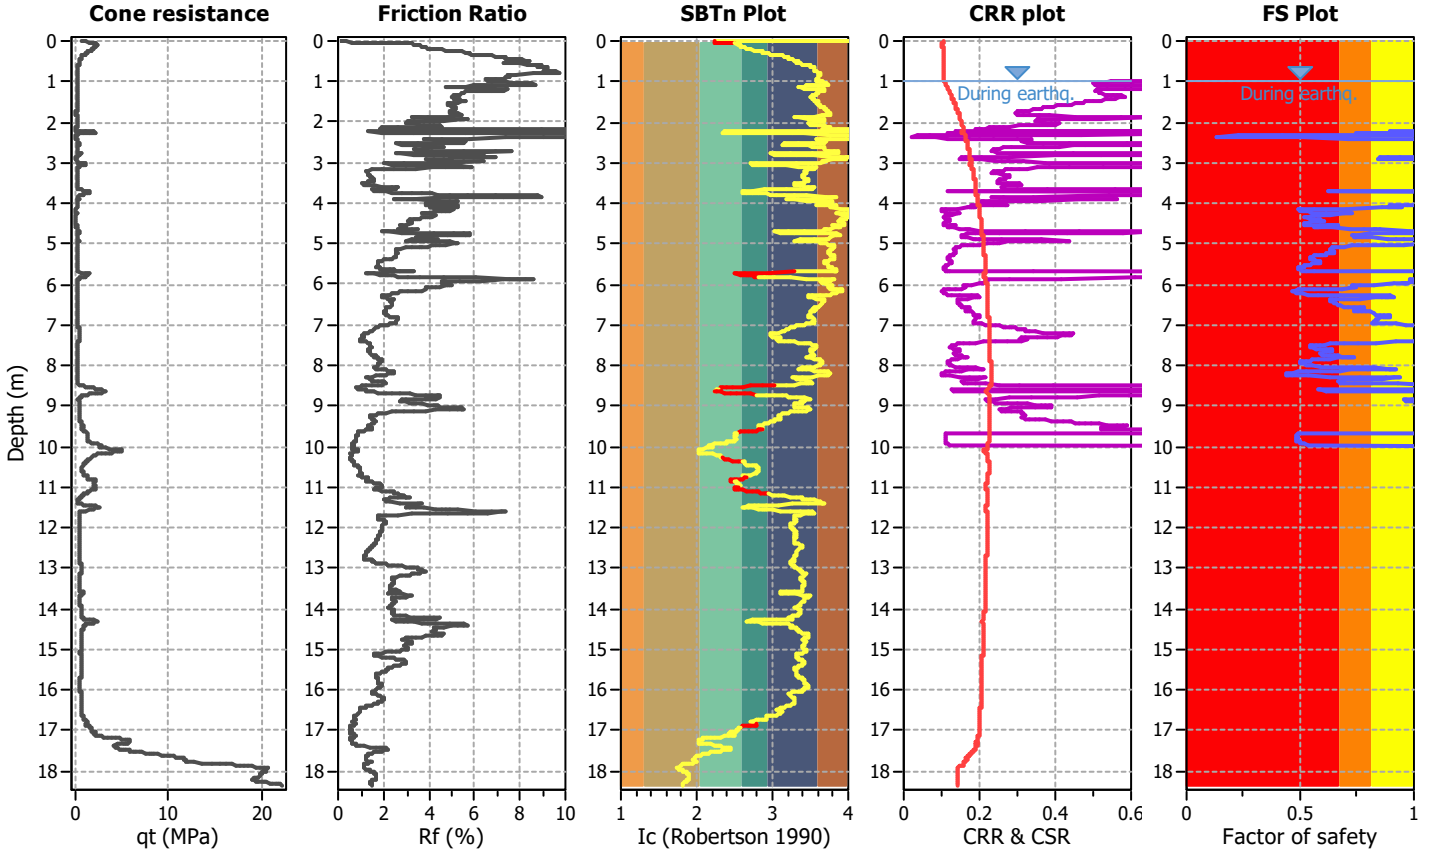

CPT basic interpretation plots

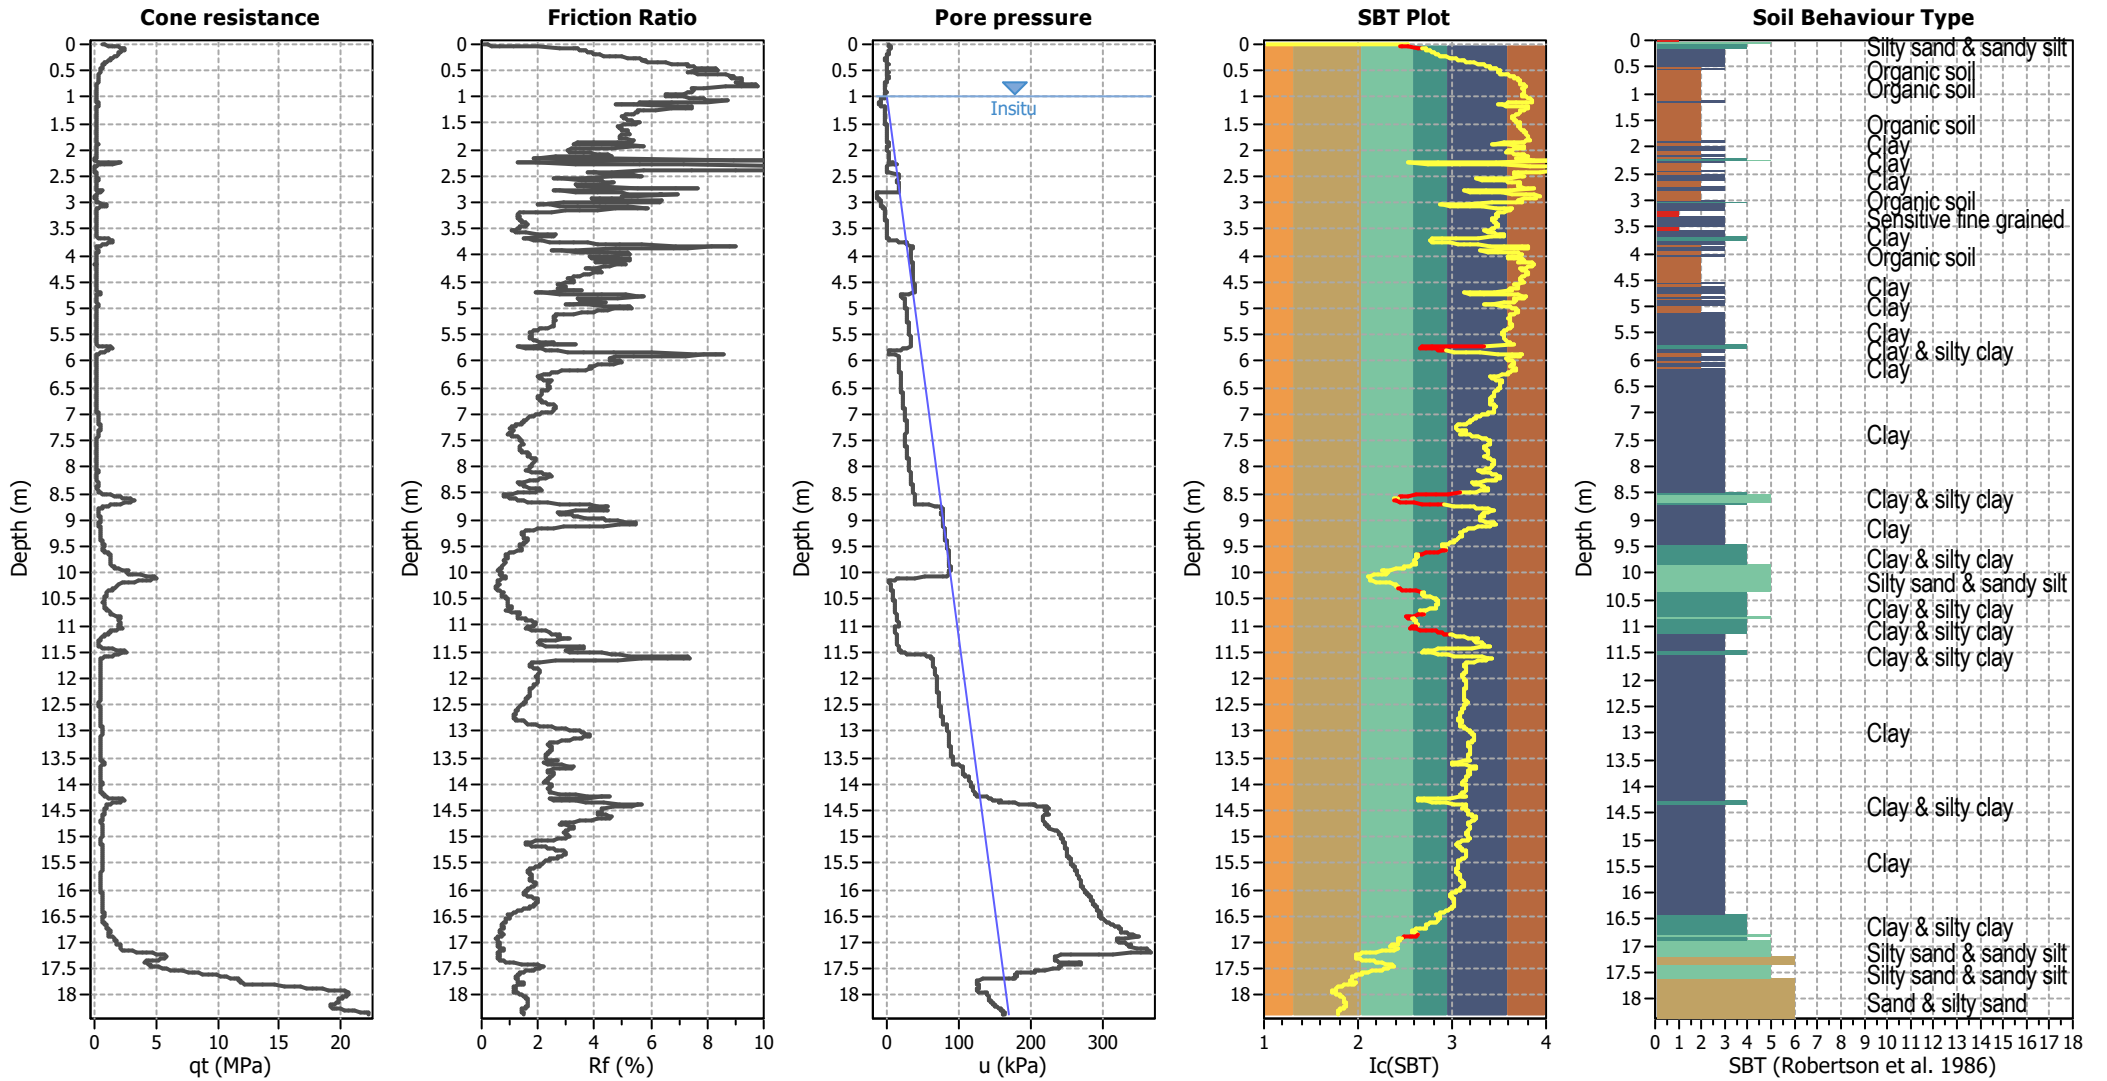


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

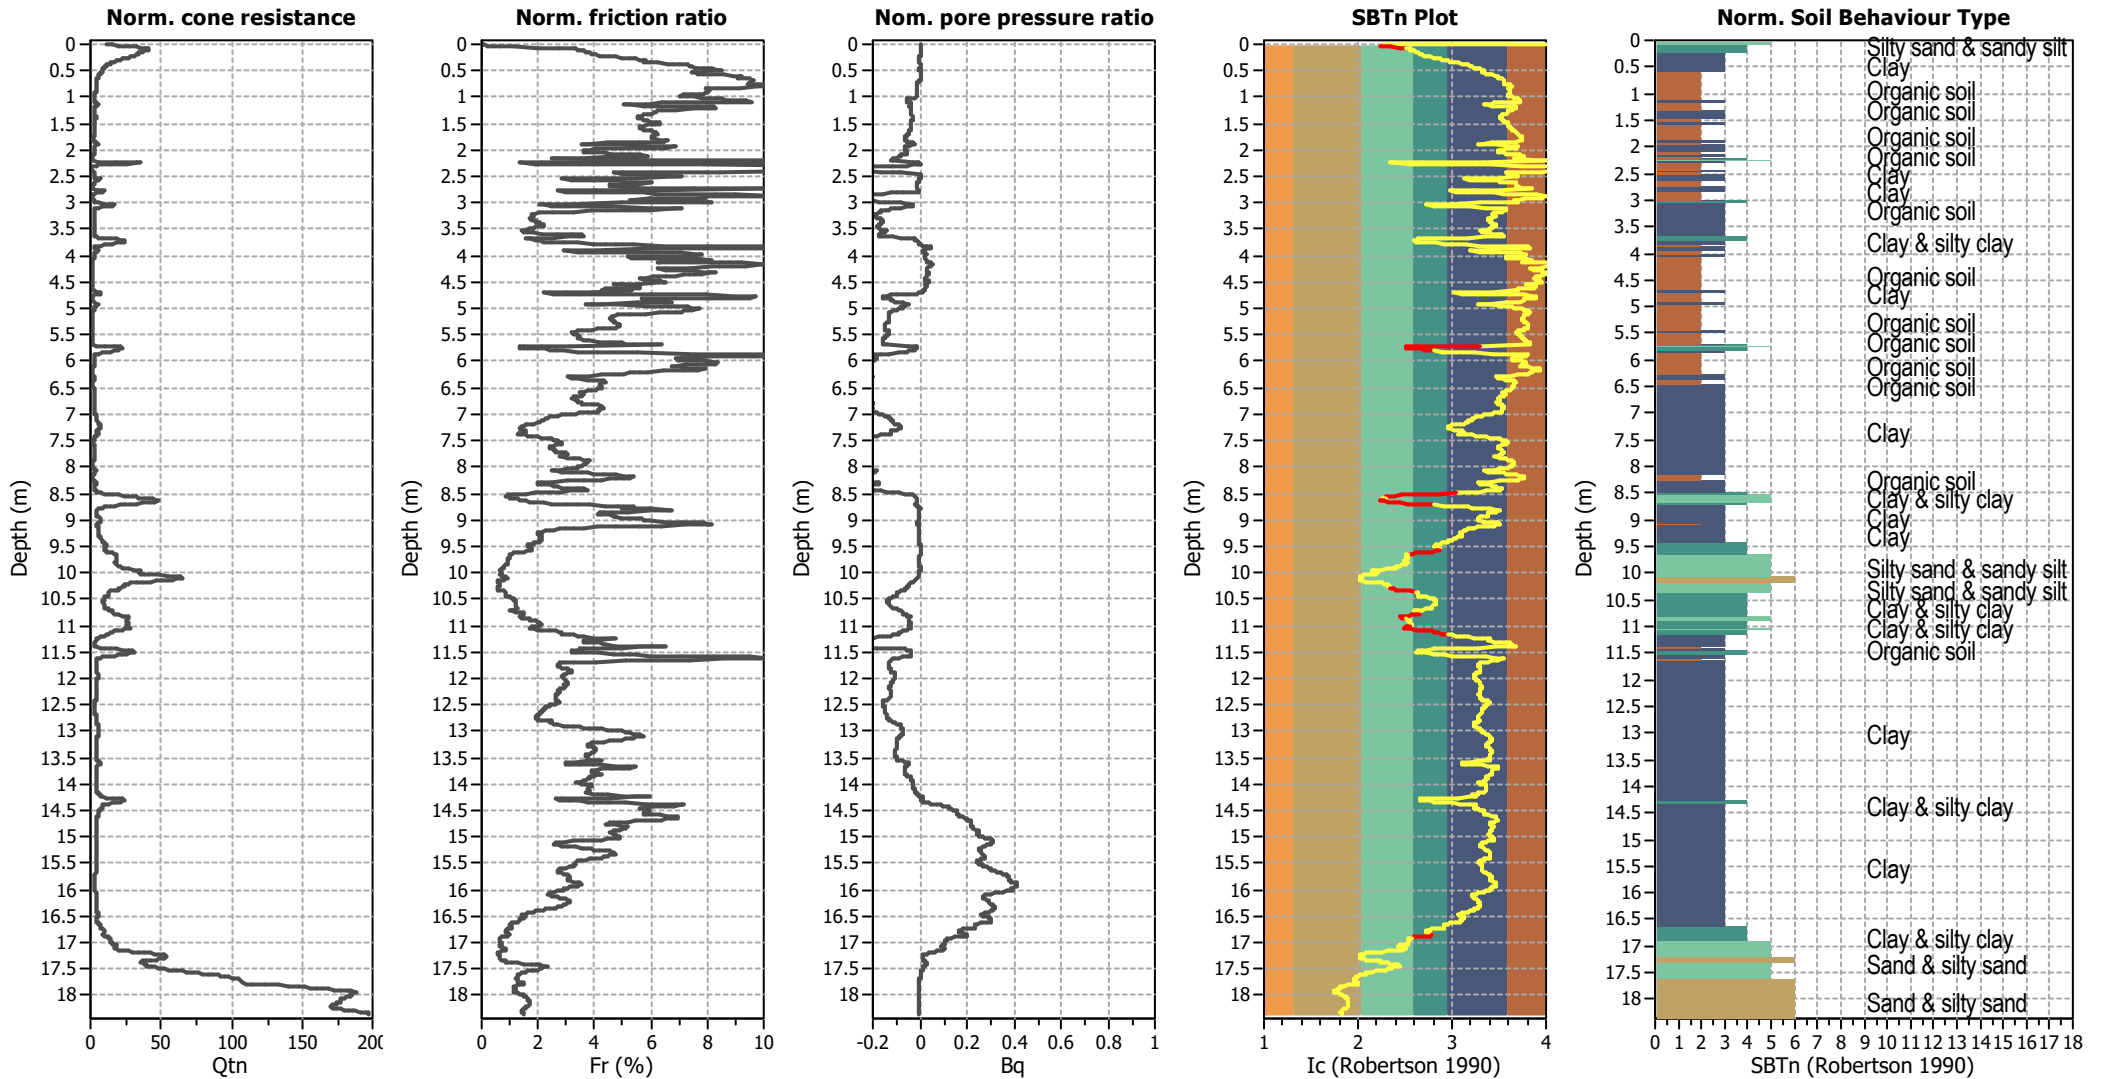


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

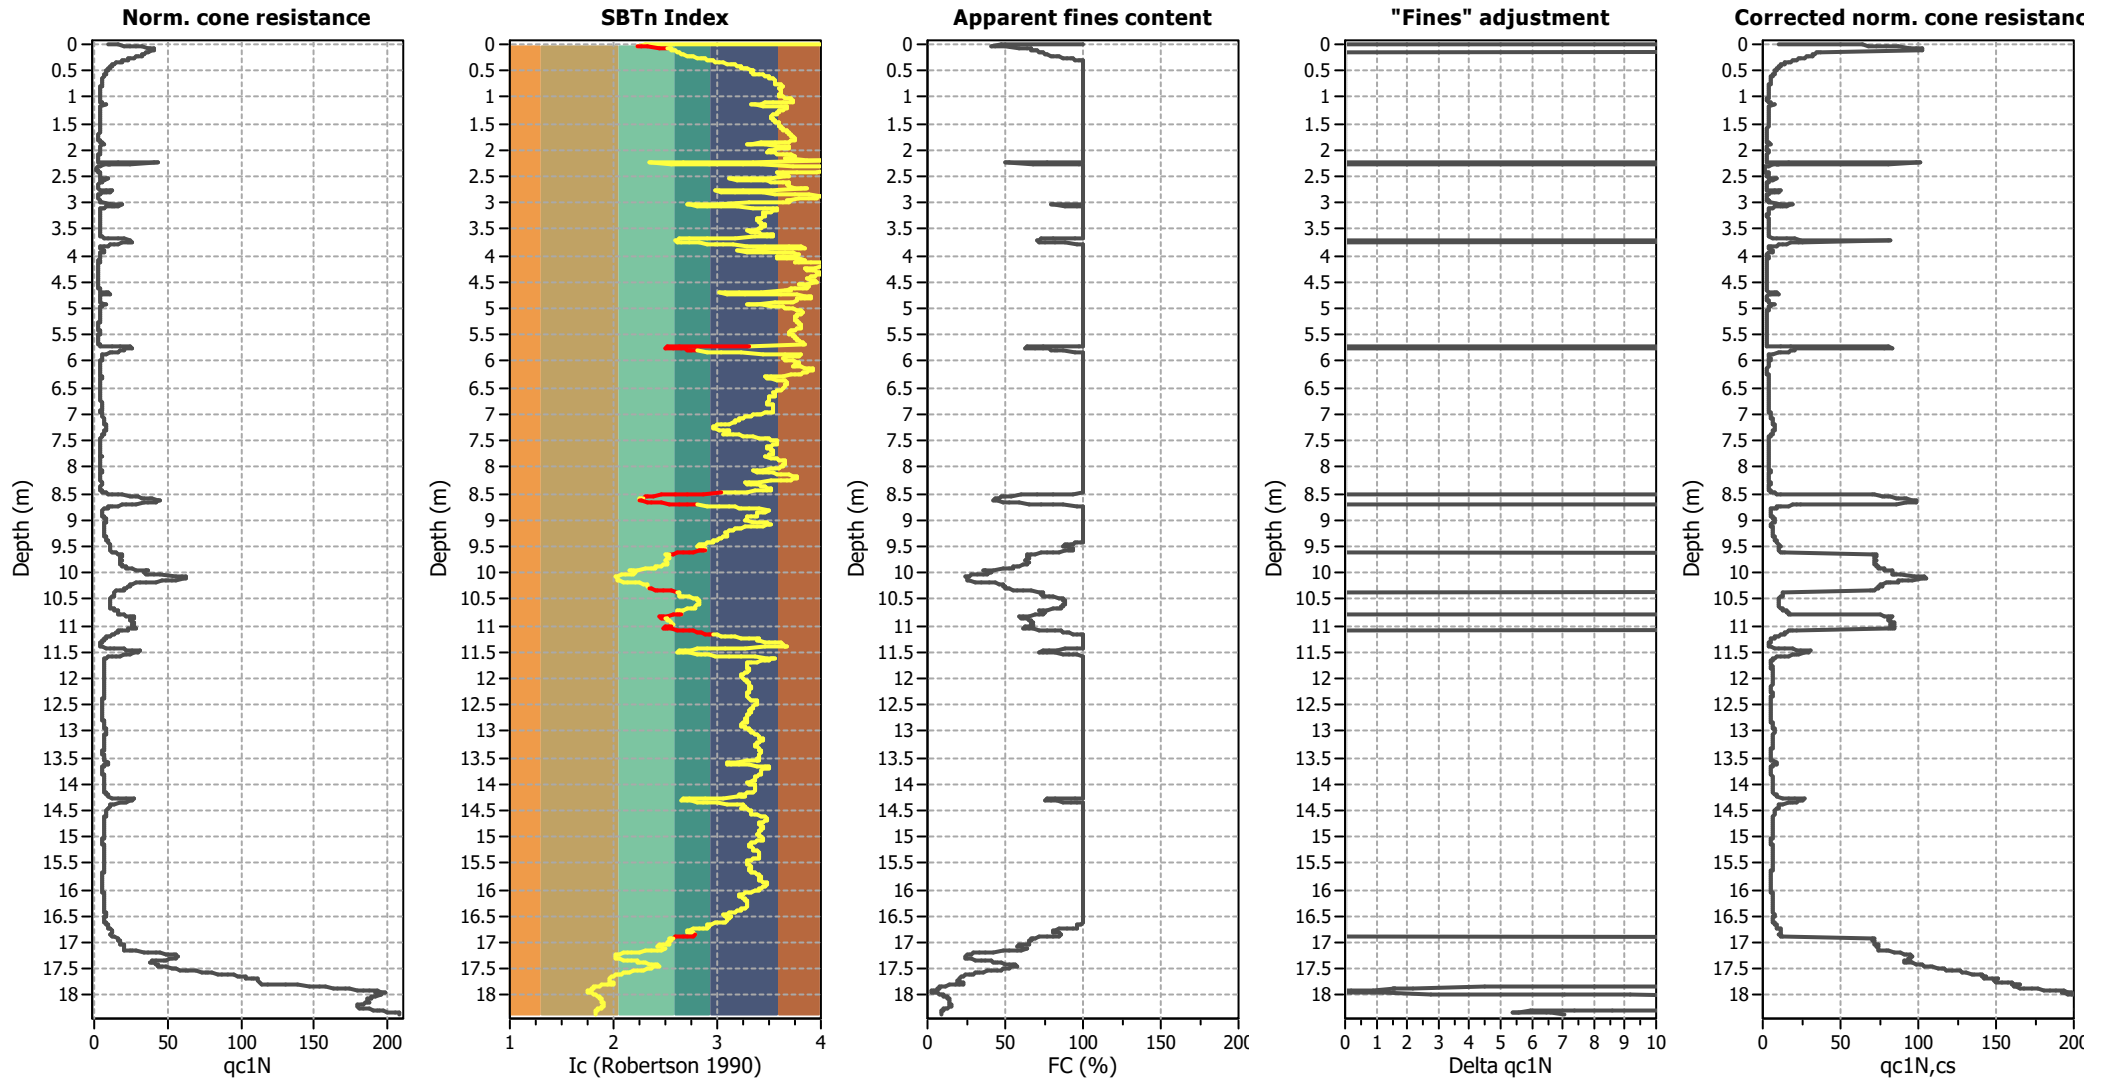

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

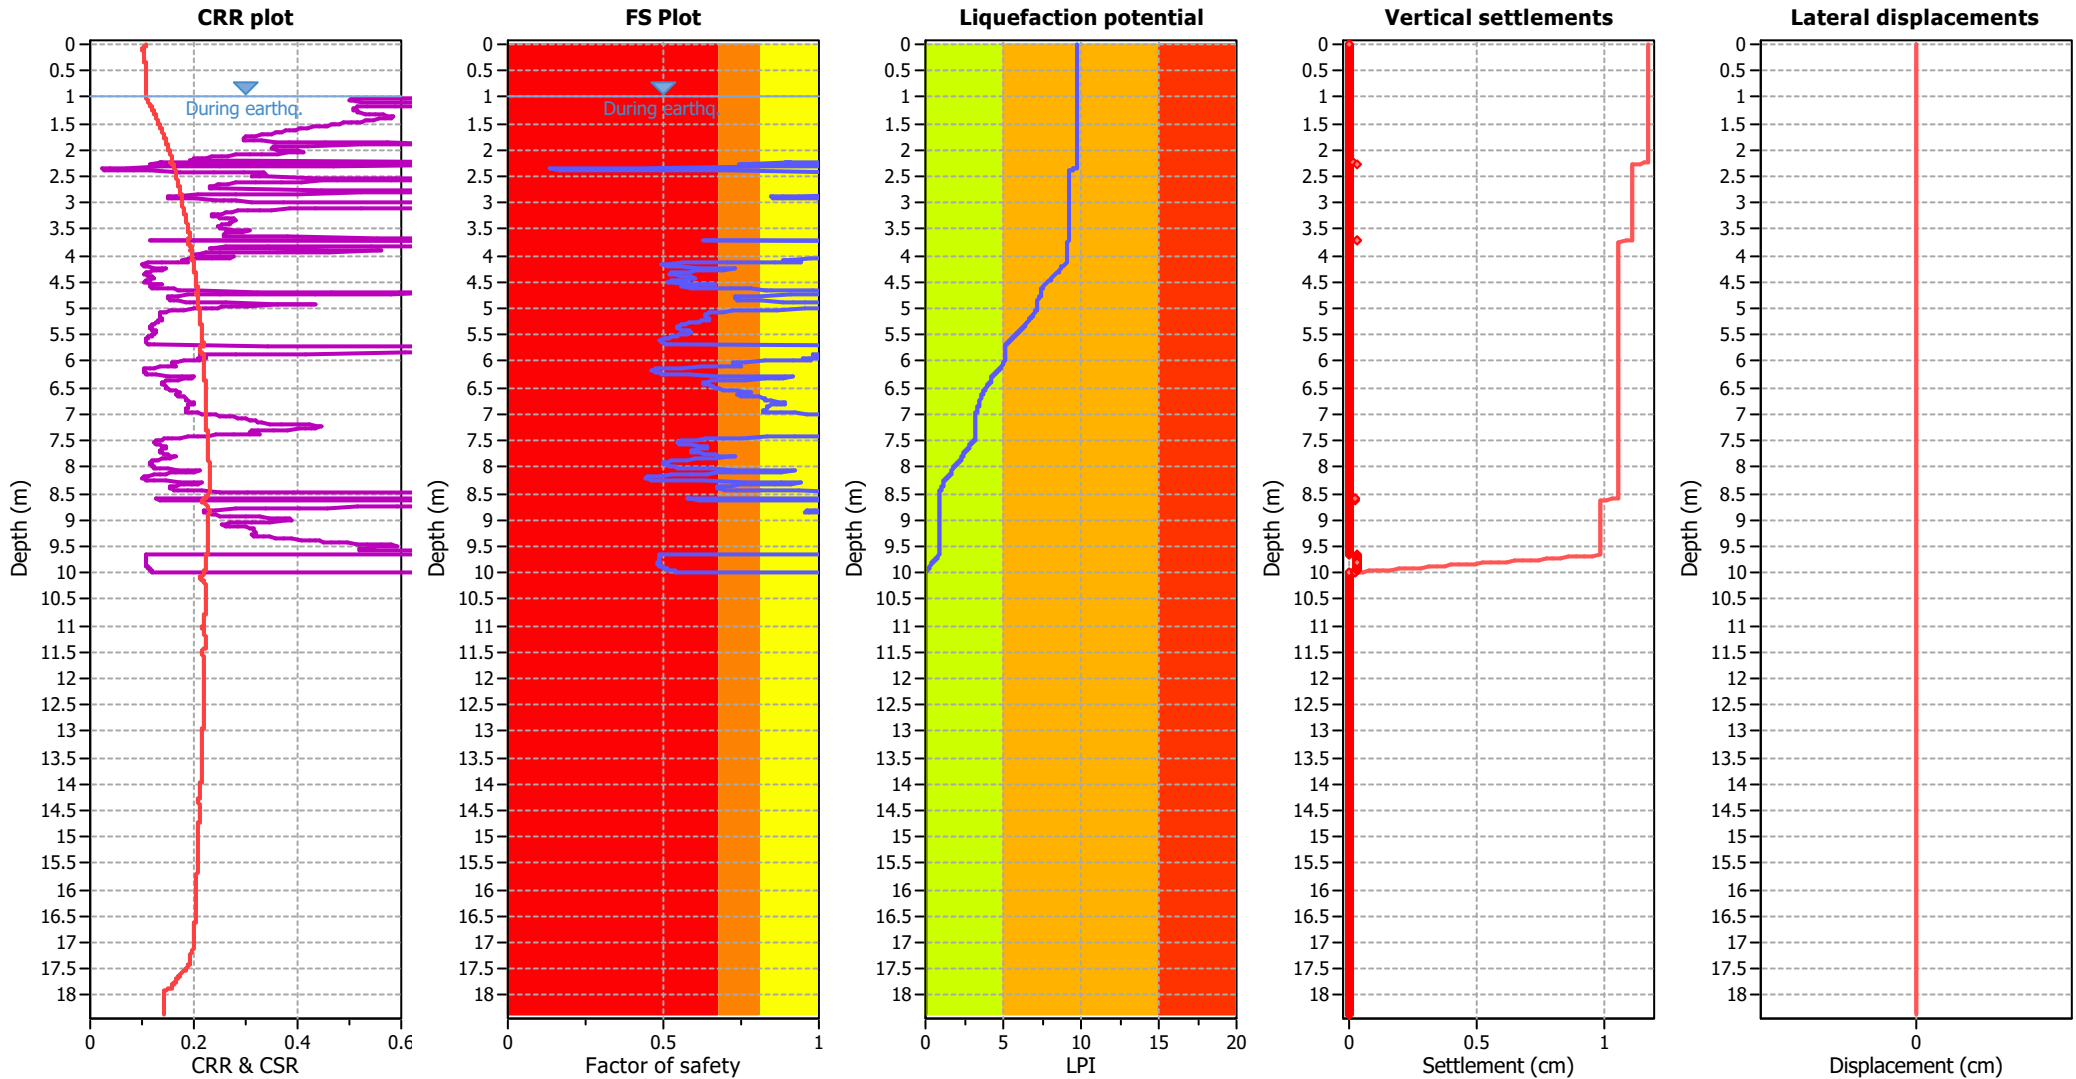

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

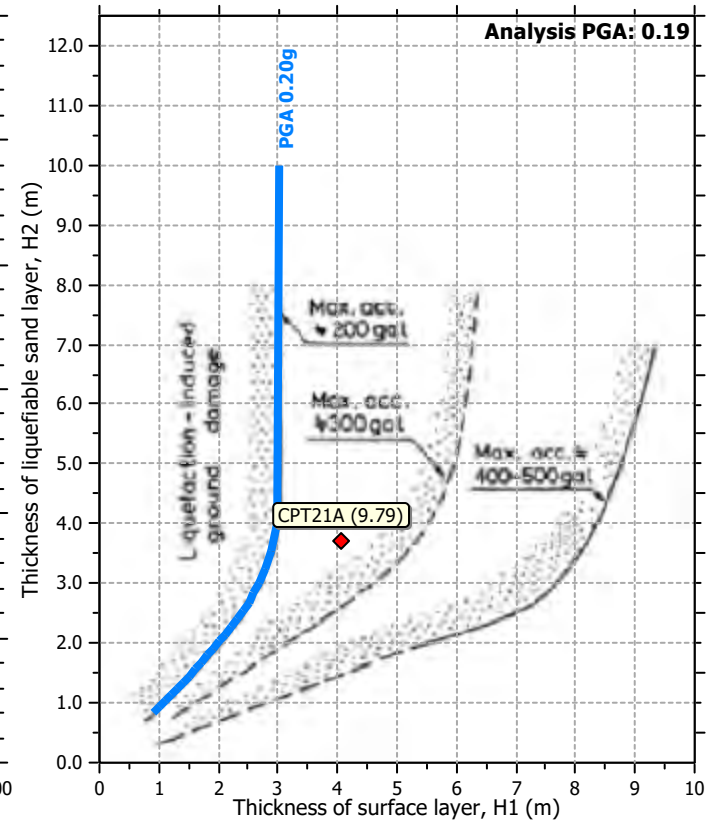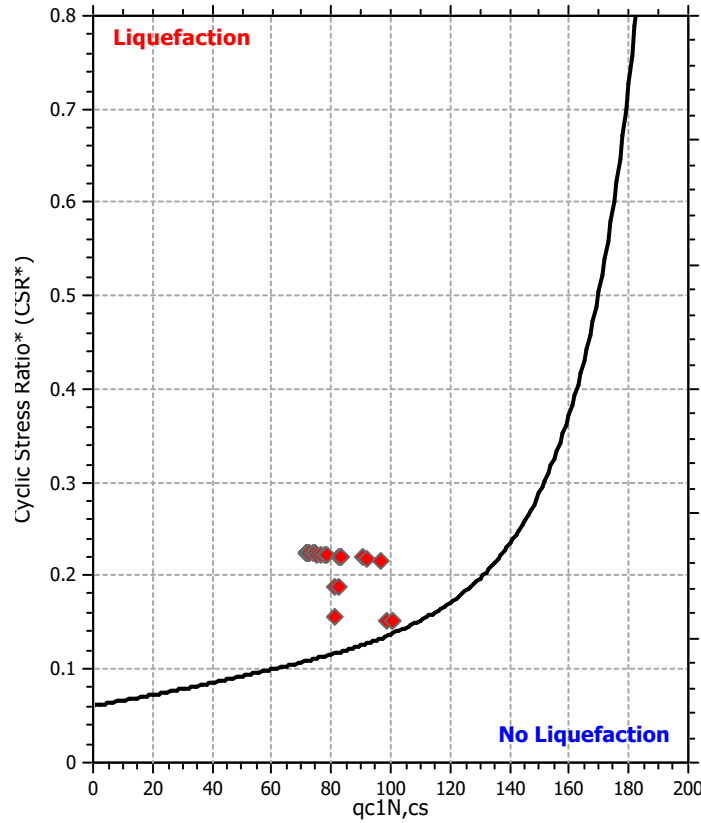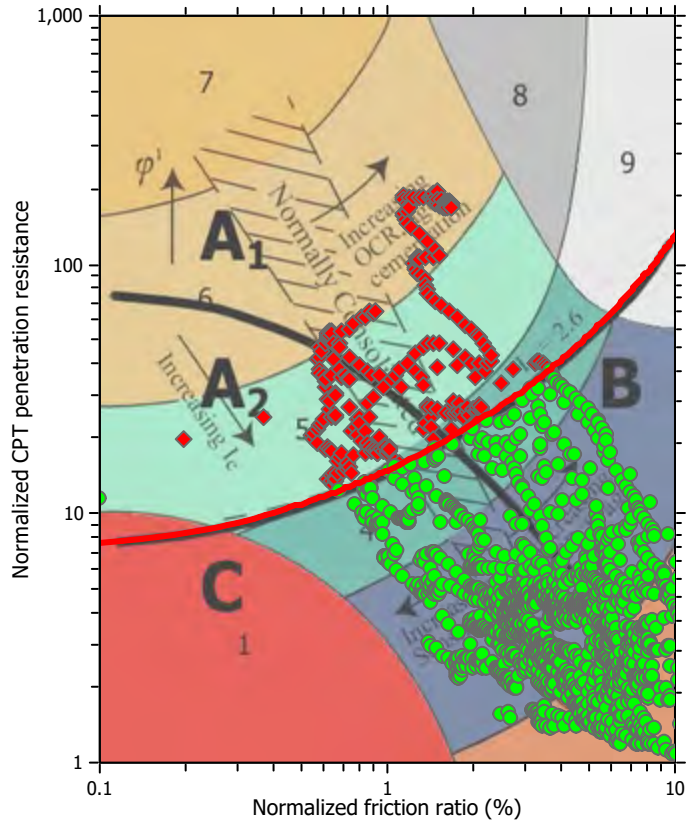

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

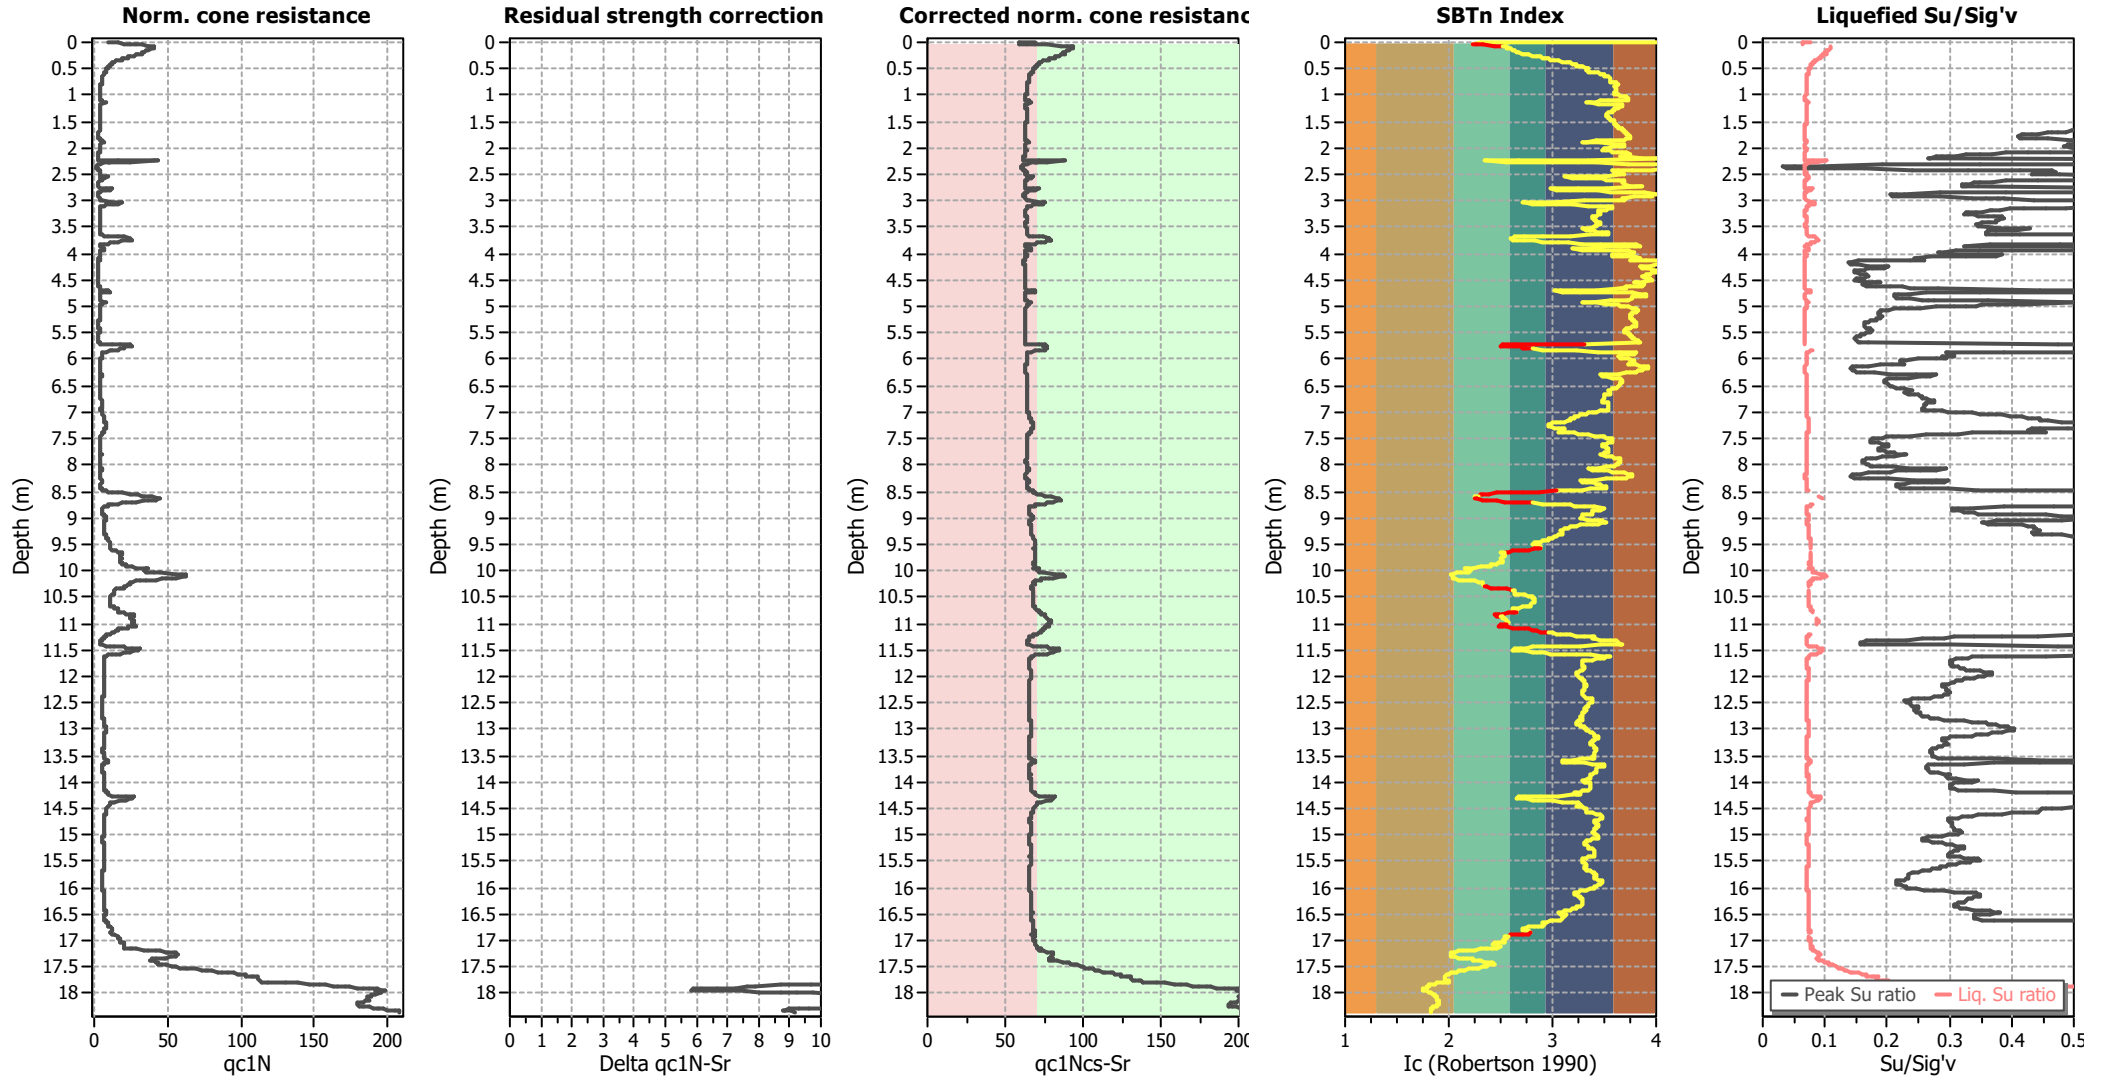

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

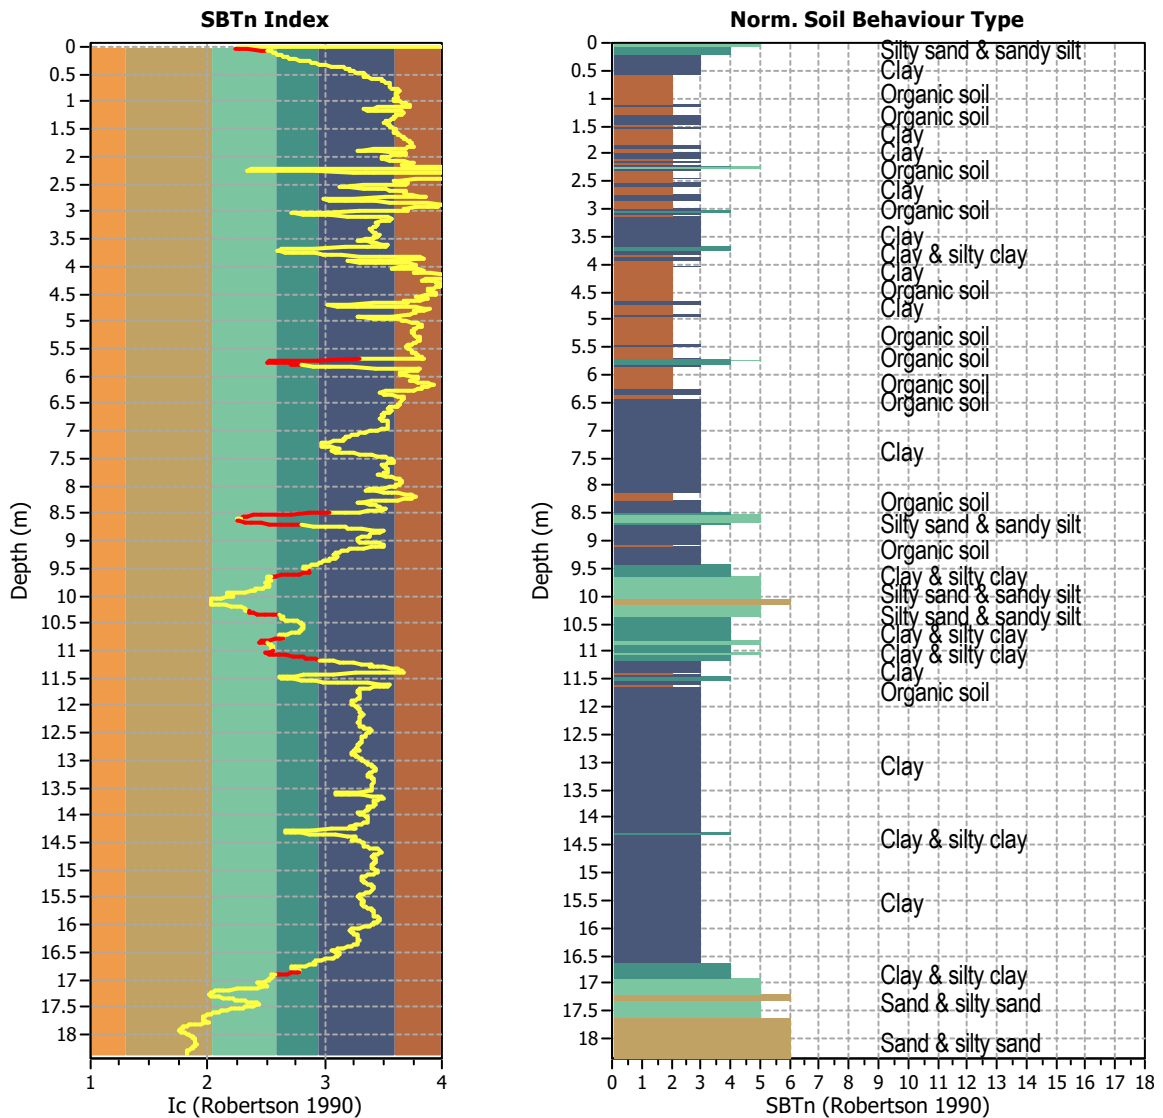


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1837
 Total points excluded: 95
 Exclusion percentage: 5.17%
 Number of layers detected: 12


Estimation of post-earthquake settlements

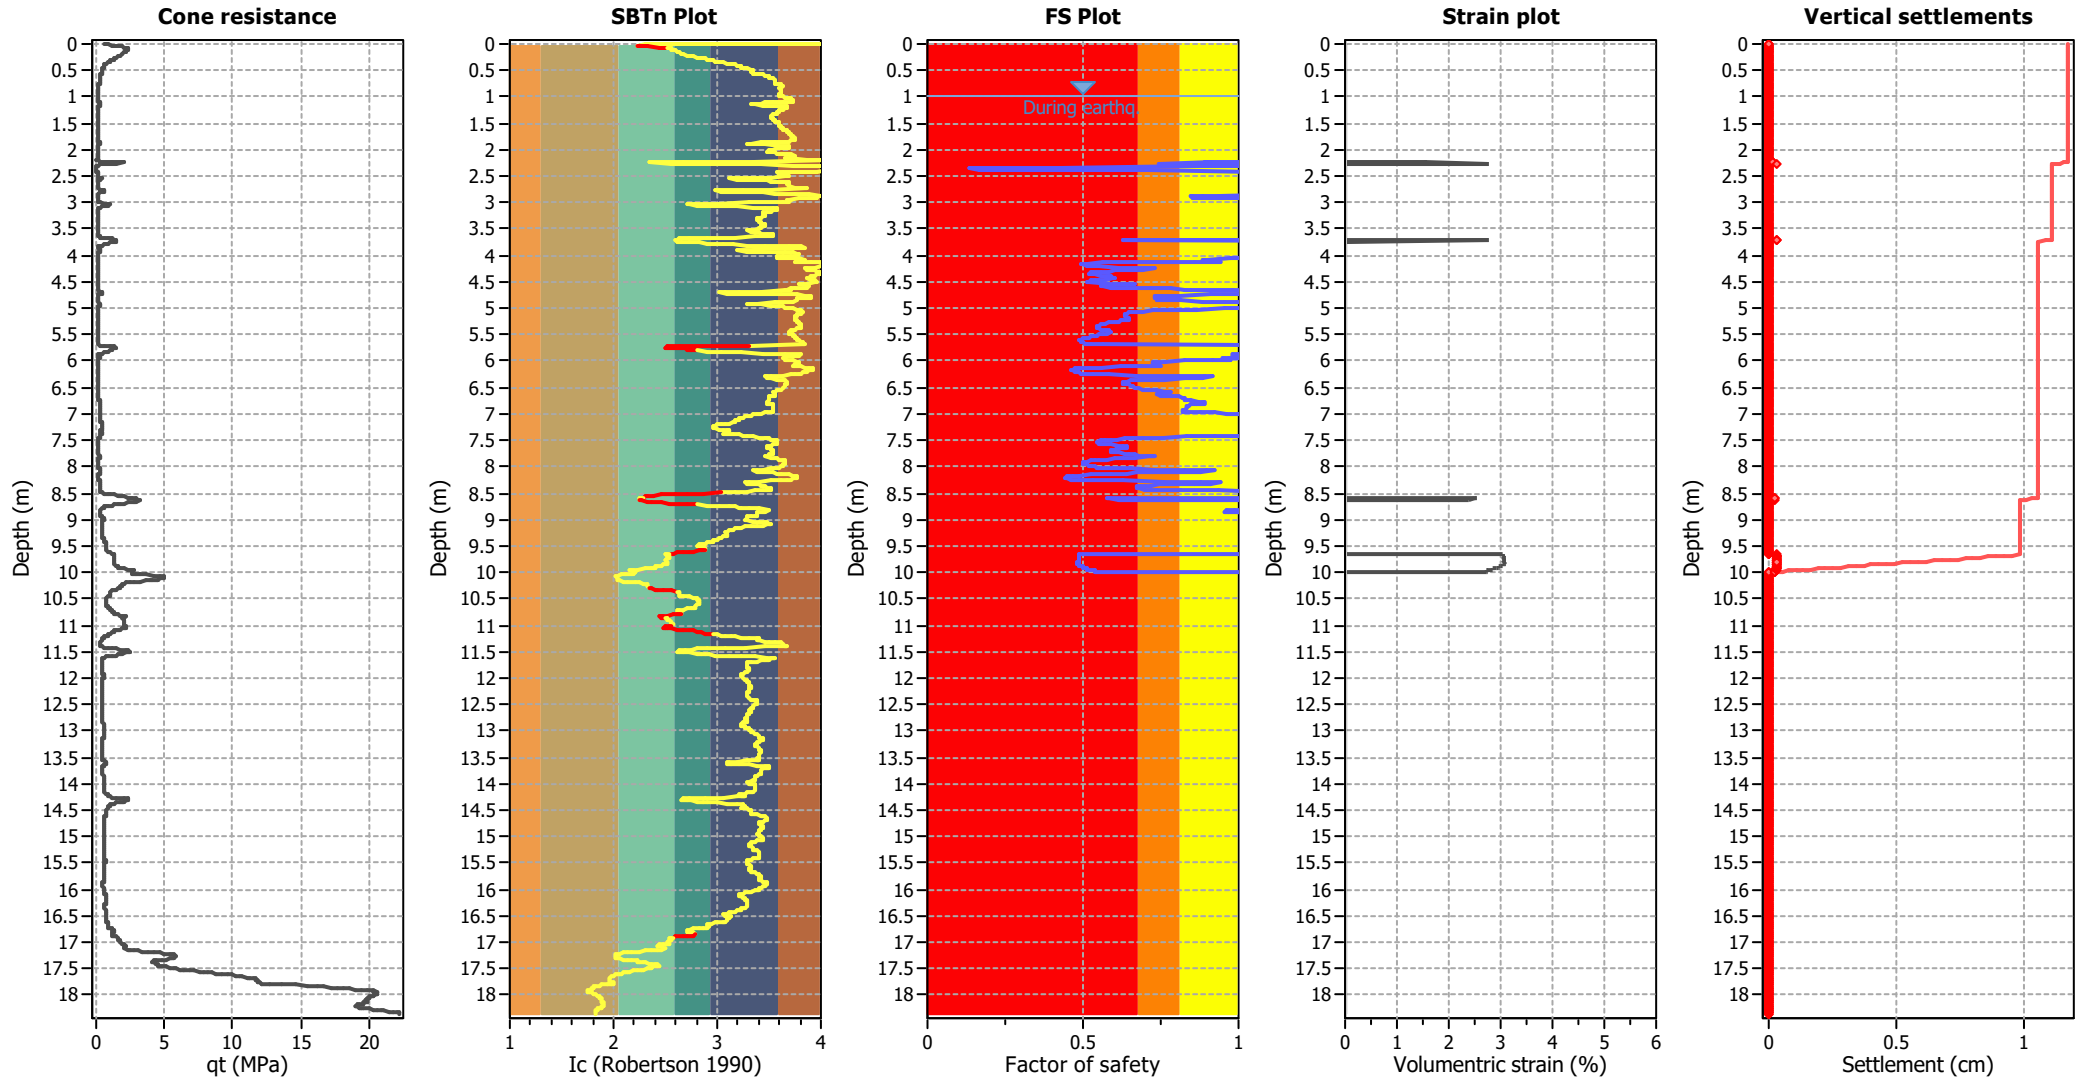

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

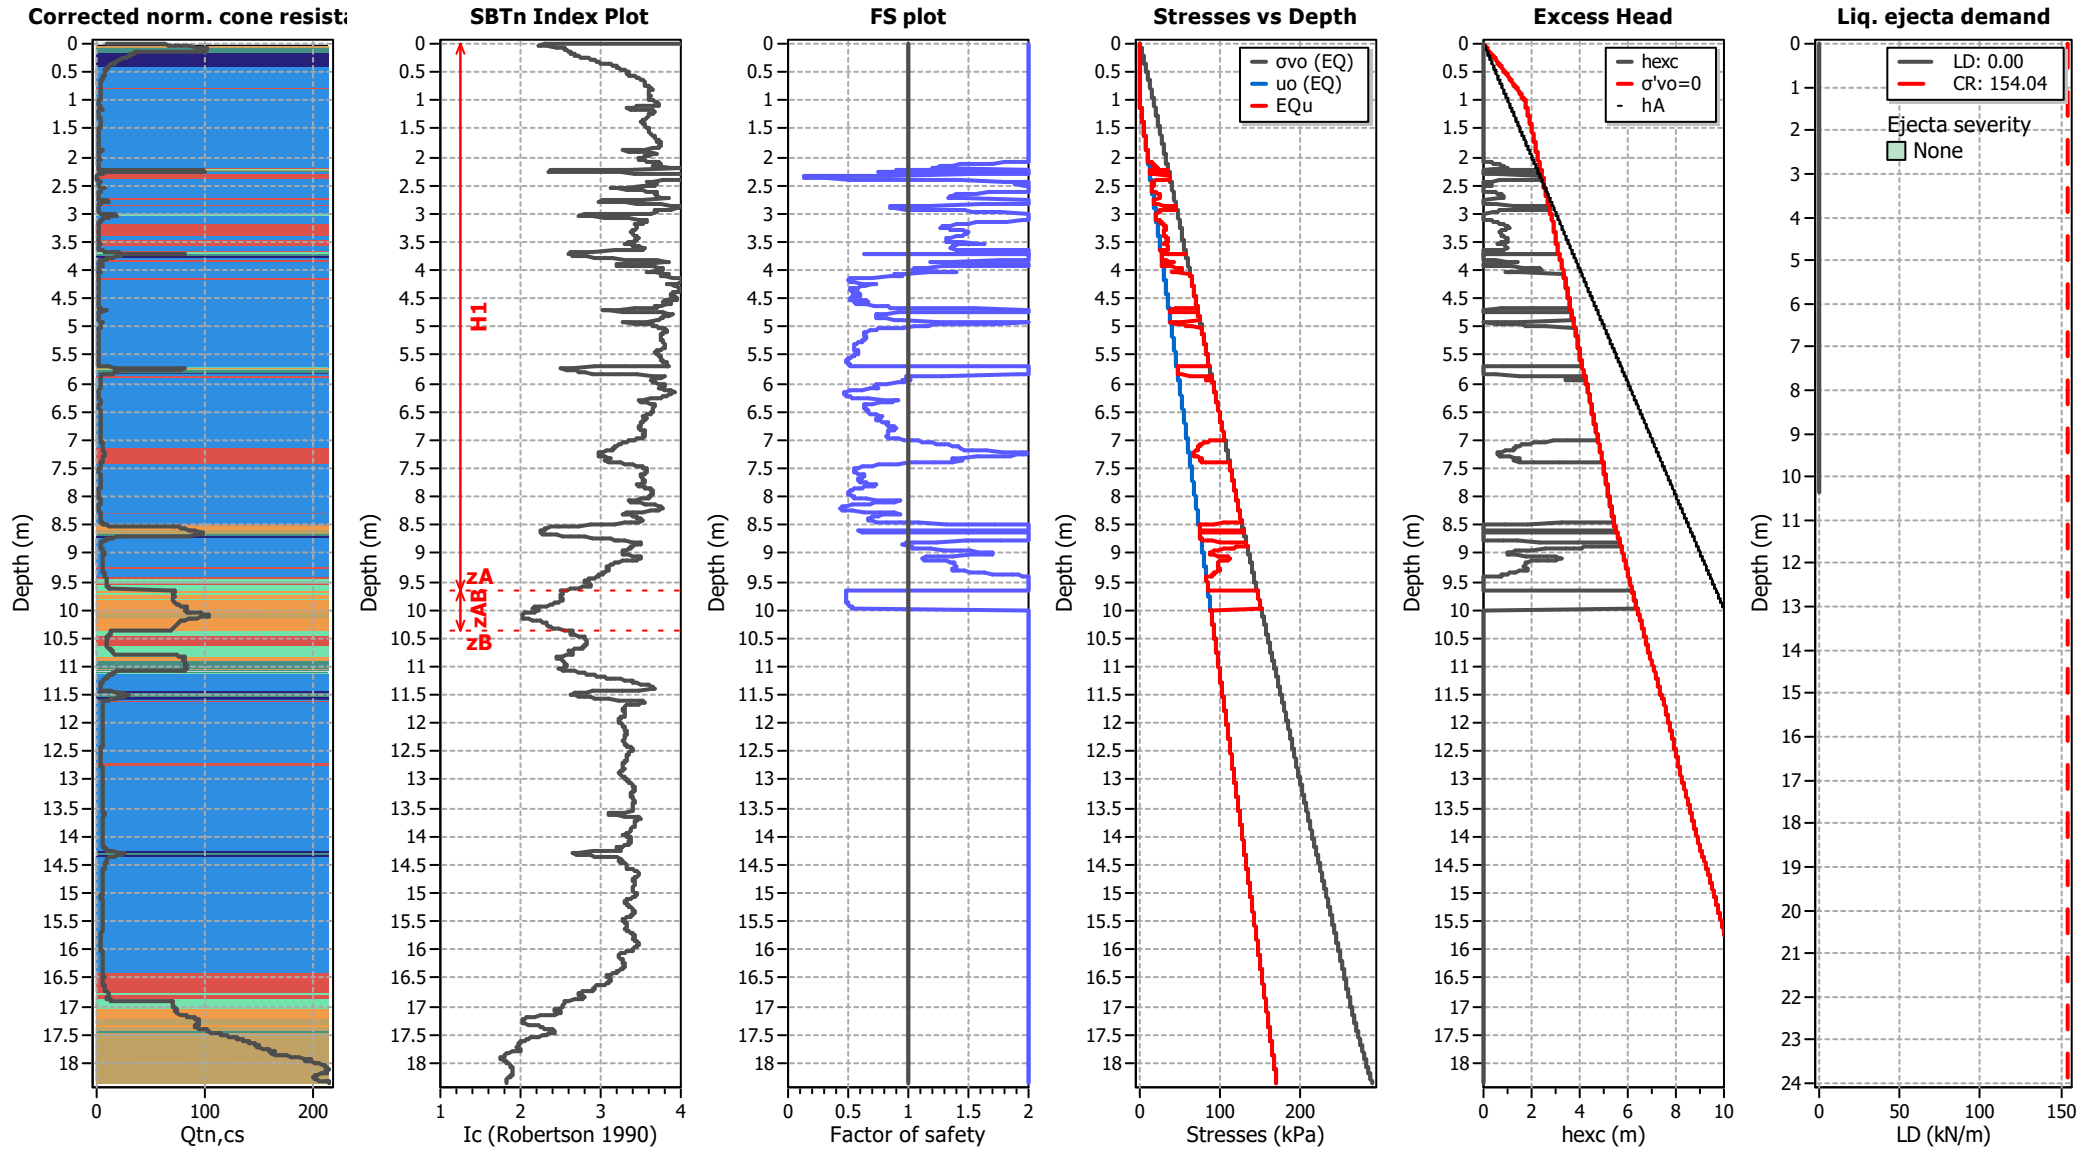

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT22

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

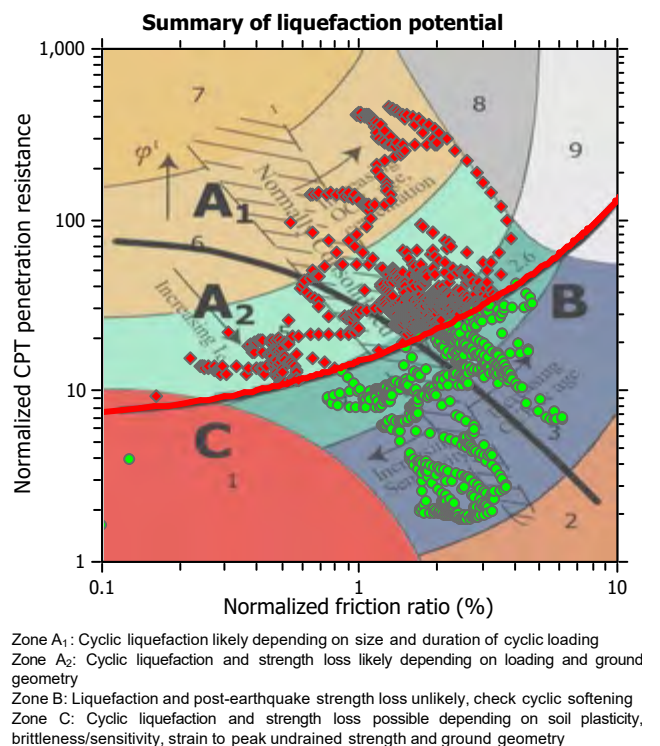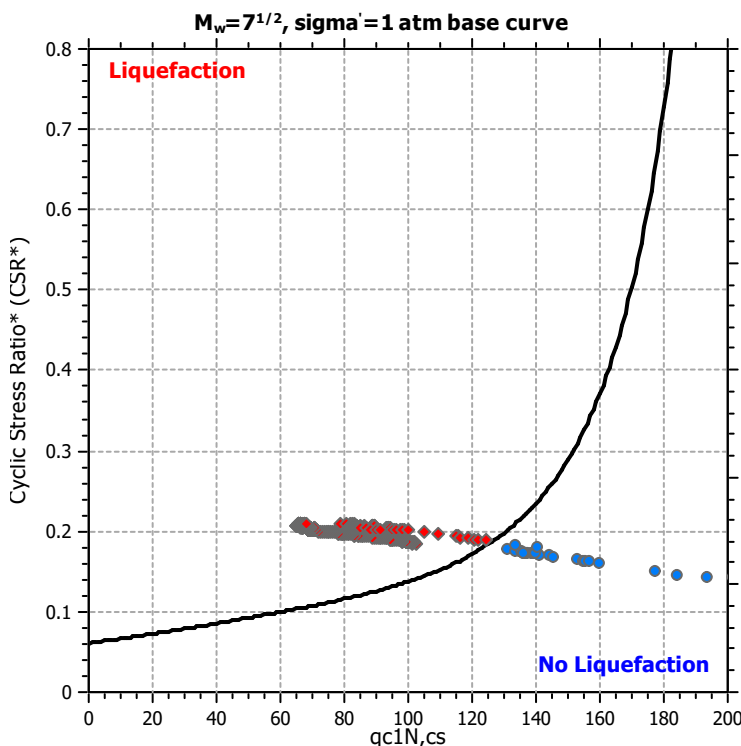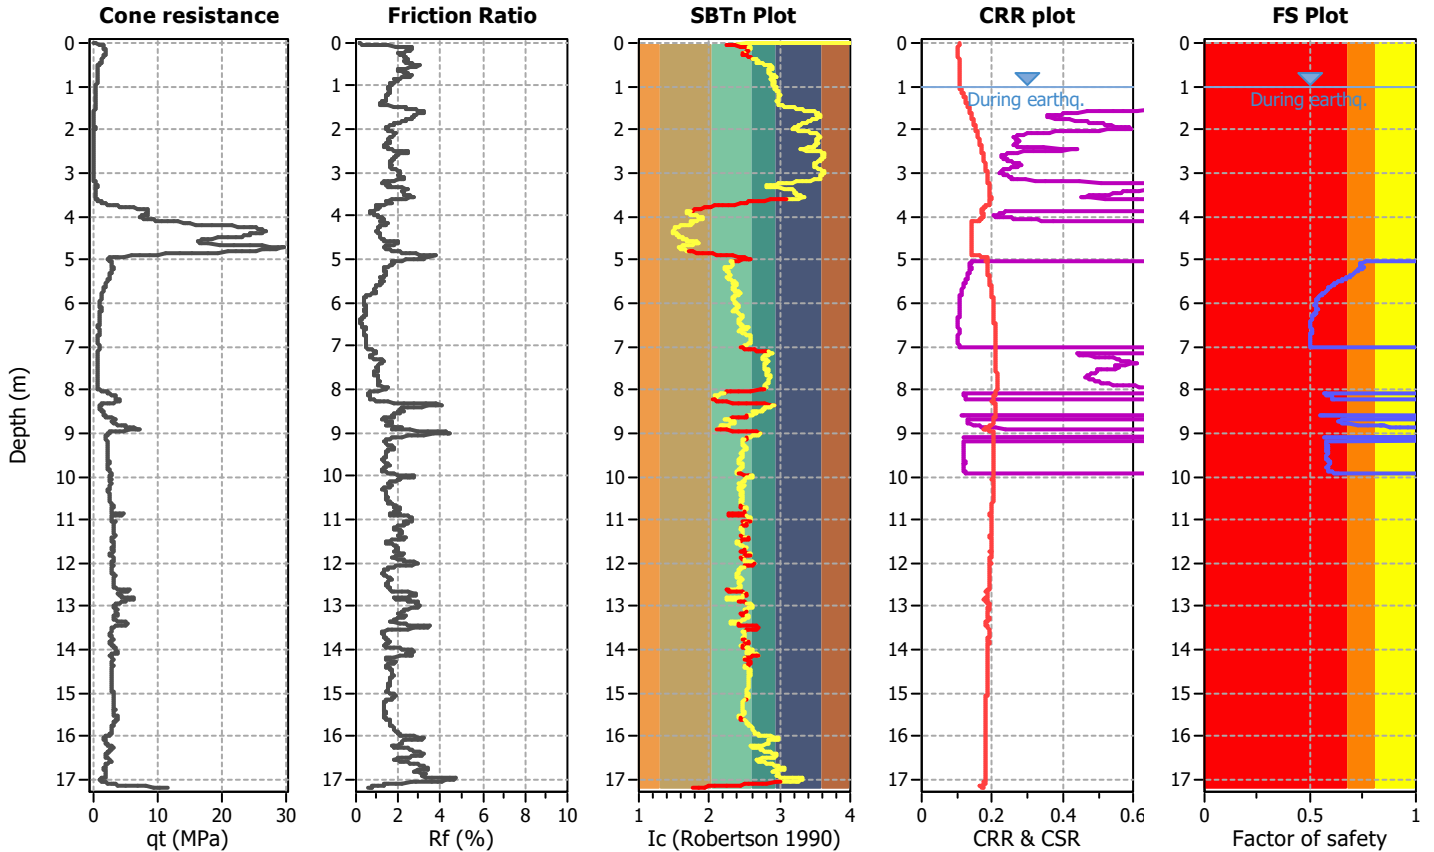

CPT basic interpretation plots

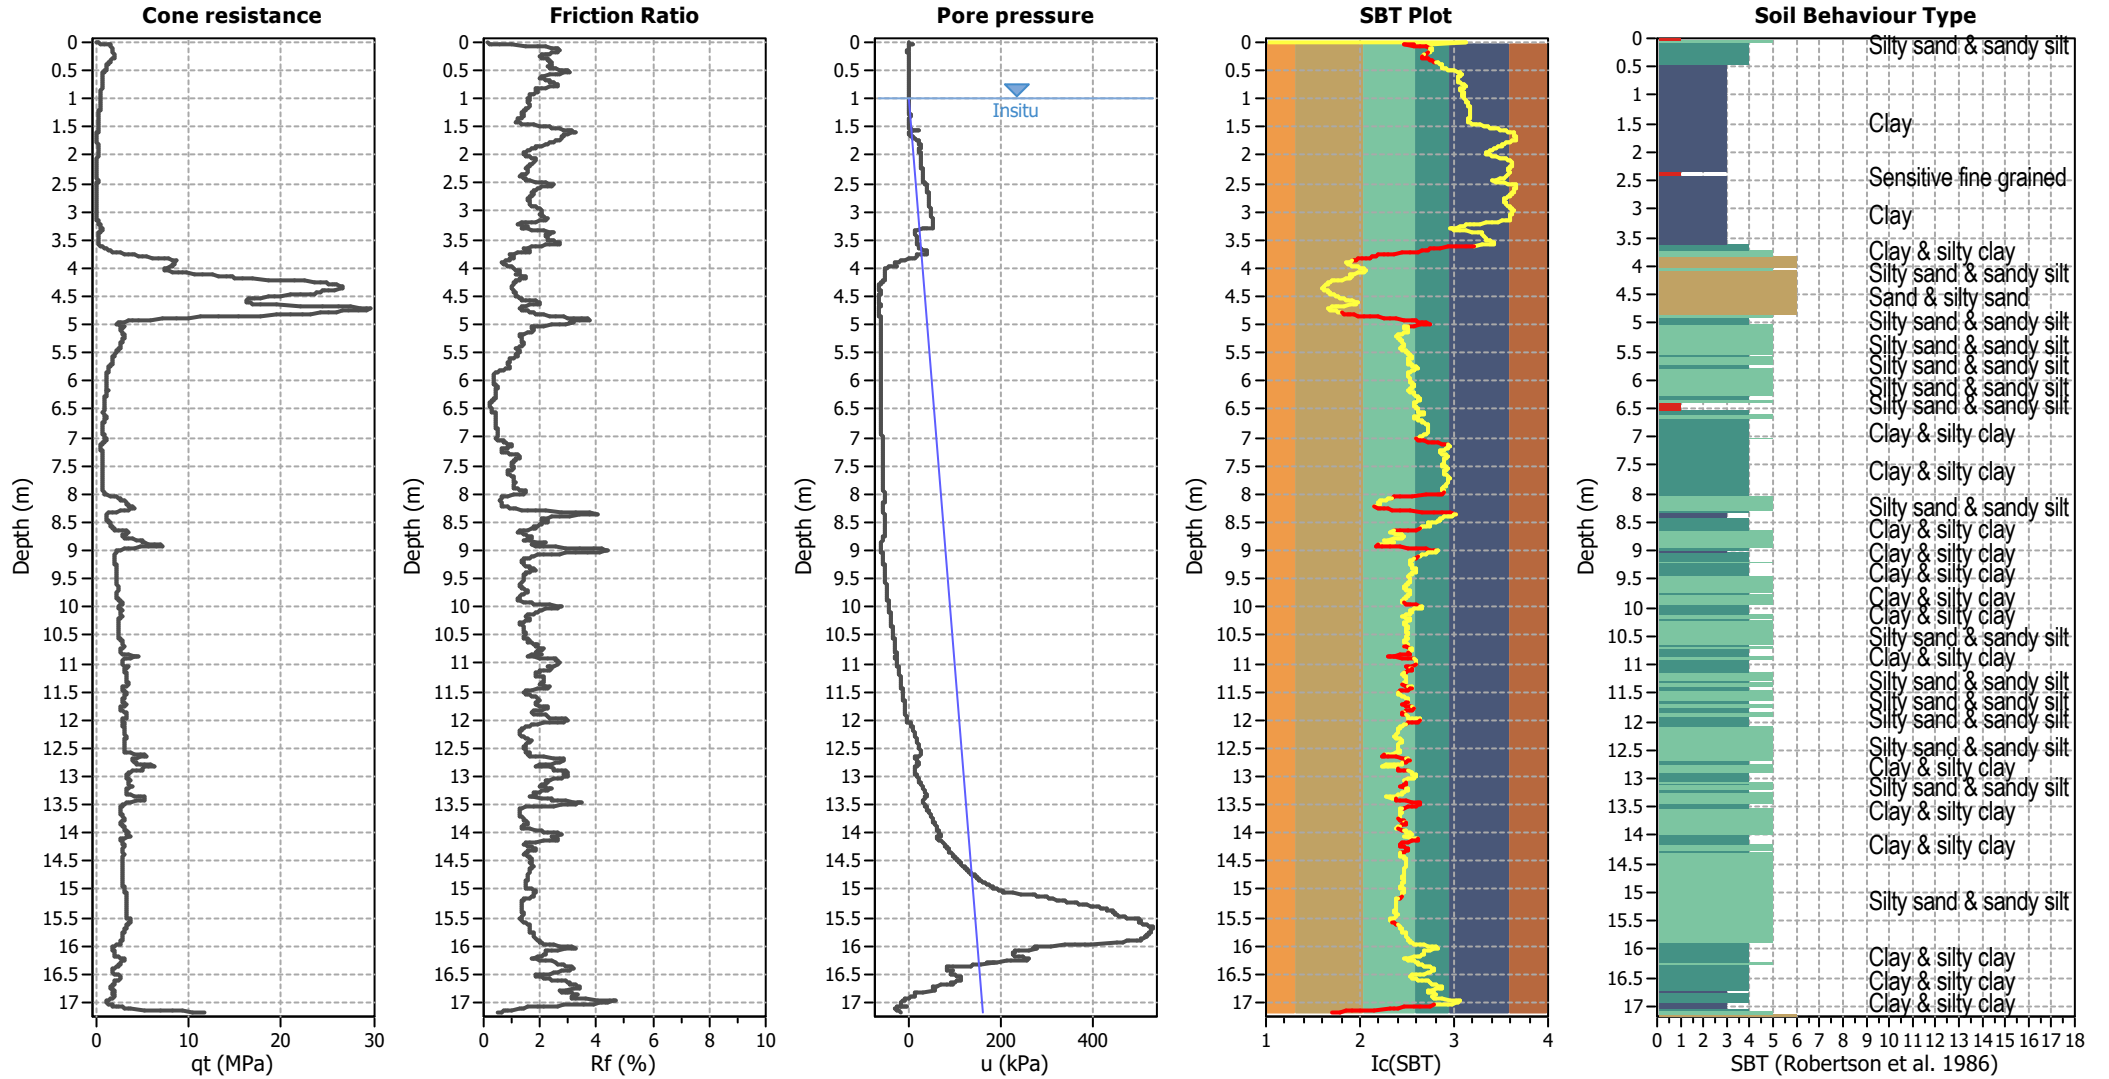


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

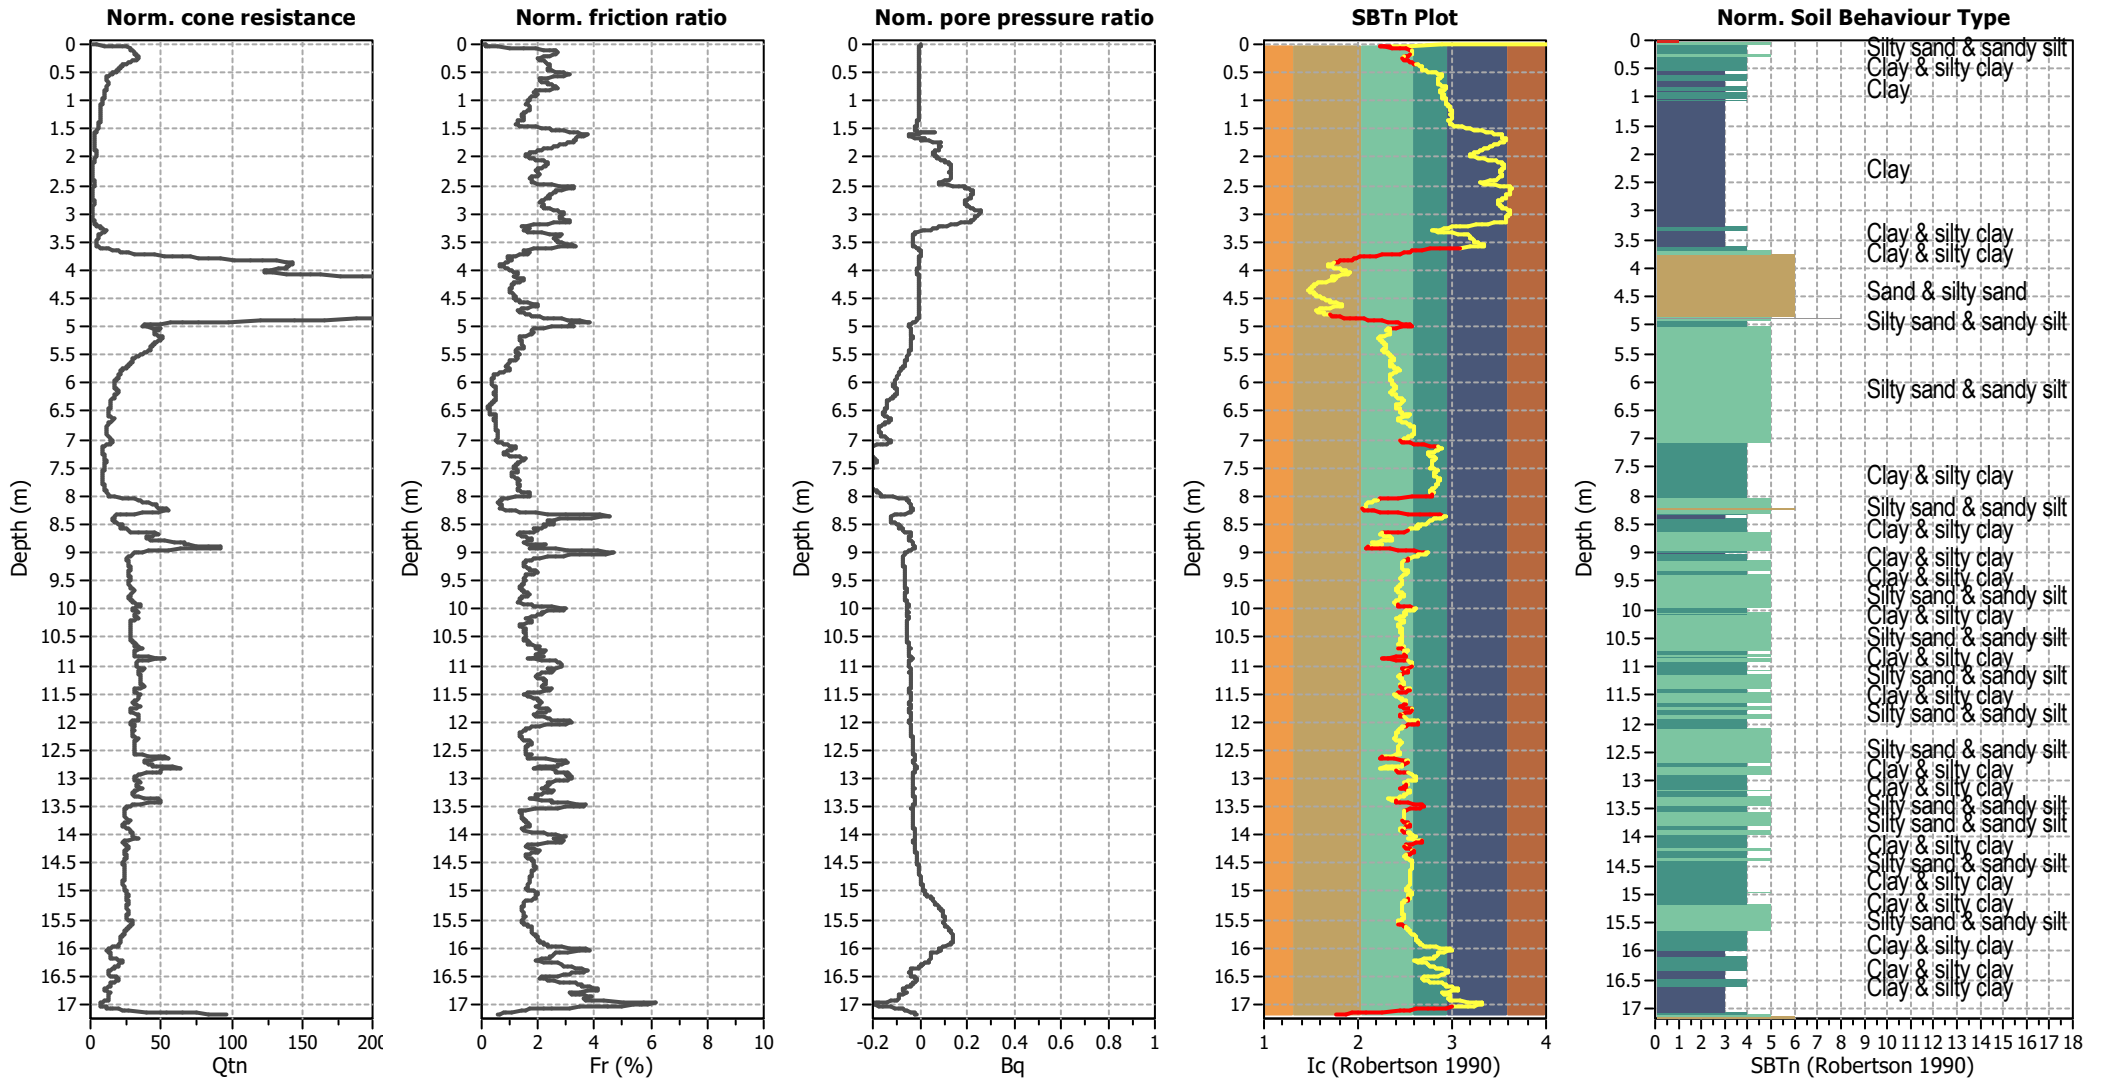


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

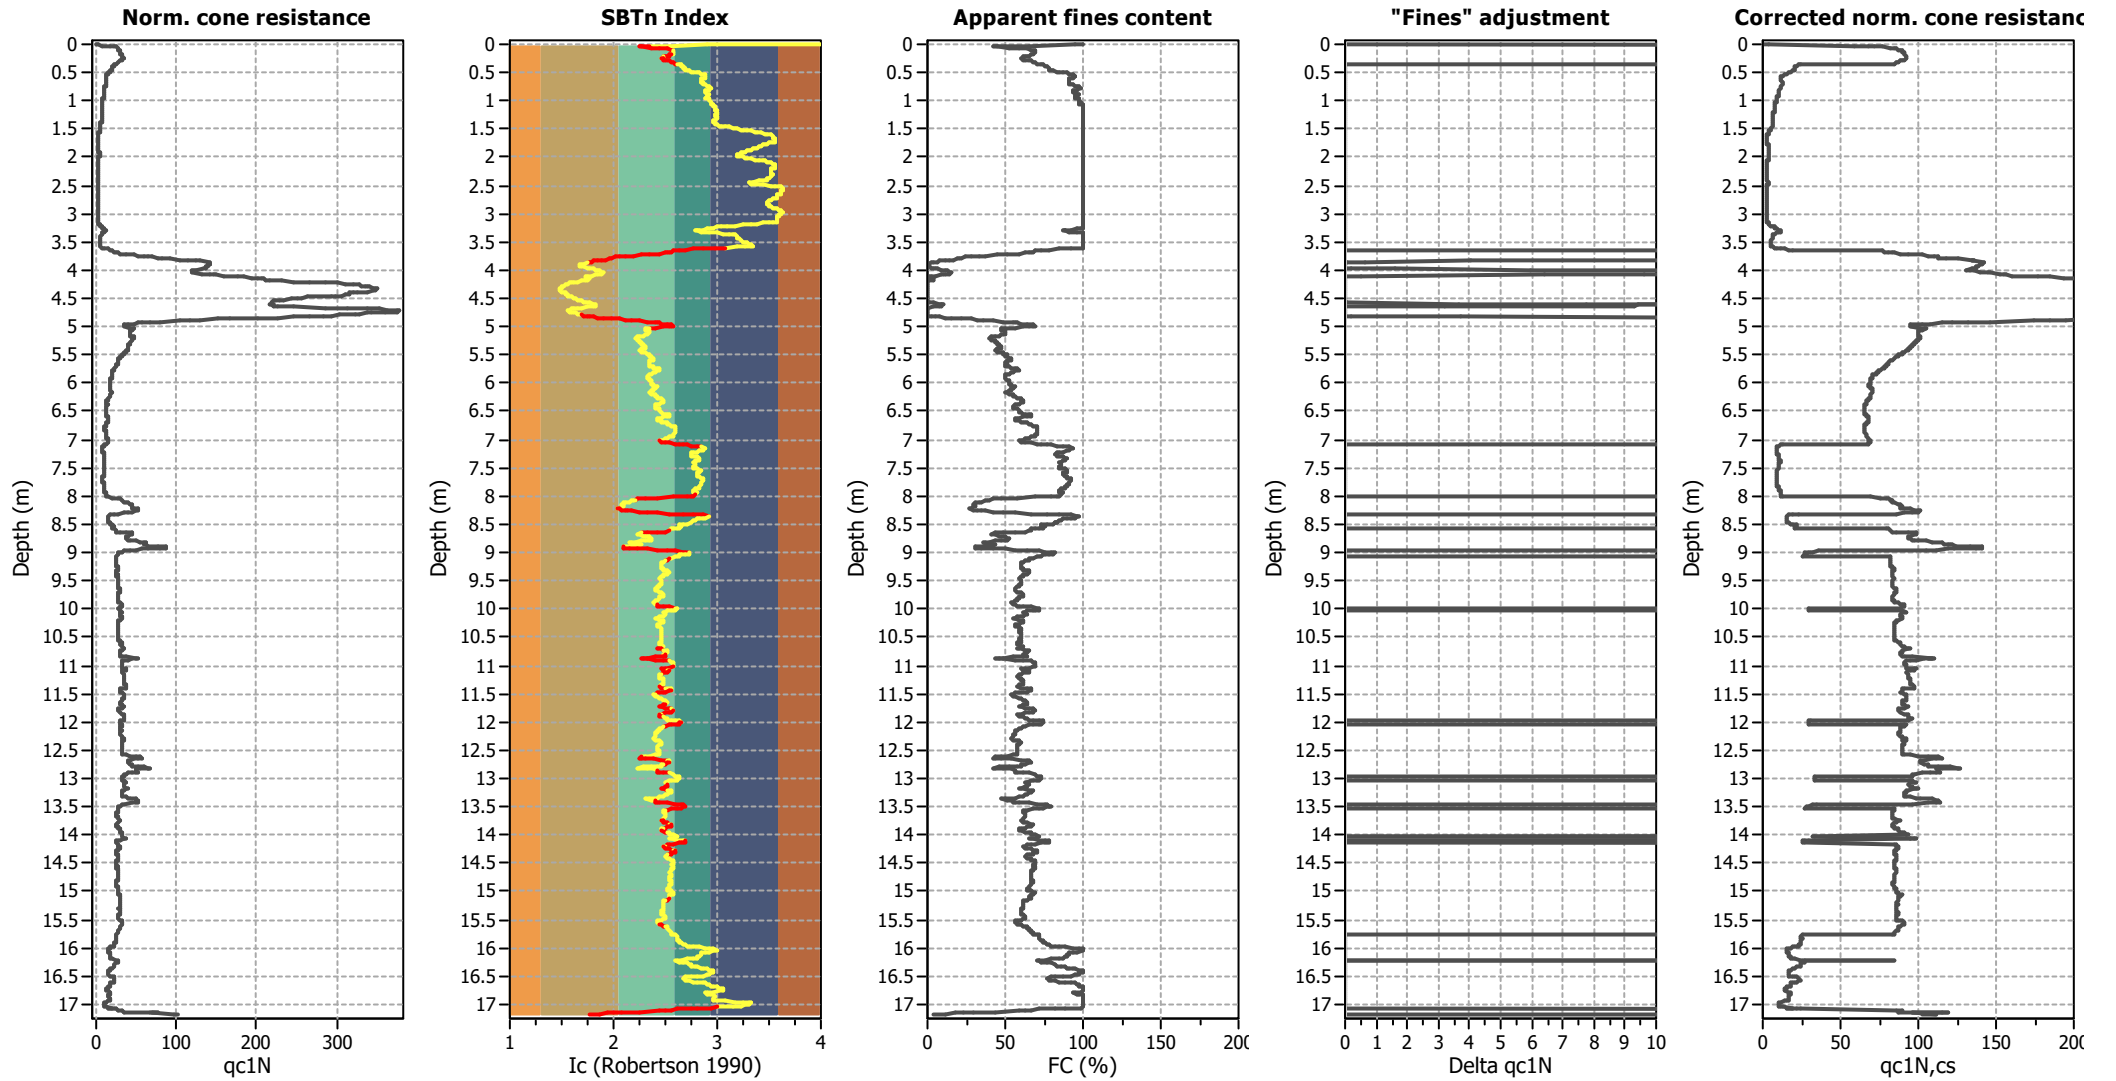

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

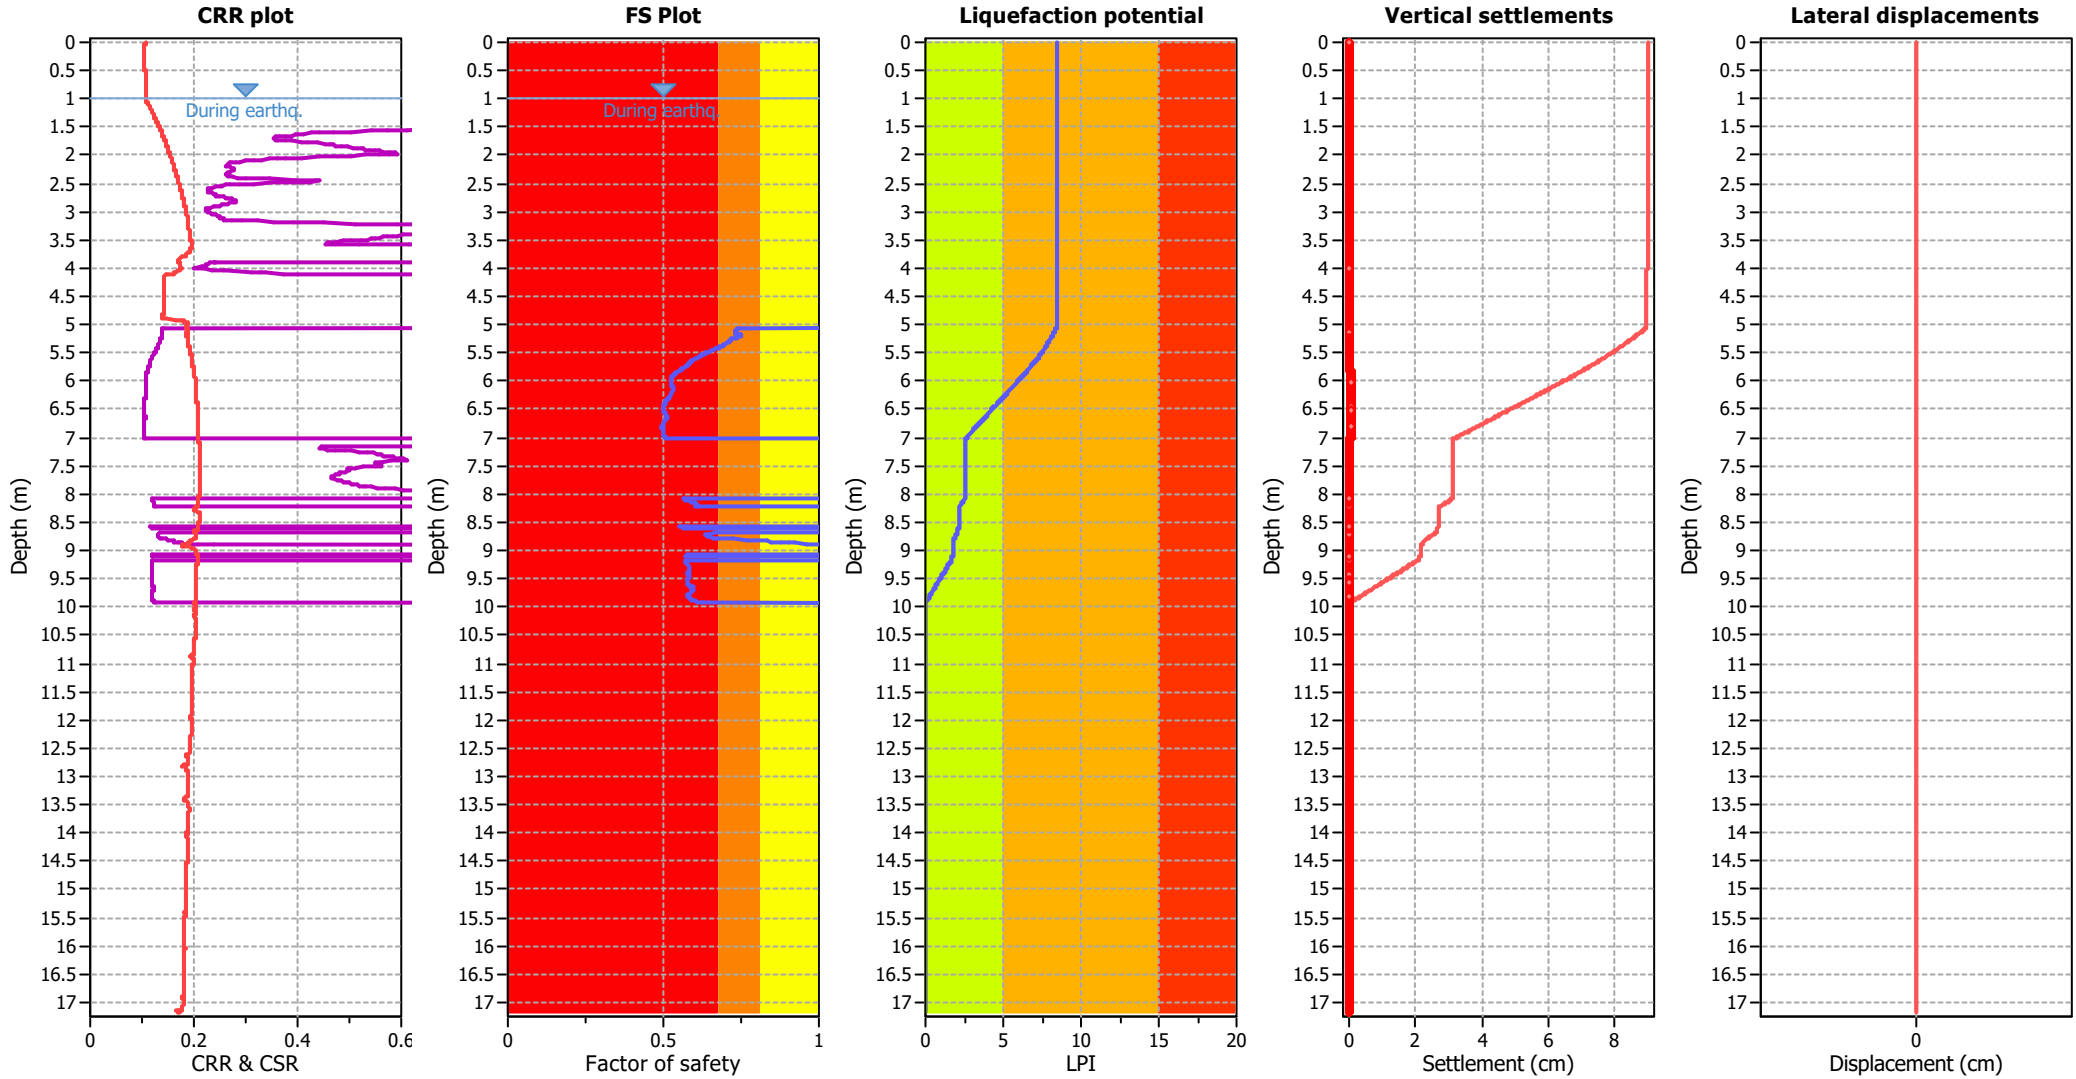

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m
Fines correction method:	B&I (2014)	Average results interval:	3
Points to test:	Based on Ic value	Ic cut-off value:	2.60
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT
Peak ground acceleration:	0.19	Use fill:	No
Depth to water table (insitu):	1.00 m	Fill height:	N/A

Fill weight:	N/A
Transition detect. applied:	Yes
K_σ applied:	Yes
Clay like behavior applied:	Sand & Clay
Limit depth applied:	Yes
Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

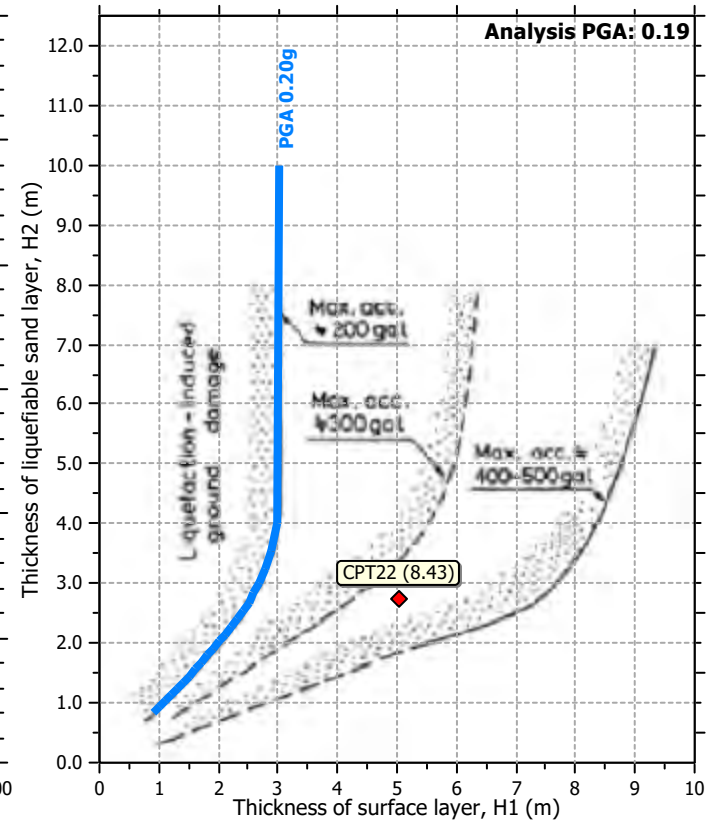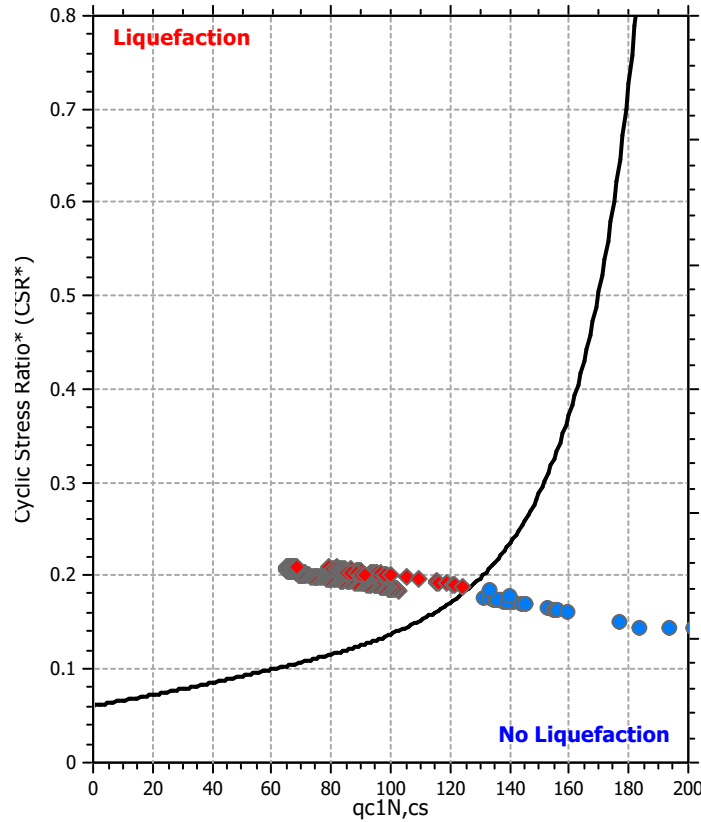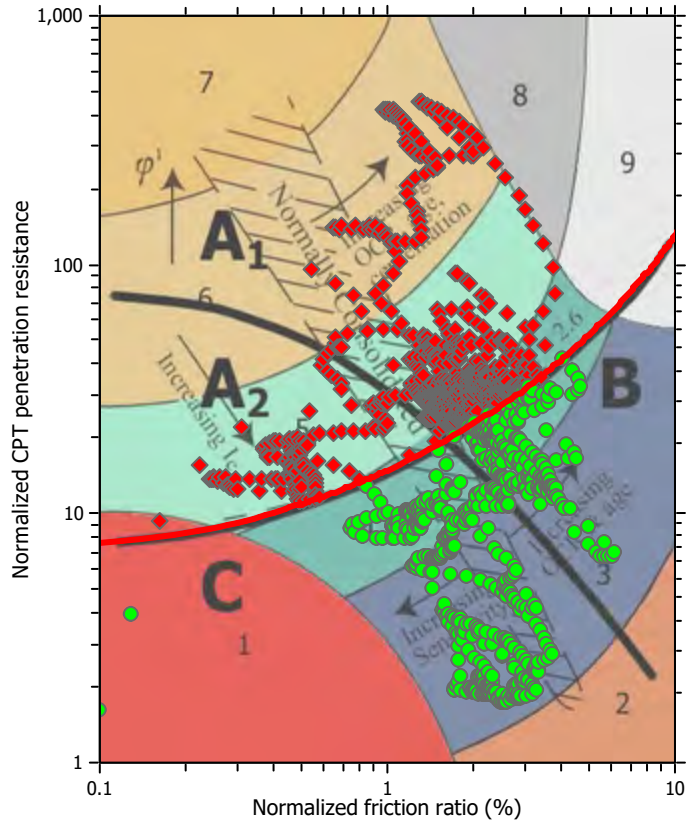

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

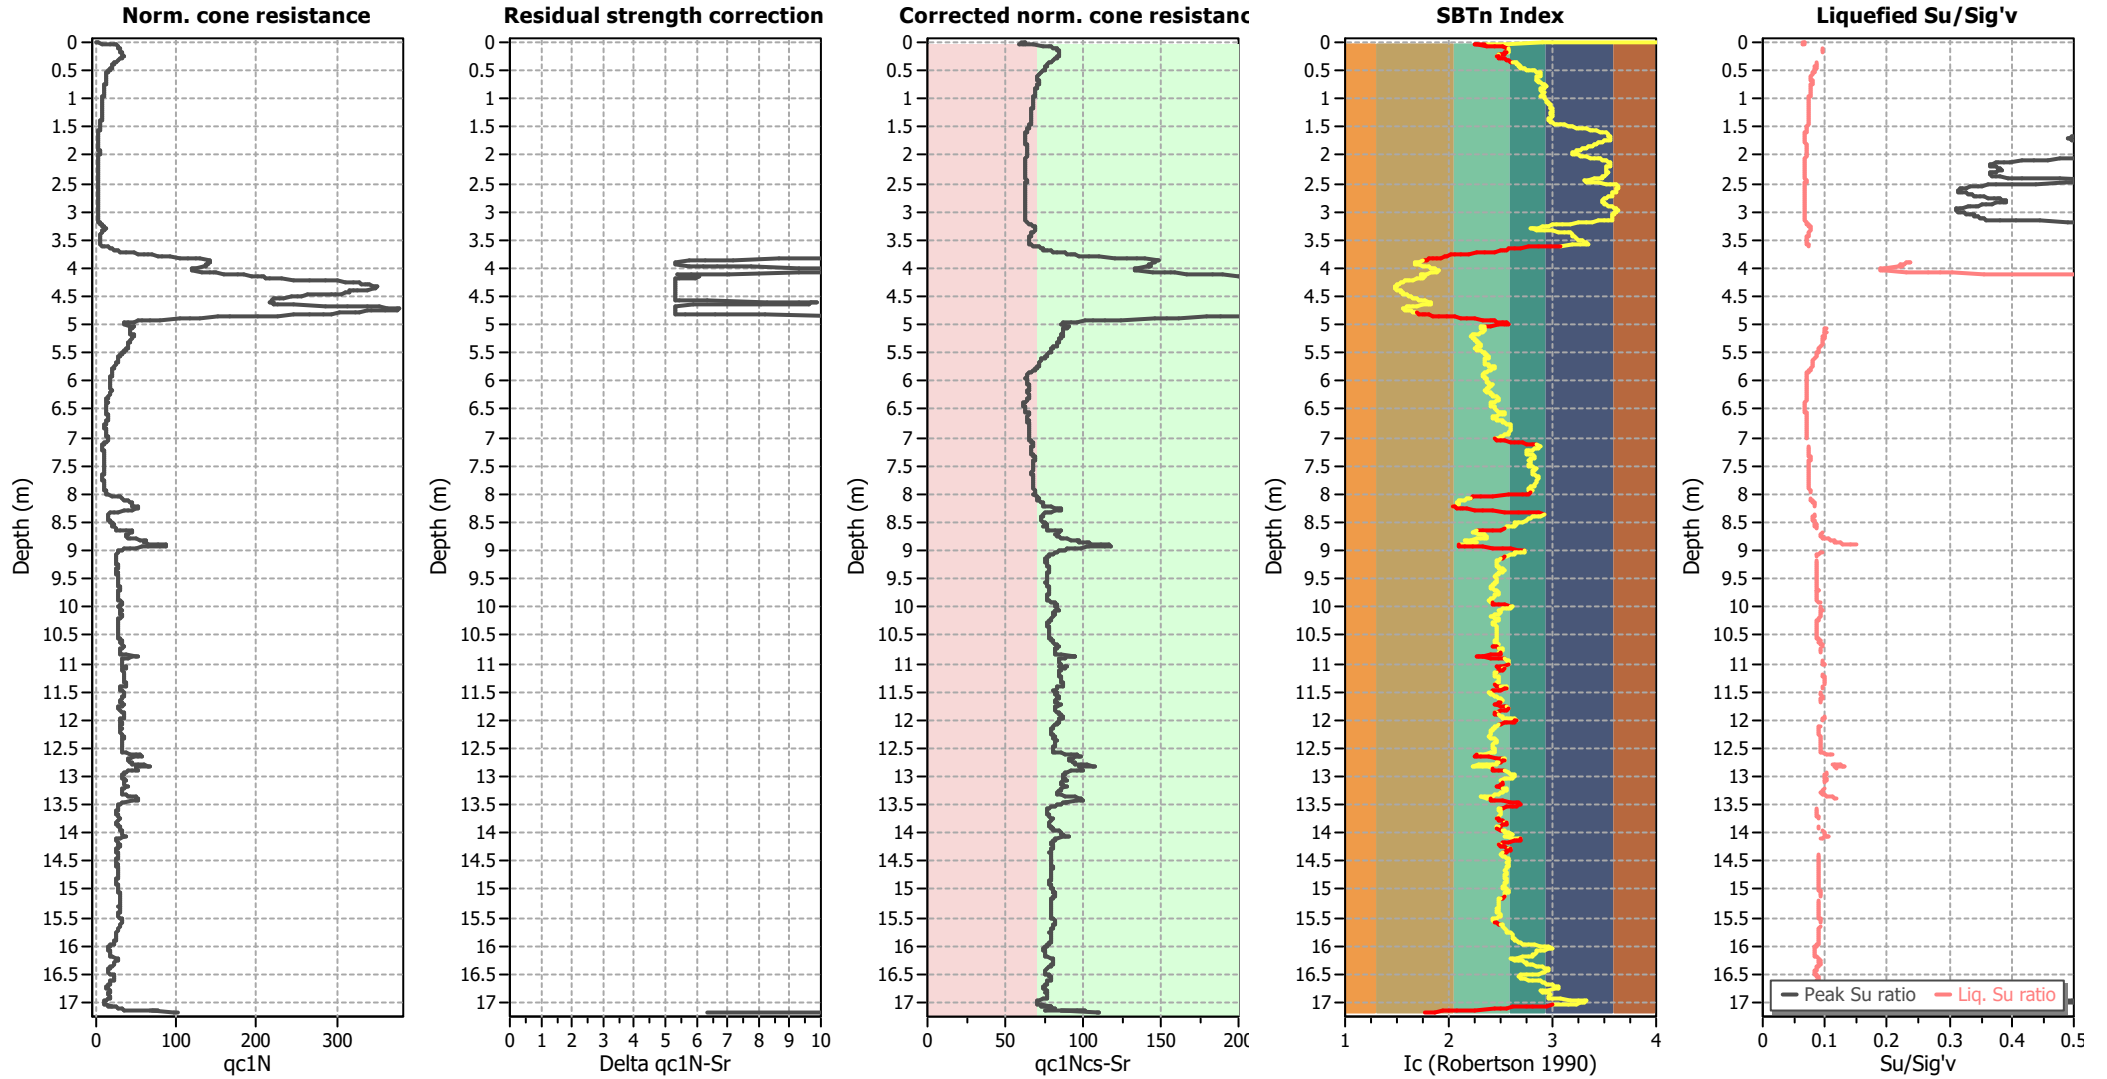

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

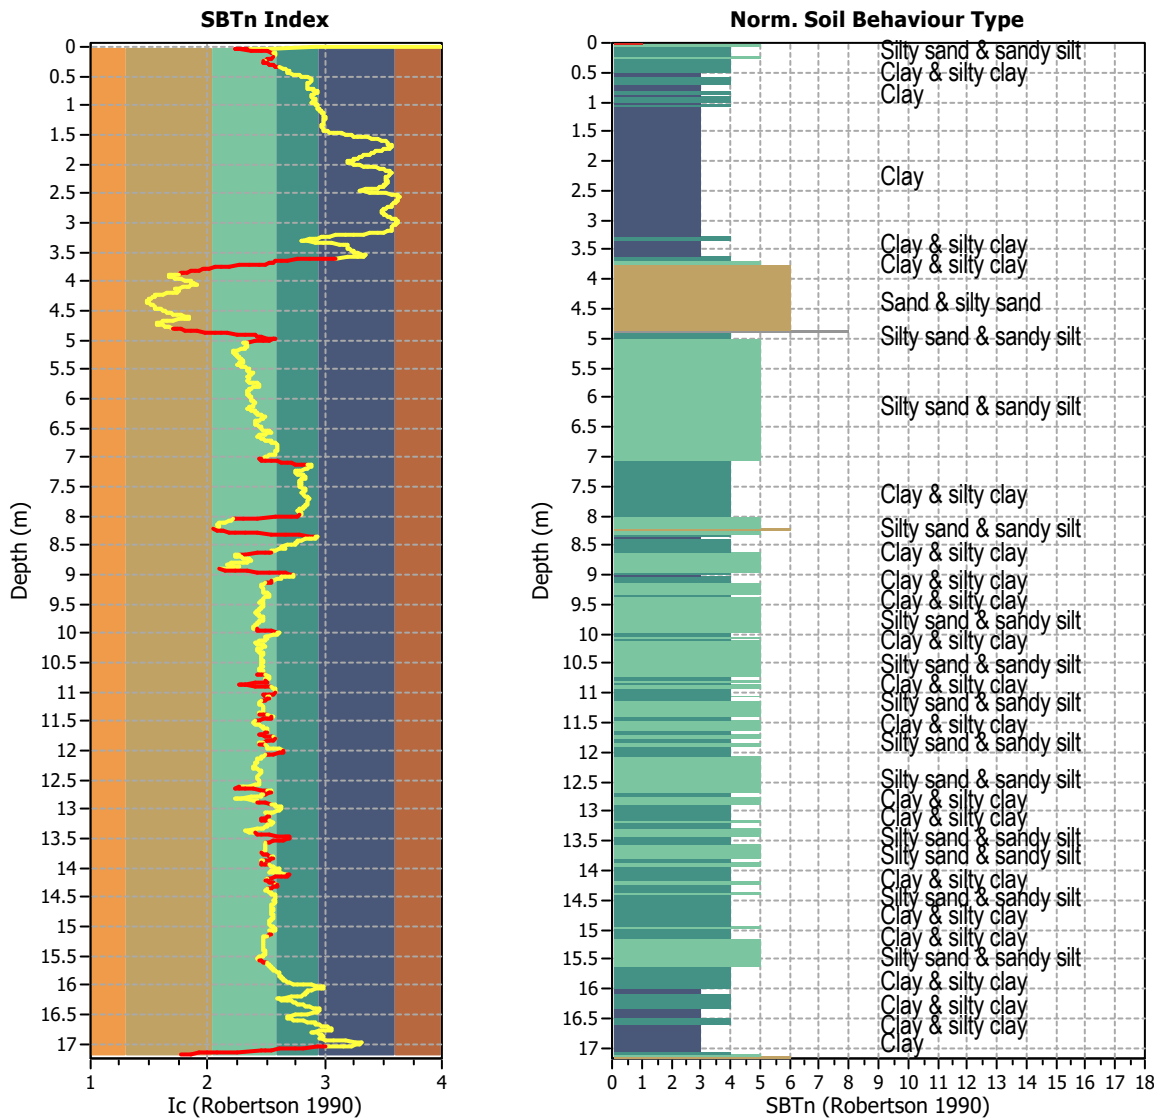


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1719
 Total points excluded: 319
 Exclusion percentage: 18.56%
 Number of layers detected: 42


Estimation of post-earthquake settlements

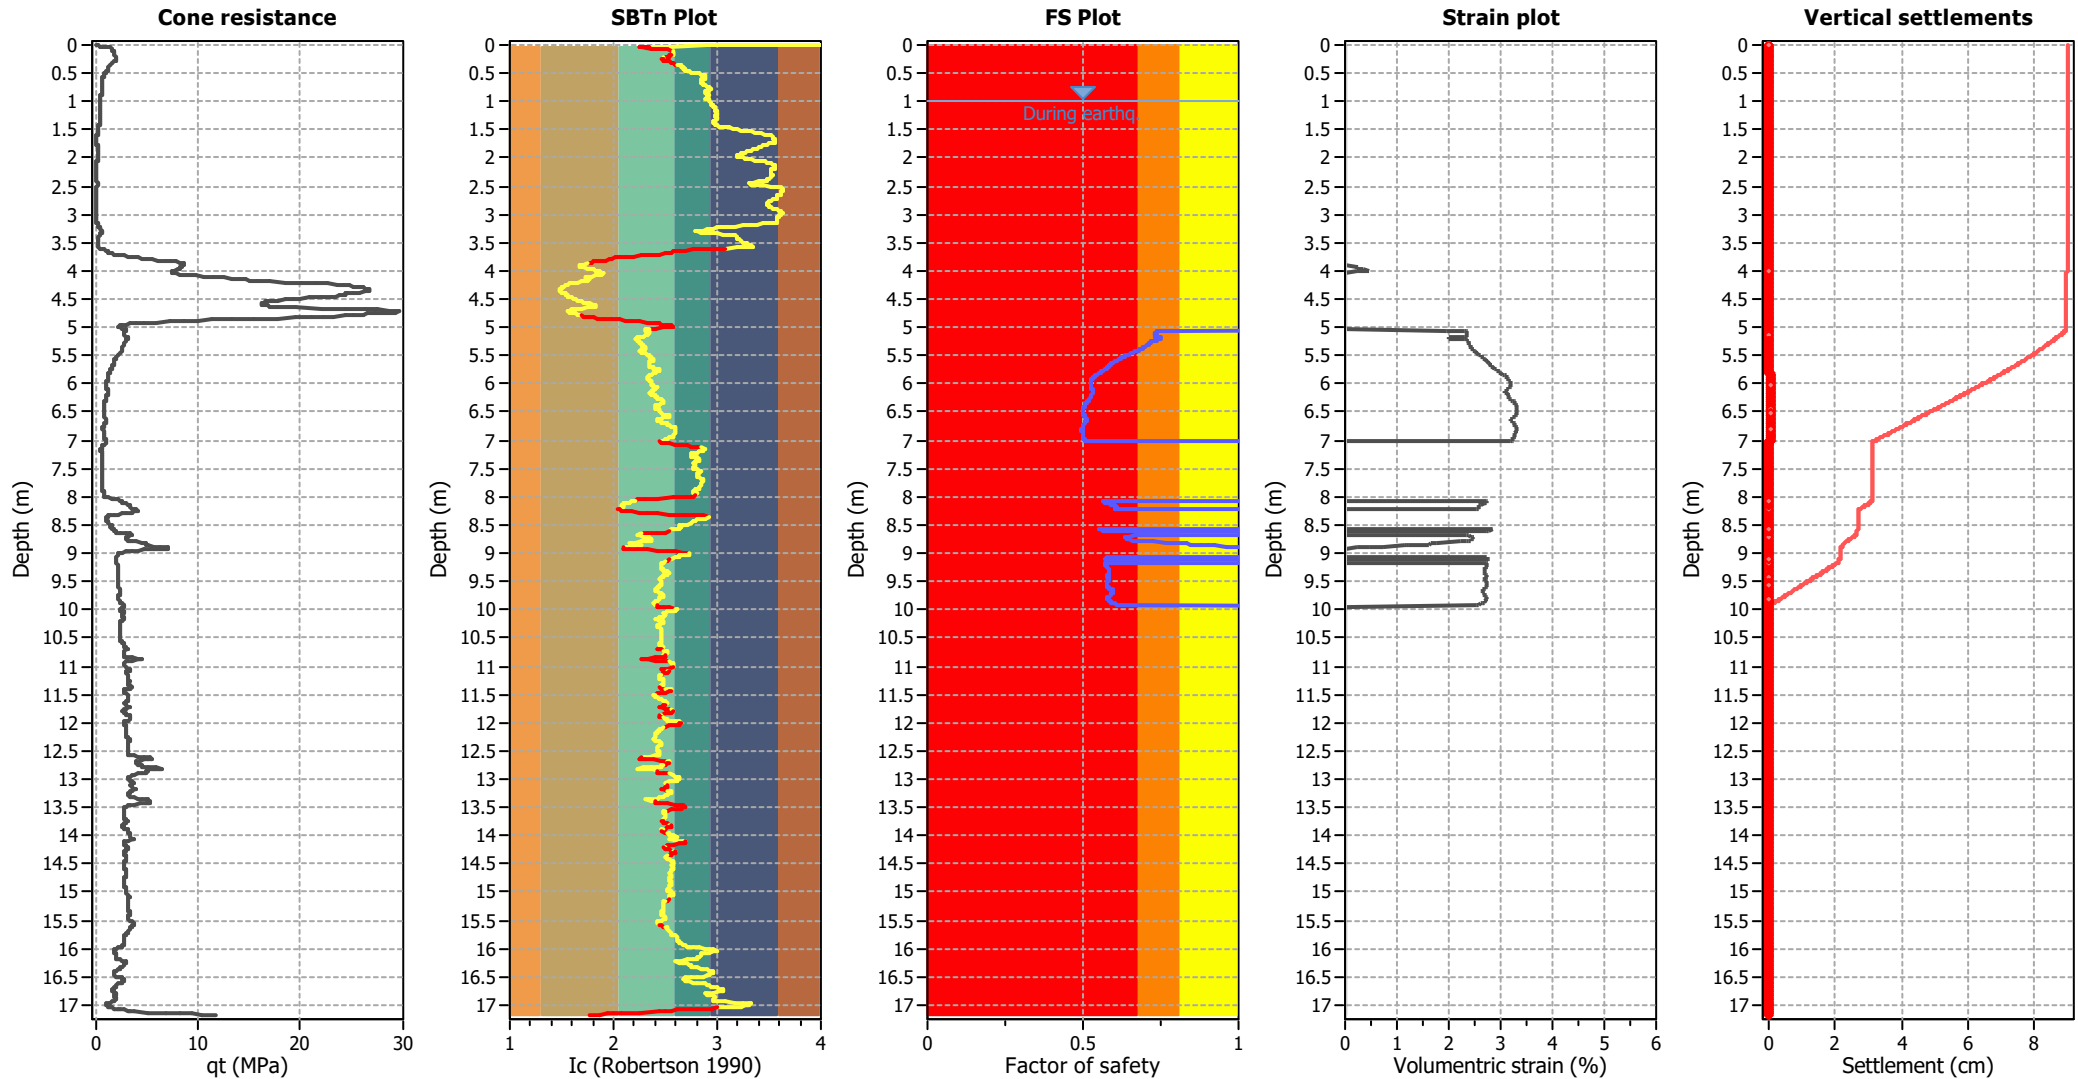

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

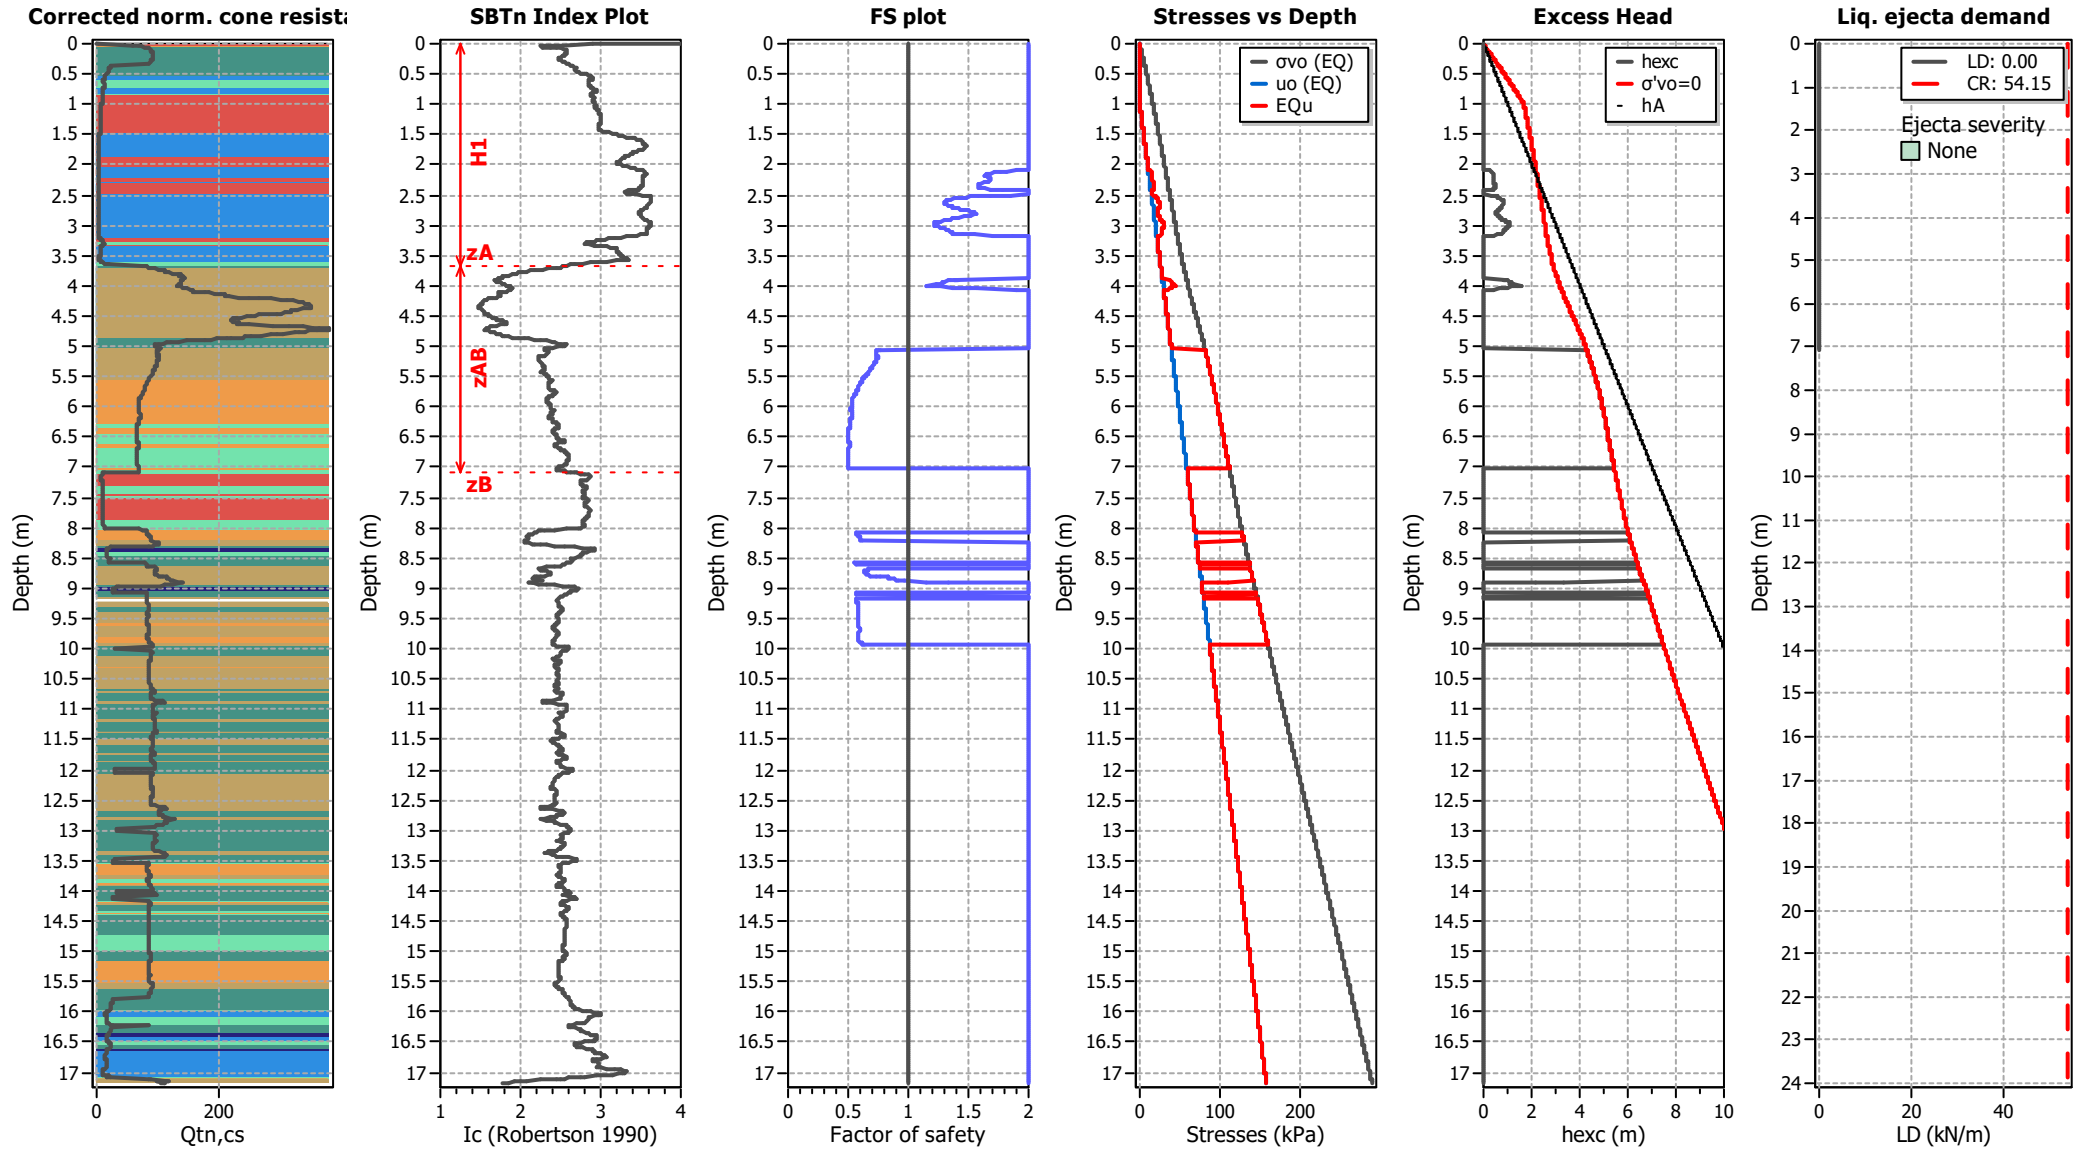

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT401

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

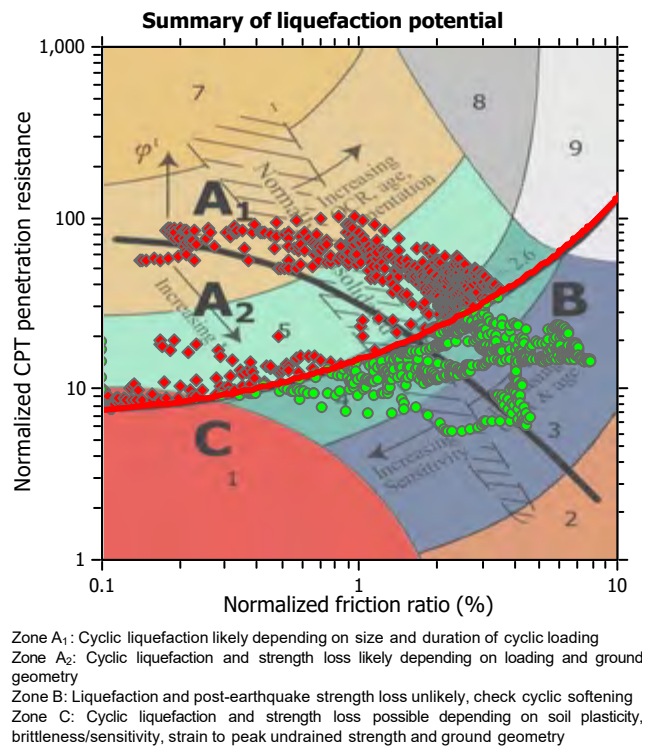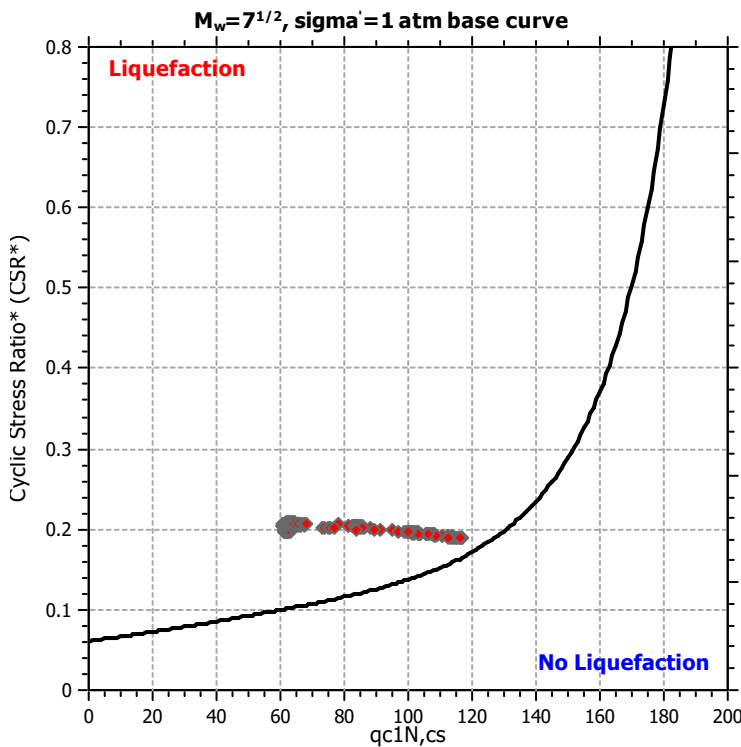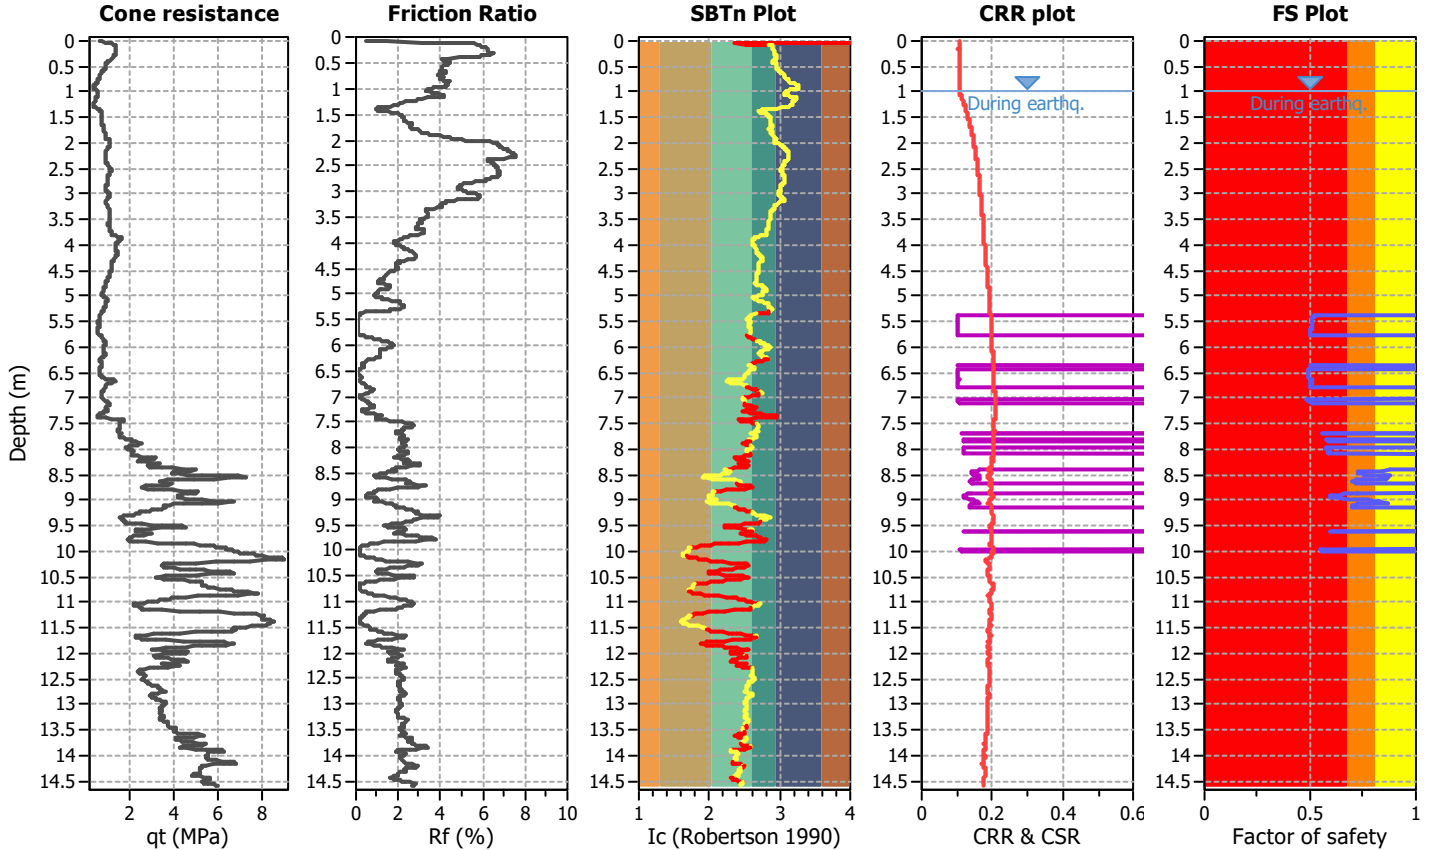

CPT basic interpretation plots

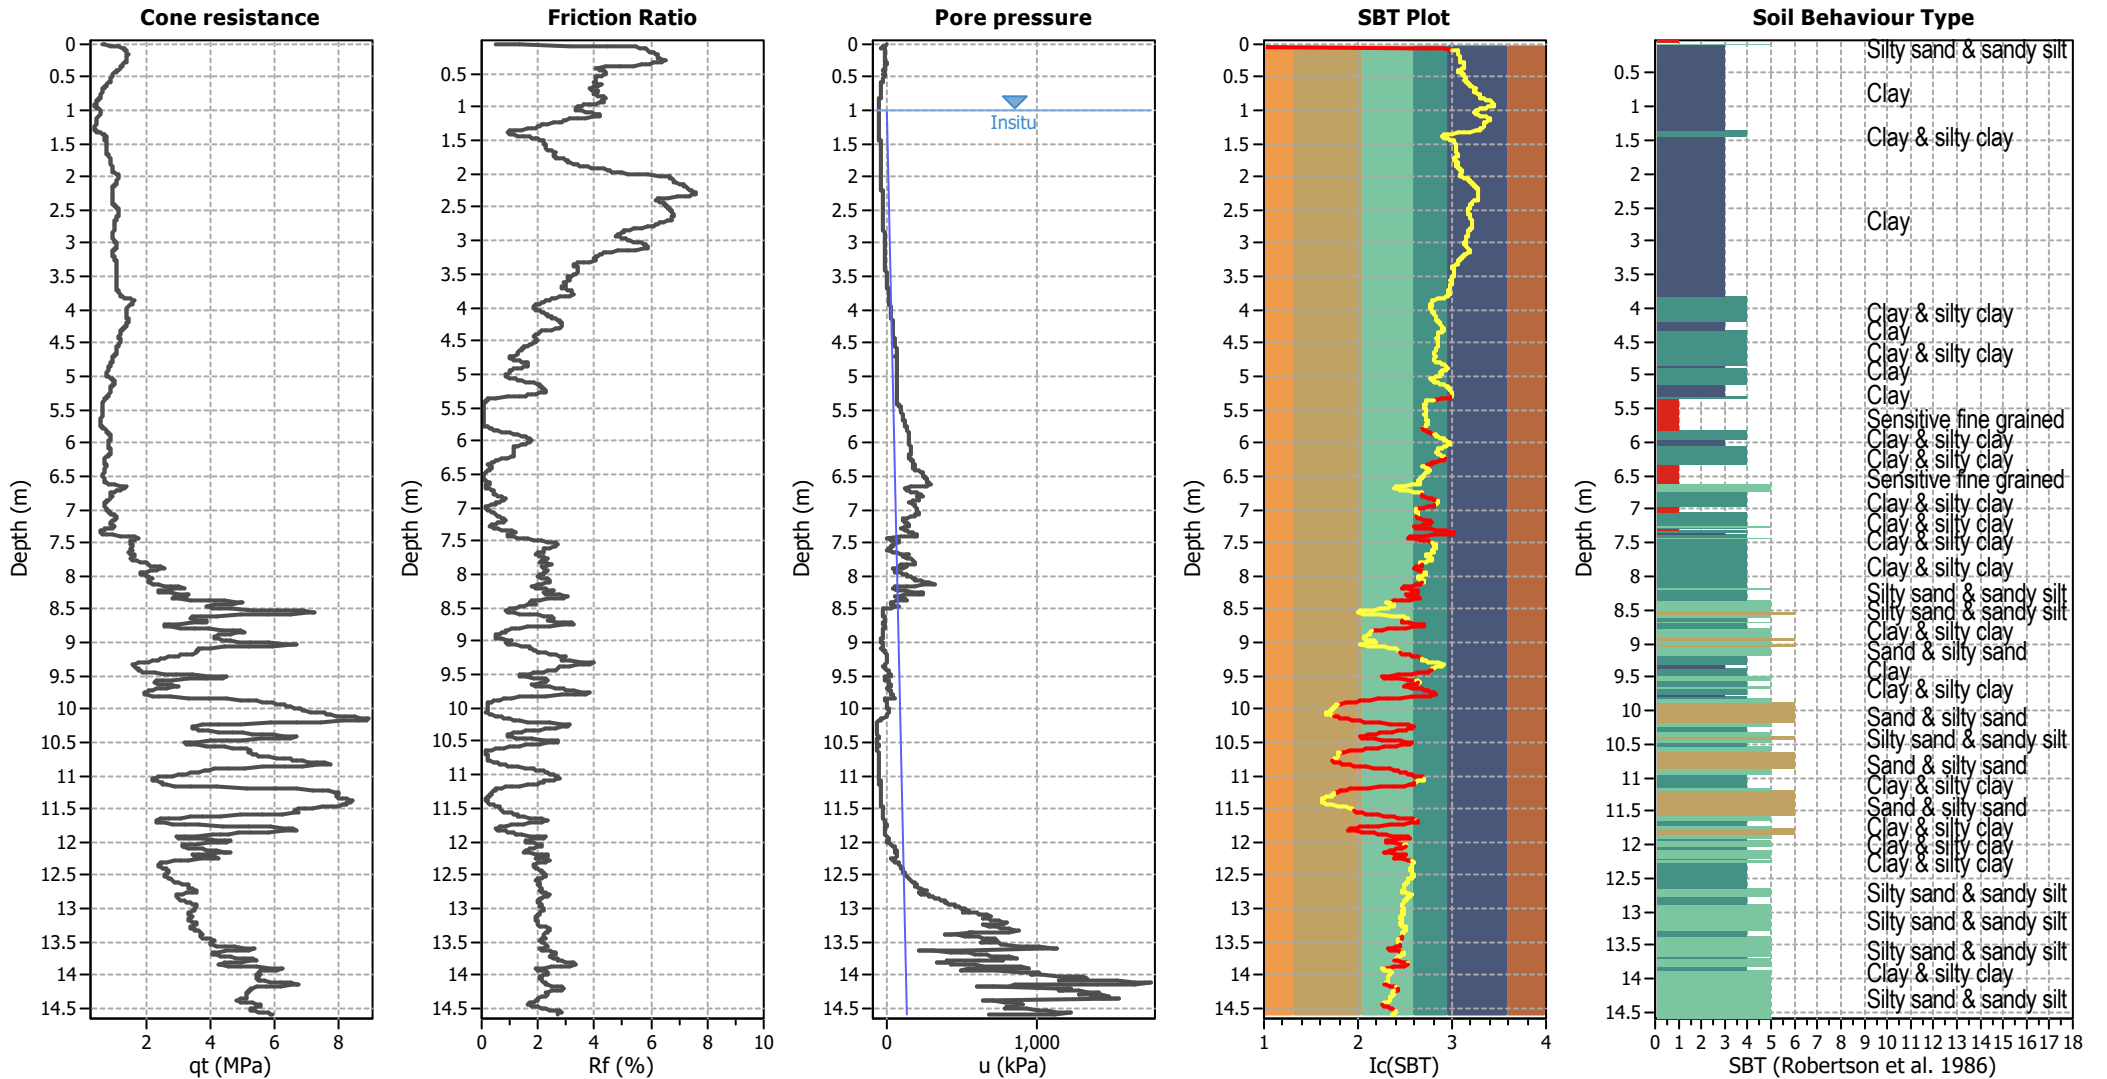


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

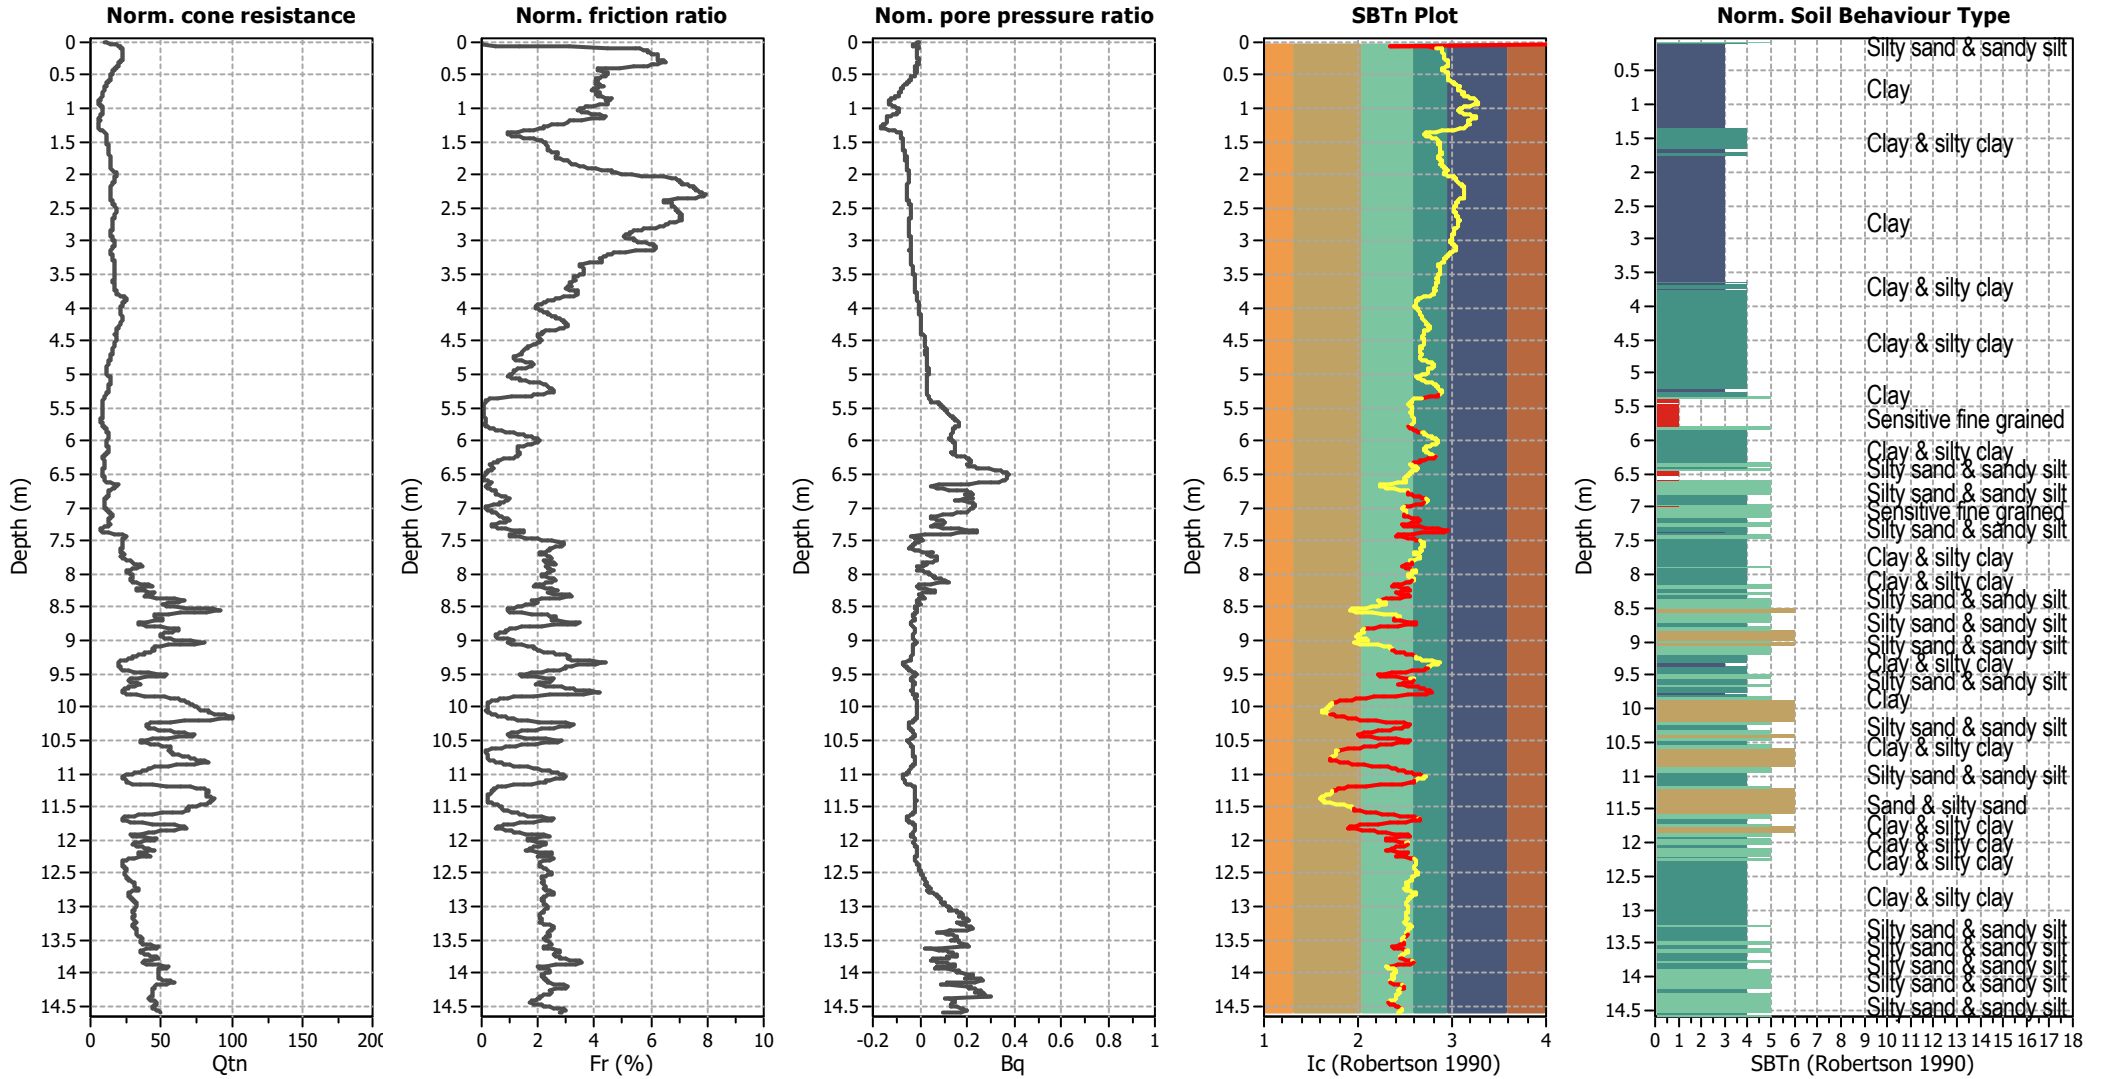


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

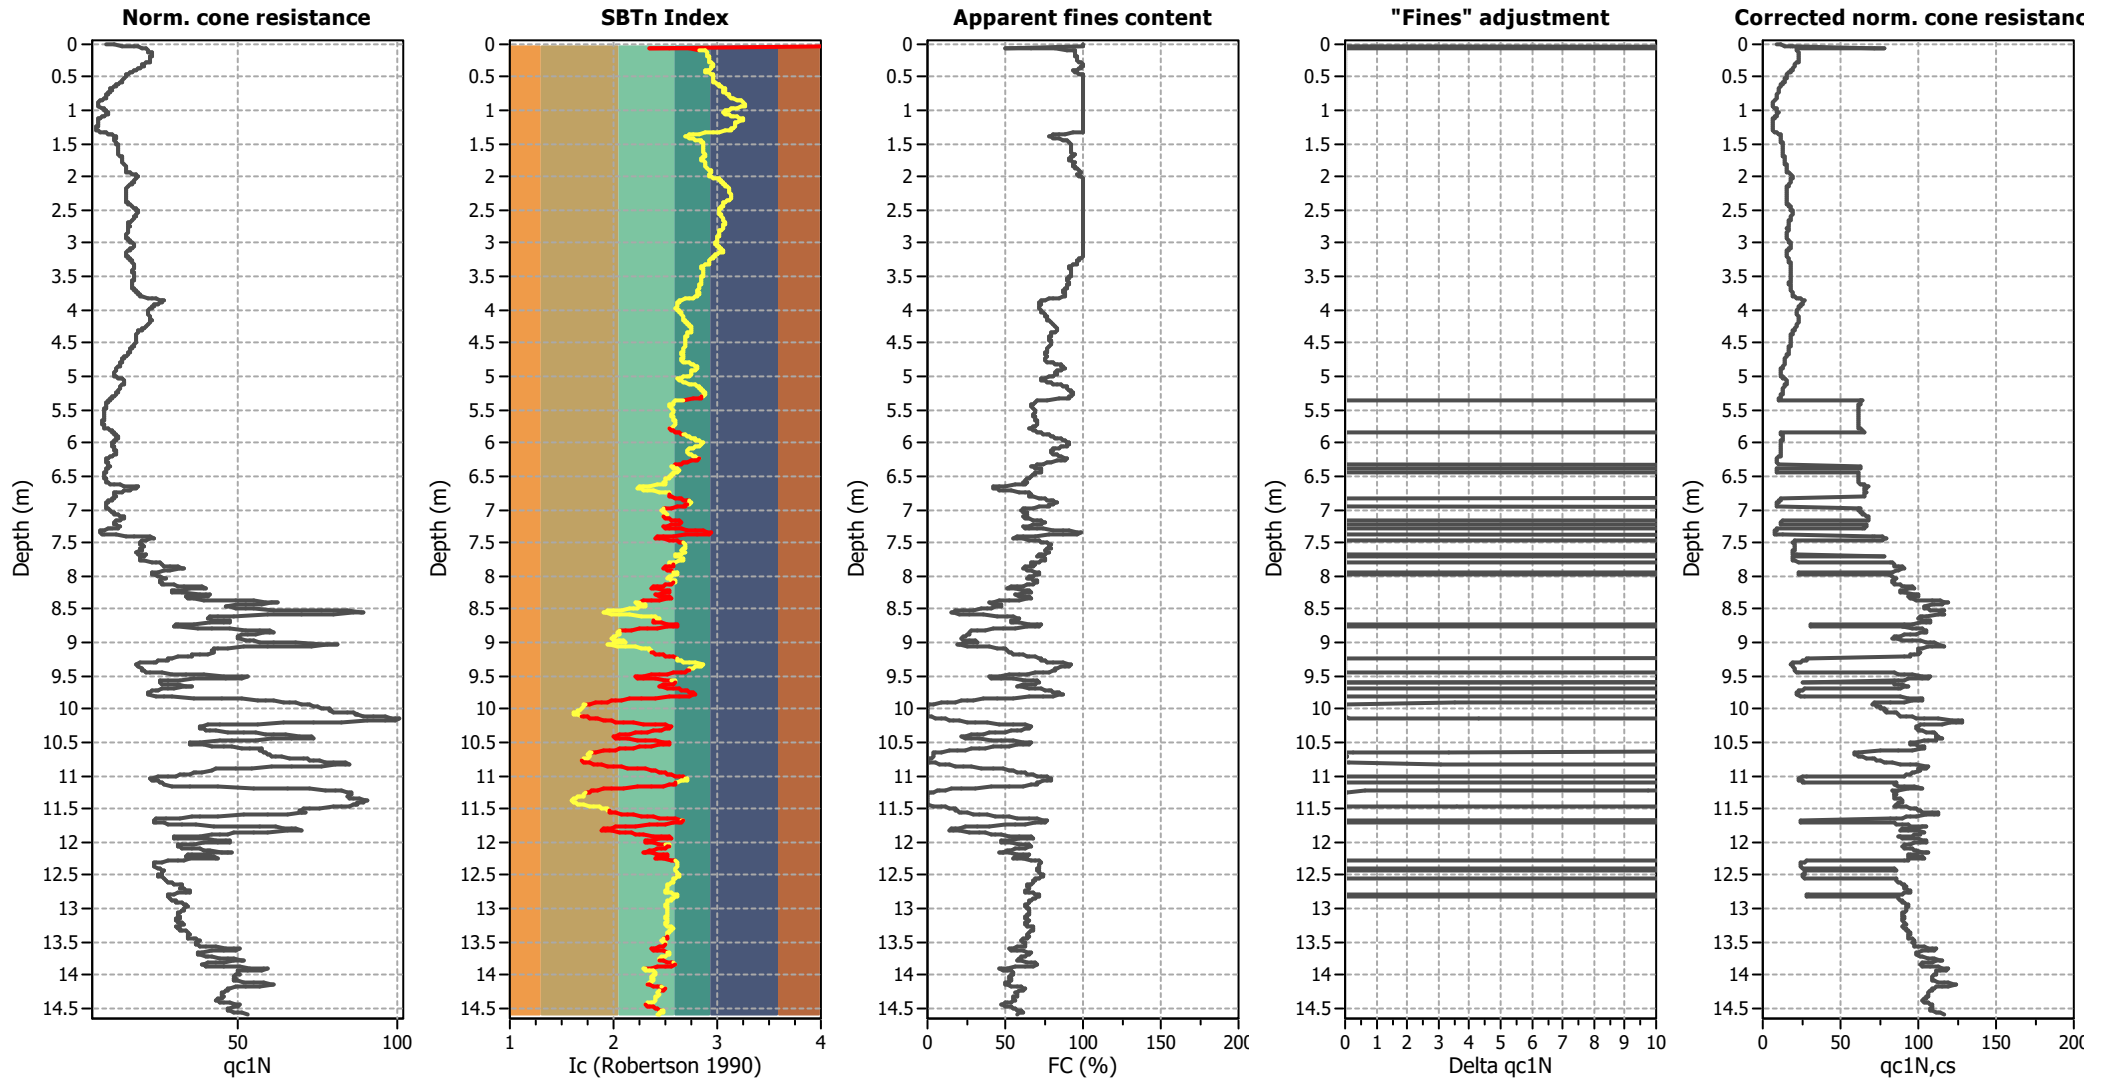

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

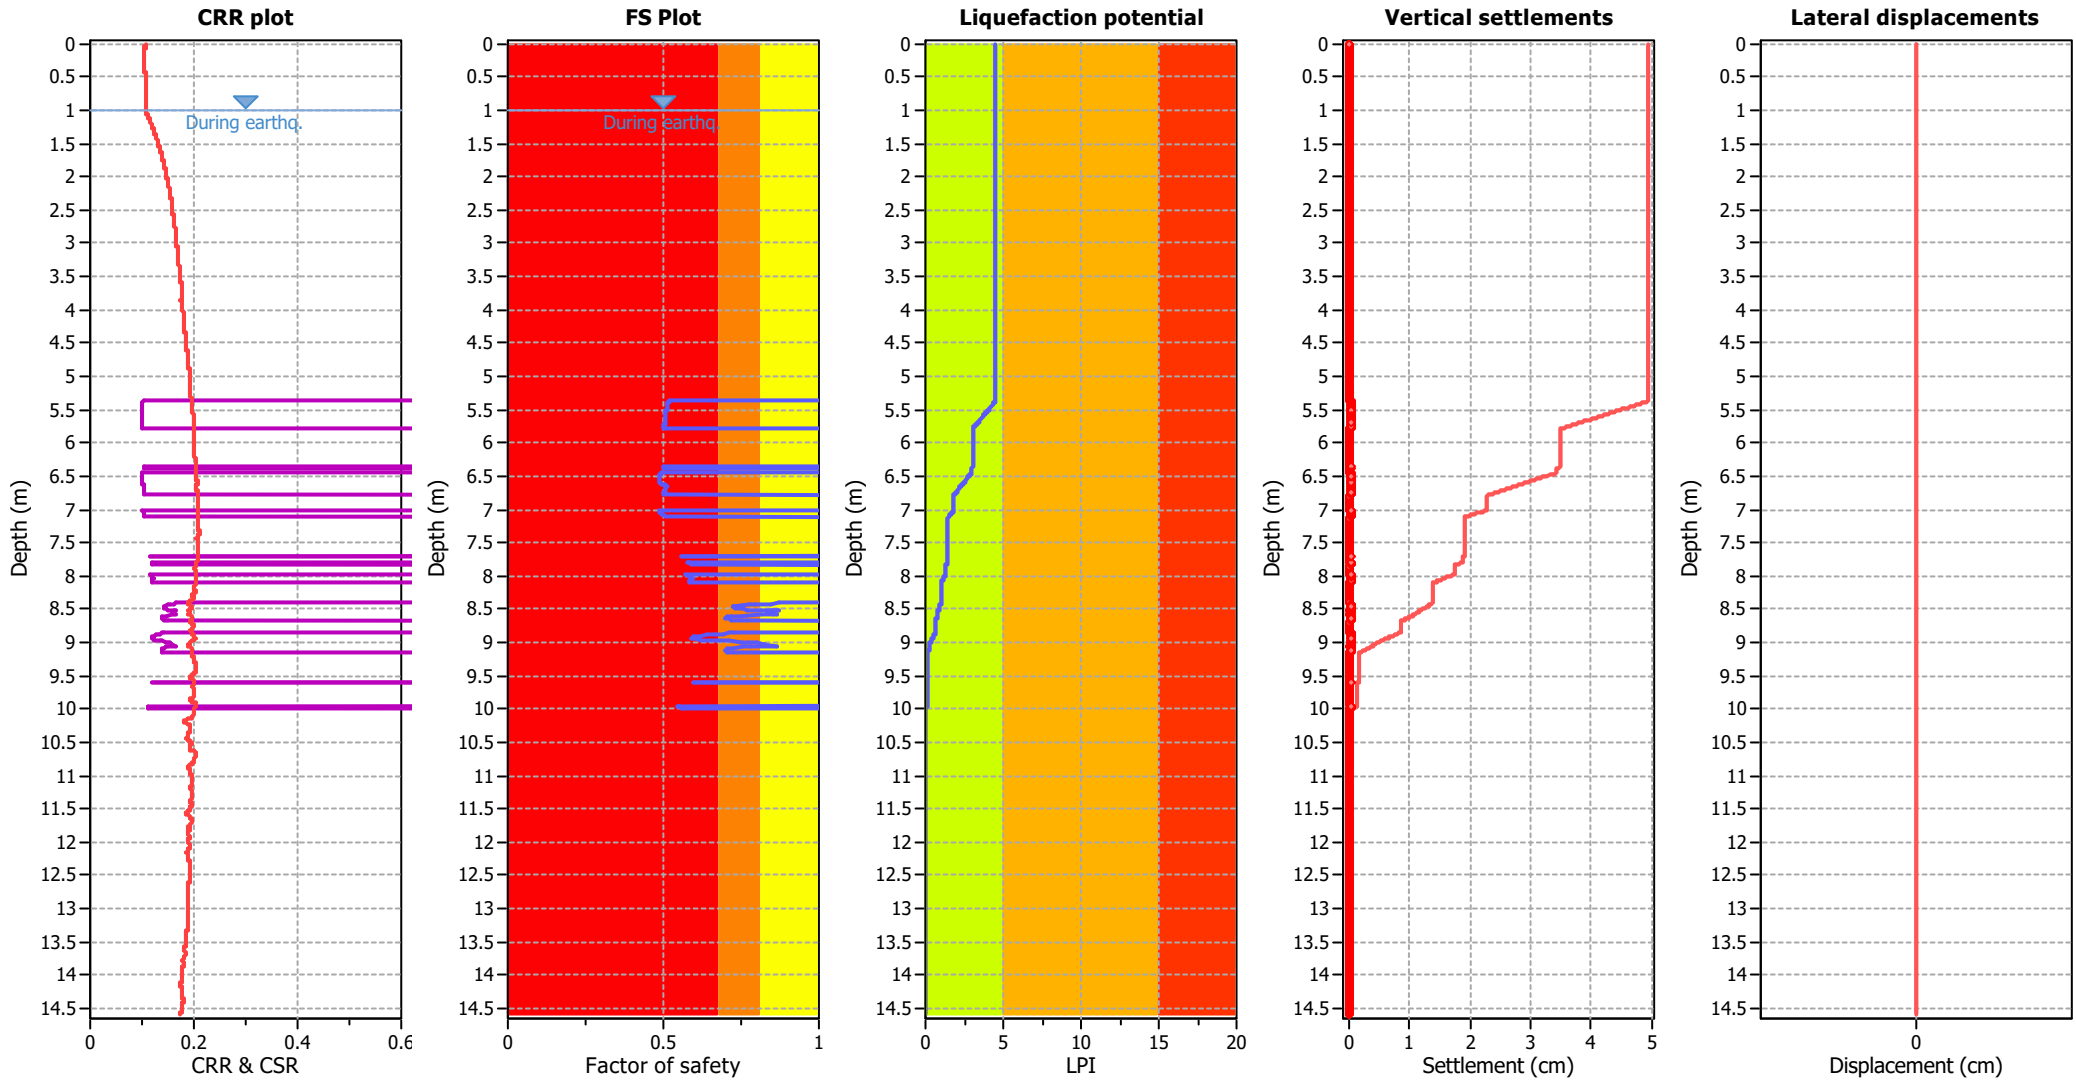

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

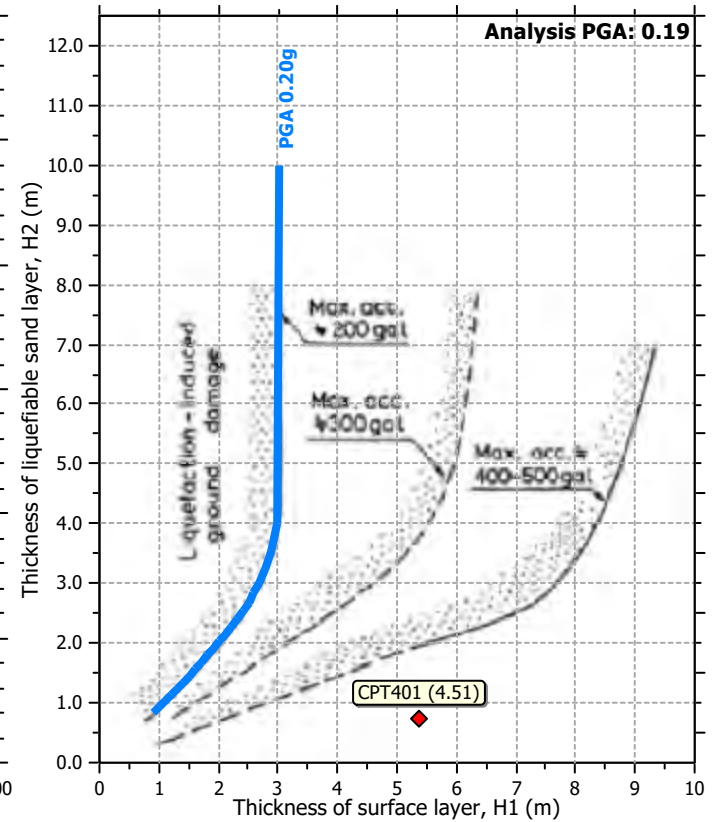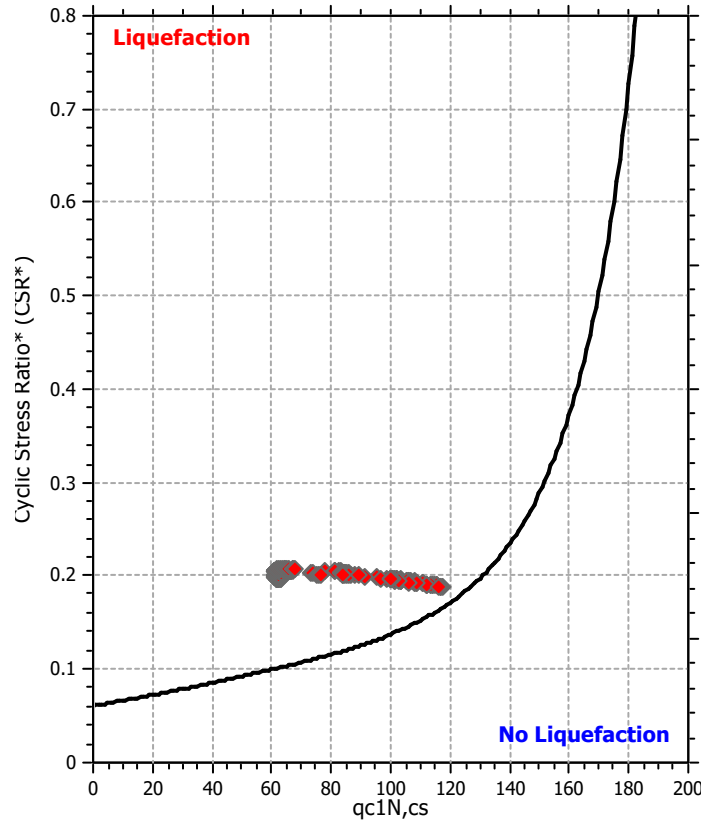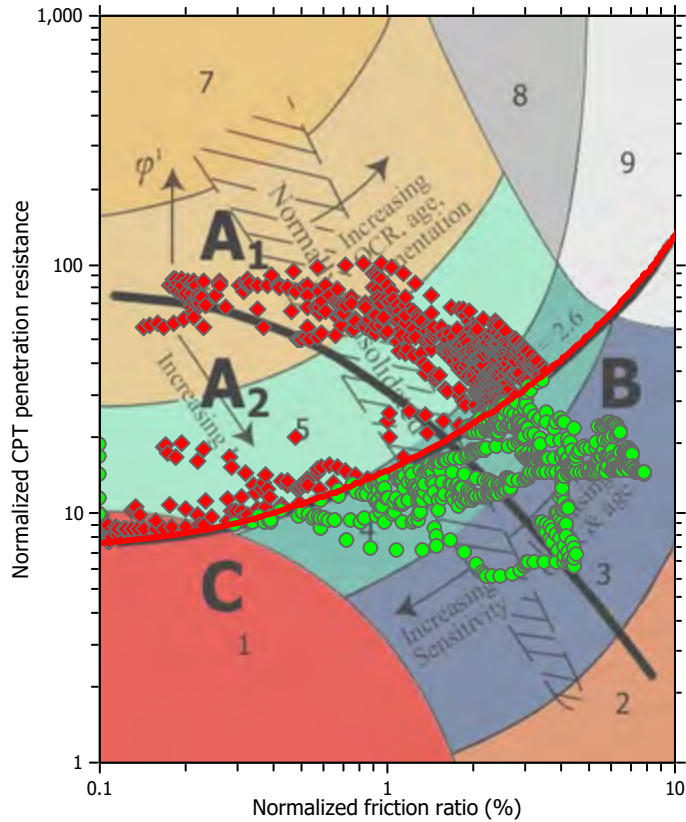

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

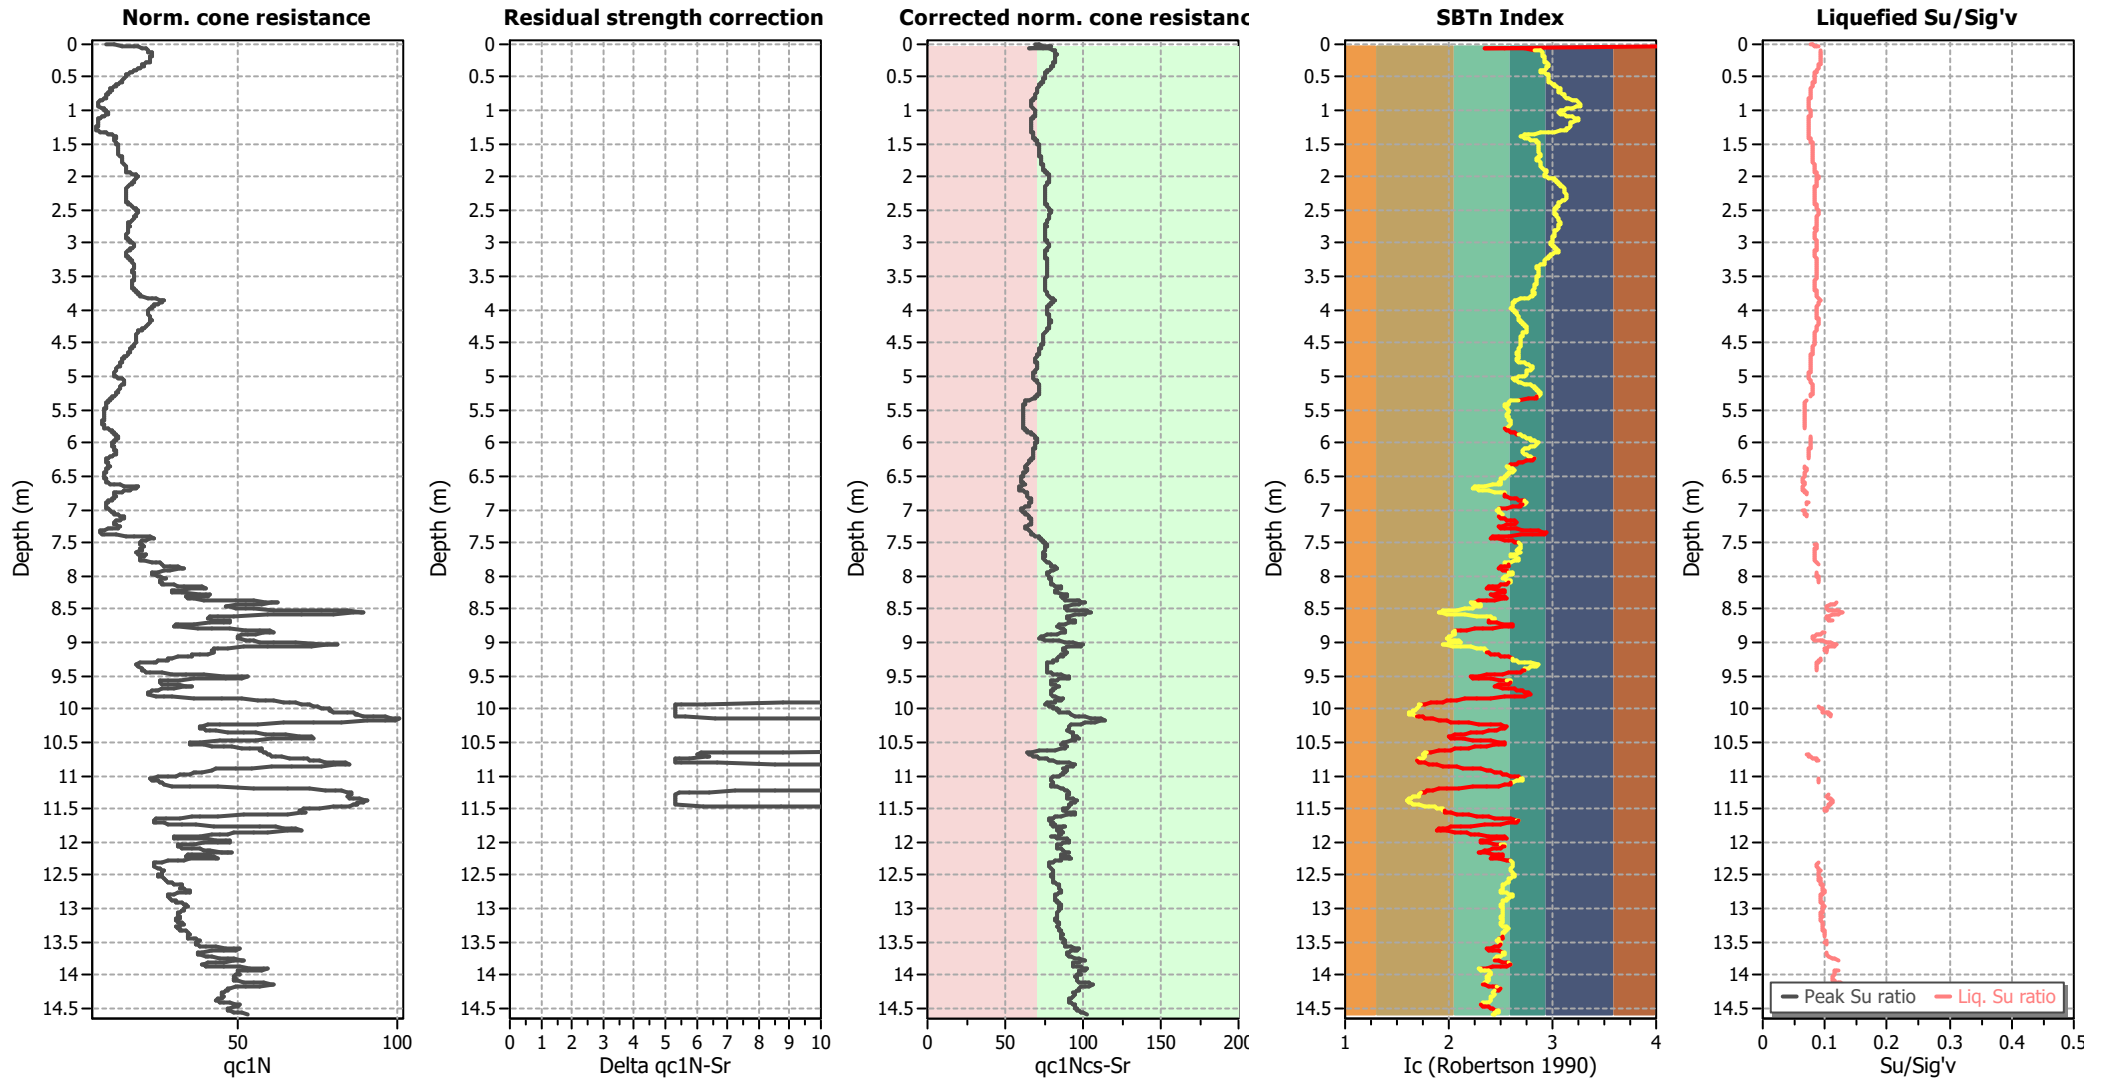

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

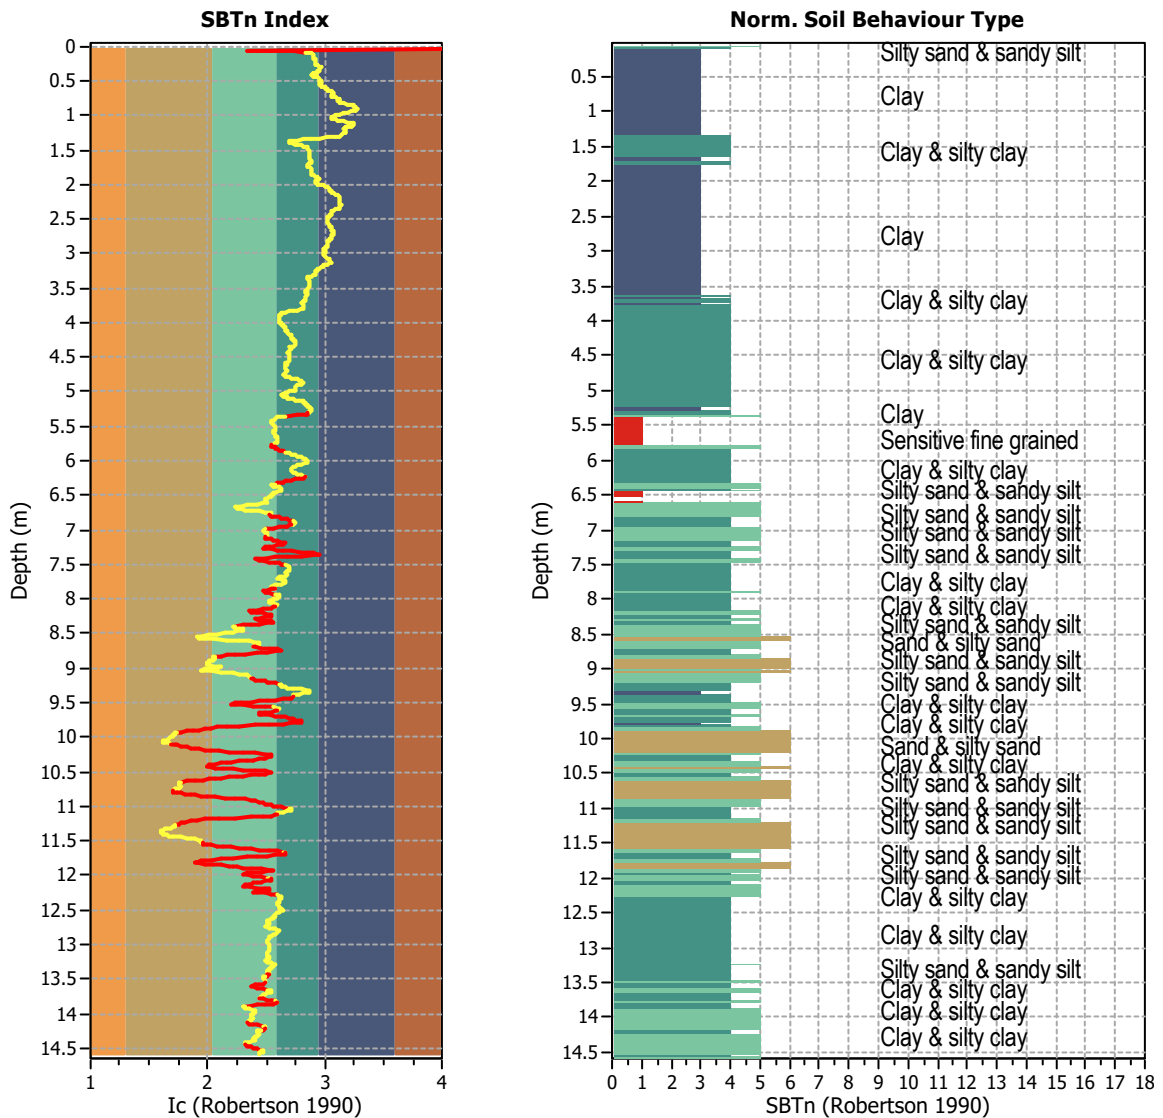


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1459
 Total points excluded: 439
 Exclusion percentage: 30.09%
 Number of layers detected: 49


Estimation of post-earthquake settlements

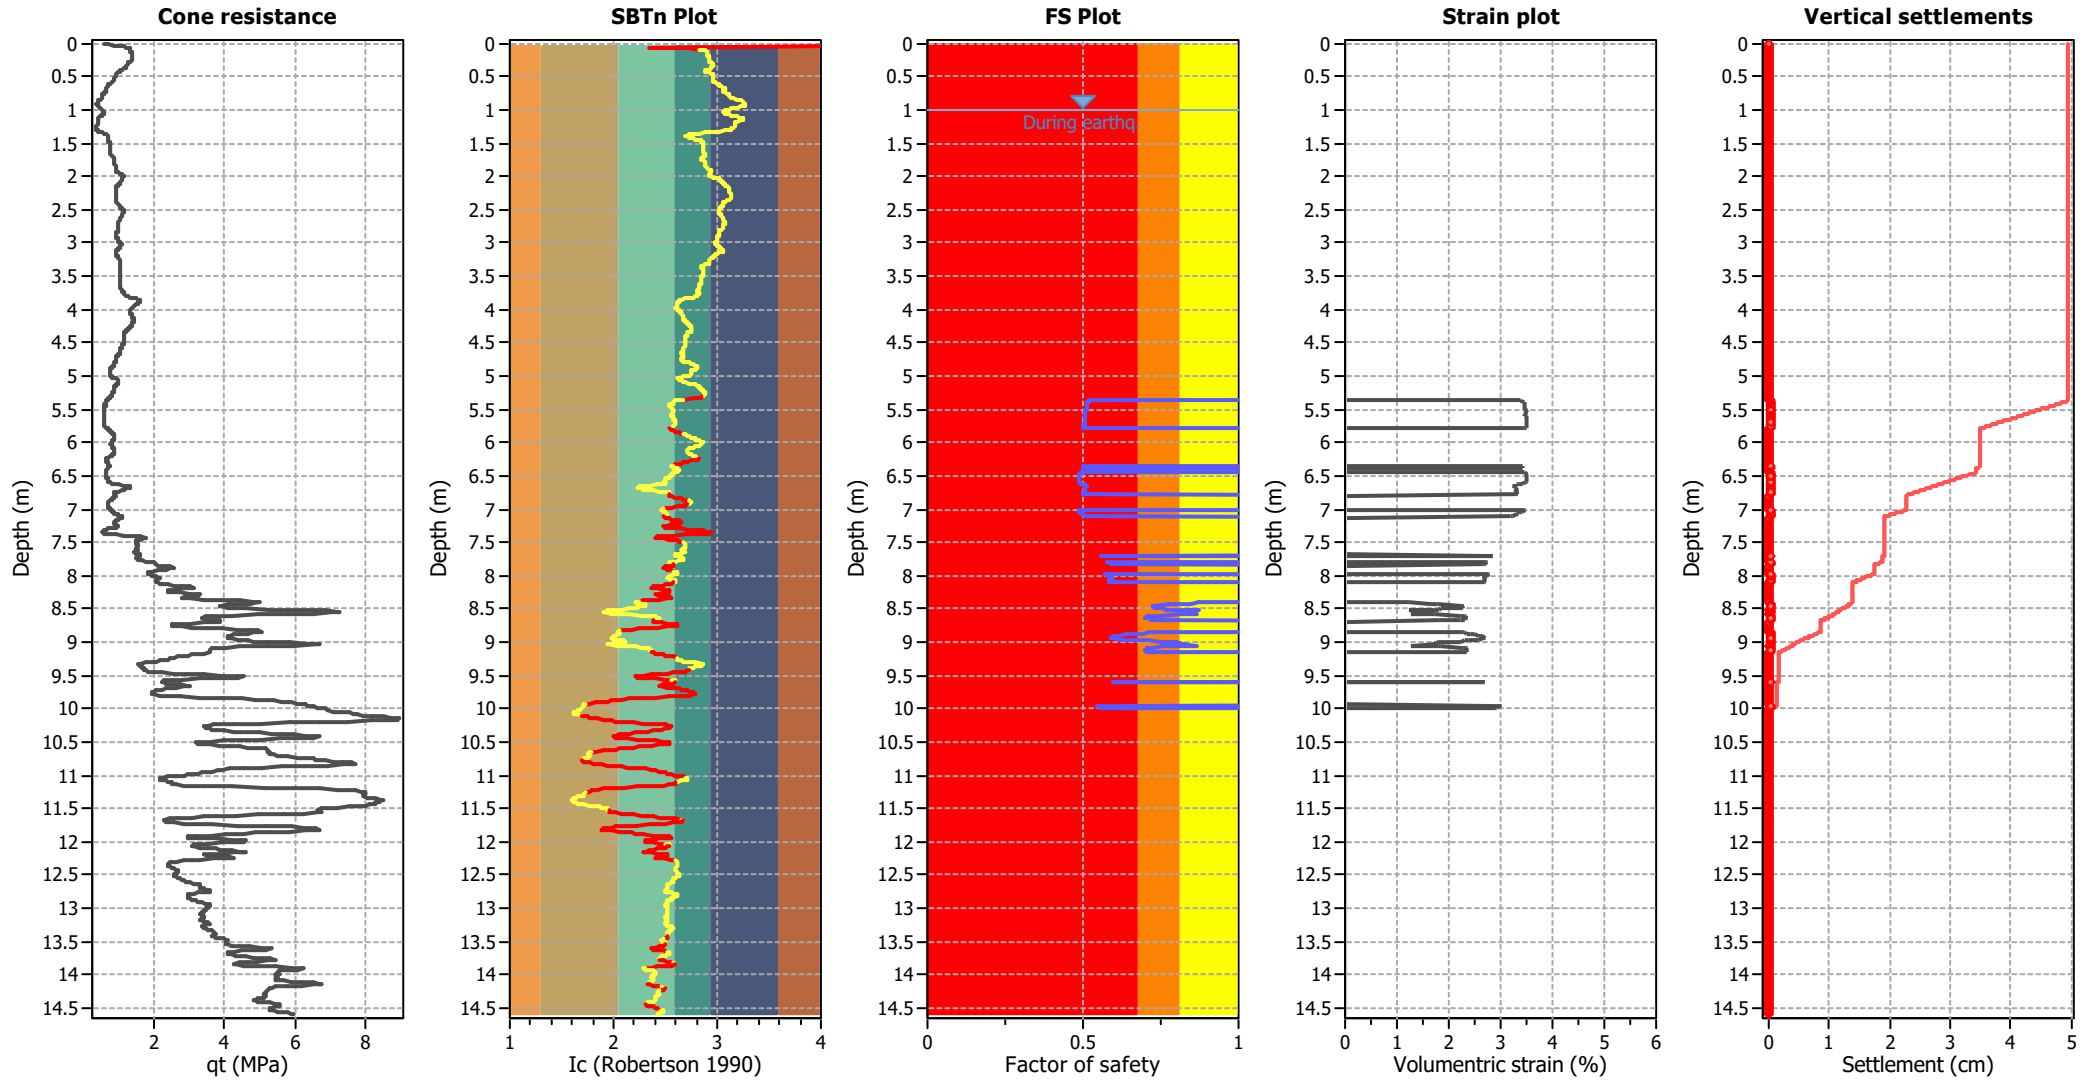

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

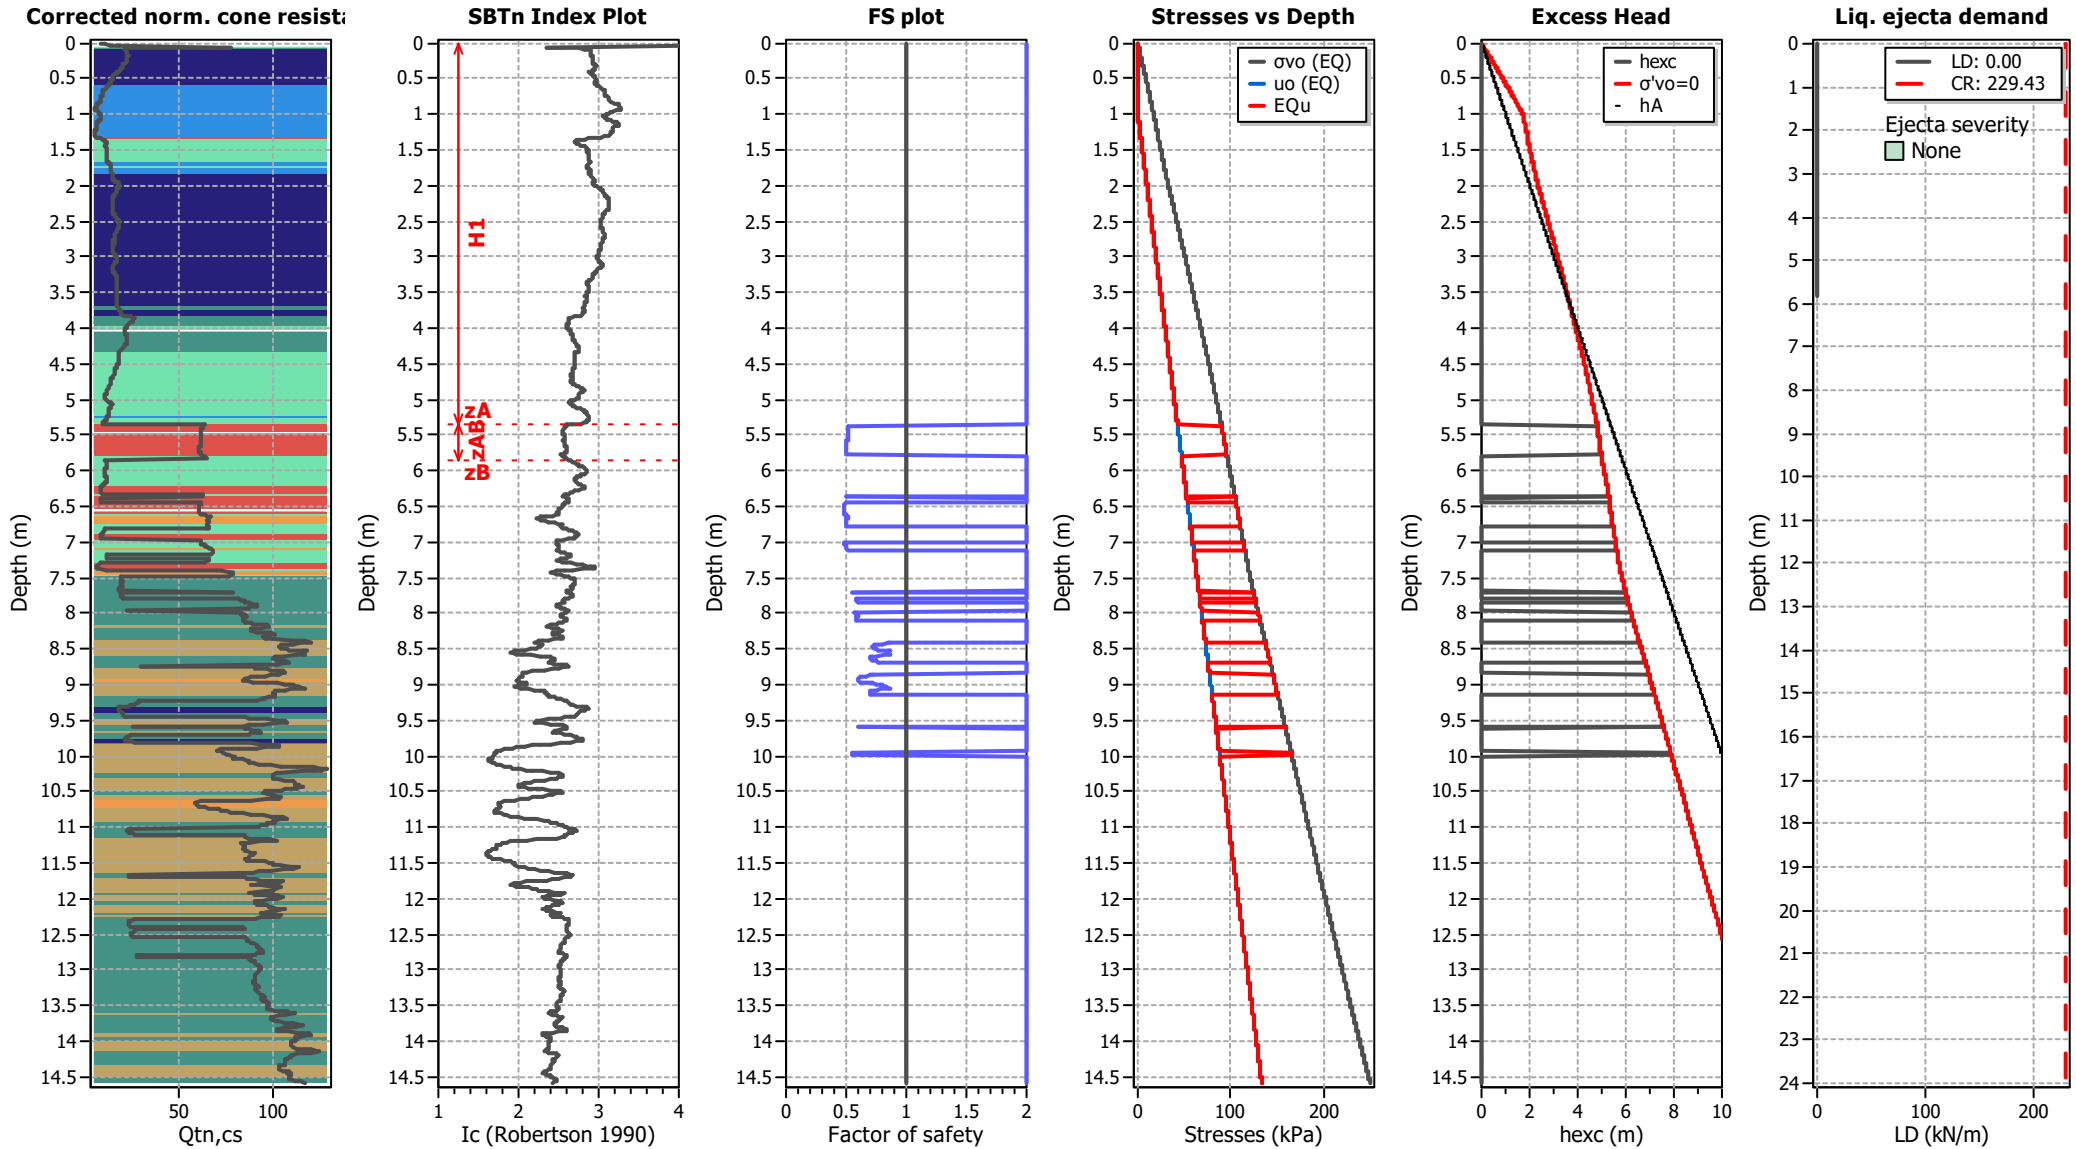

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT402

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

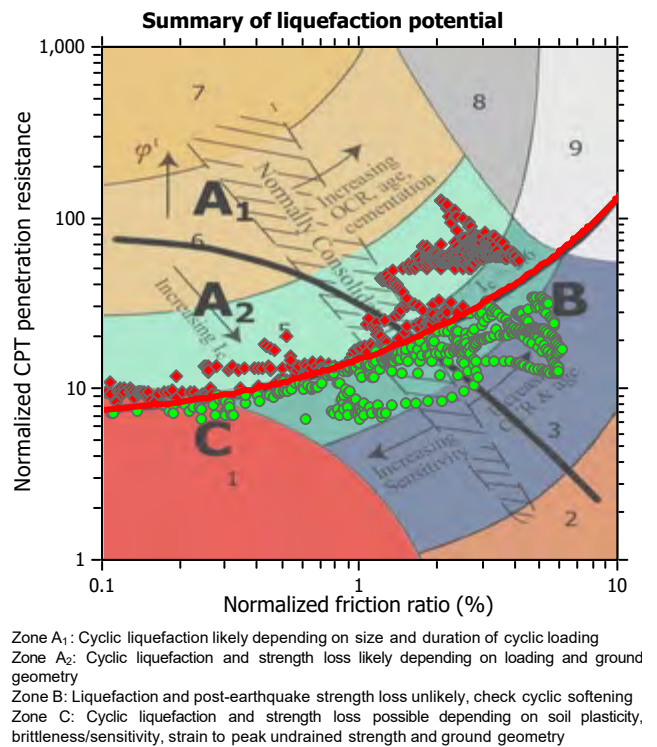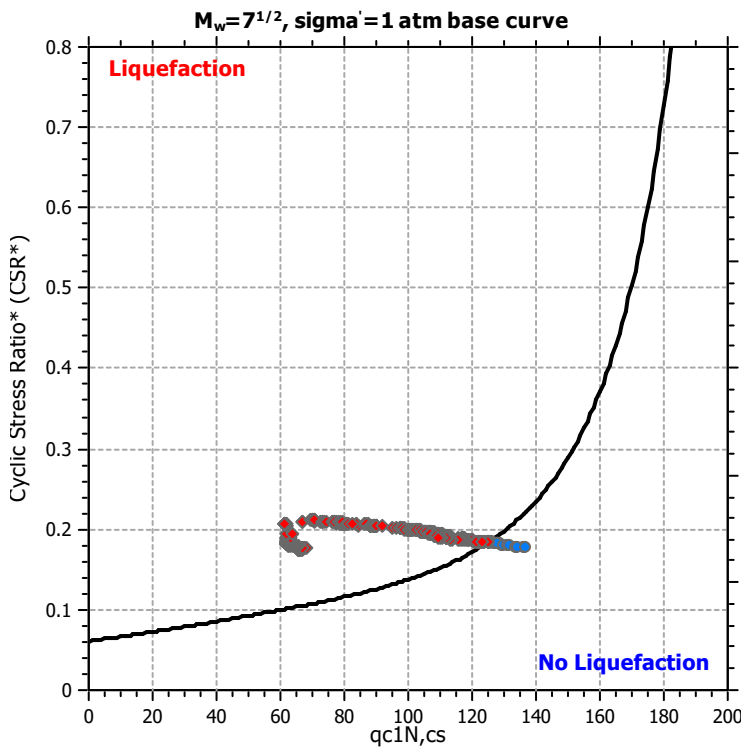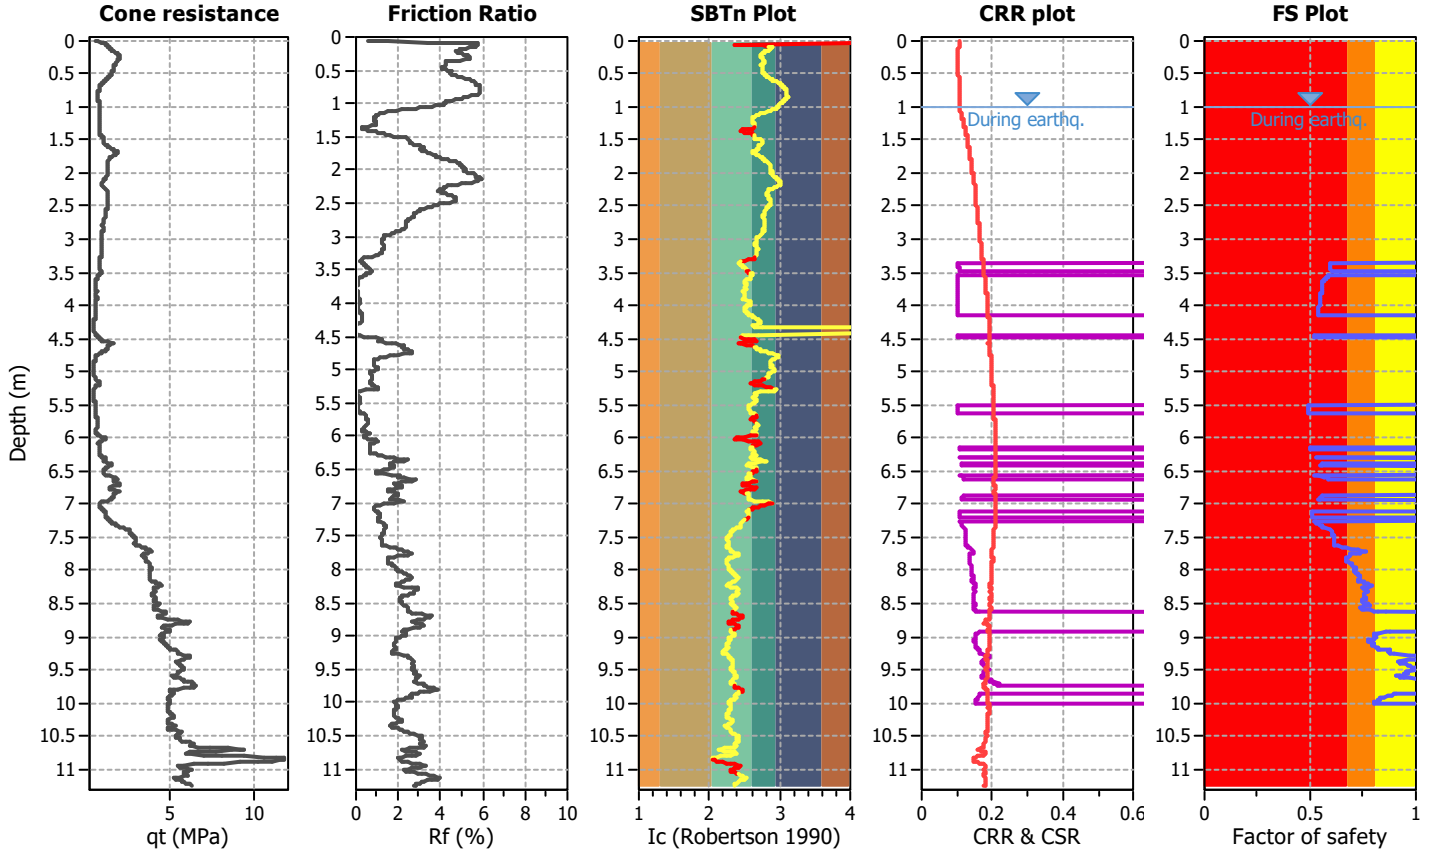

CPT basic interpretation plots

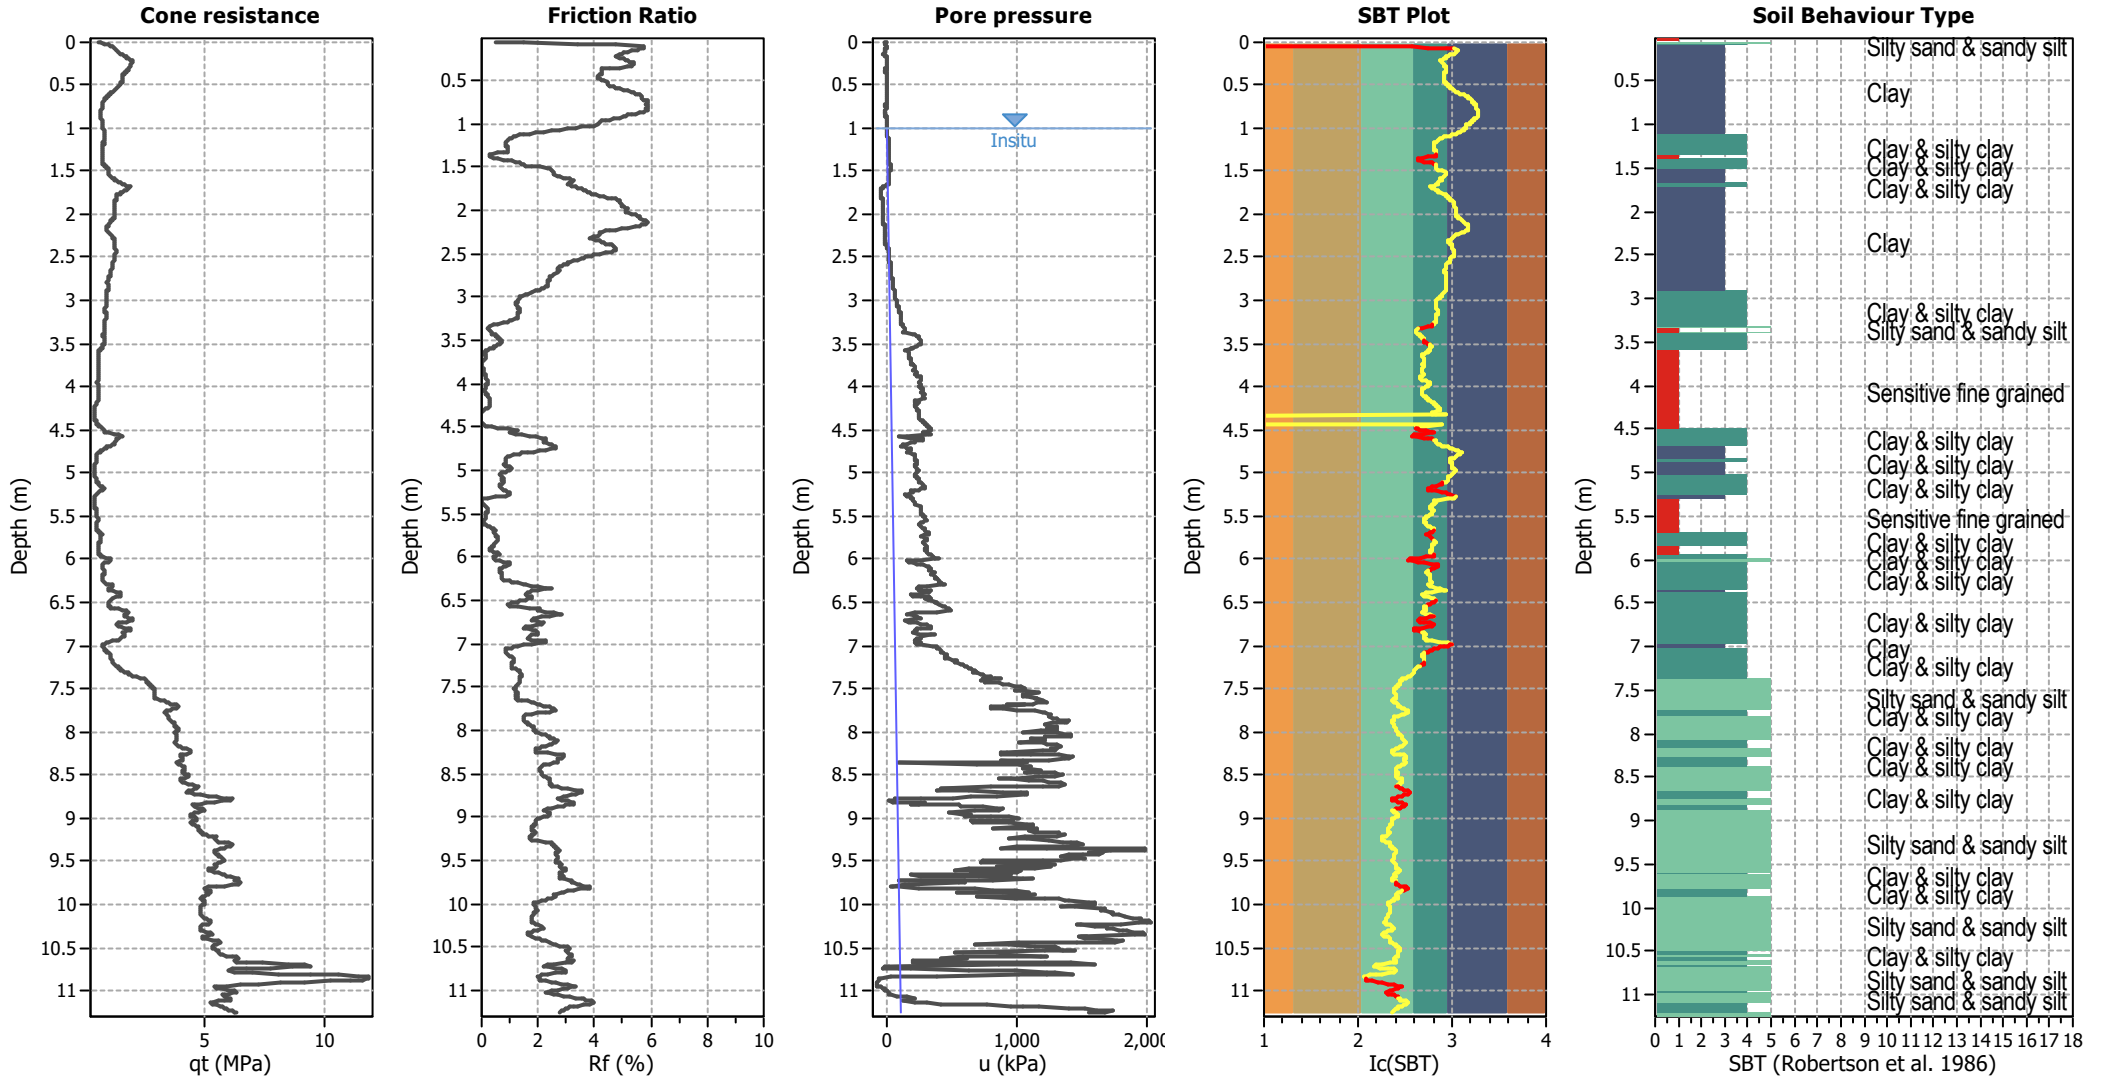


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

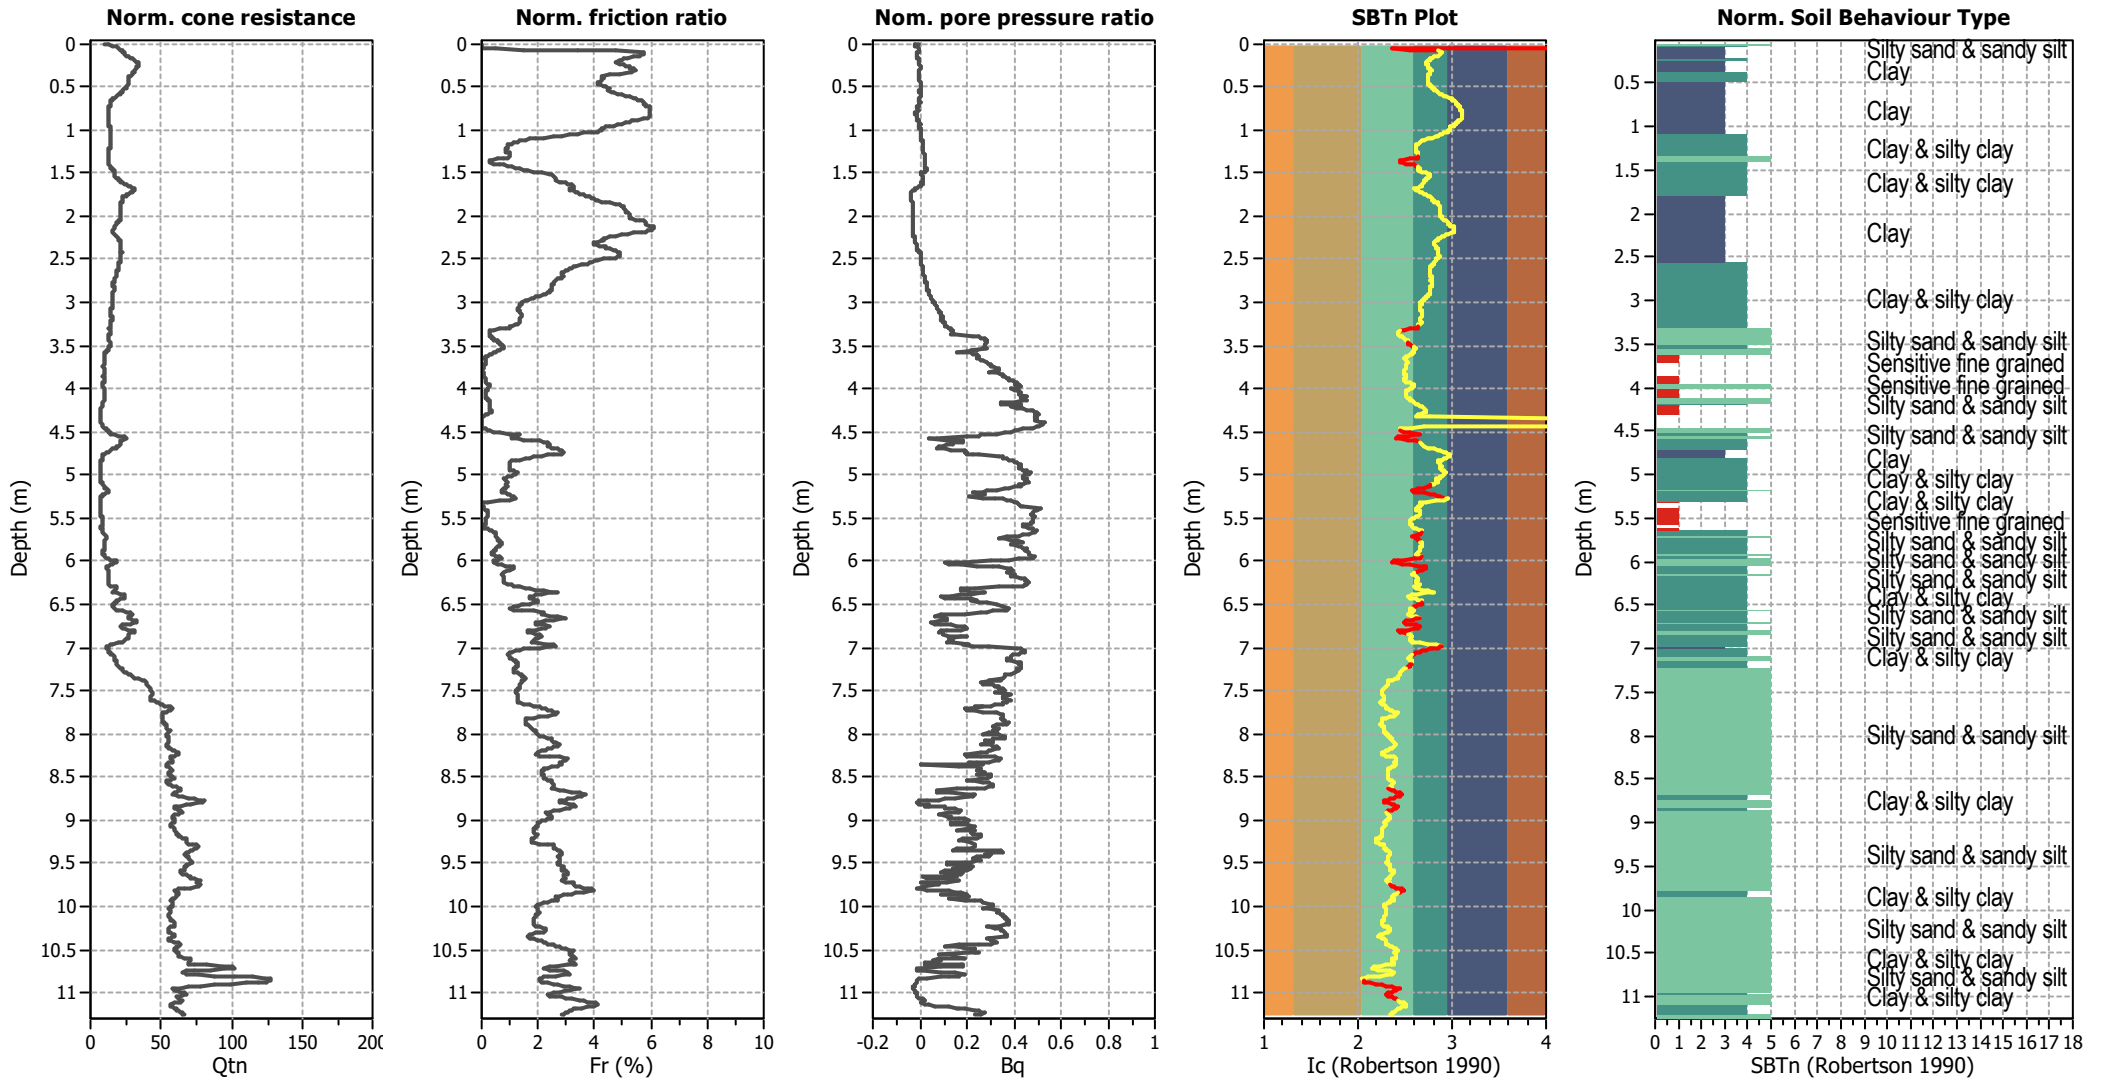


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

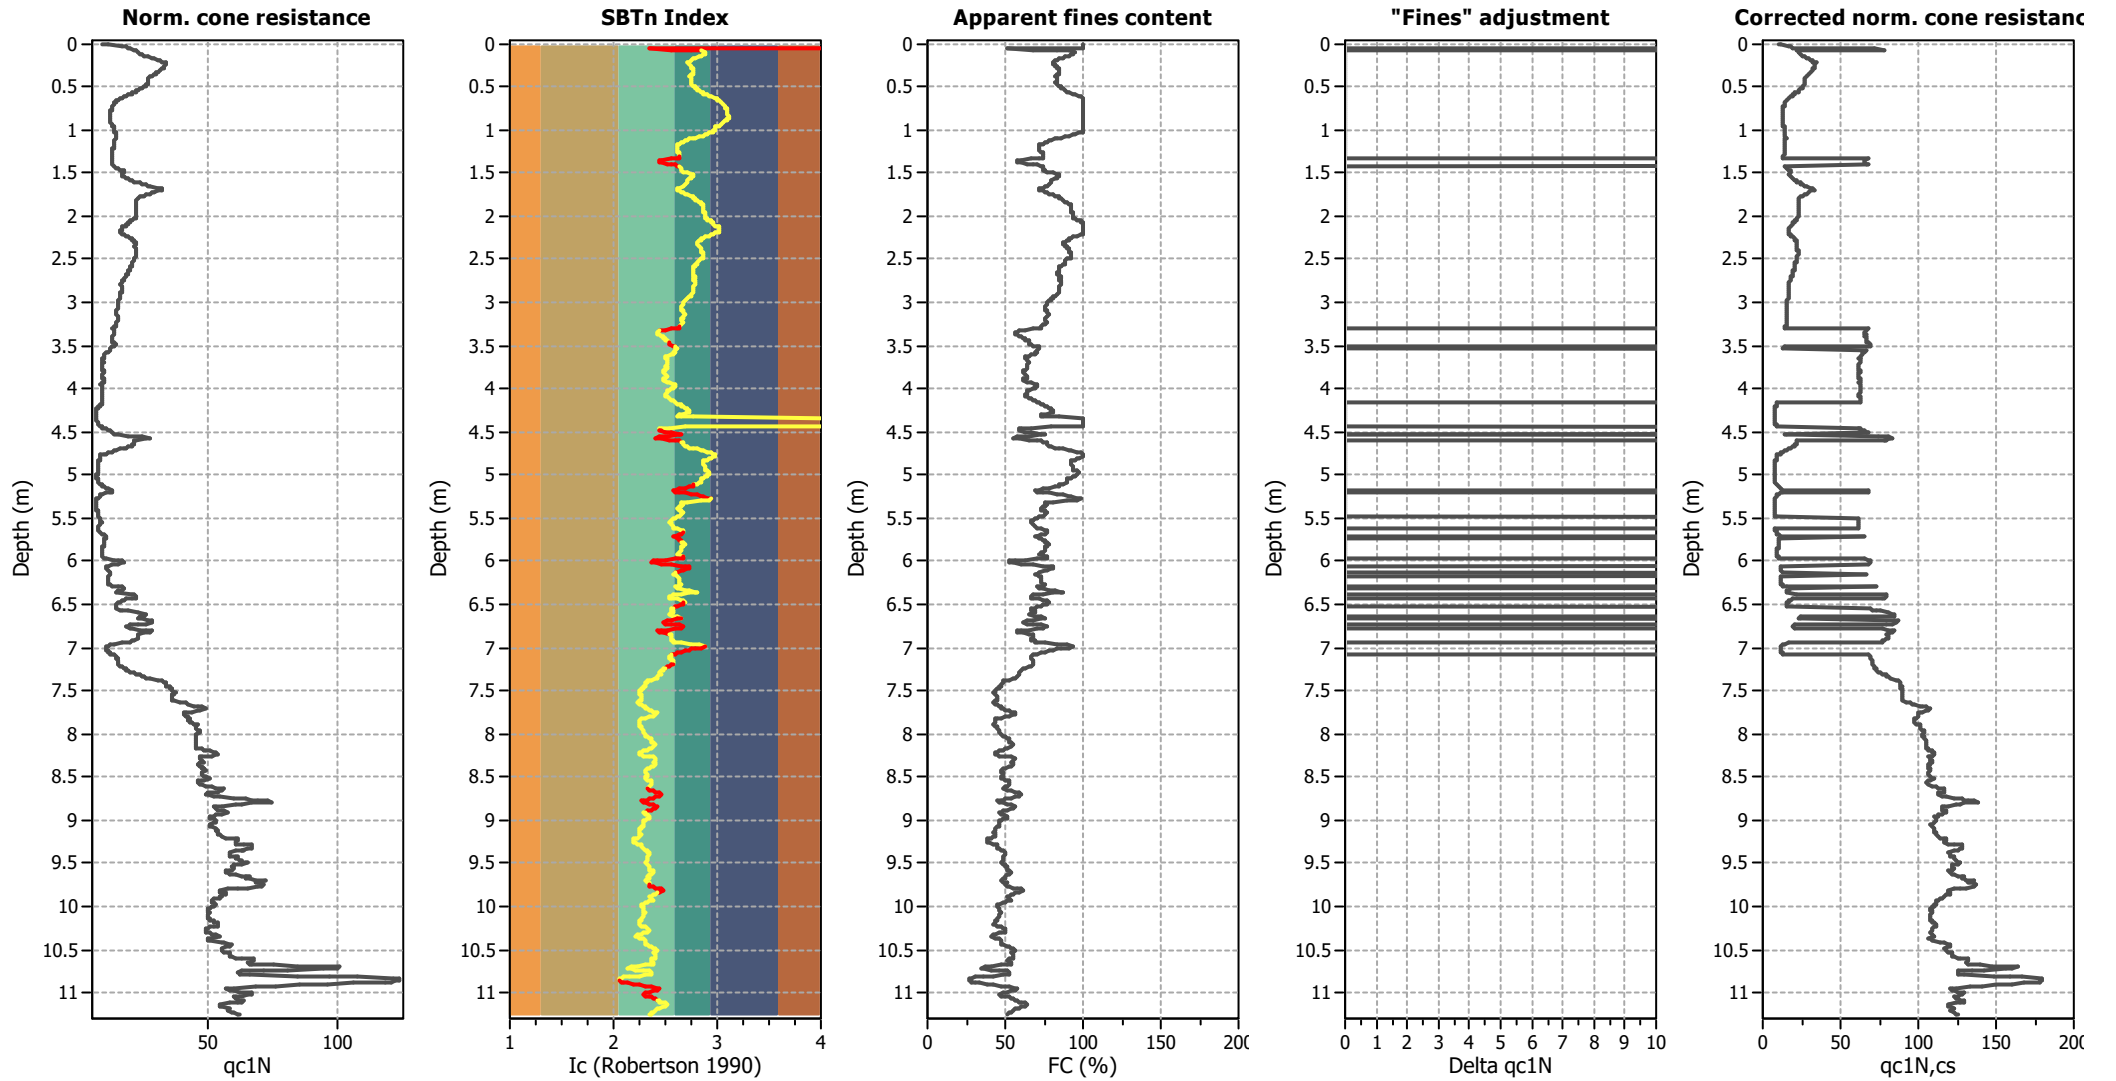

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

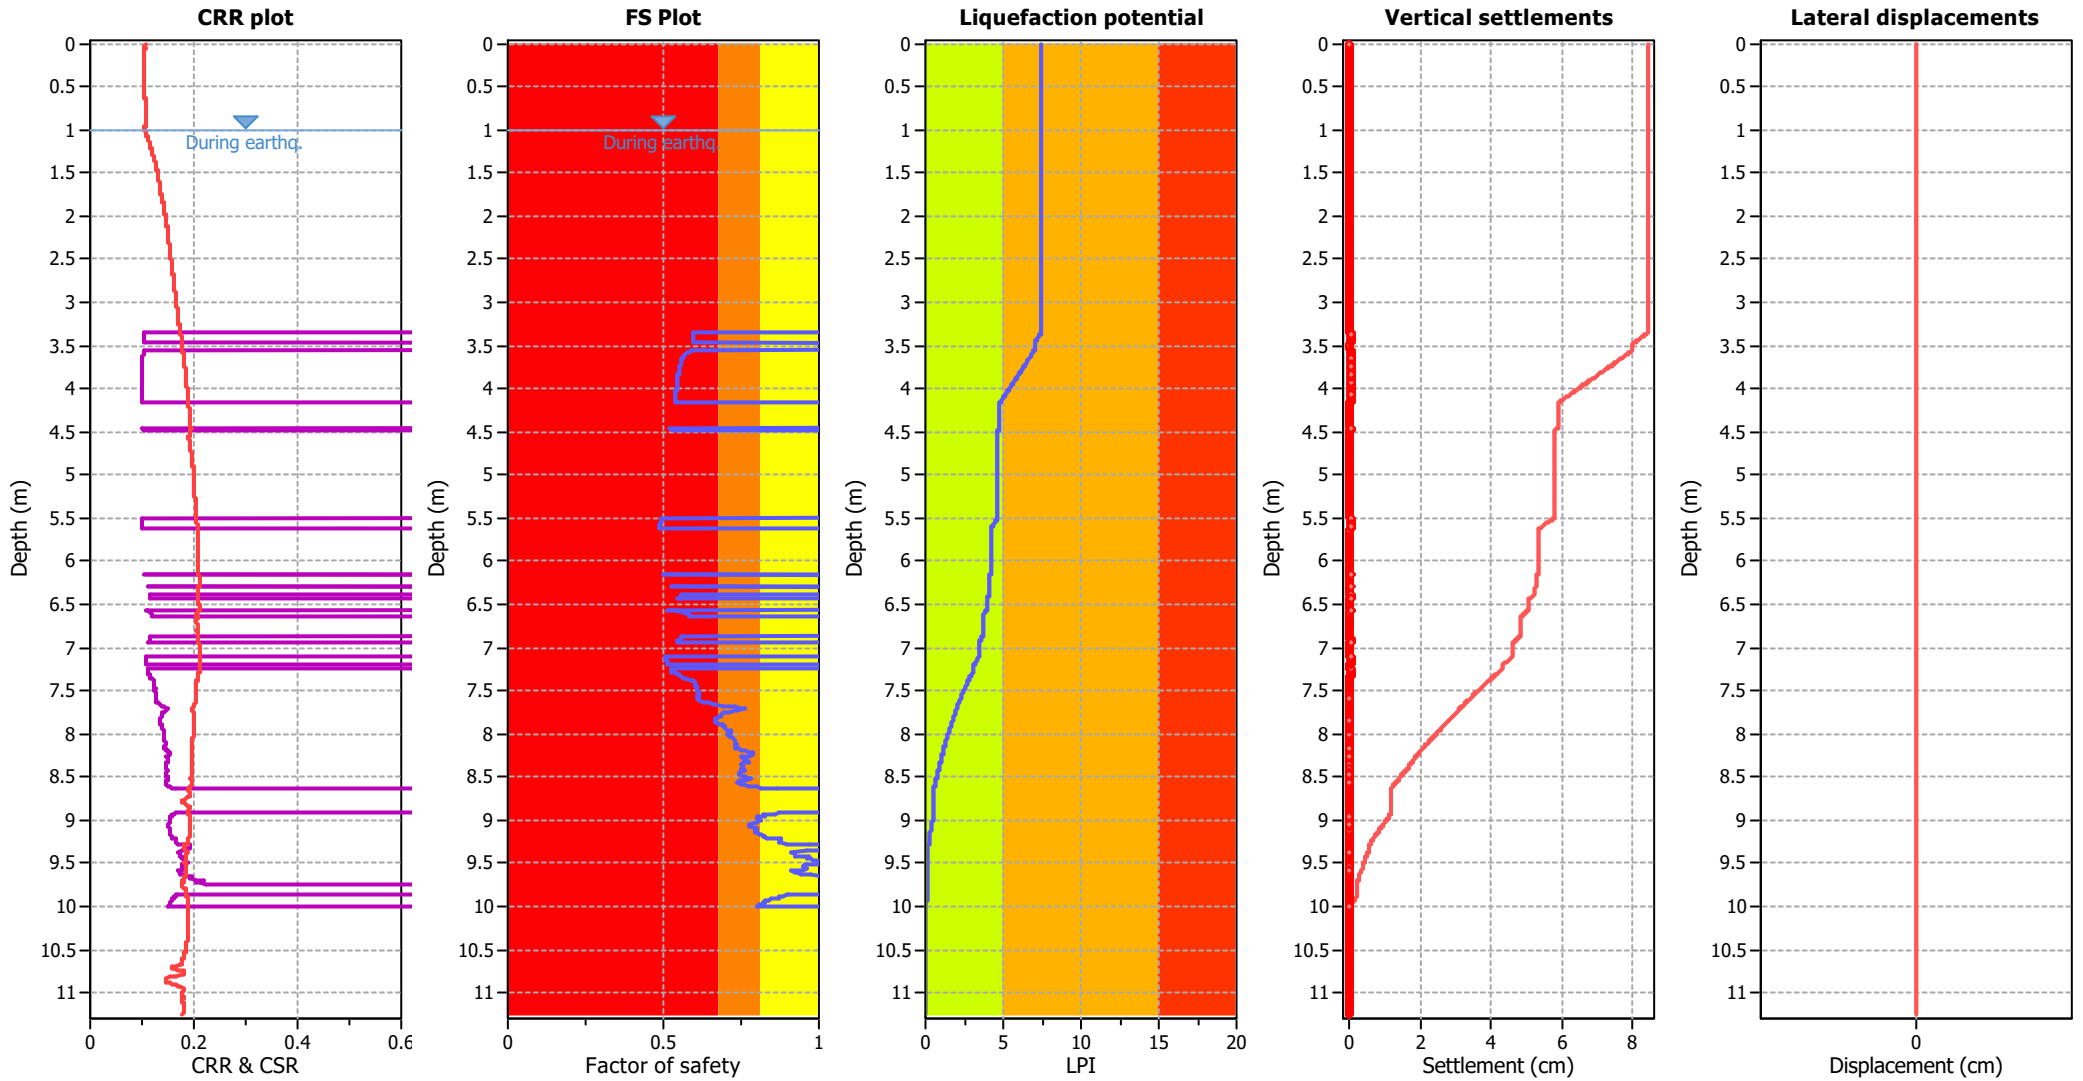

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

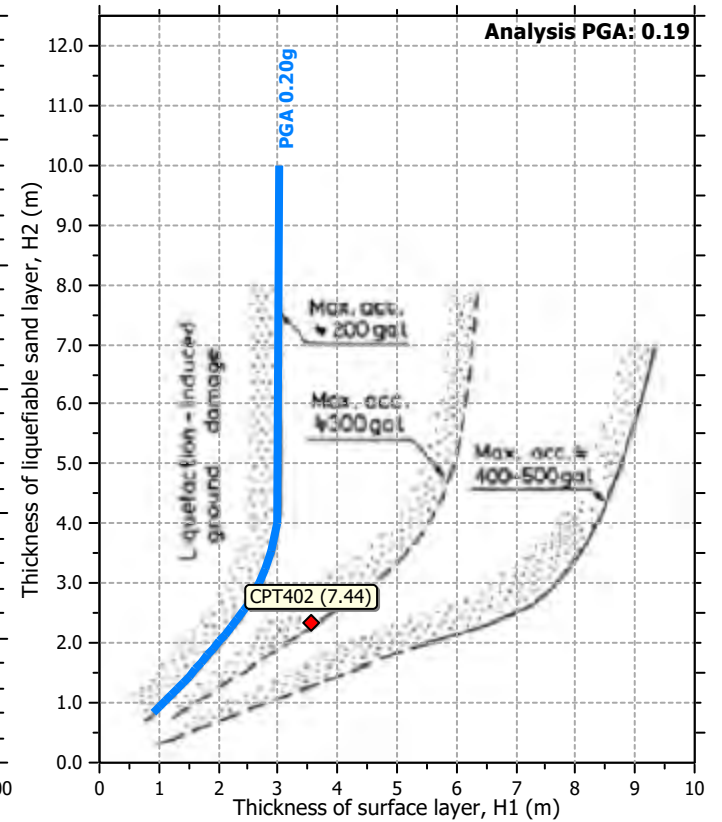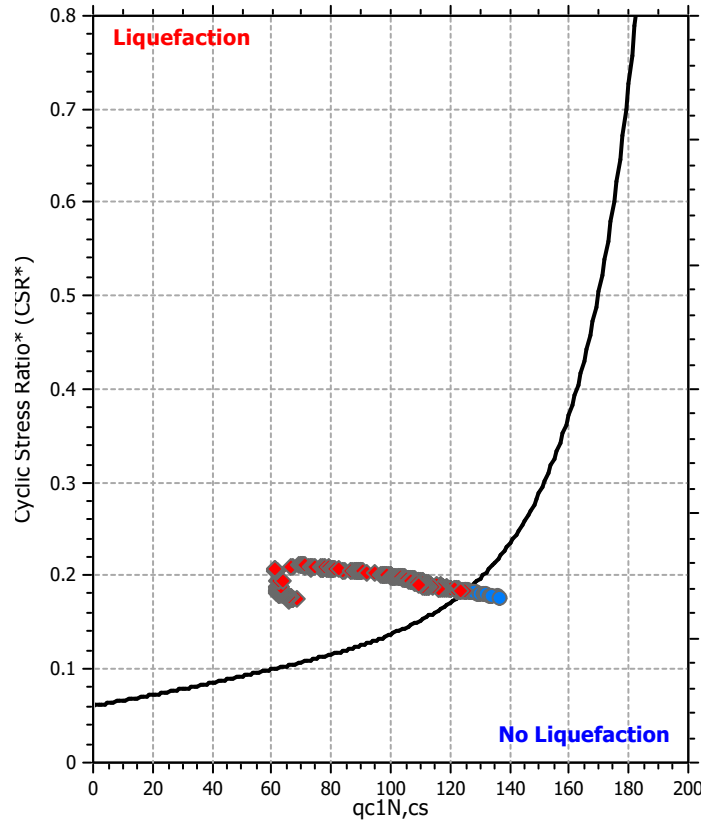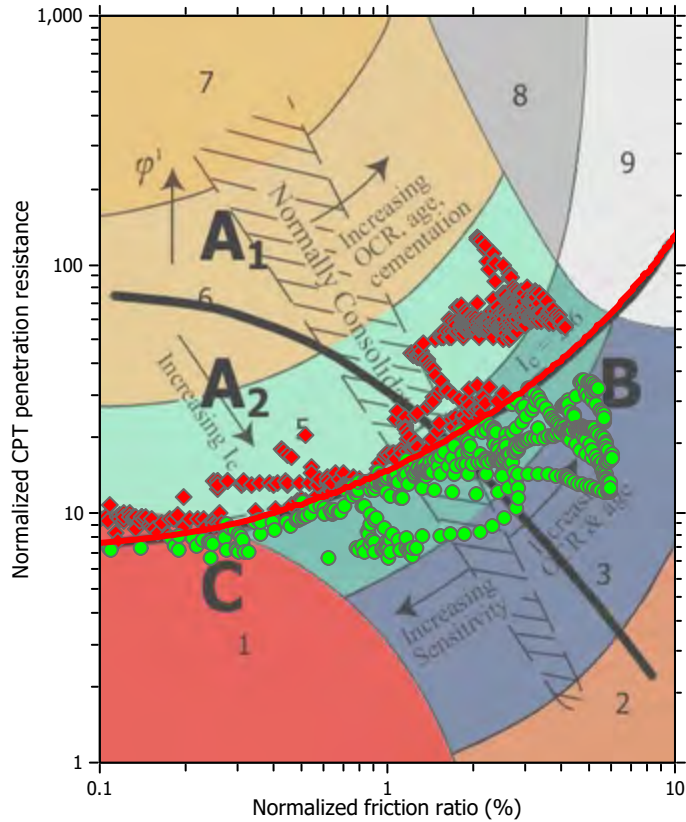

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

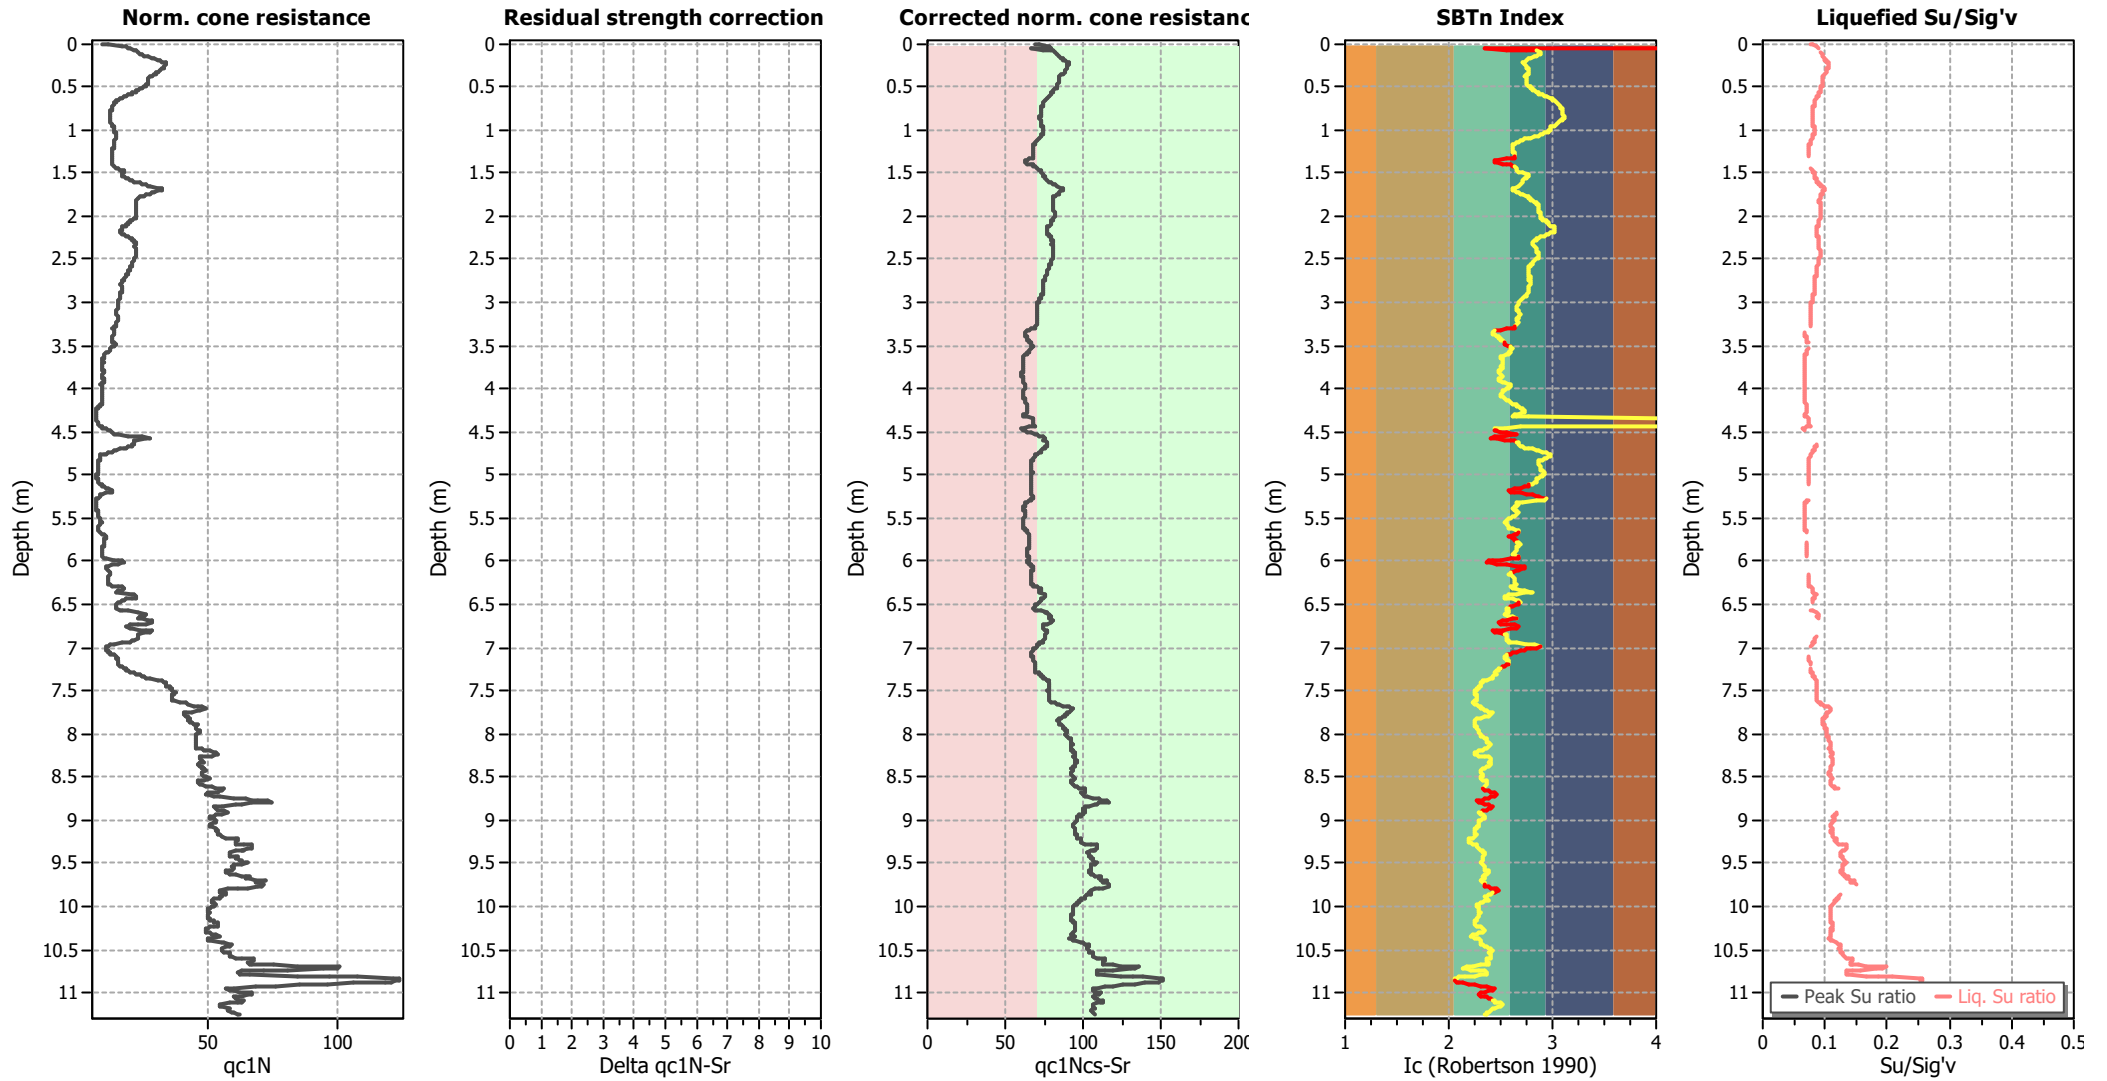

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

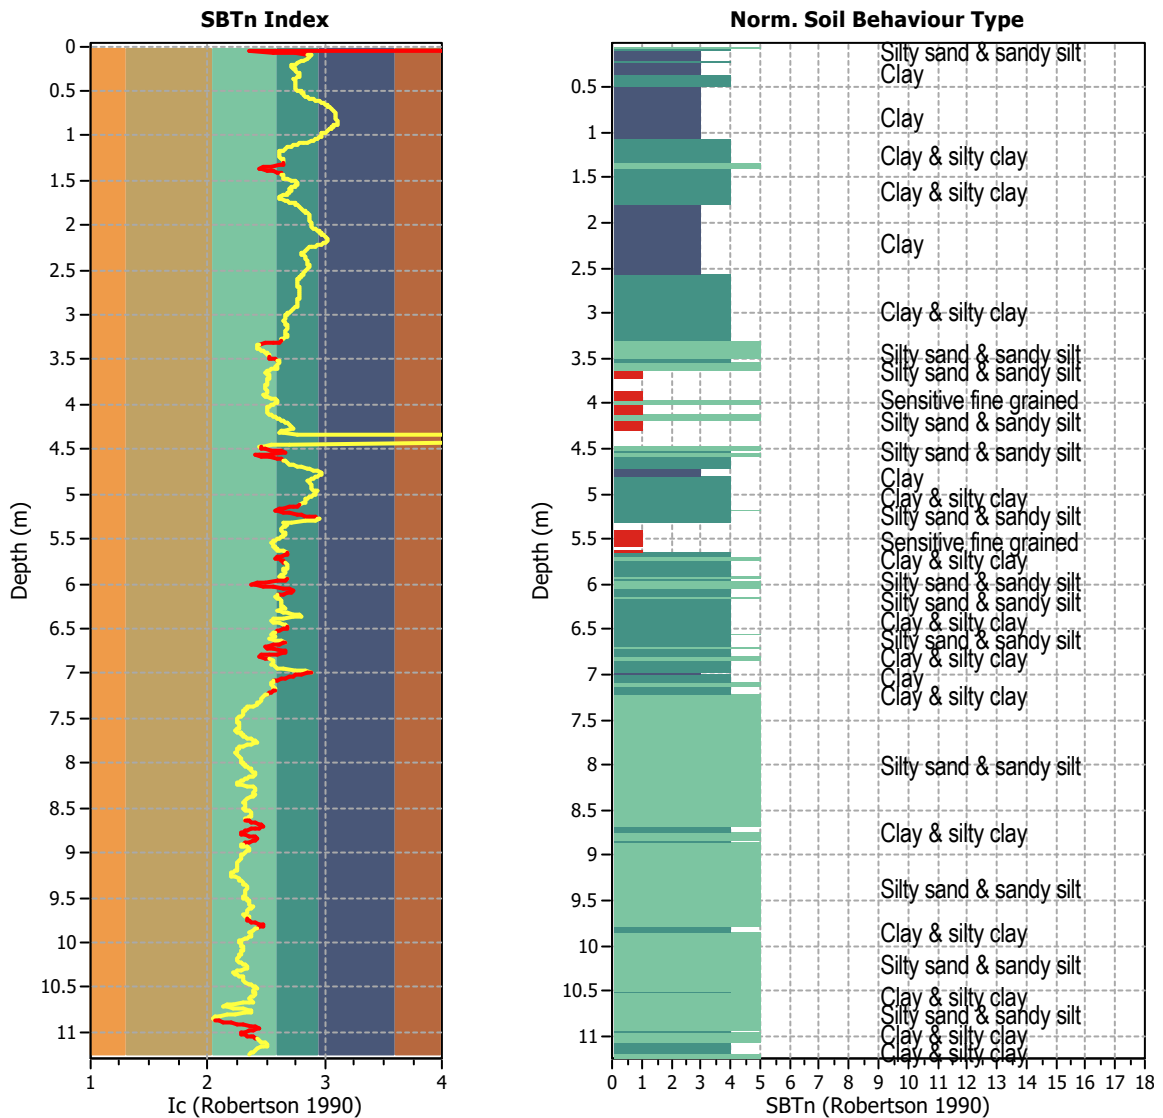

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	1125
I_c maximum check value:	3.00	Total points excluded:	201
I_c change ratio value:	0.0100	Exclusion percentage:	17.87%
Minimum number of points in layer:	4	Number of layers detected:	31


Estimation of post-earthquake settlements

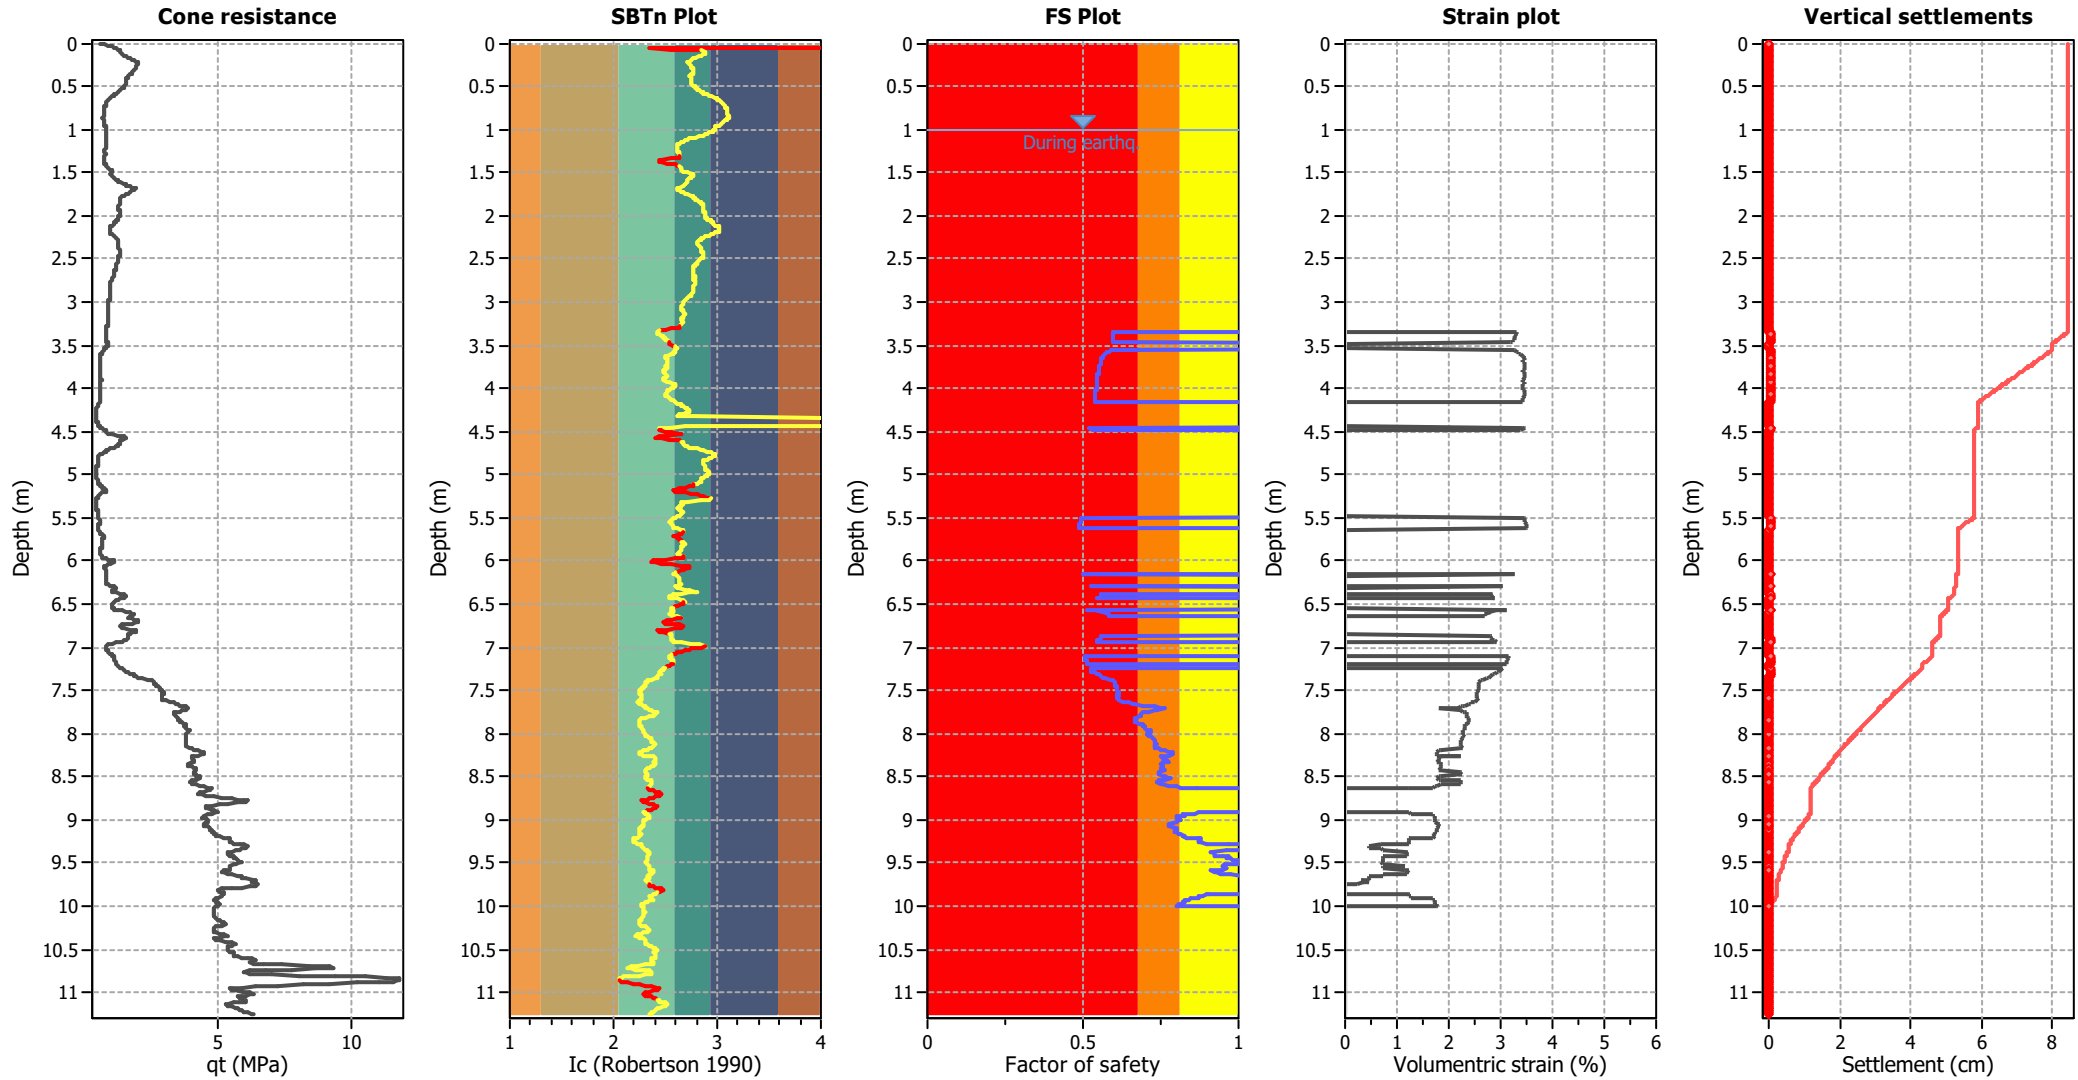

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

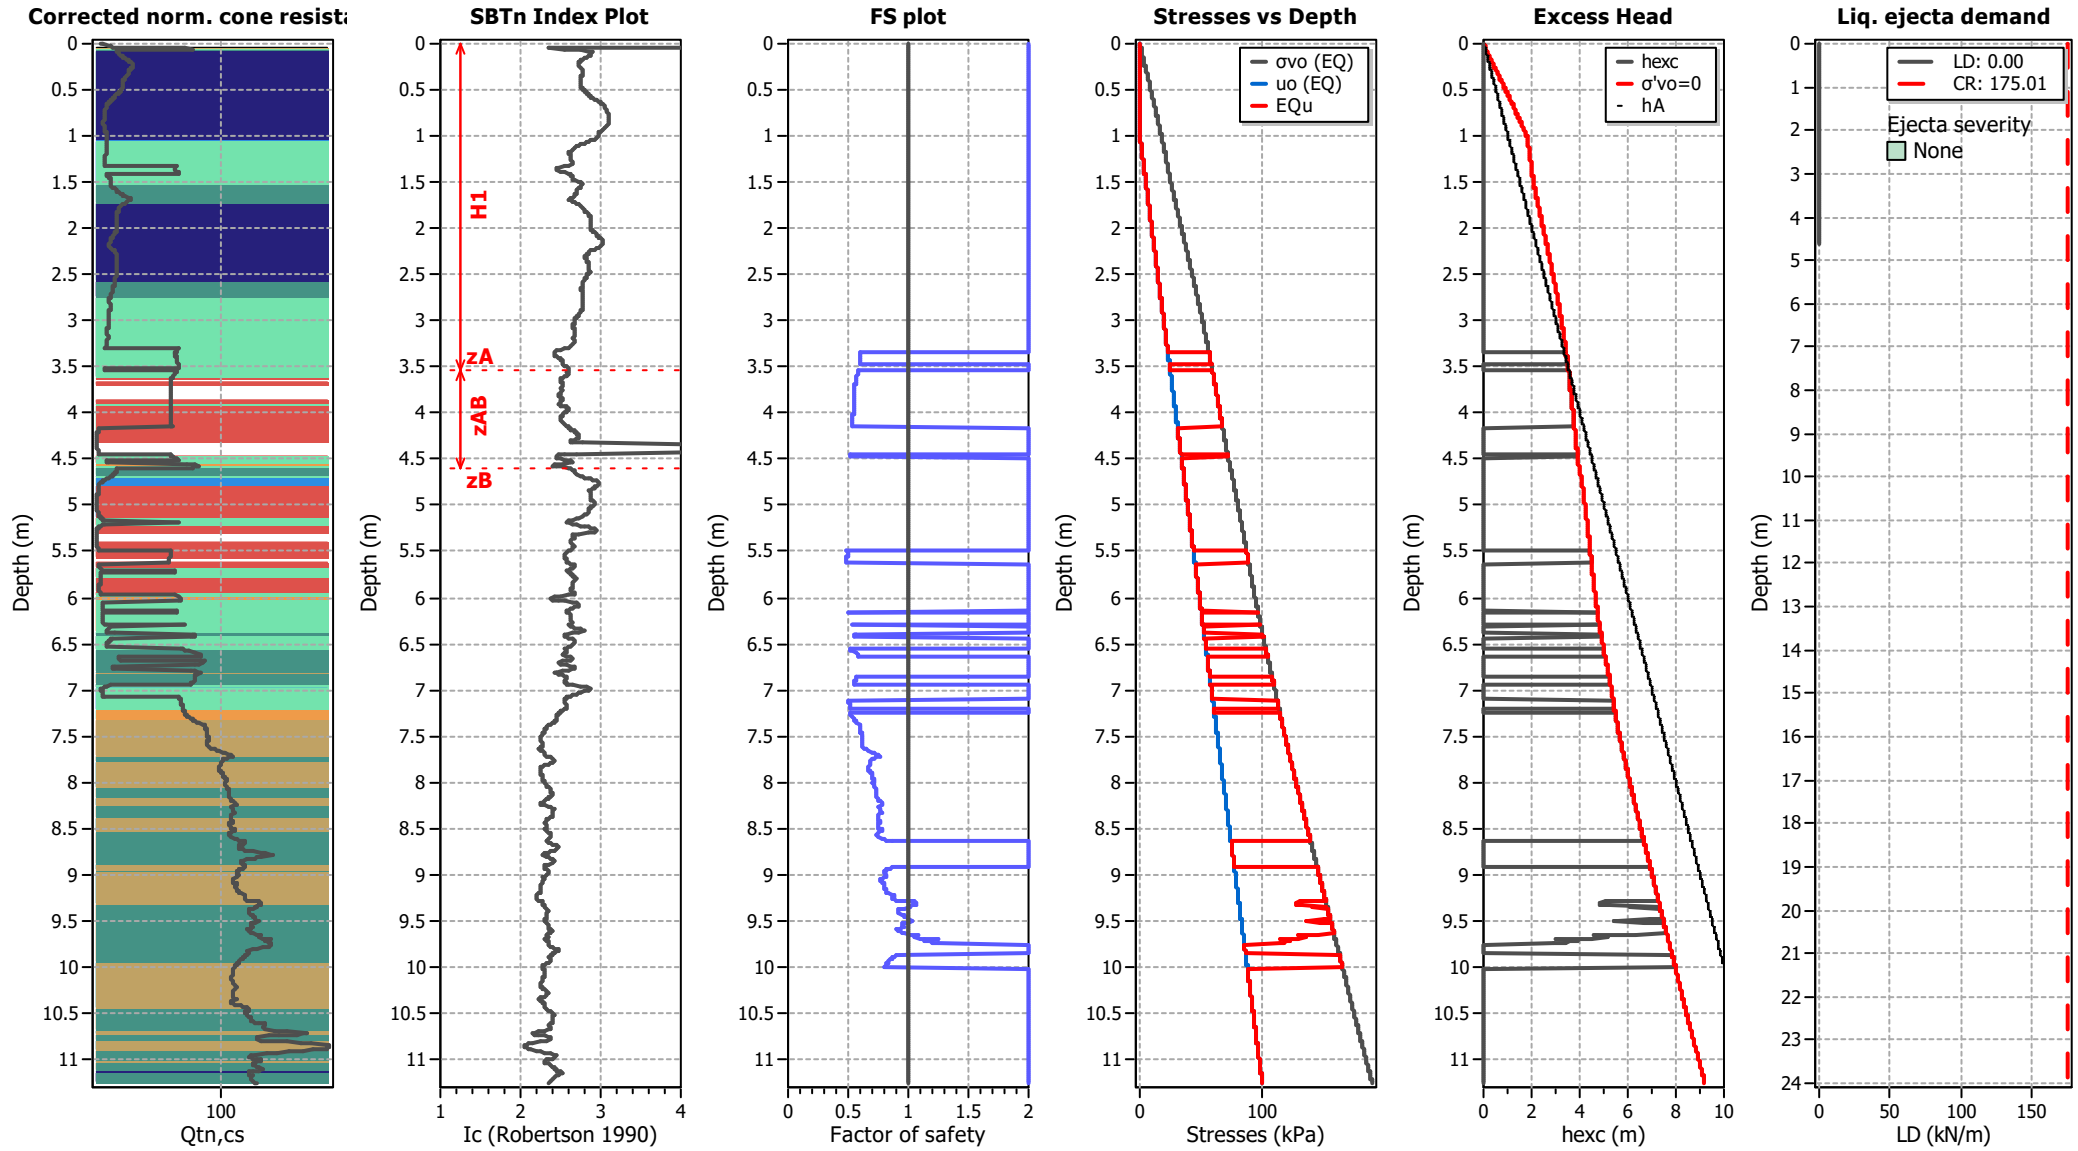

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT403

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

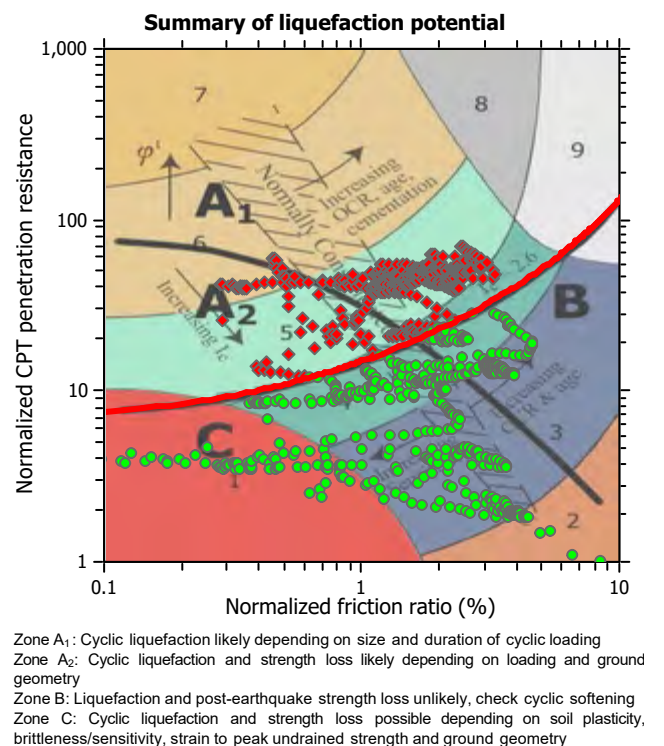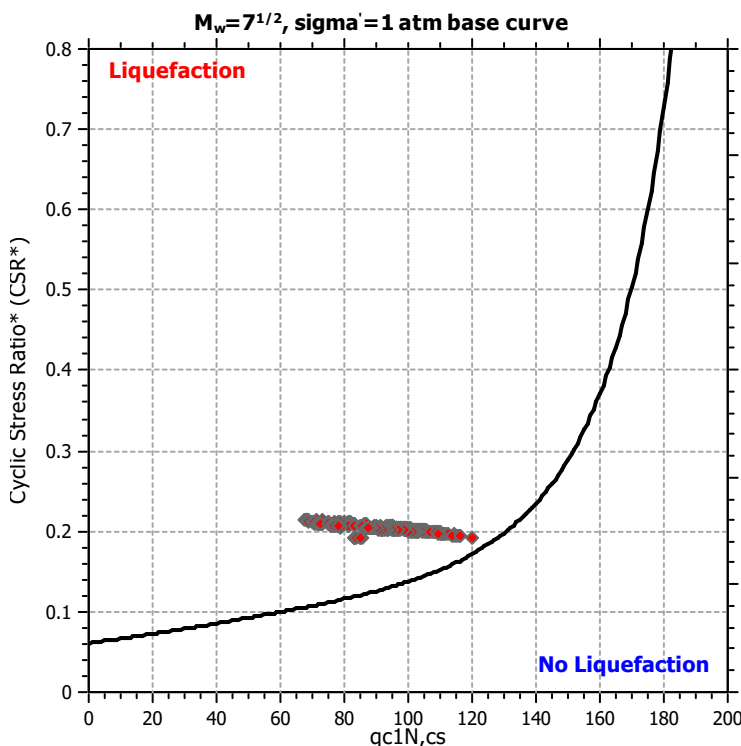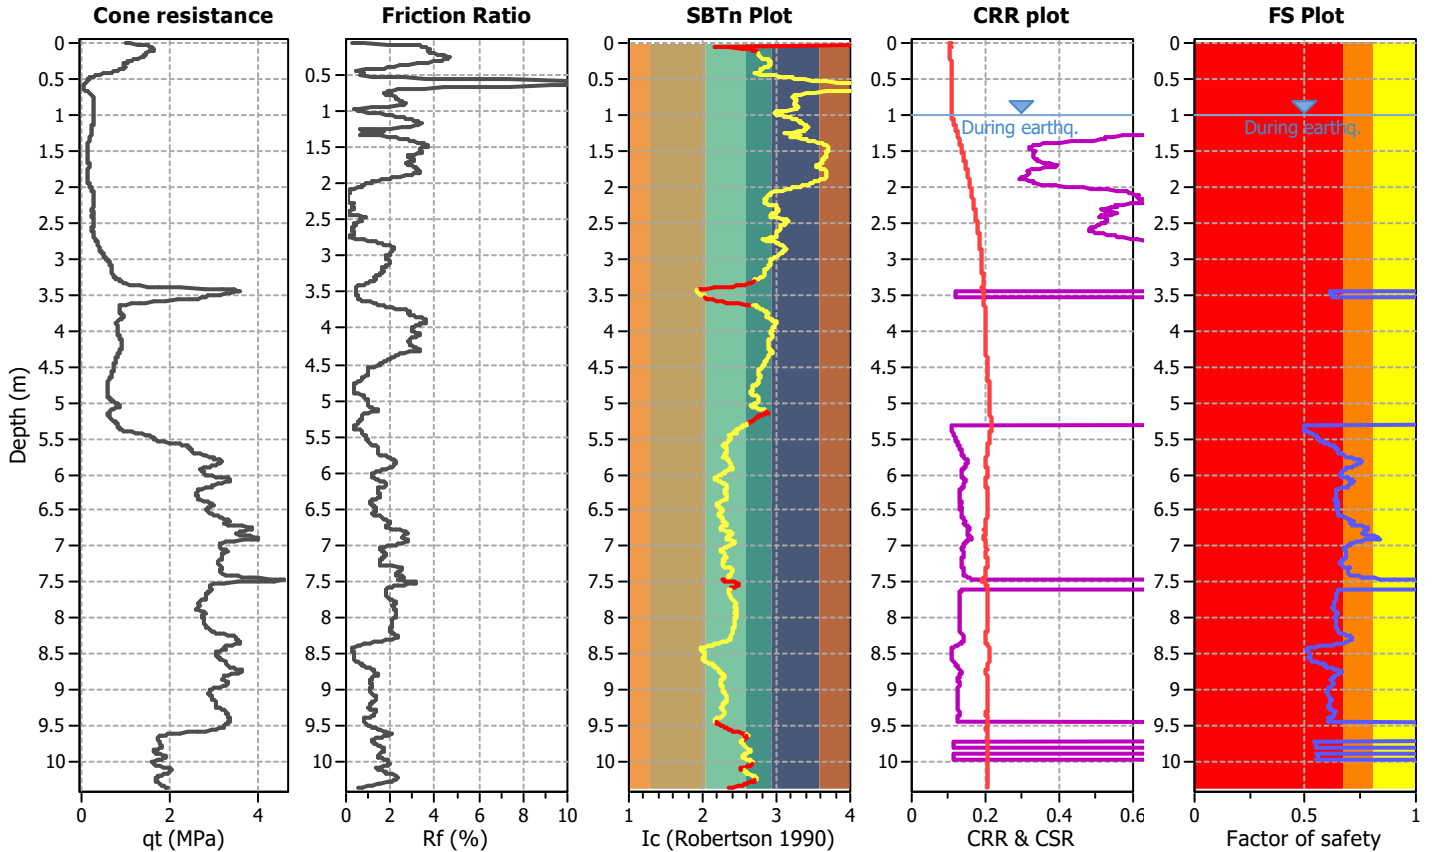

CPT basic interpretation plots

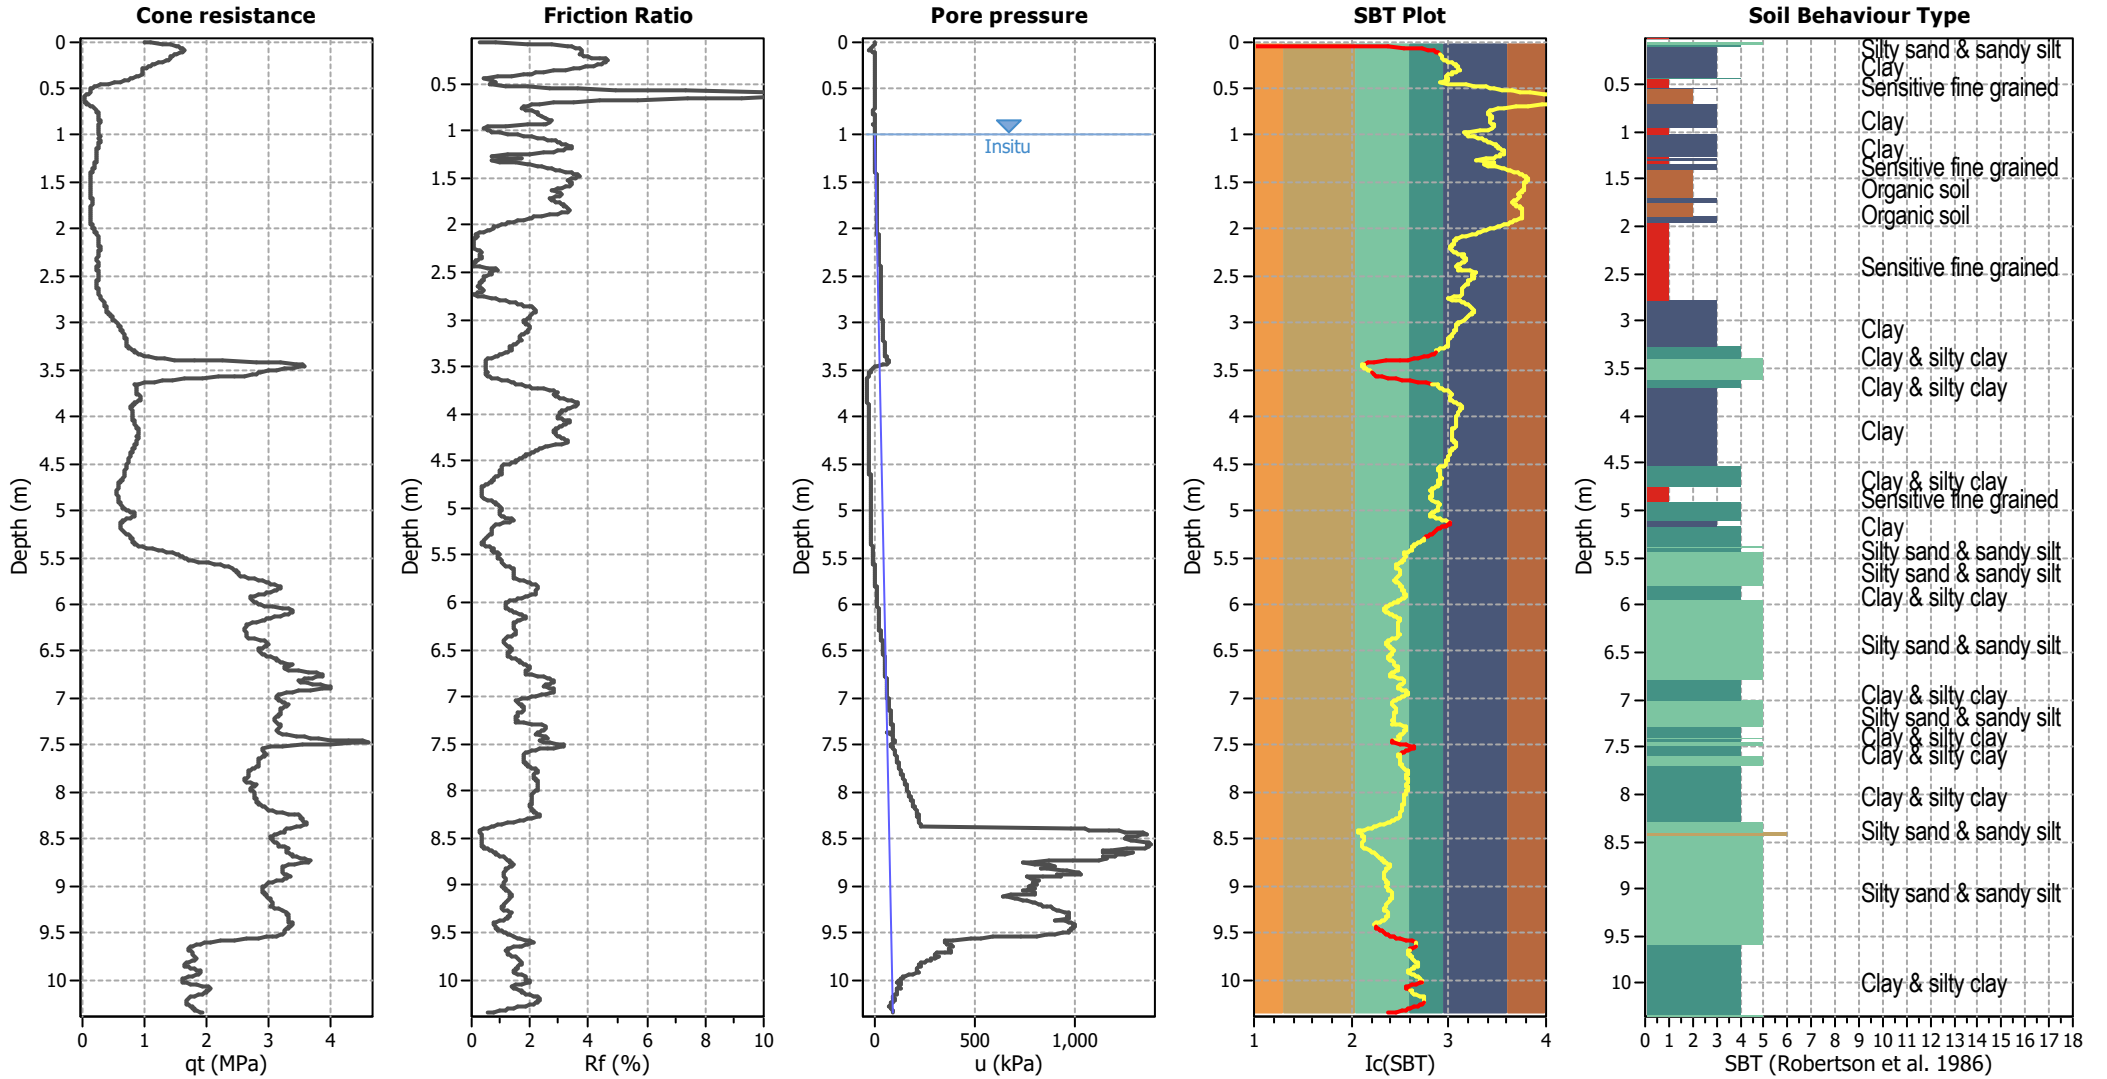


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

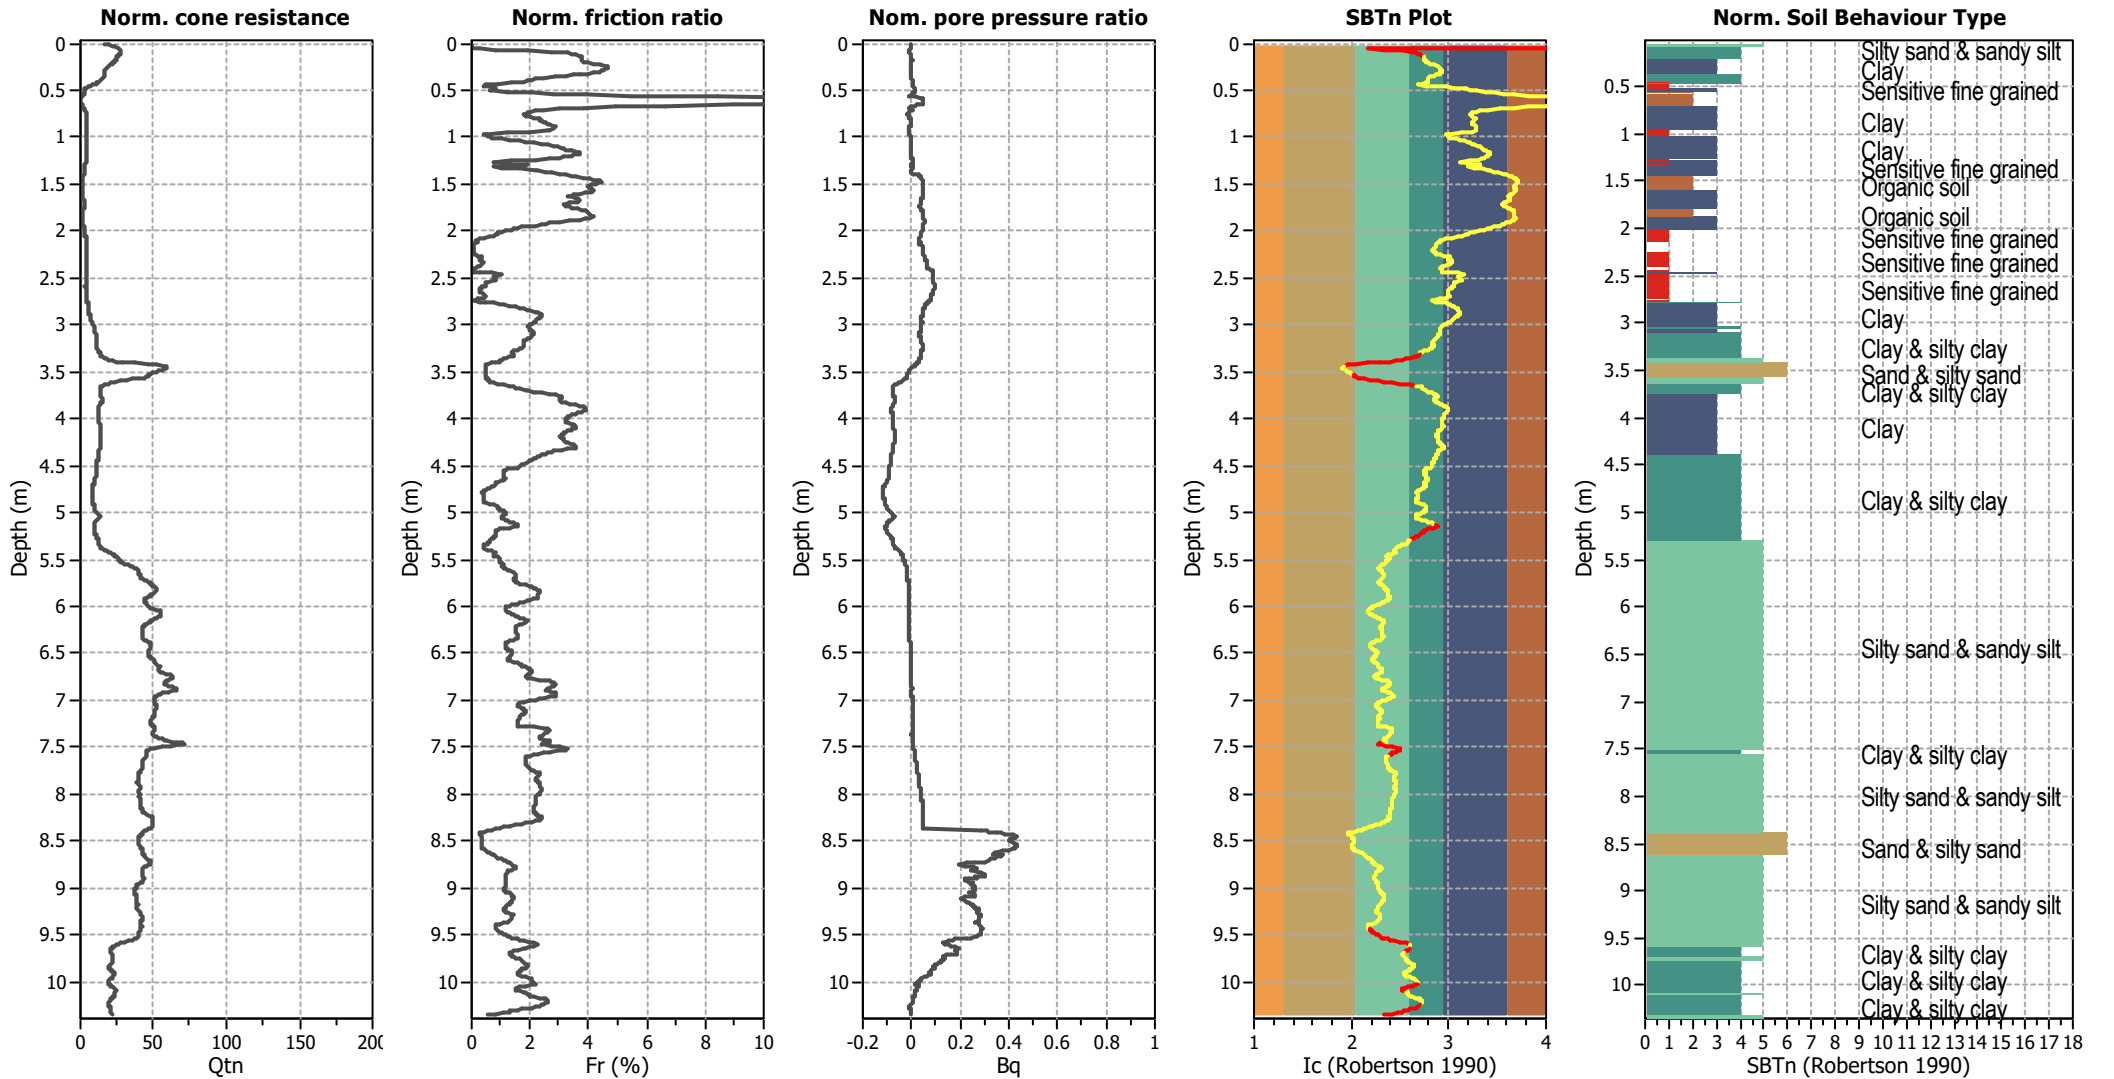


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

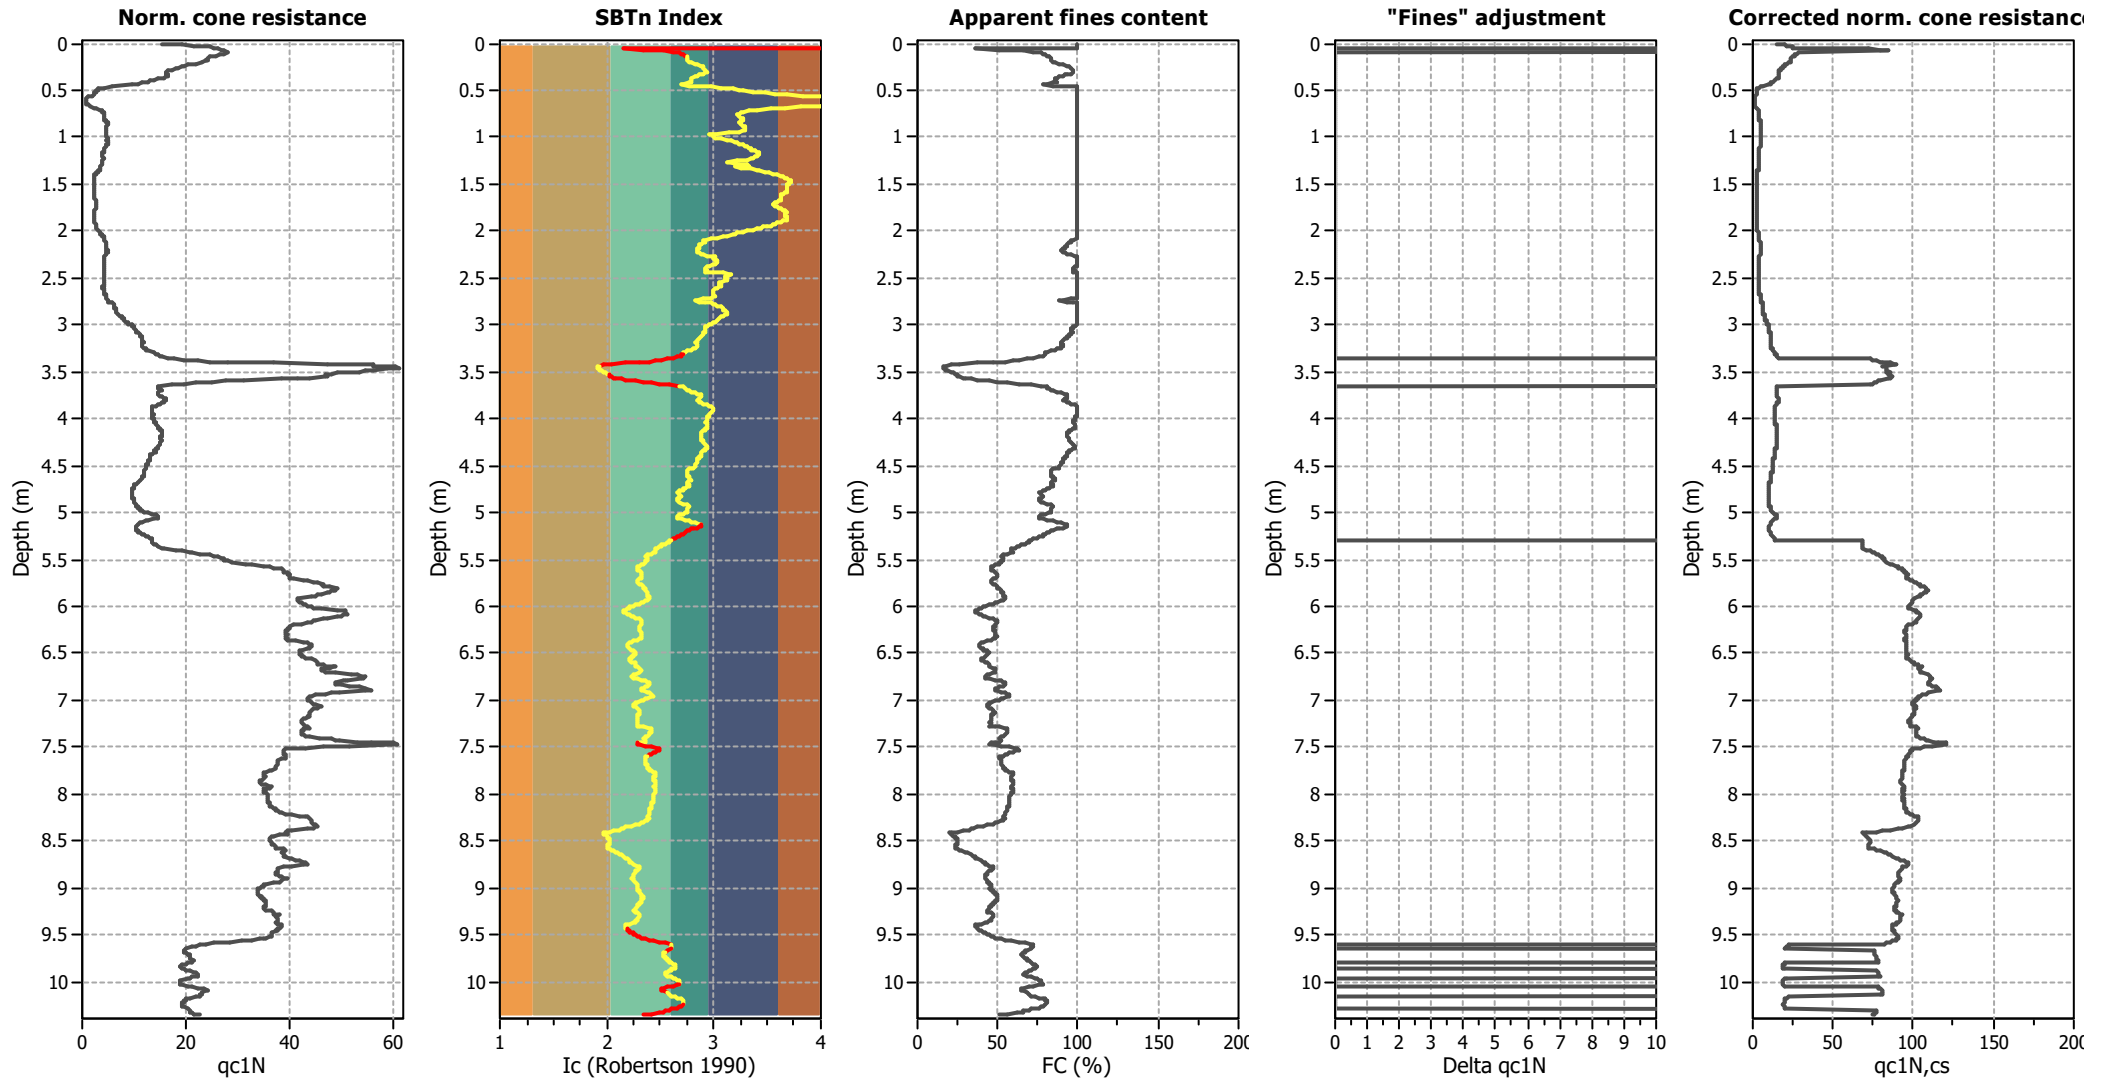

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

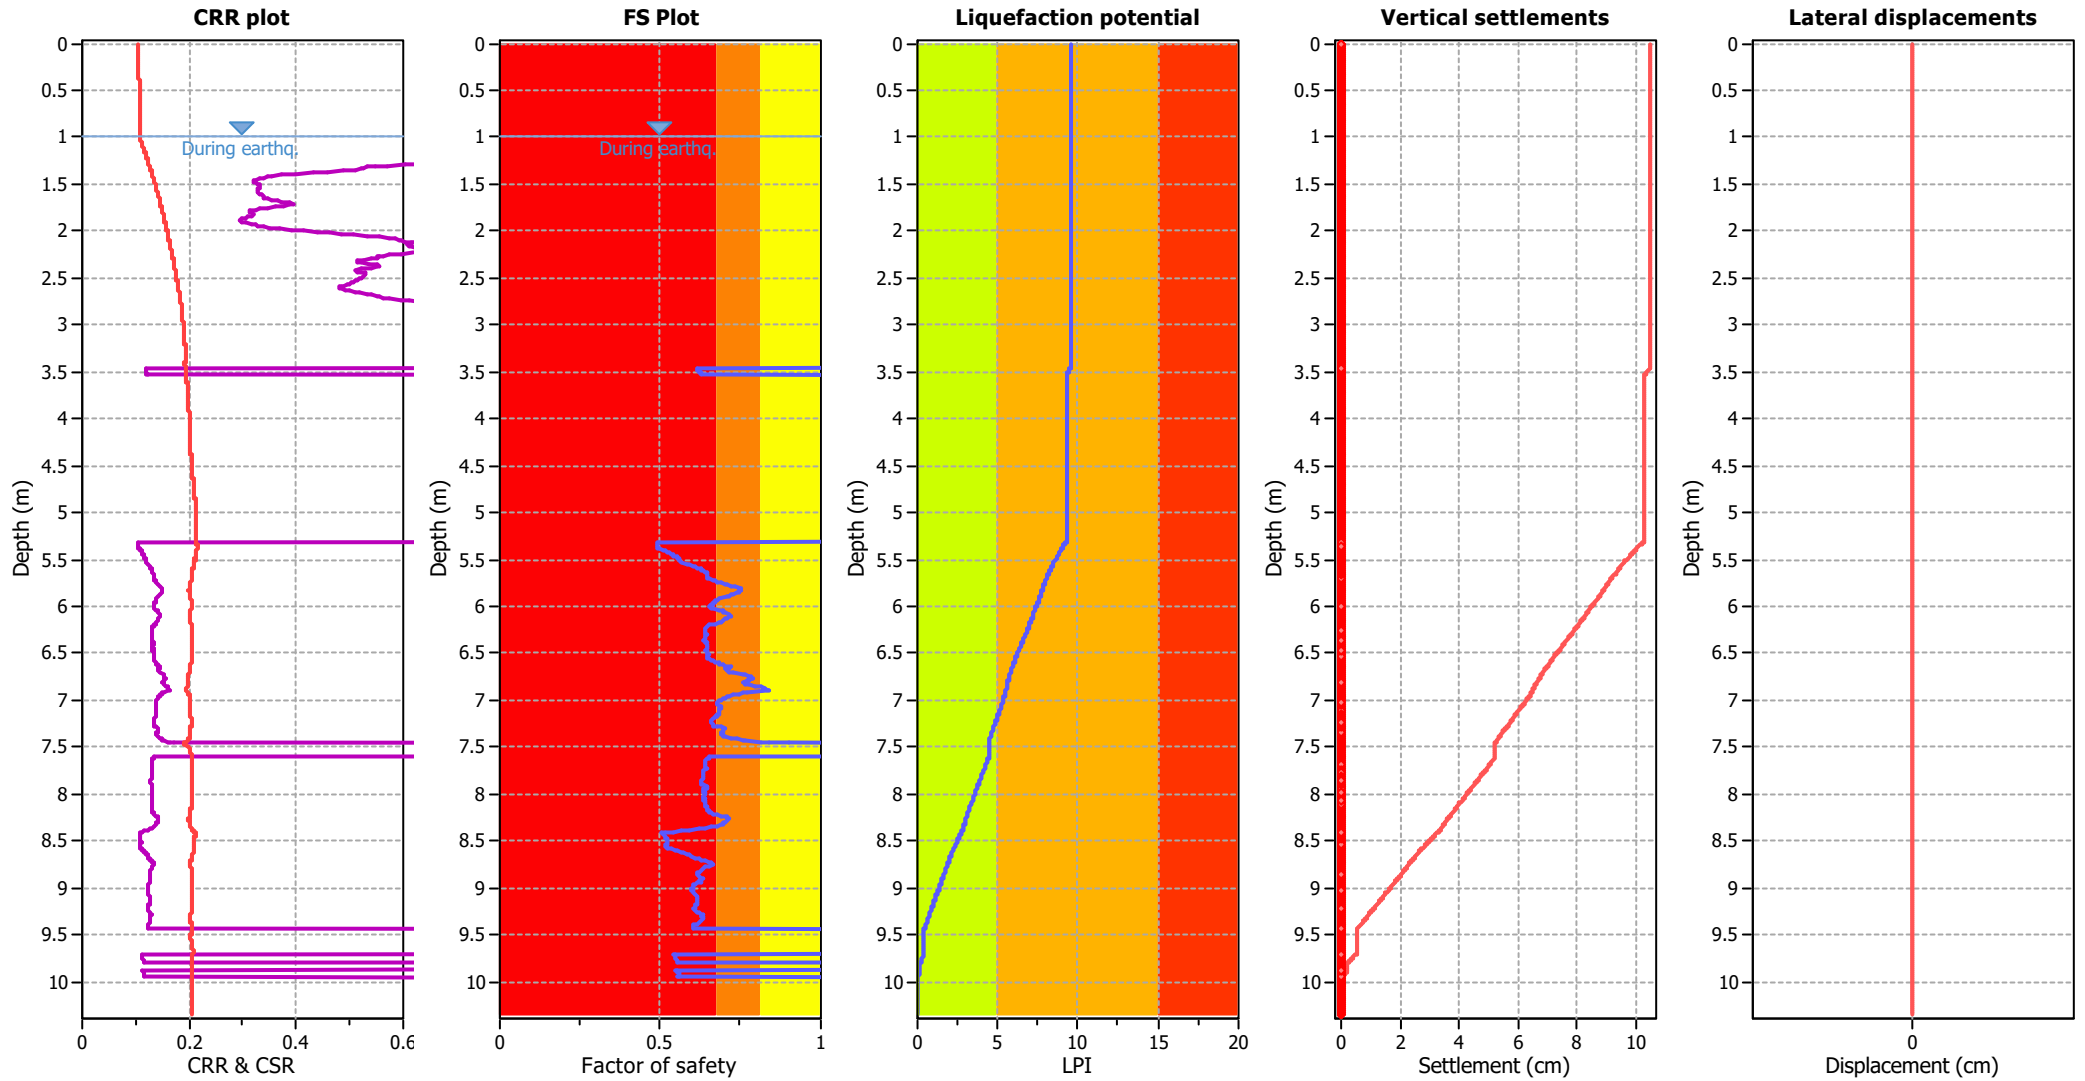

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

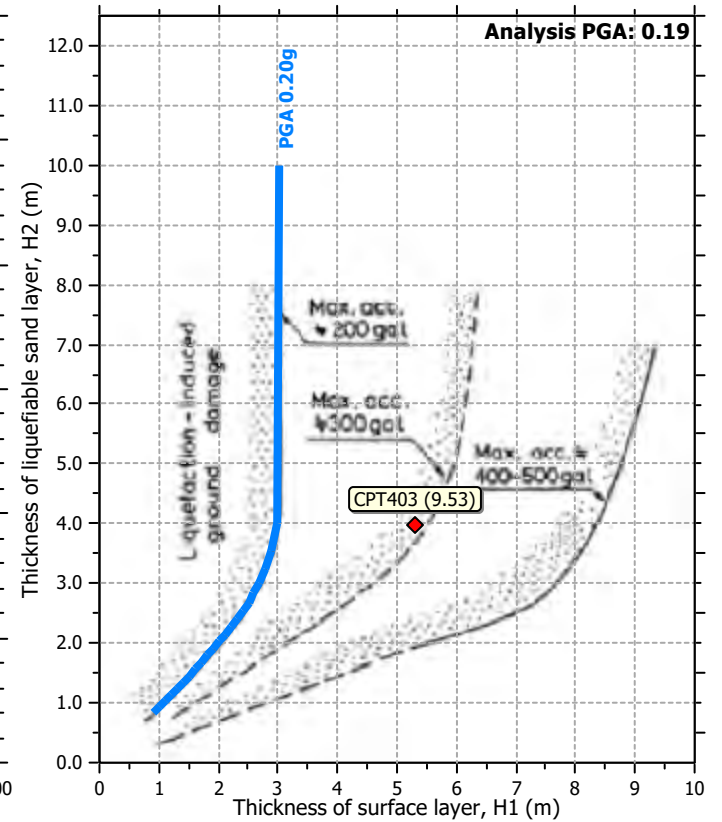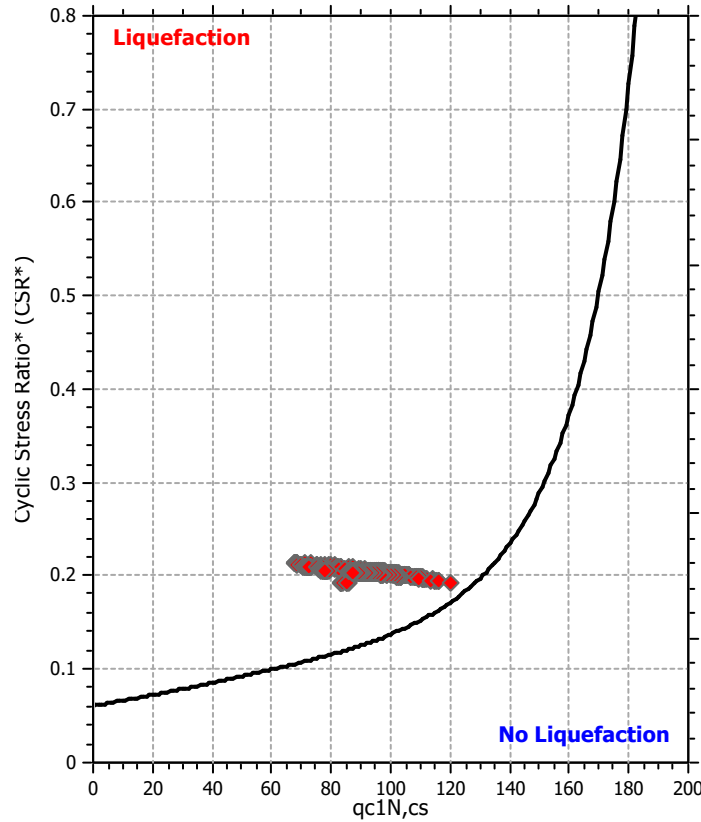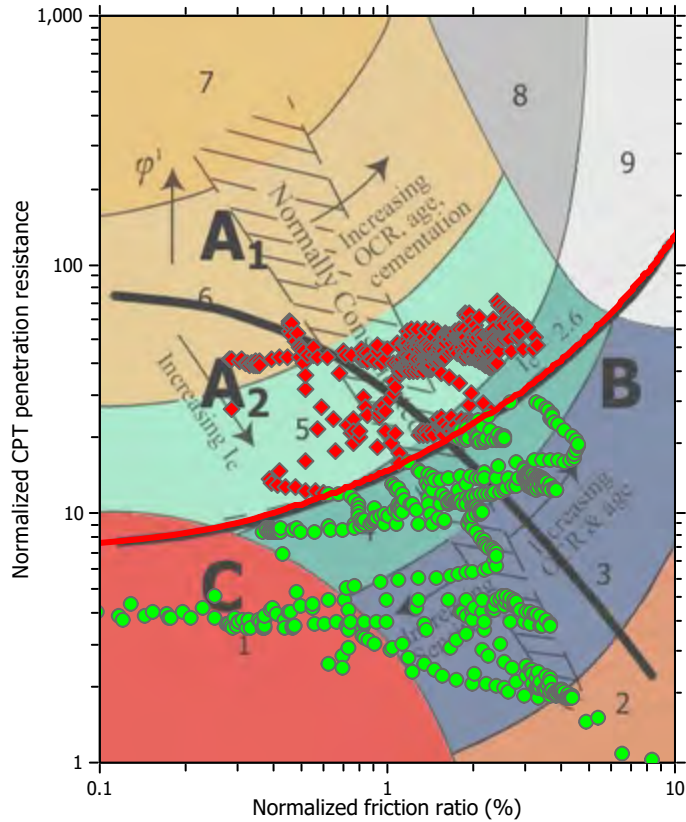

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

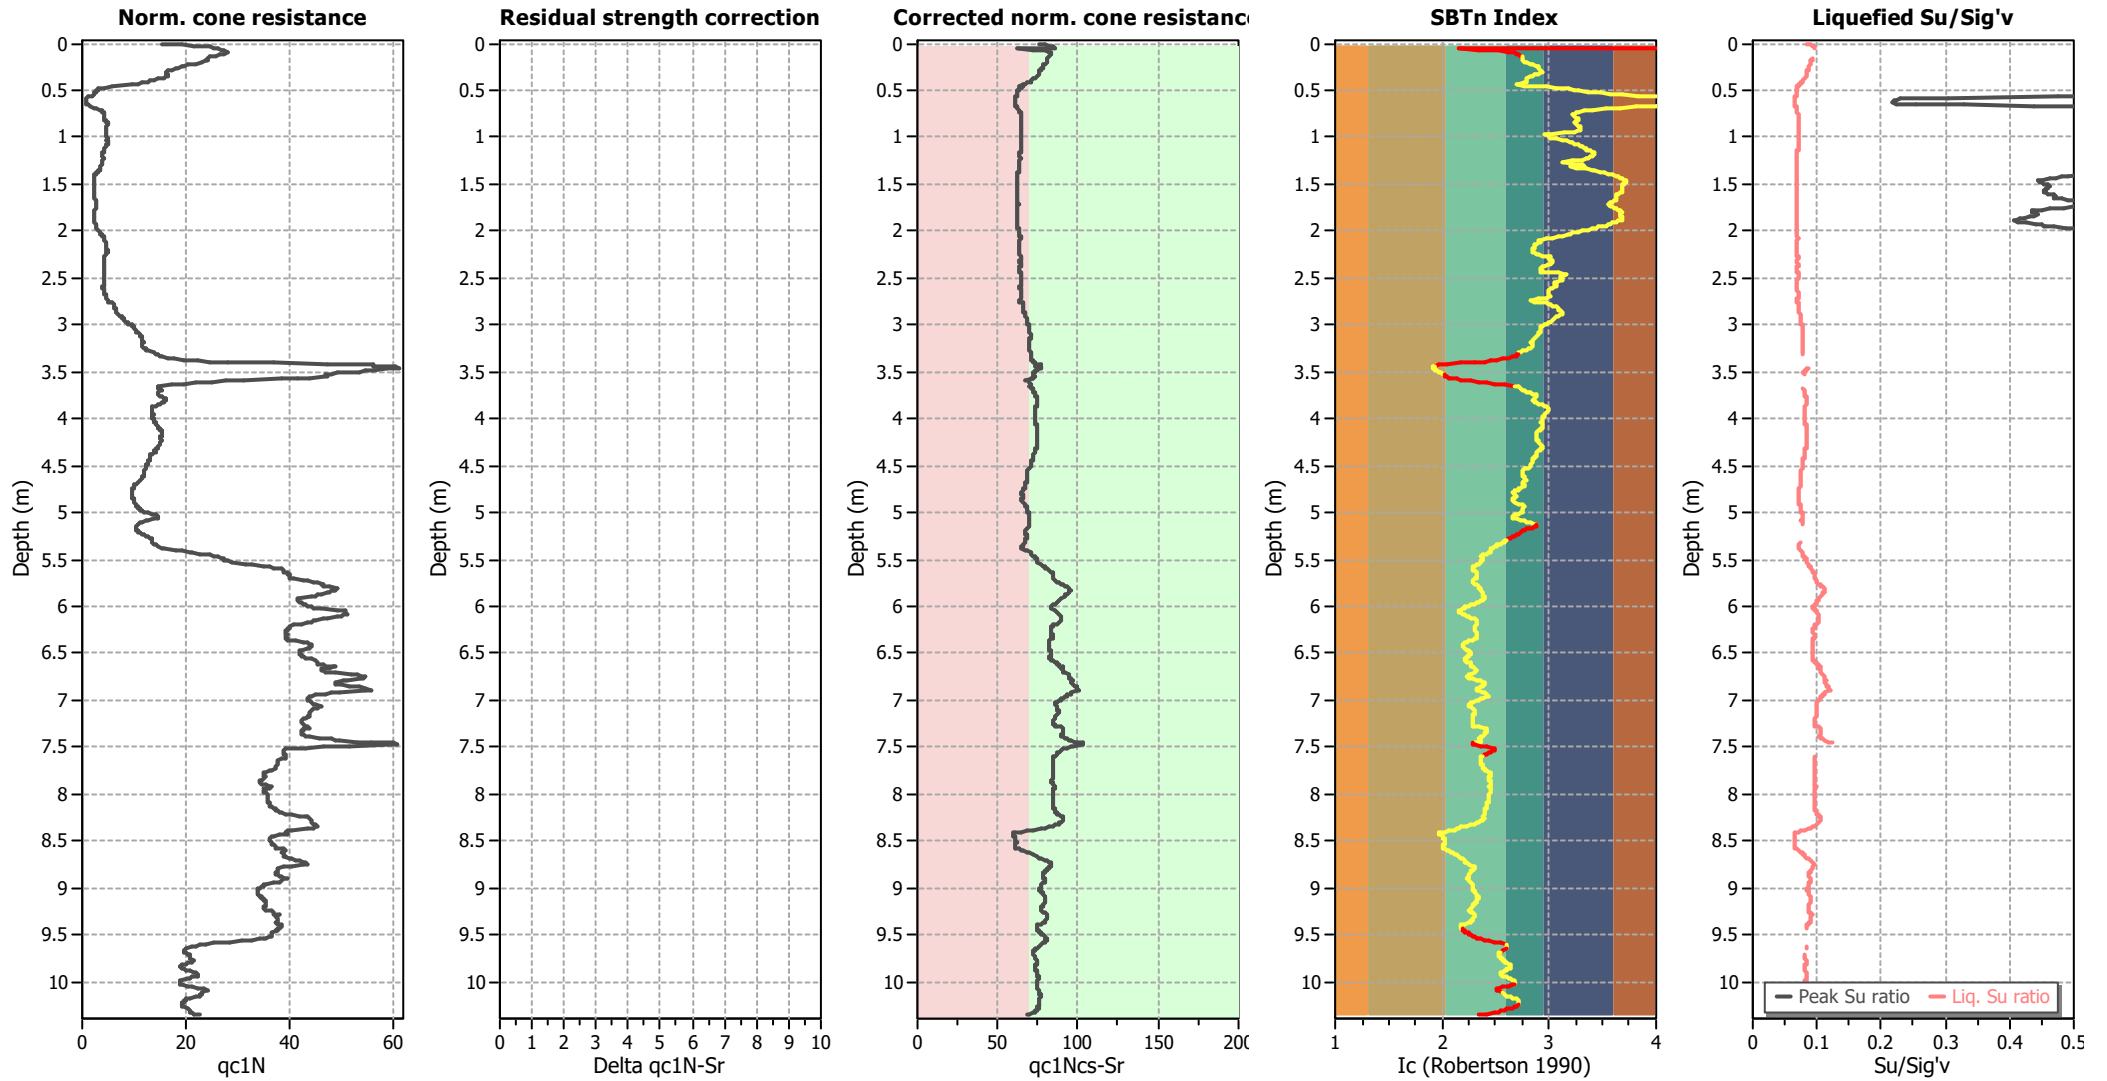

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

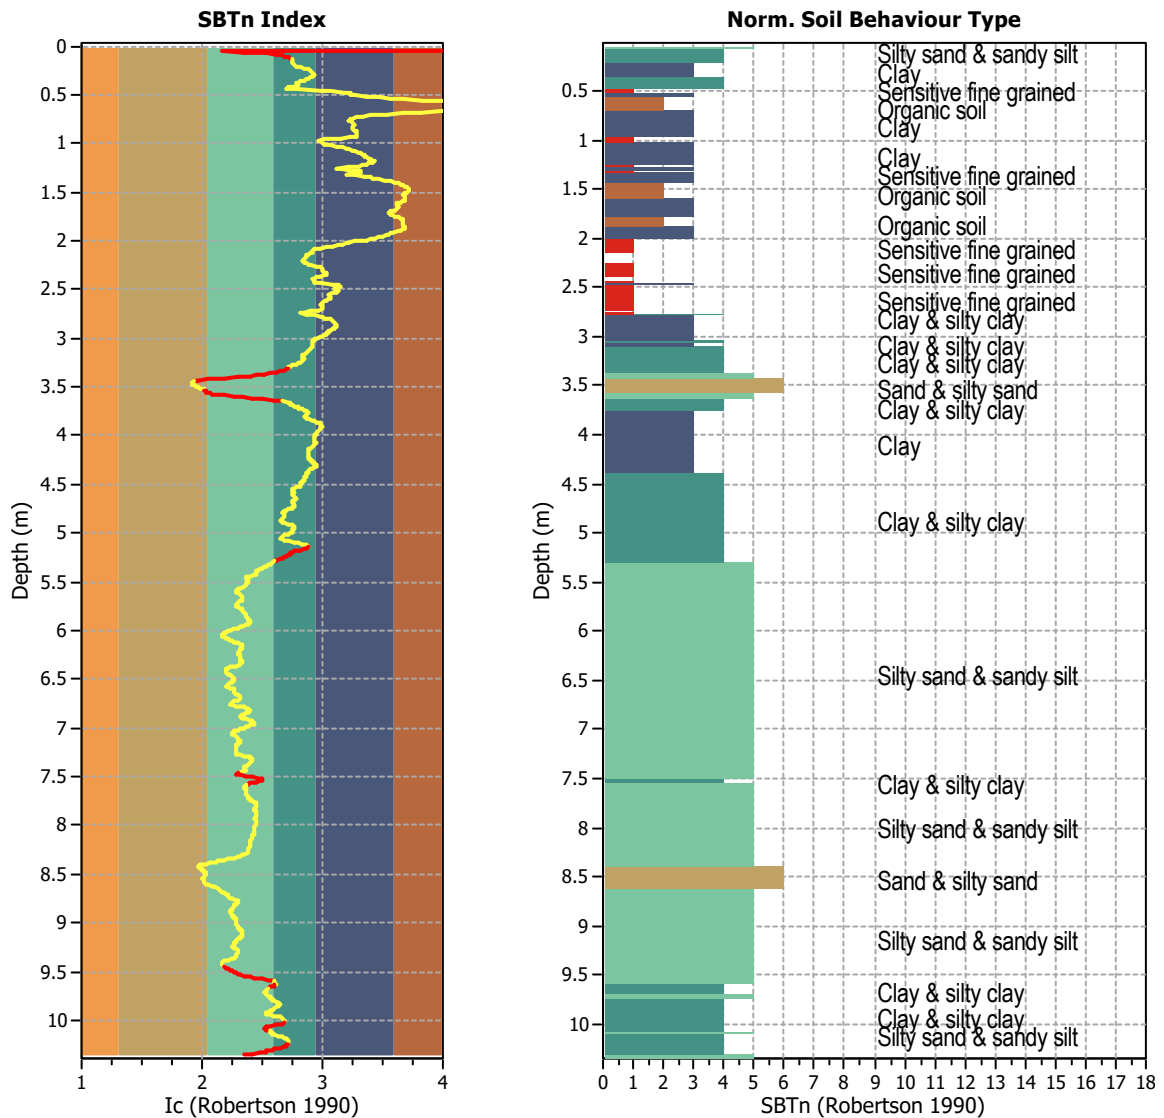


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1035
 Total points excluded: 111
 Exclusion percentage: 10.72%
 Number of layers detected: 11


Estimation of post-earthquake settlements

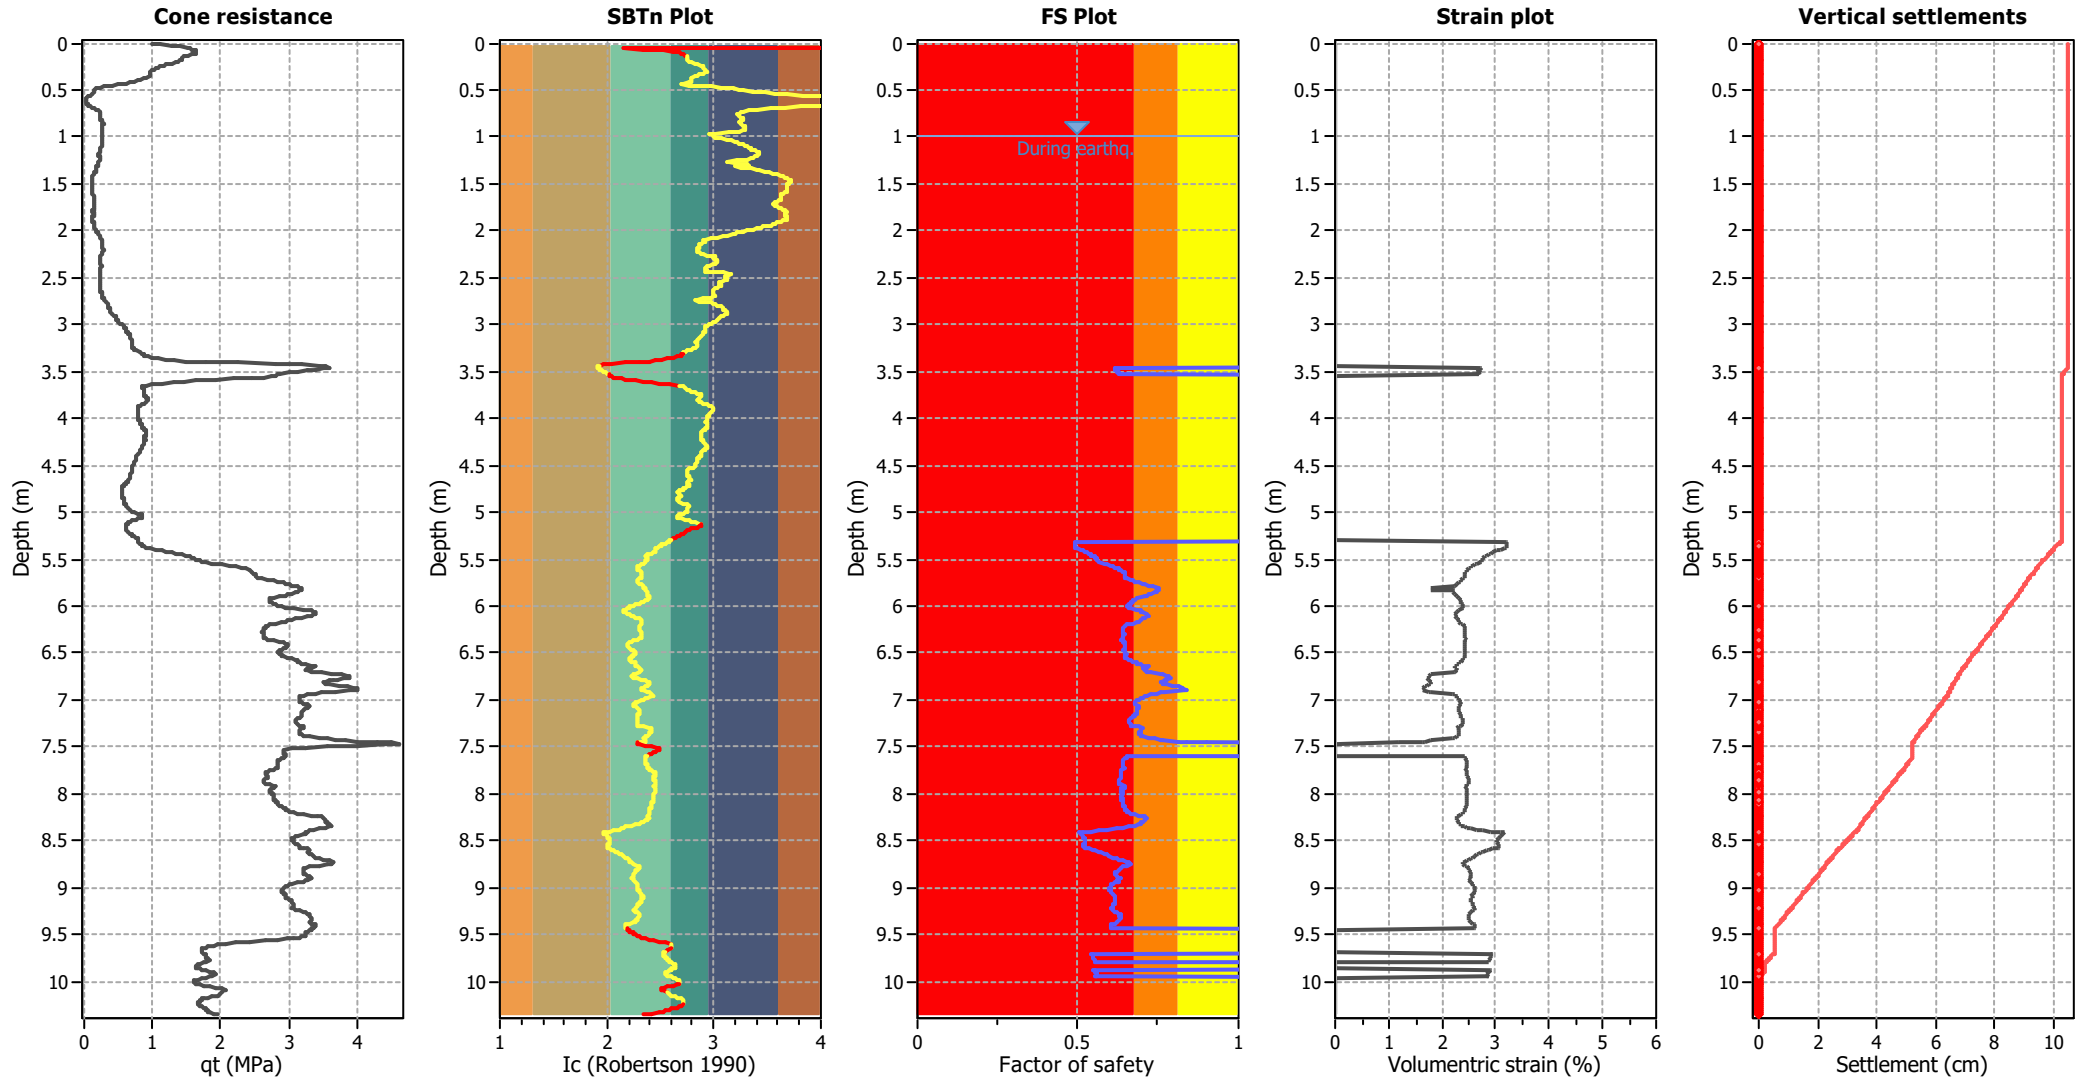

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

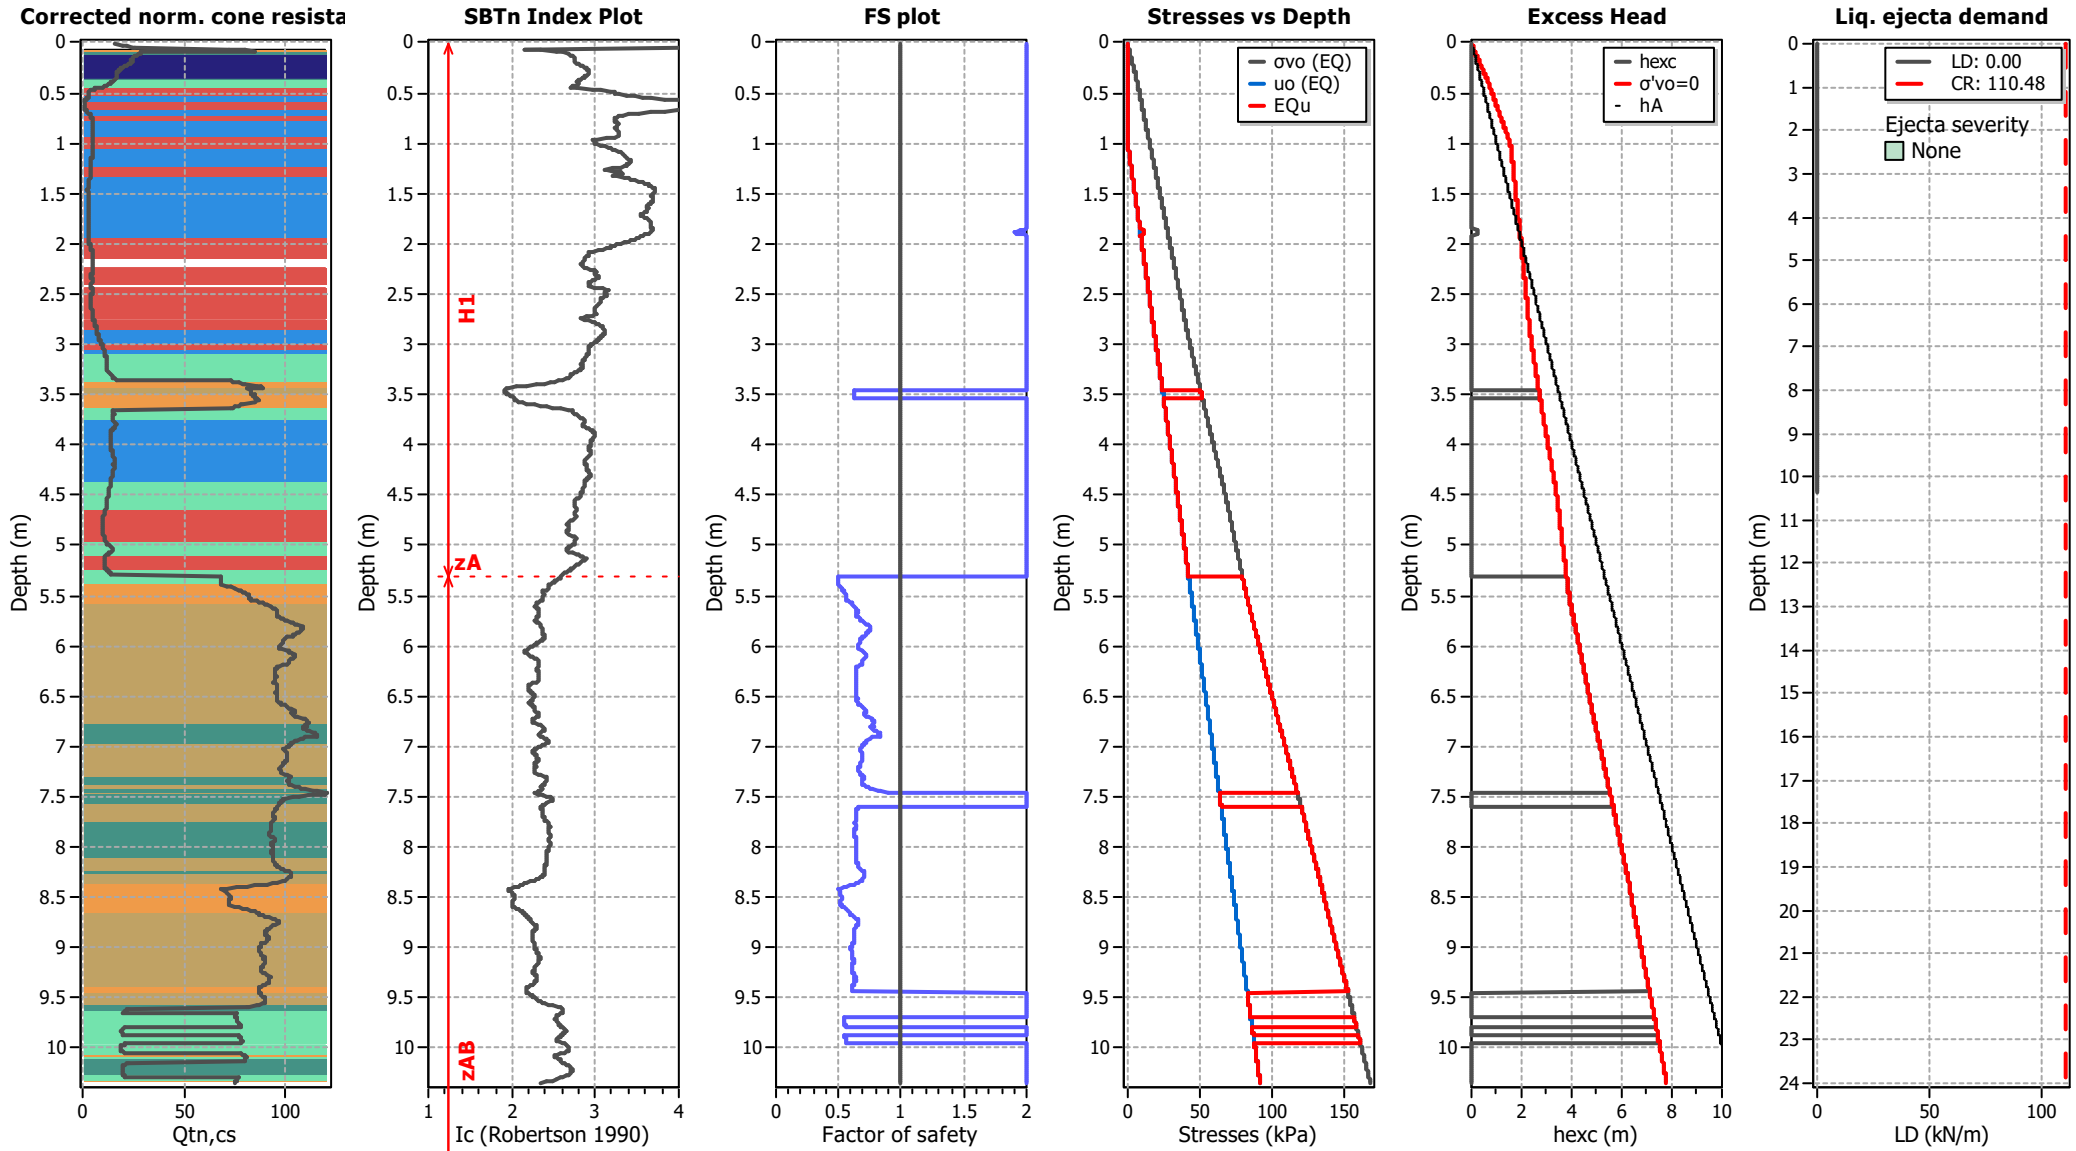

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT404

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

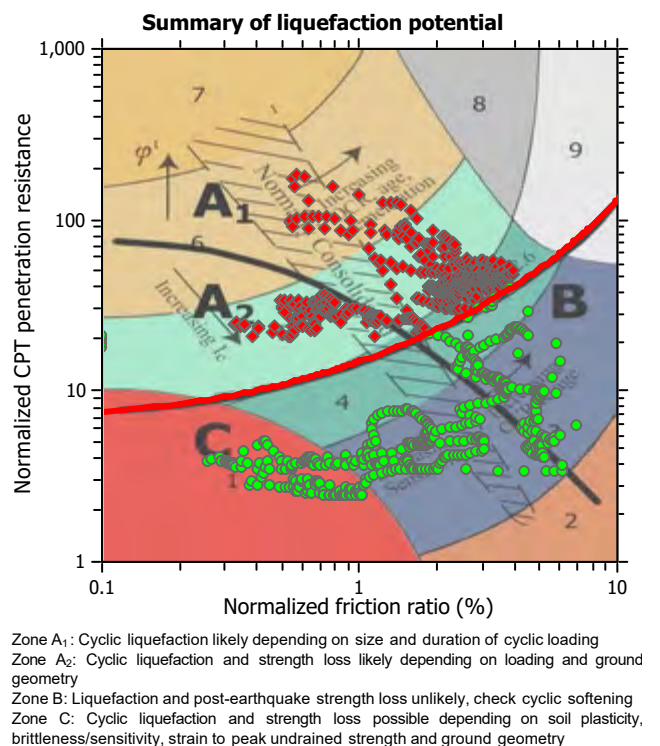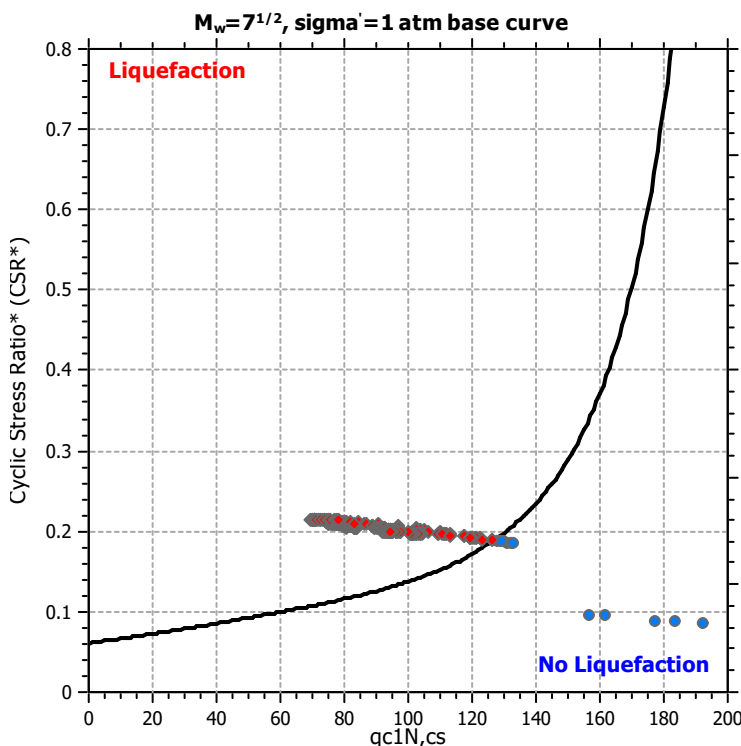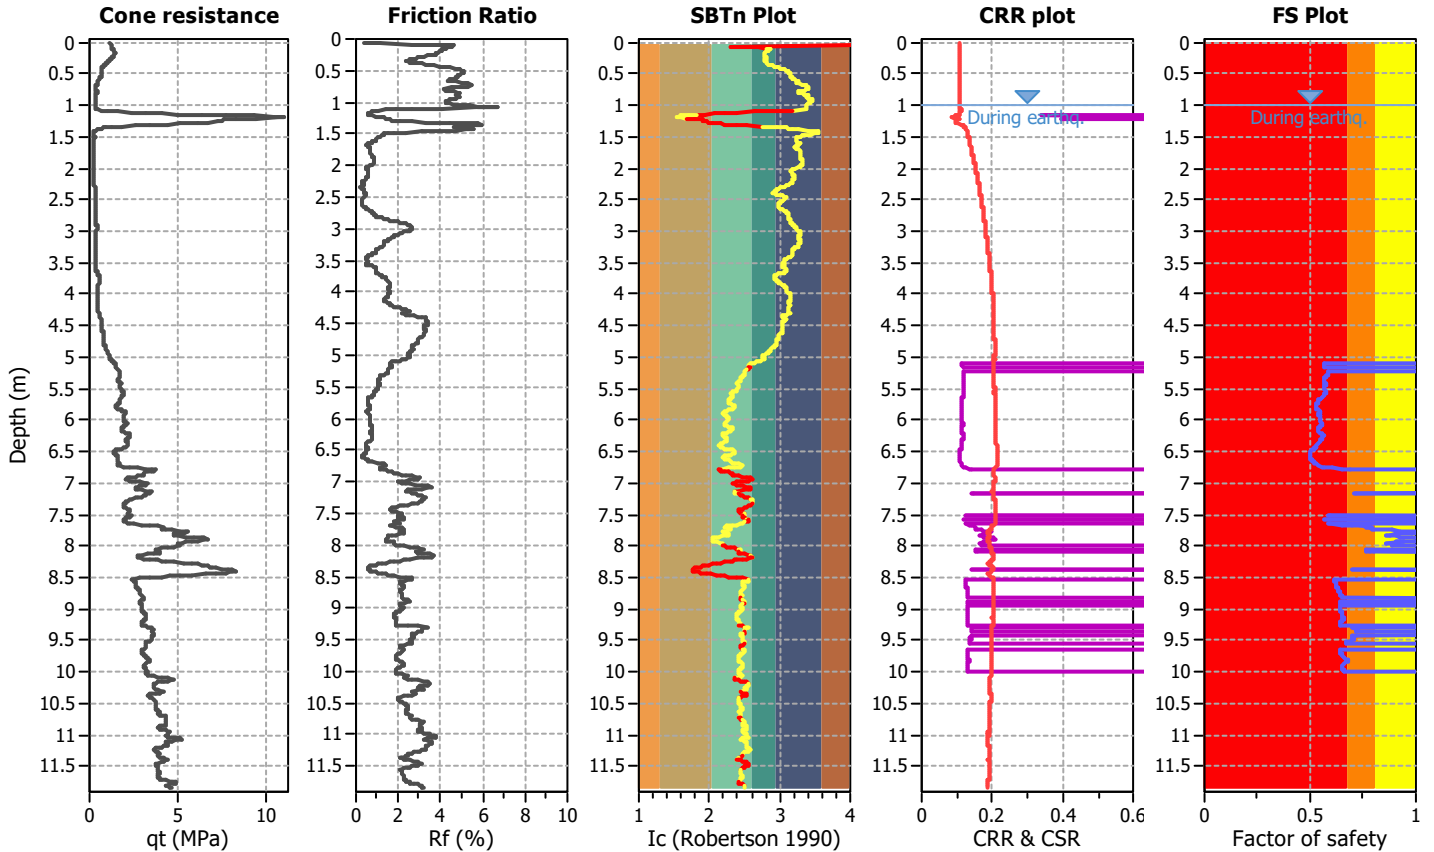

CPT basic interpretation plots

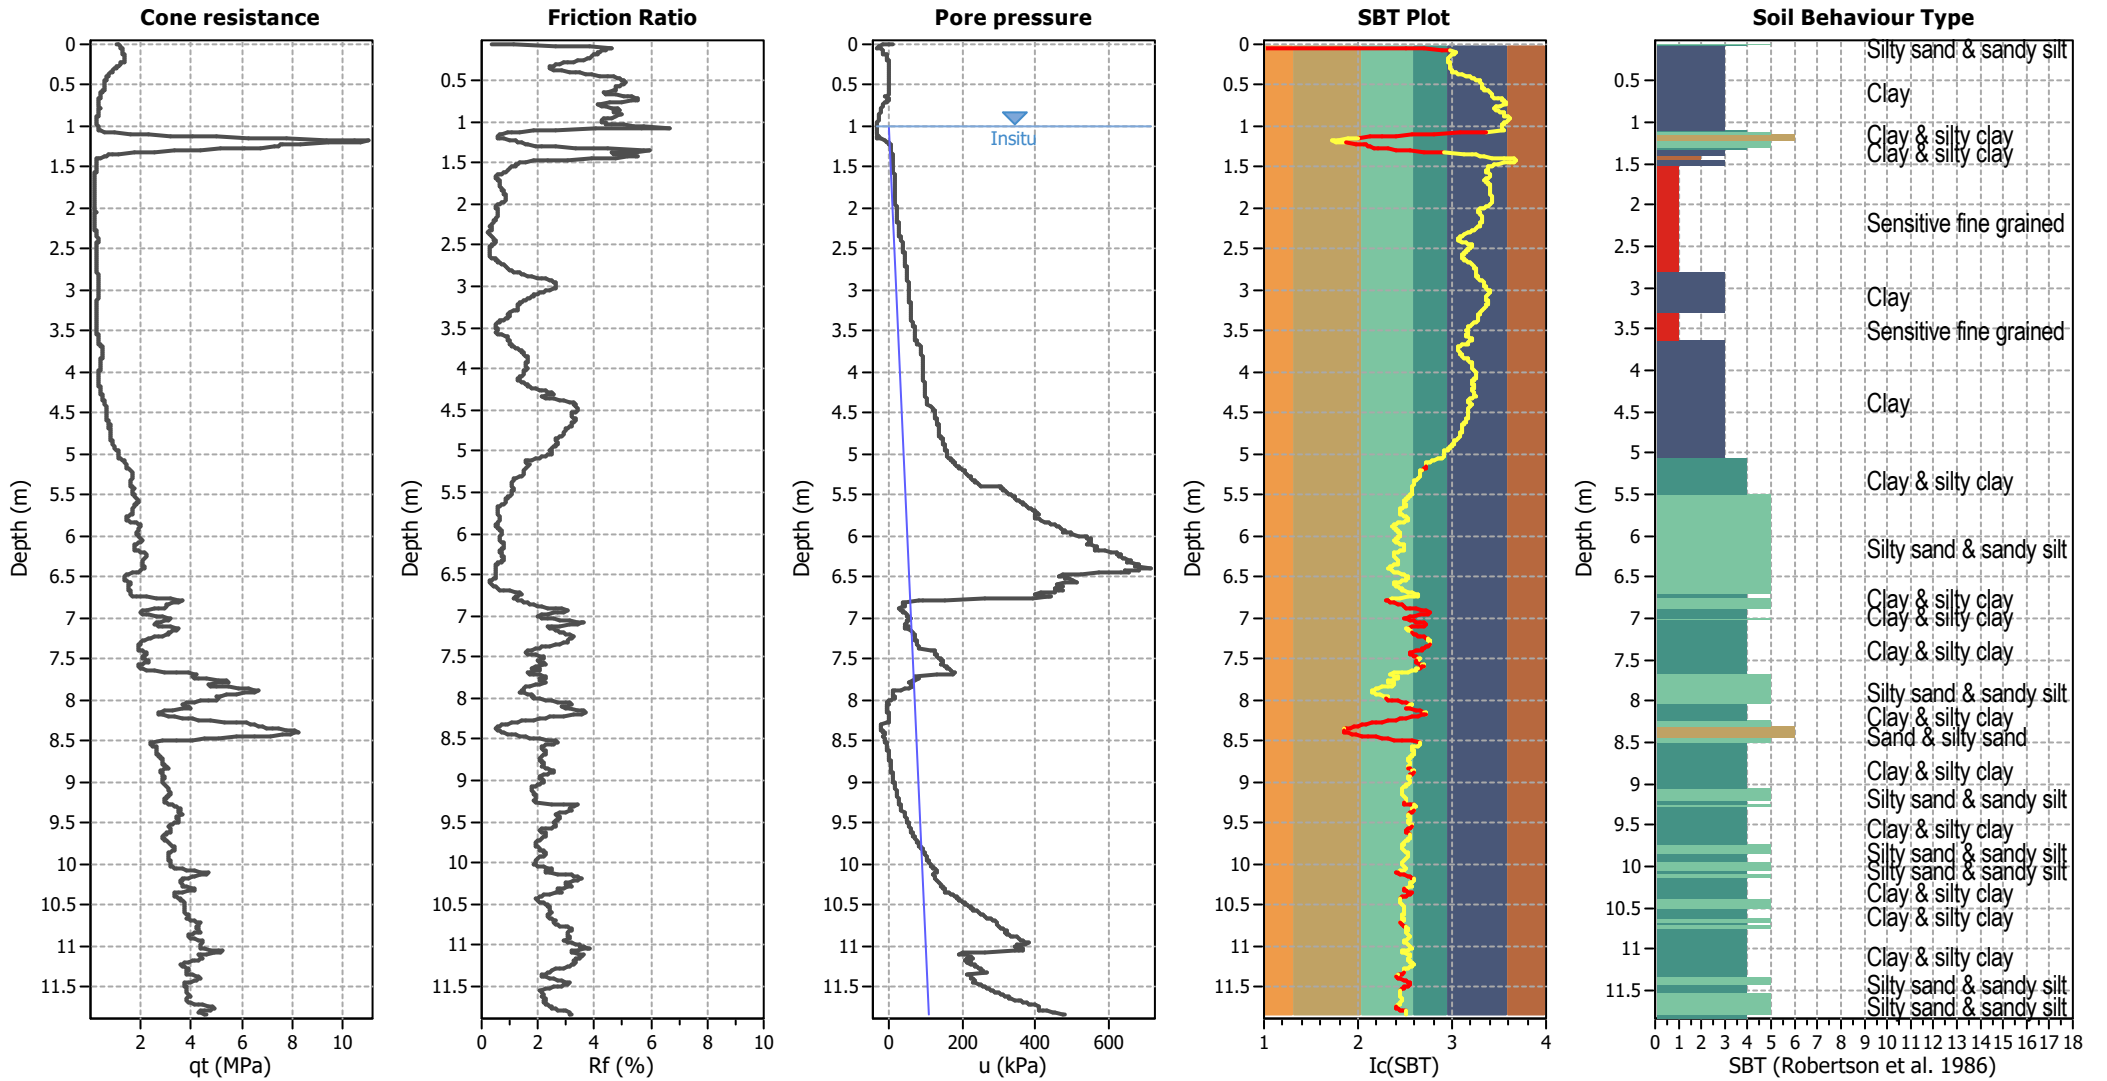


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

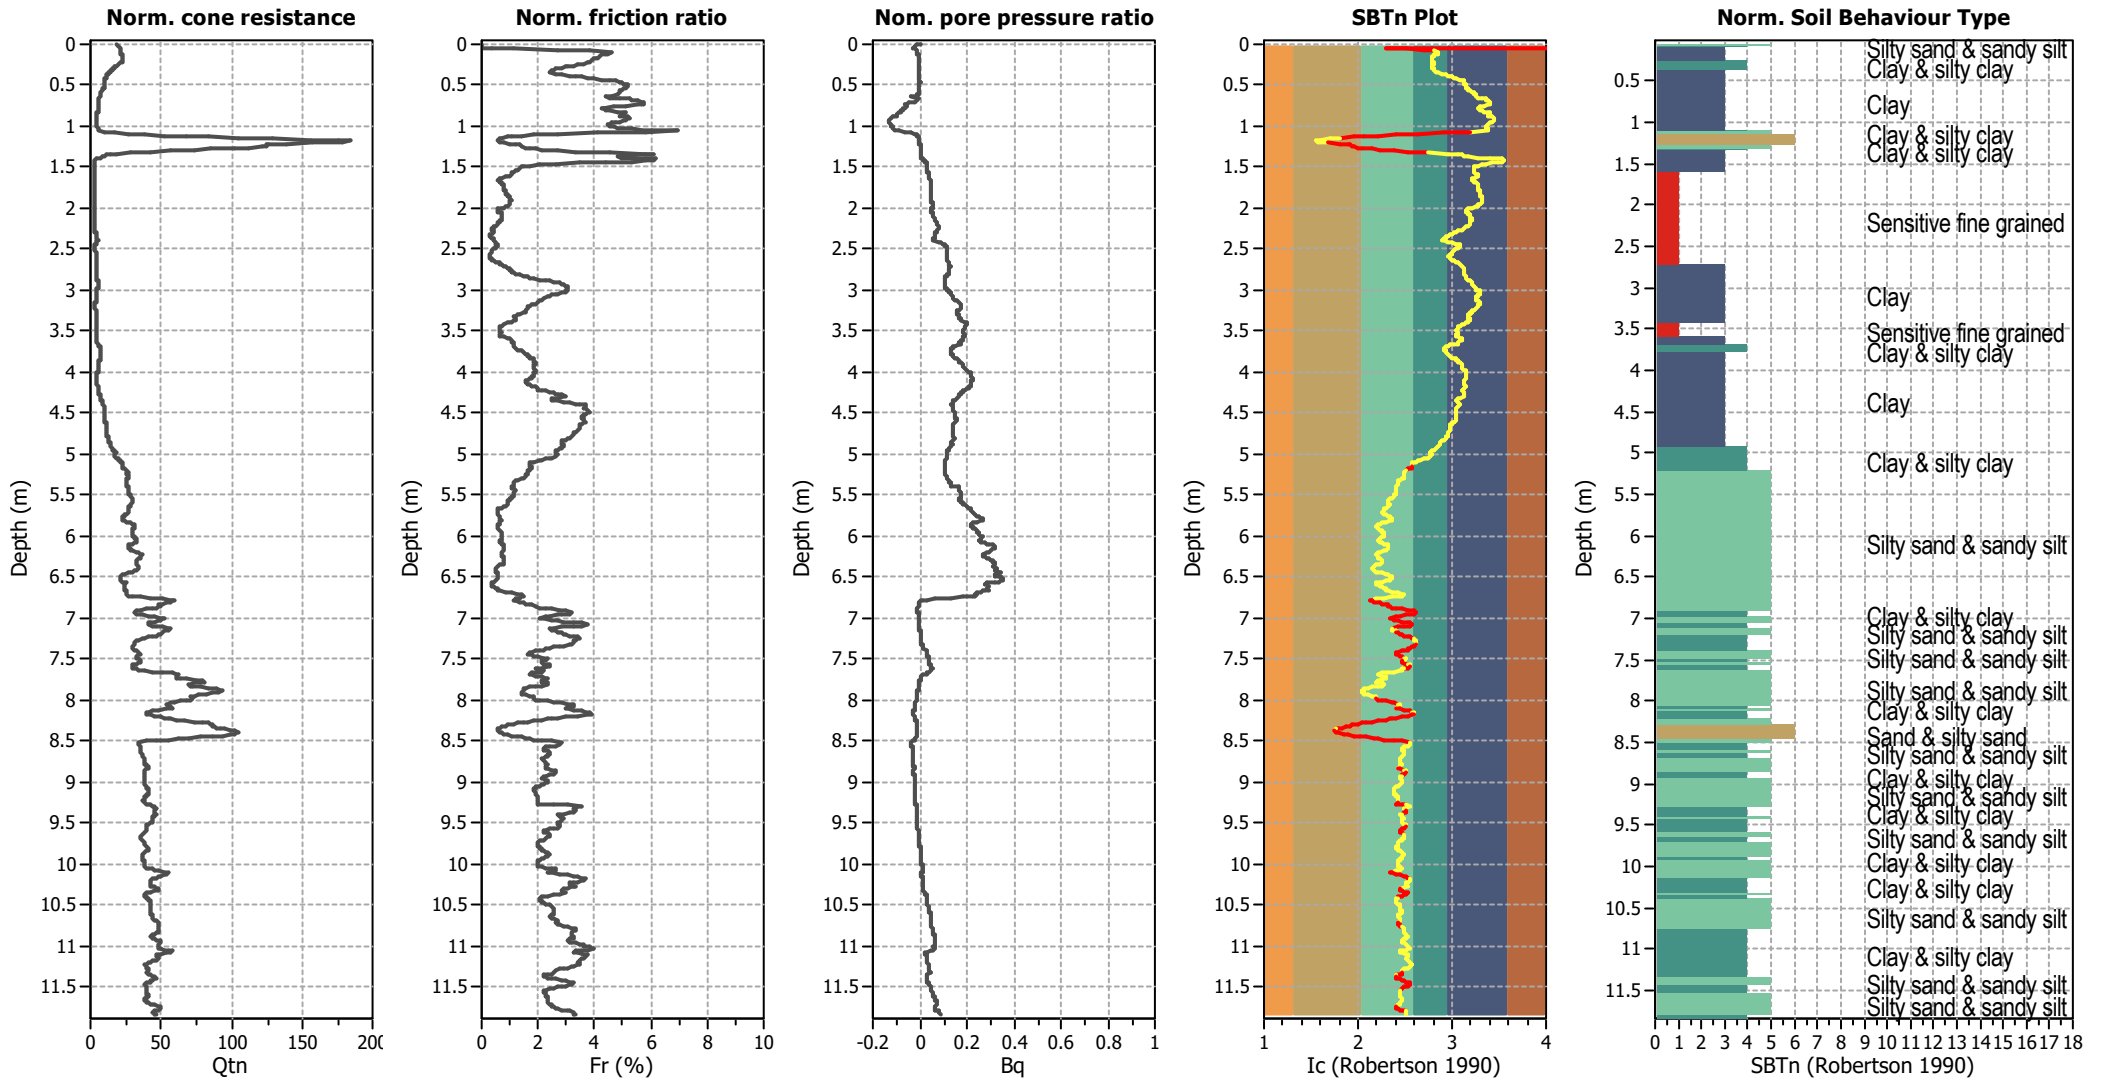


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

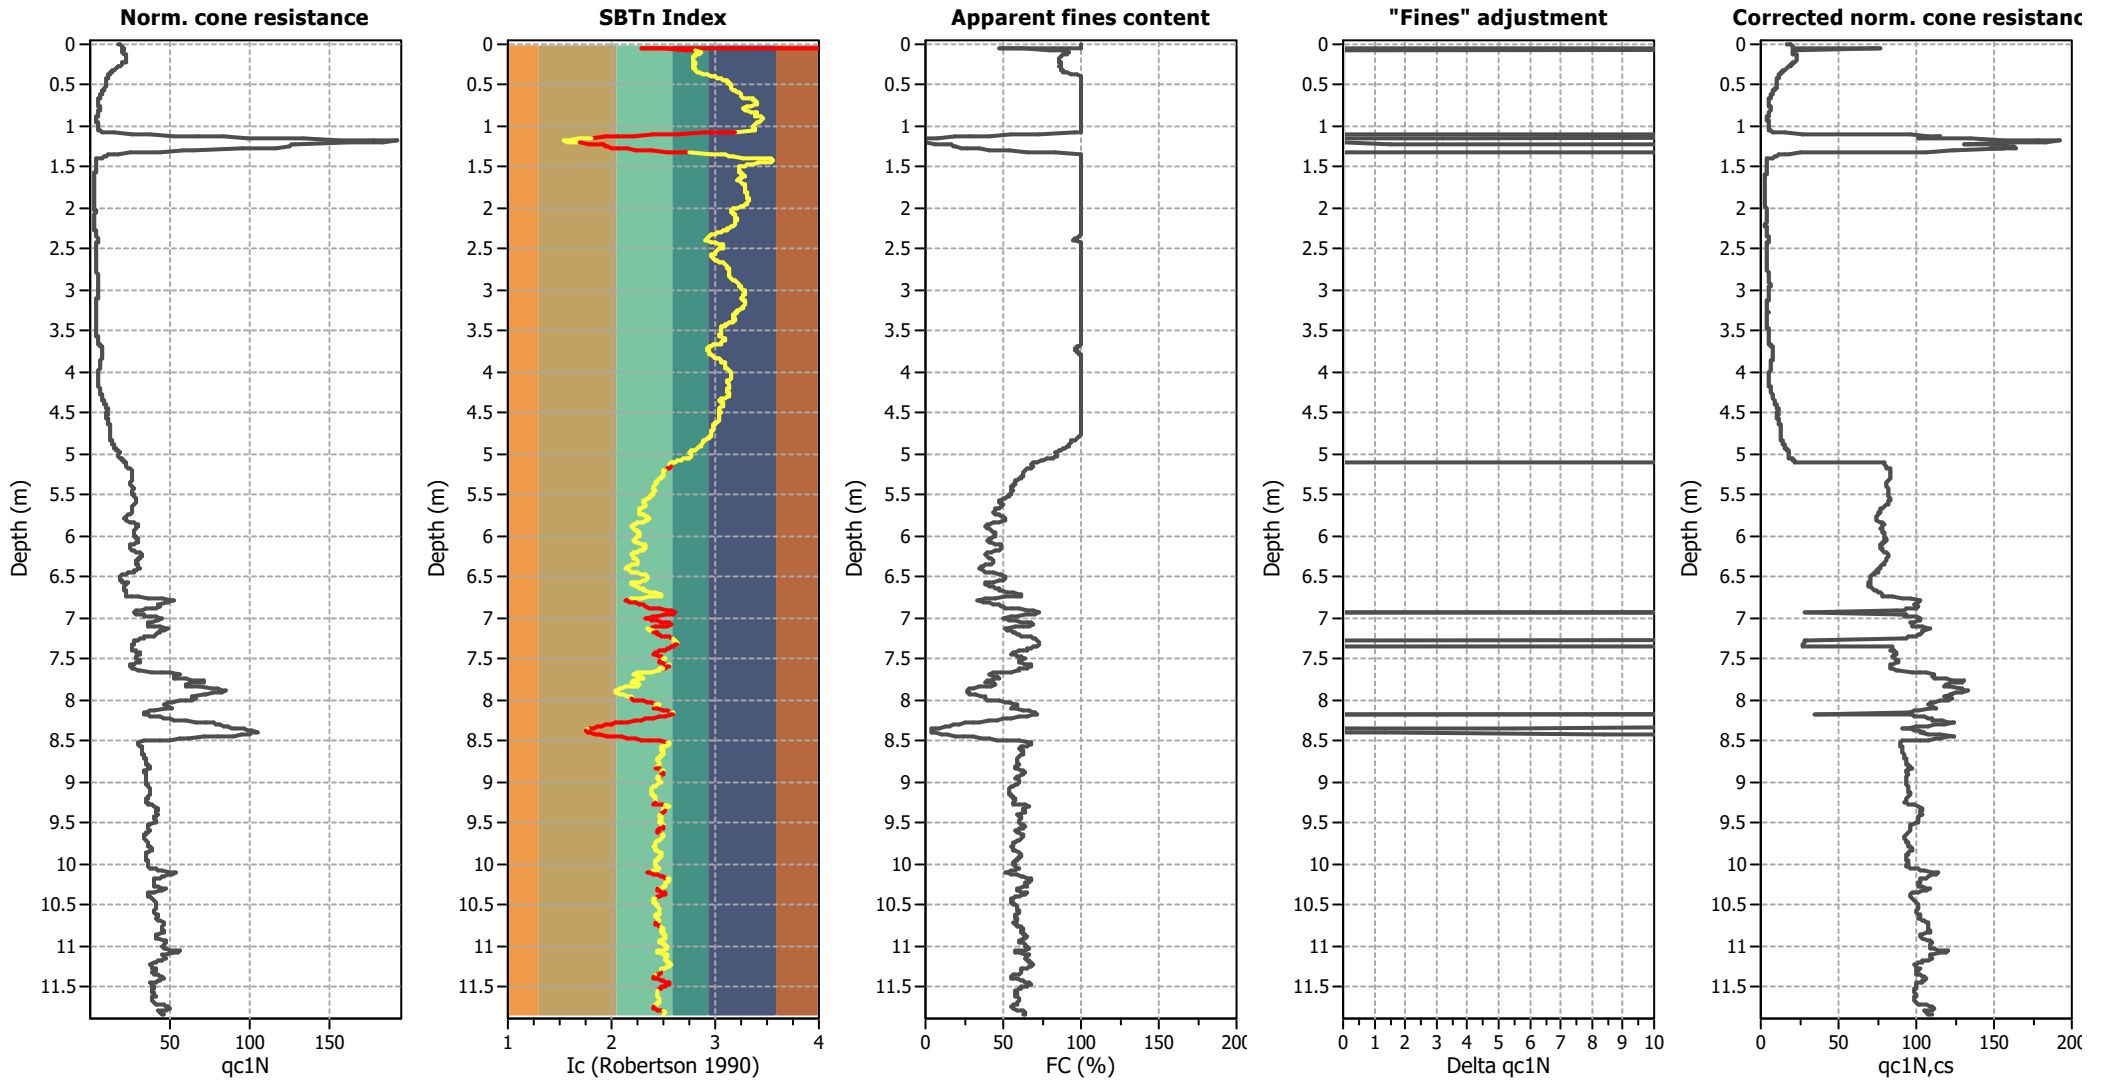

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

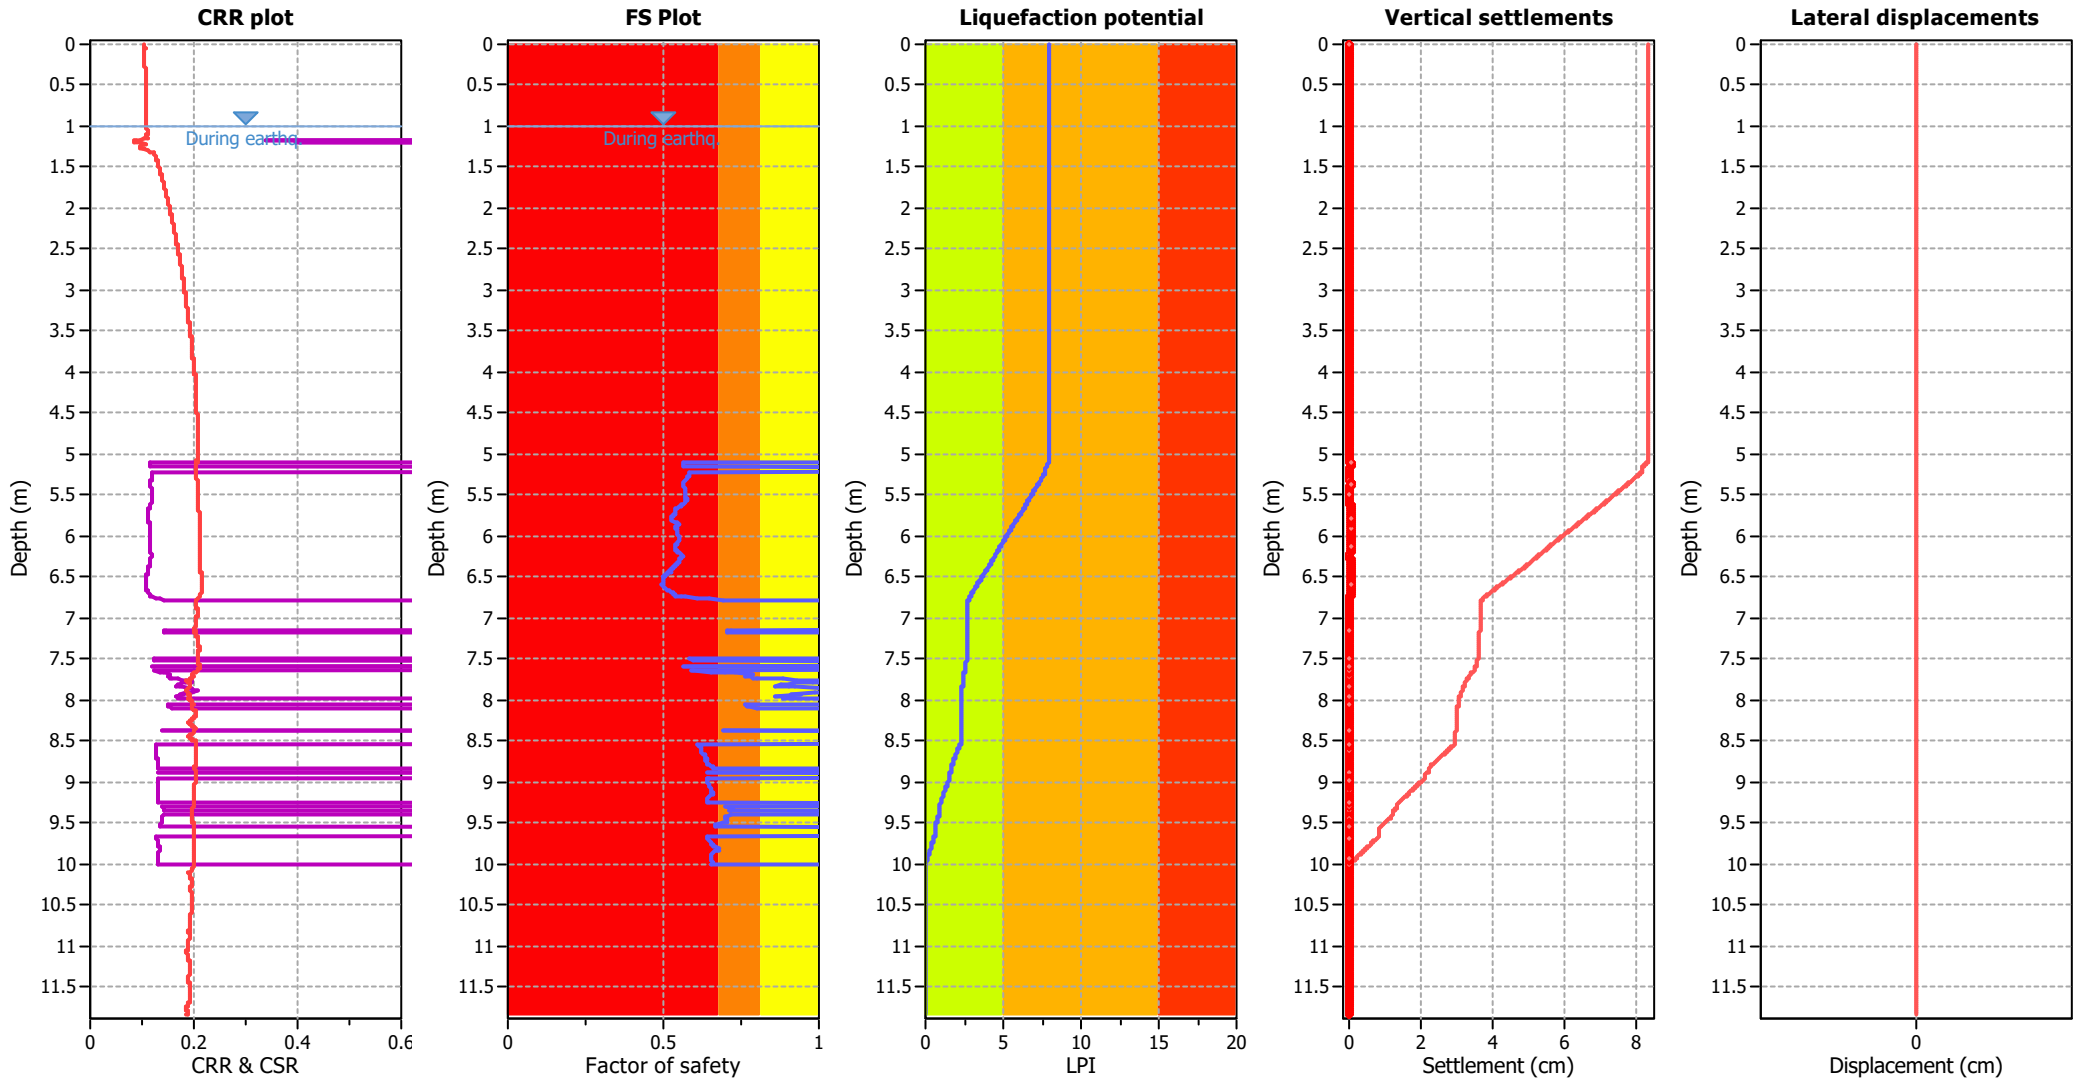

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

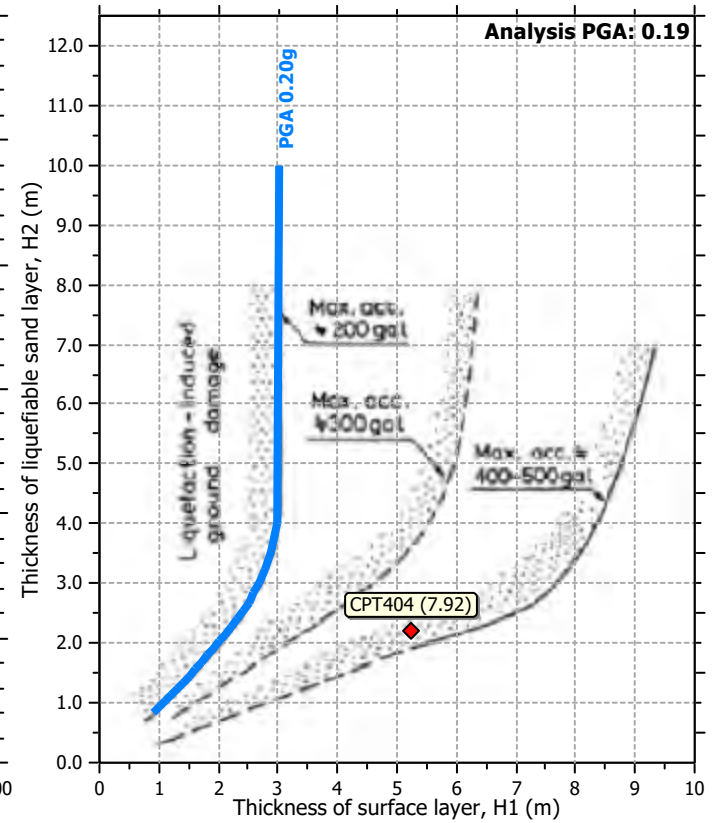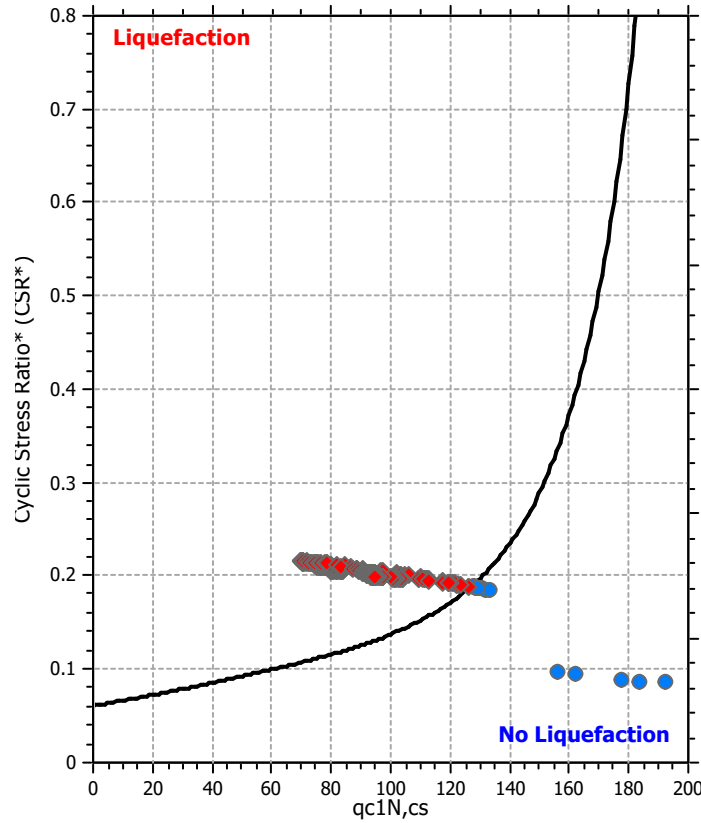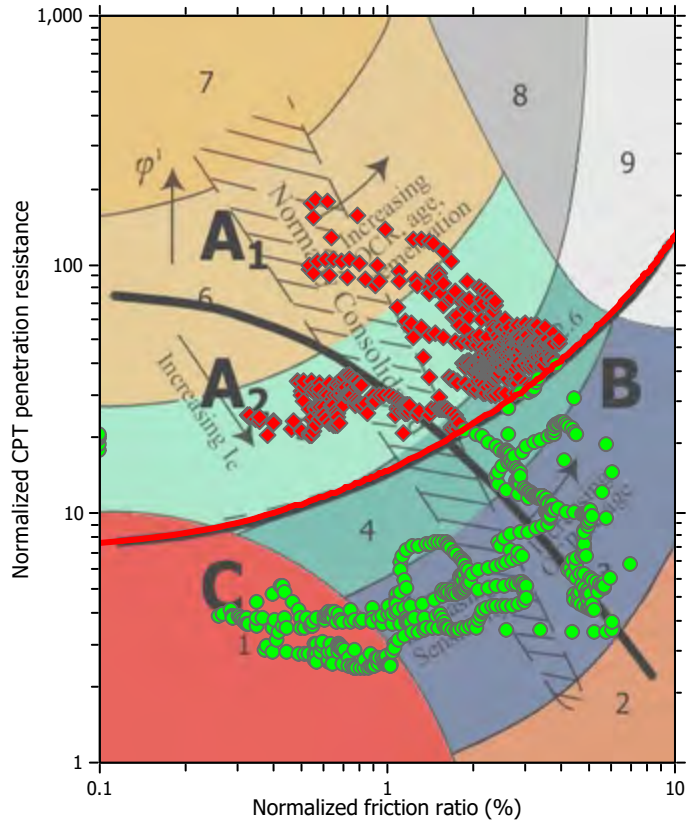

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

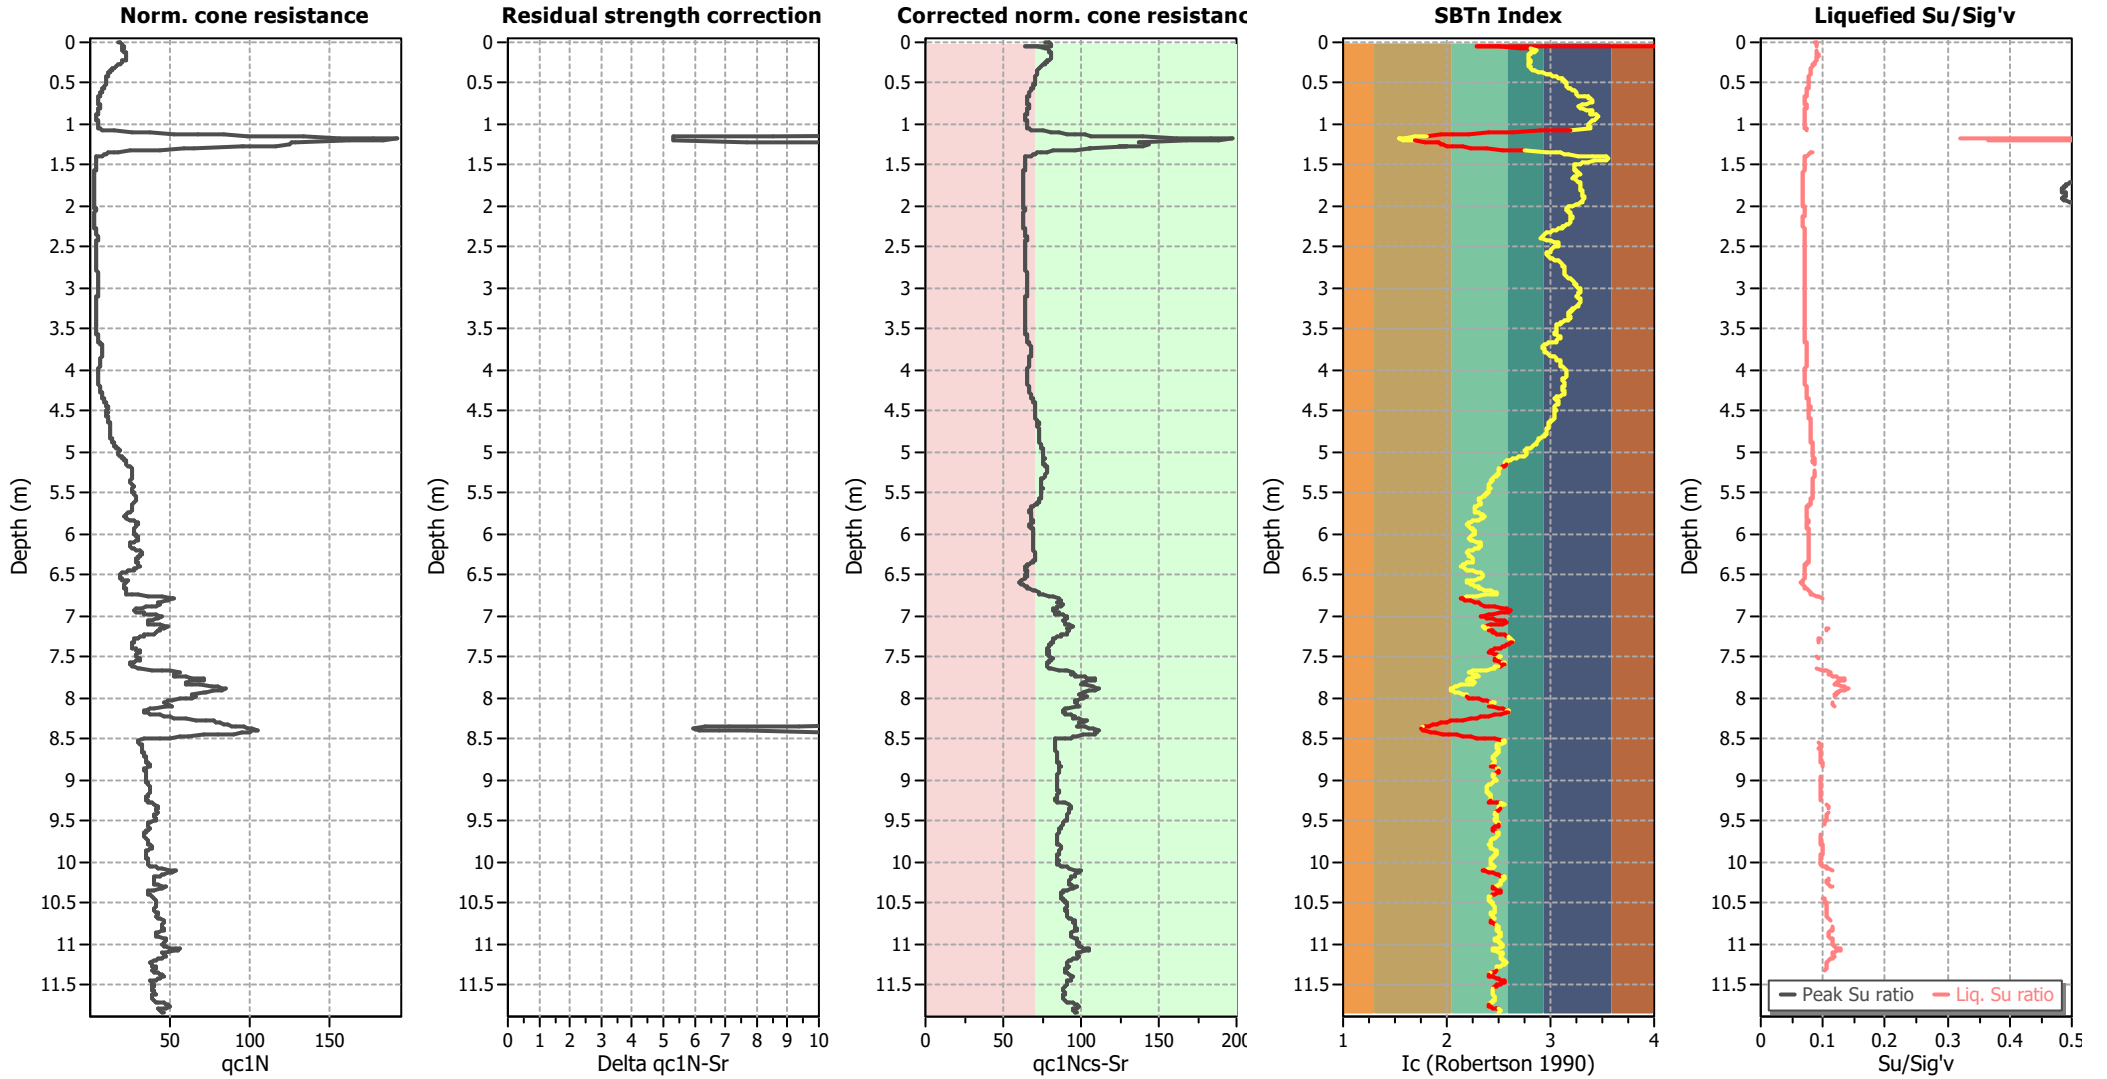

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

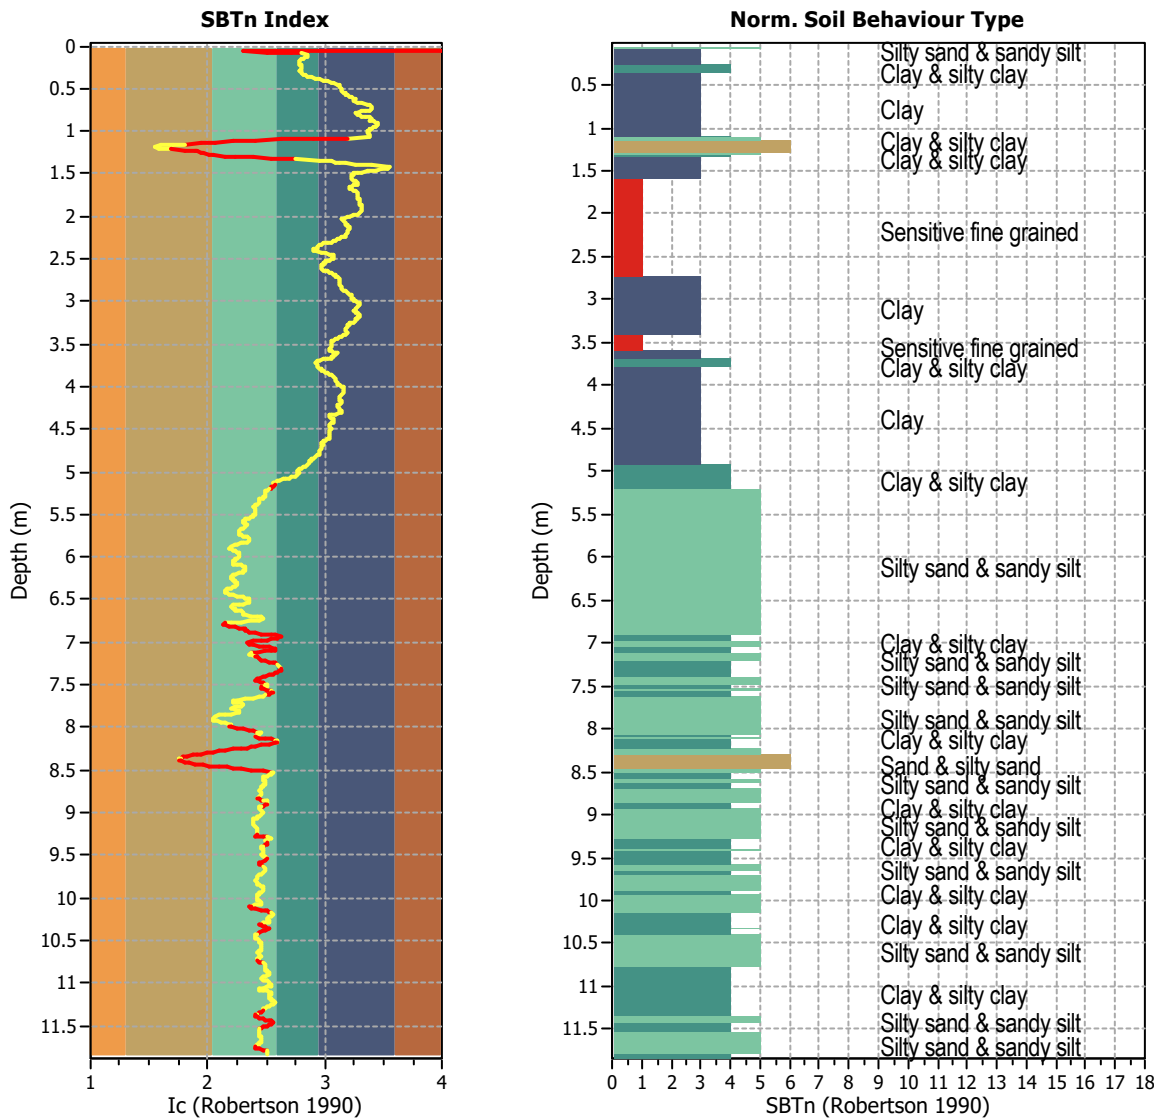


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1184
 Total points excluded: 233
 Exclusion percentage: 19.68%
 Number of layers detected: 31


Estimation of post-earthquake settlements

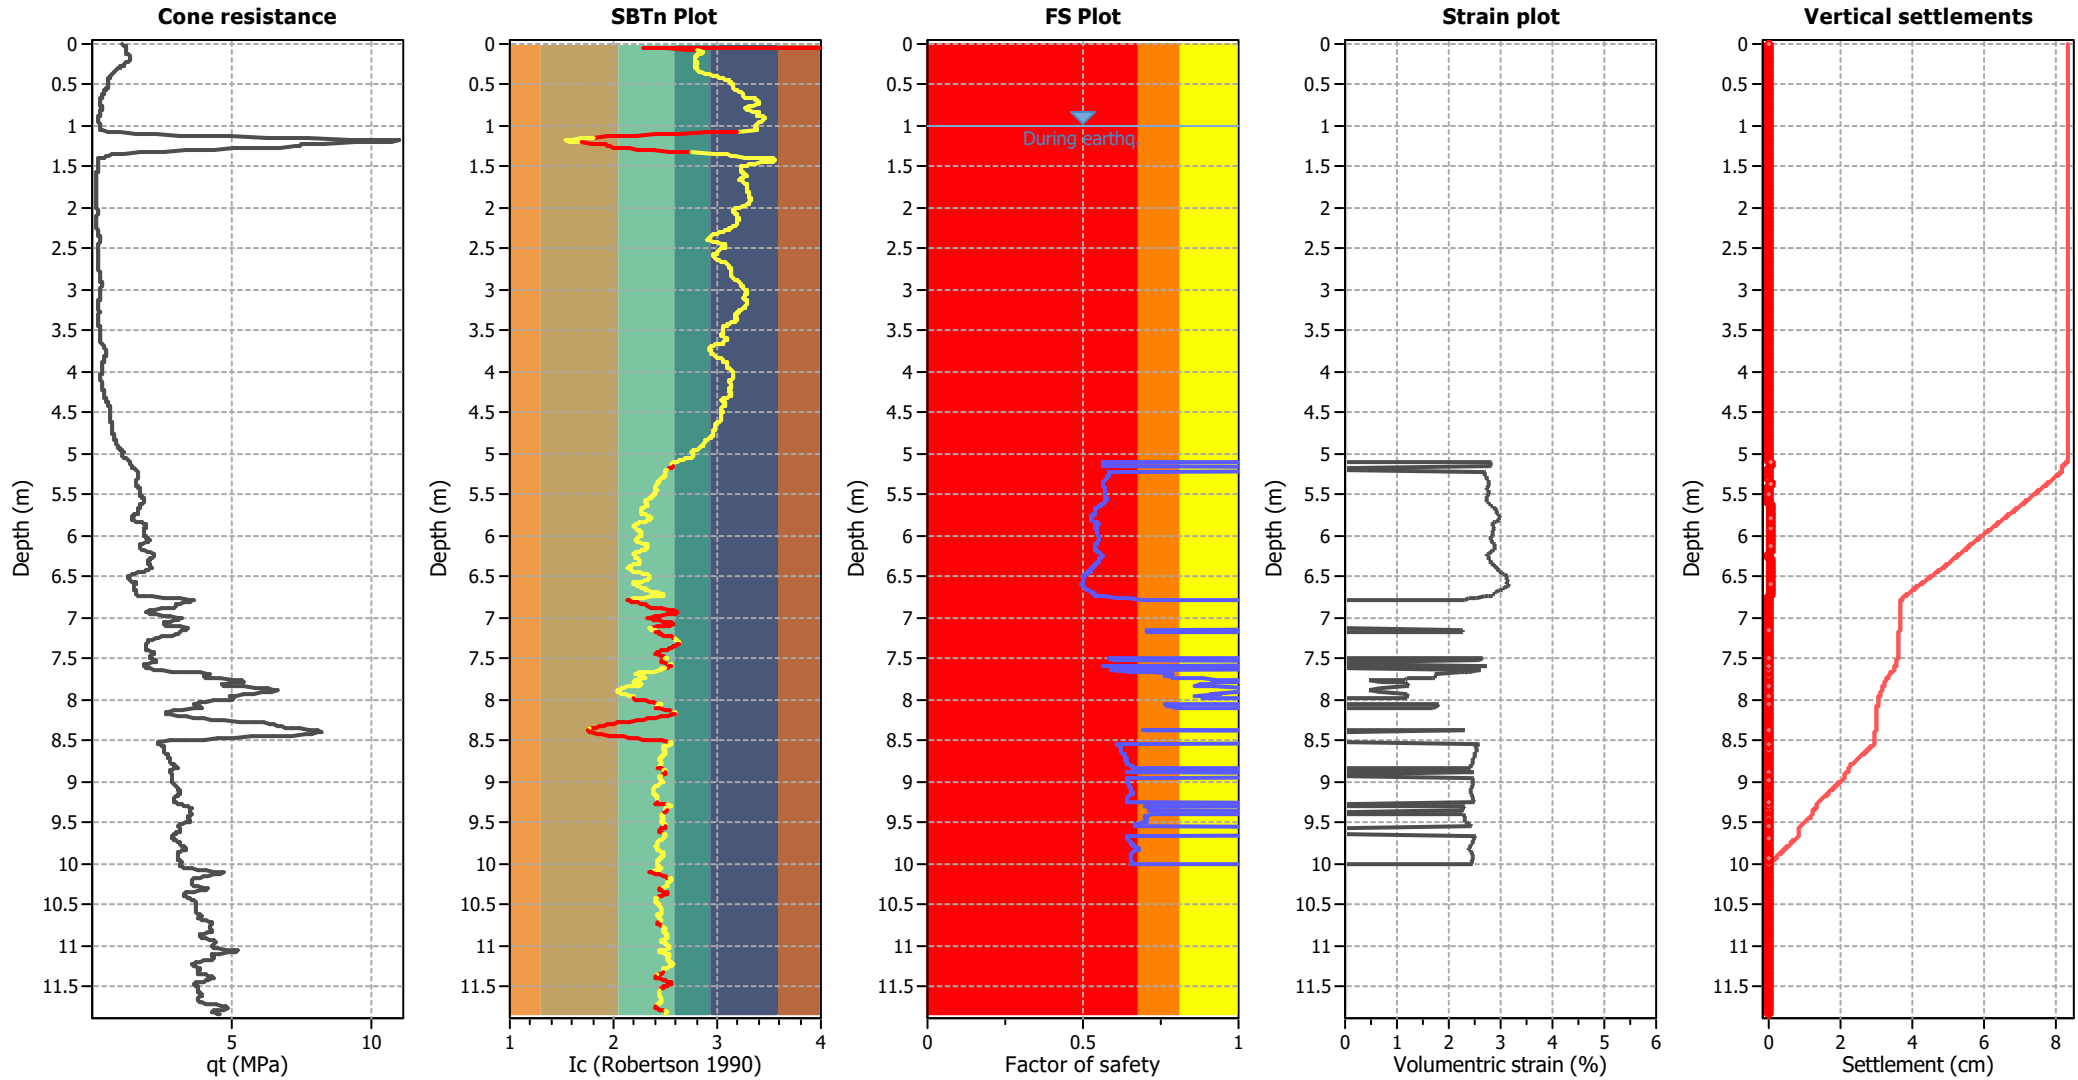

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

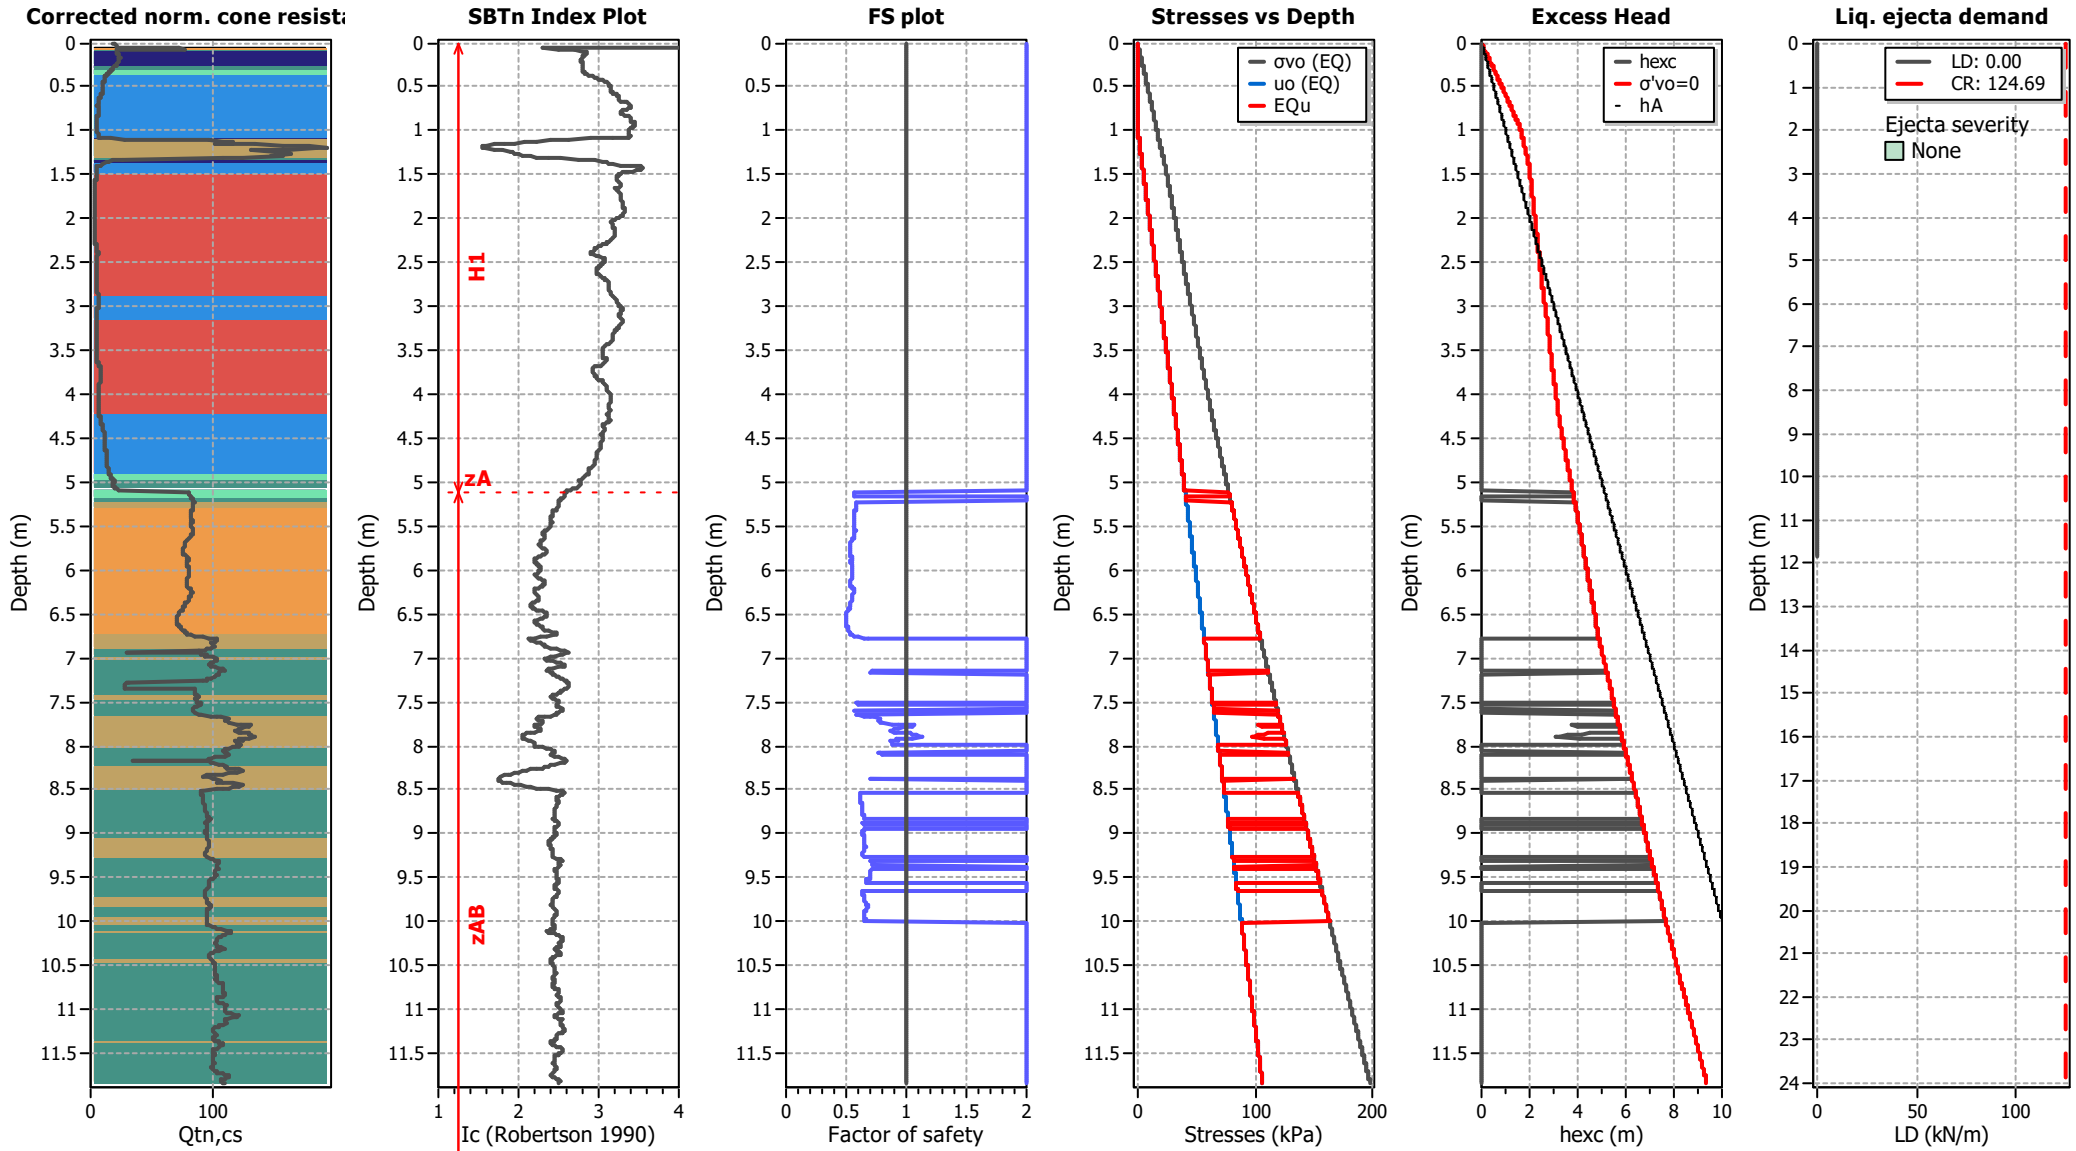

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT405

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

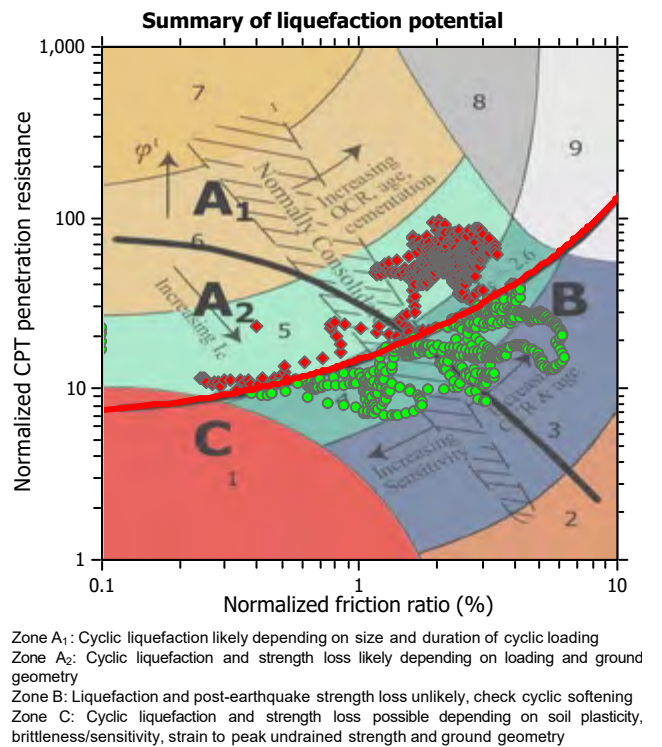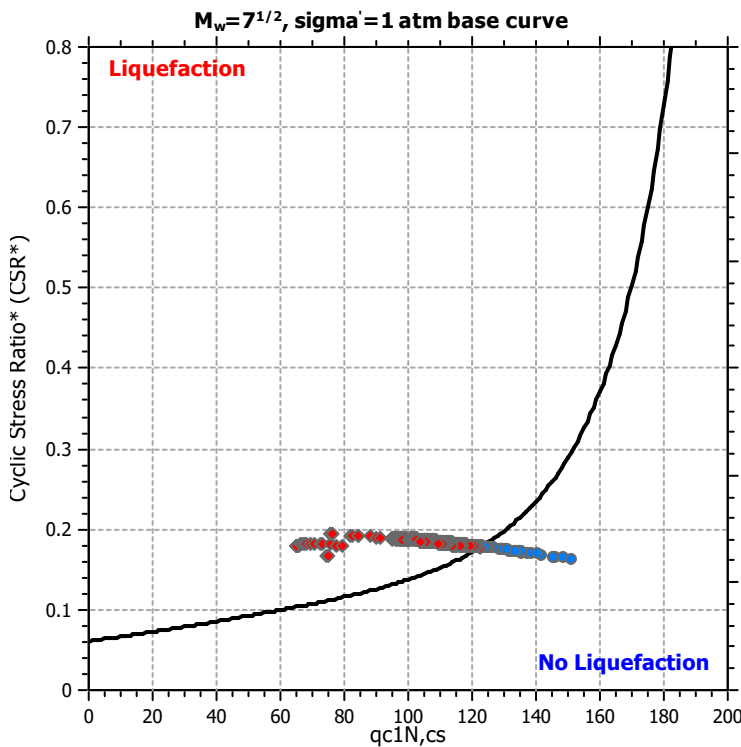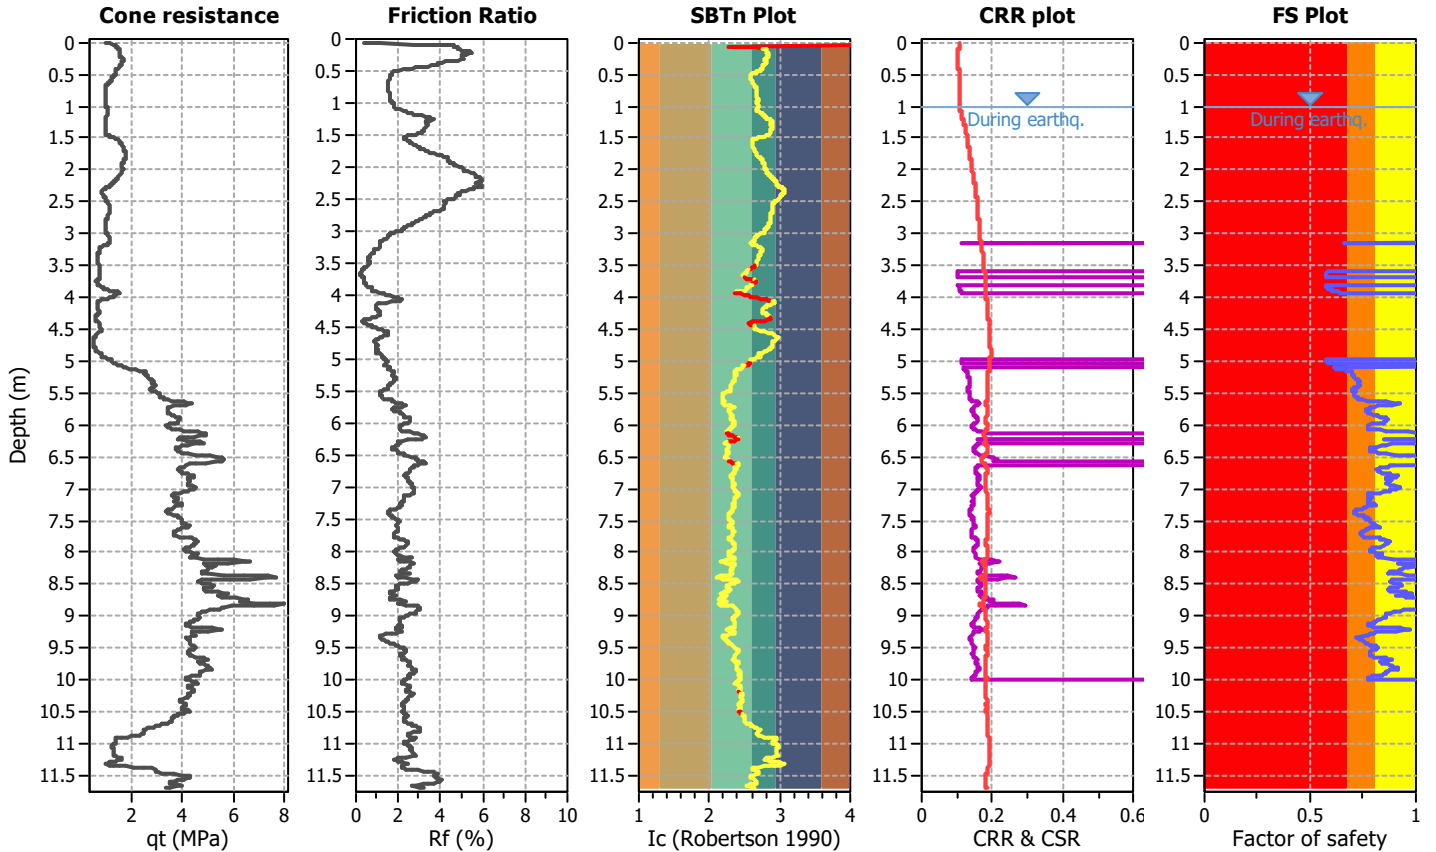

CPT basic interpretation plots

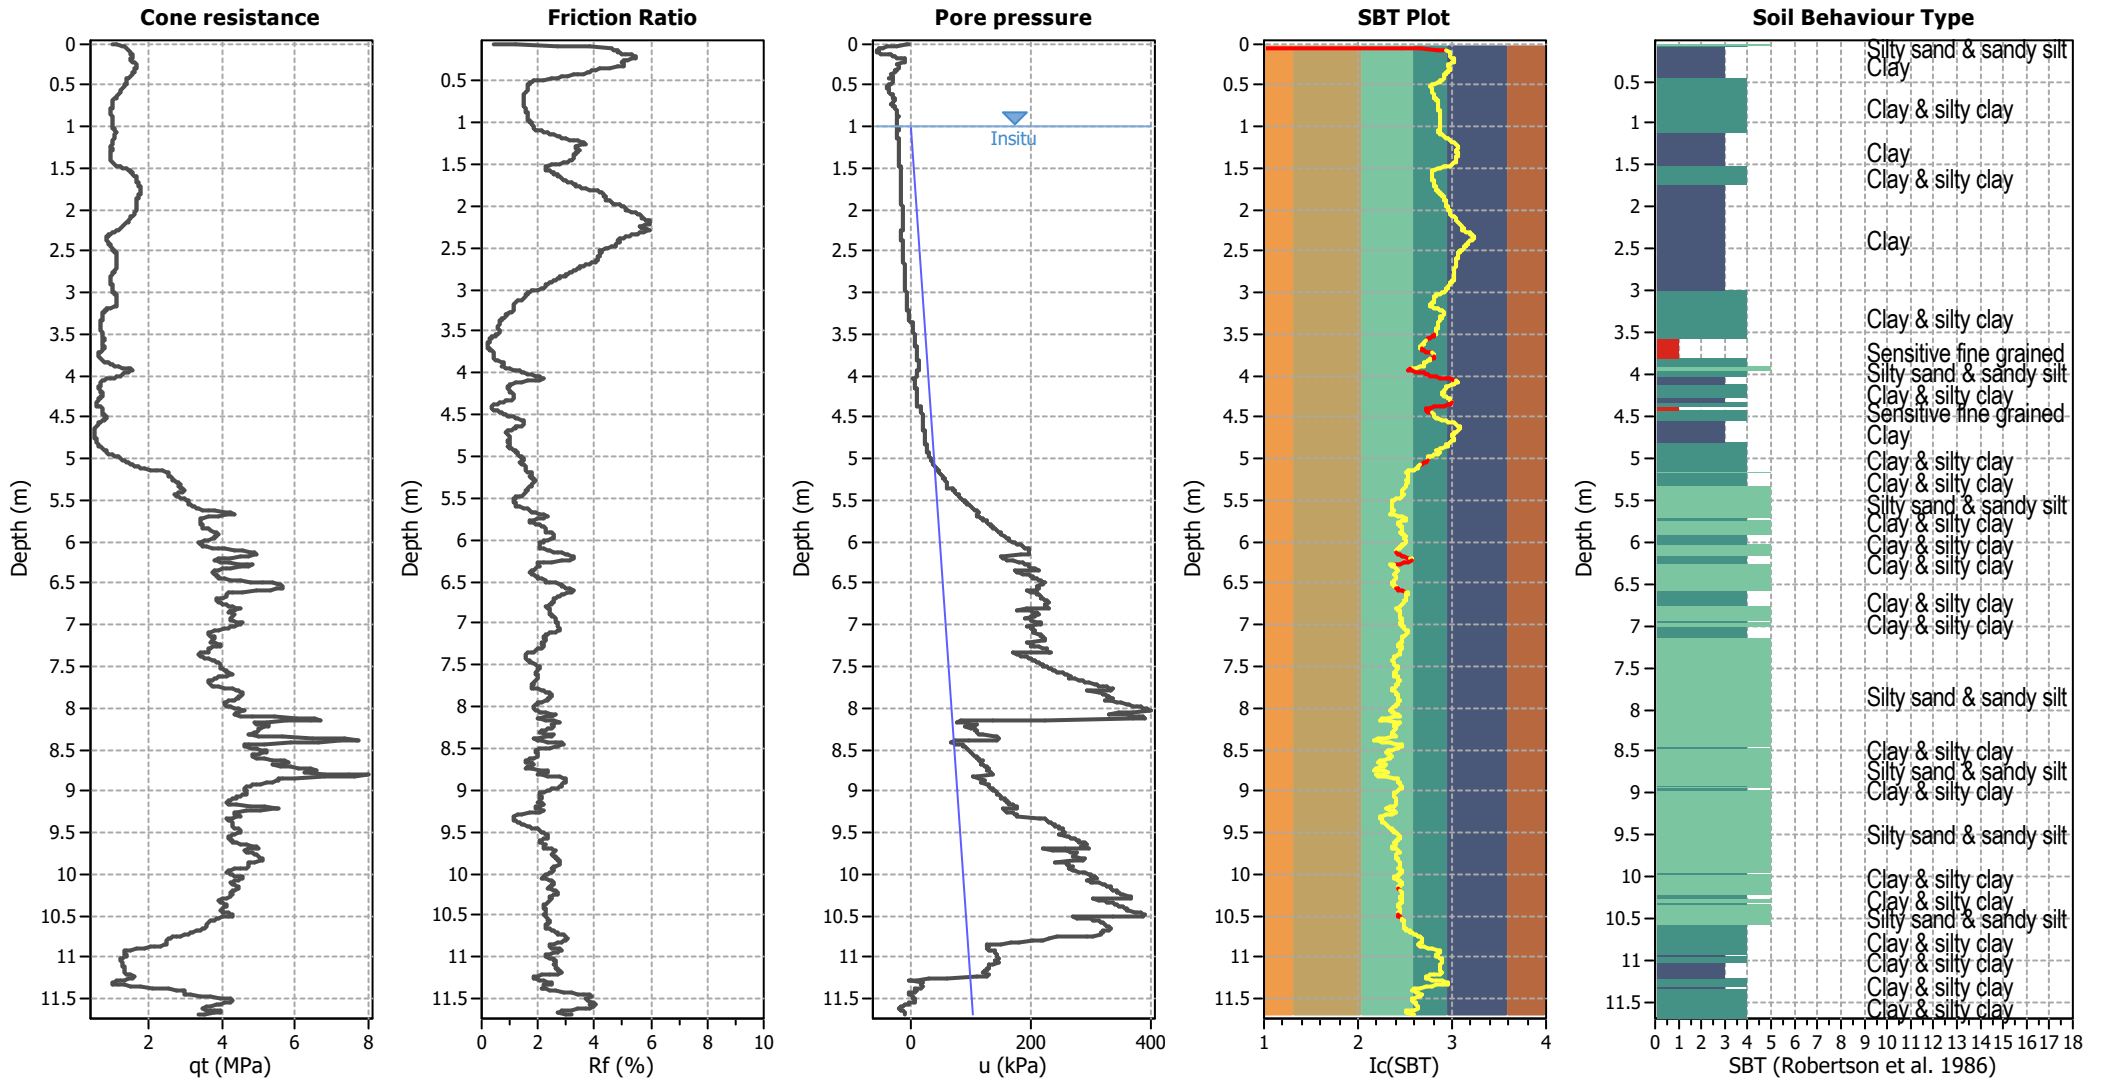


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

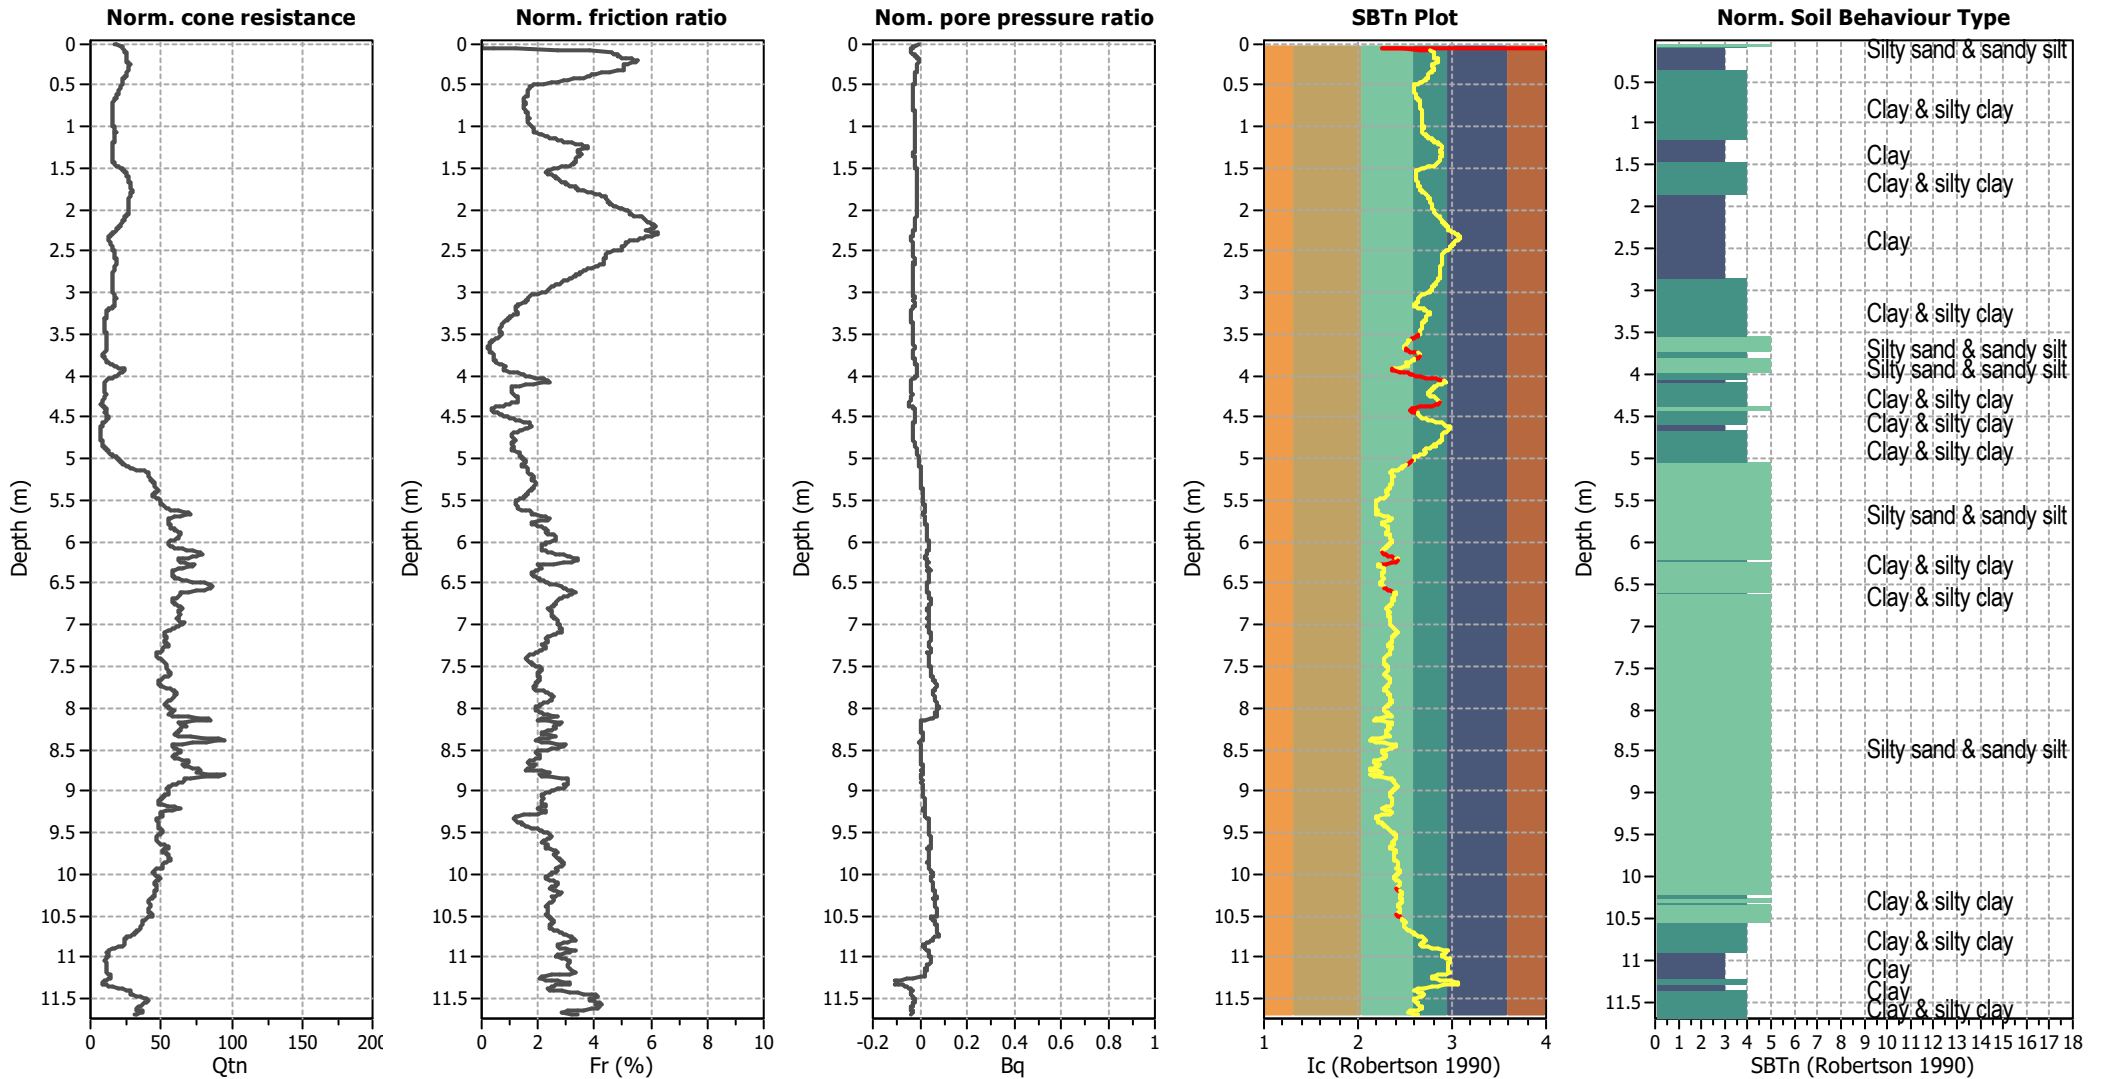


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

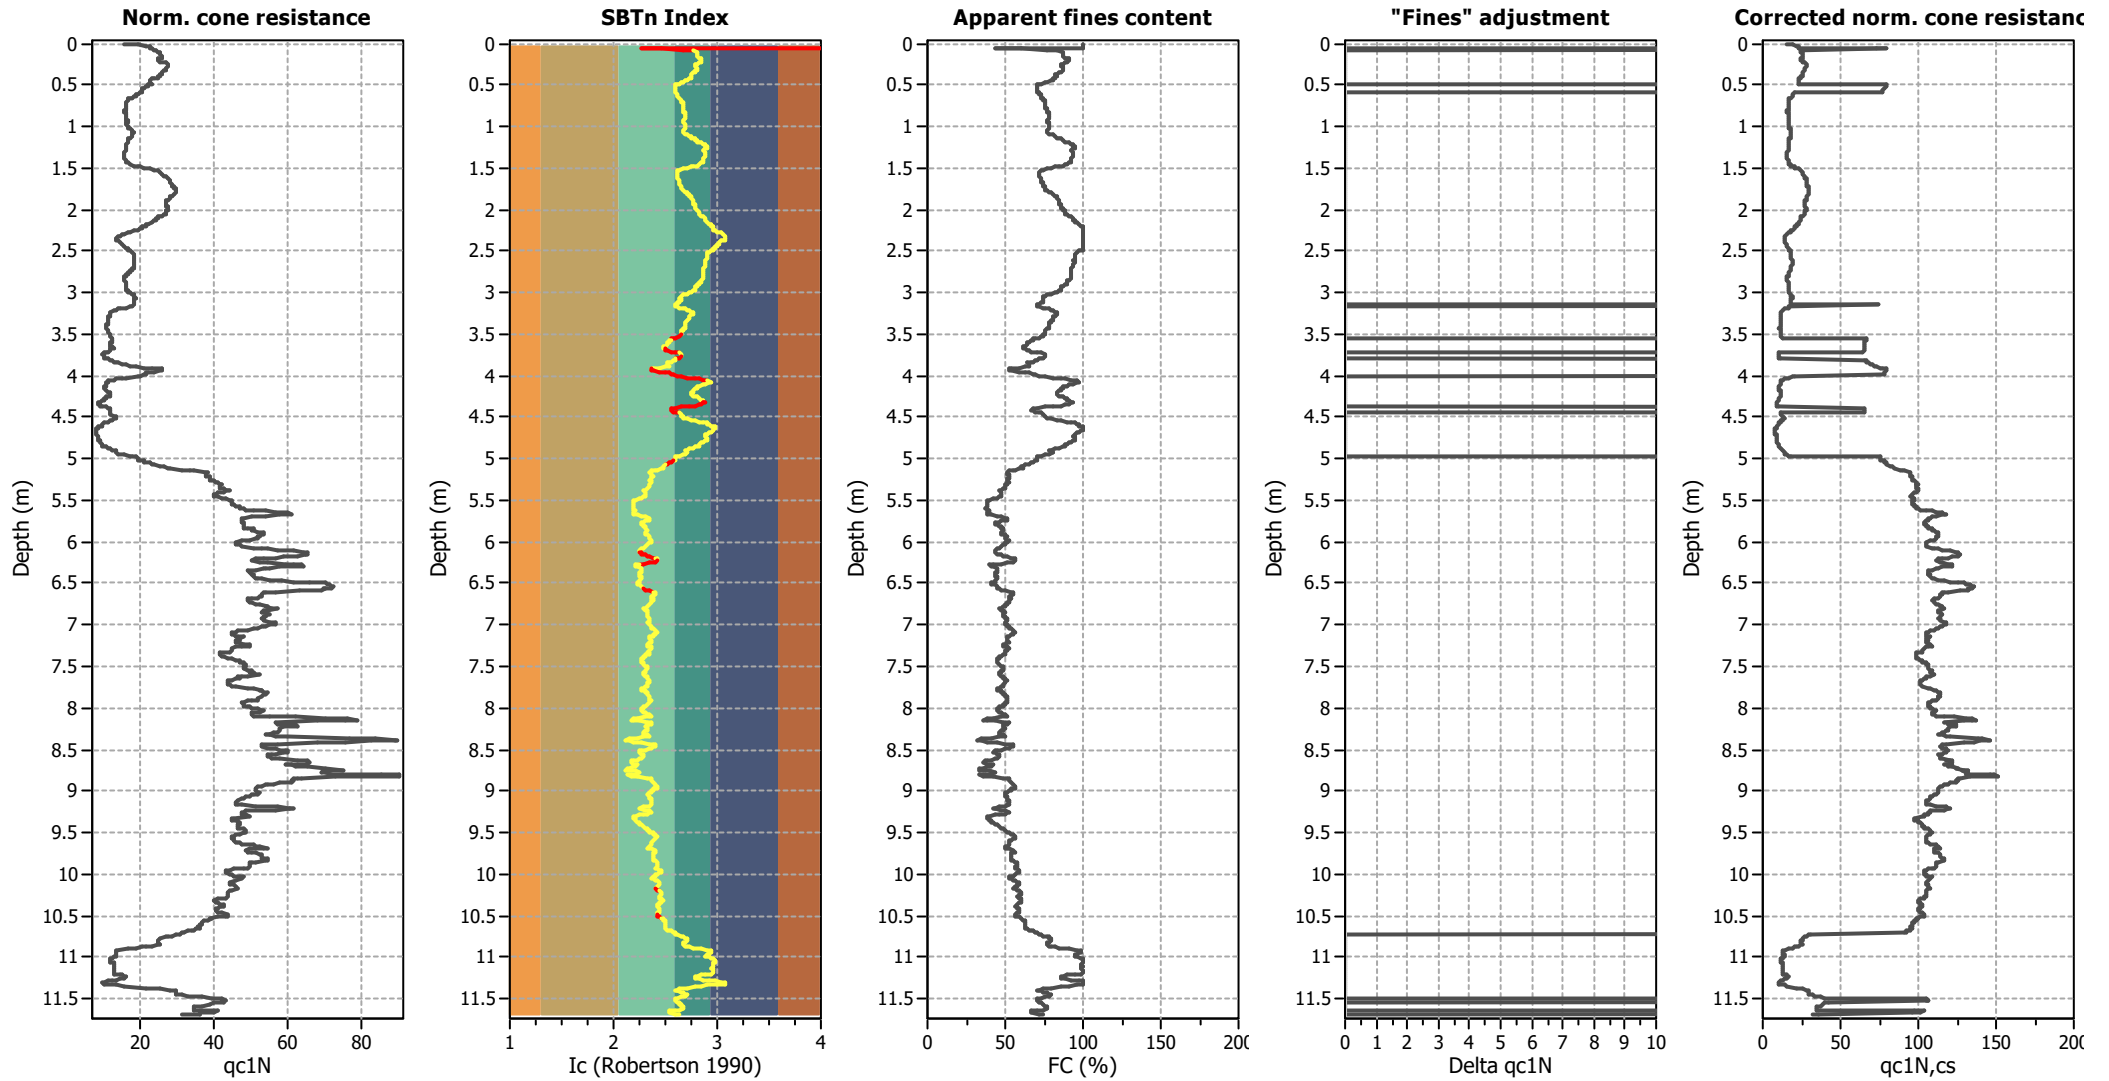

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

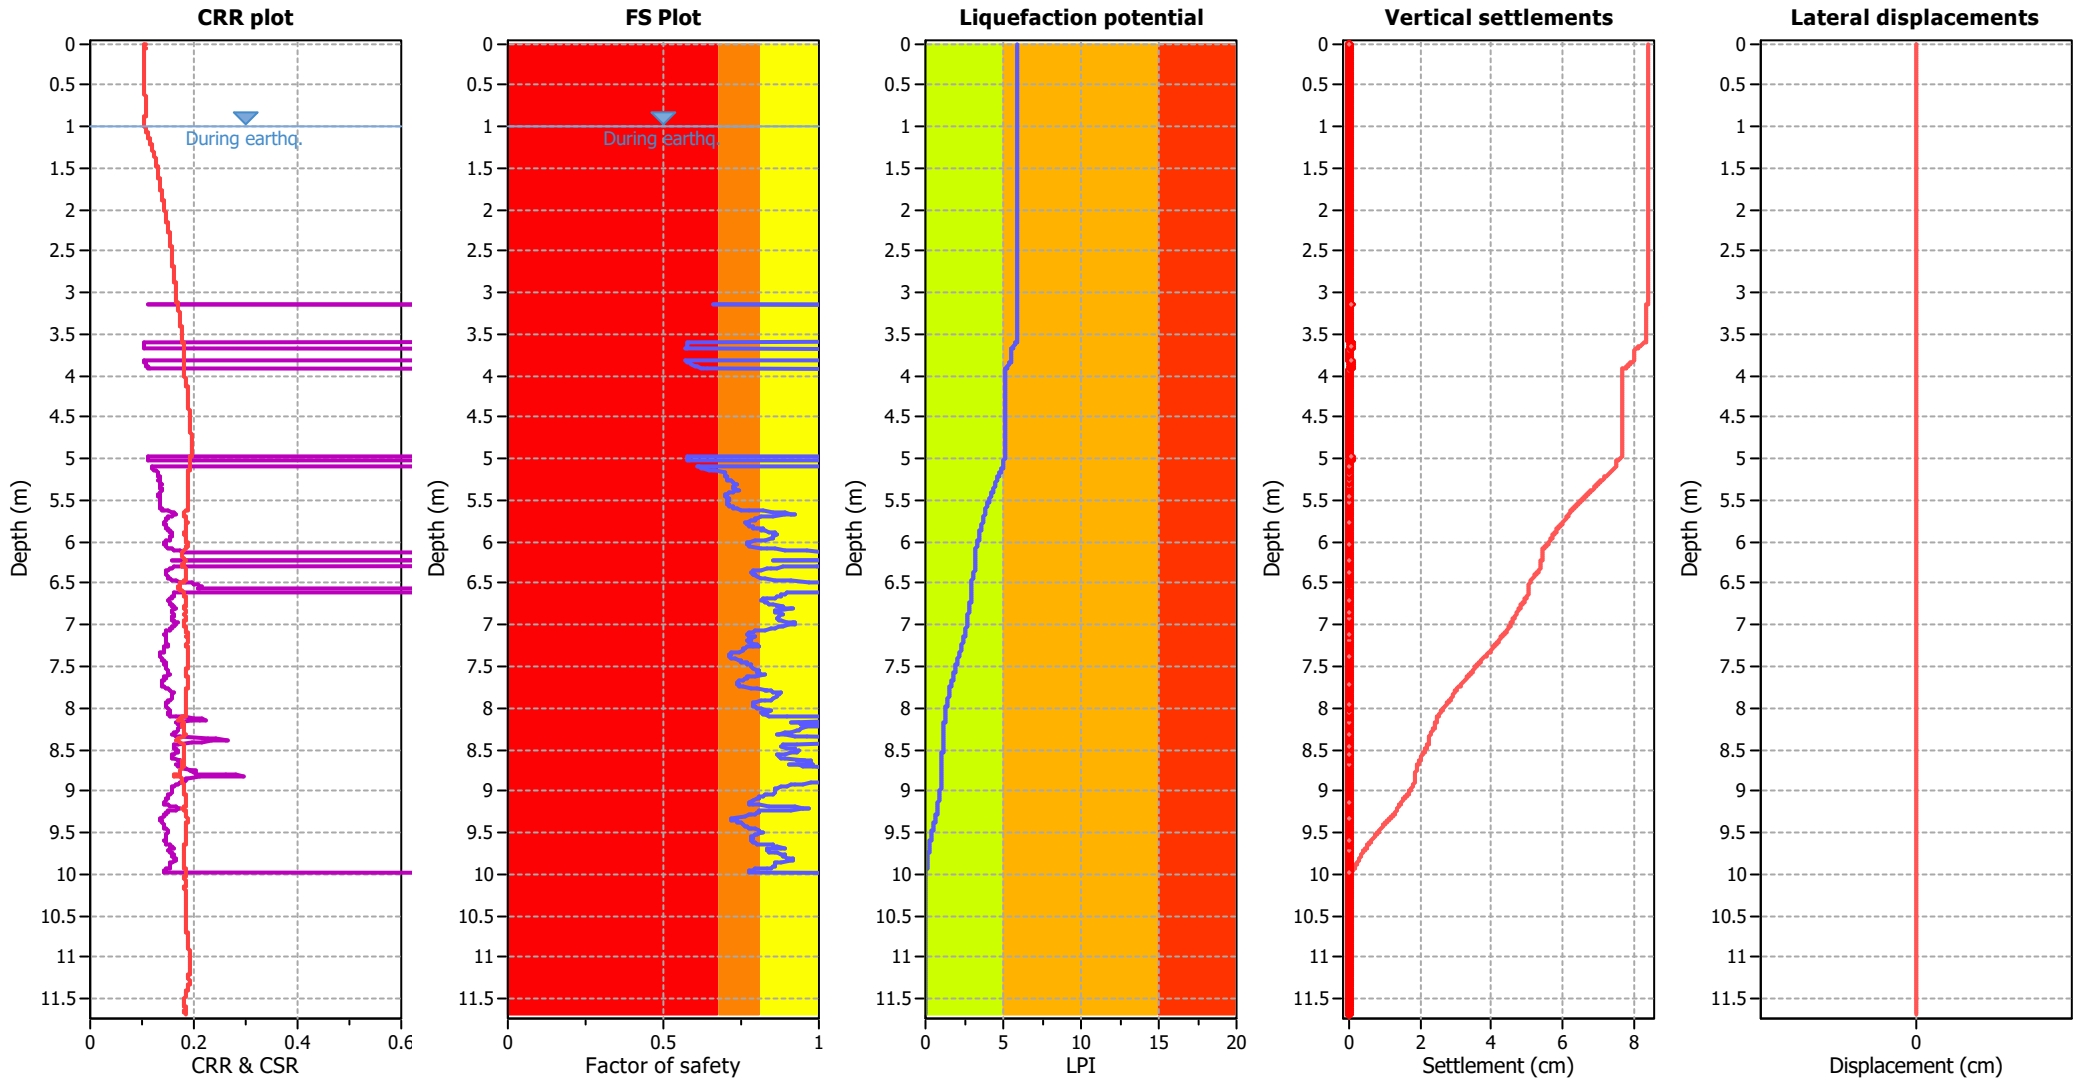

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

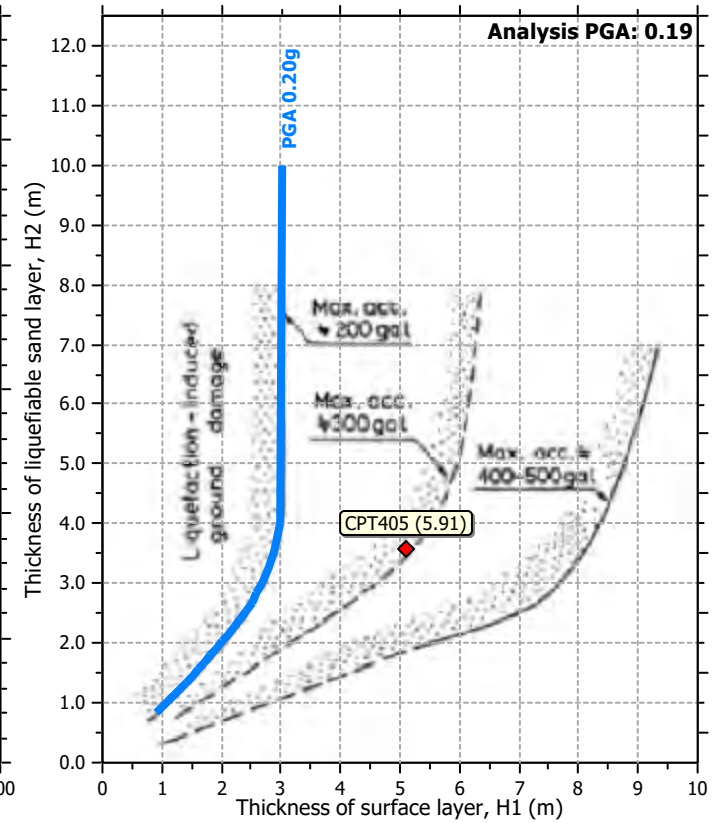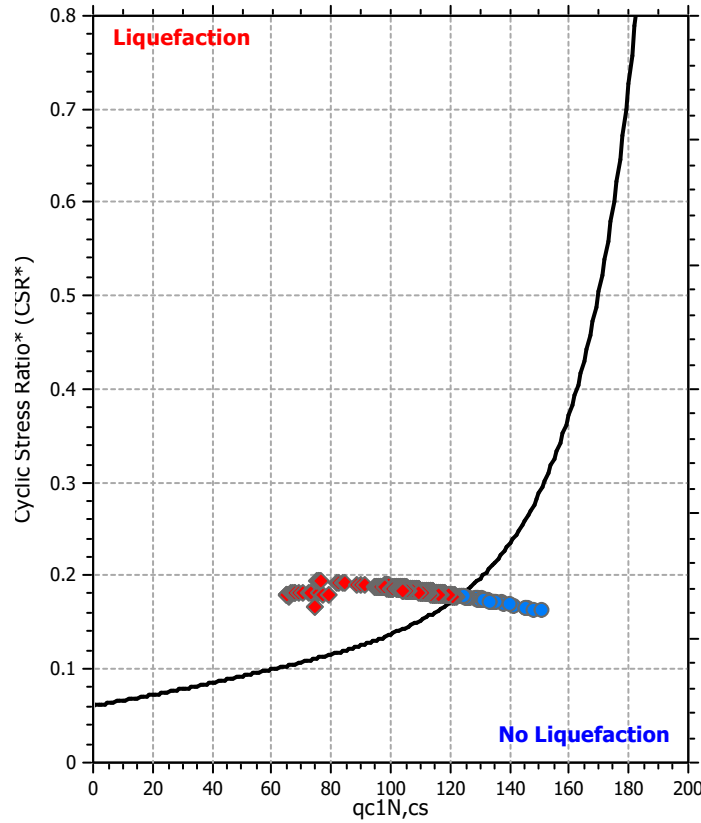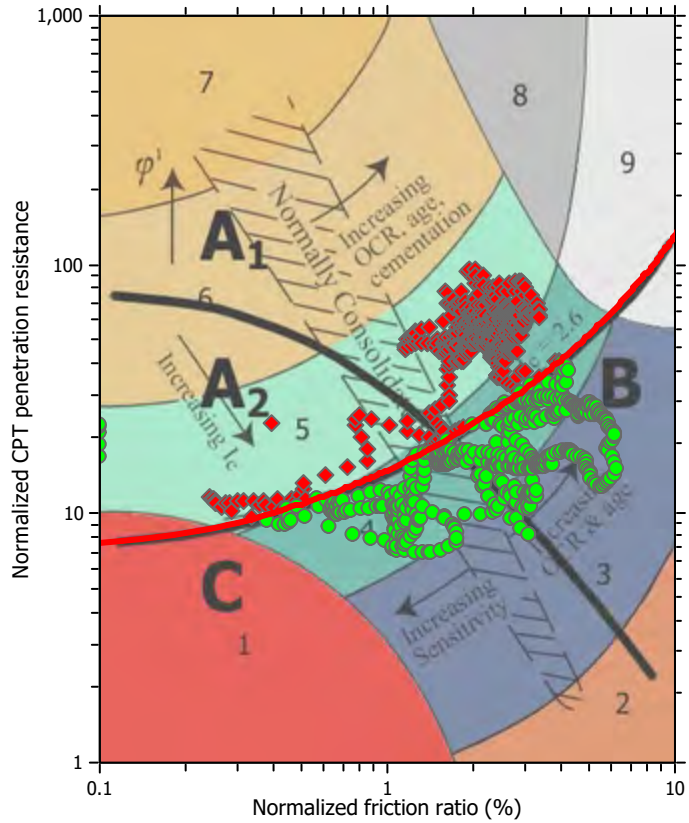

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

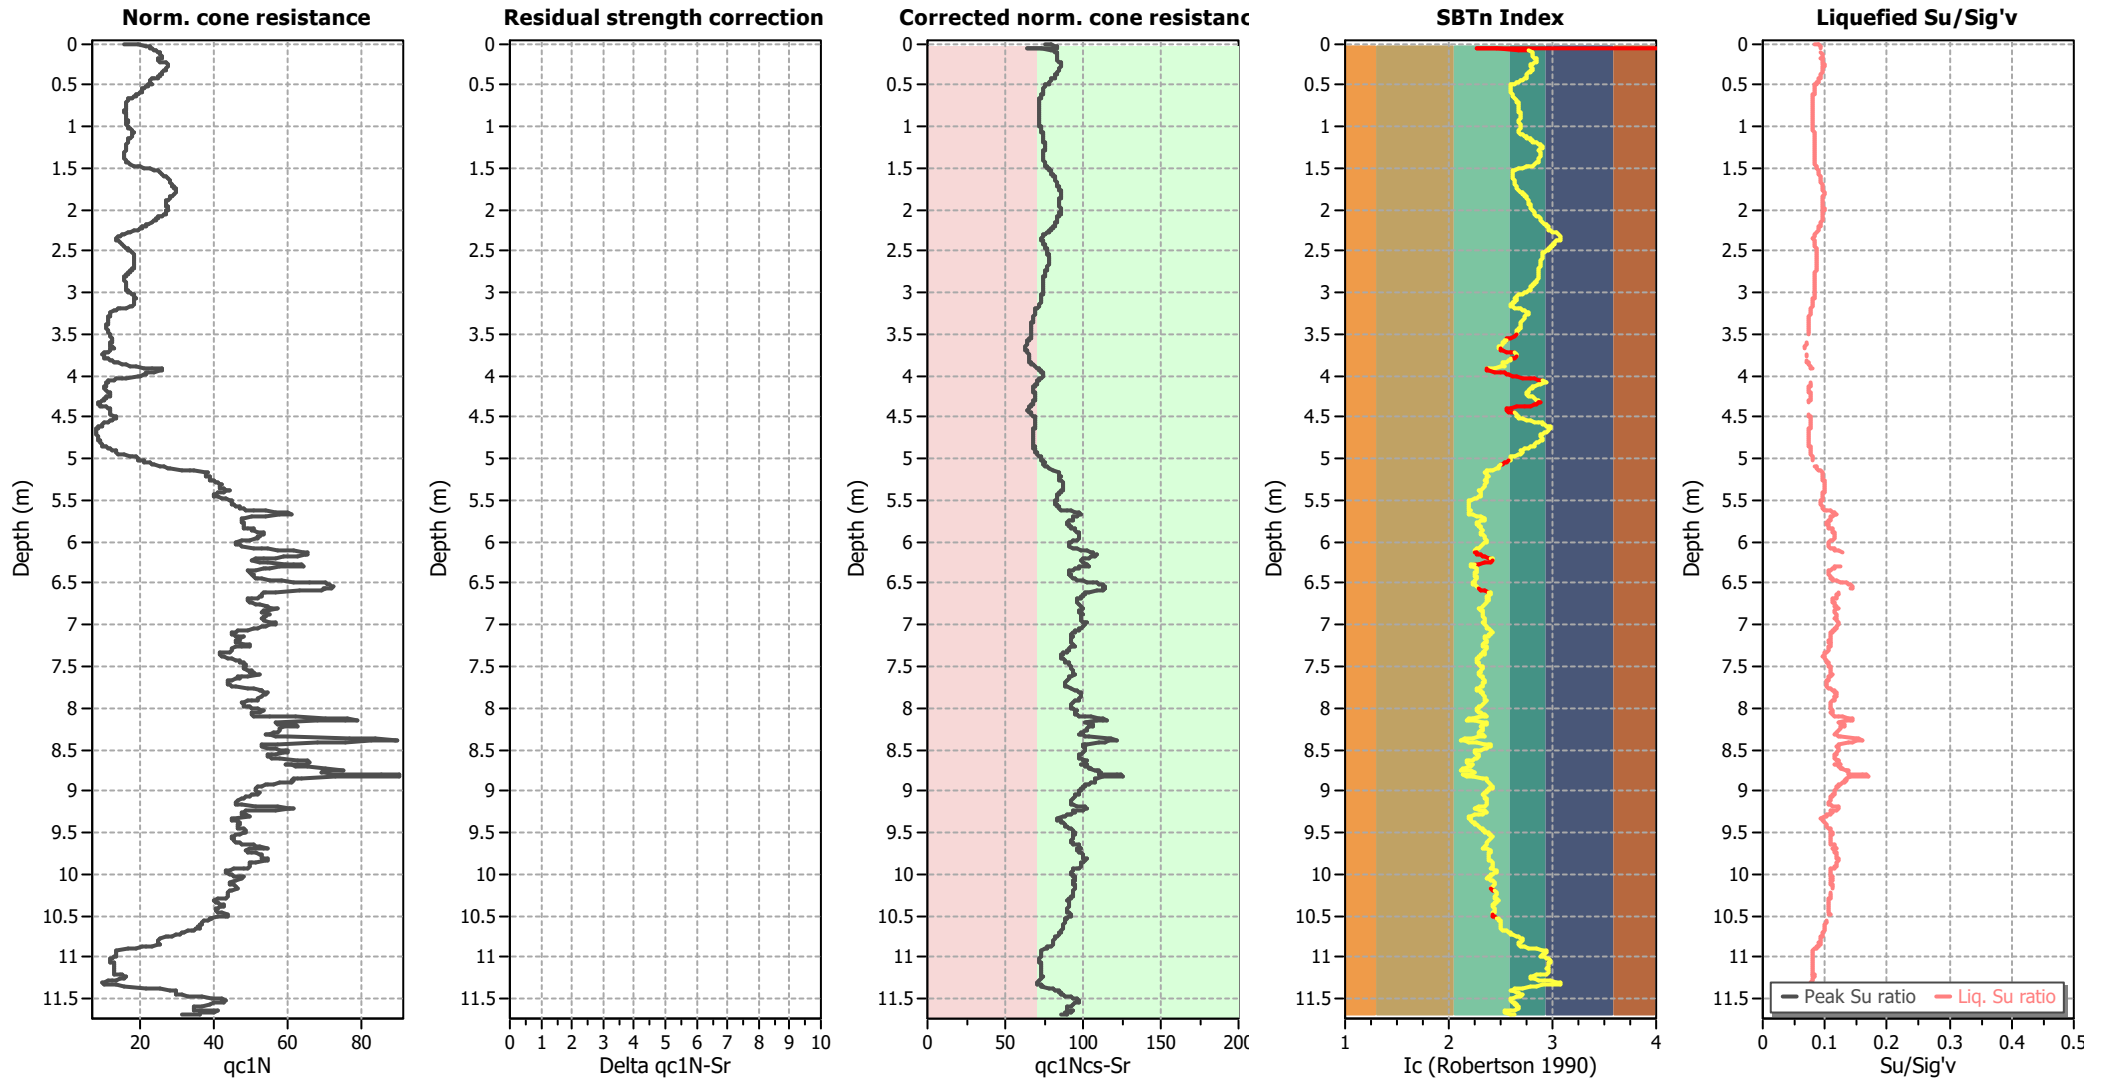

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

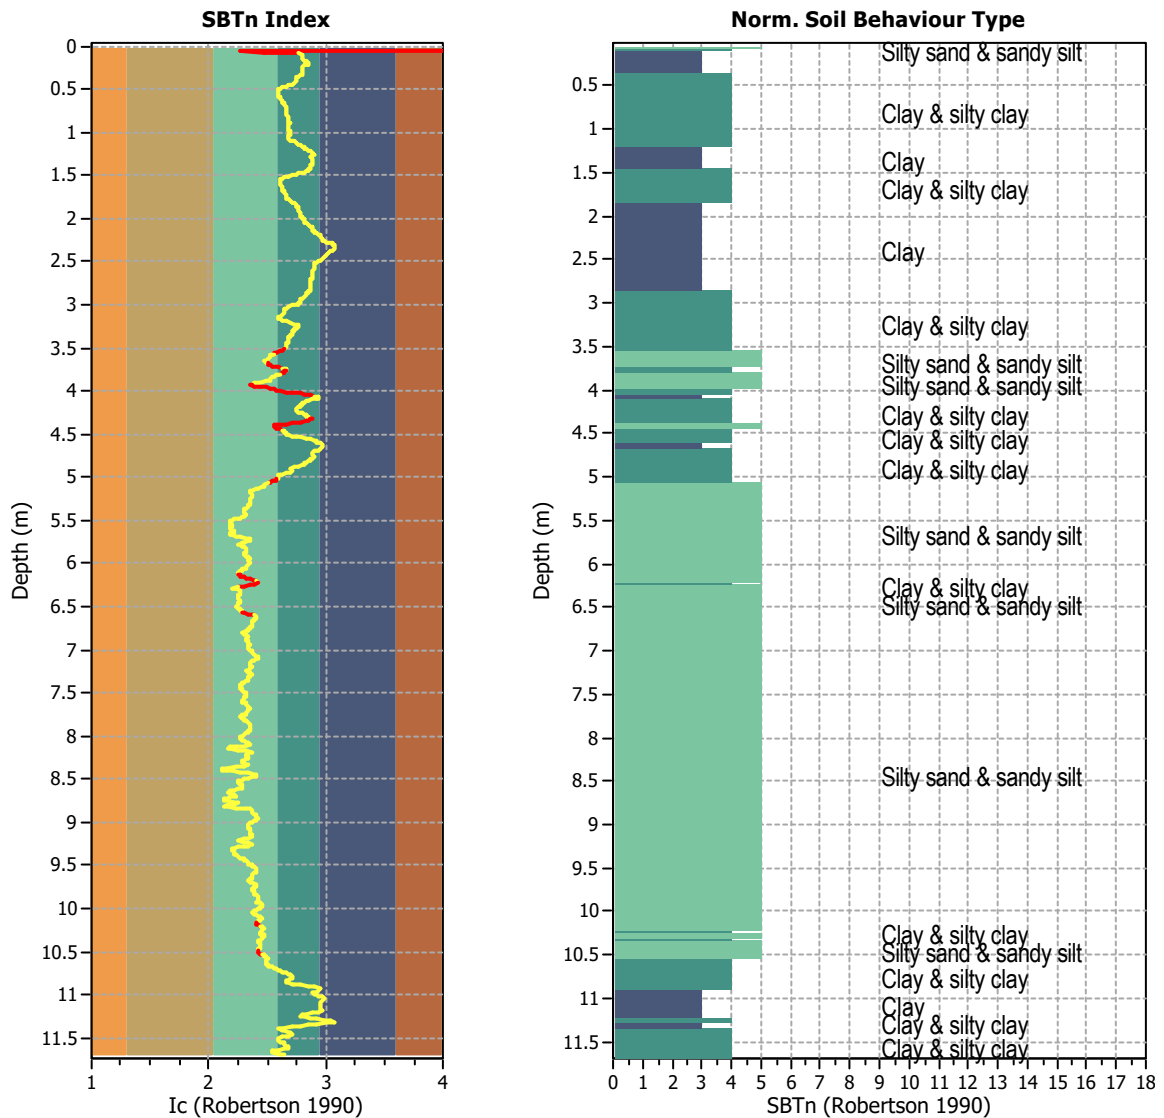


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1169
 Total points excluded: 88
 Exclusion percentage: 7.53%
 Number of layers detected: 13


Estimation of post-earthquake settlements

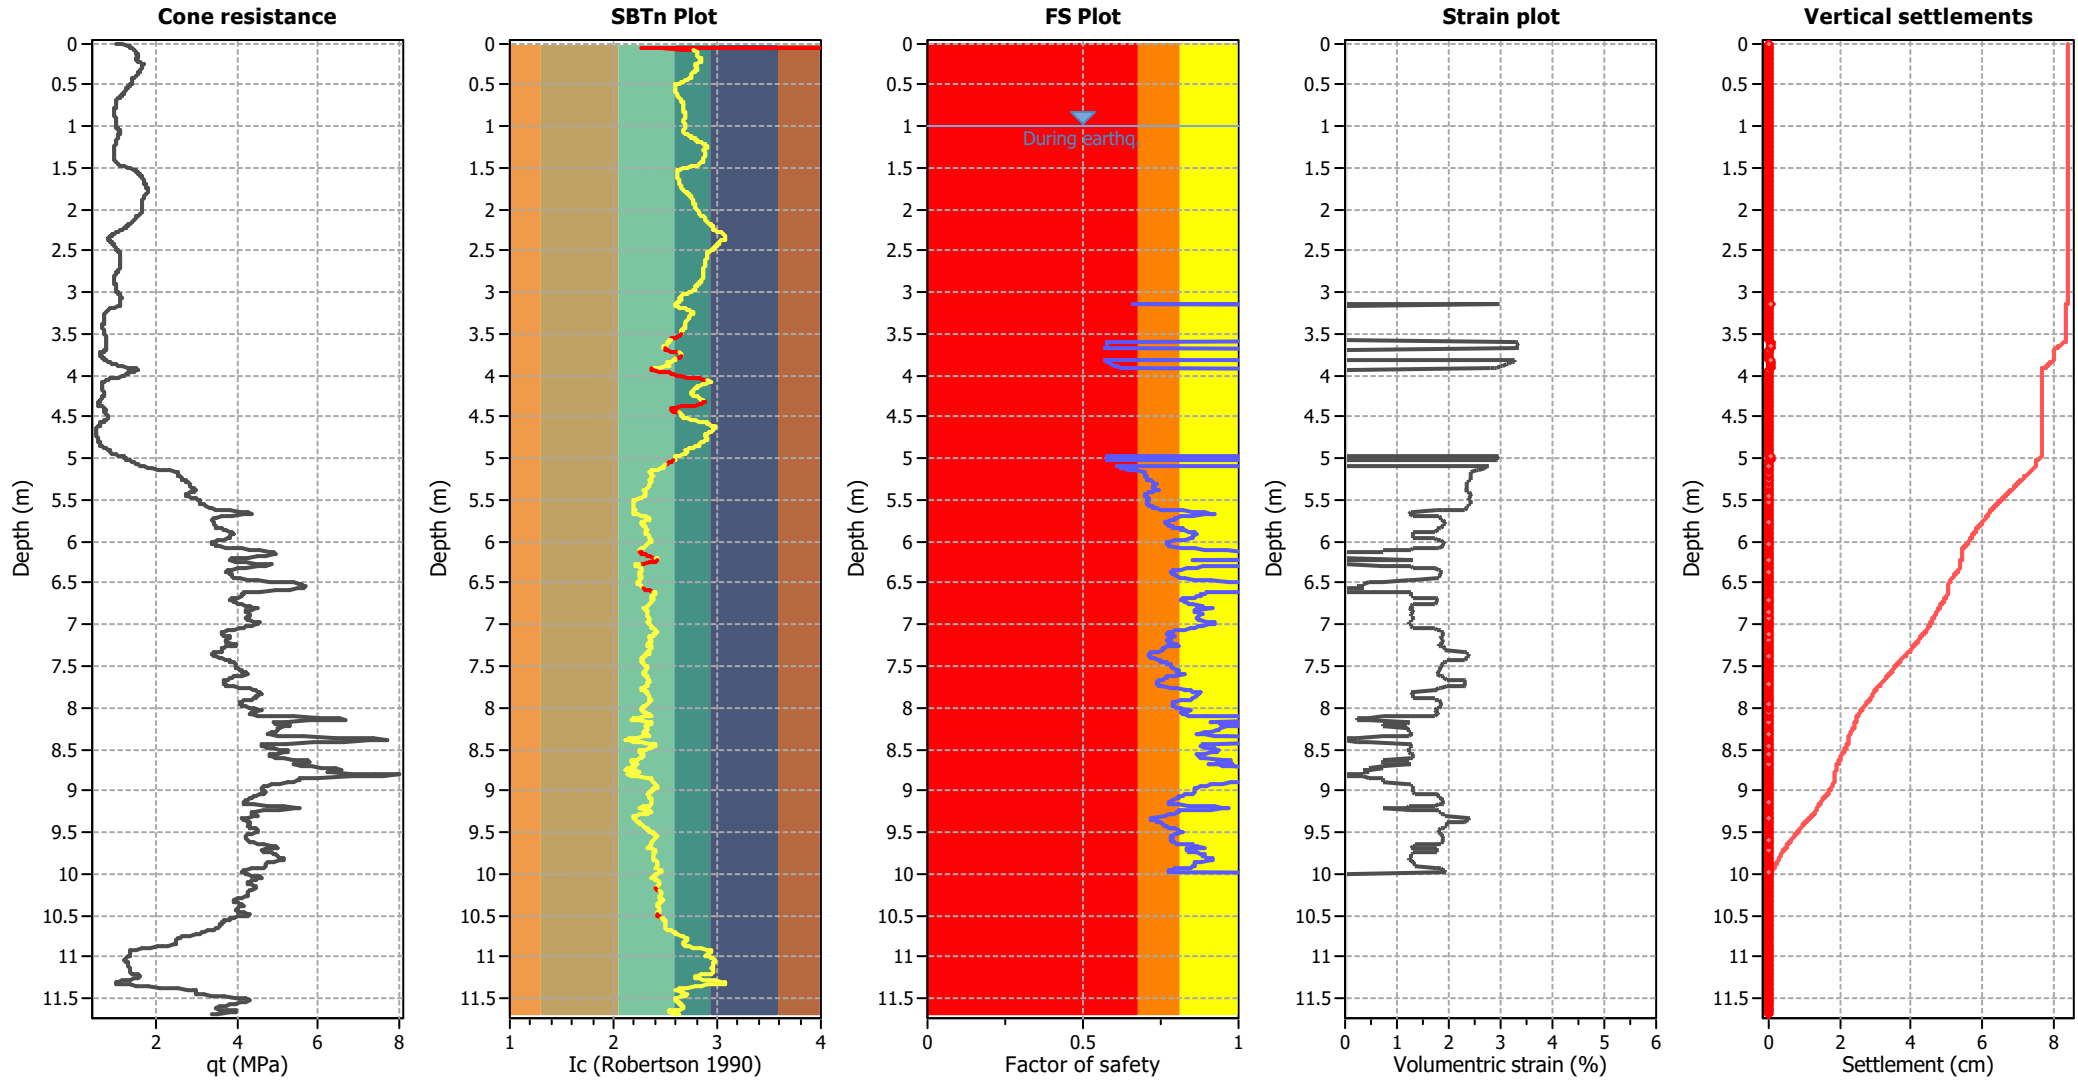

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

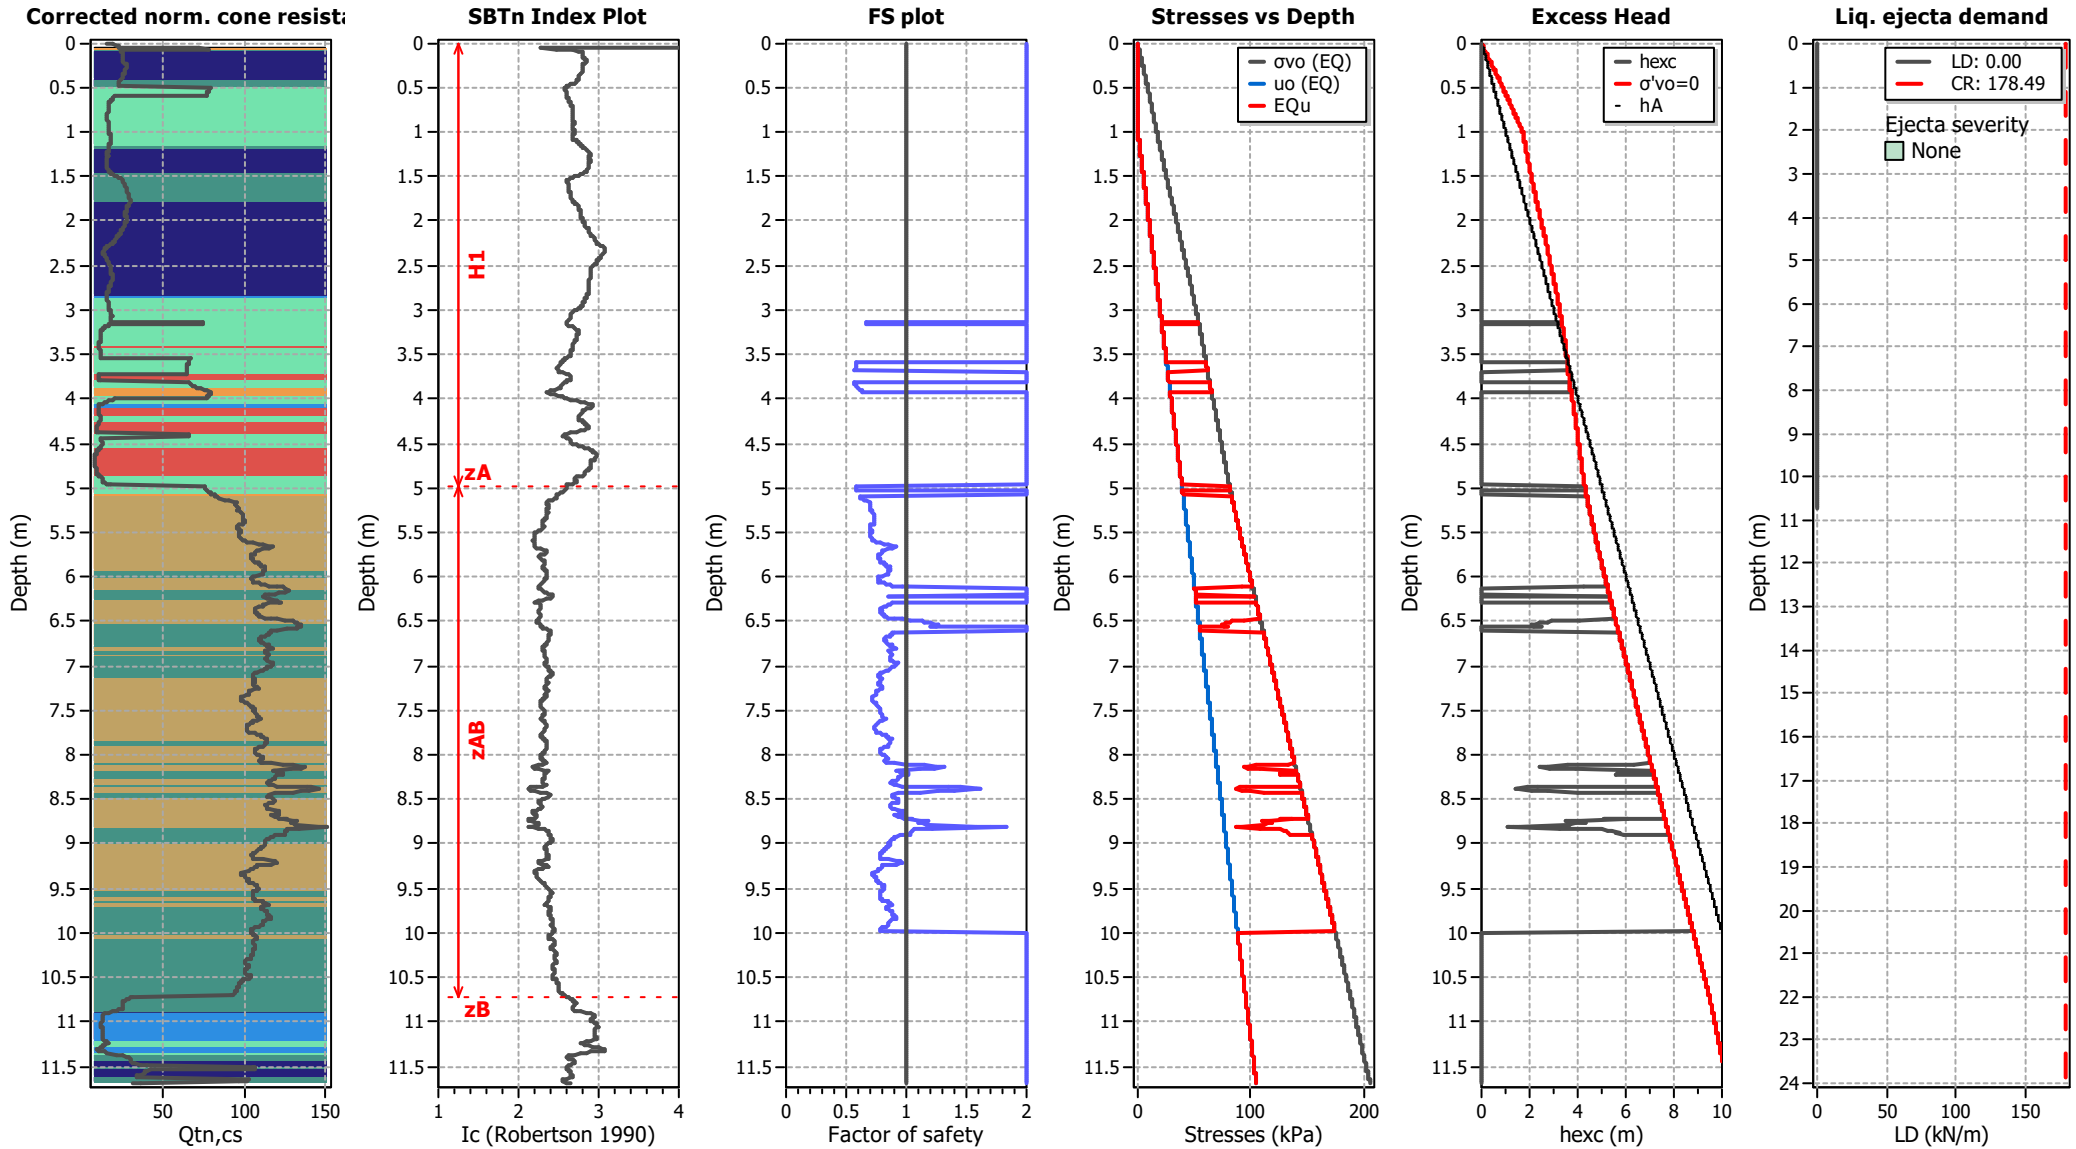

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT406

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

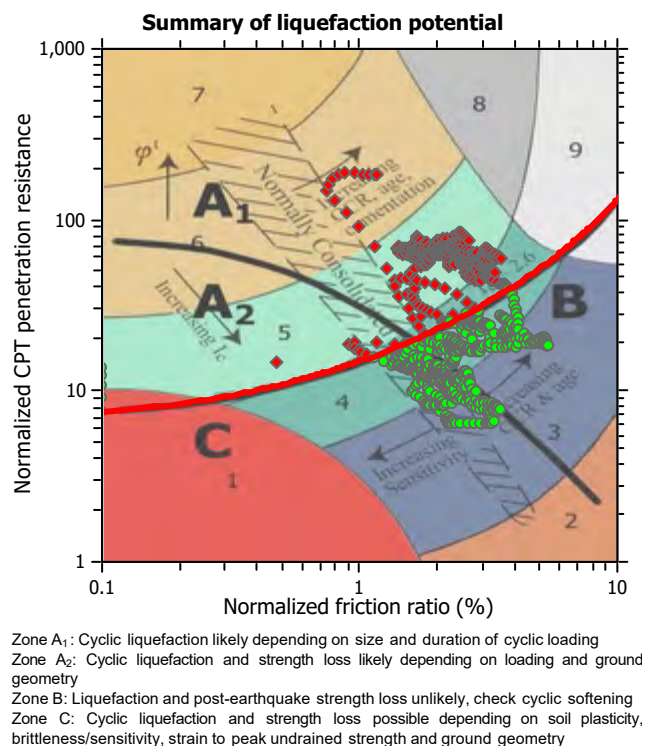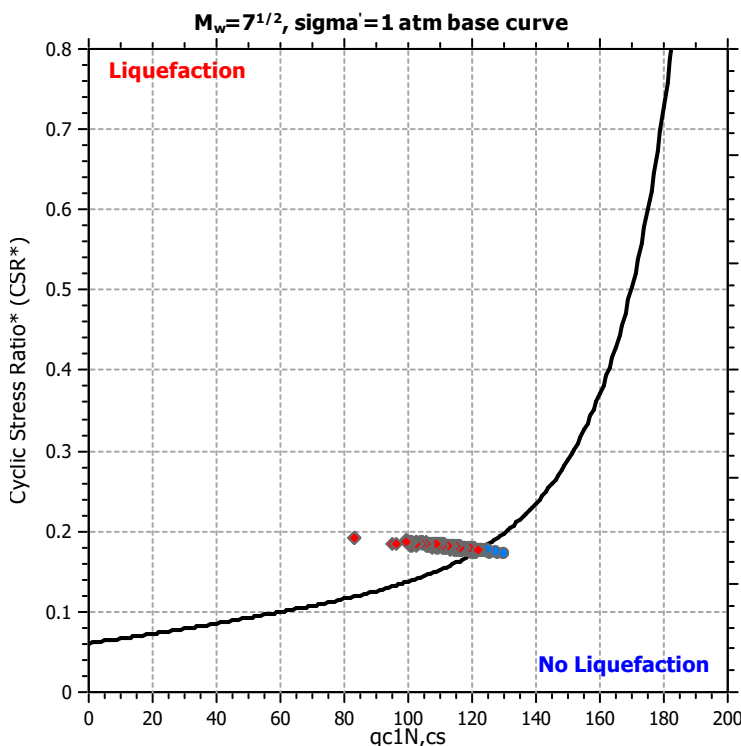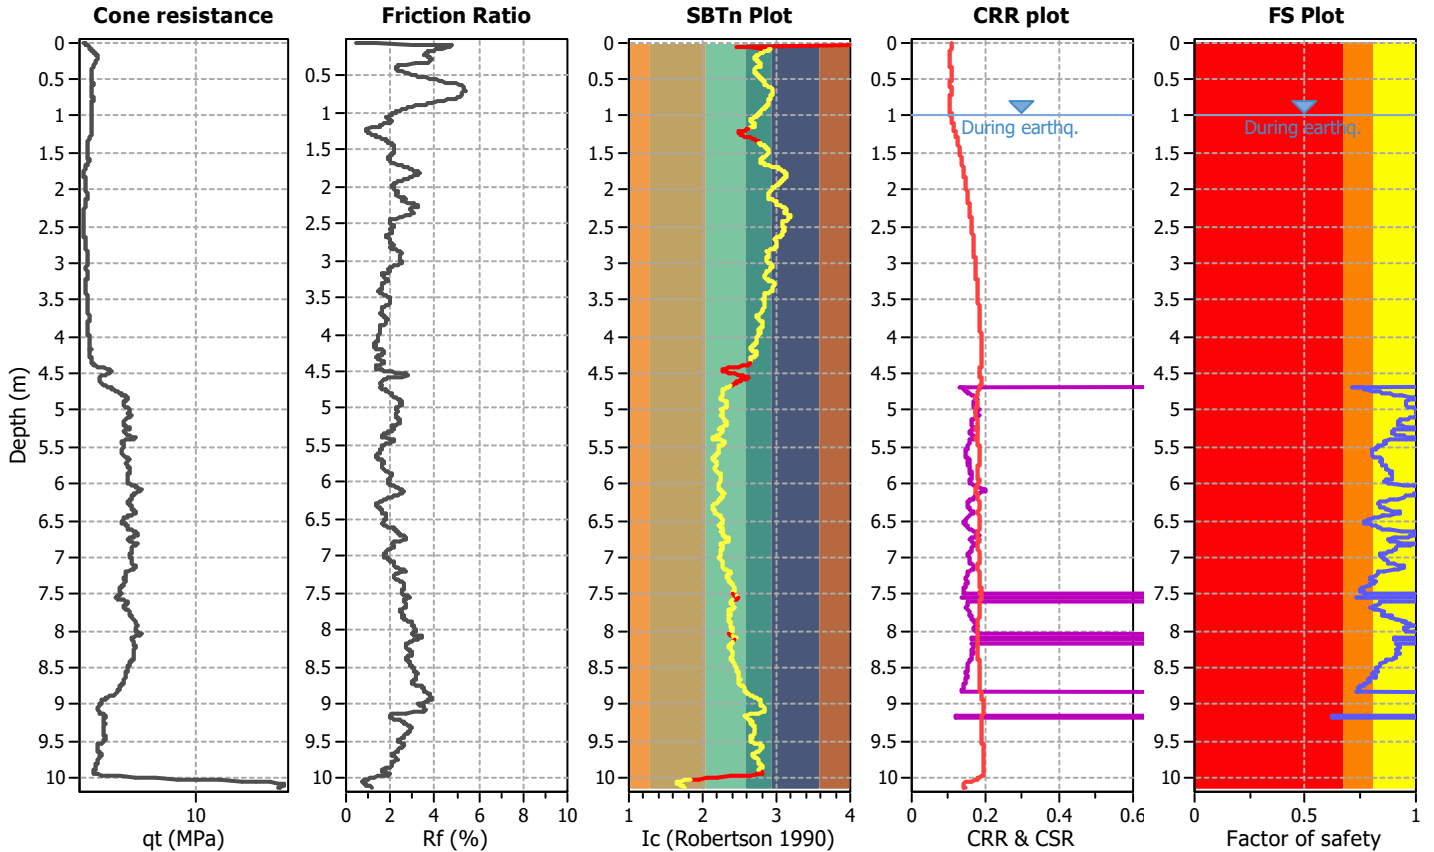

CPT basic interpretation plots

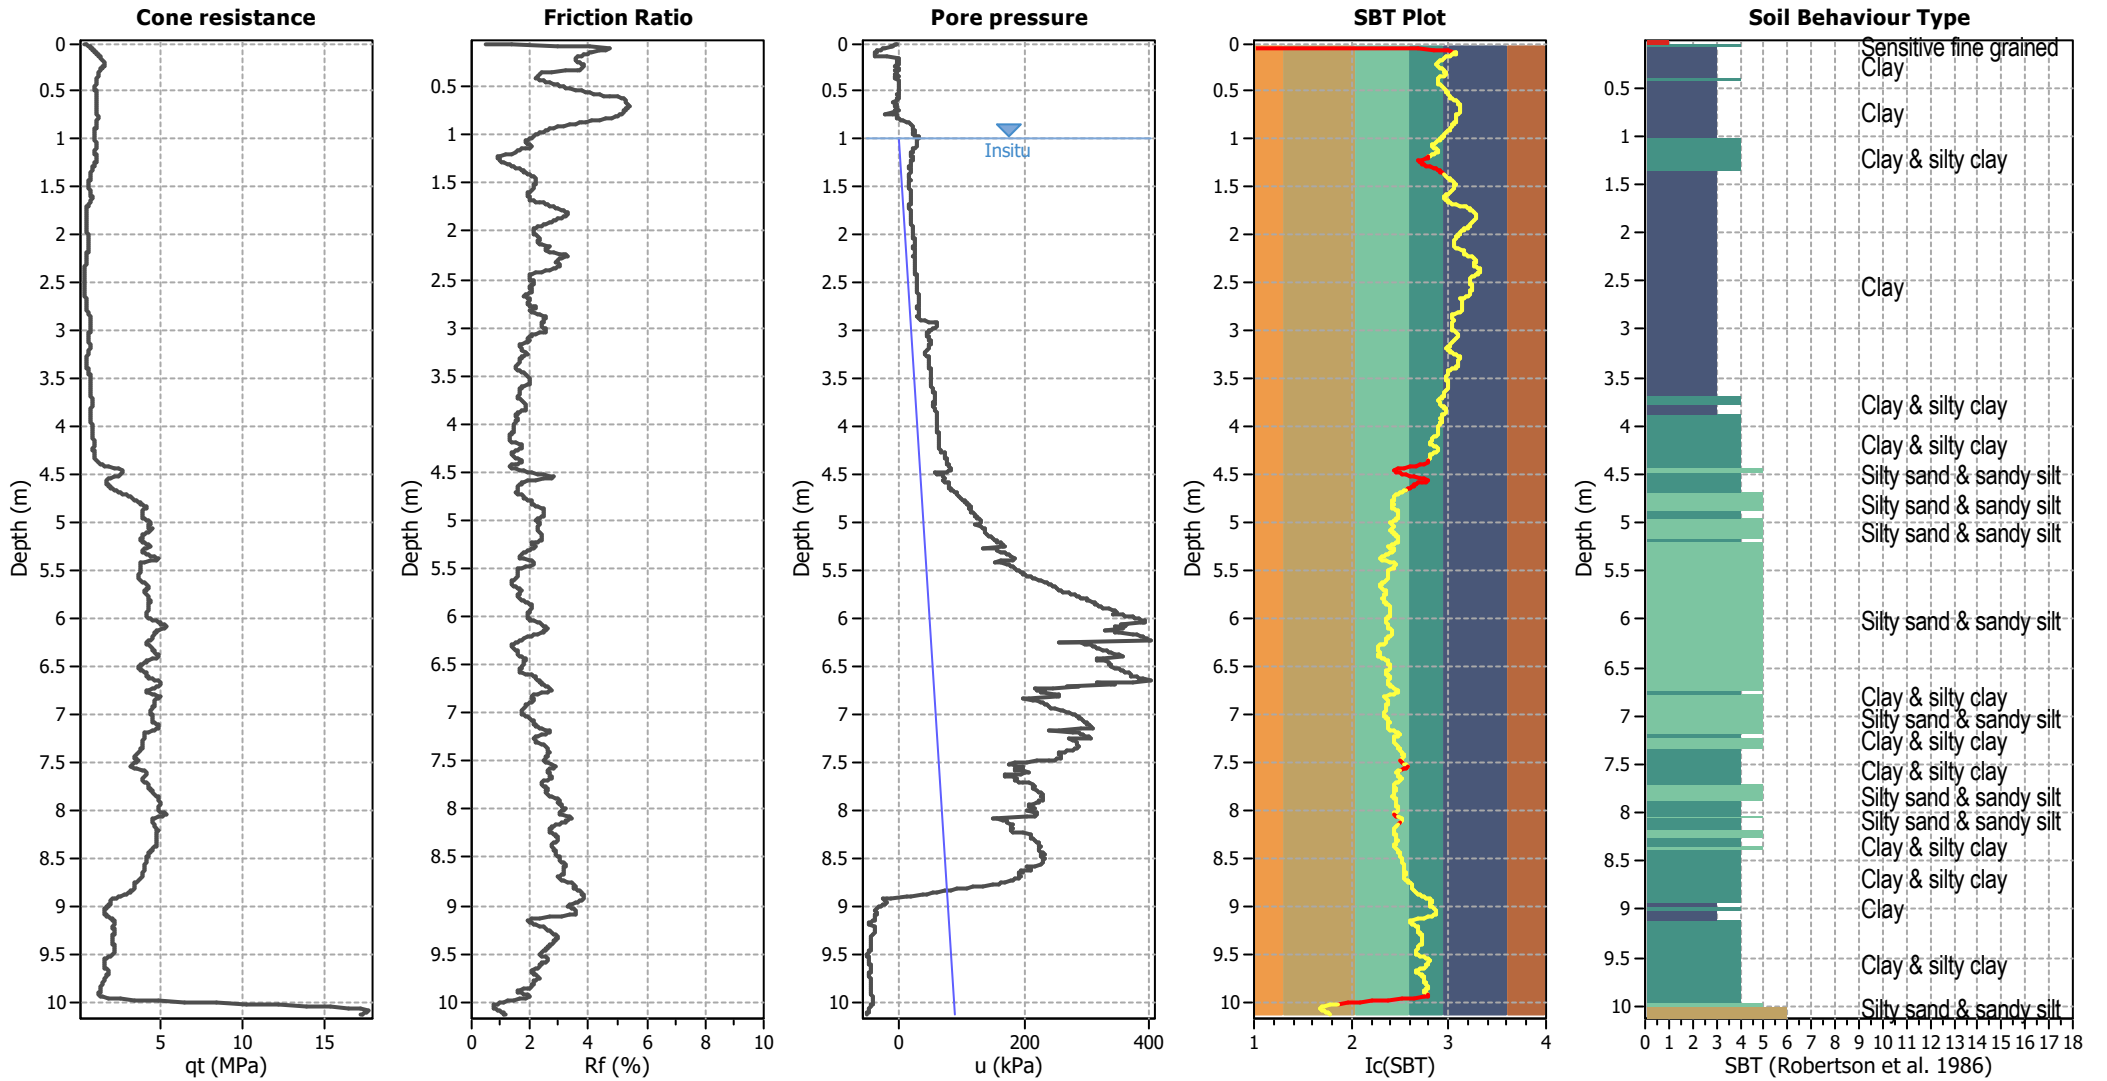


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

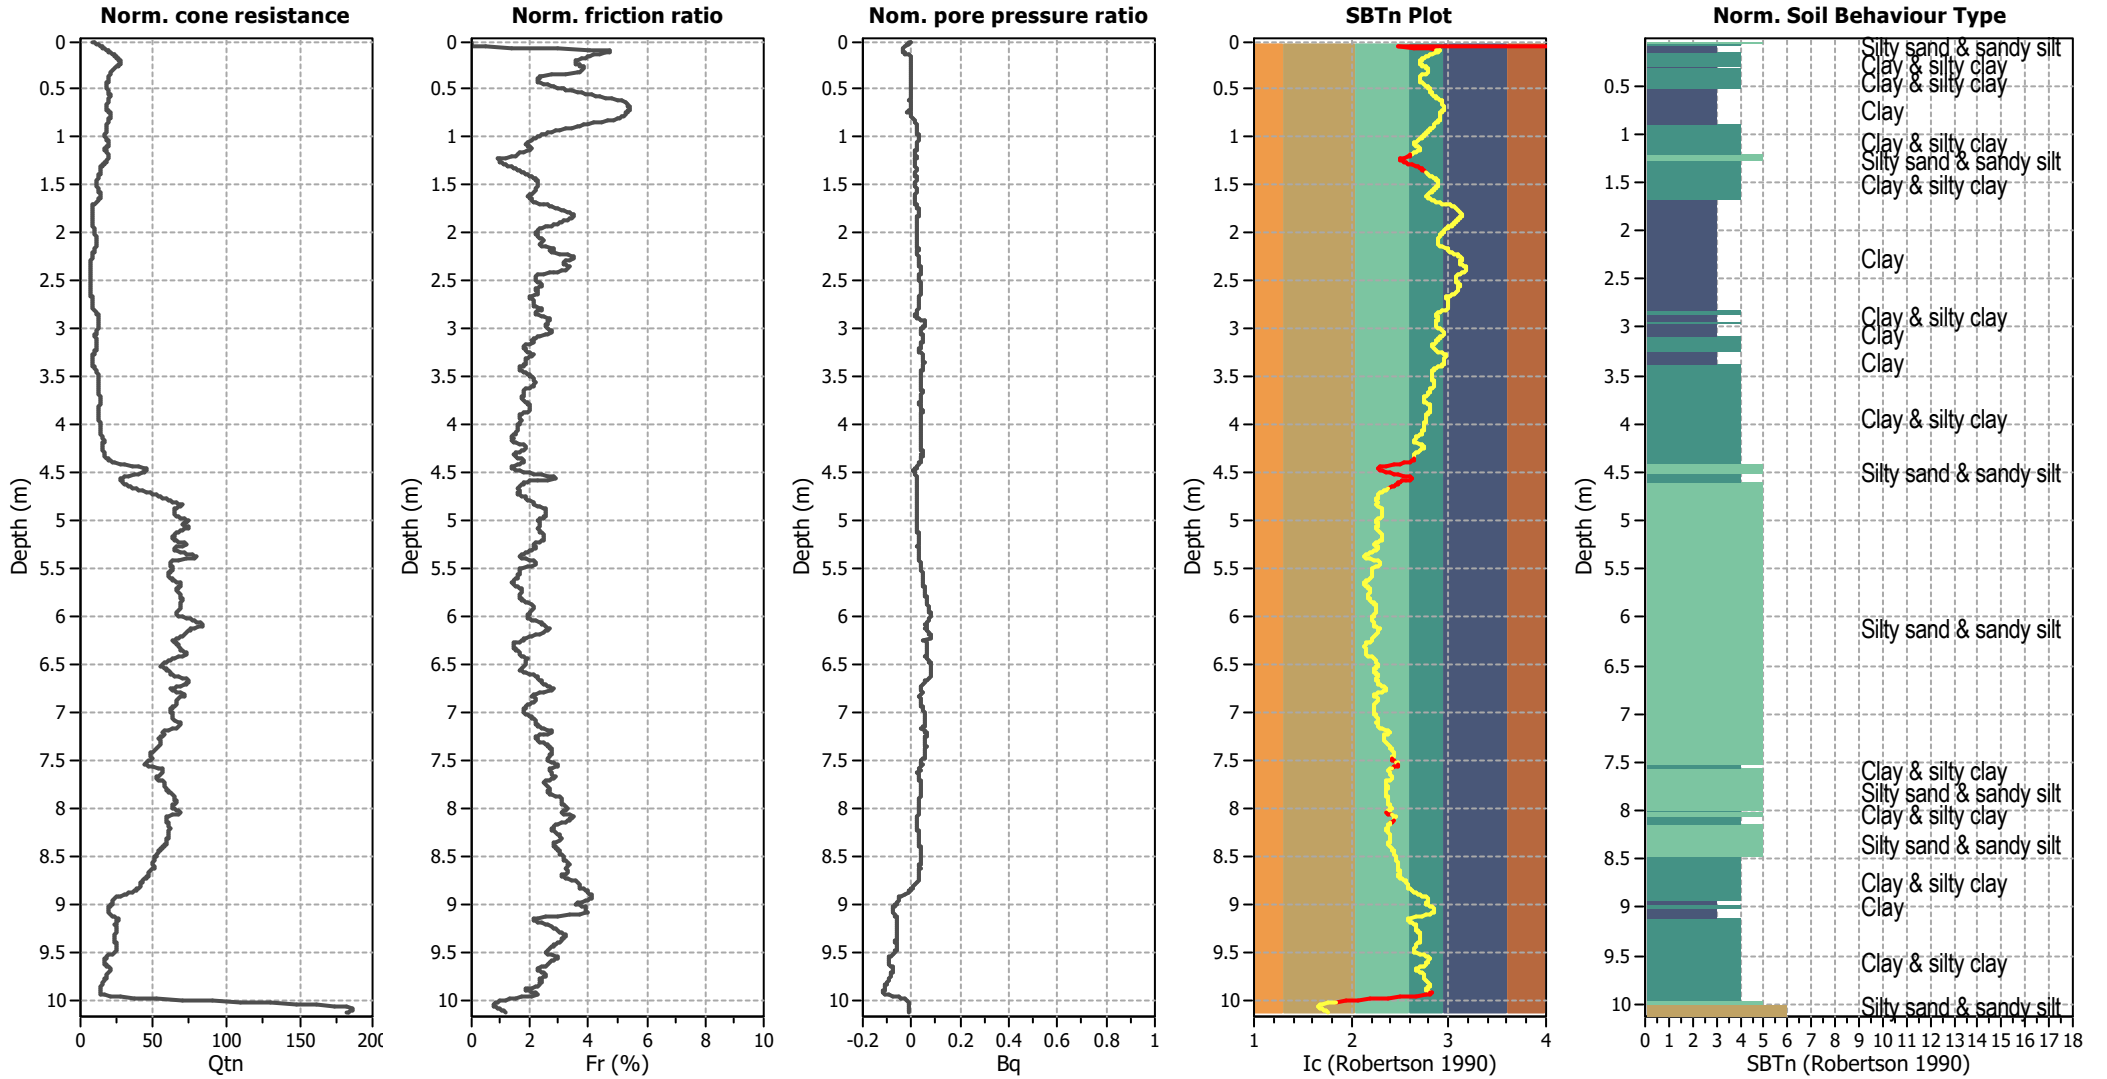


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

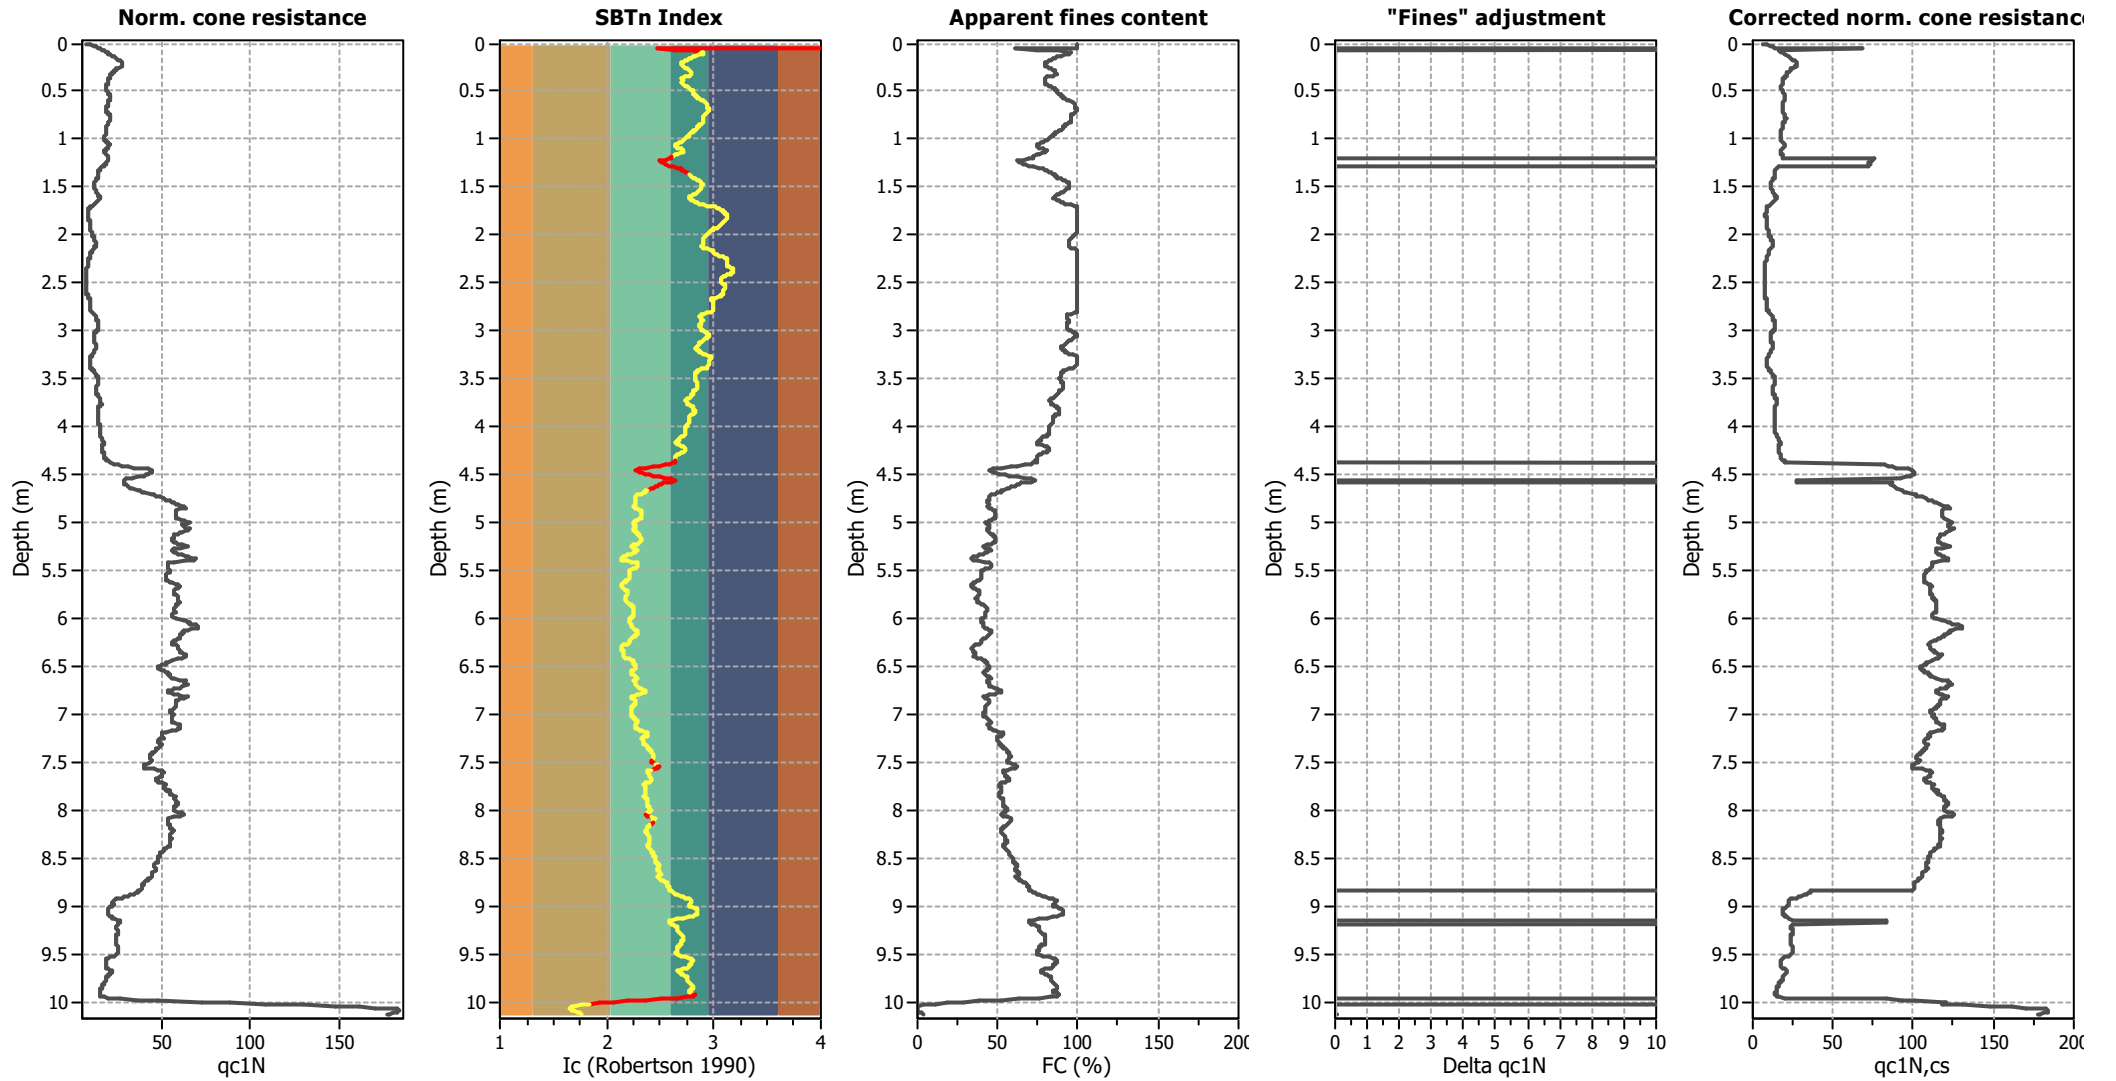

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

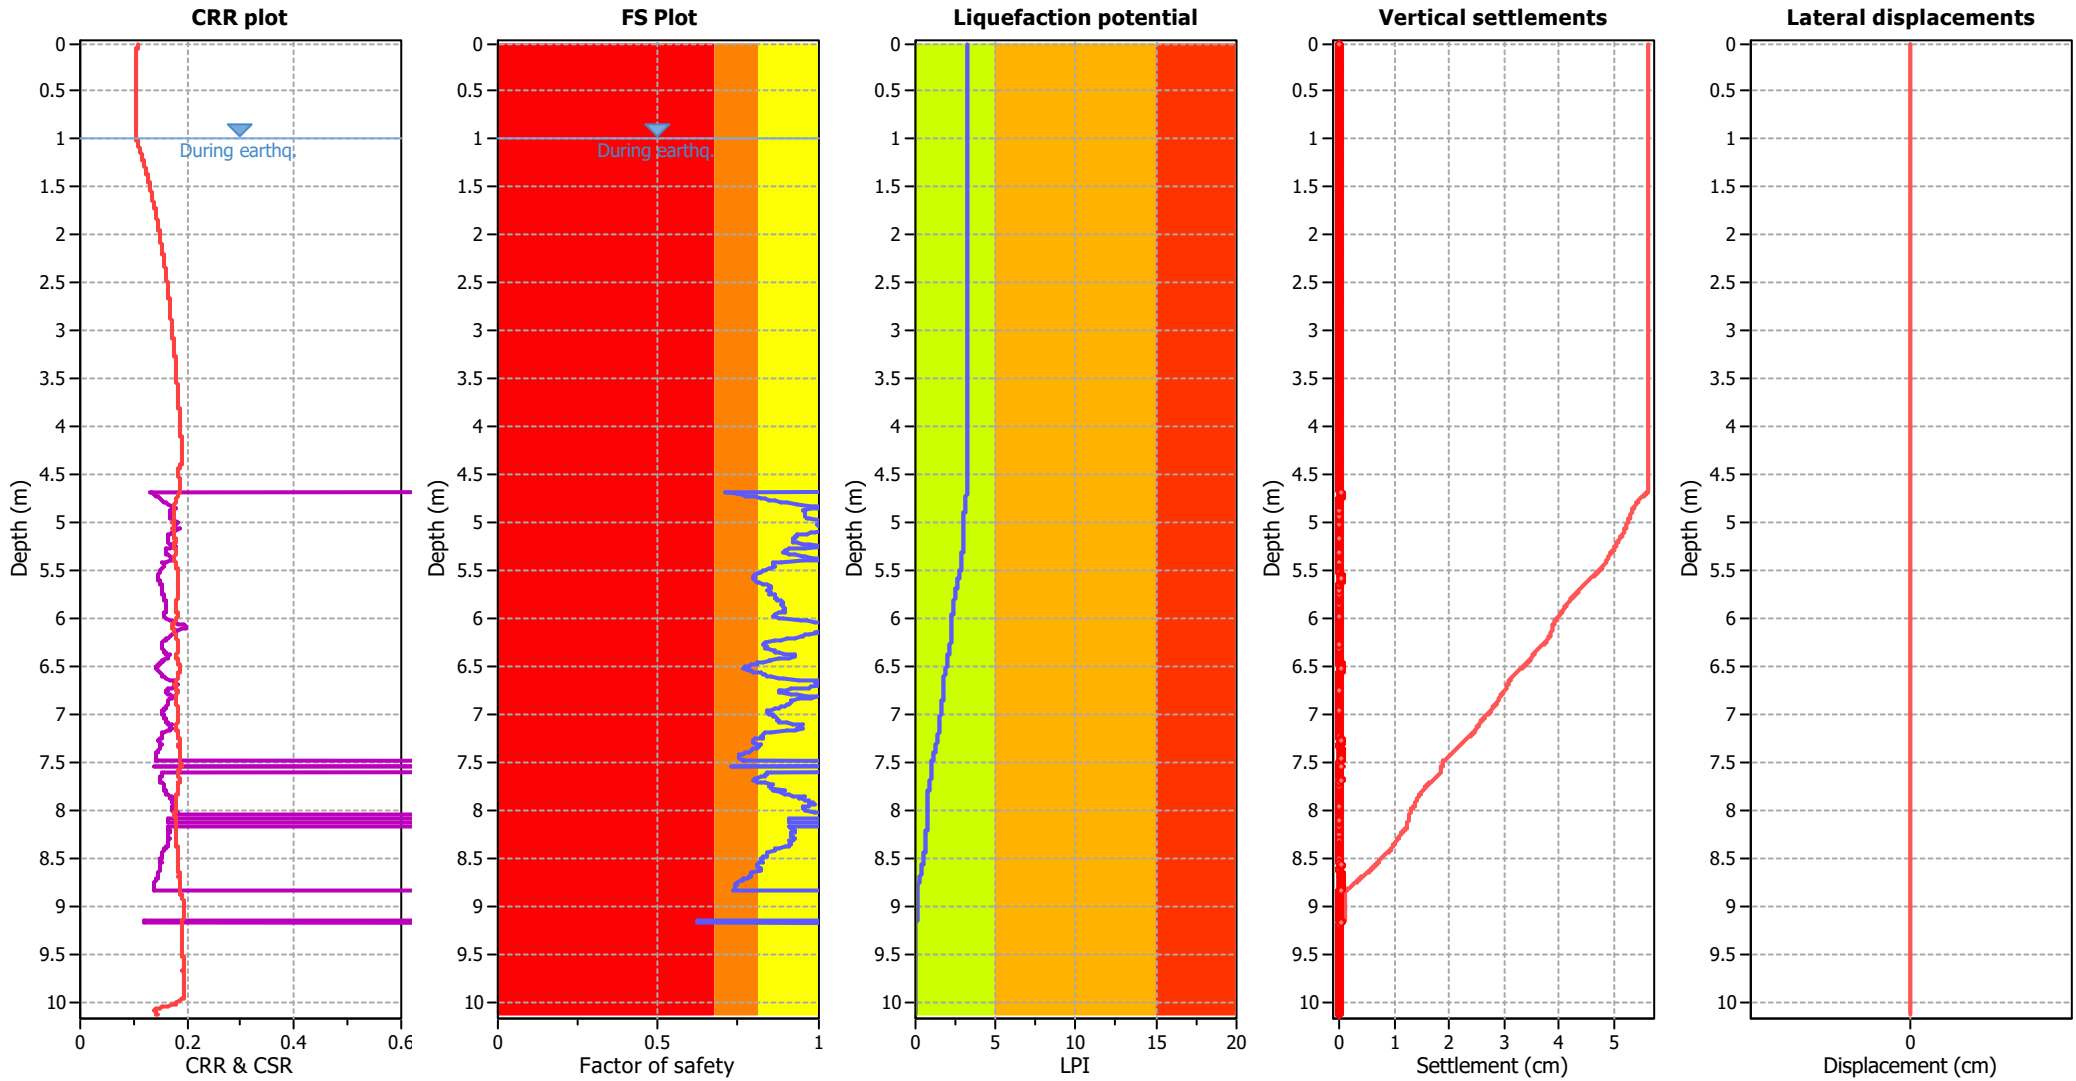

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

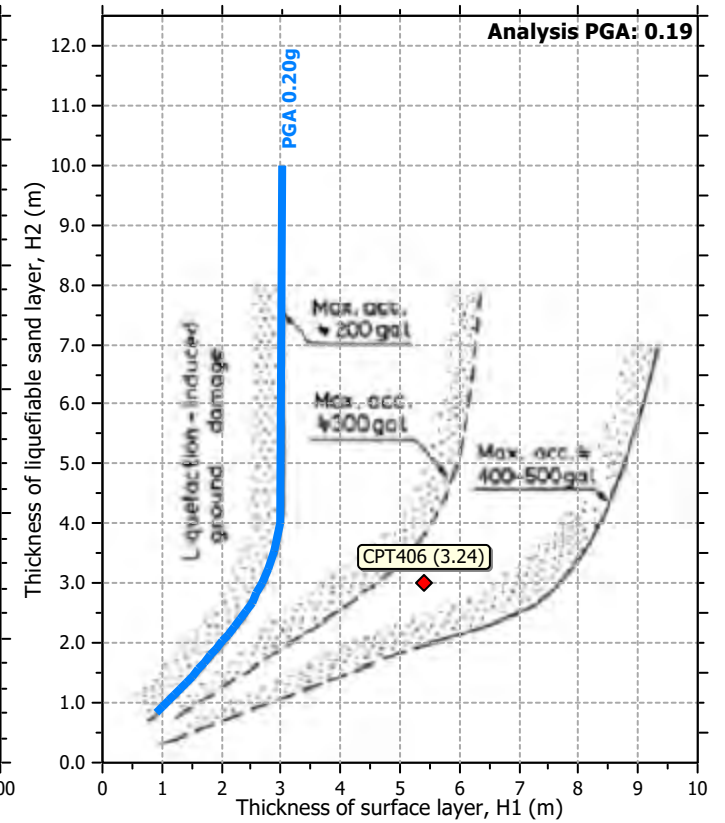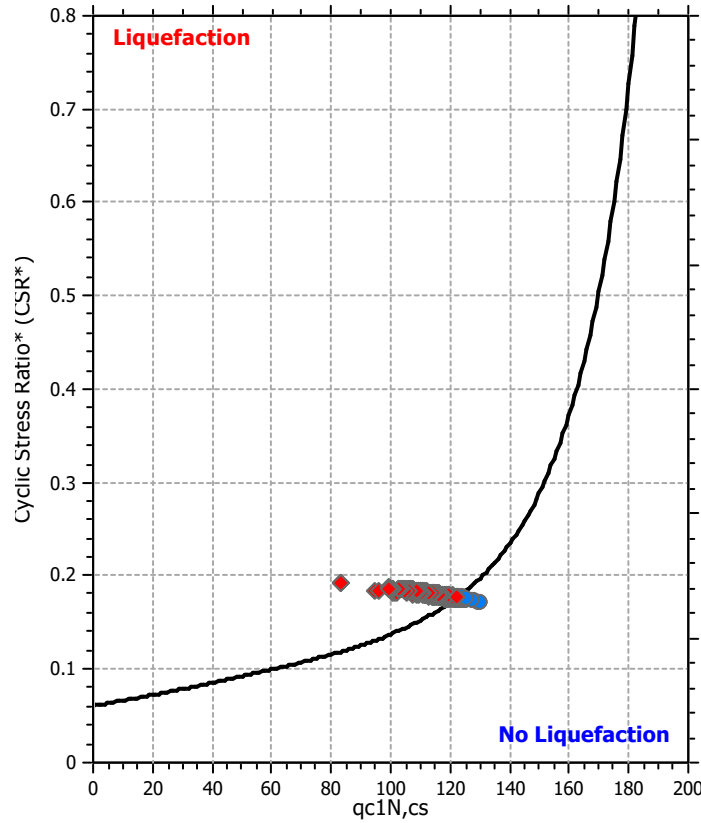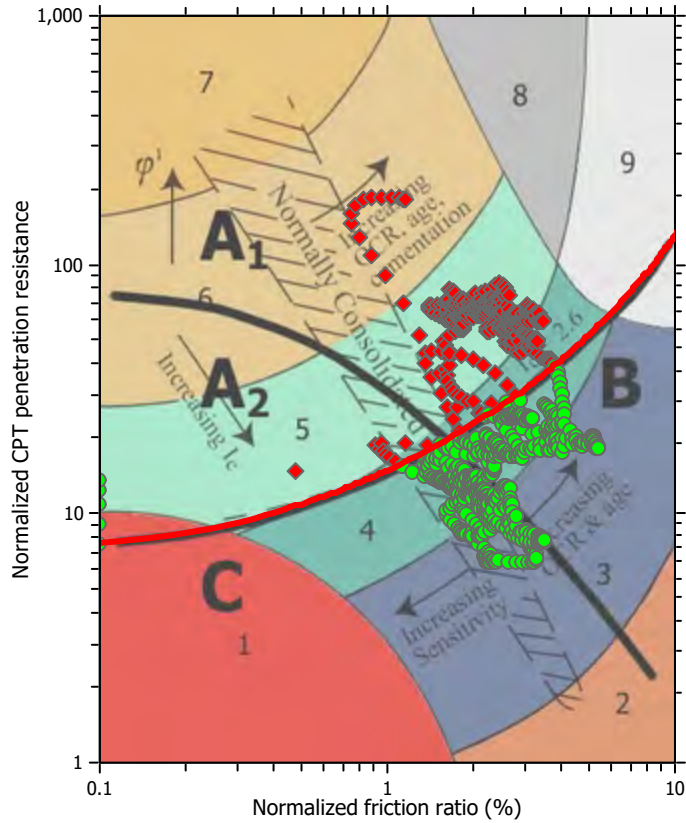

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

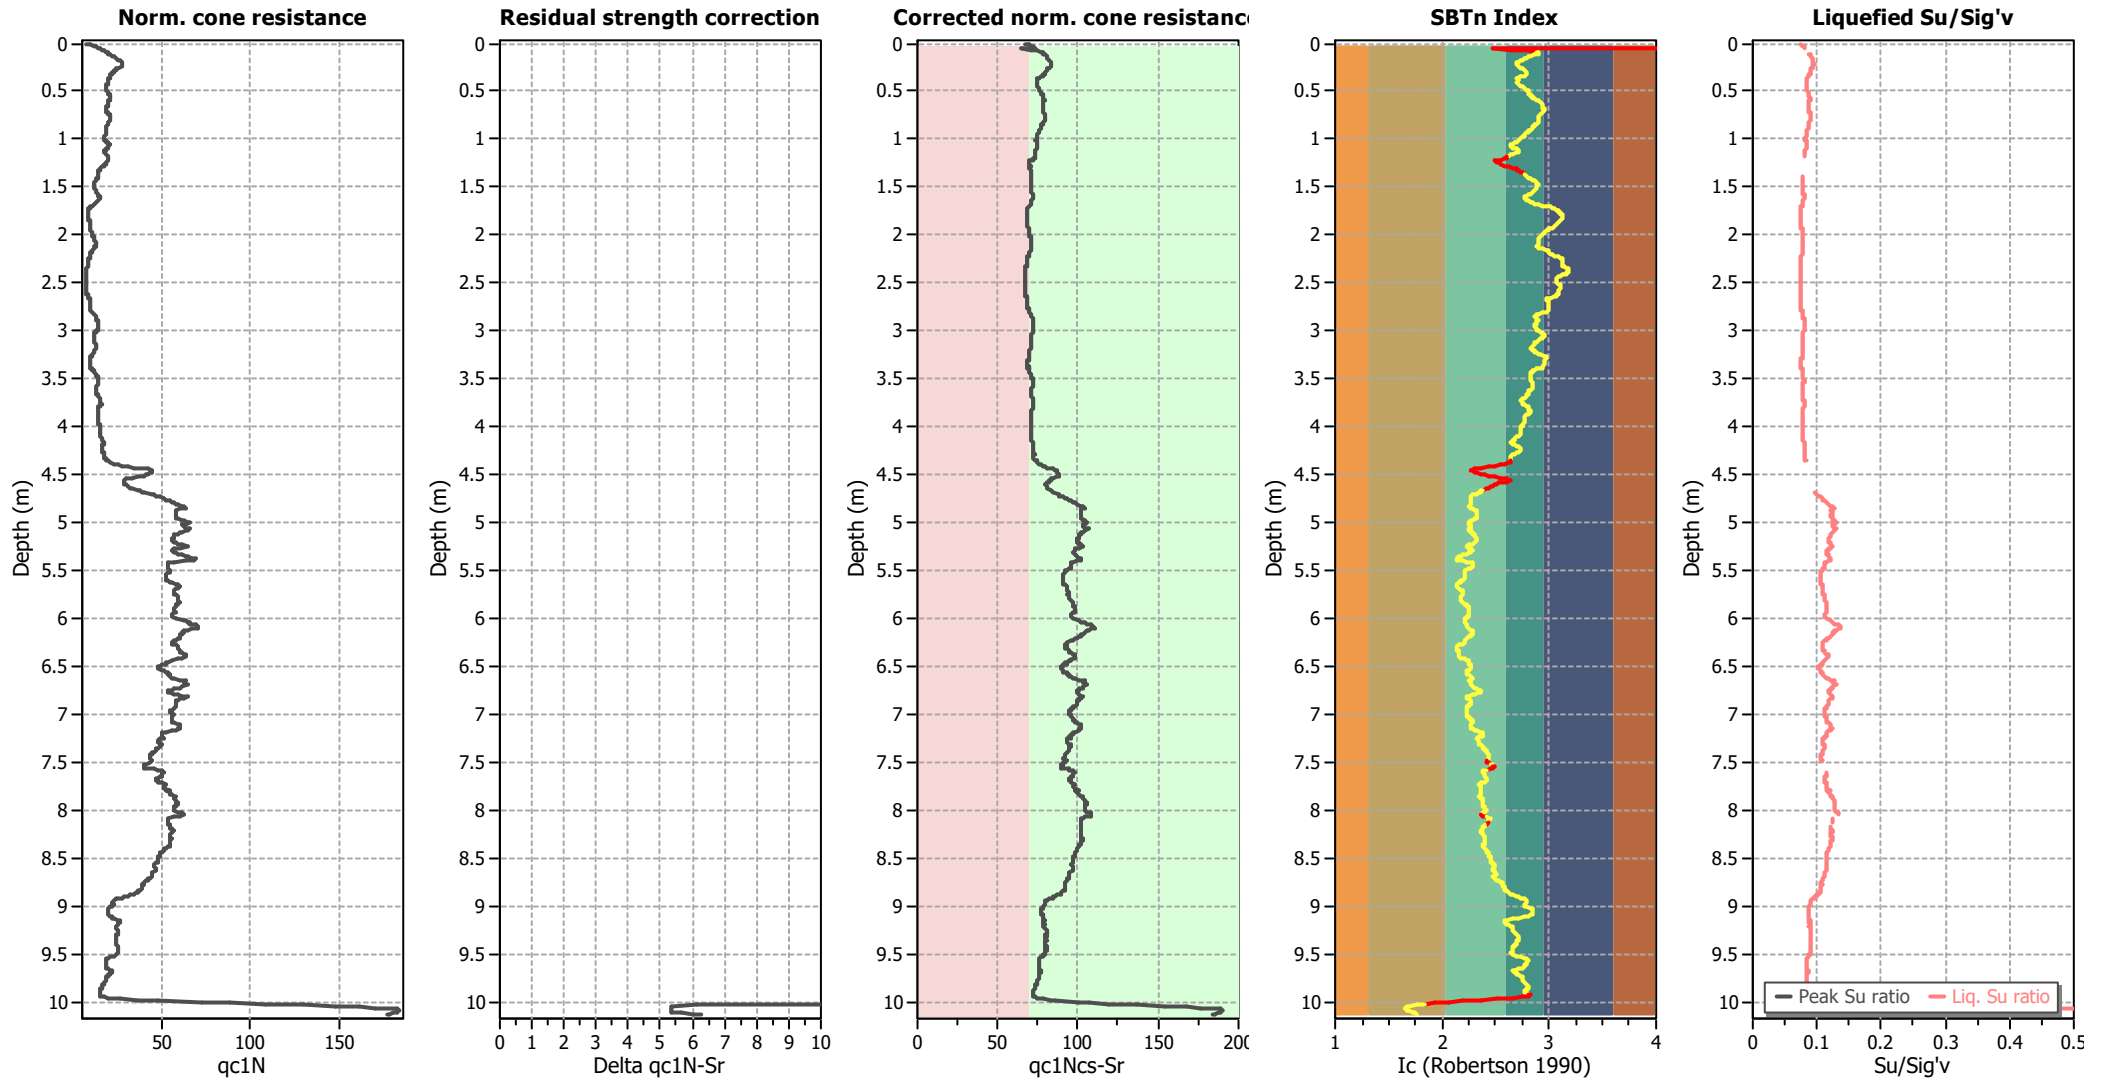

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description


The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

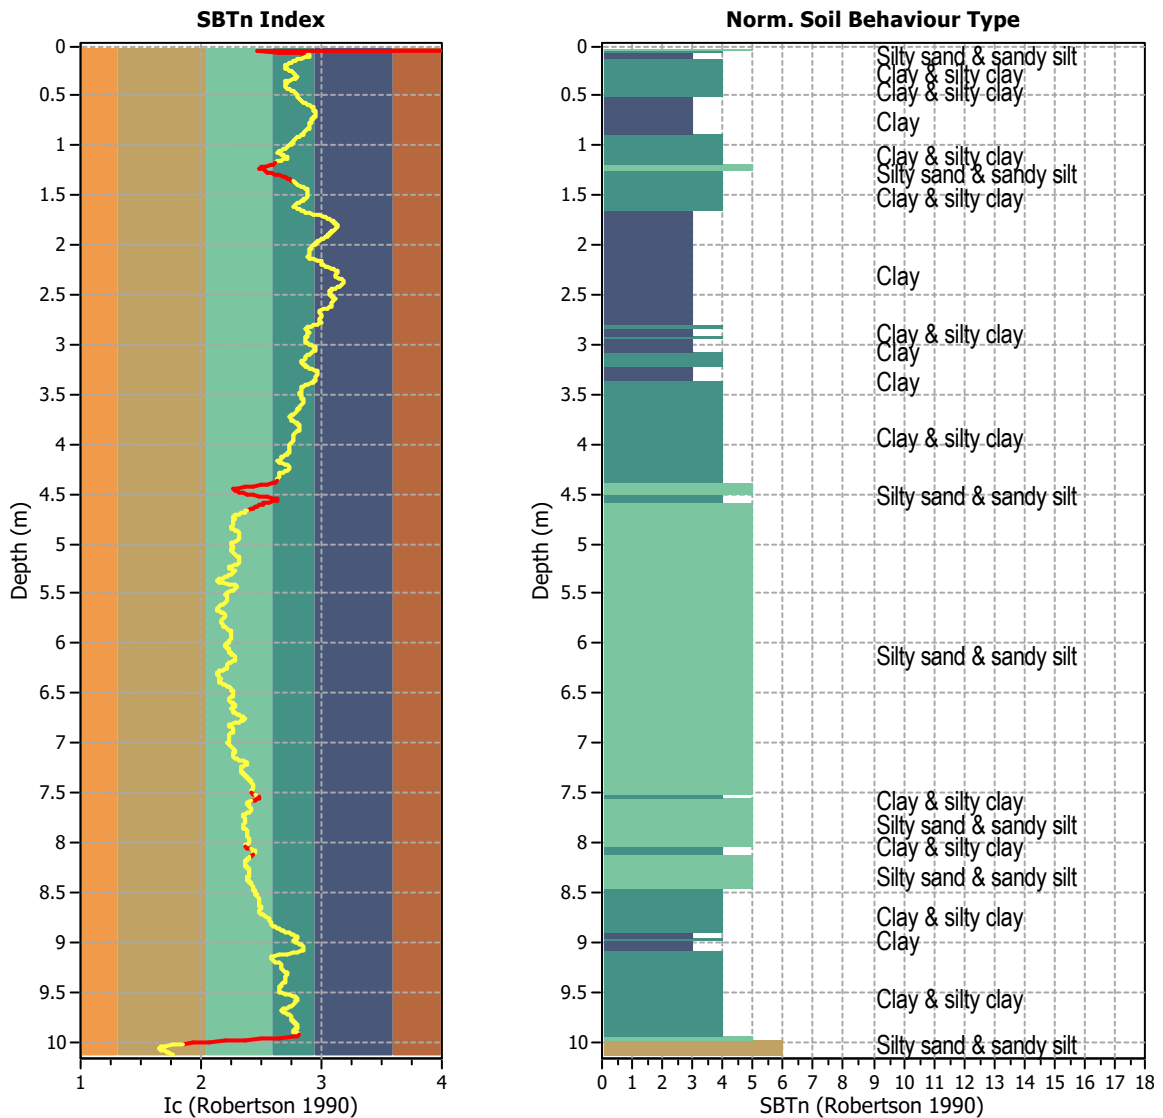

Transition layer algorithm properties		General statistics	
I_c minimum check value:	1.70	Total points in CPT file:	1013
I_c maximum check value:	3.00	Total points excluded:	83
I_c change ratio value:	0.0100	Exclusion percentage:	8.19%
Minimum number of points in layer:	4	Number of layers detected:	11


Estimation of post-earthquake settlements

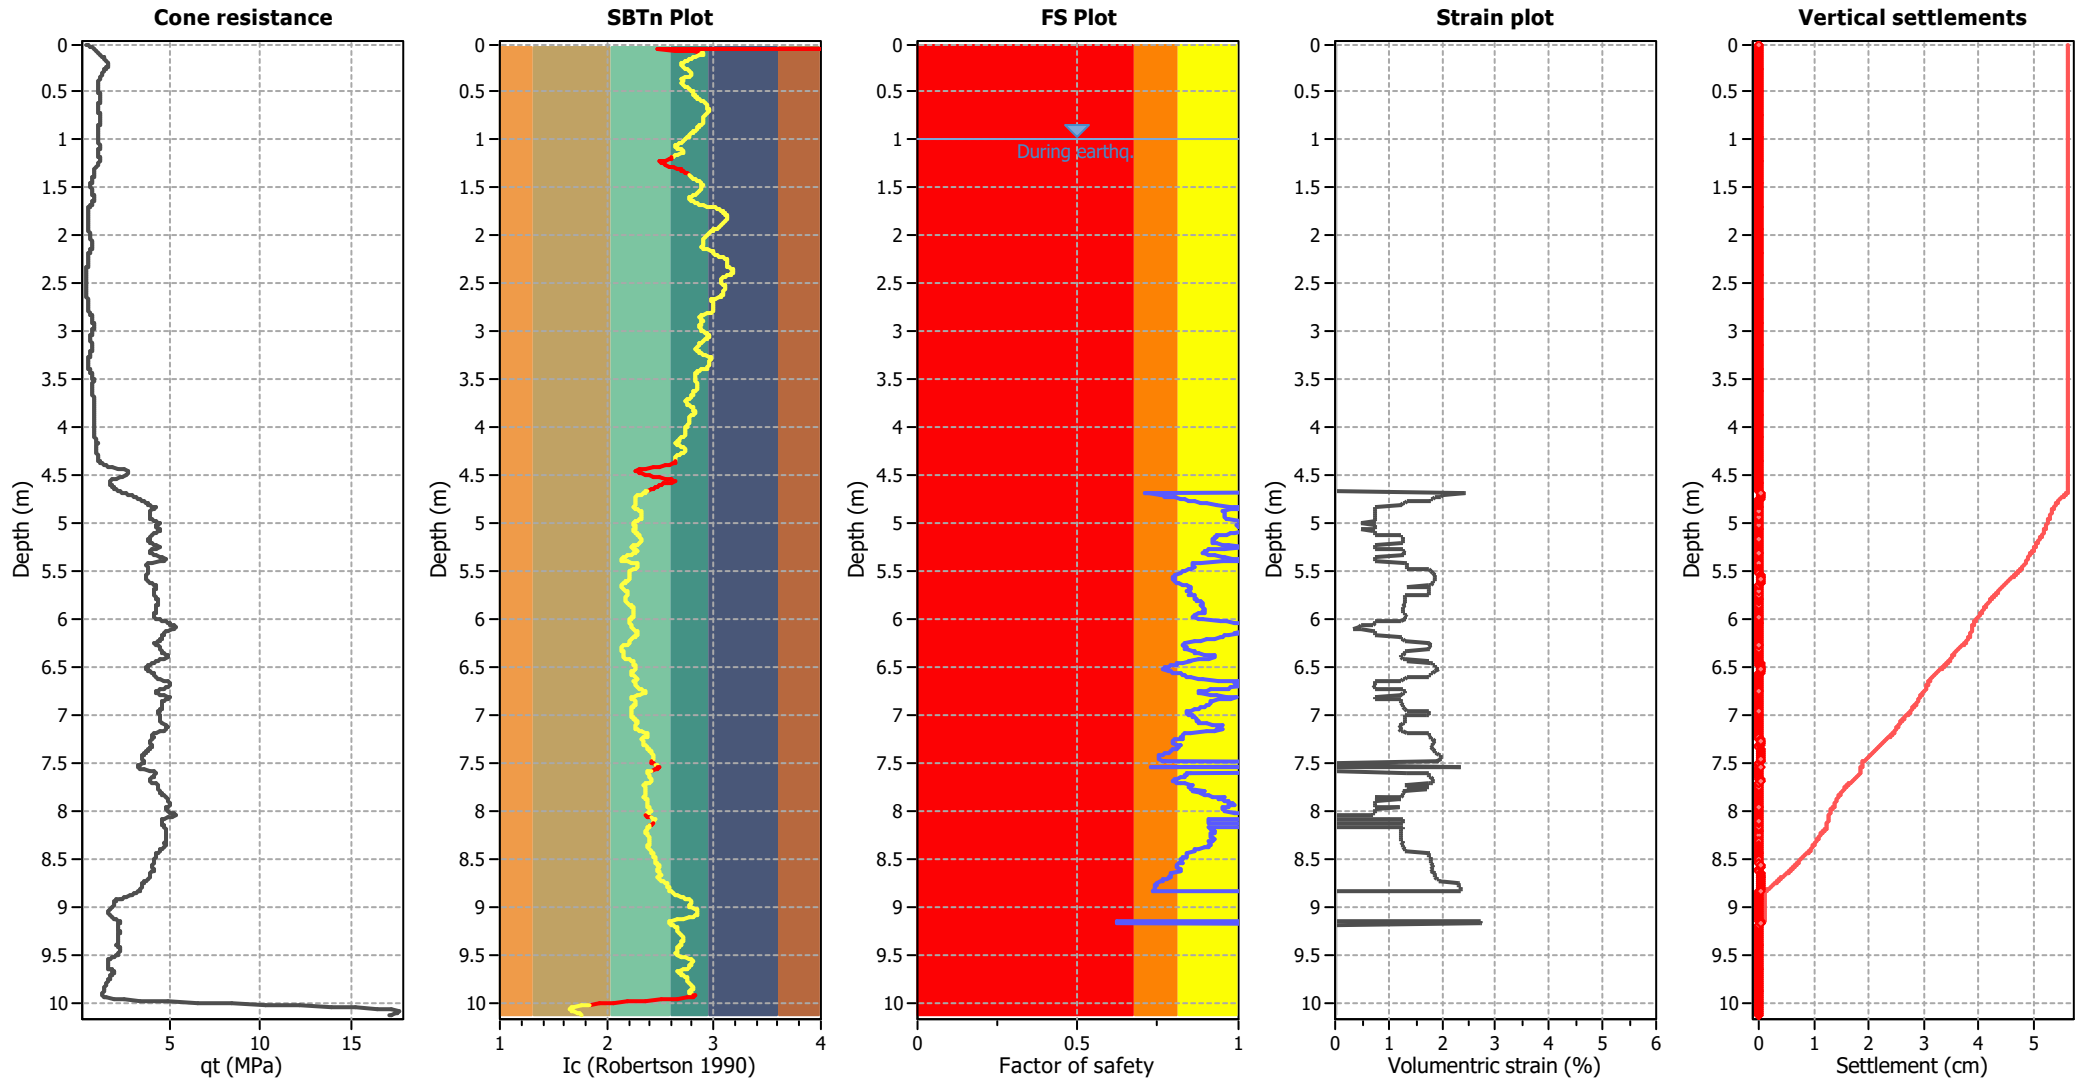

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

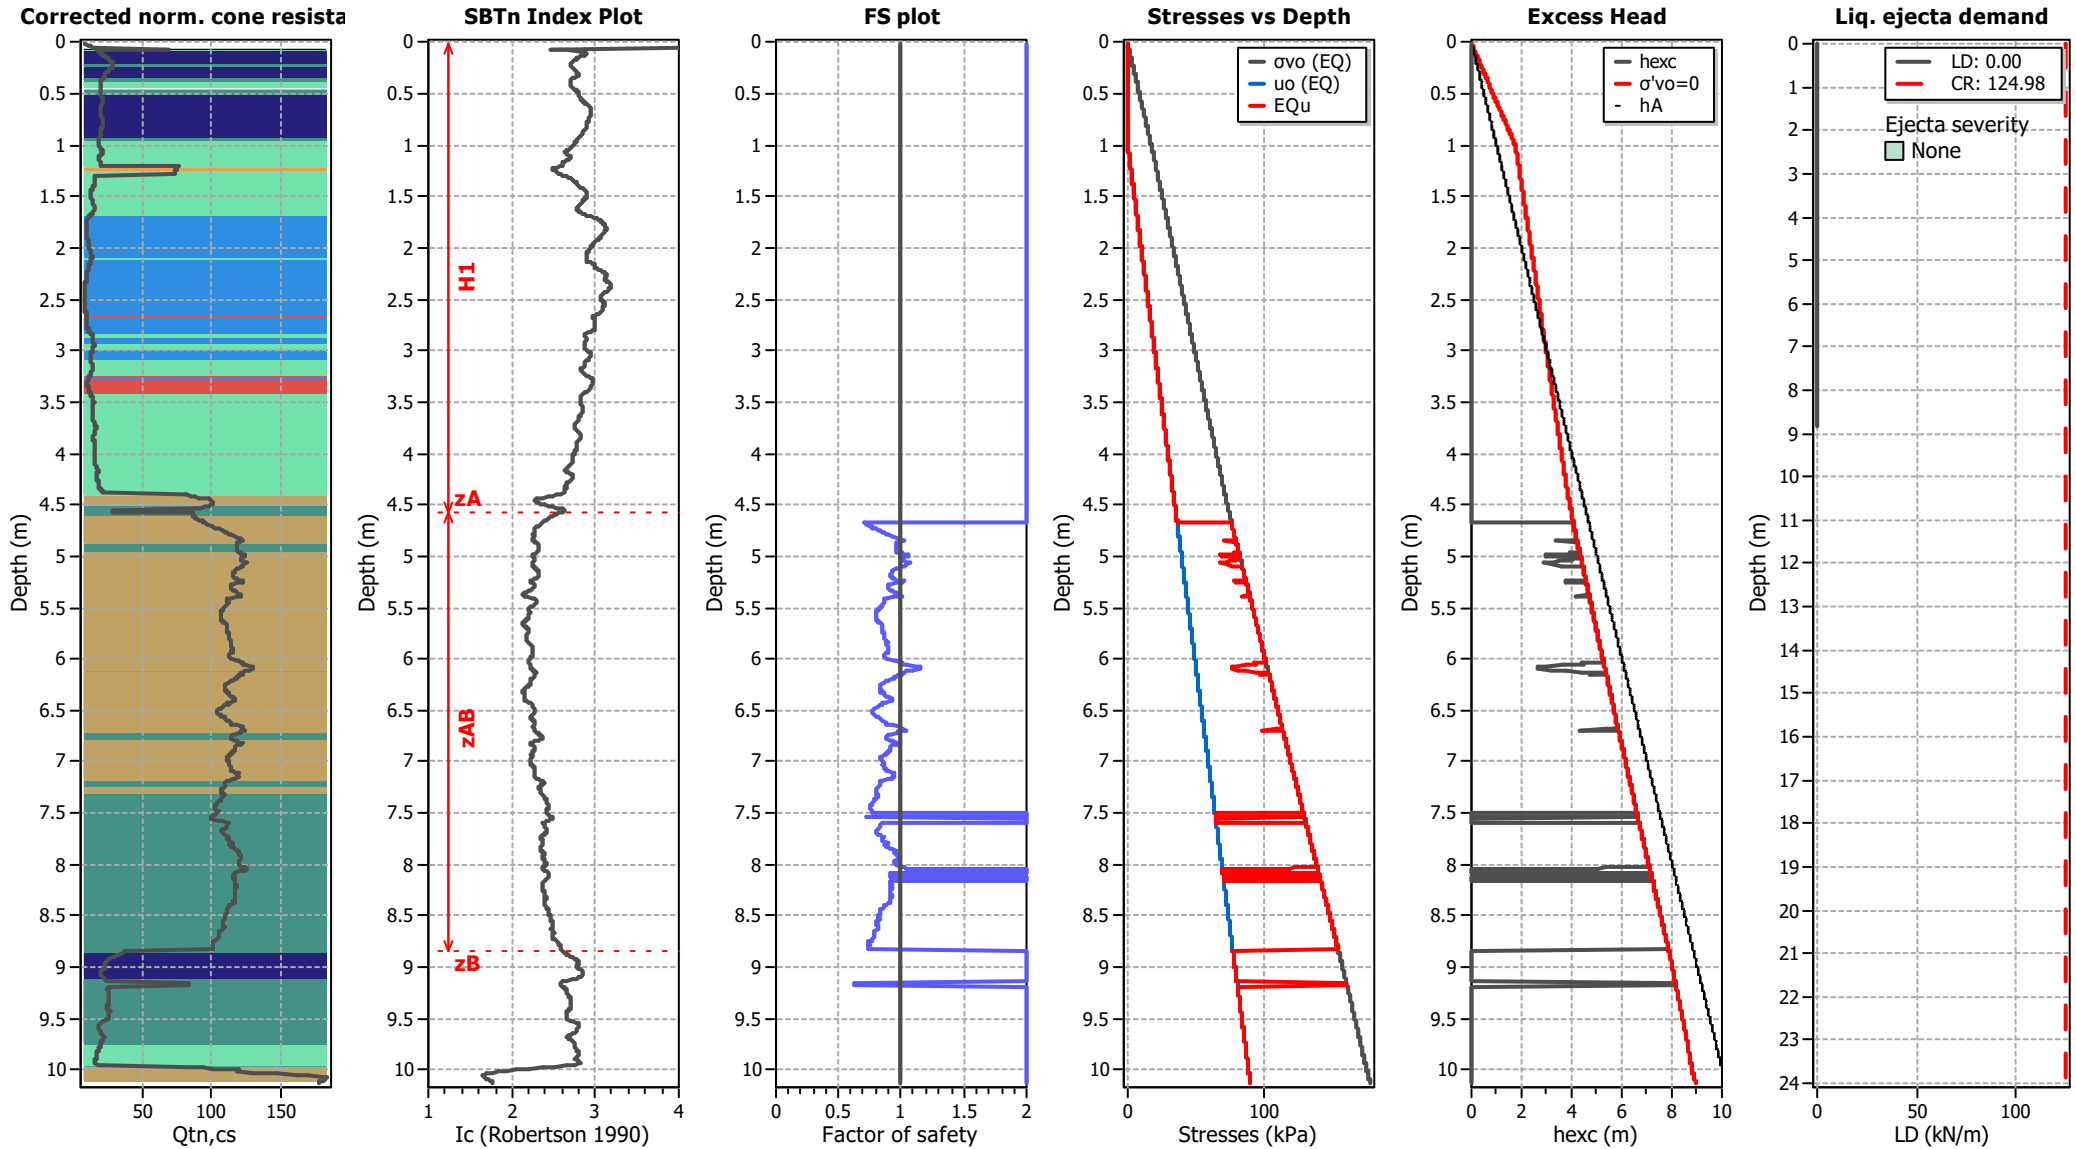

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT407

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

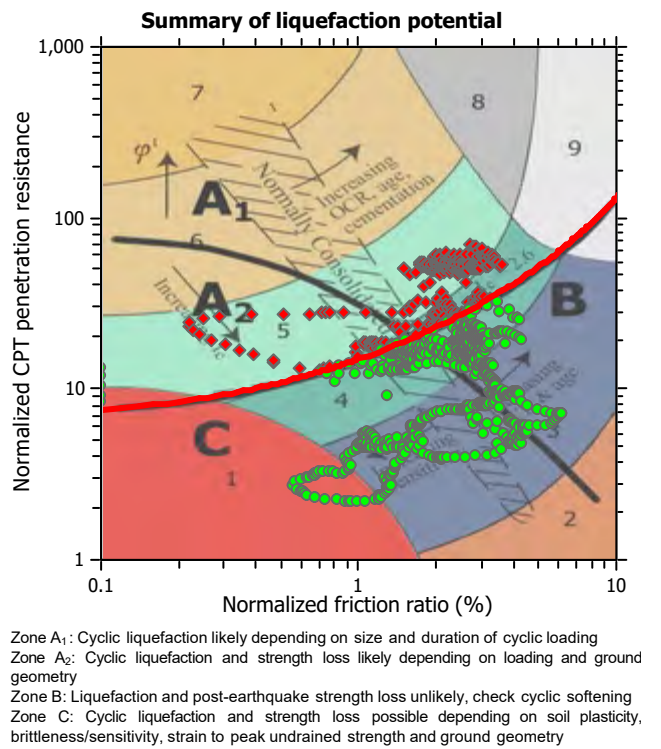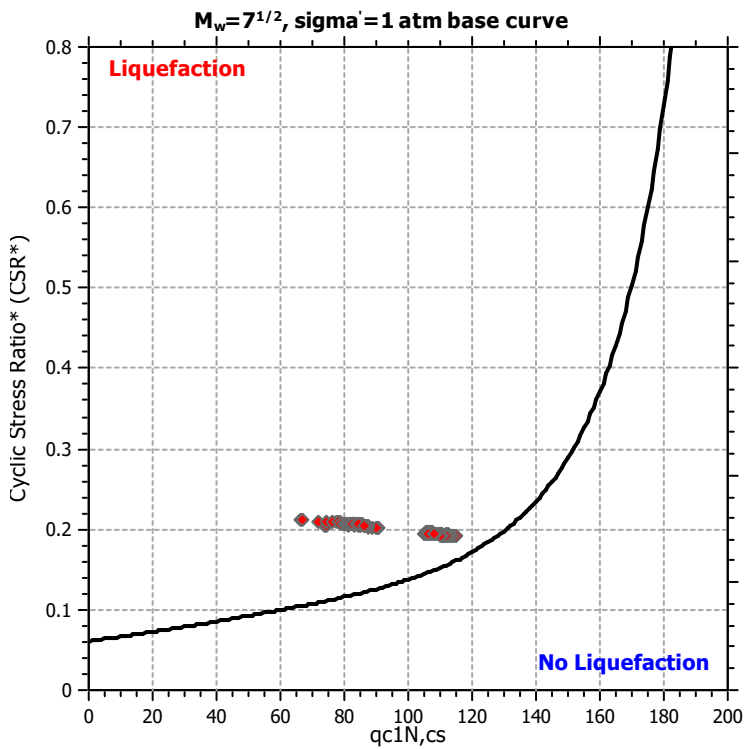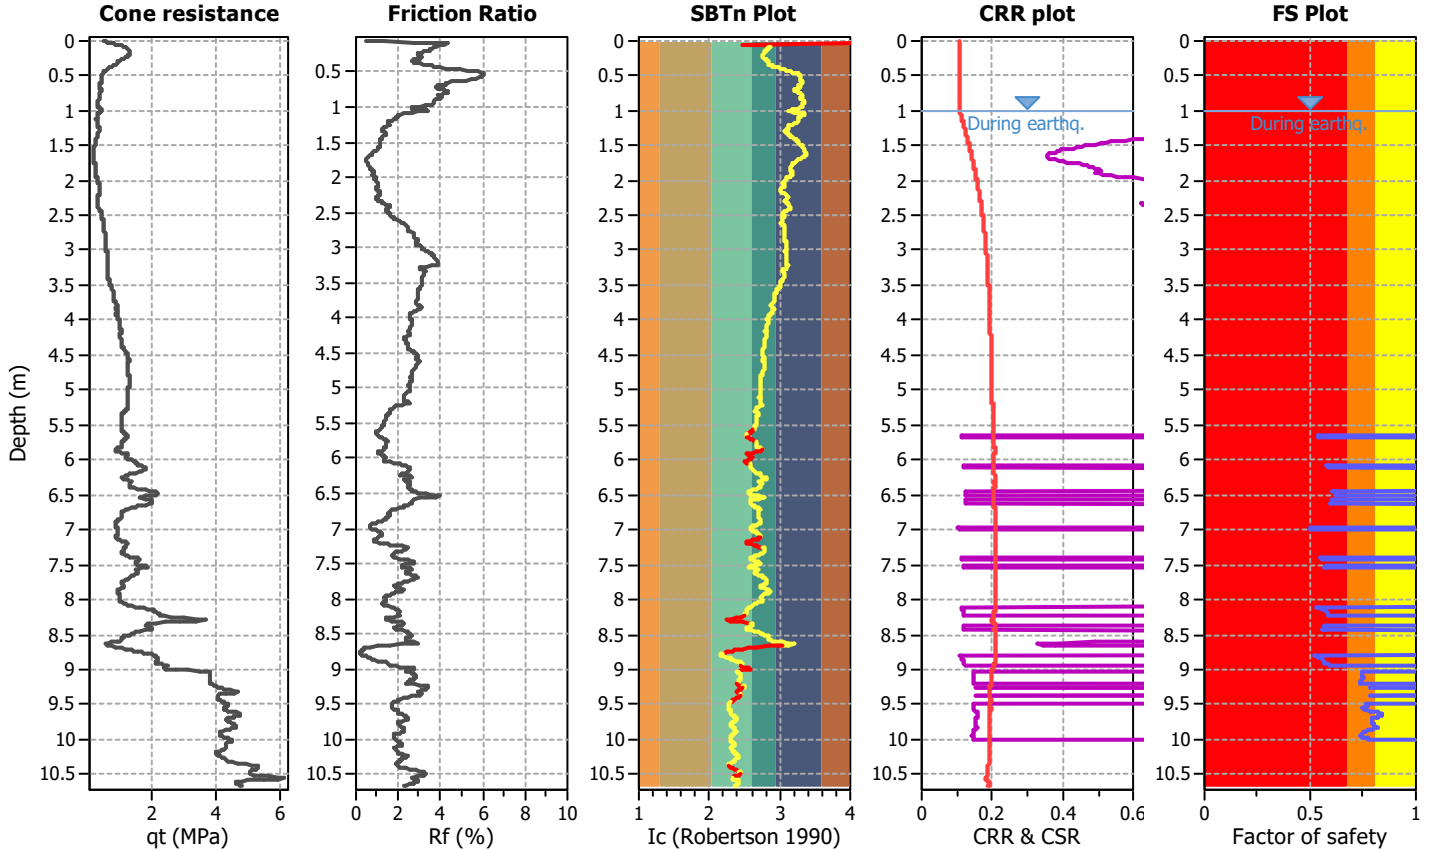

CPT basic interpretation plots

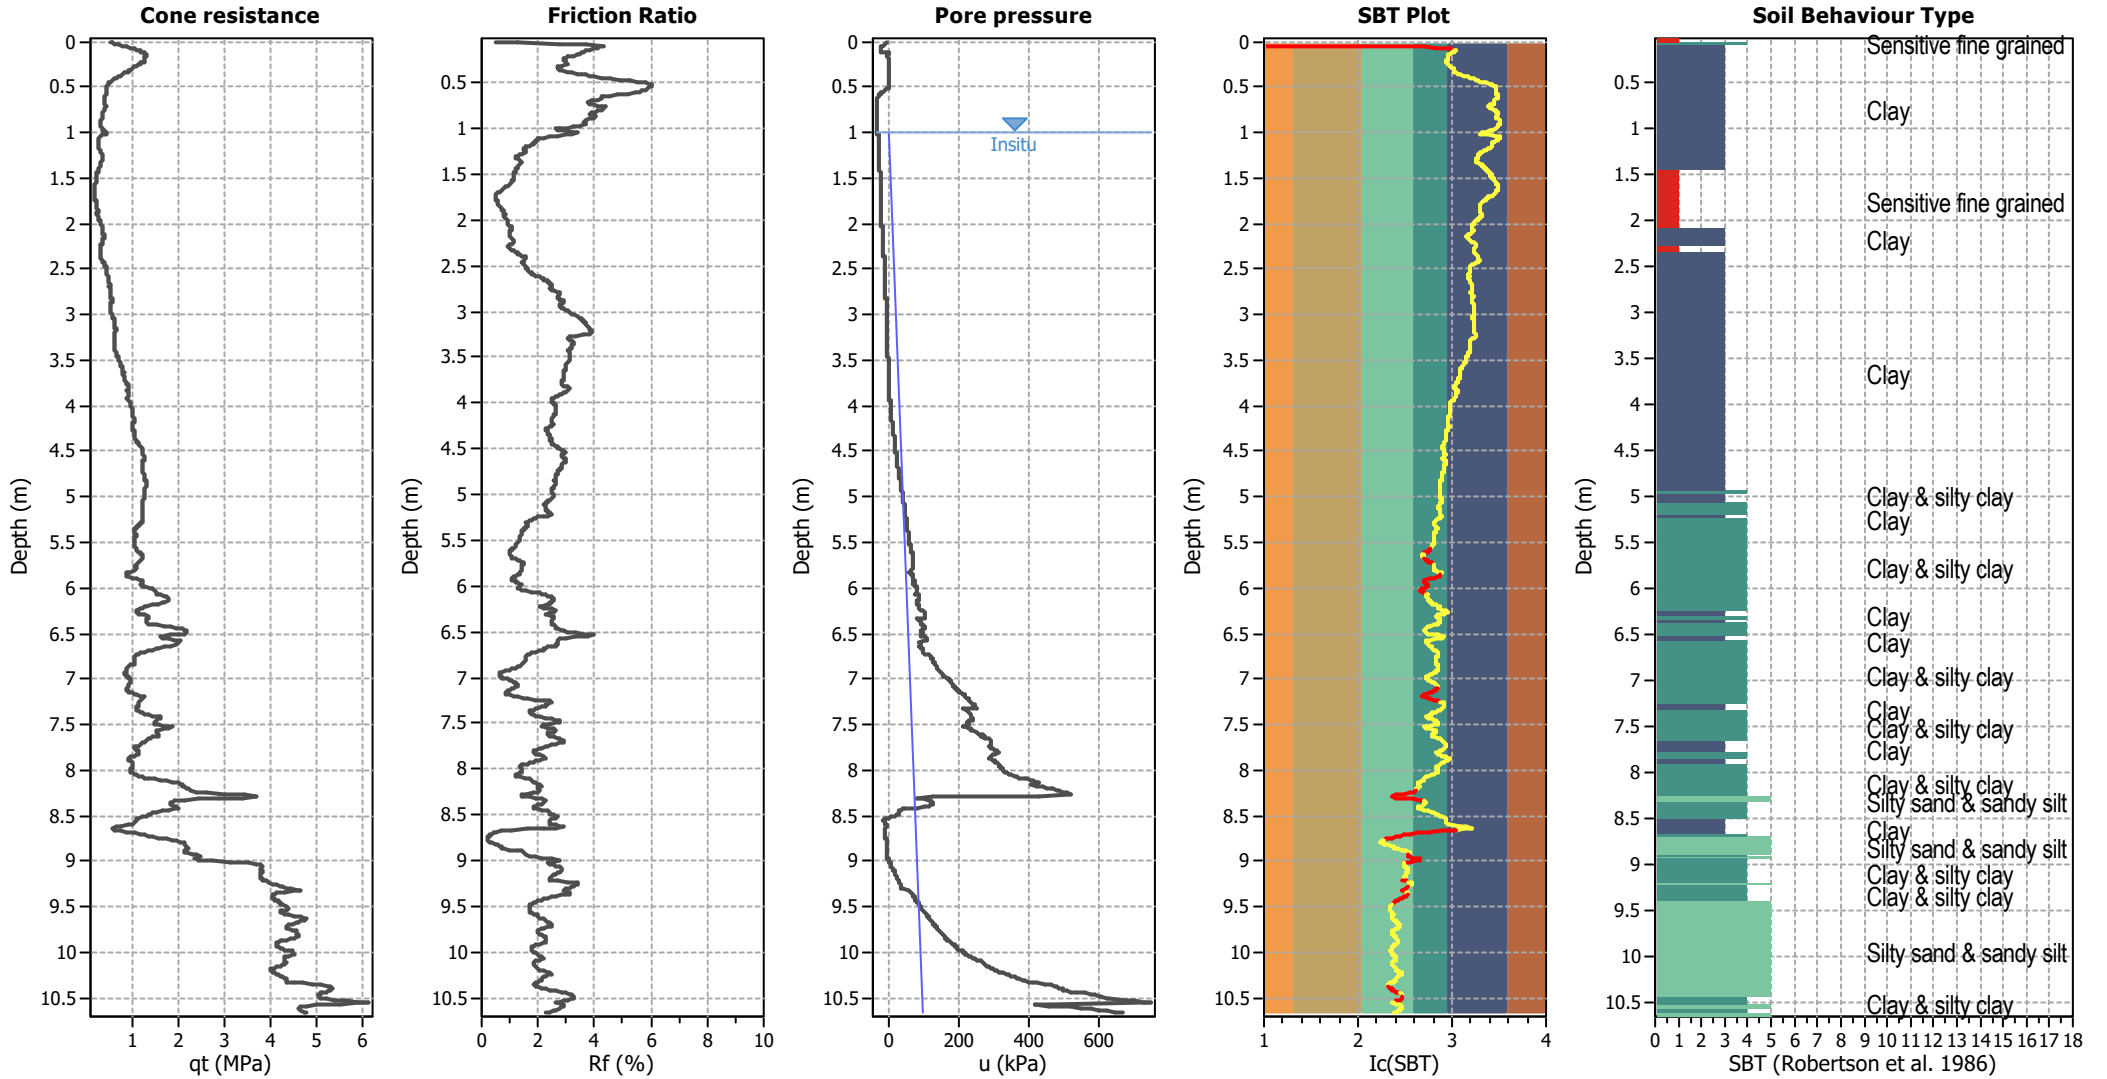


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

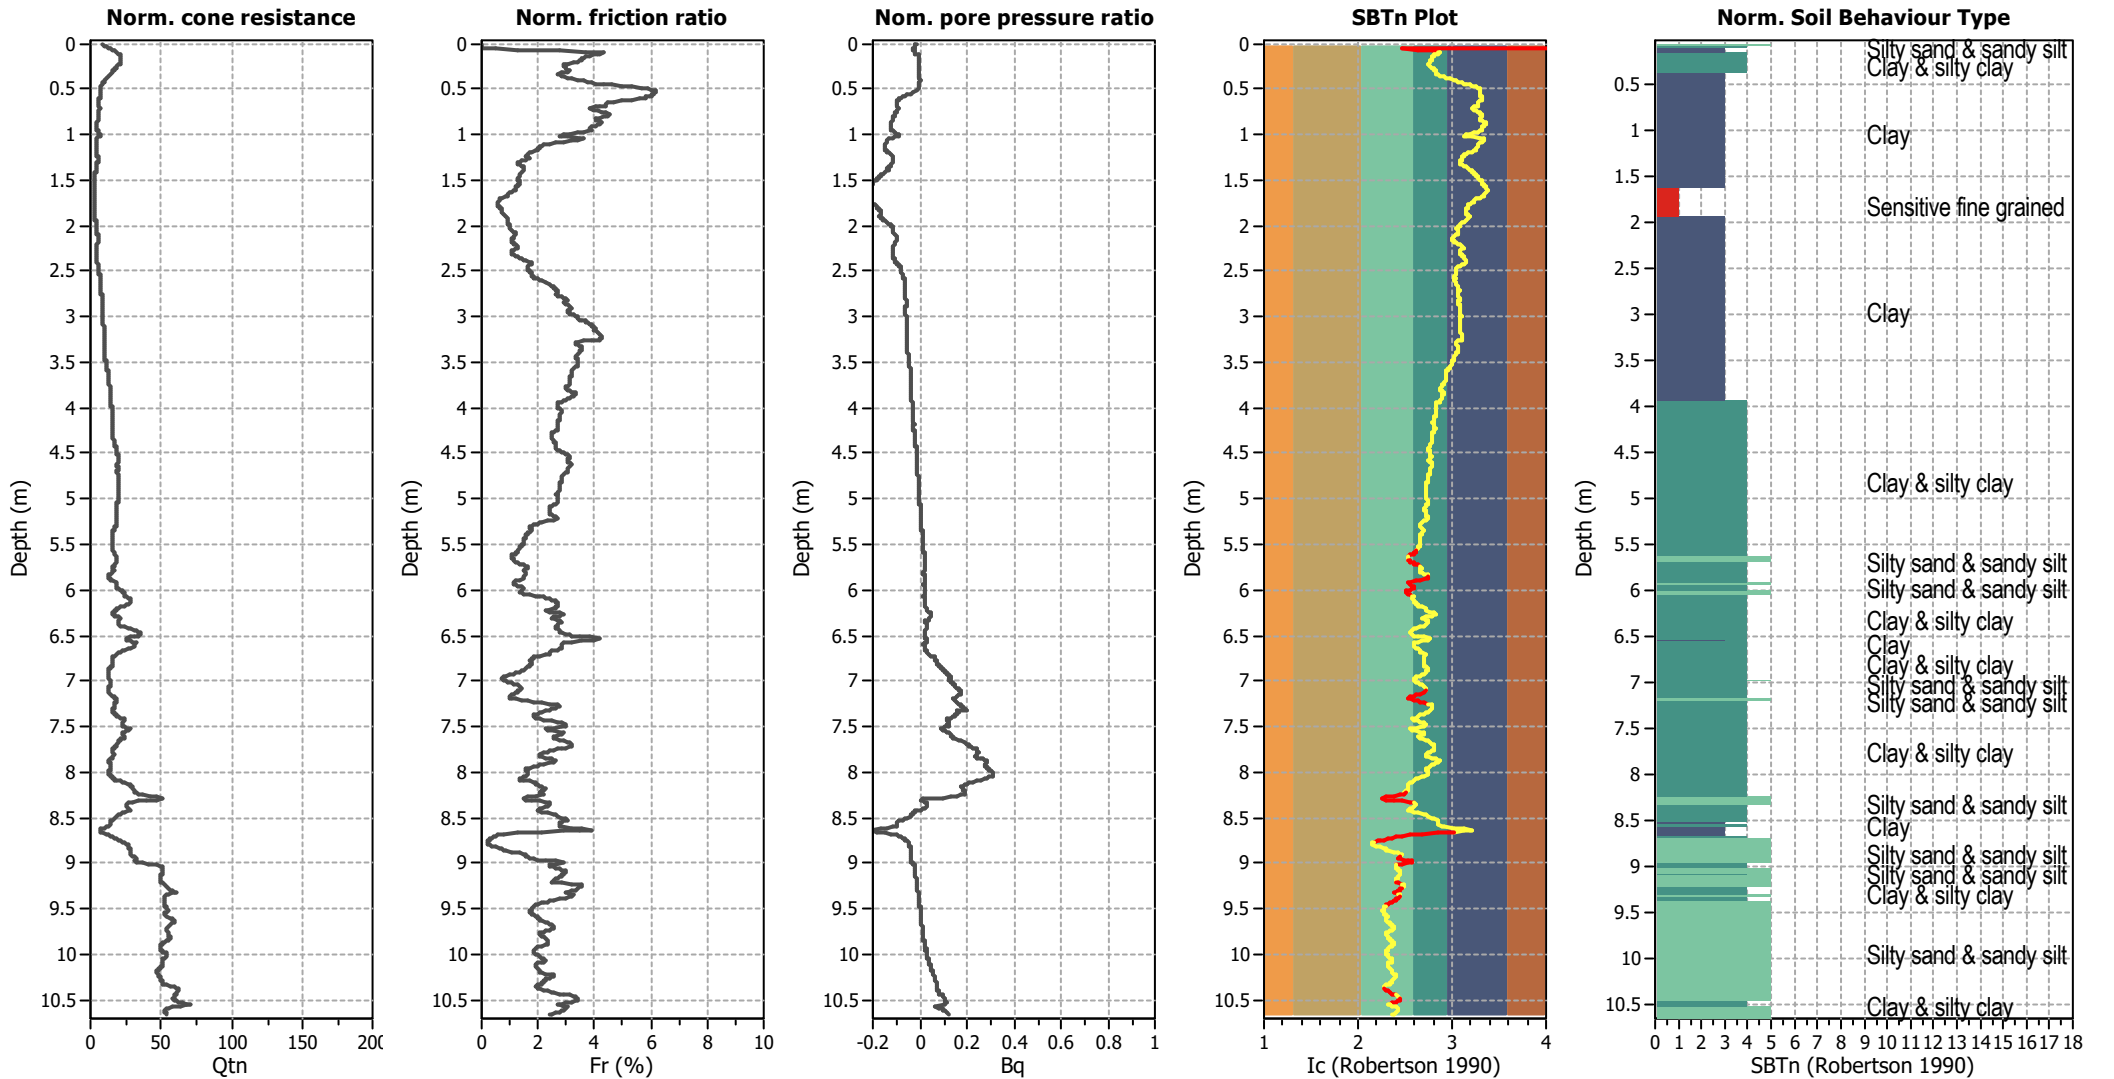


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

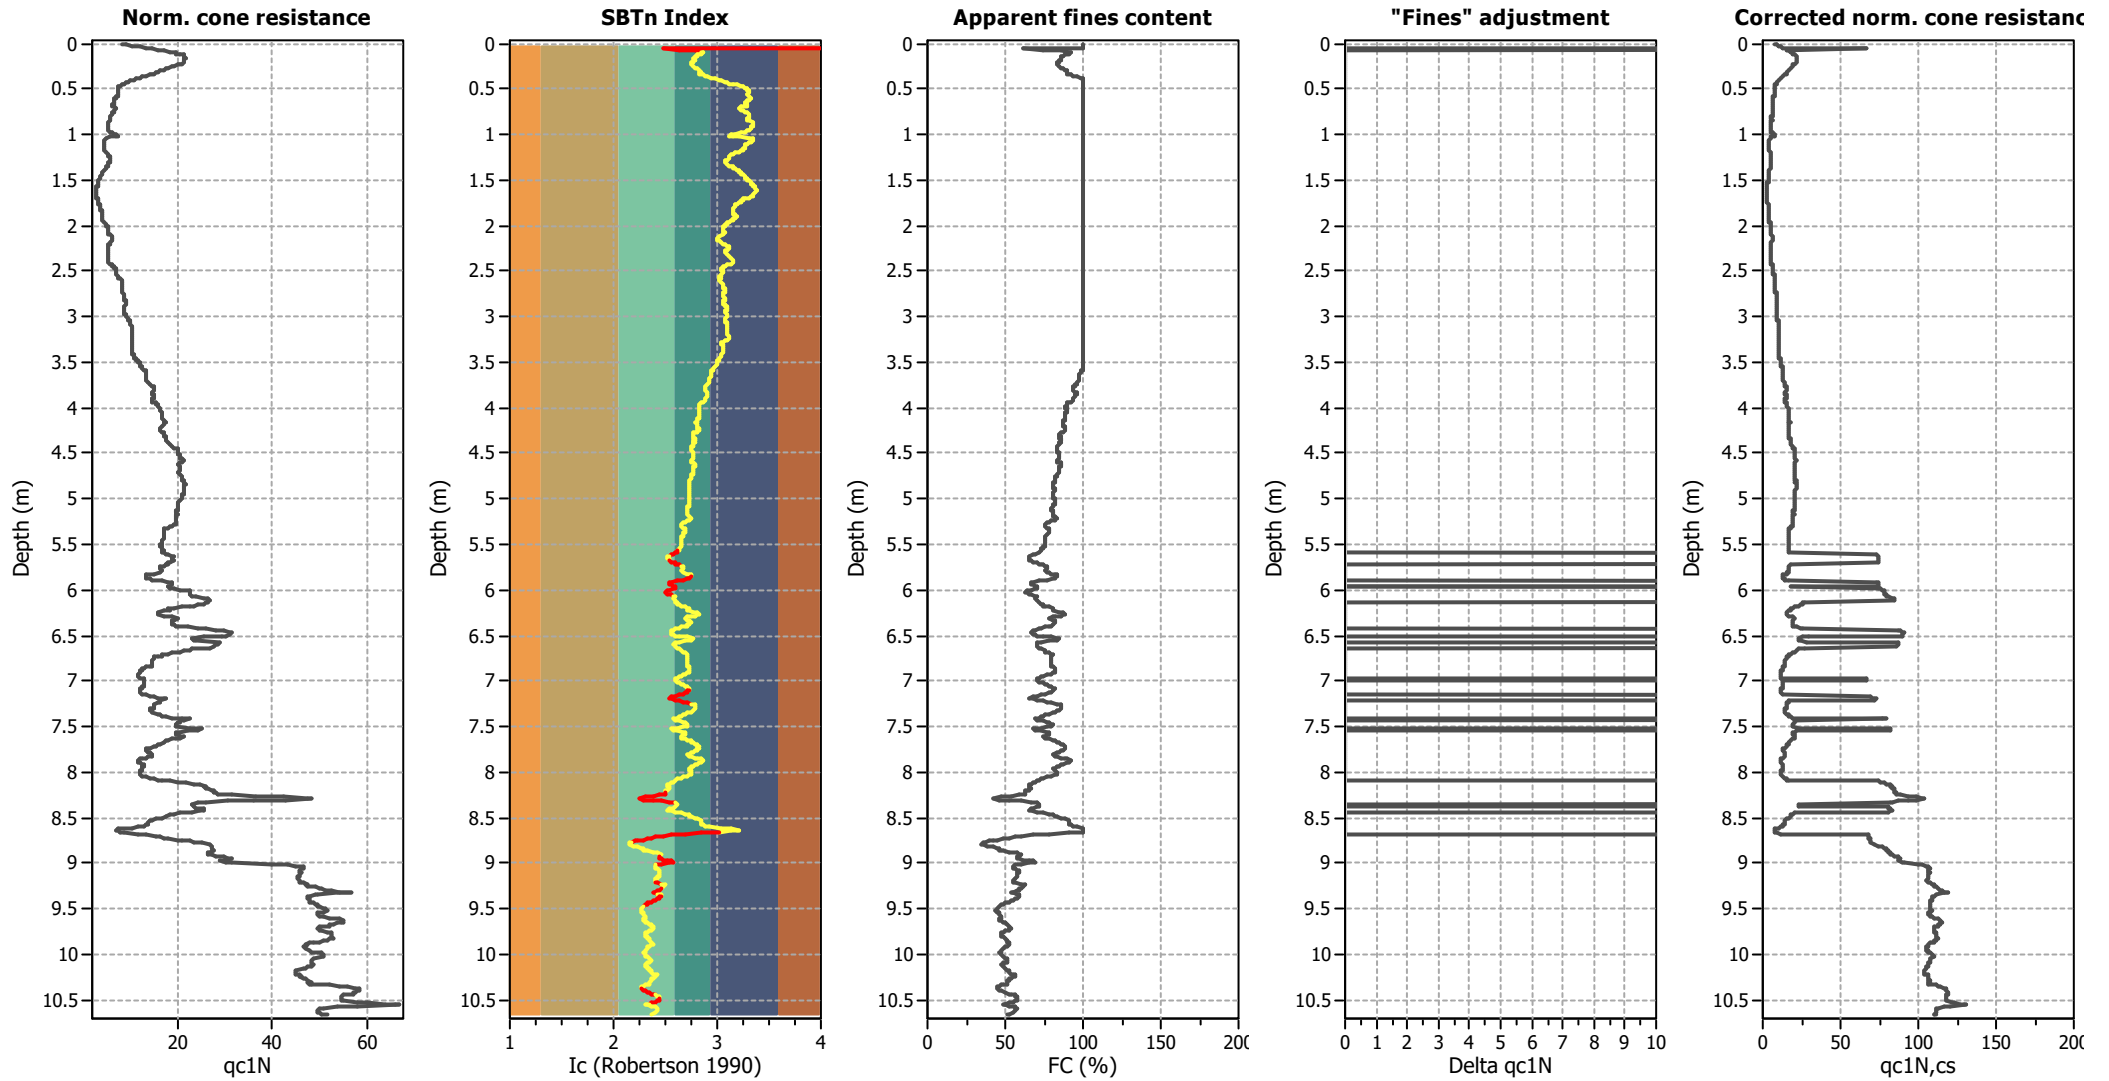

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

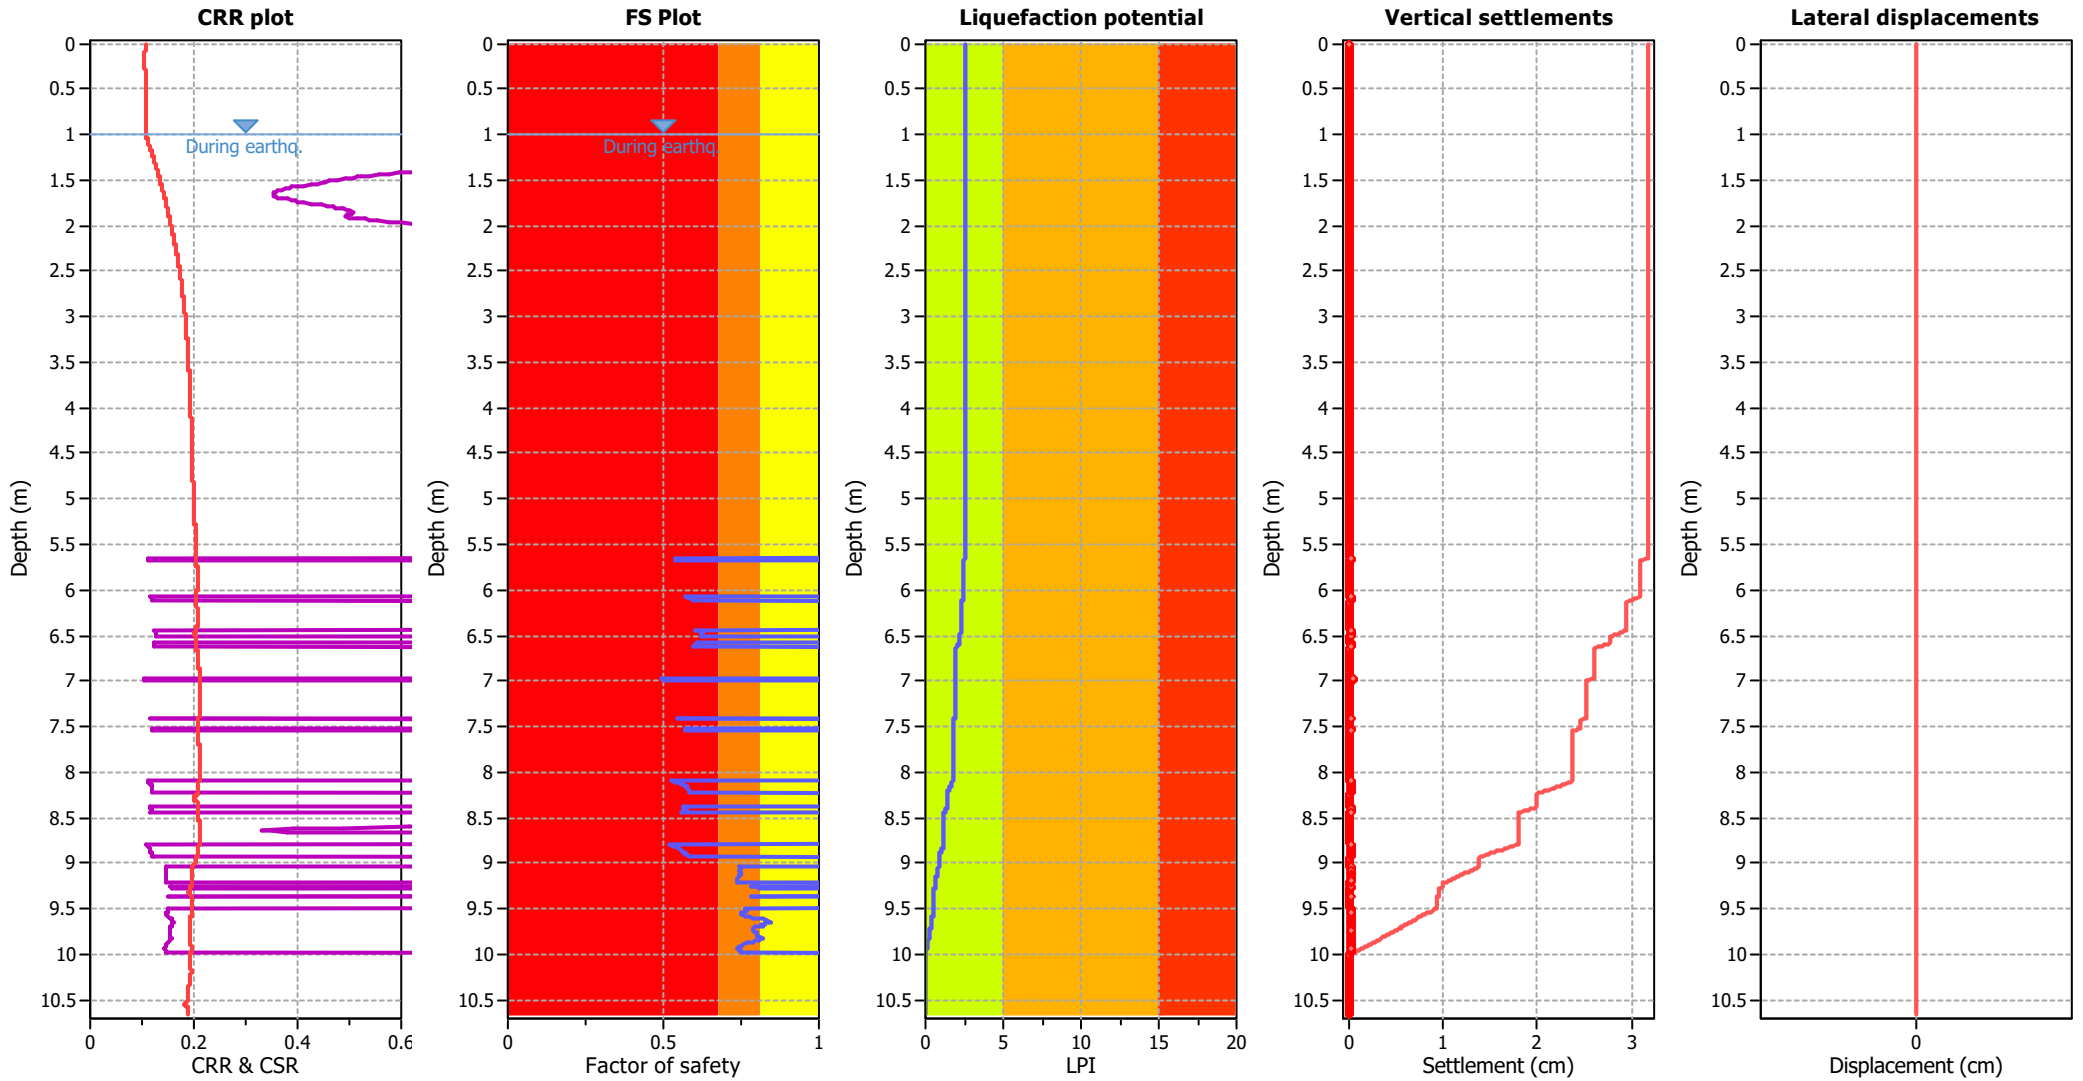

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

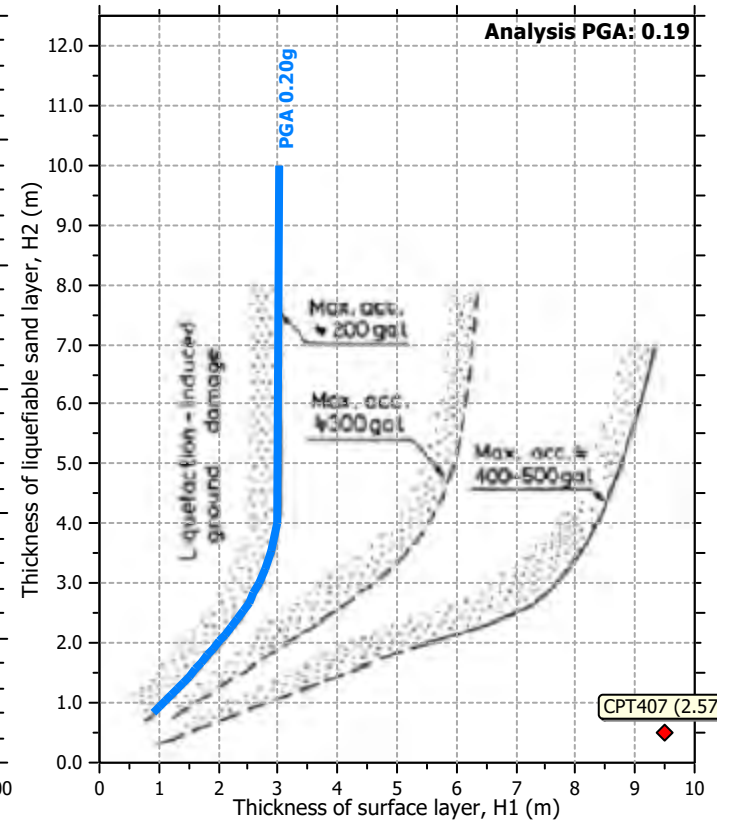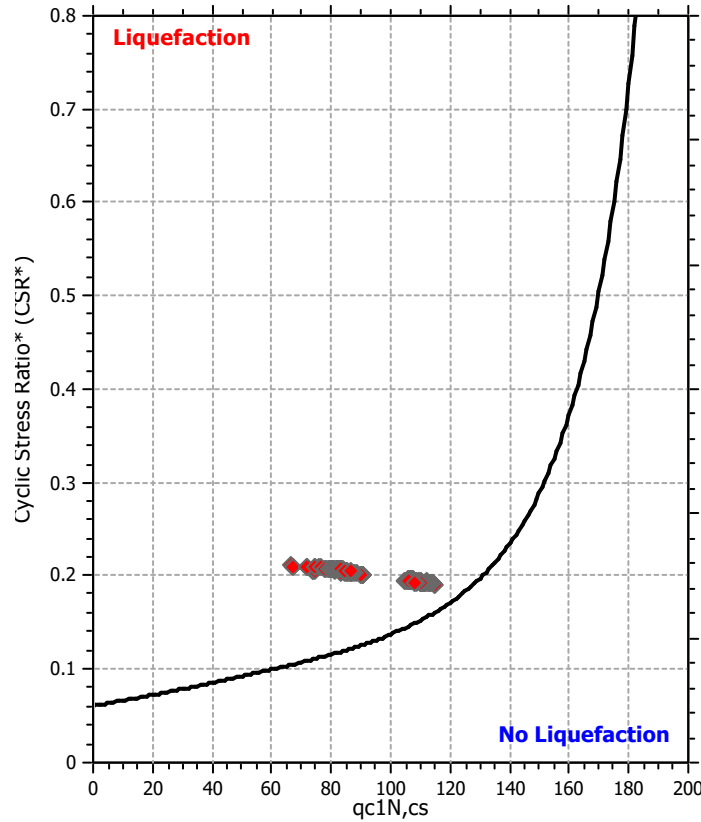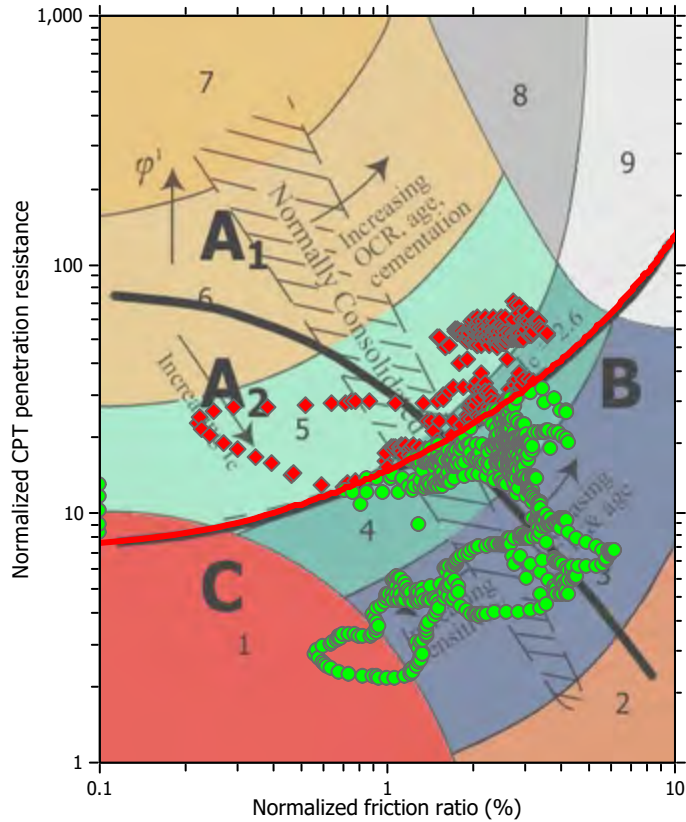

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

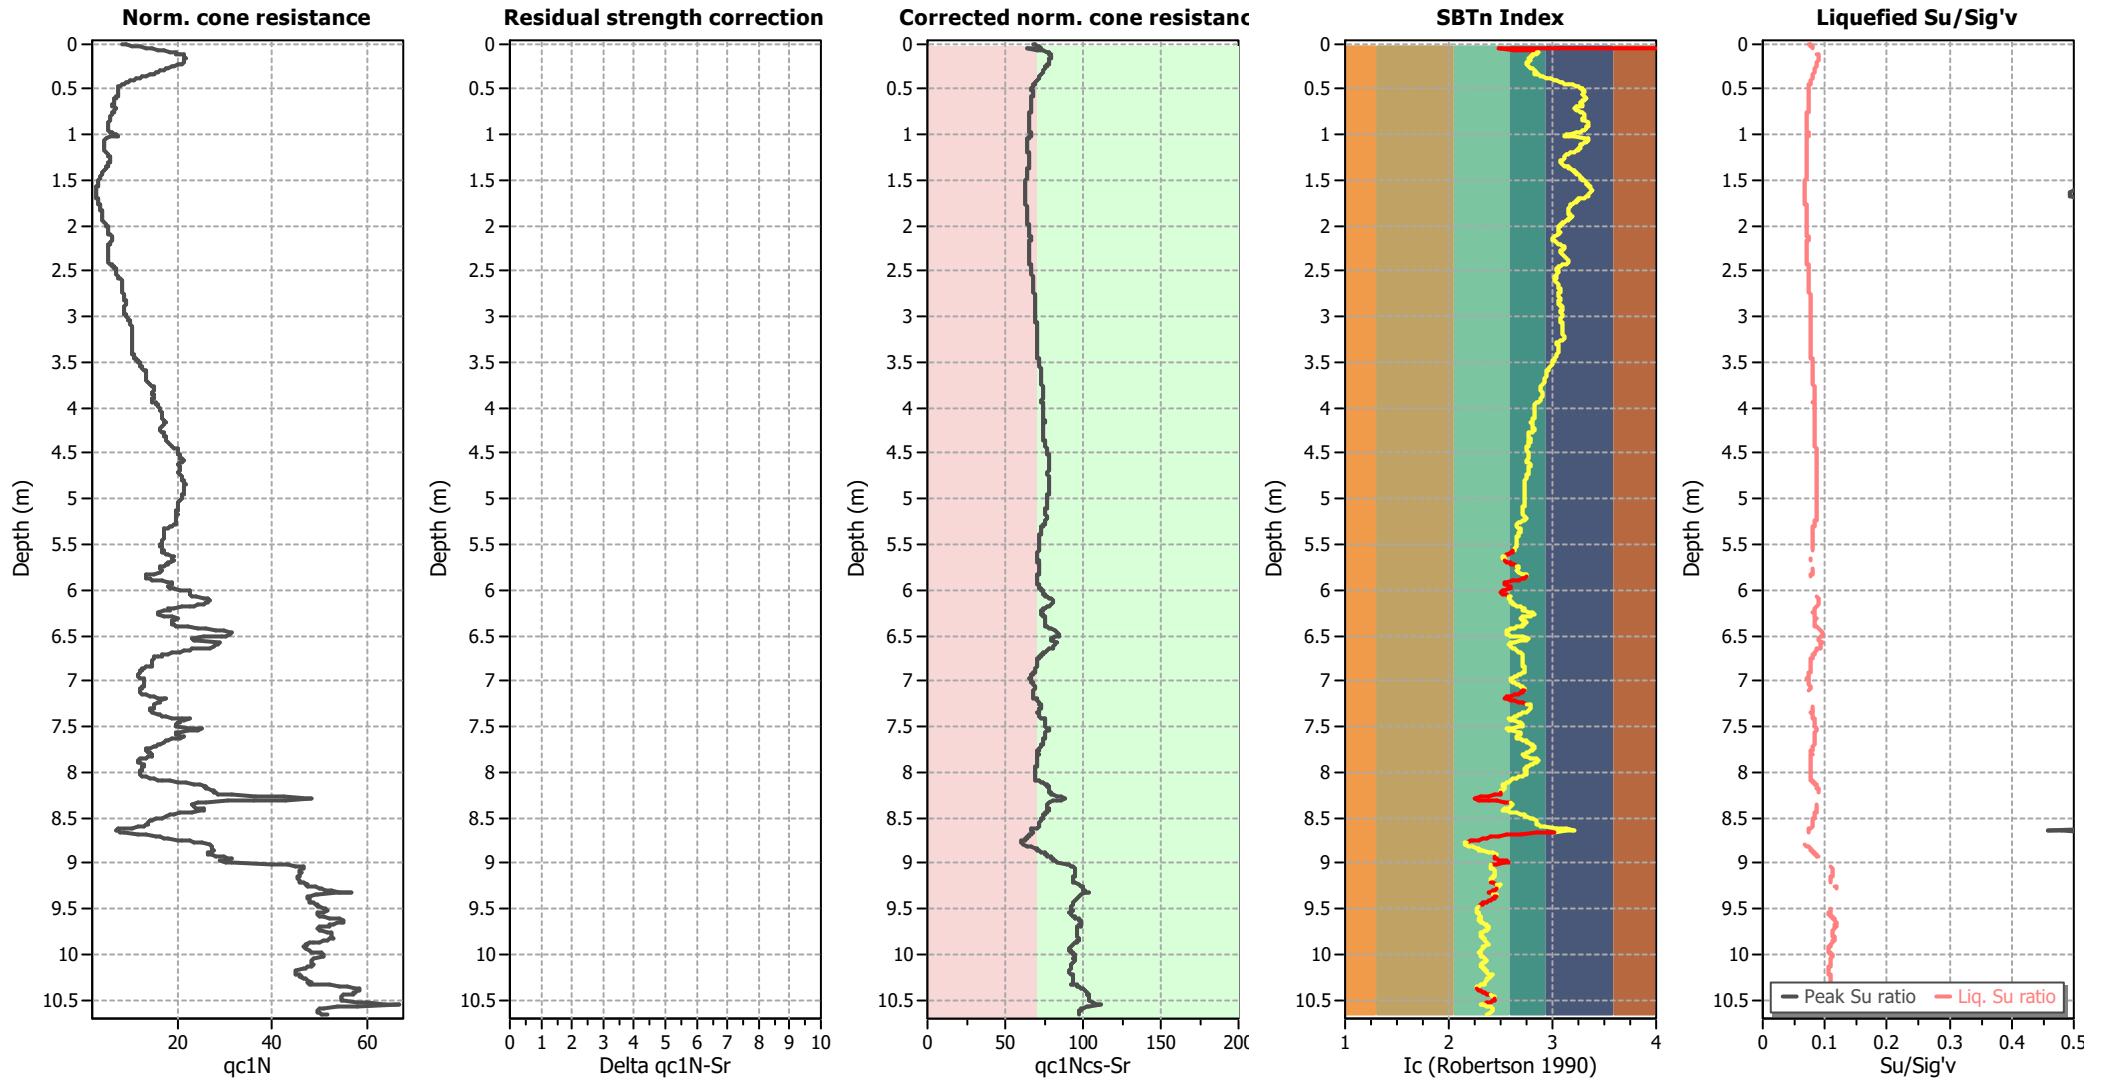

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

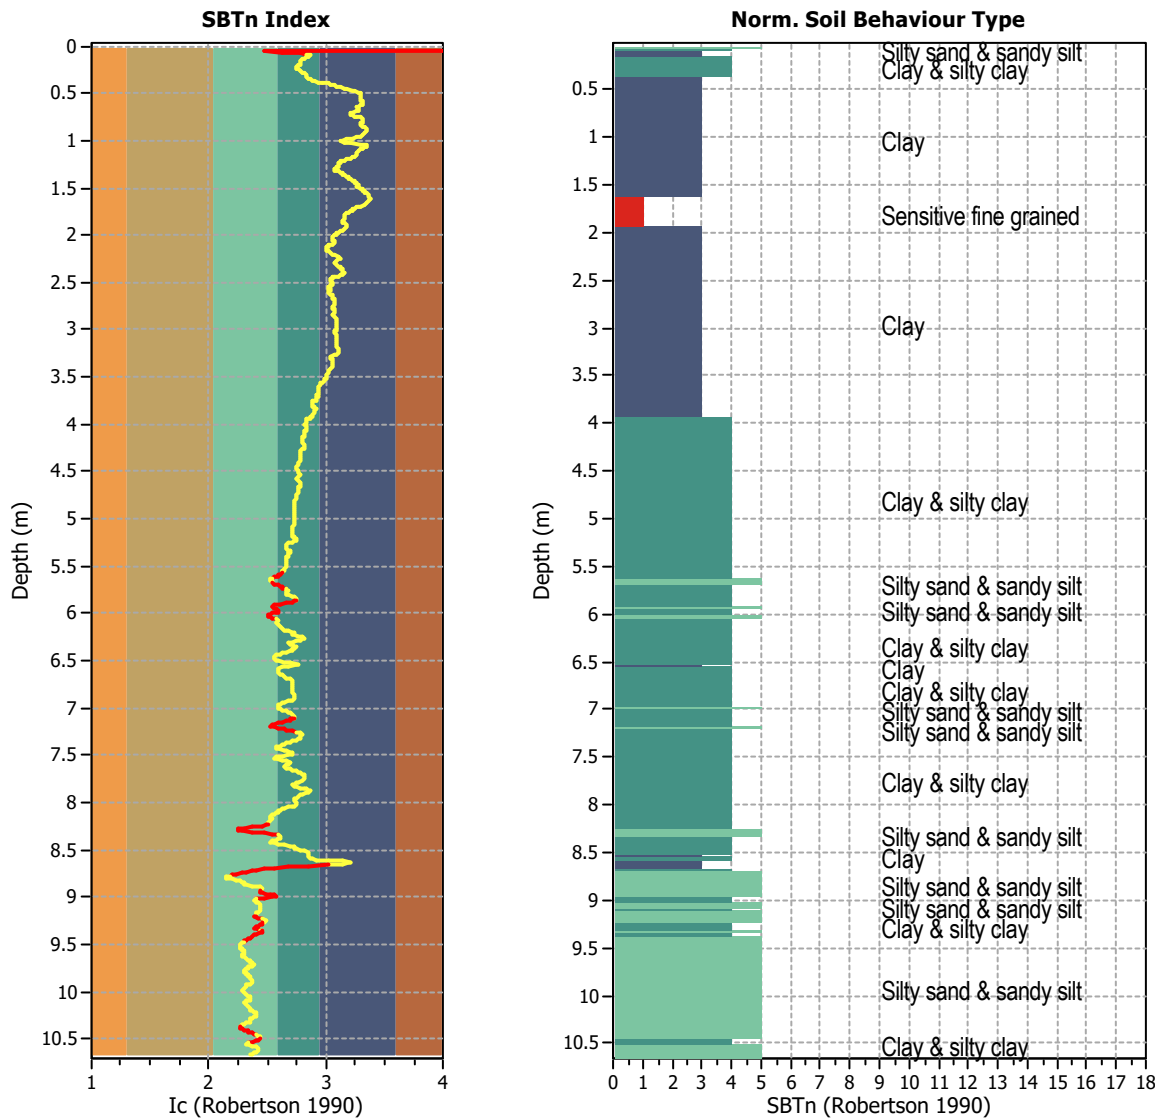


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1066
 Total points excluded: 131
 Exclusion percentage: 12.29%
 Number of layers detected: 20


Estimation of post-earthquake settlements

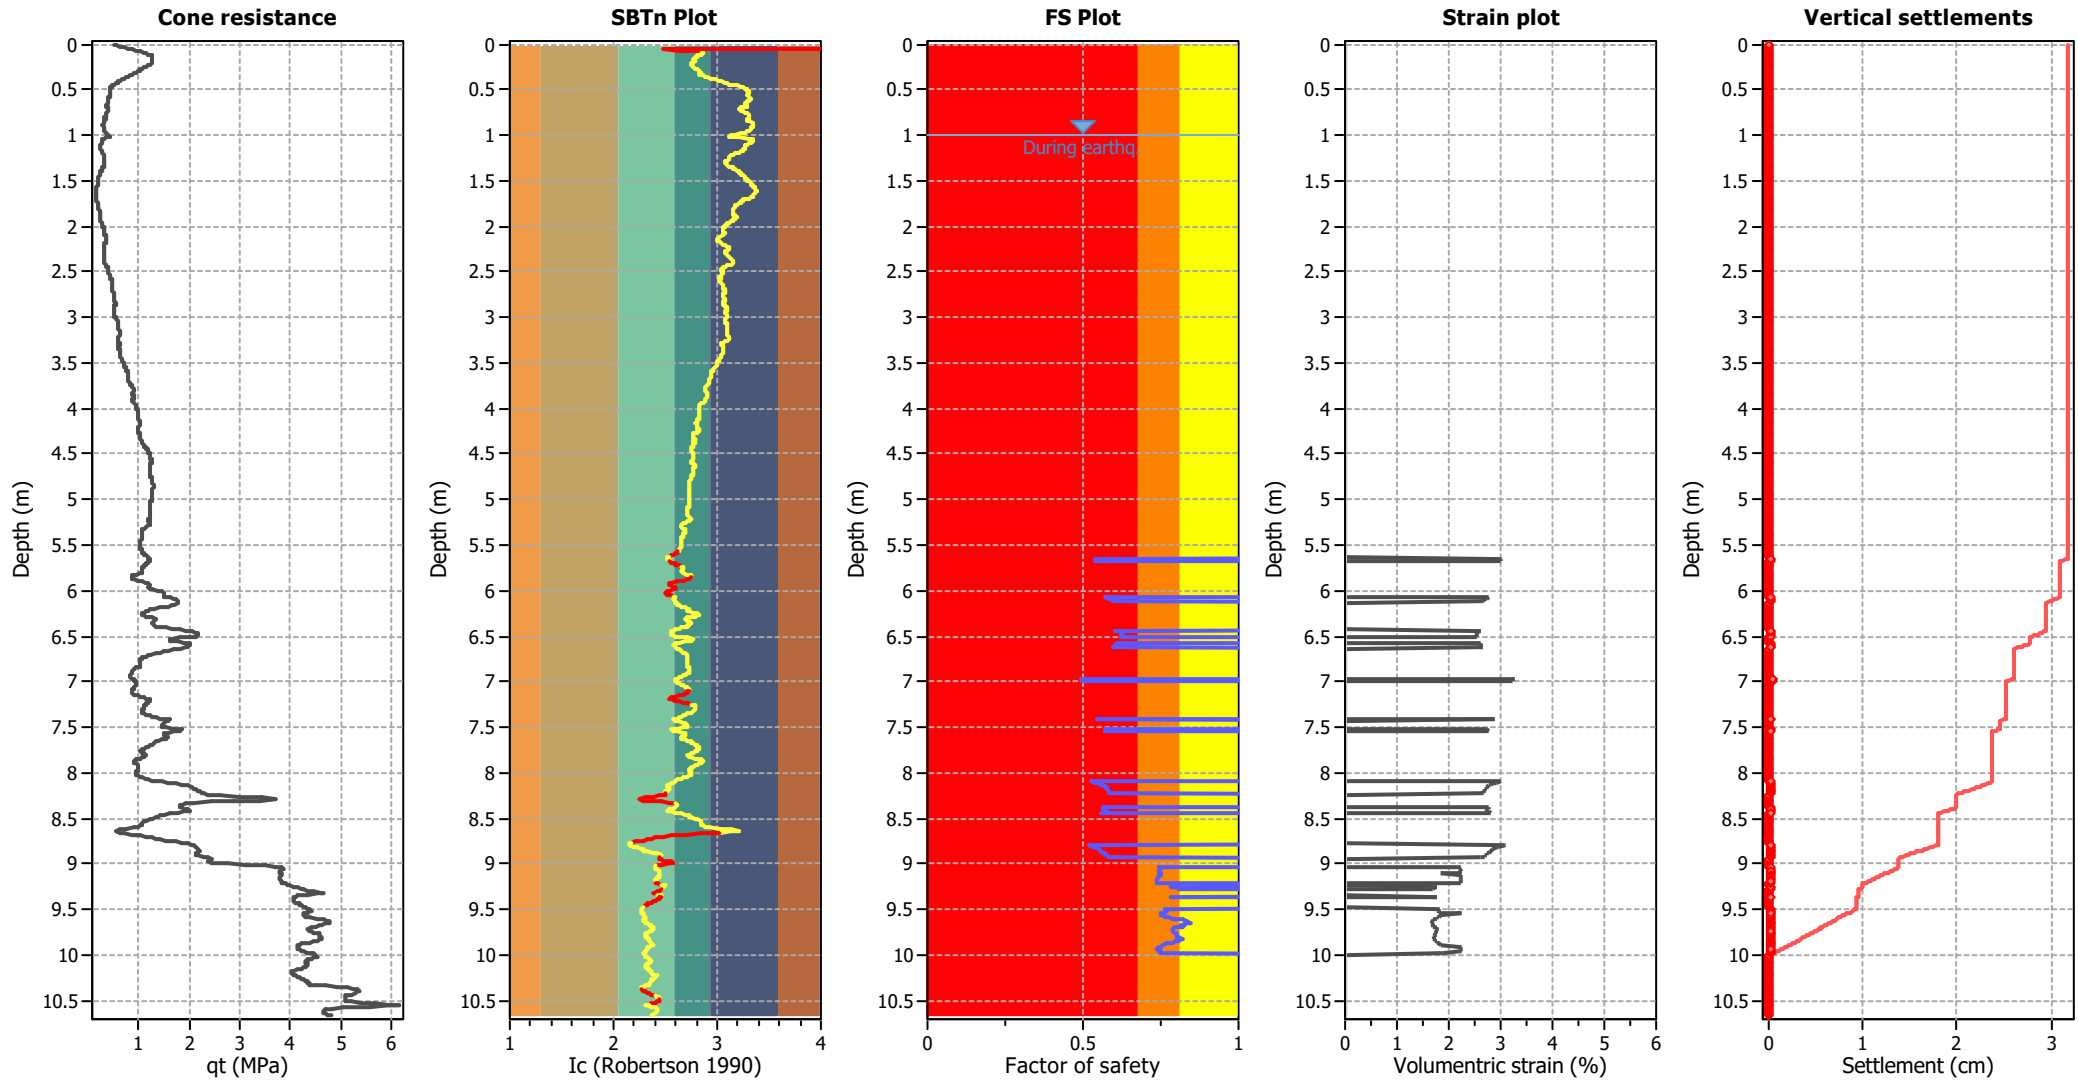

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

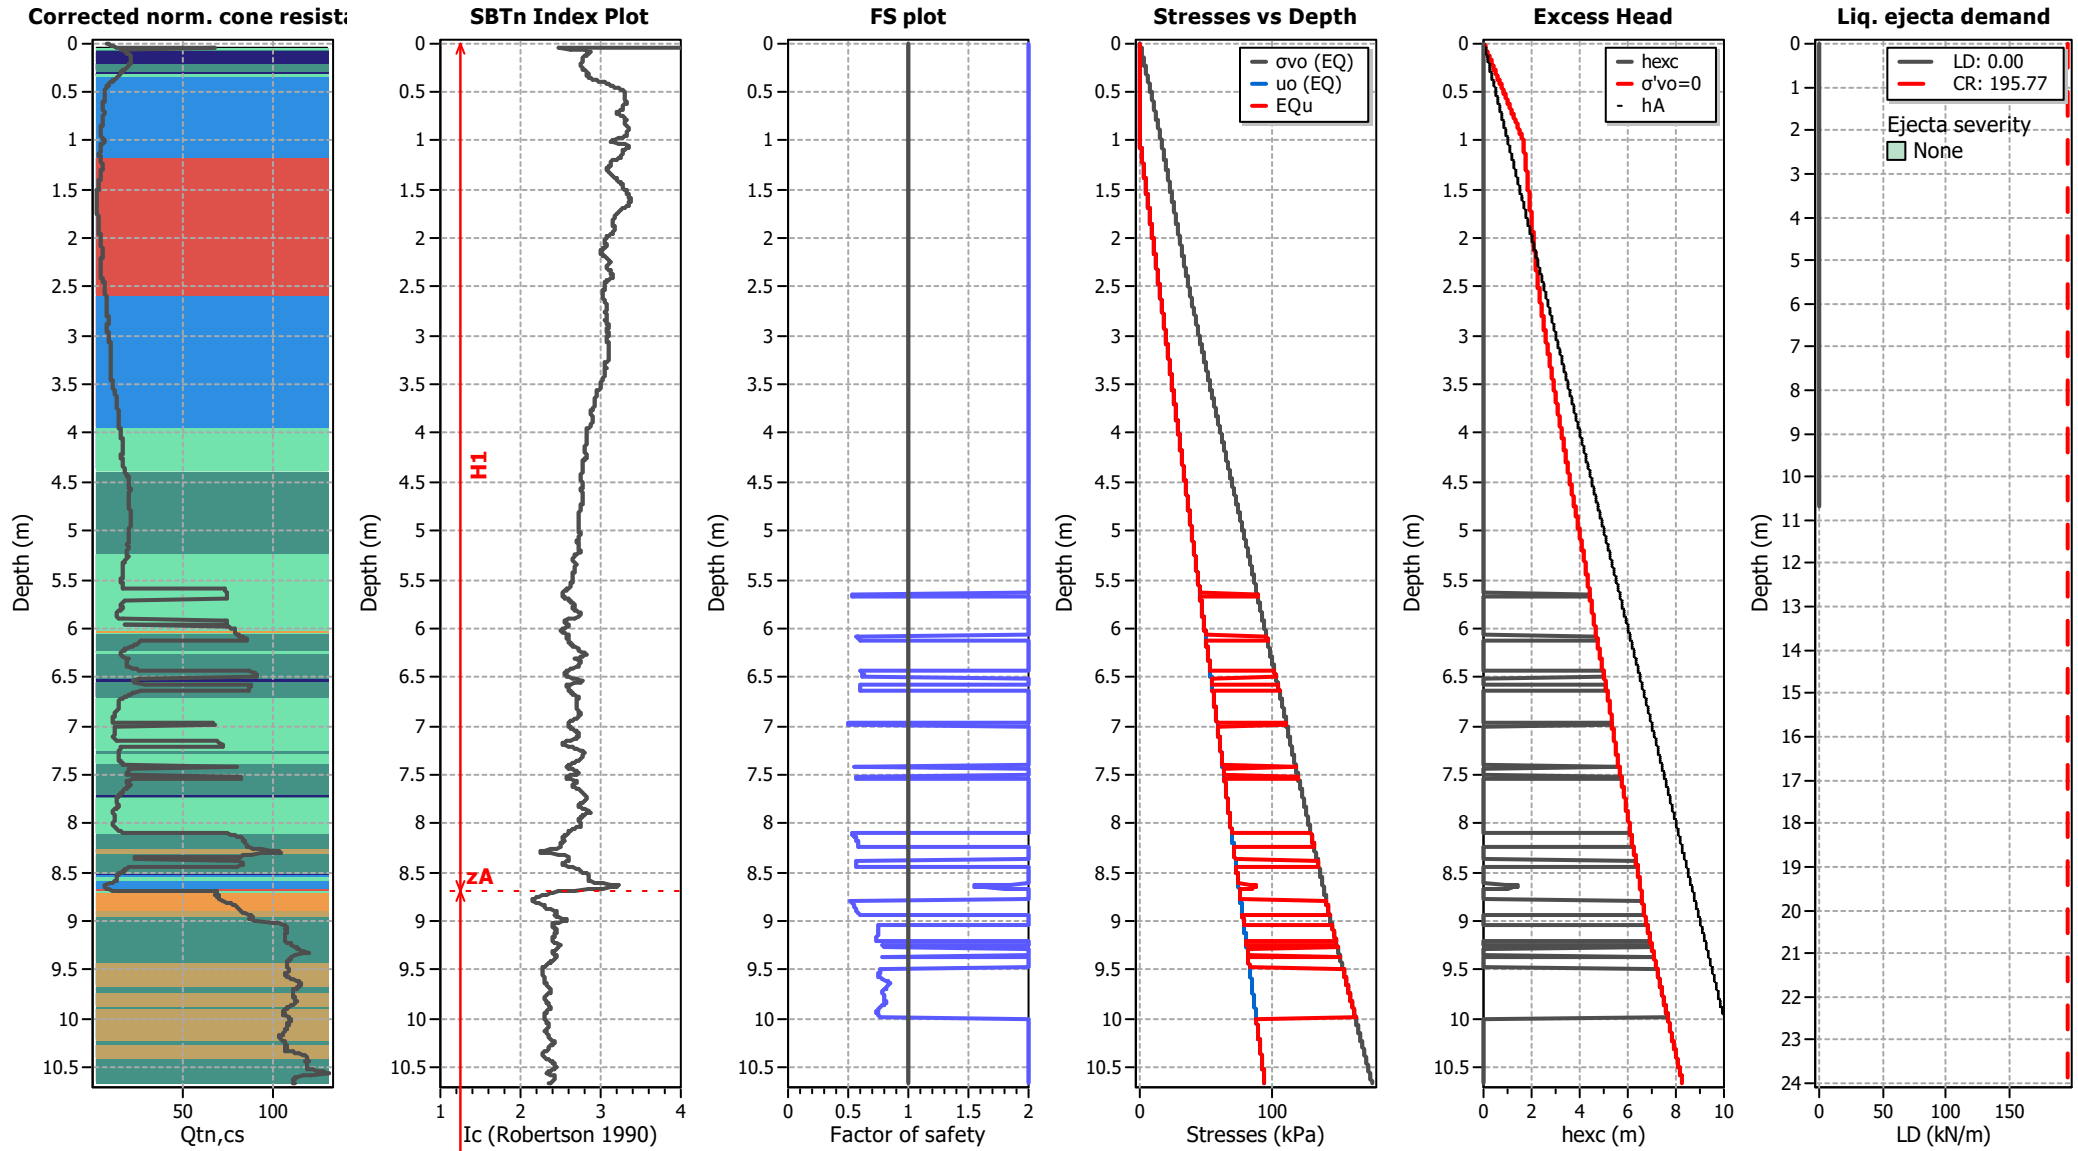

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT408

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sands only
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

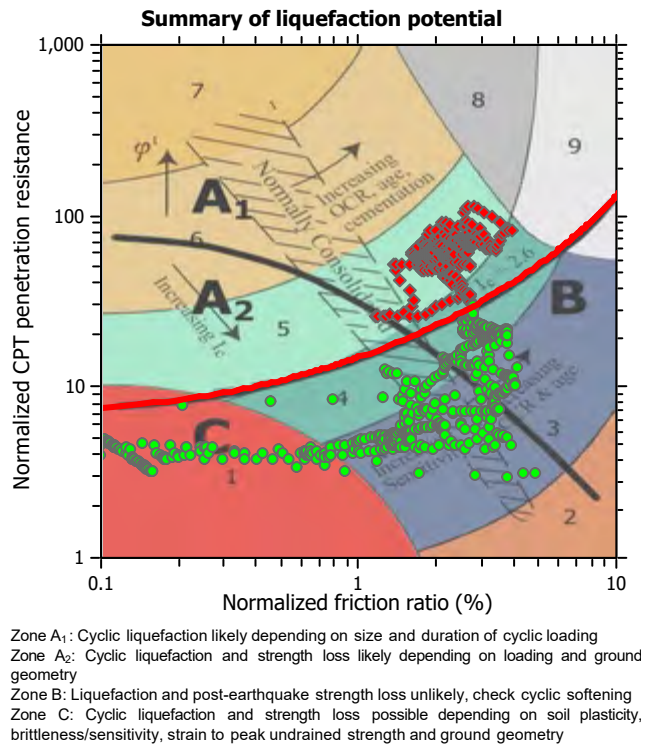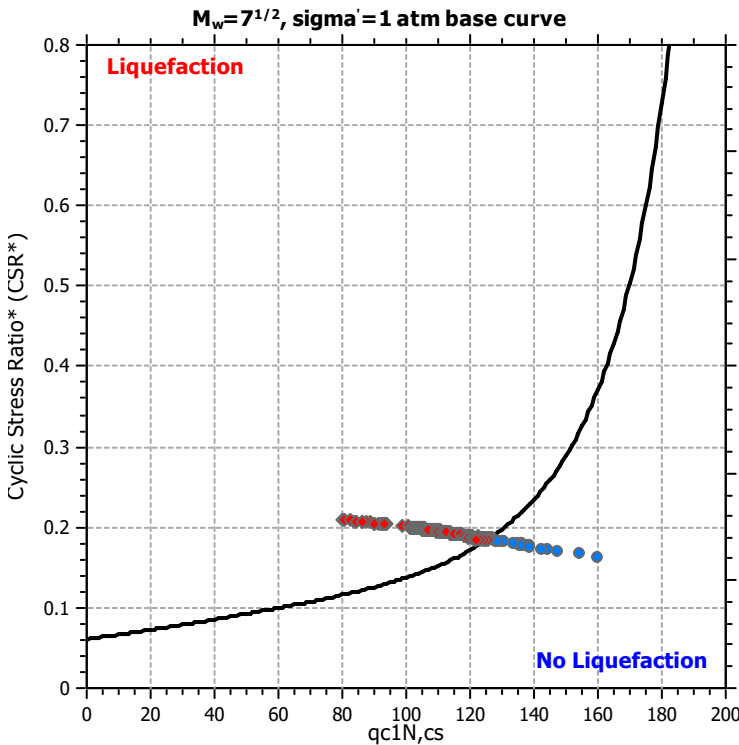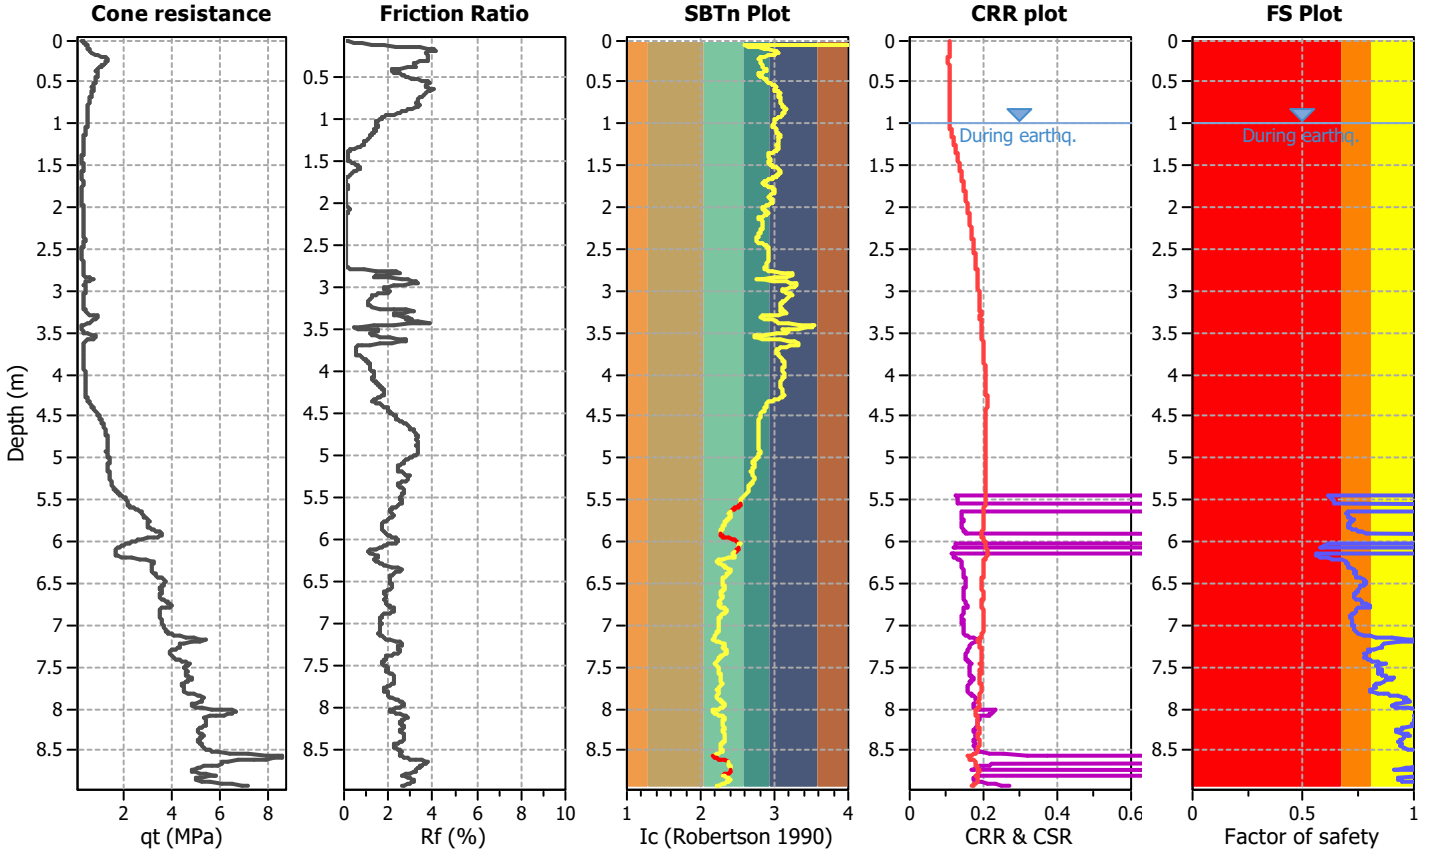

CPT basic interpretation plots

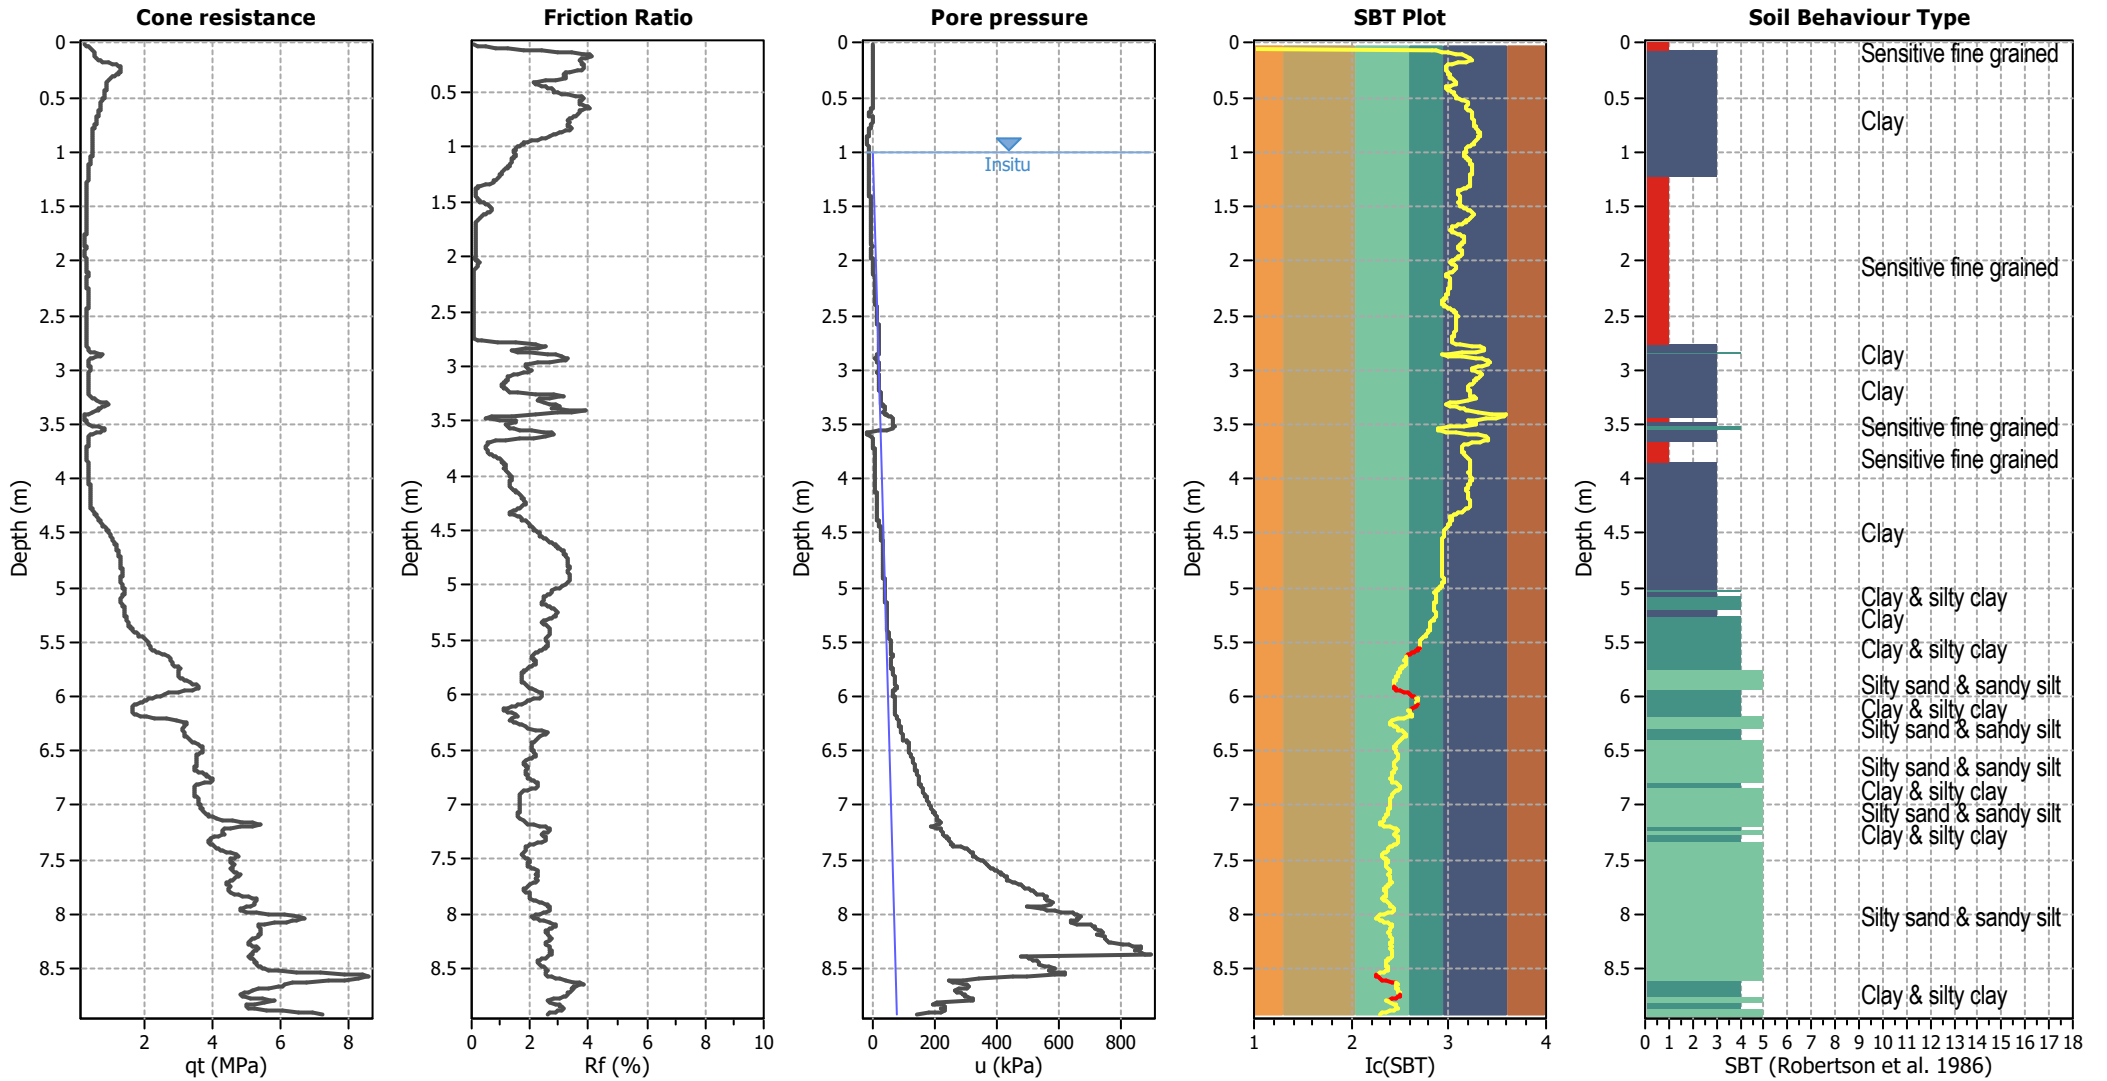


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

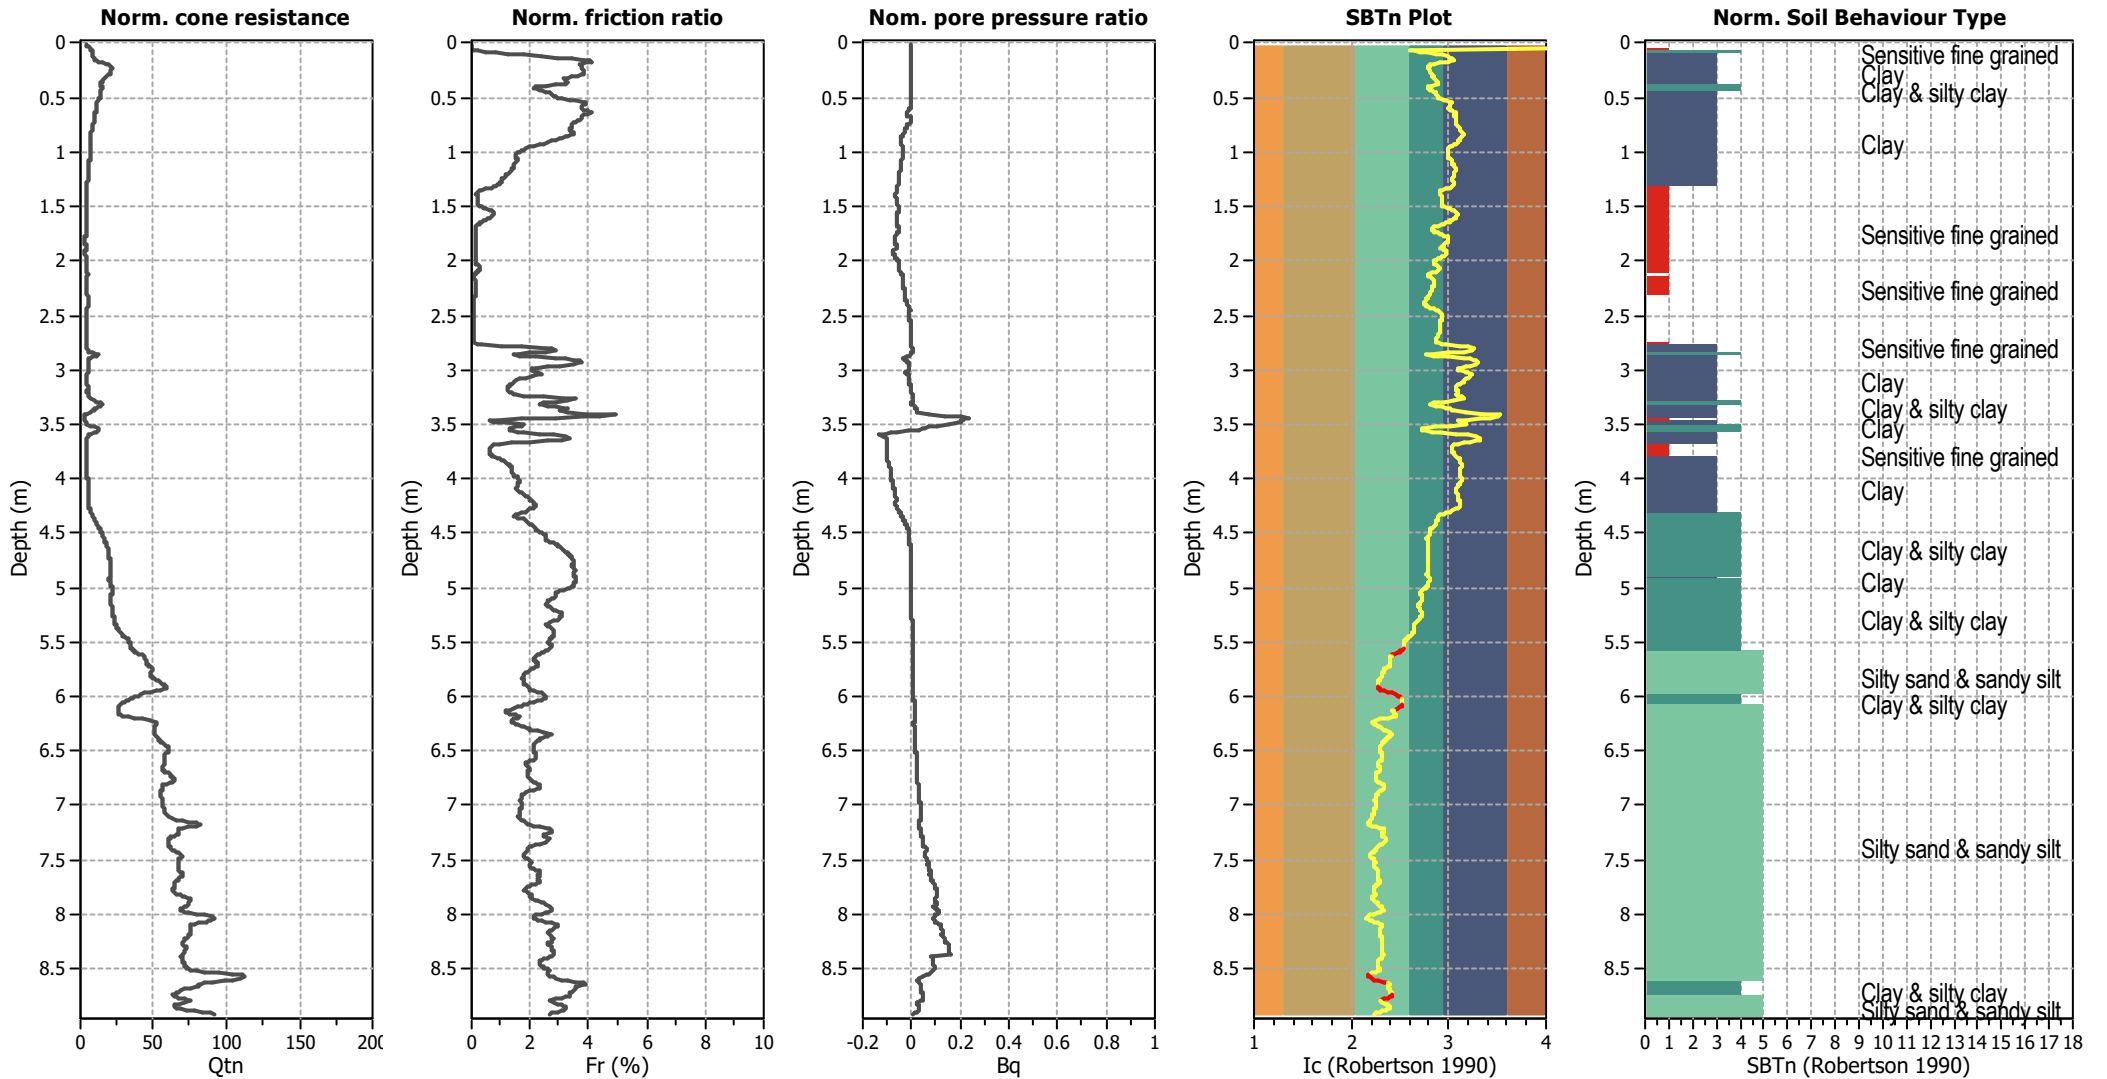


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

■ 1. Sensitive fine grained	■ 4. Clayey silt to silty	■ 7. Gravely sand to sand
■ 2. Organic material	■ 5. Silty sand to sandy silt	■ 8. Very stiff sand to
■ 3. Clay to silty clay	■ 6. Clean sand to silty sand	■ 9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

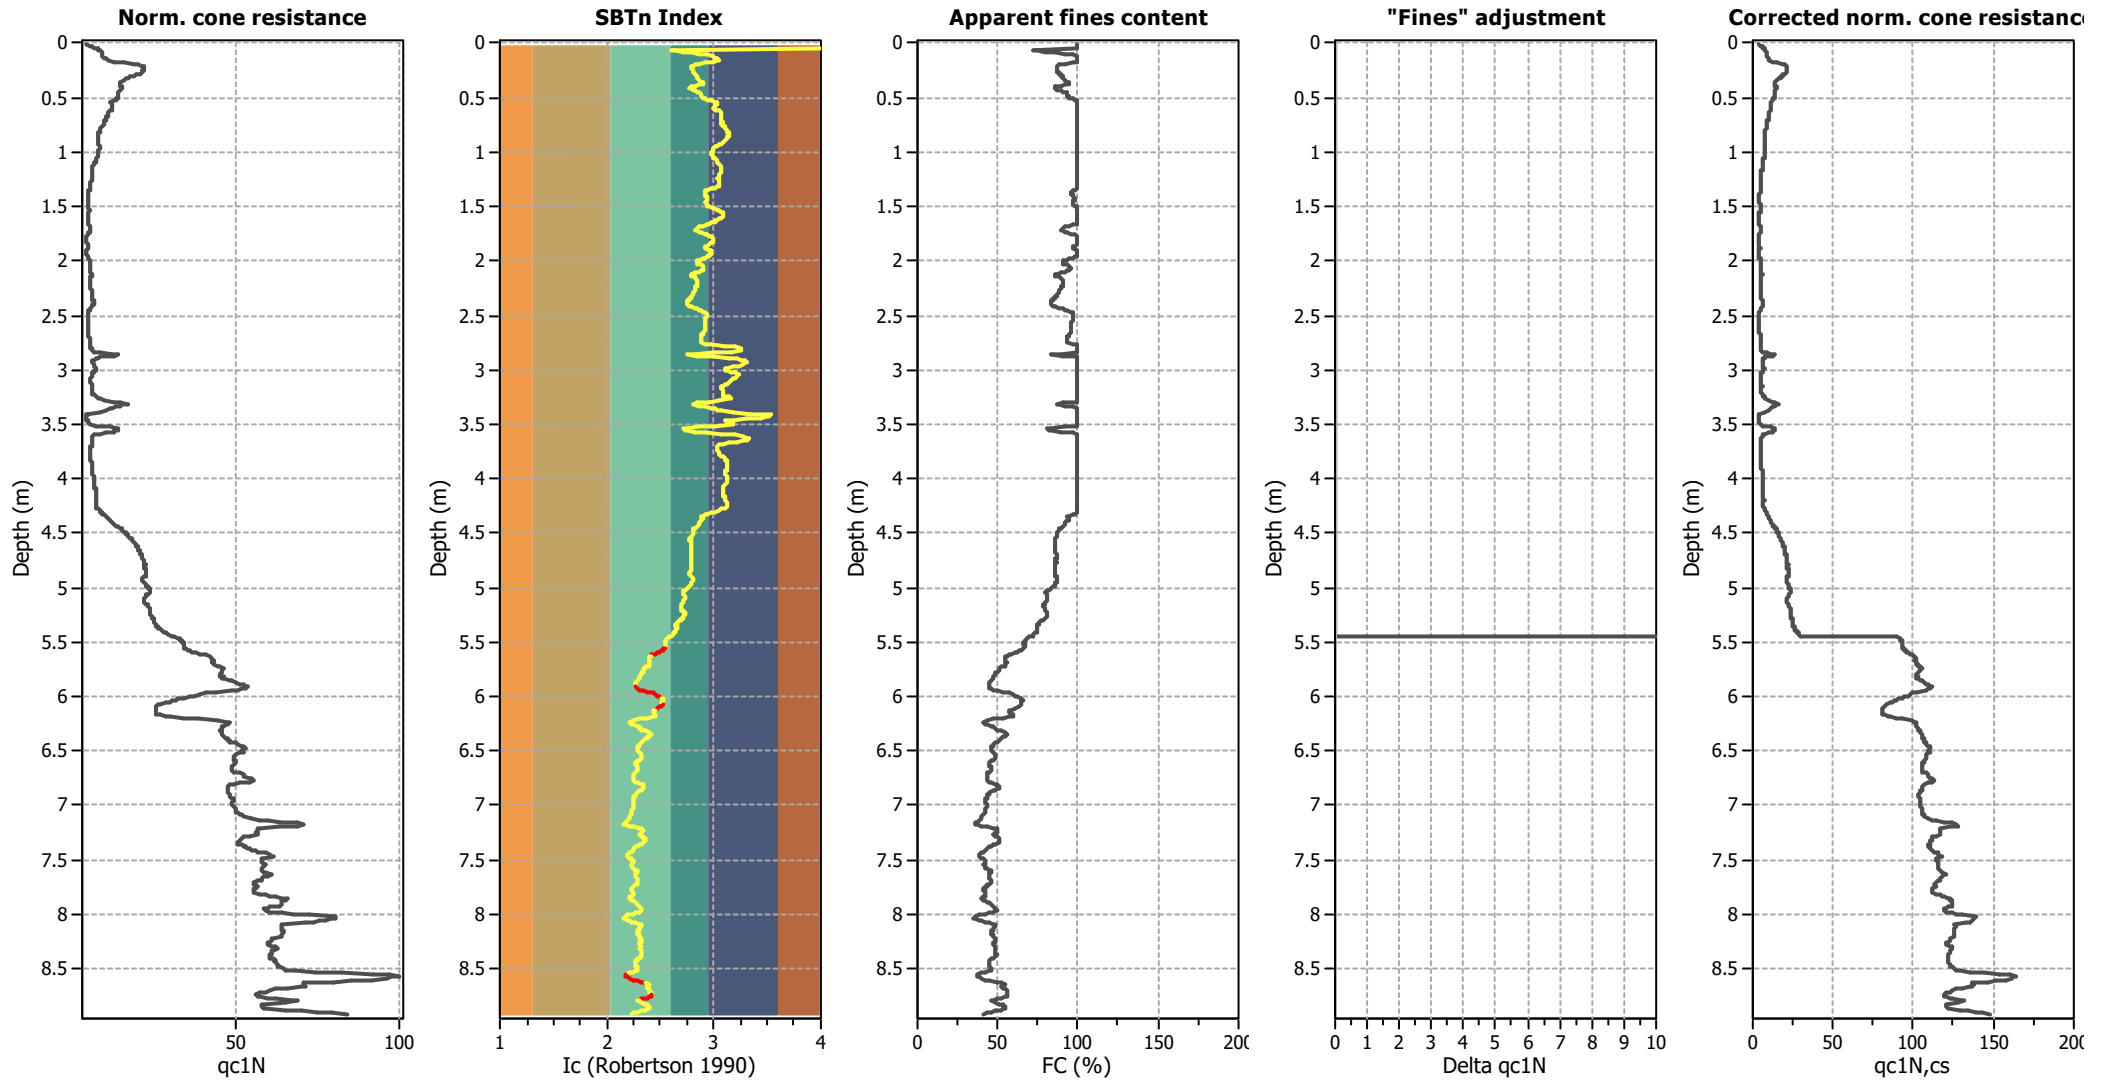

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

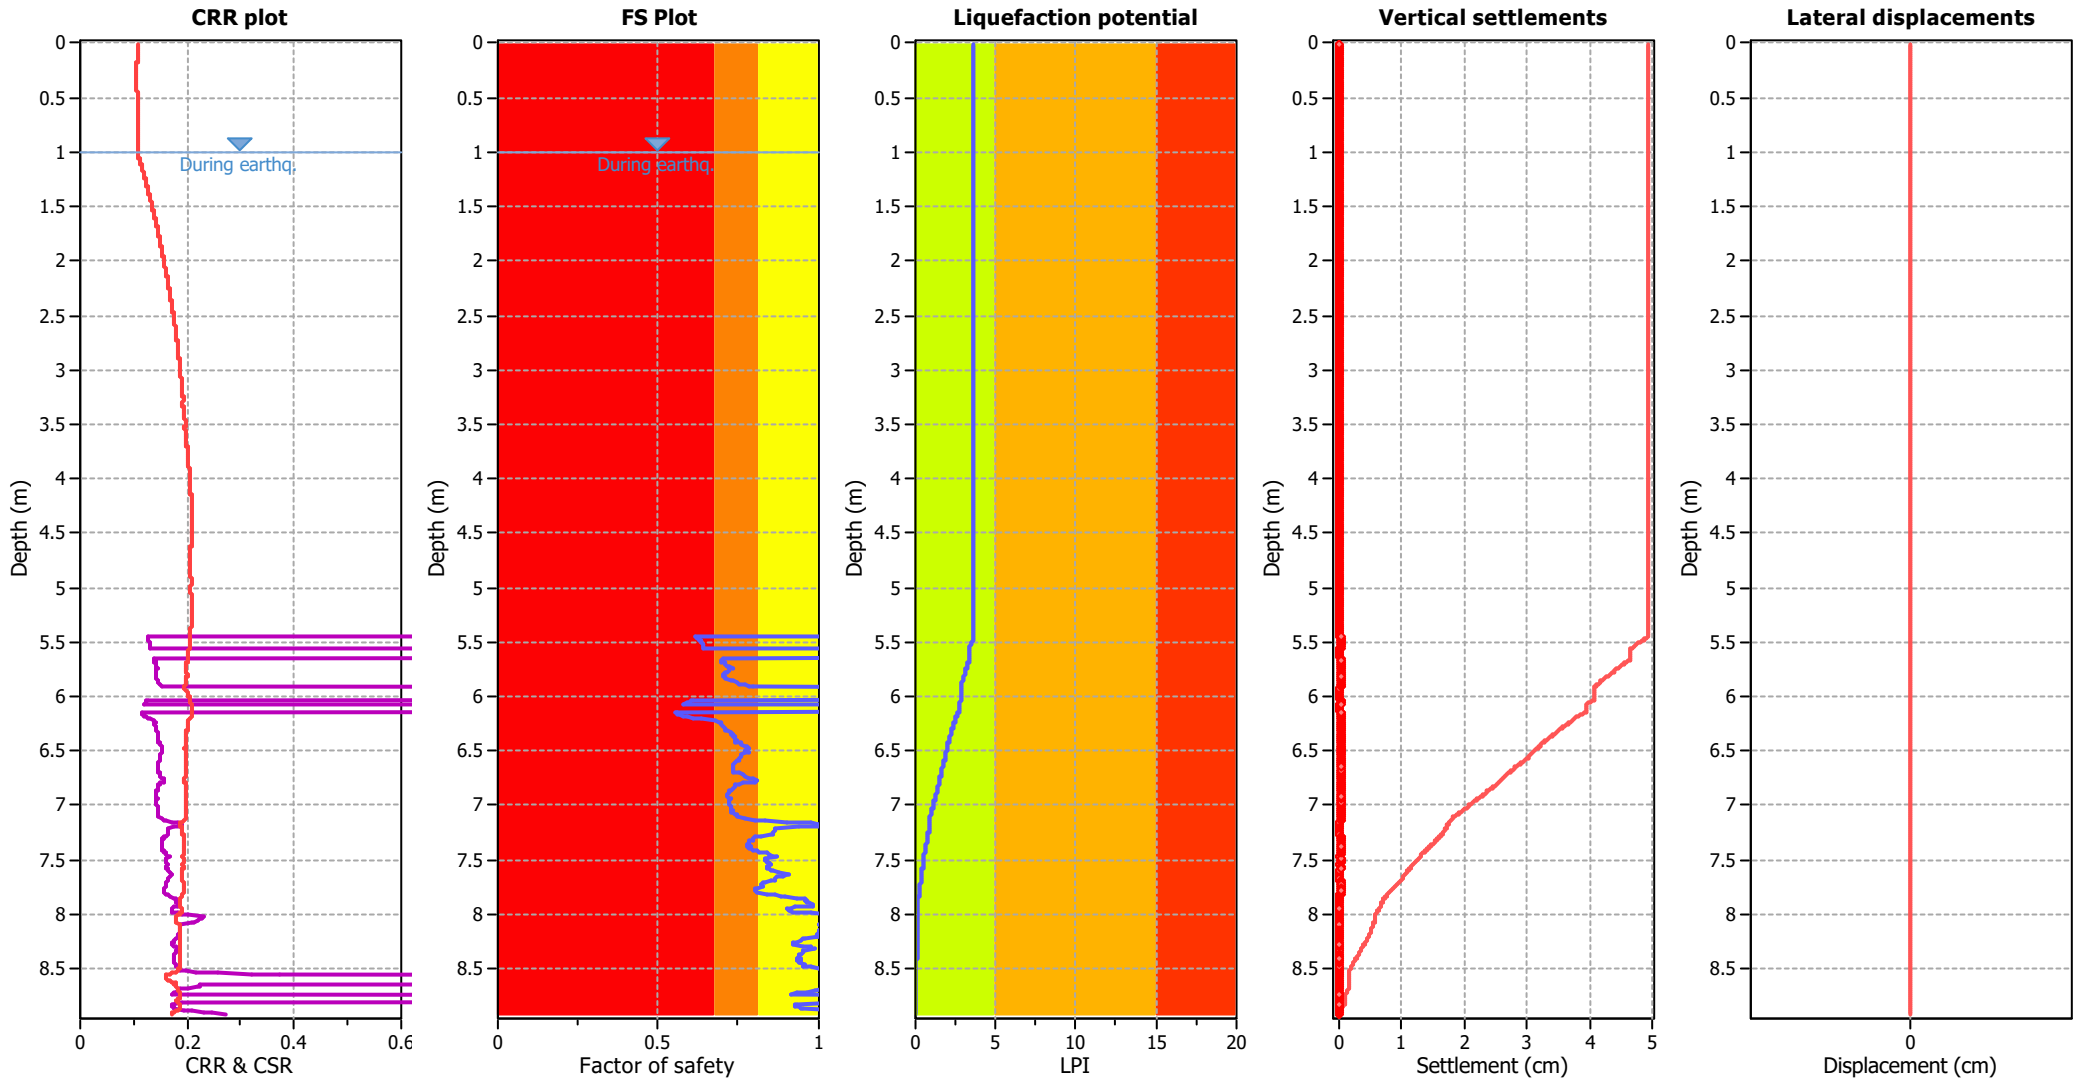

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

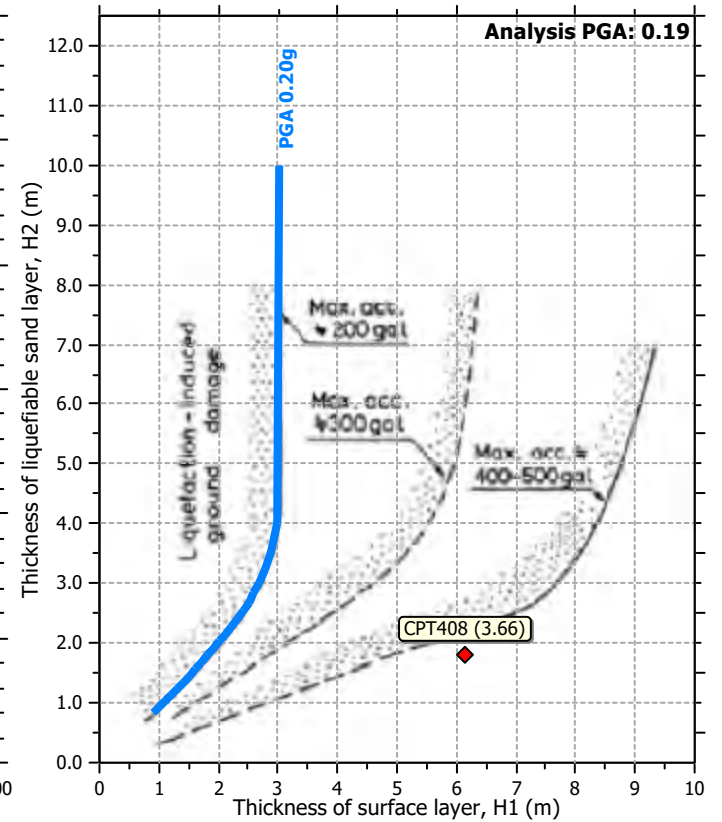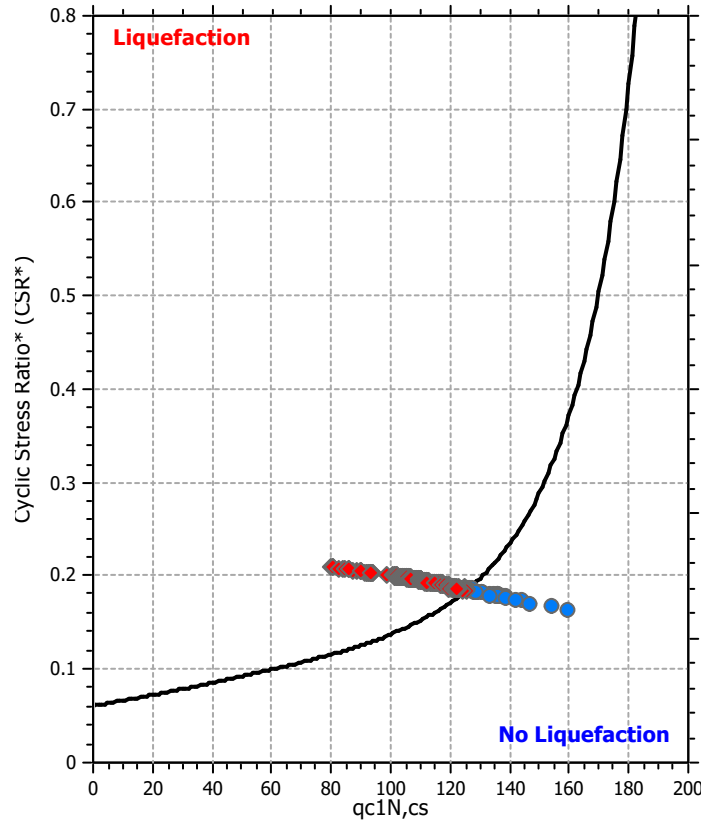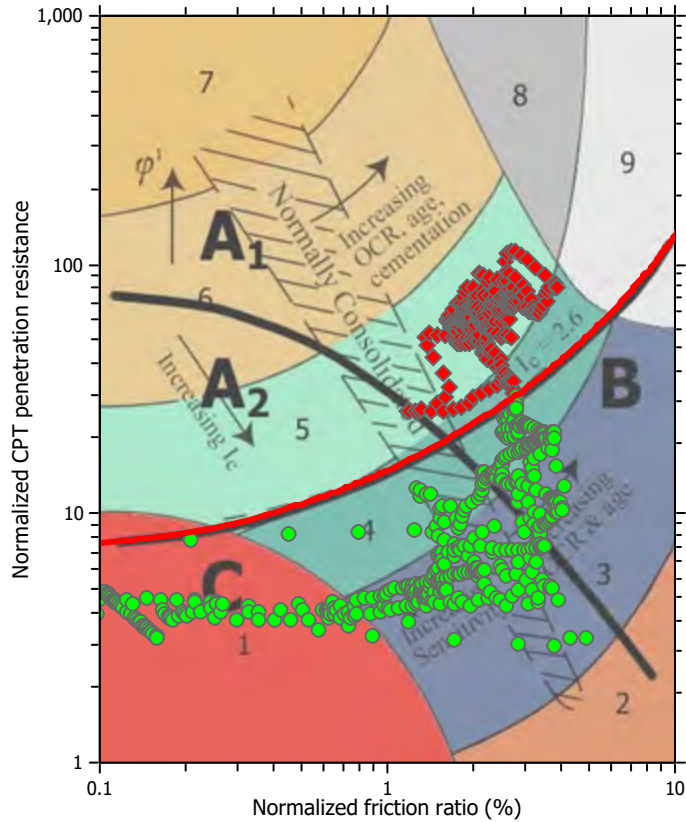

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

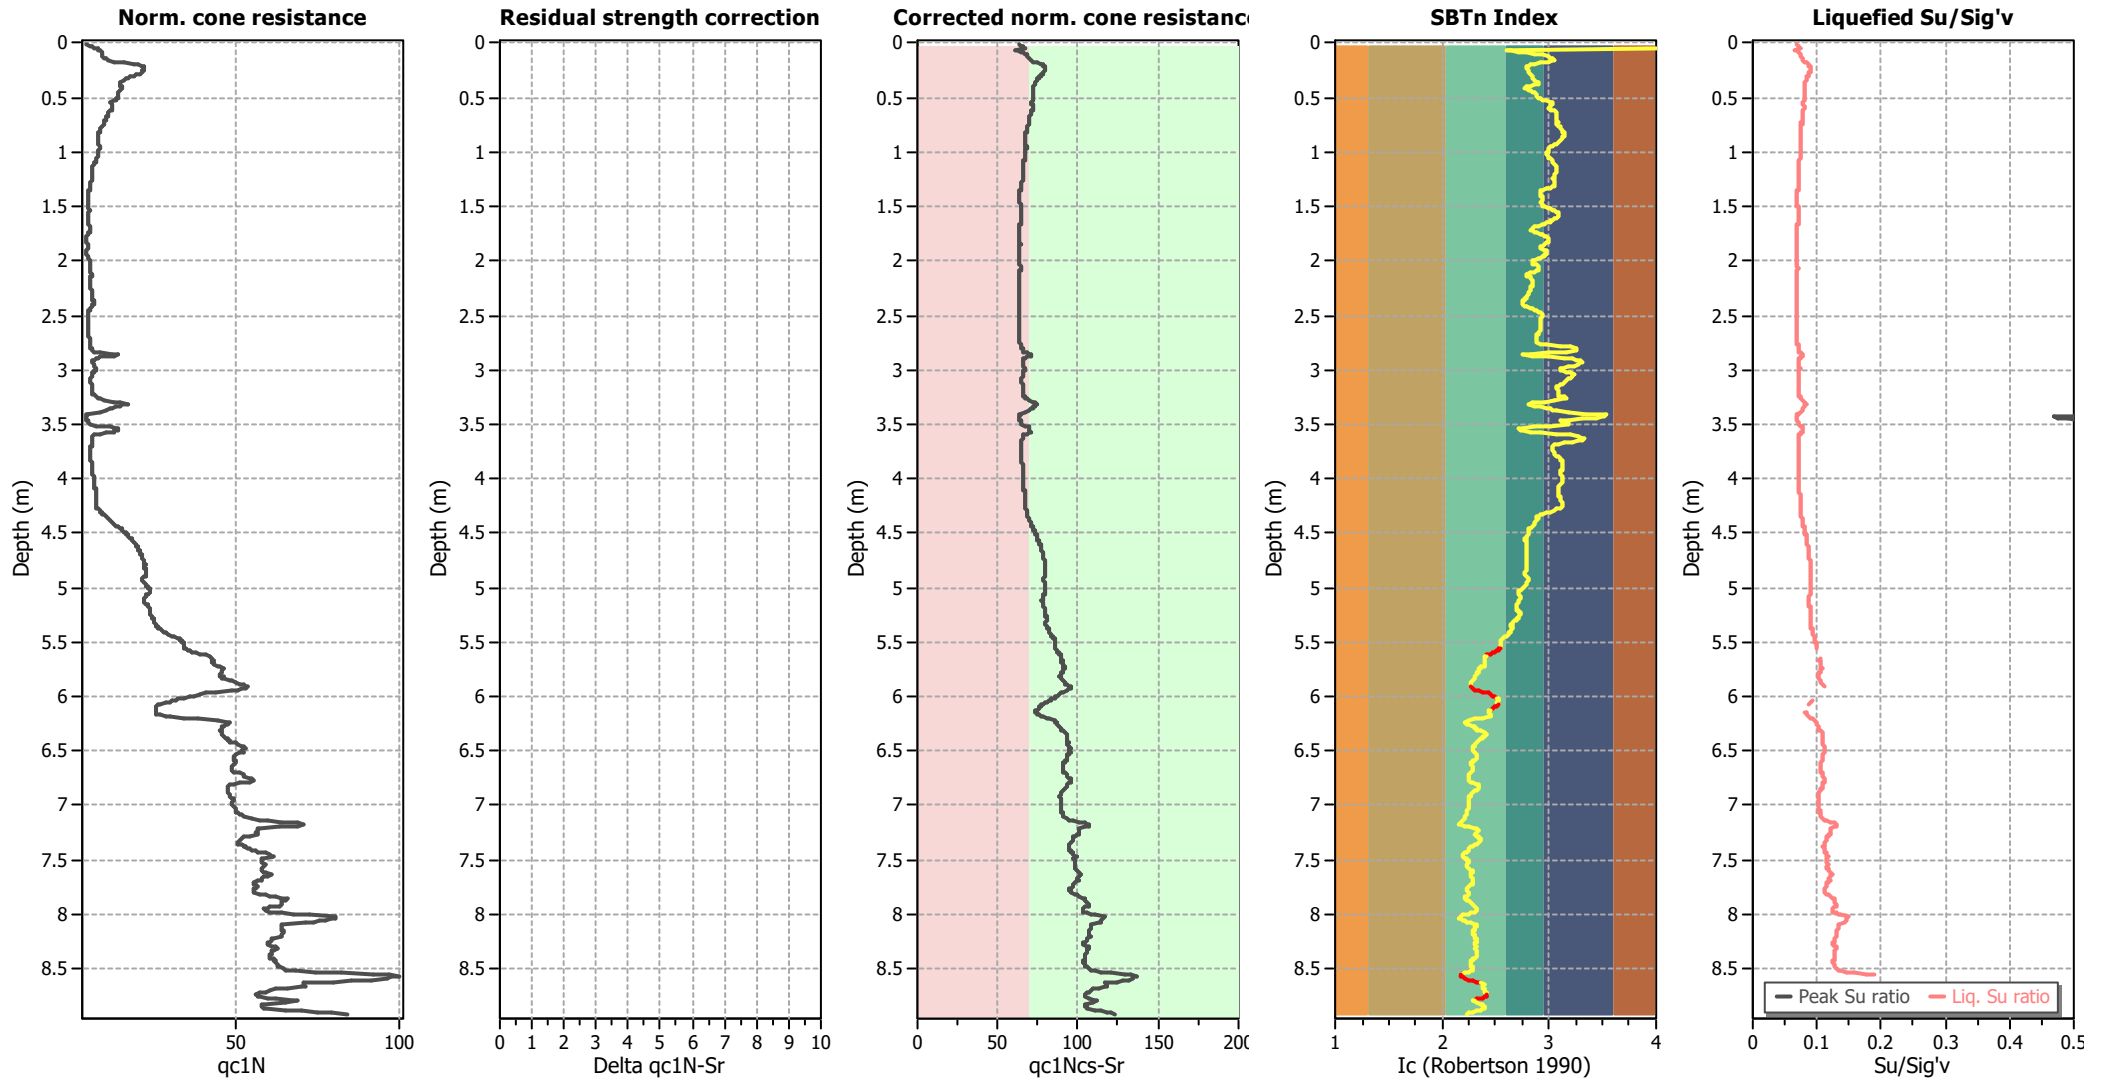

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

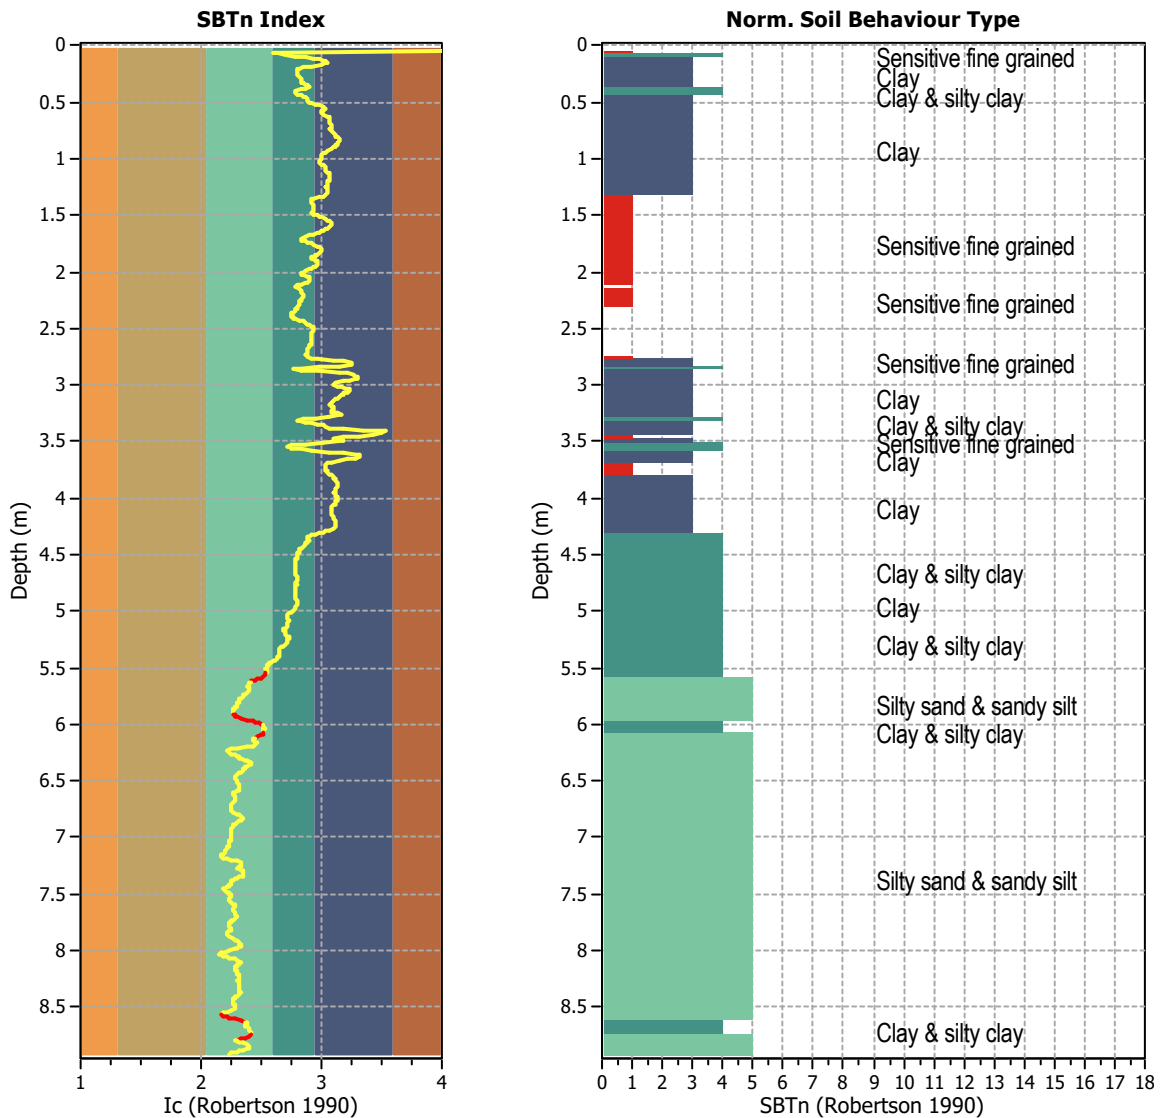


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 892
 Total points excluded: 40
 Exclusion percentage: 4.48%
 Number of layers detected: 5


Estimation of post-earthquake settlements

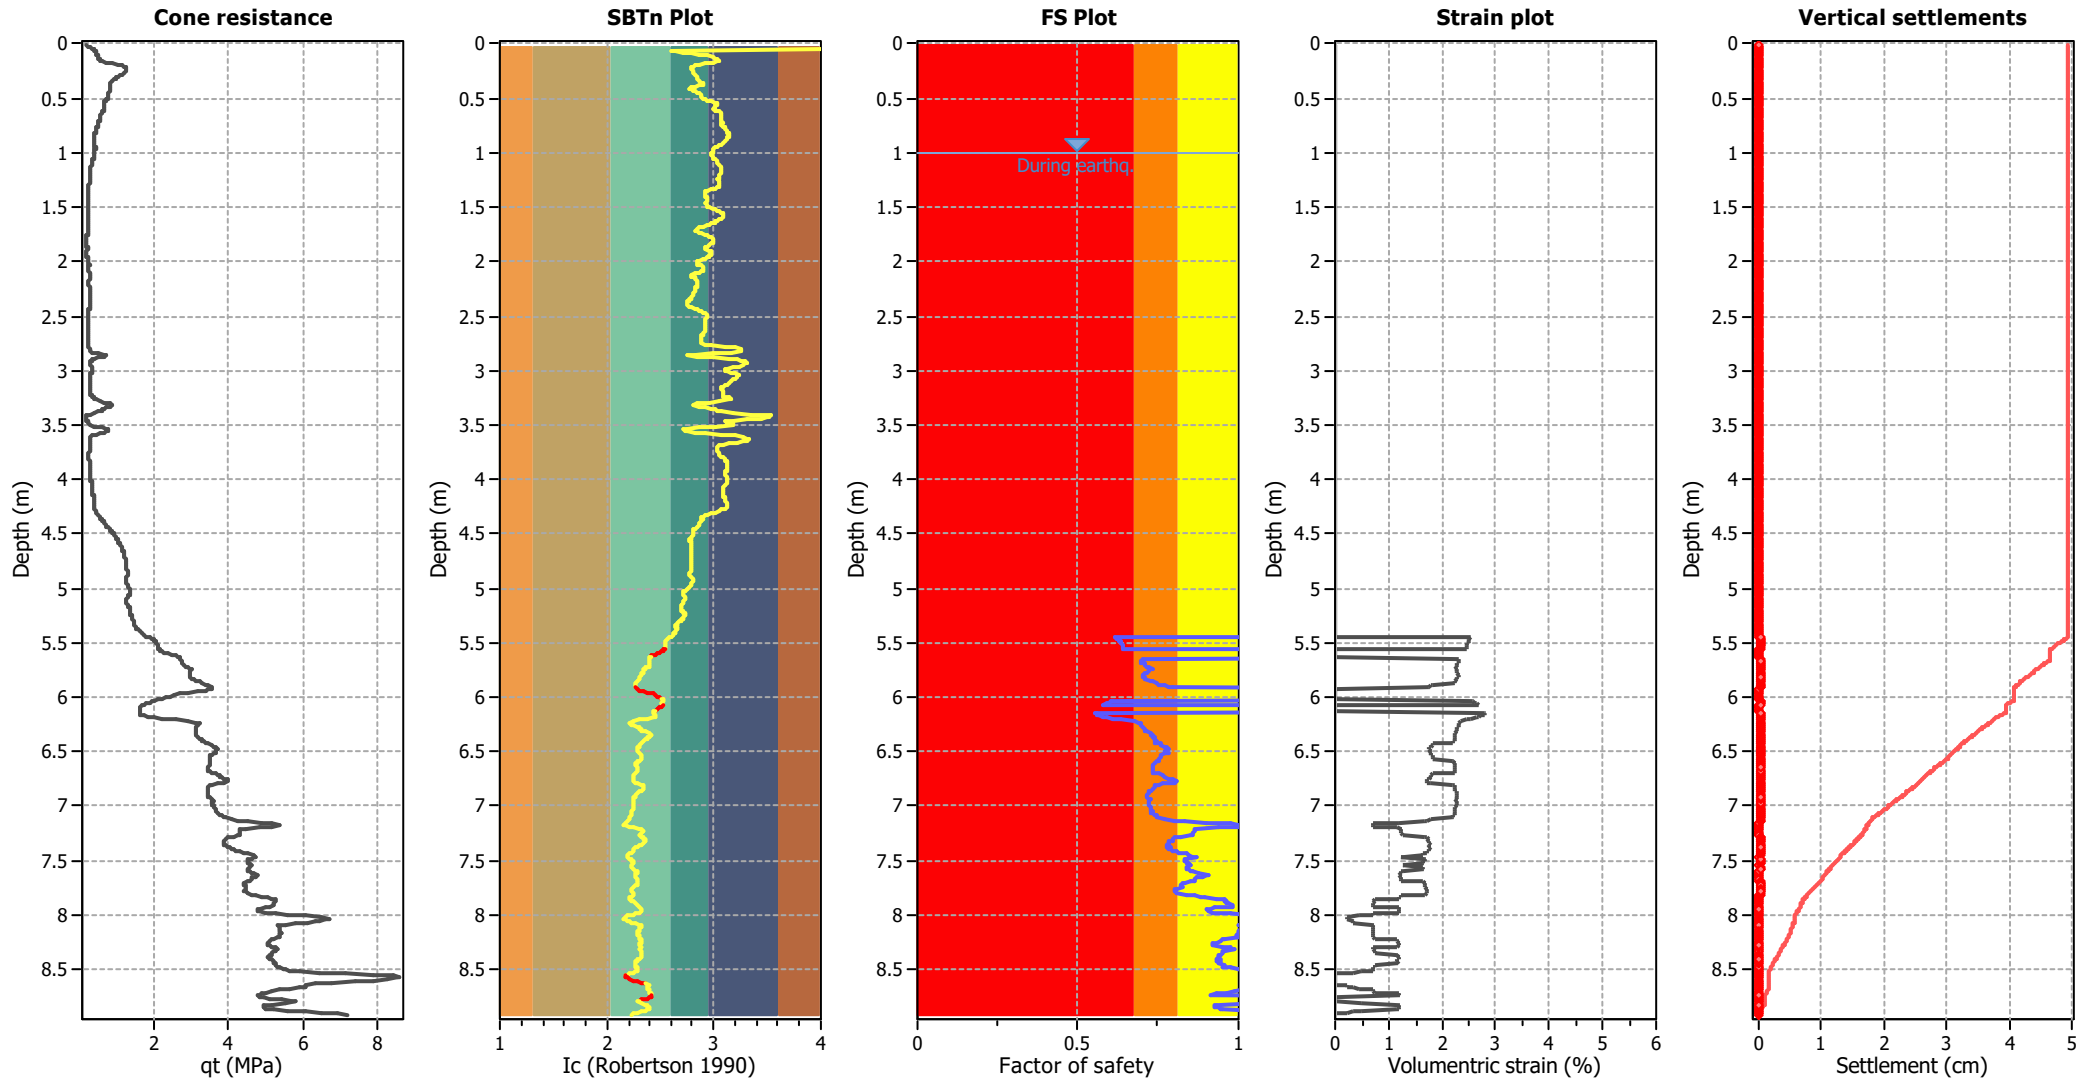

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

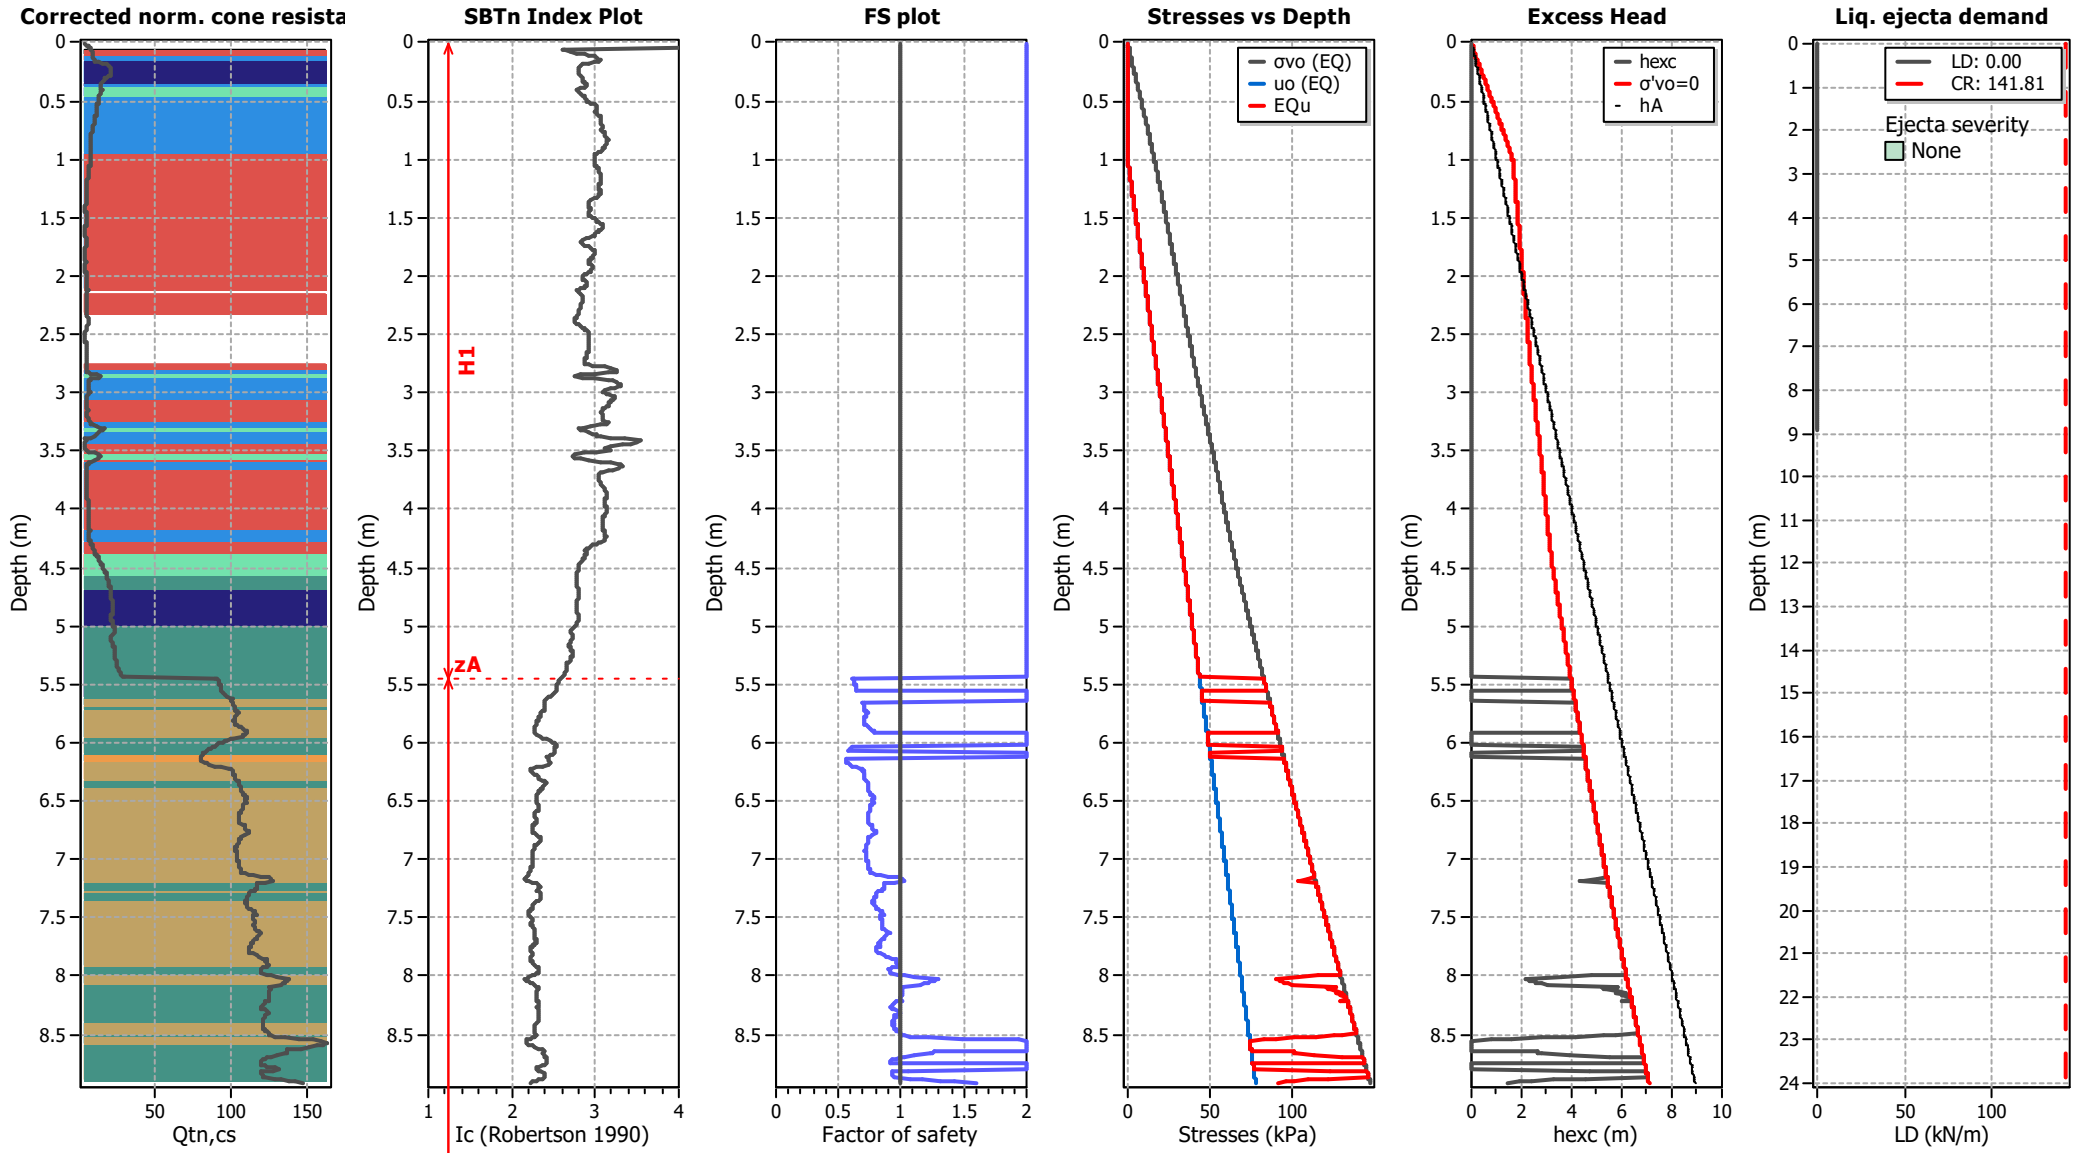

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT409

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

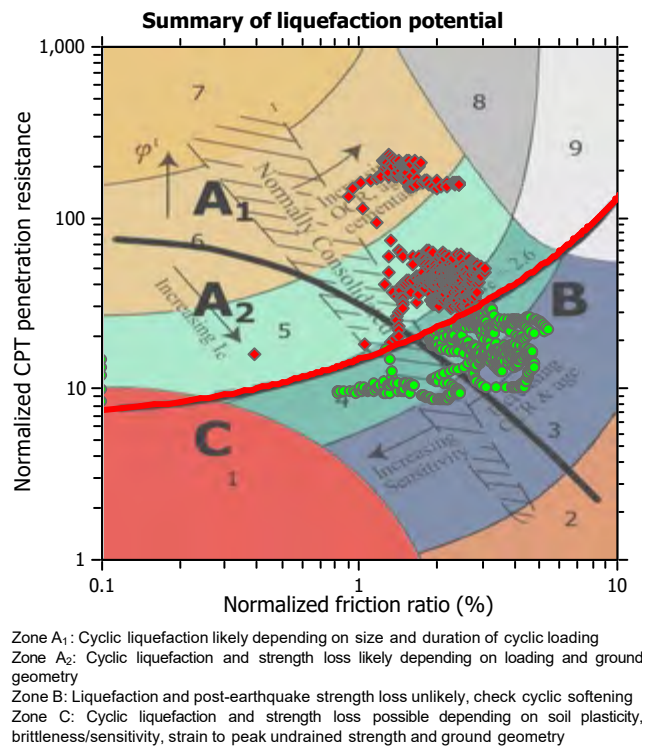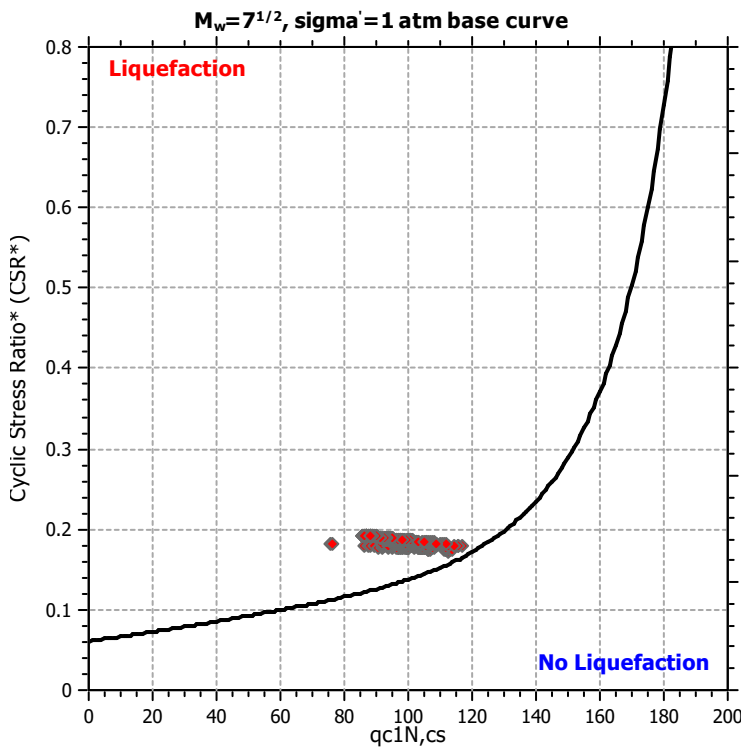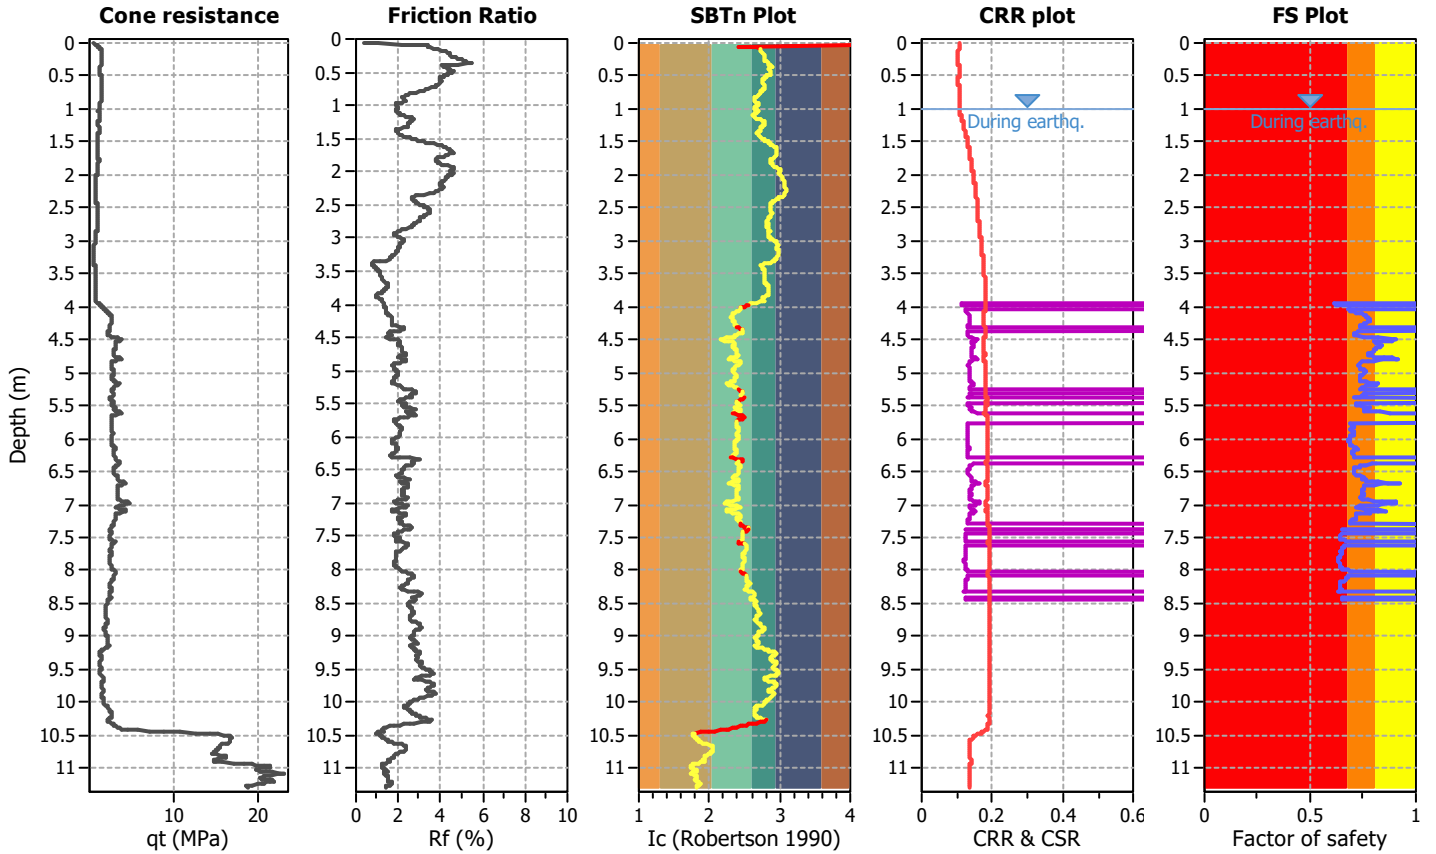

CPT basic interpretation plots

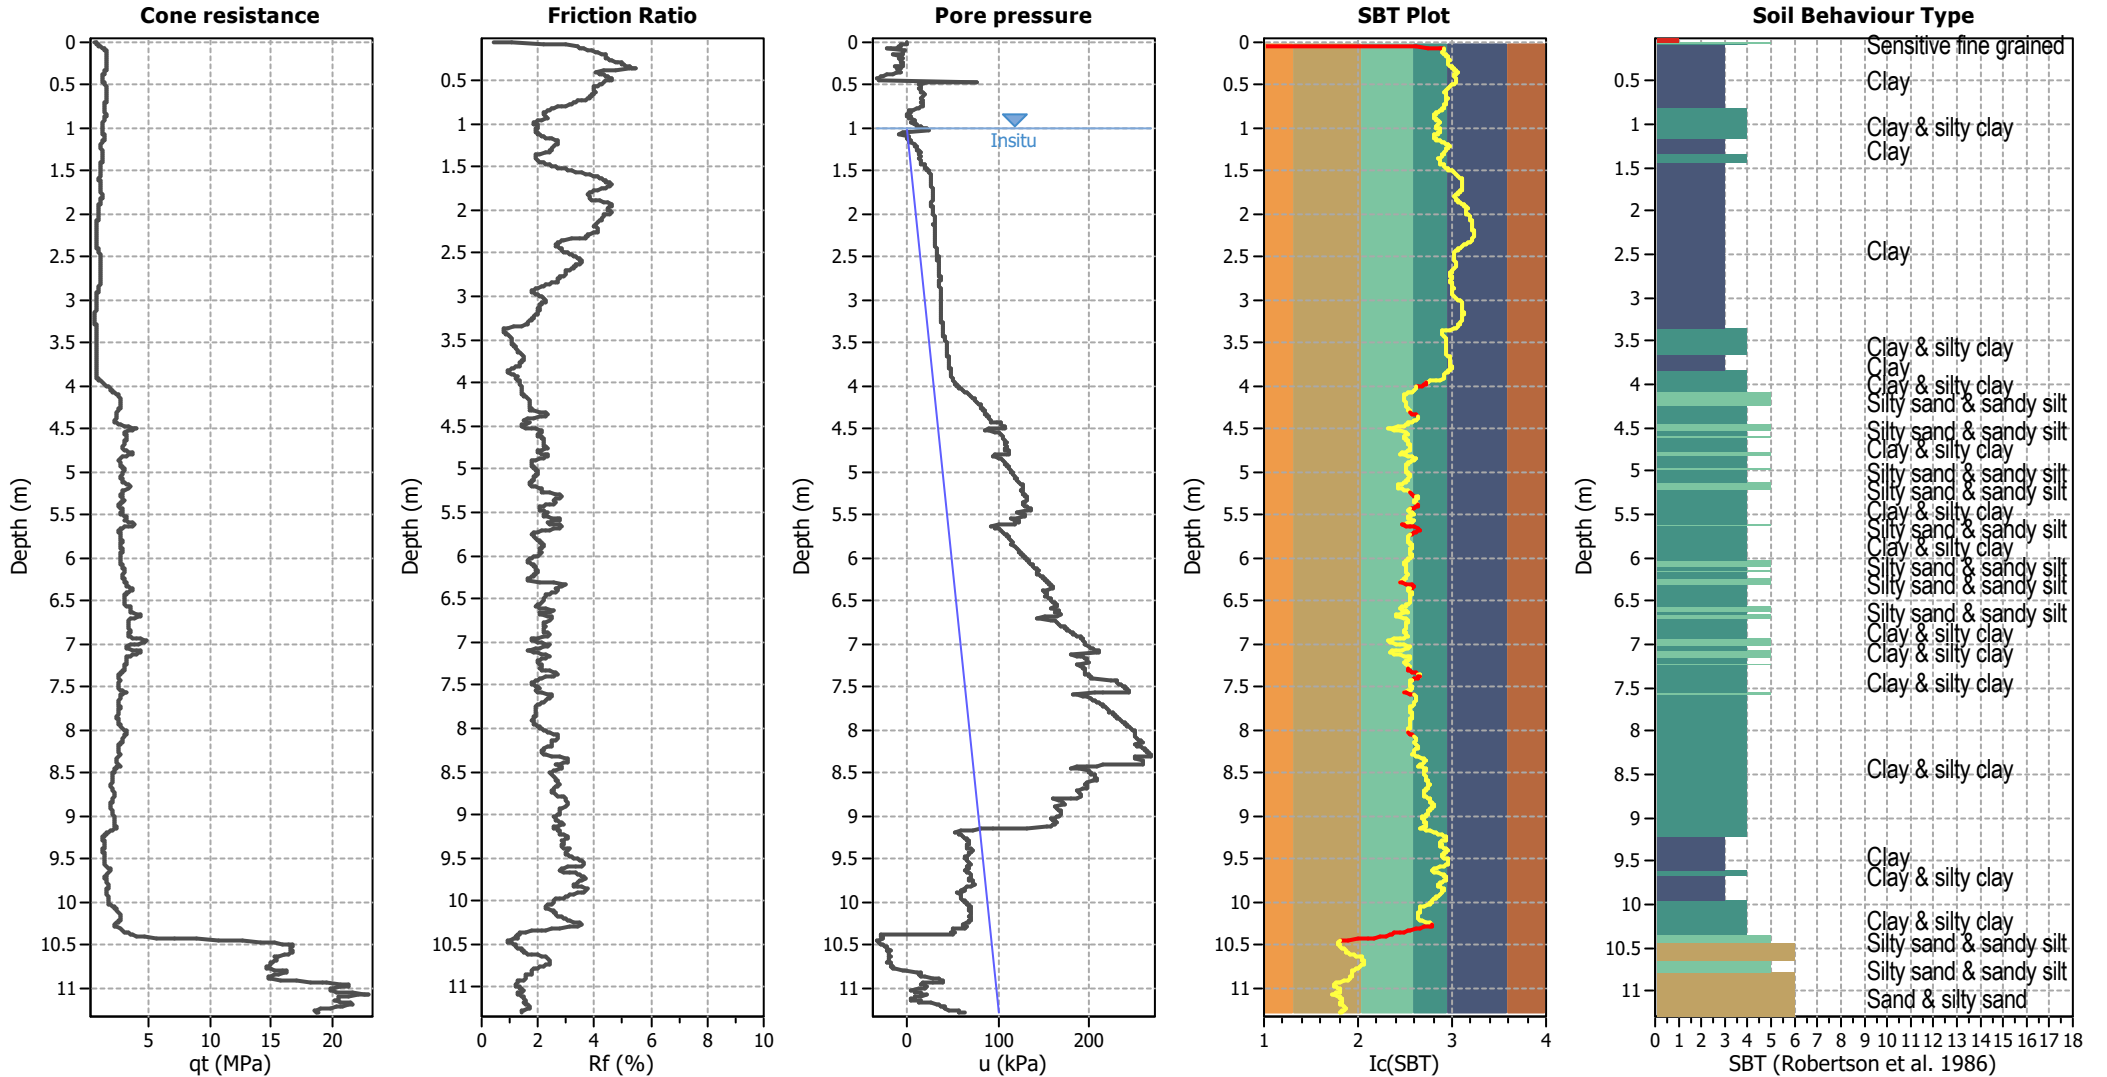


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

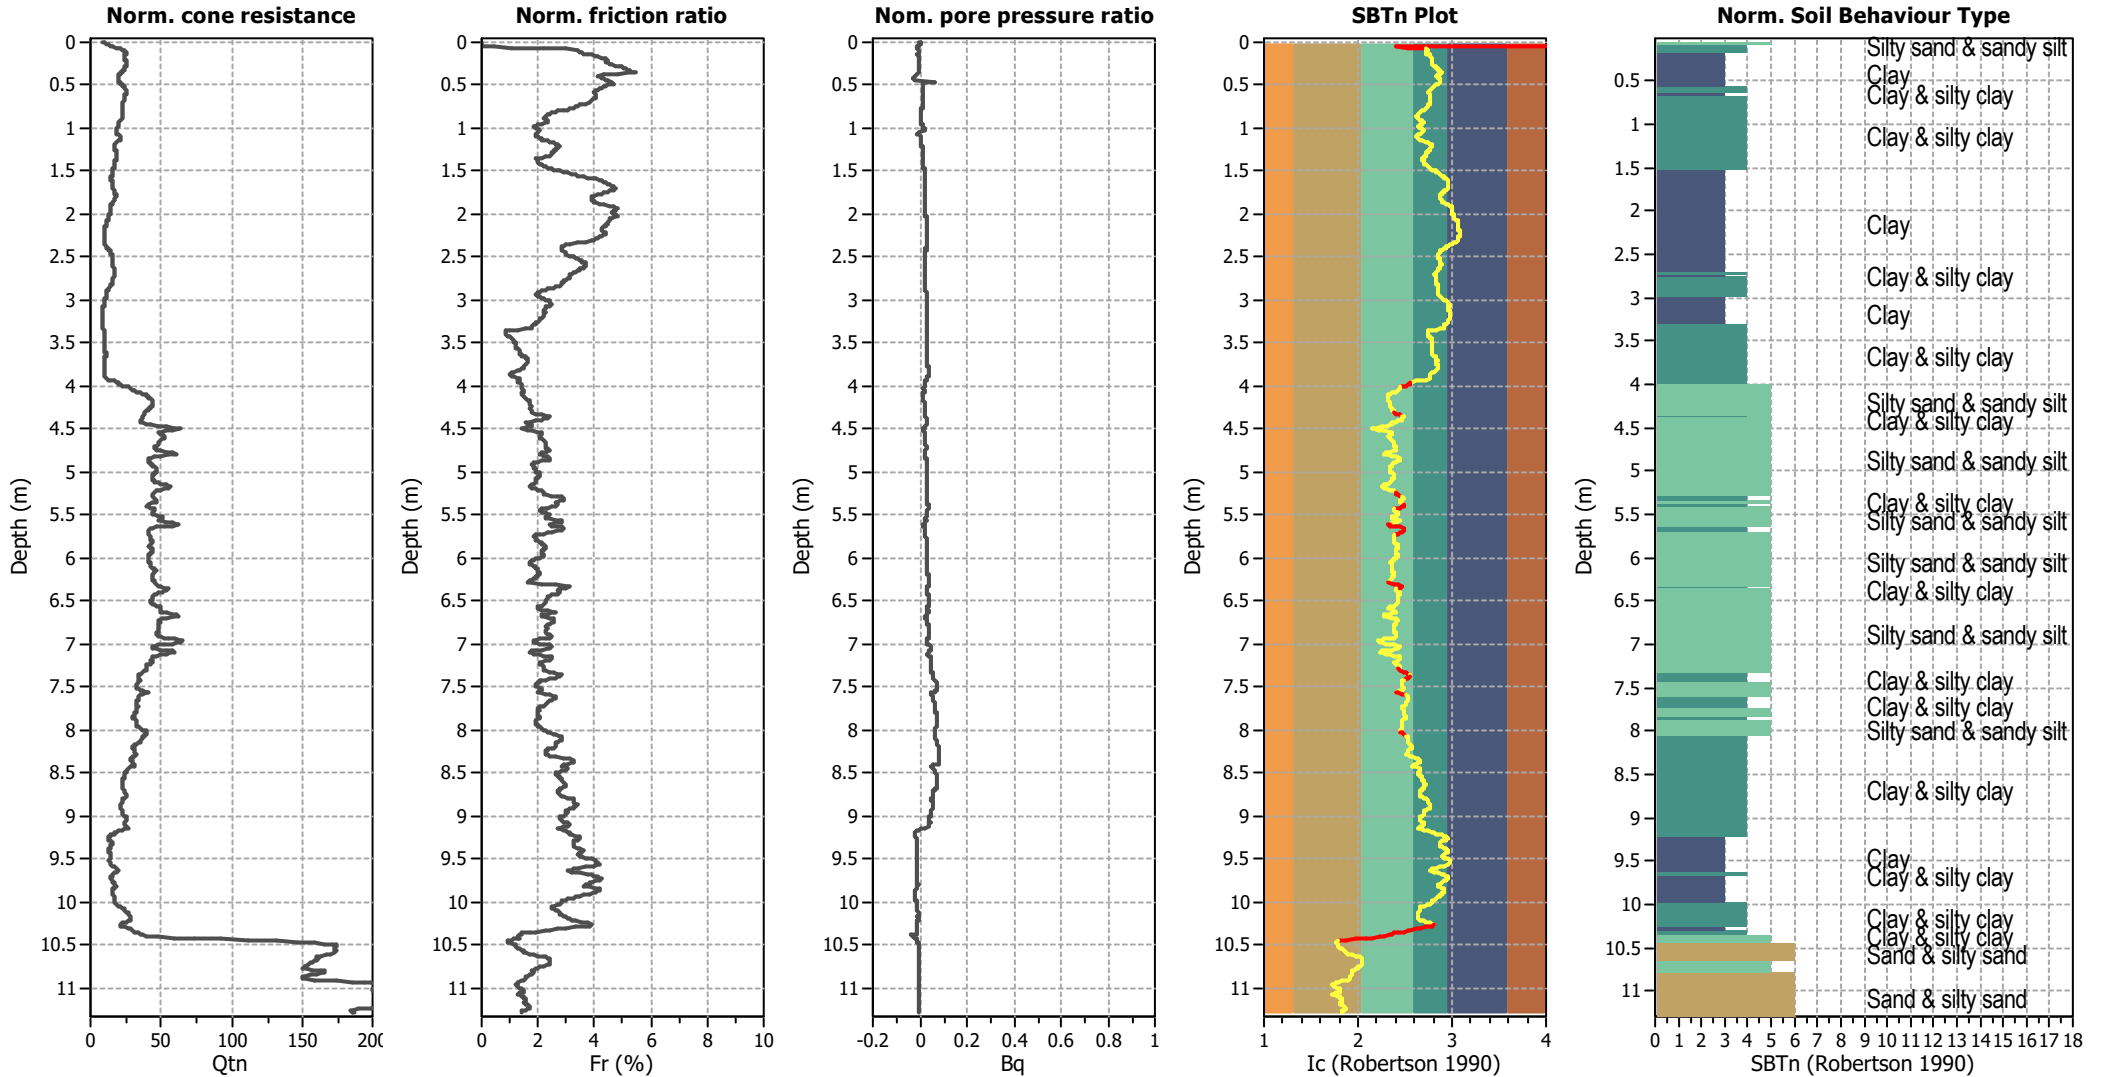


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

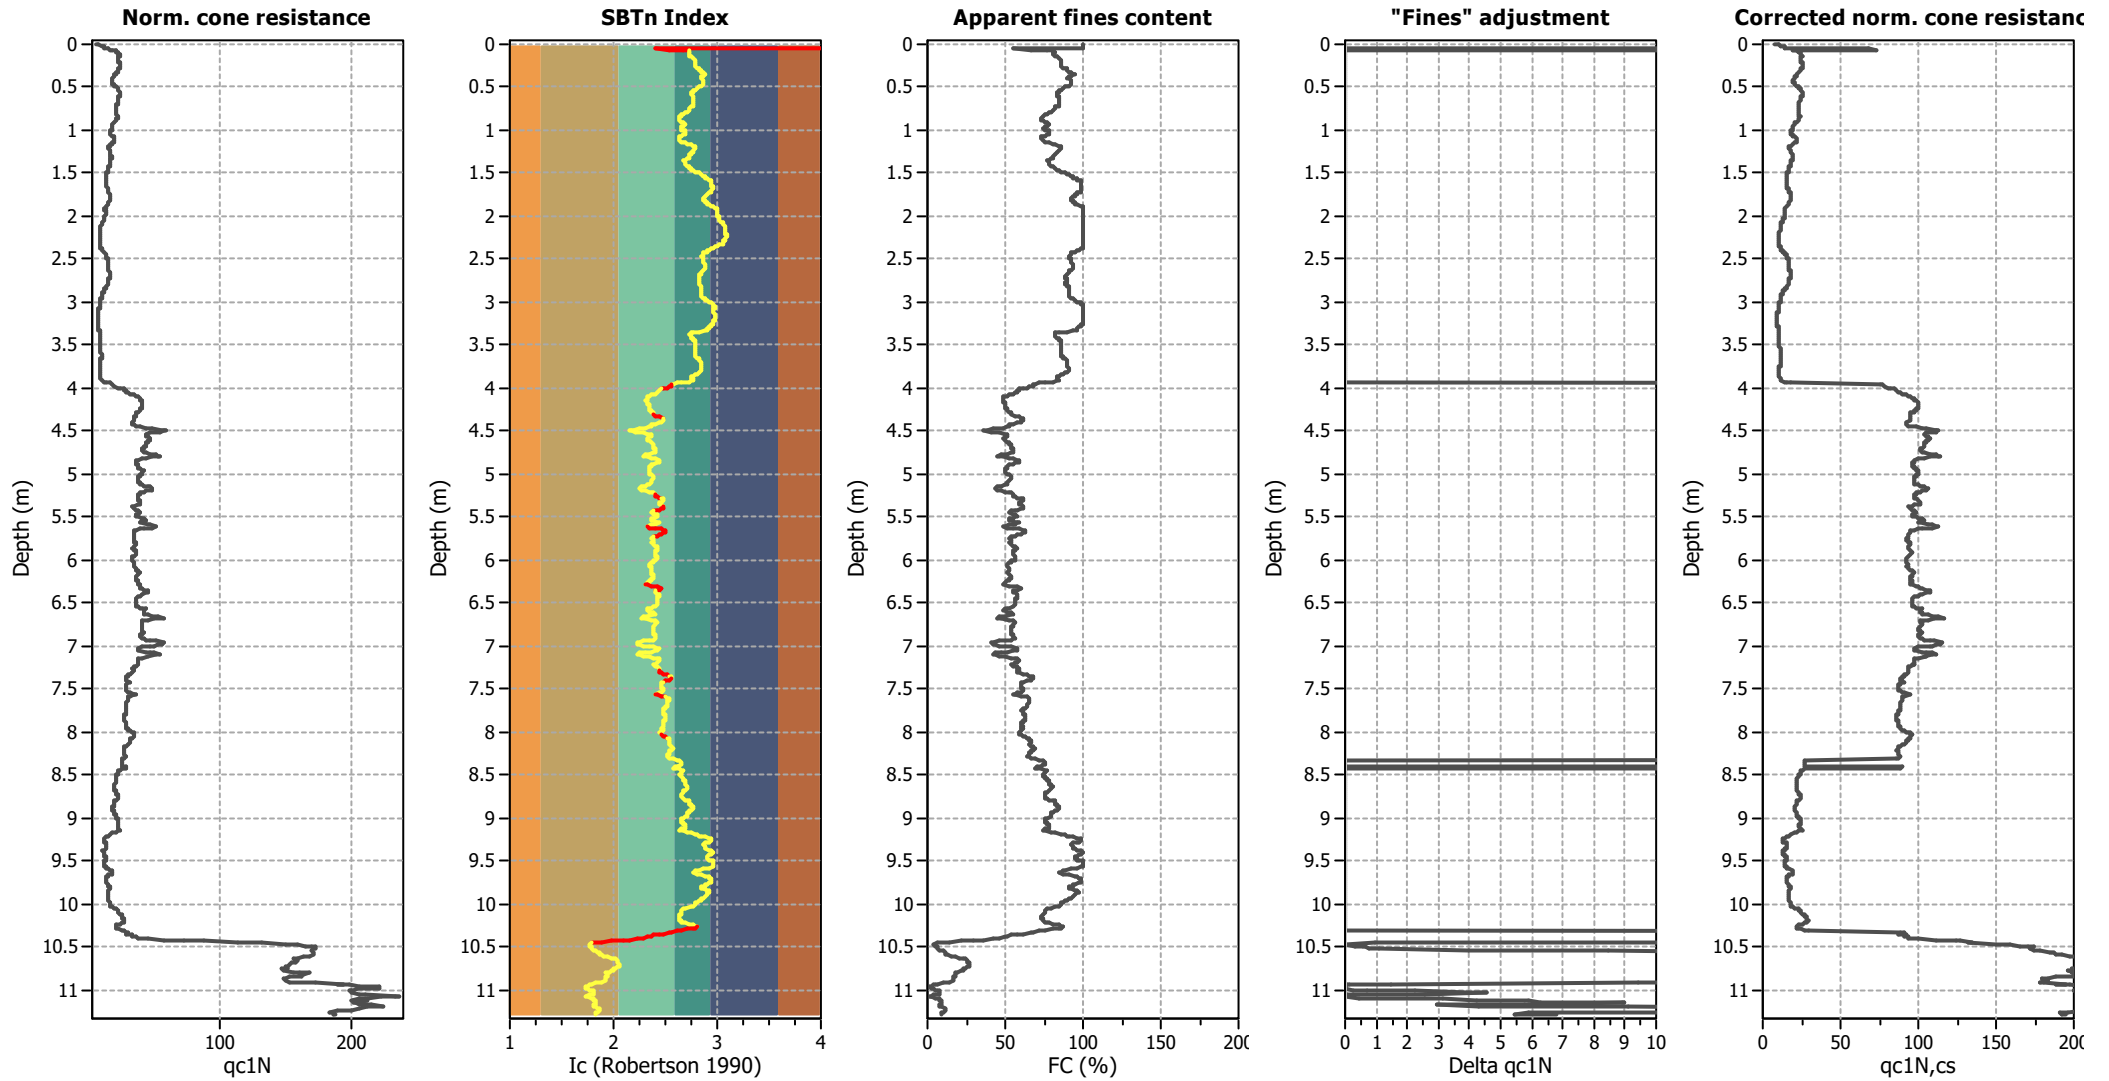

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

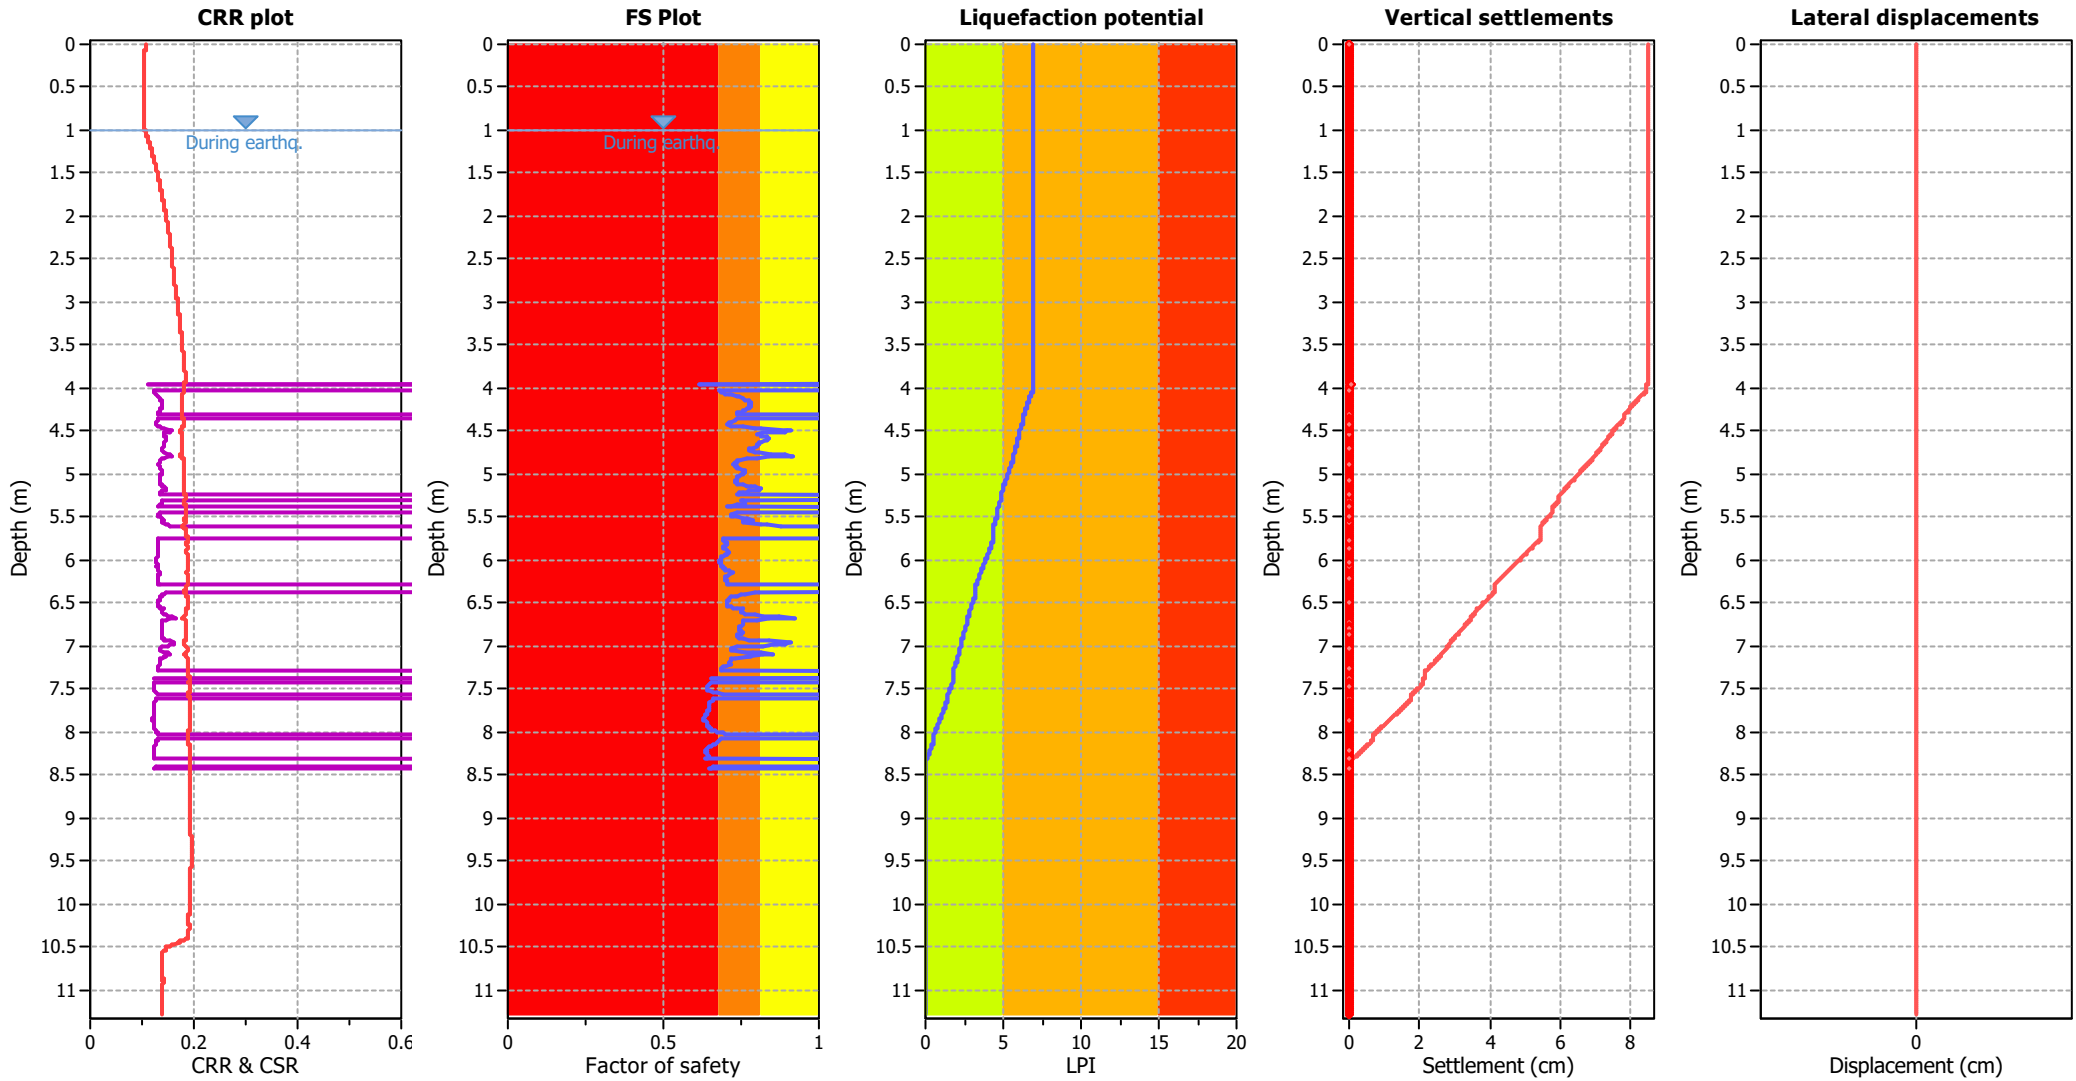

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

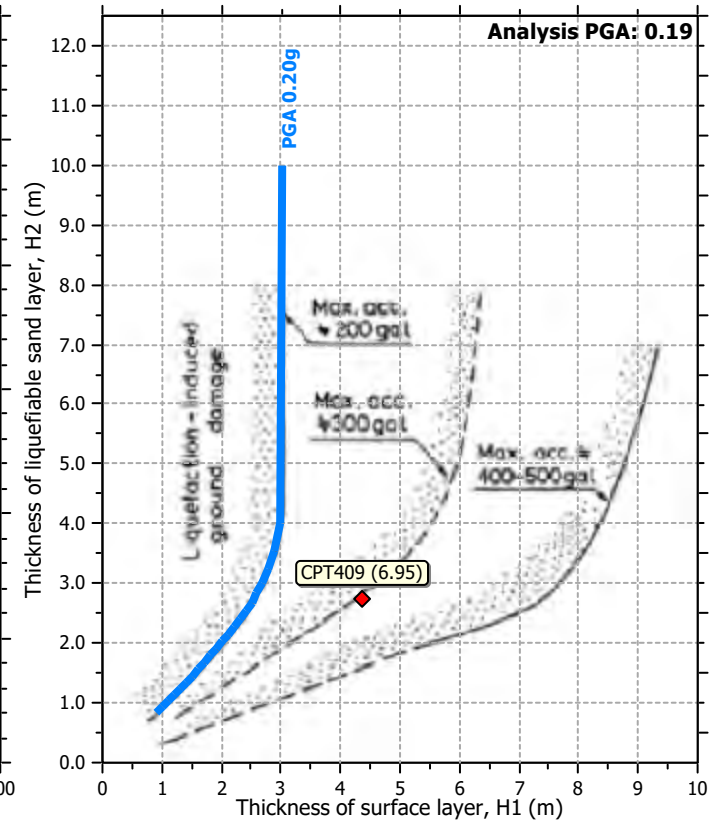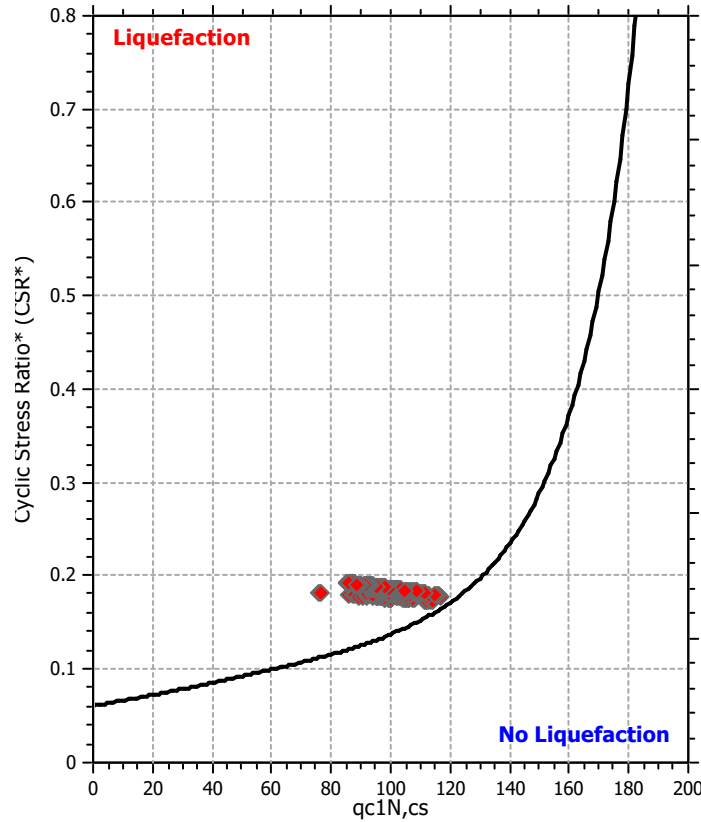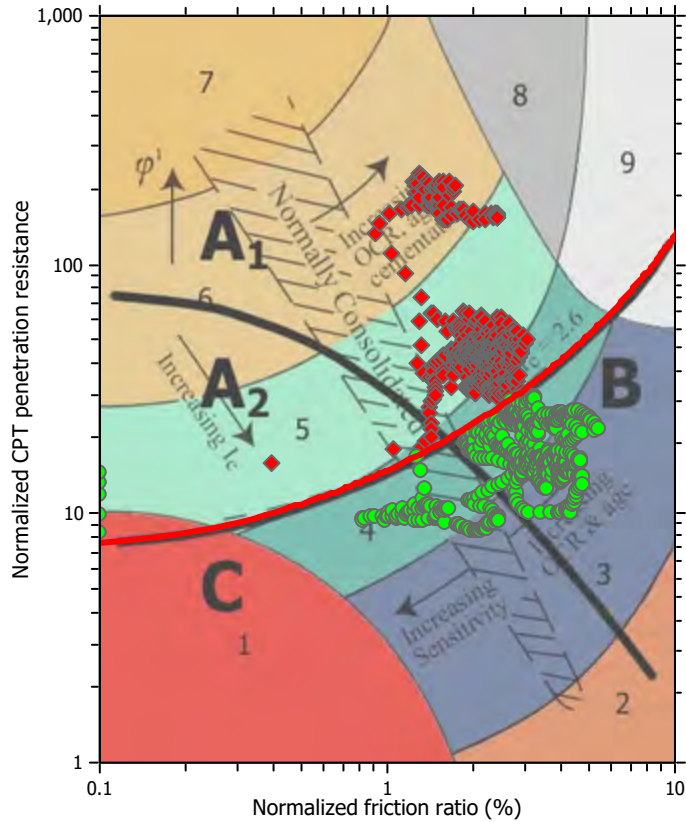

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_{ϕ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

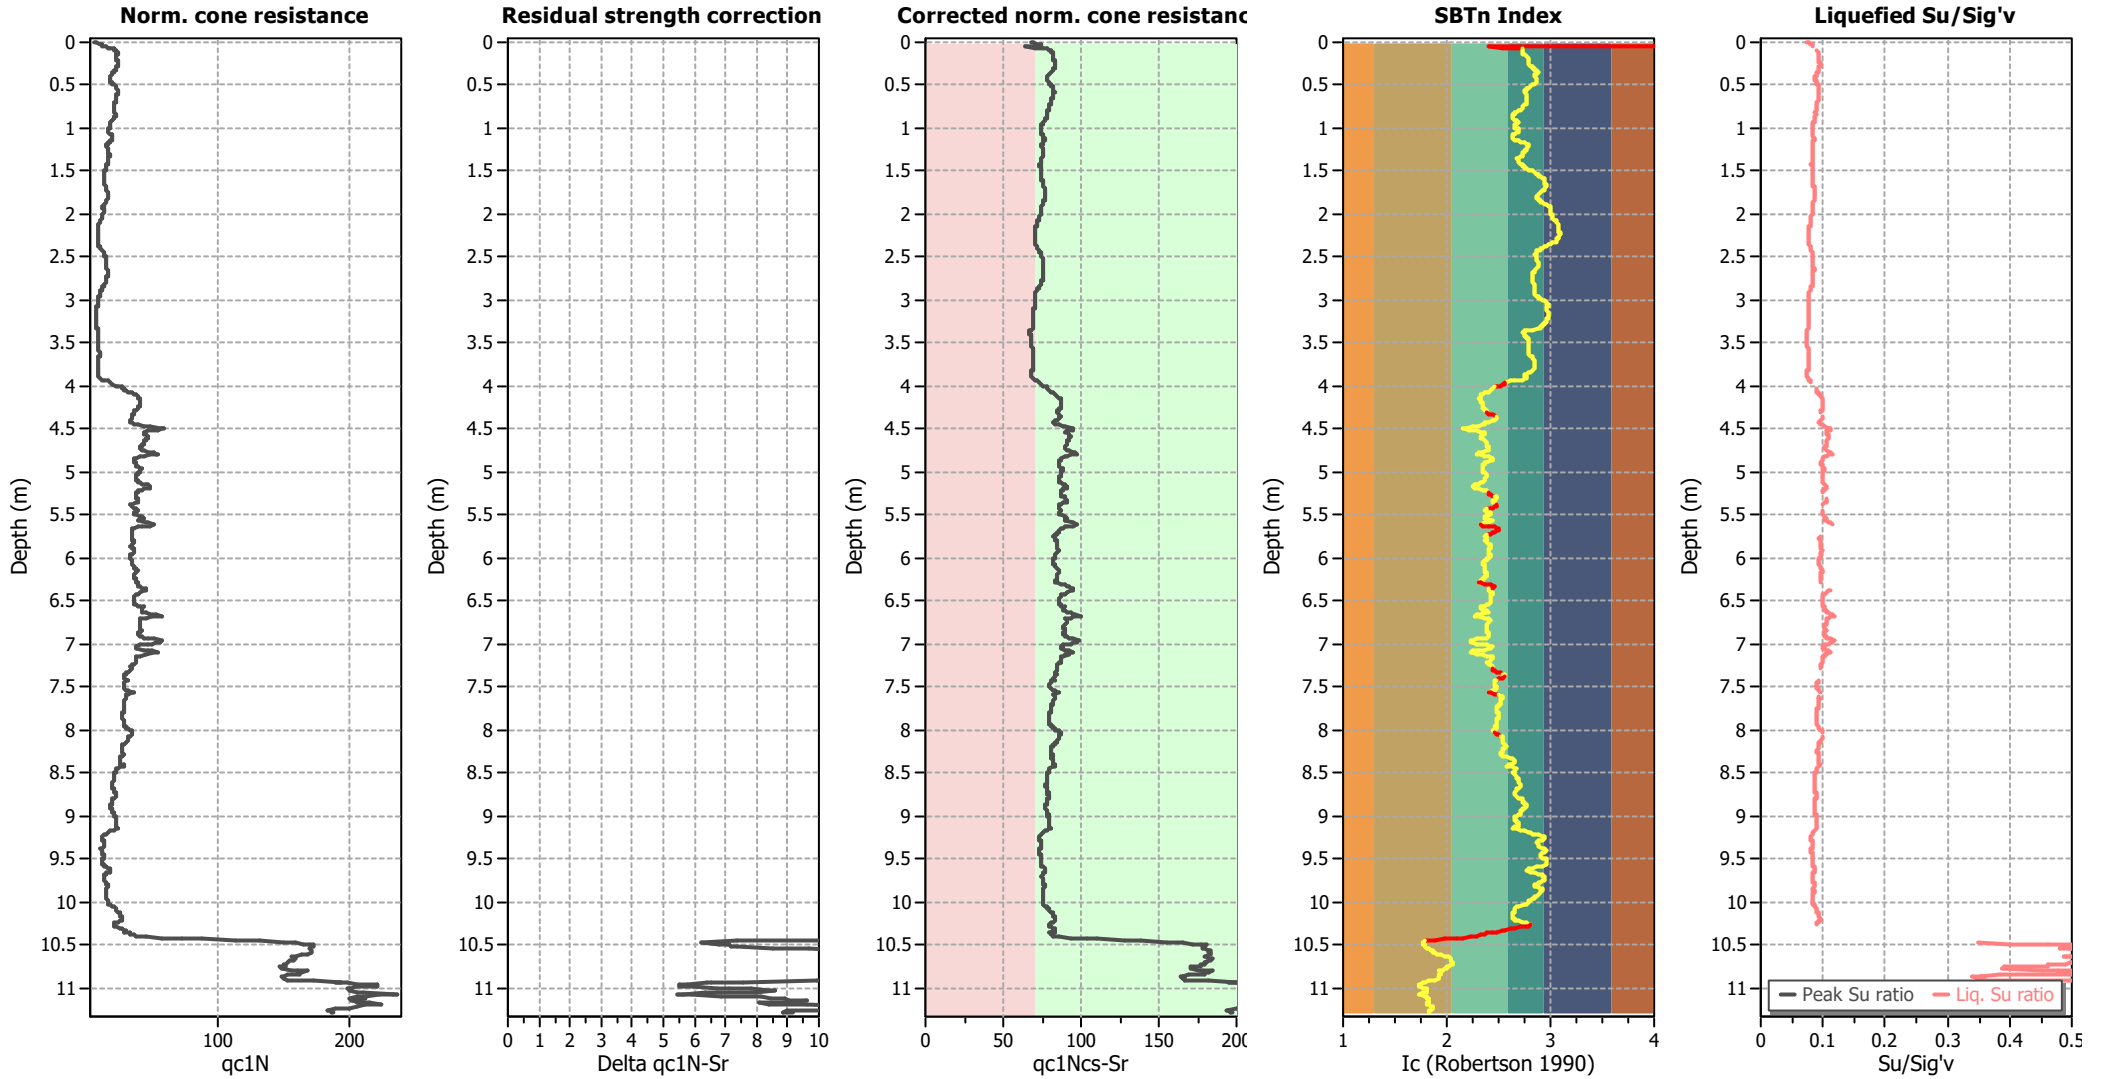

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

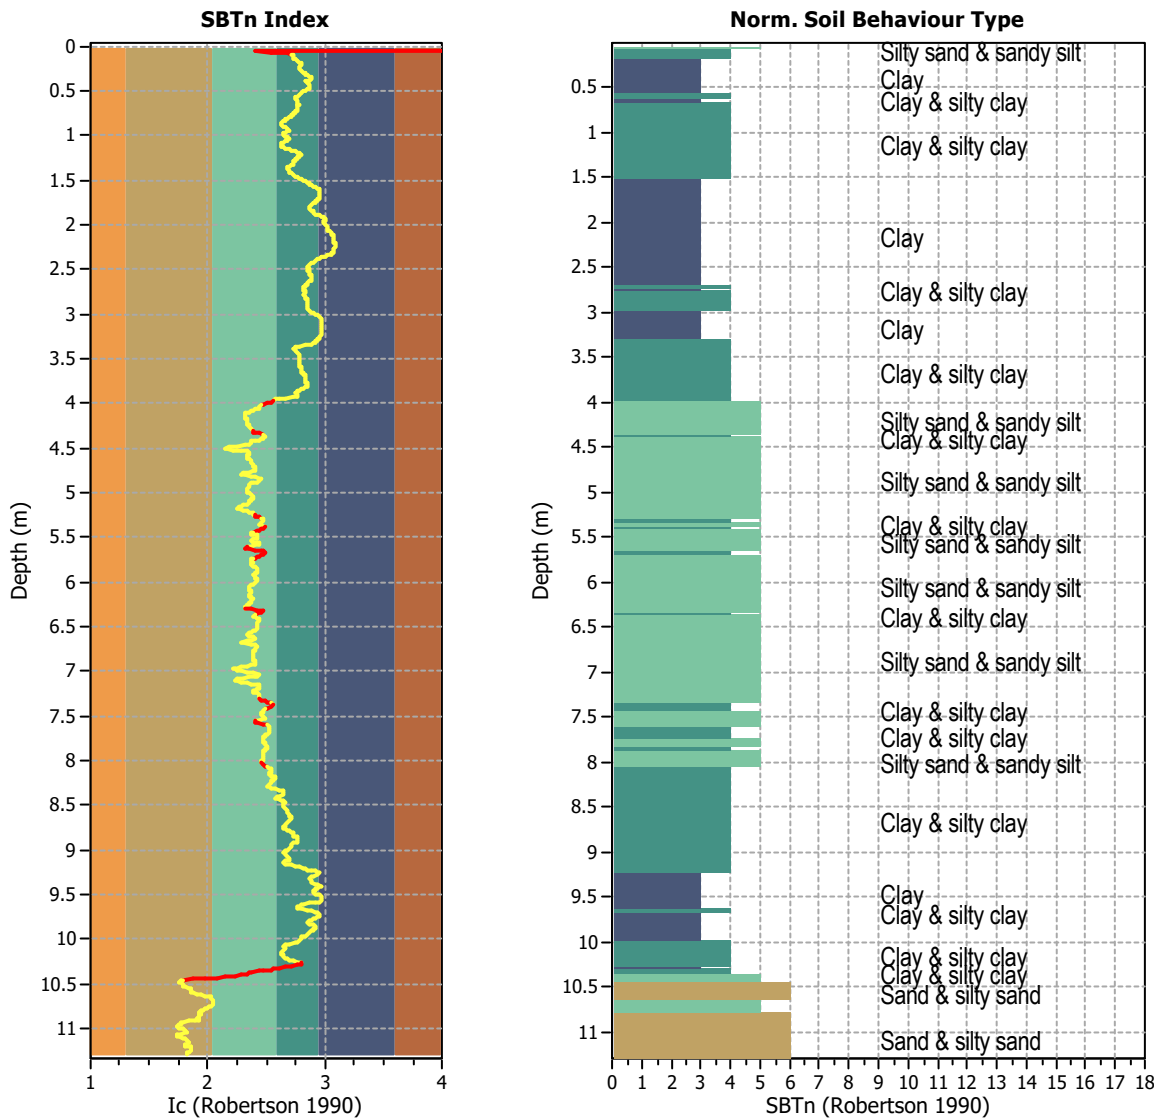


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1129
 Total points excluded: 91
 Exclusion percentage: 8.06%
 Number of layers detected: 14


Estimation of post-earthquake settlements

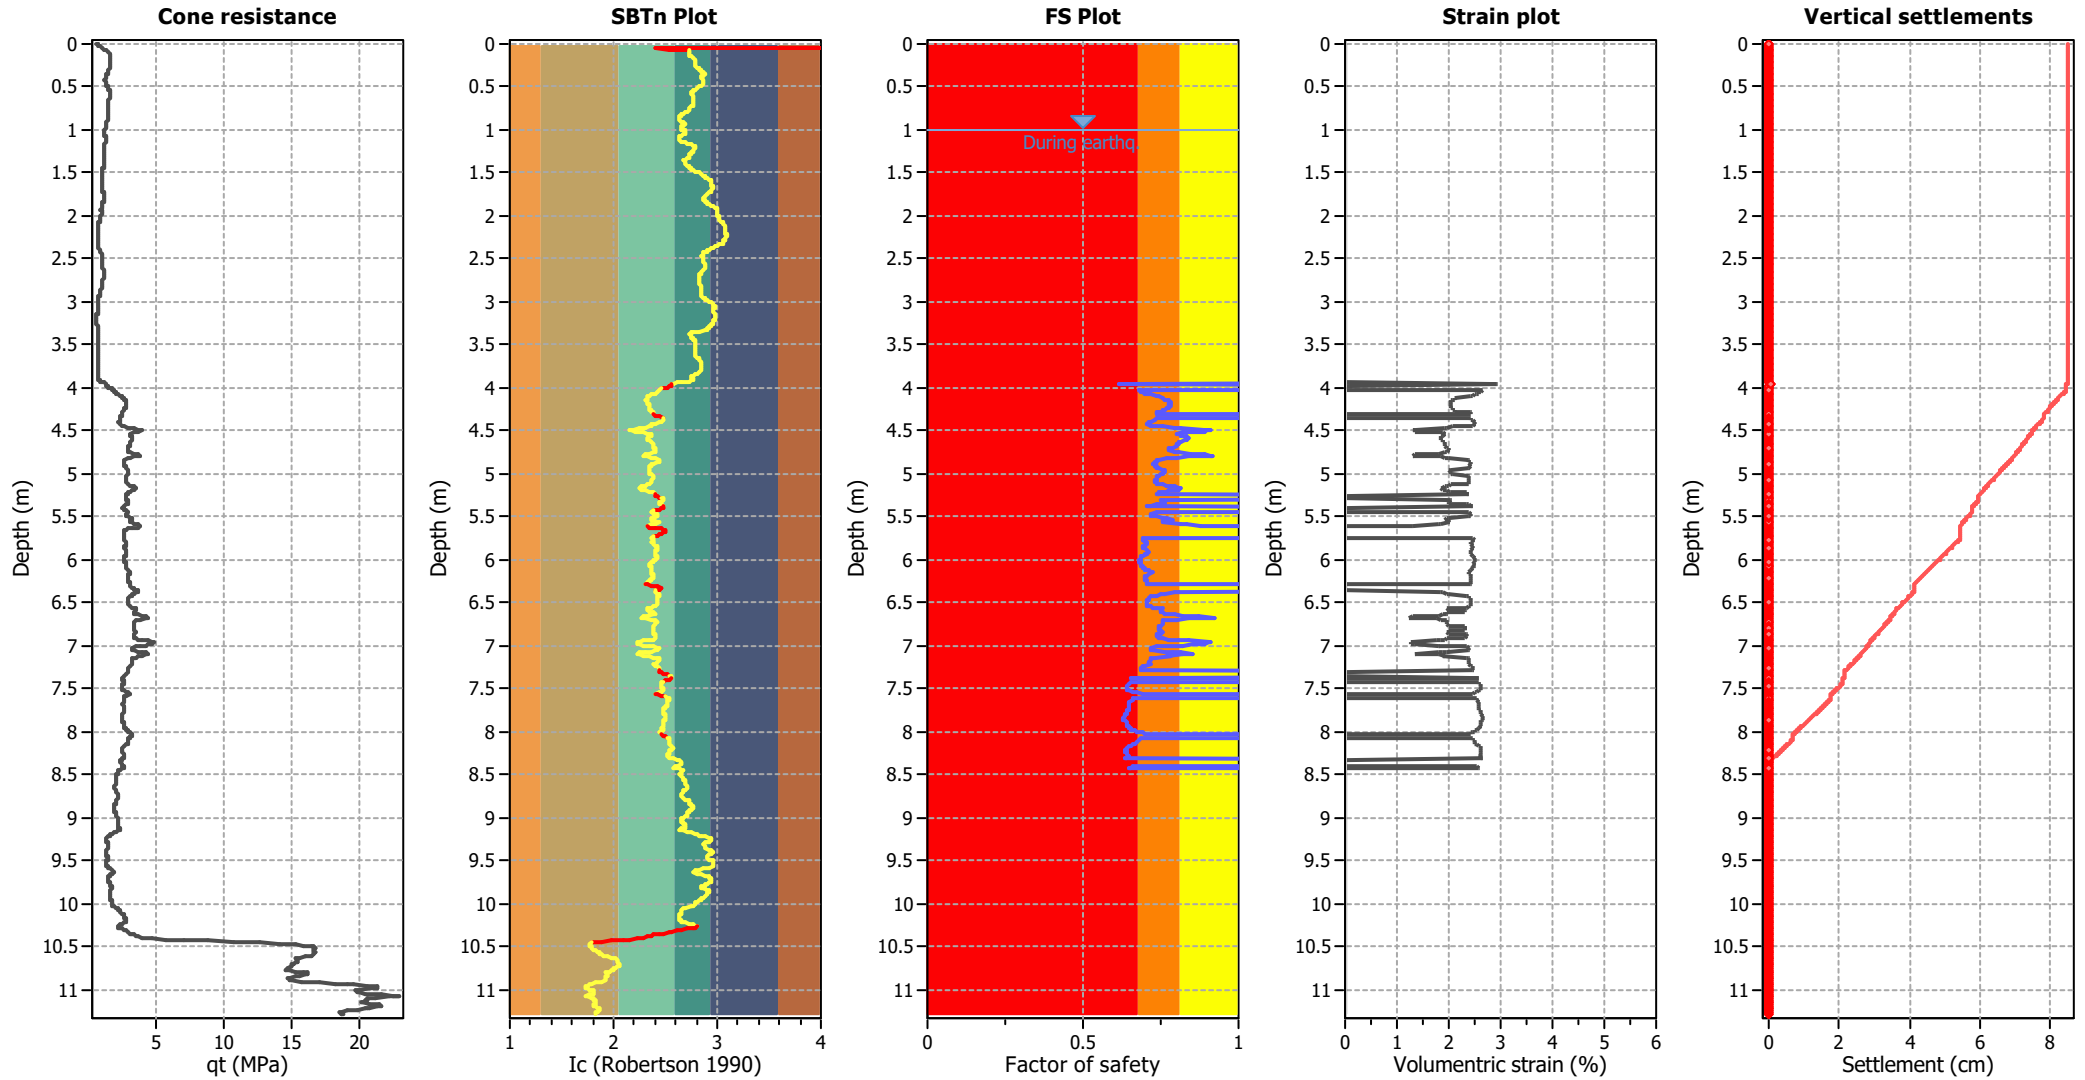

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

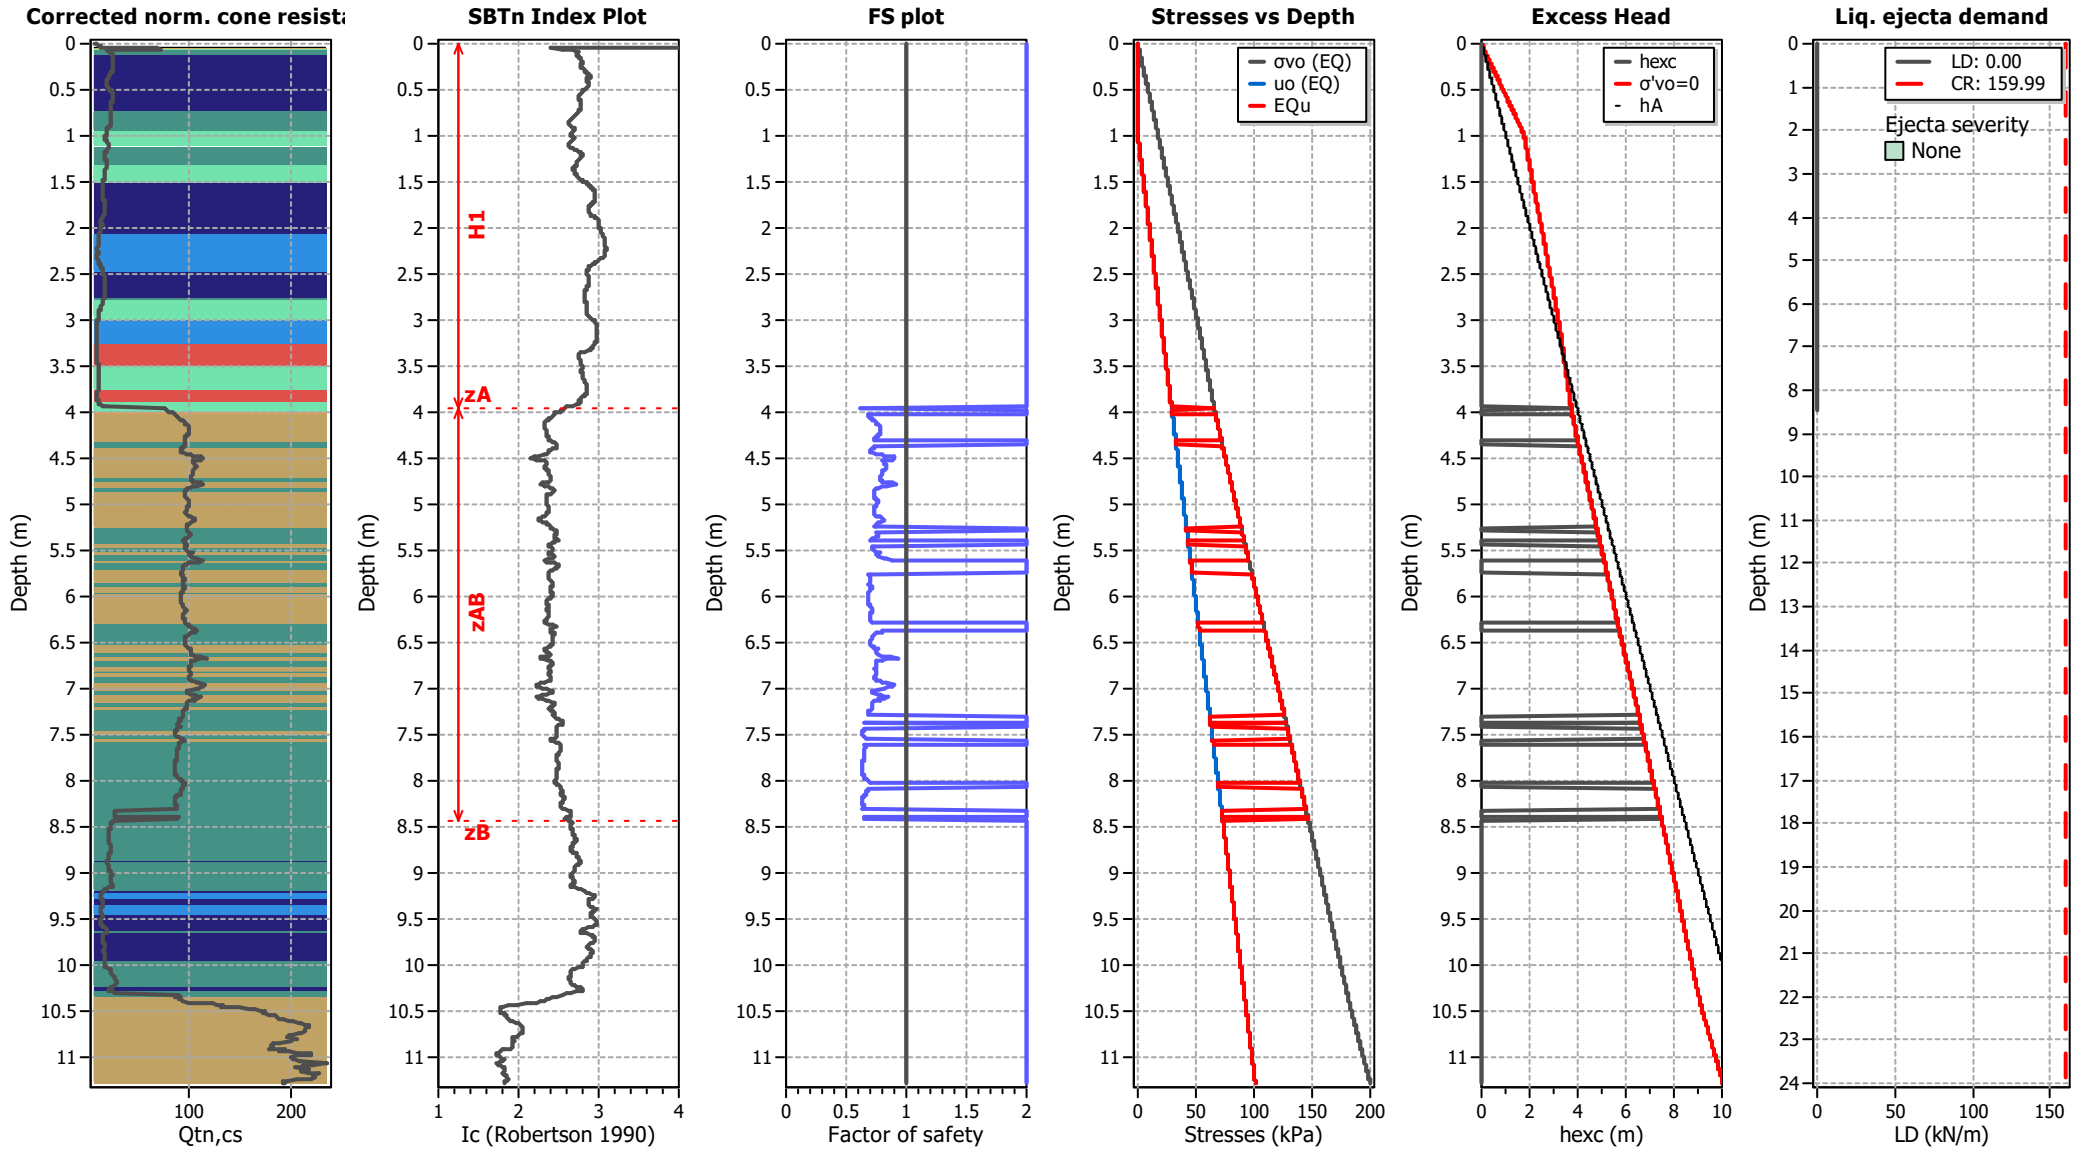

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT410

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

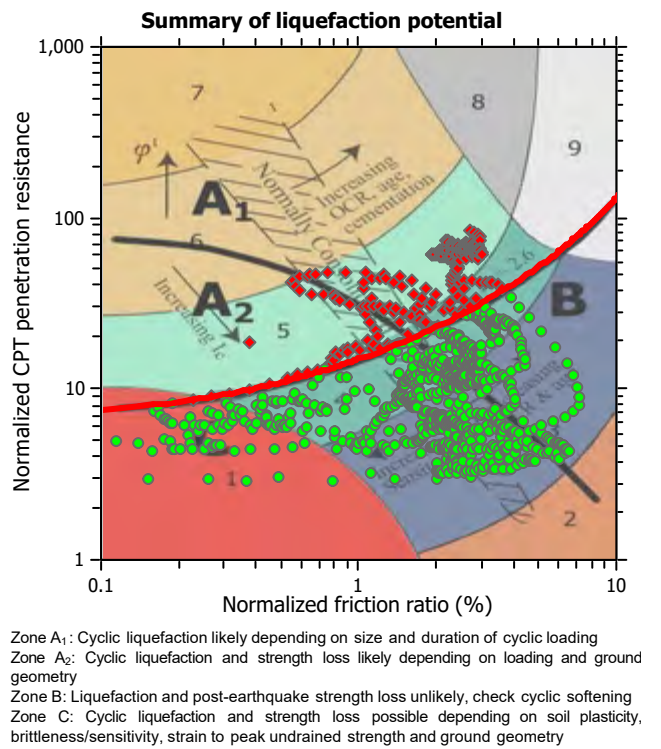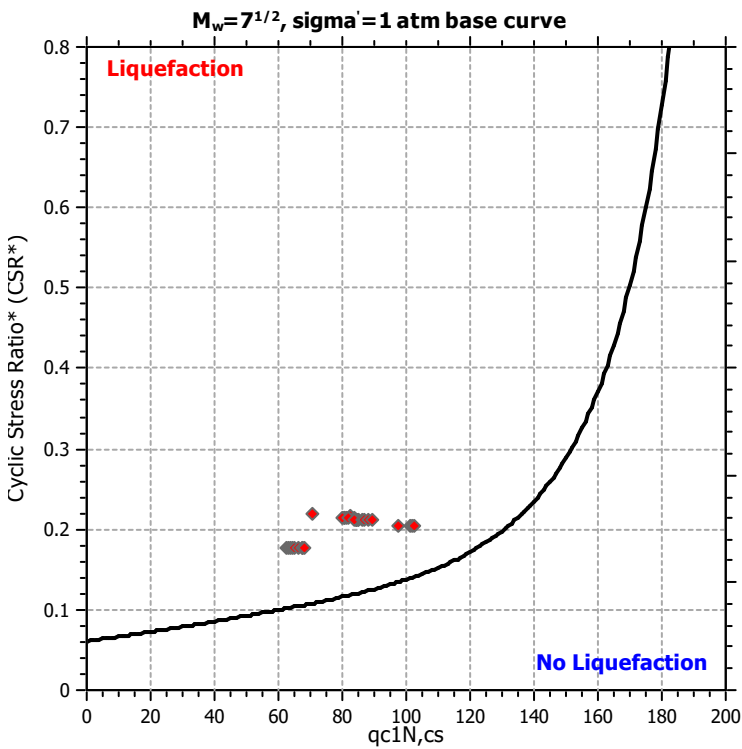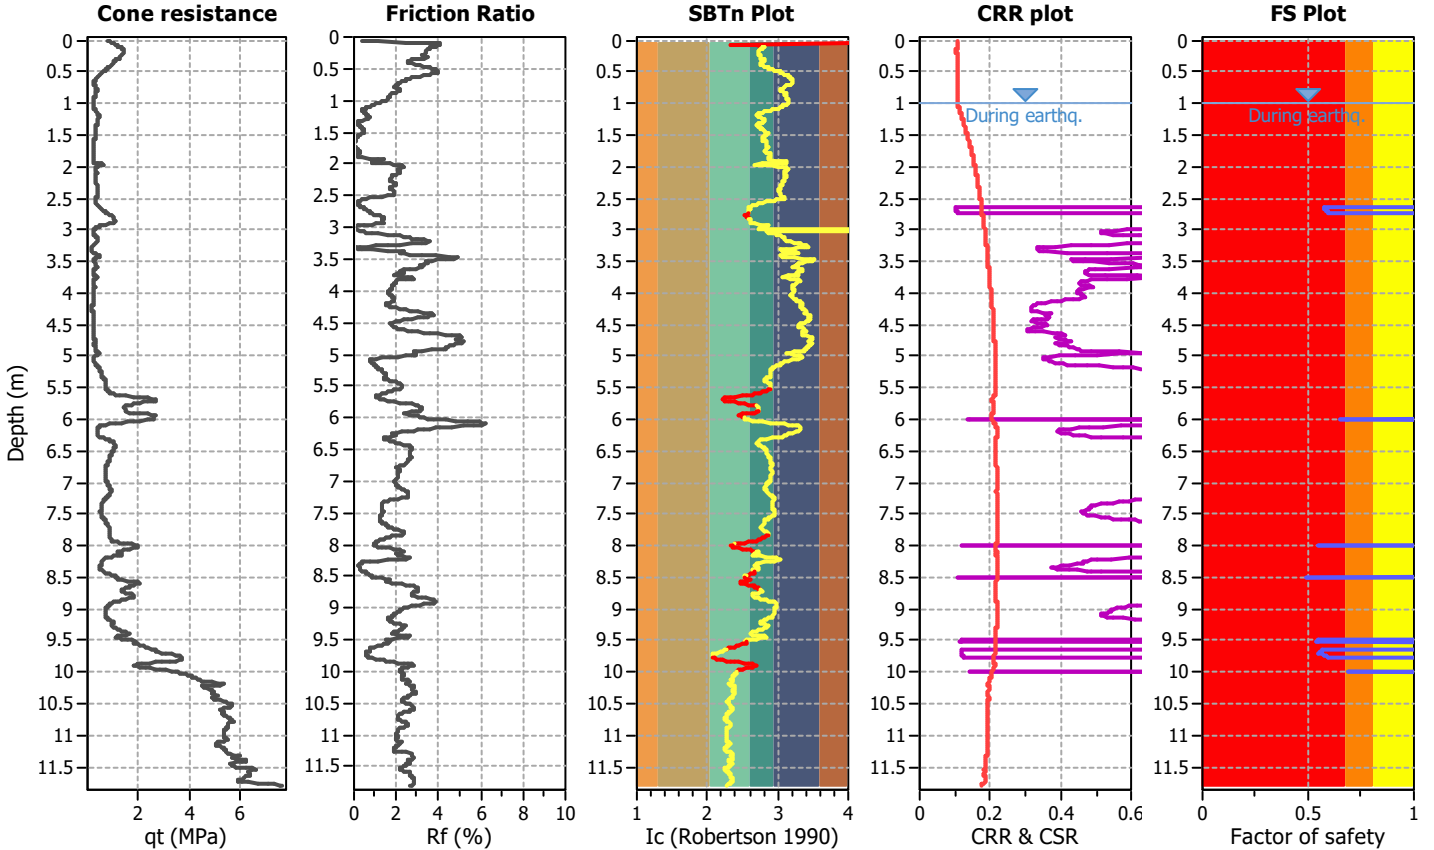

CPT basic interpretation plots

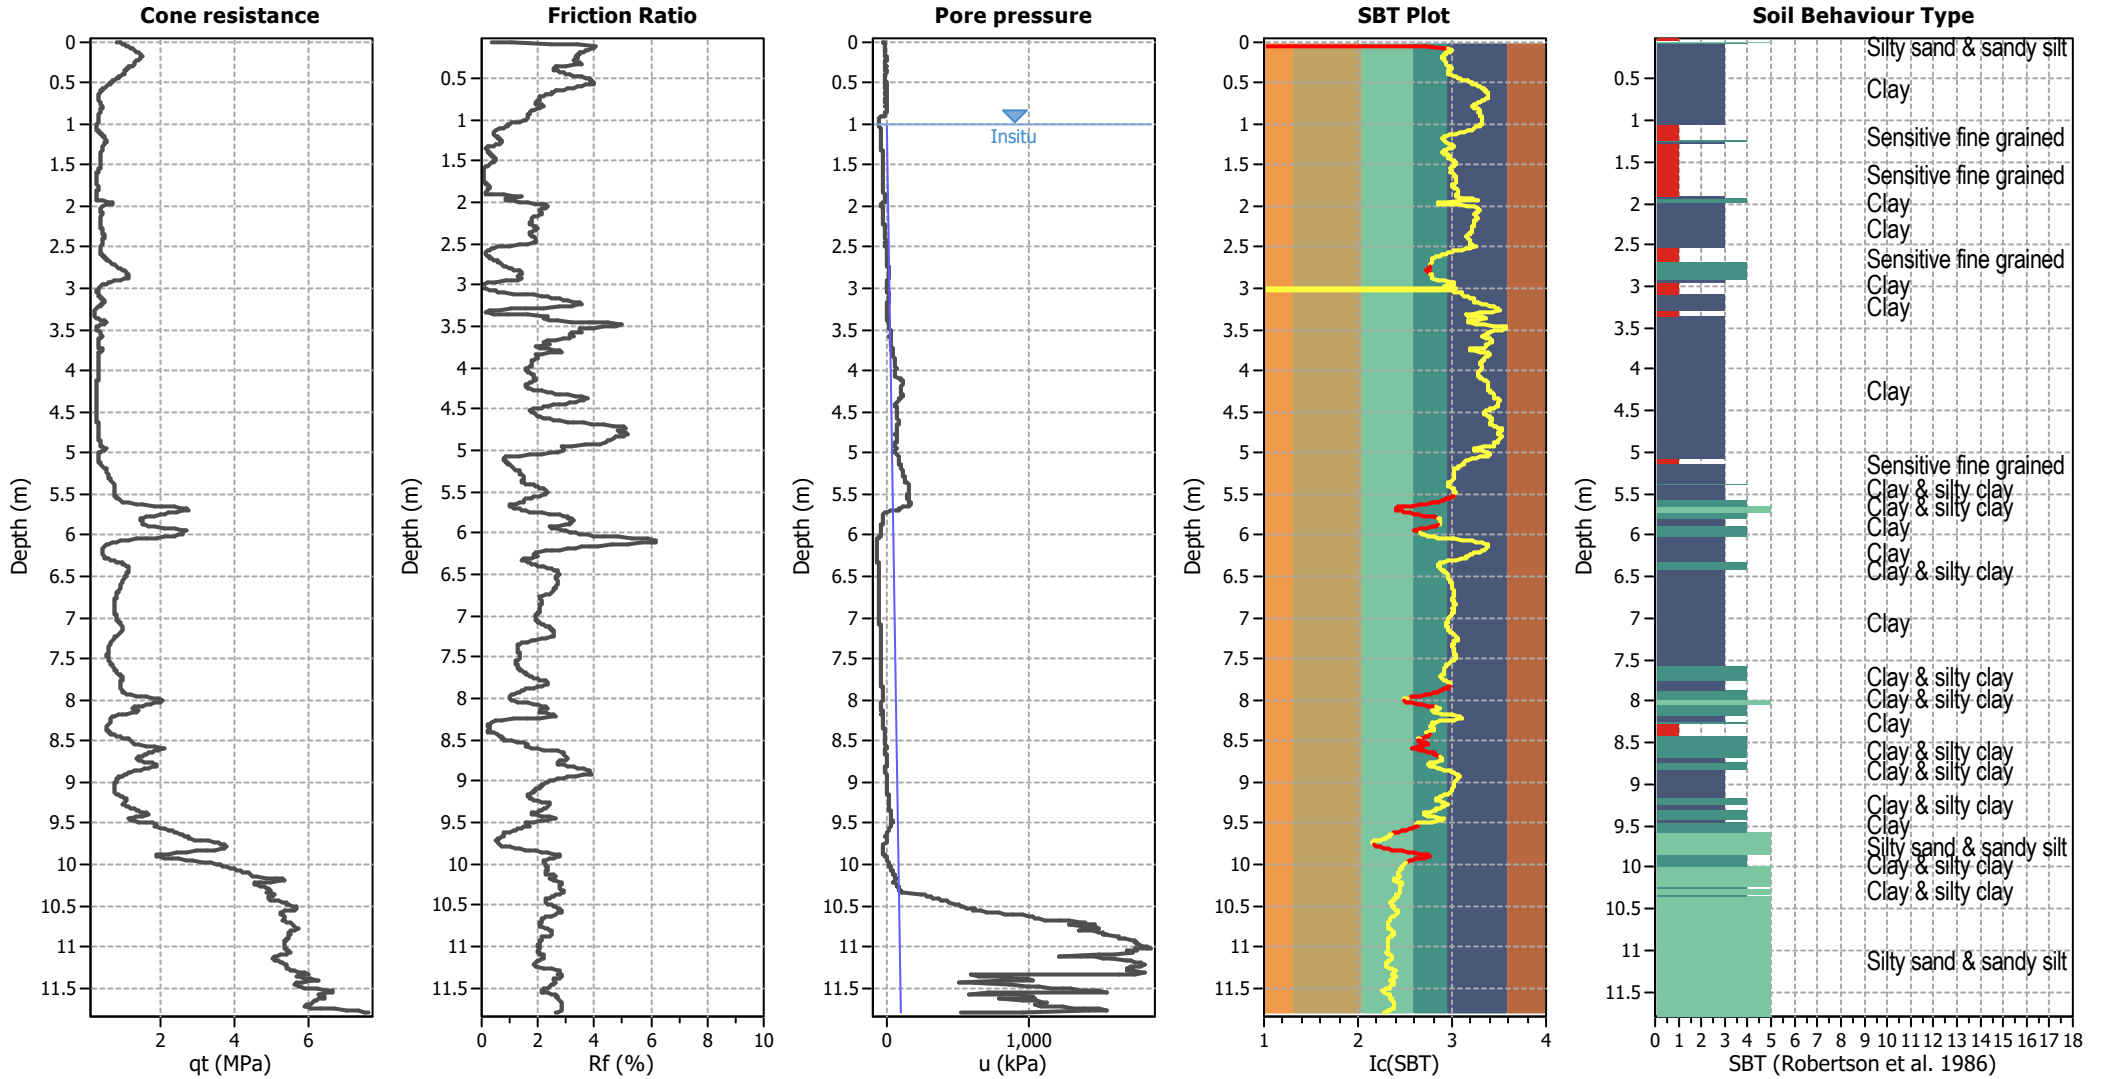


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

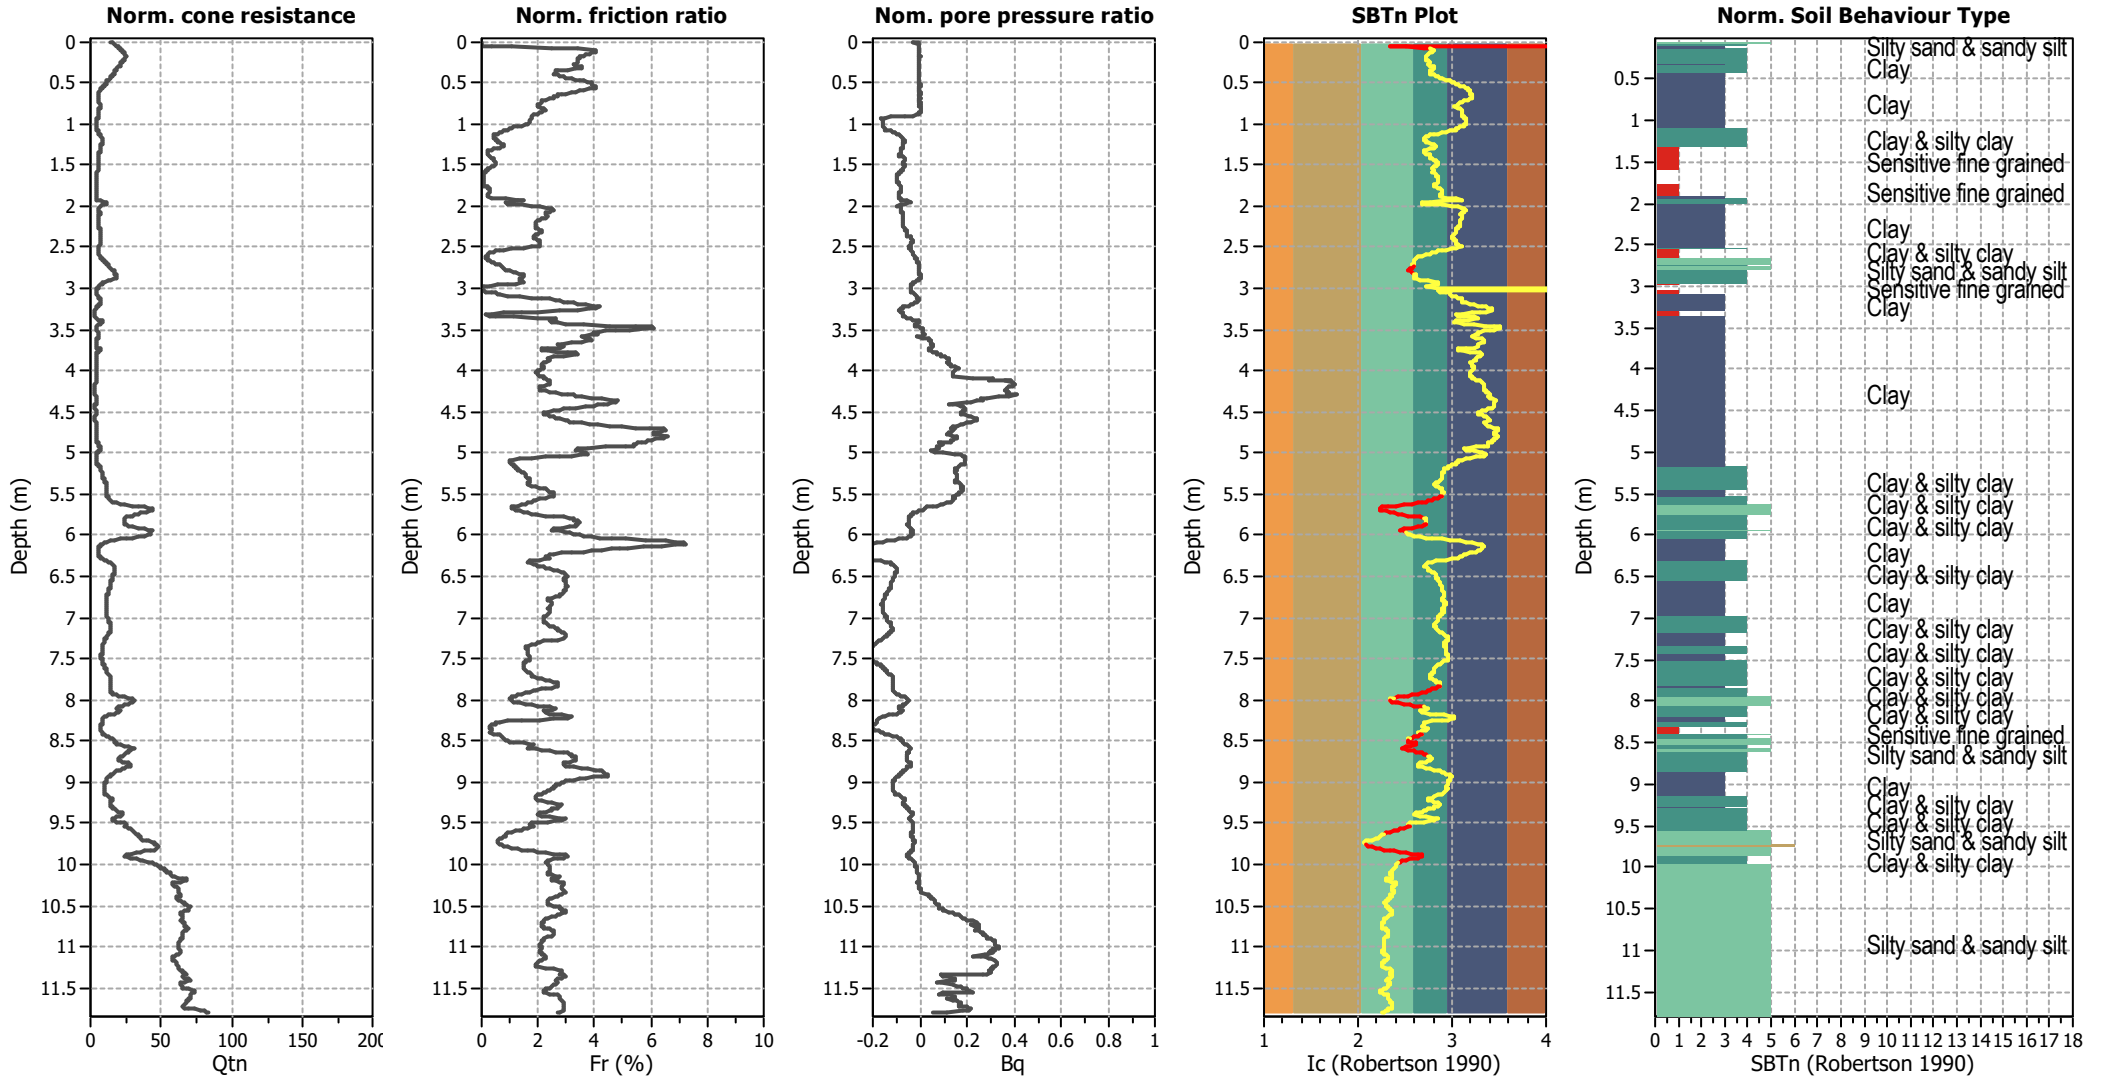


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K ₀ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

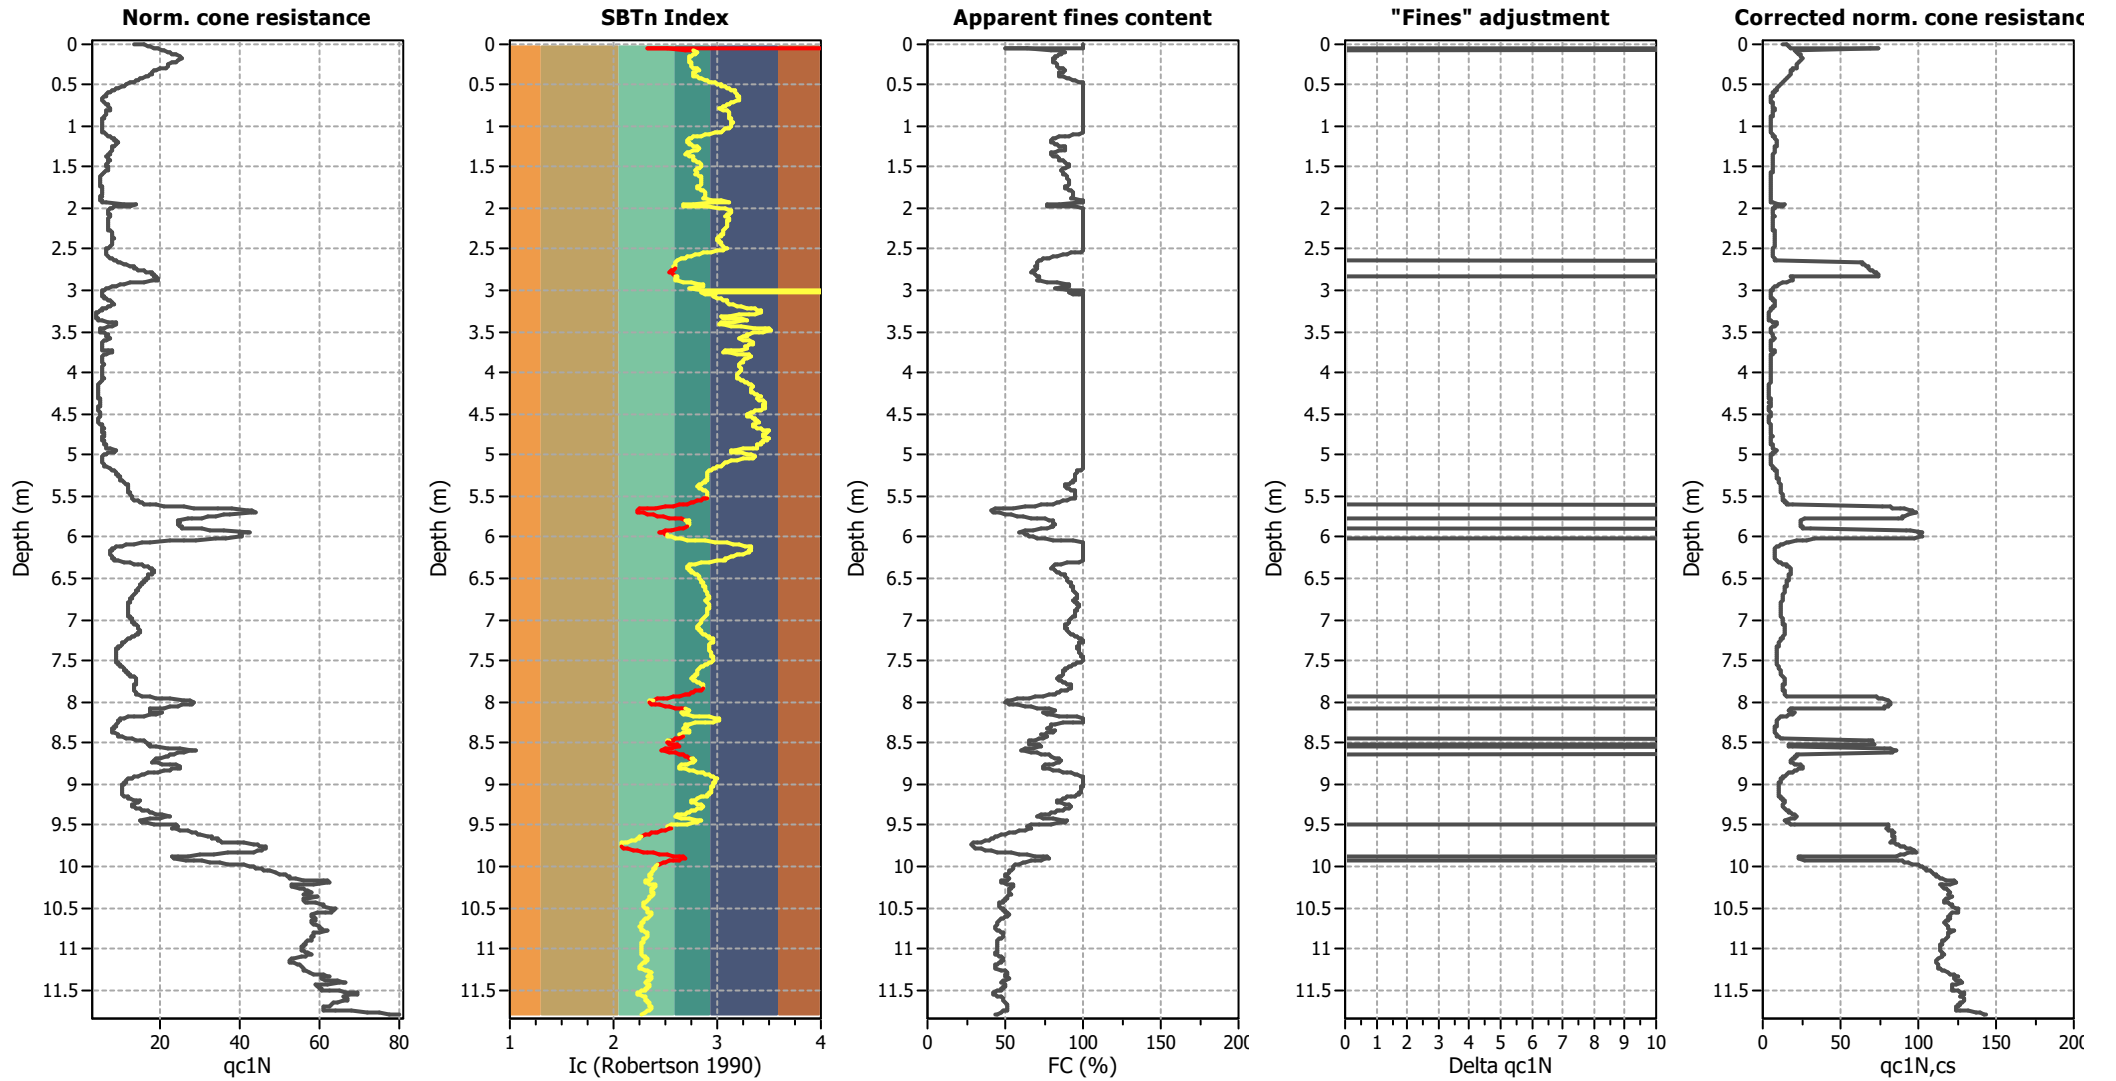

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

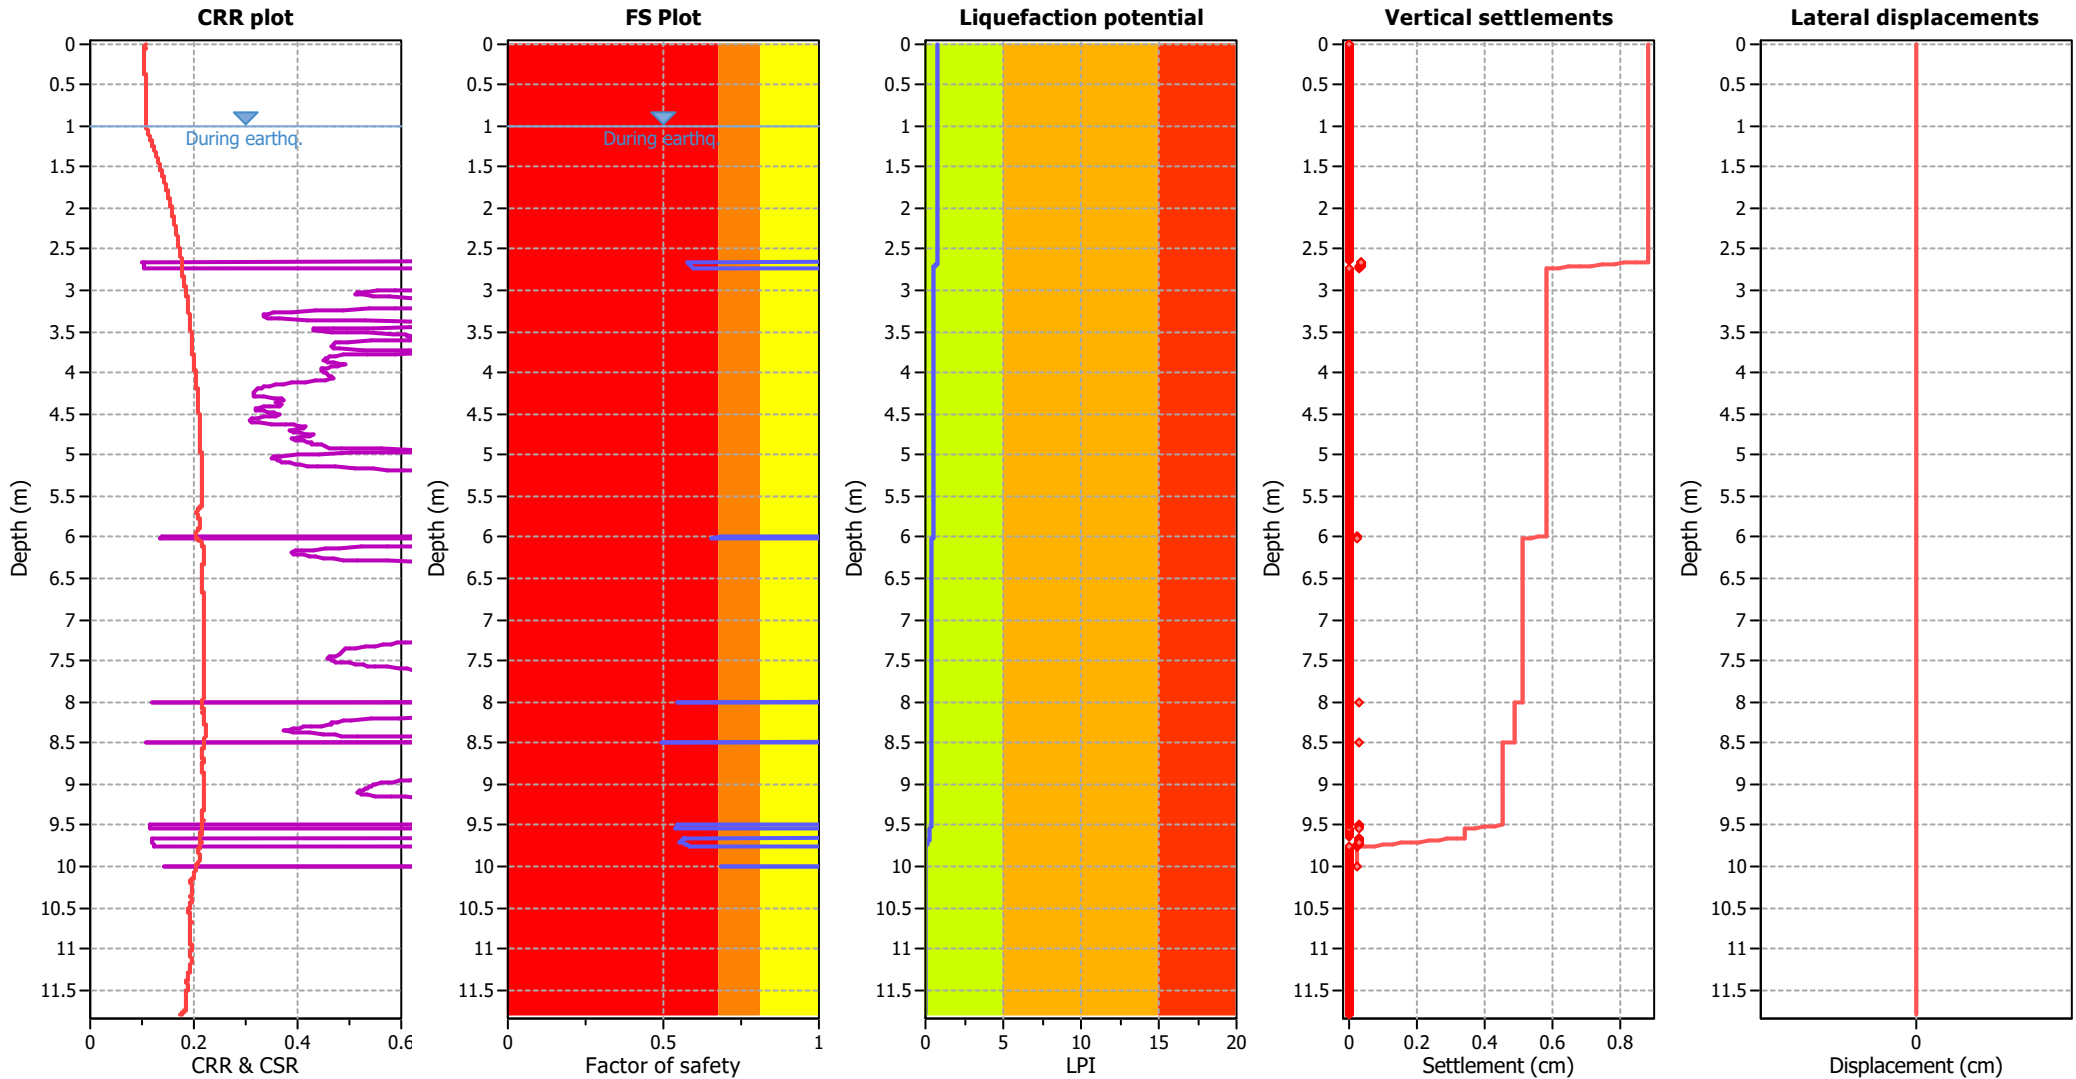

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWL (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

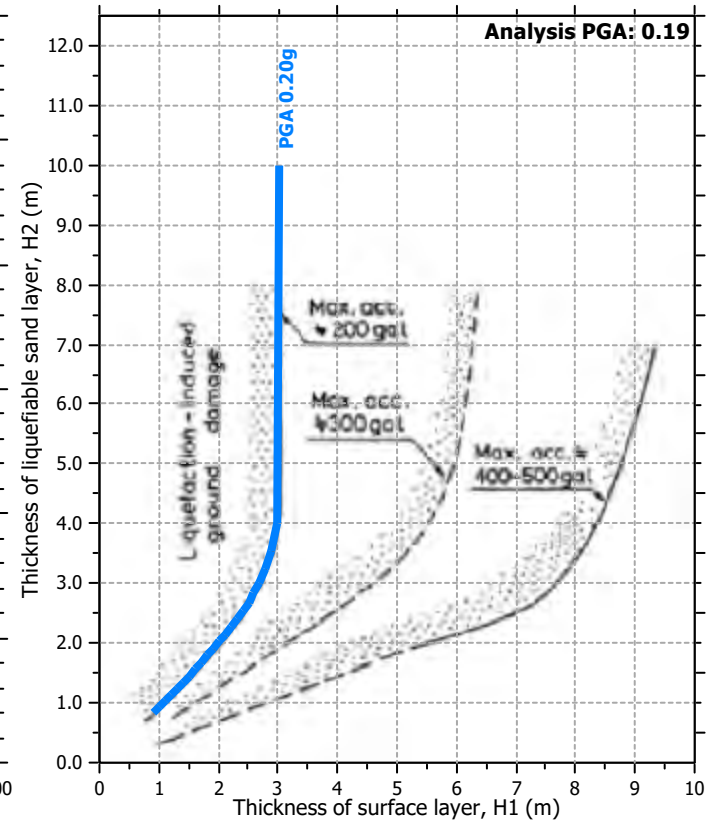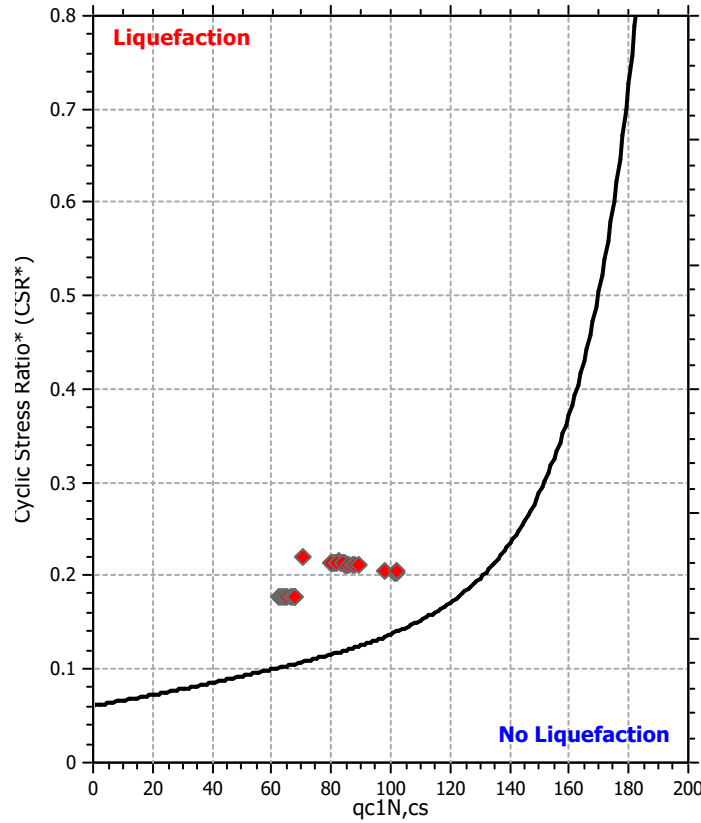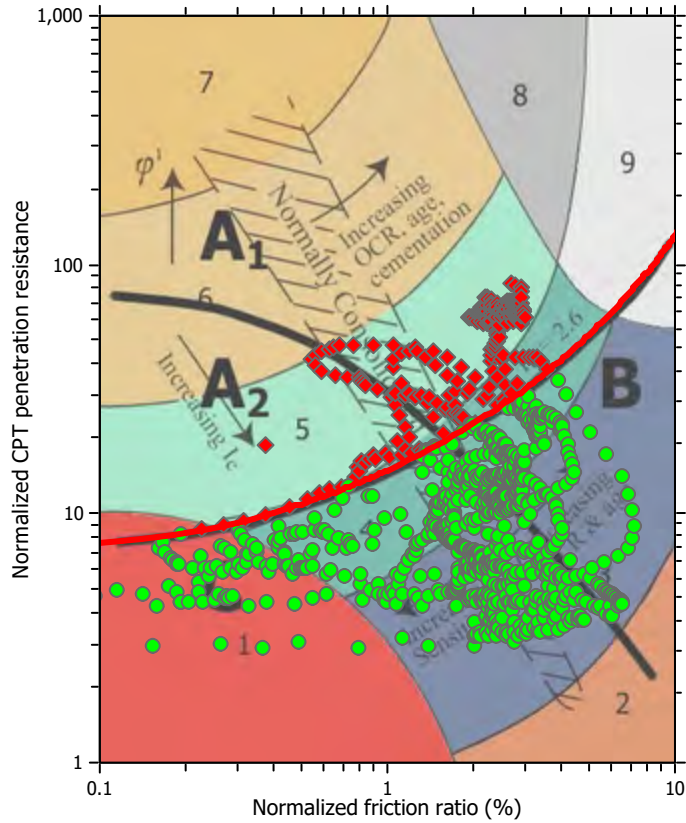

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

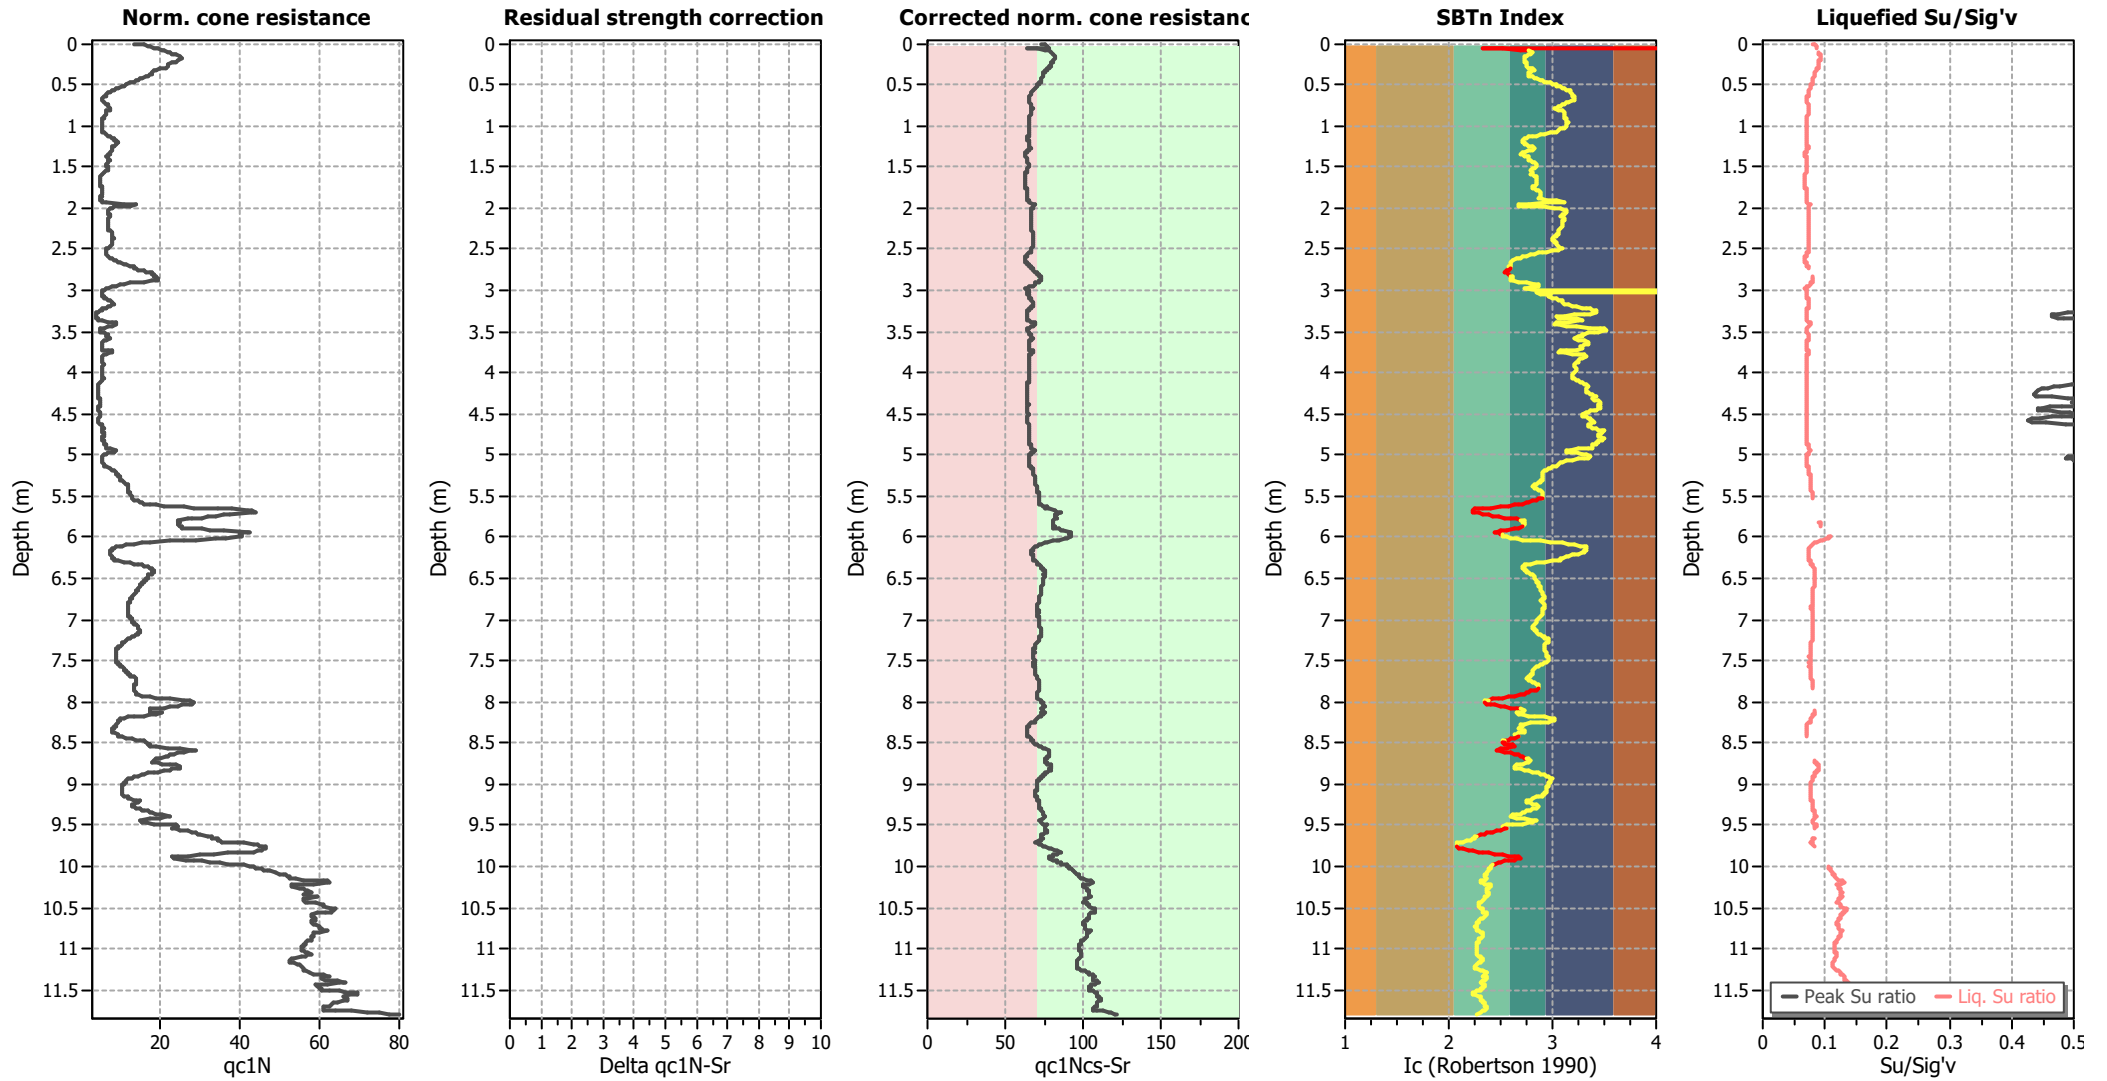

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

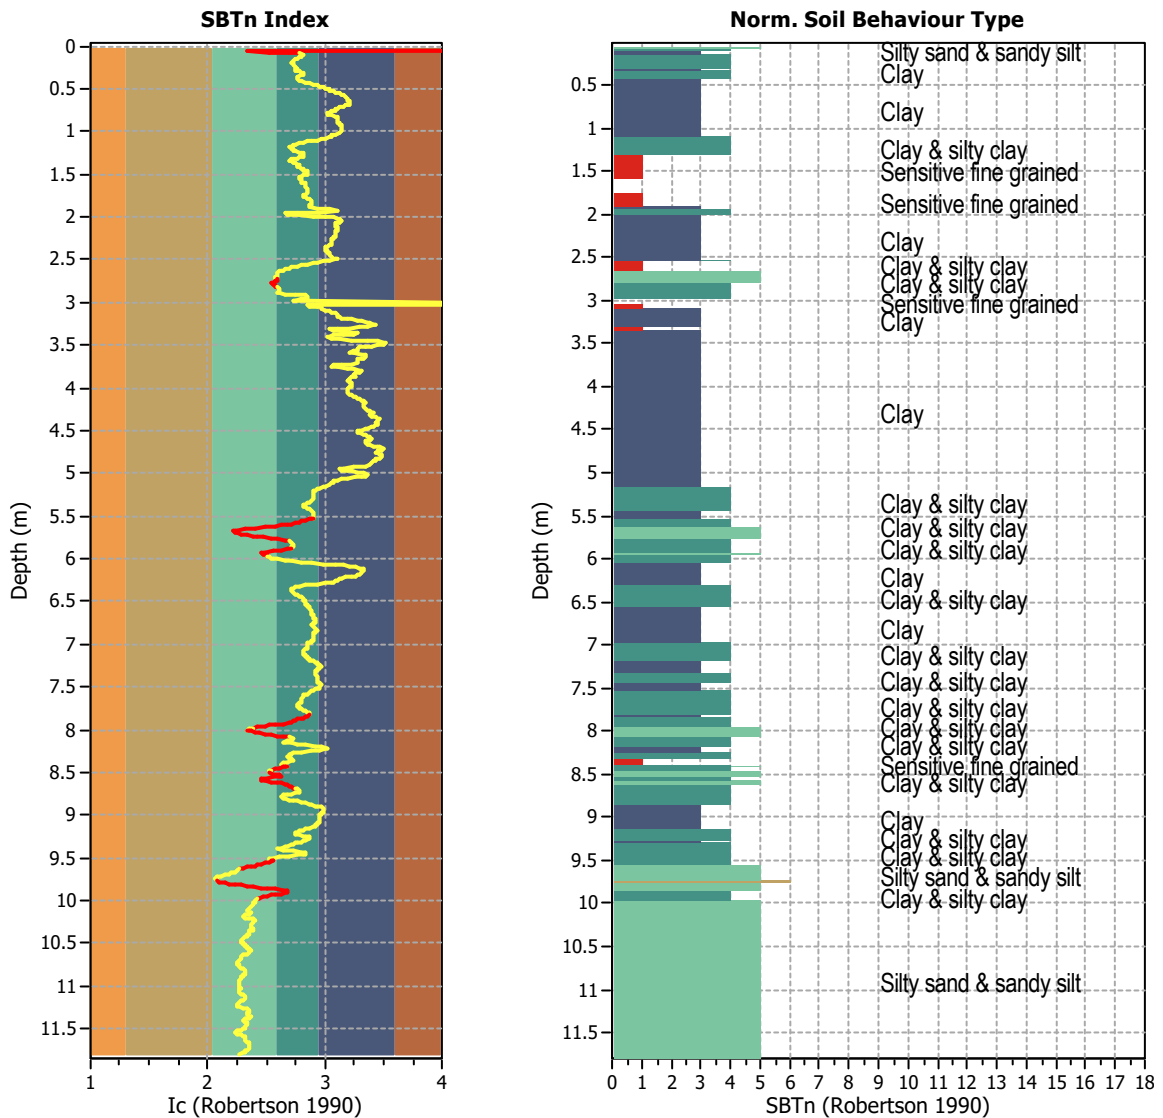


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1180
 Total points excluded: 143
 Exclusion percentage: 12.12%
 Number of layers detected: 16


Estimation of post-earthquake settlements

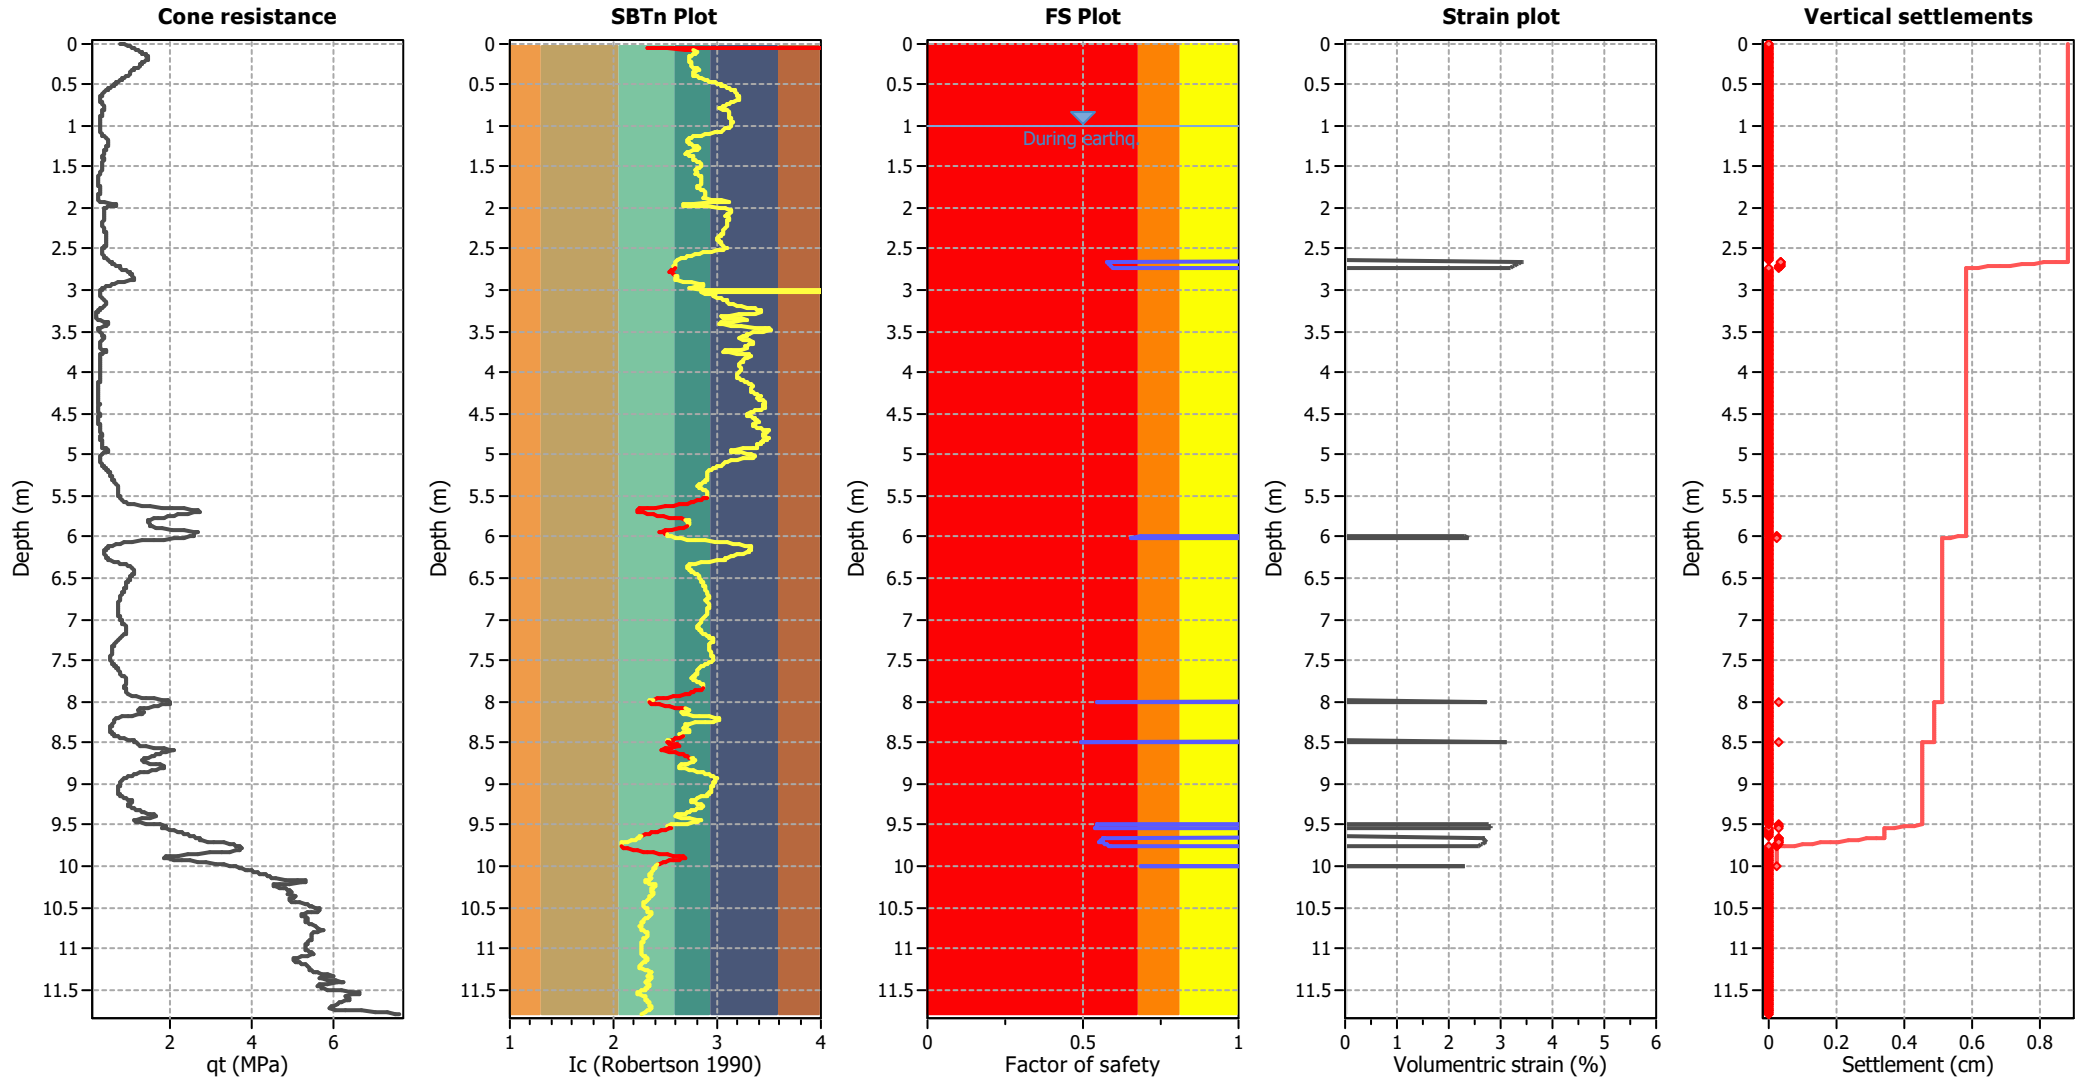

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

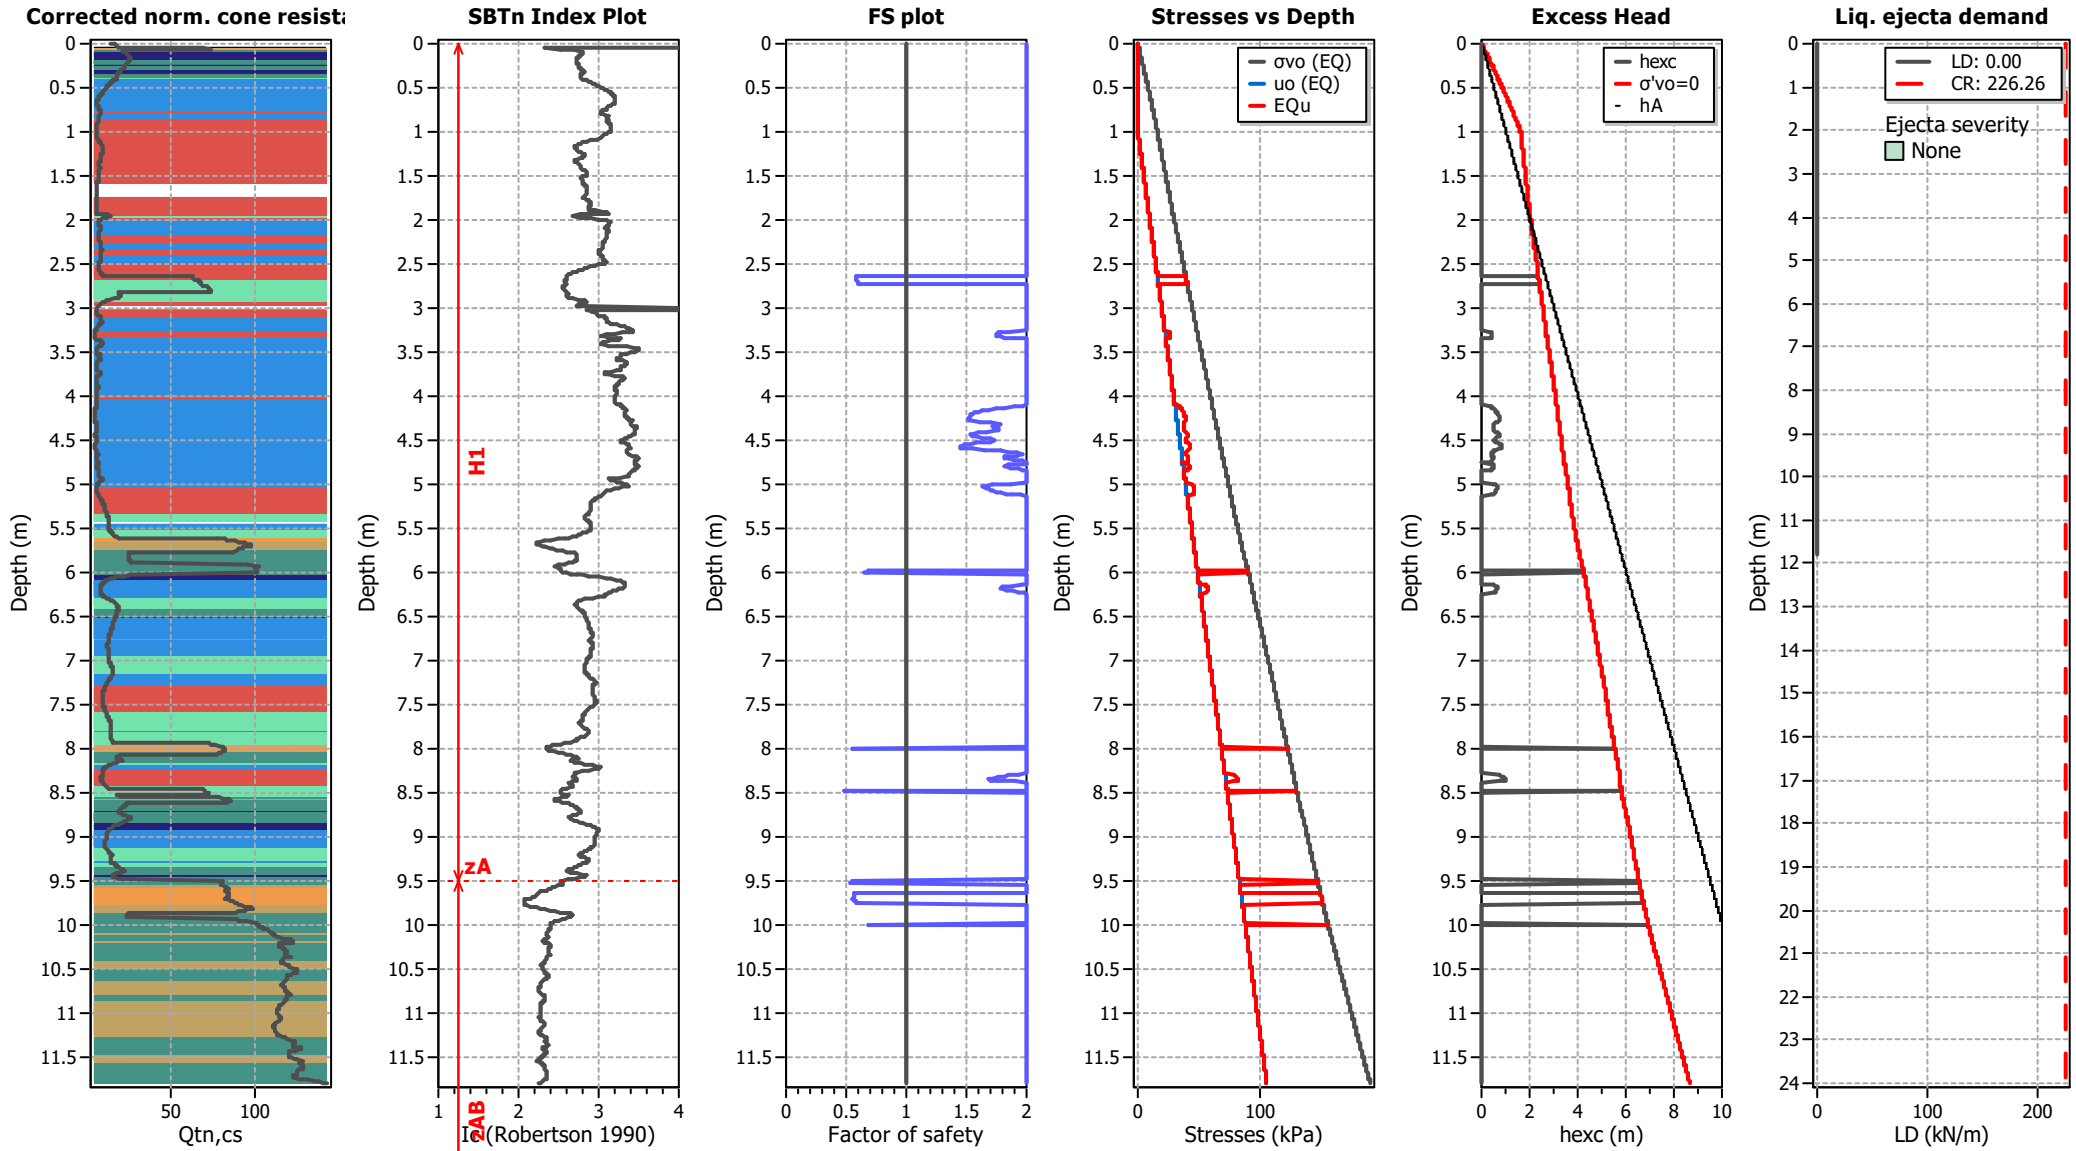

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT411

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

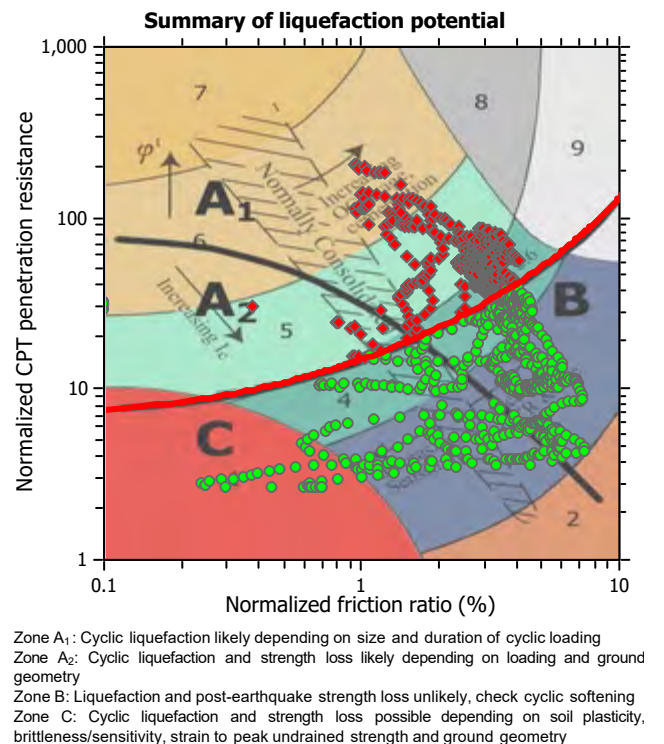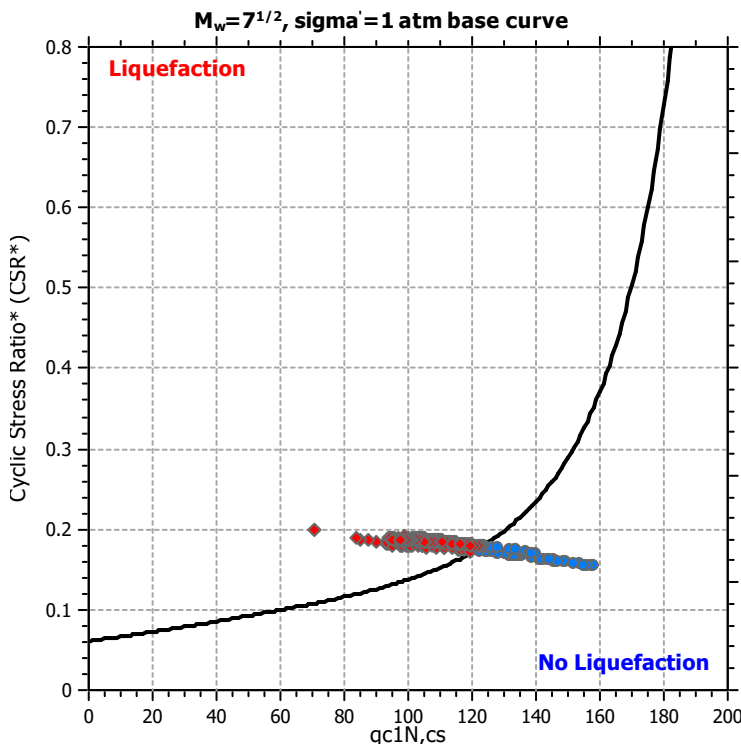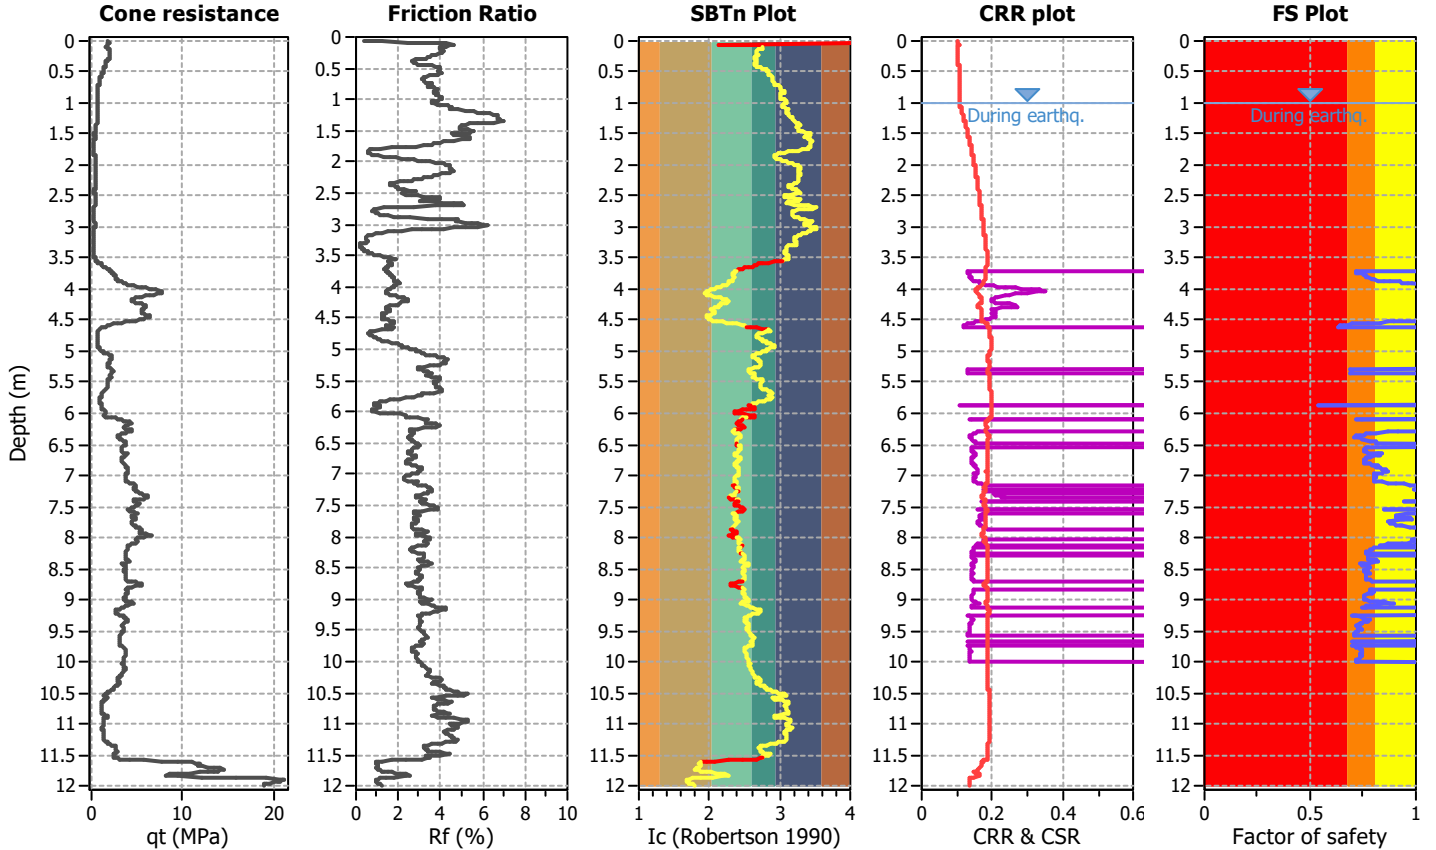

CPT basic interpretation plots

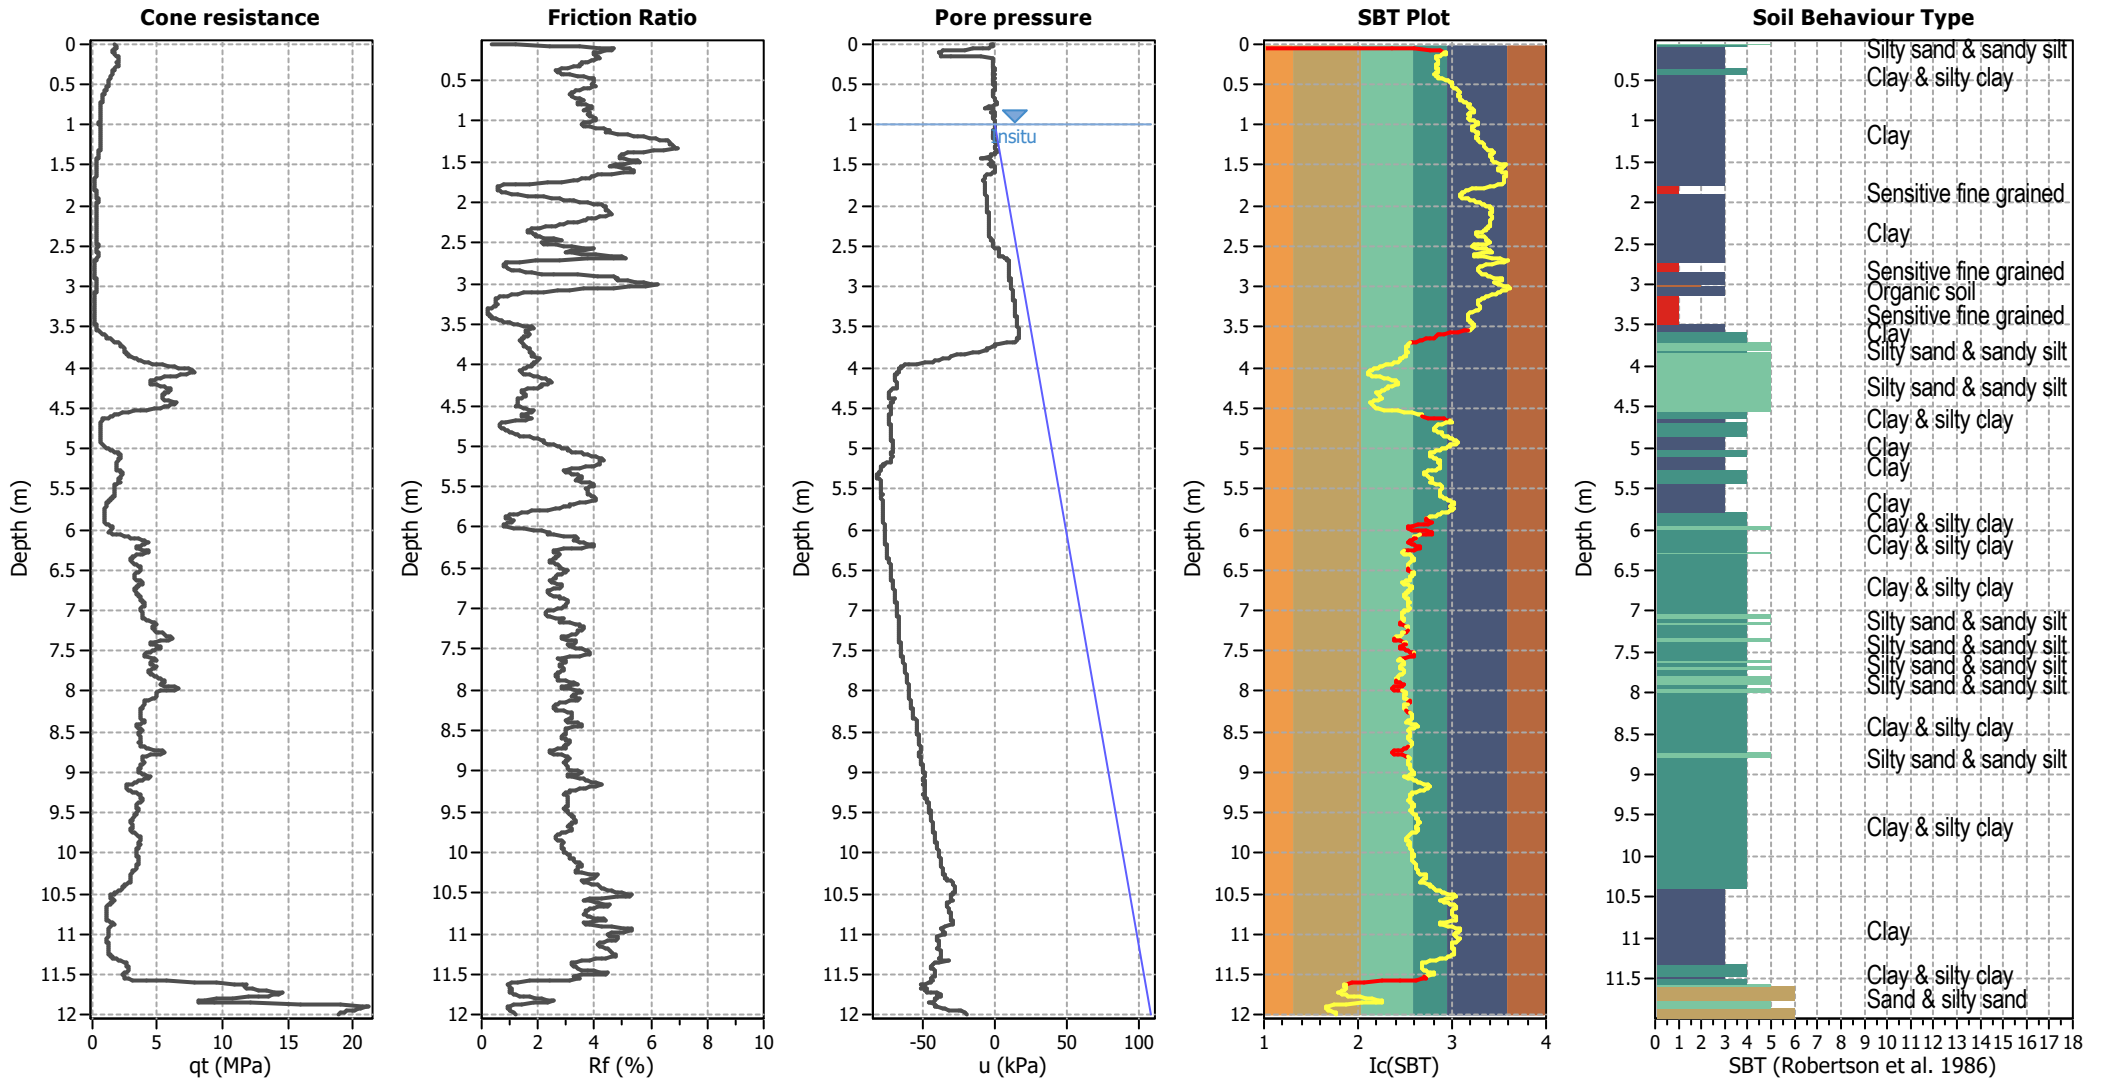


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

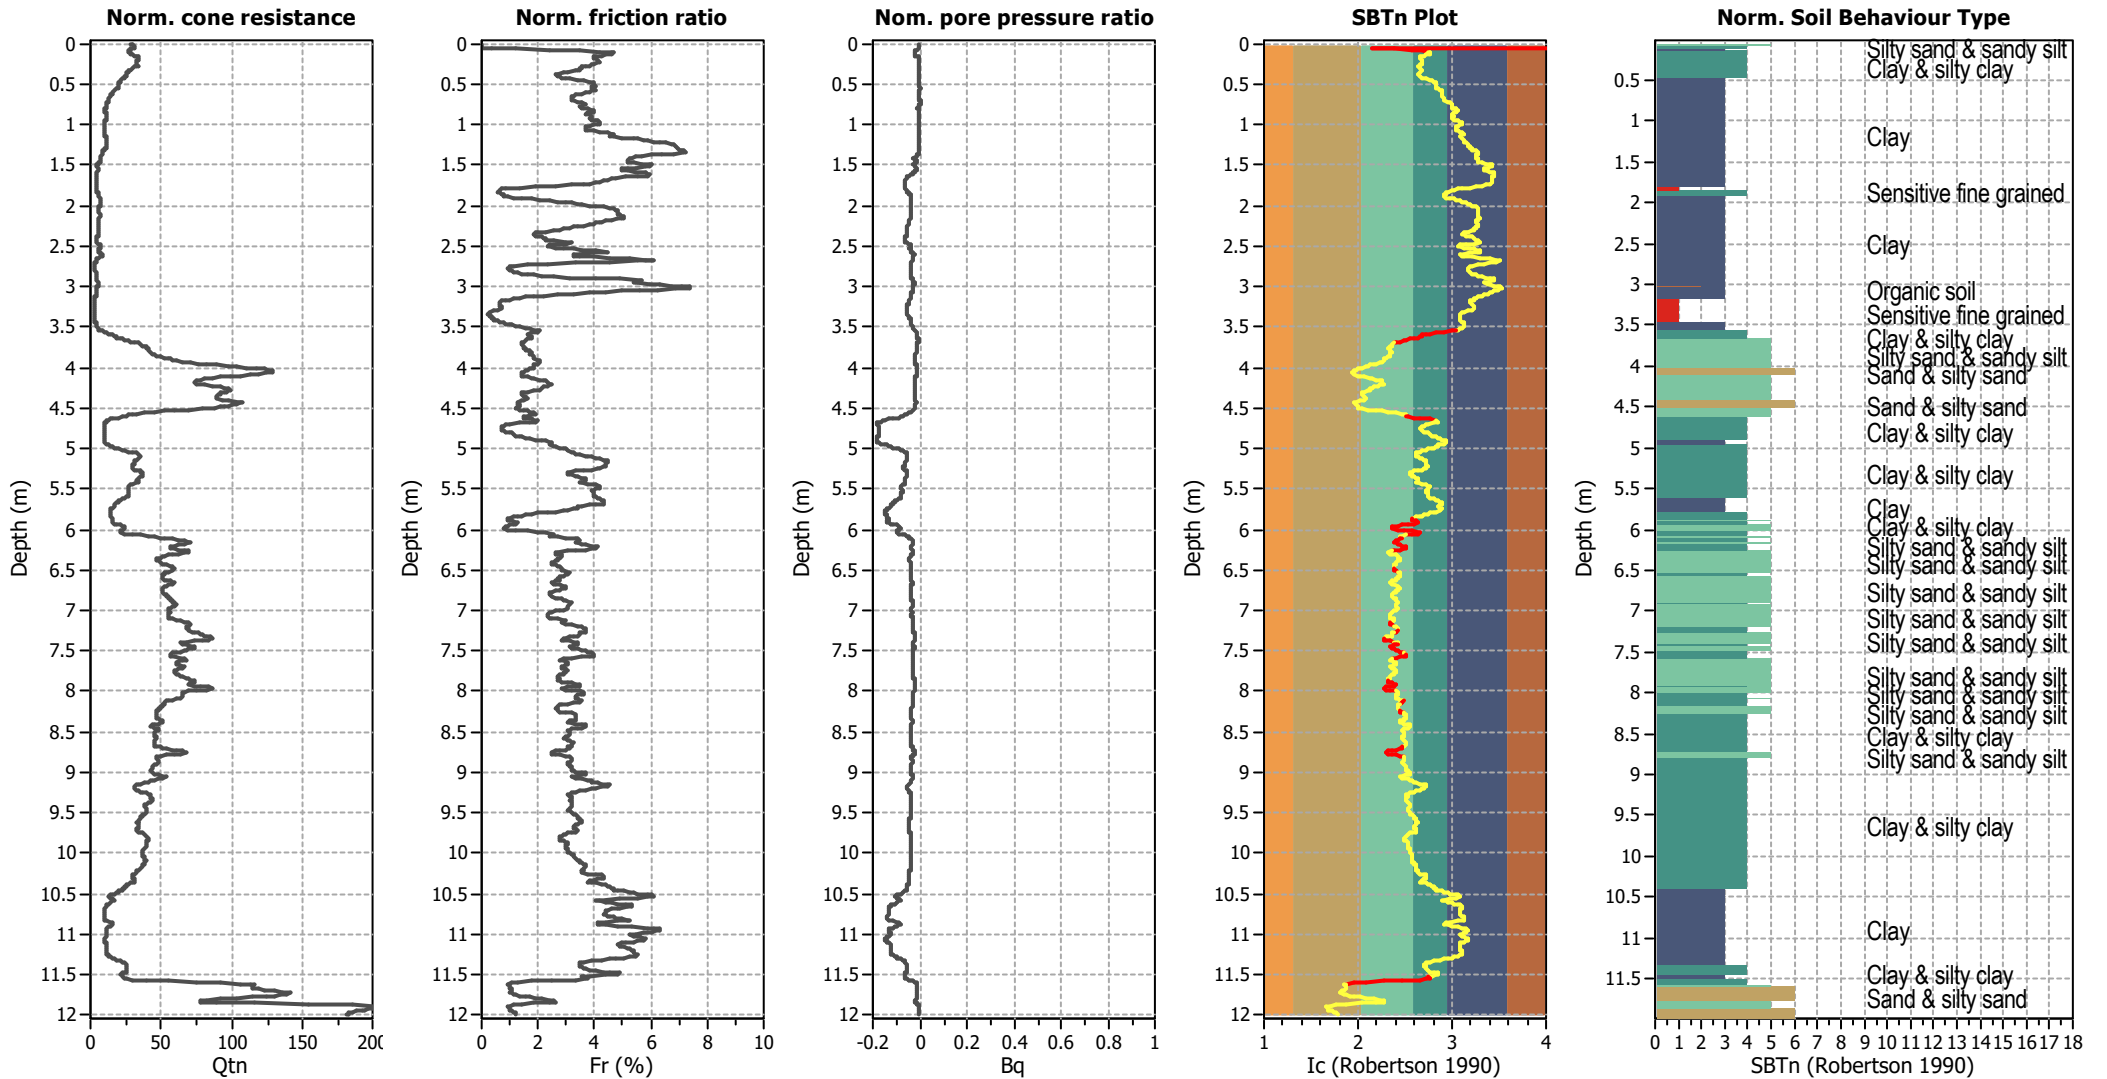


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

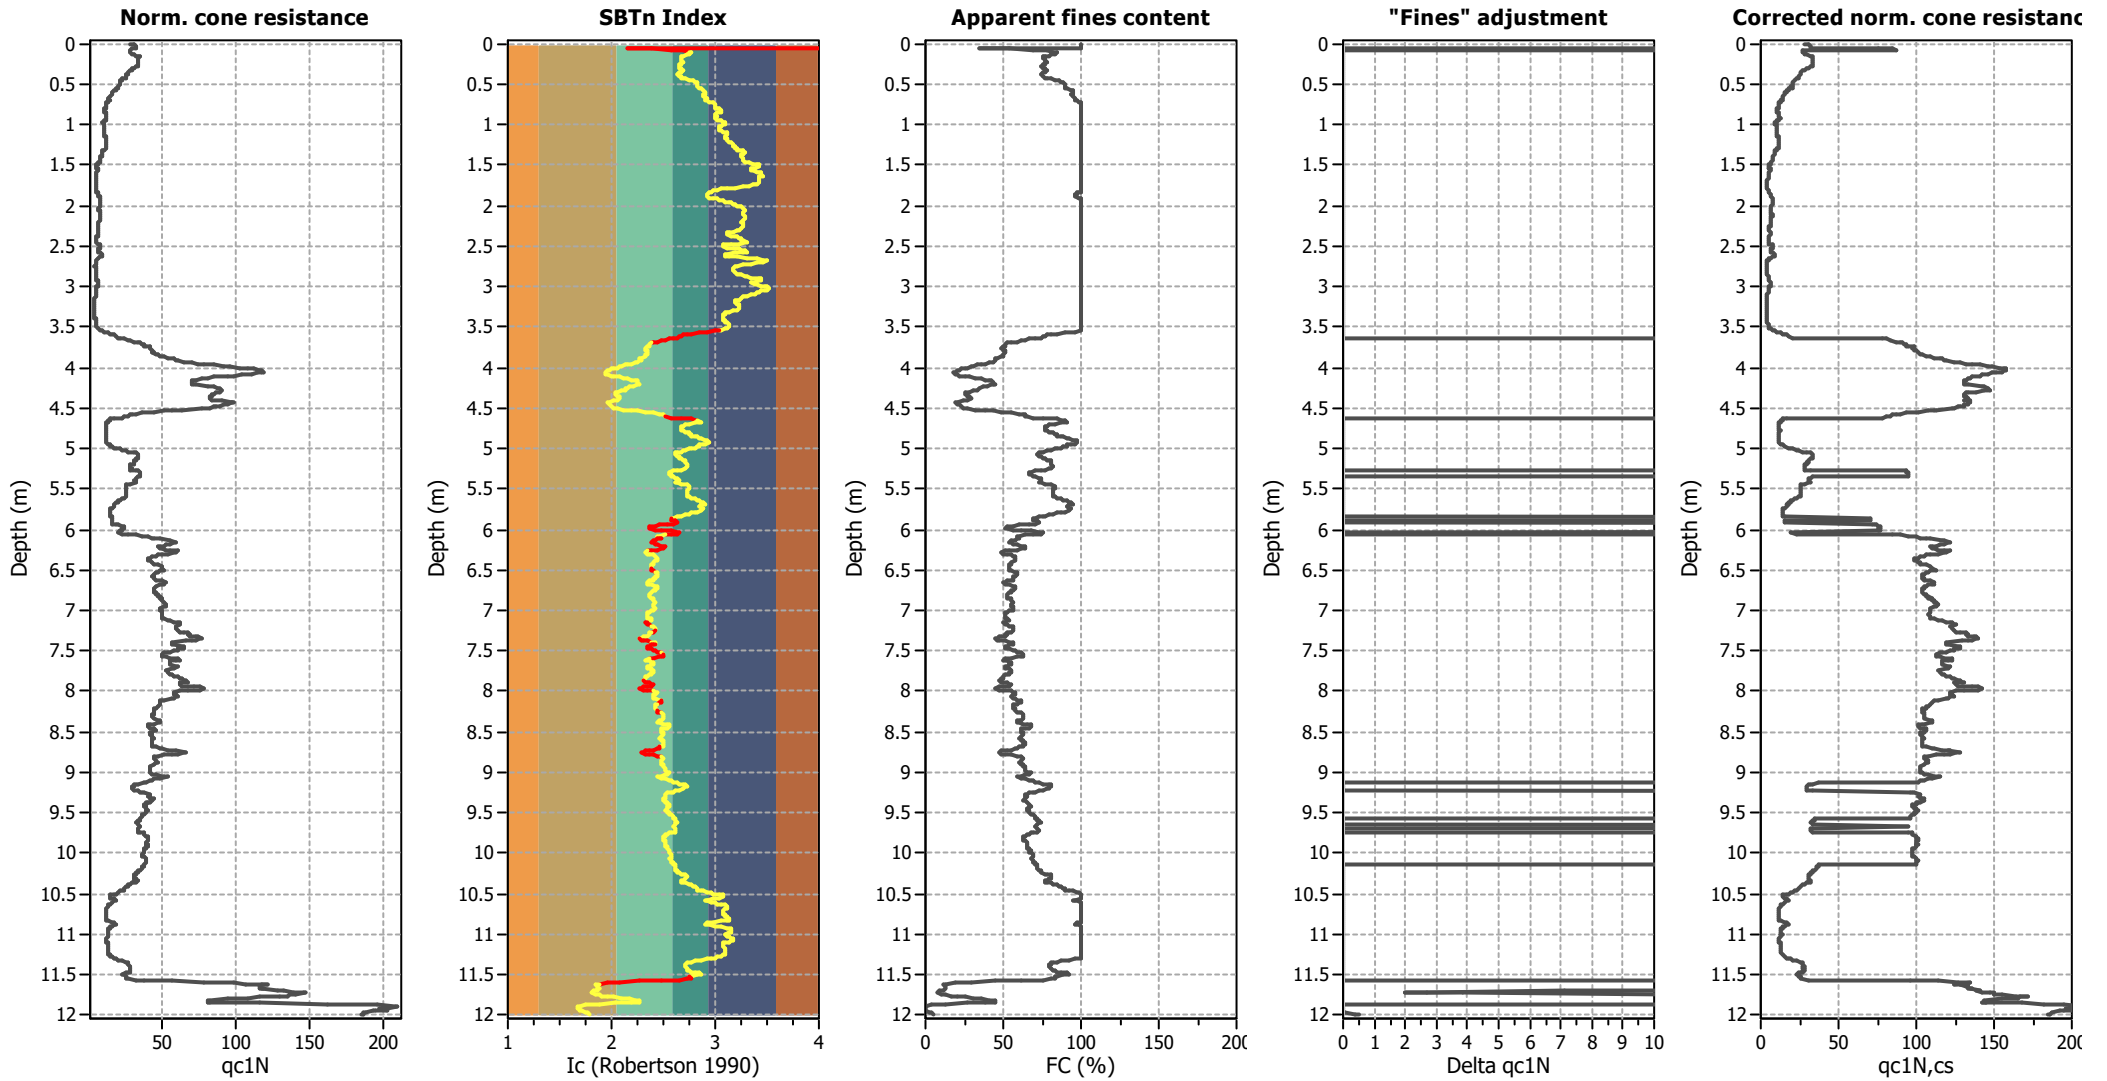

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

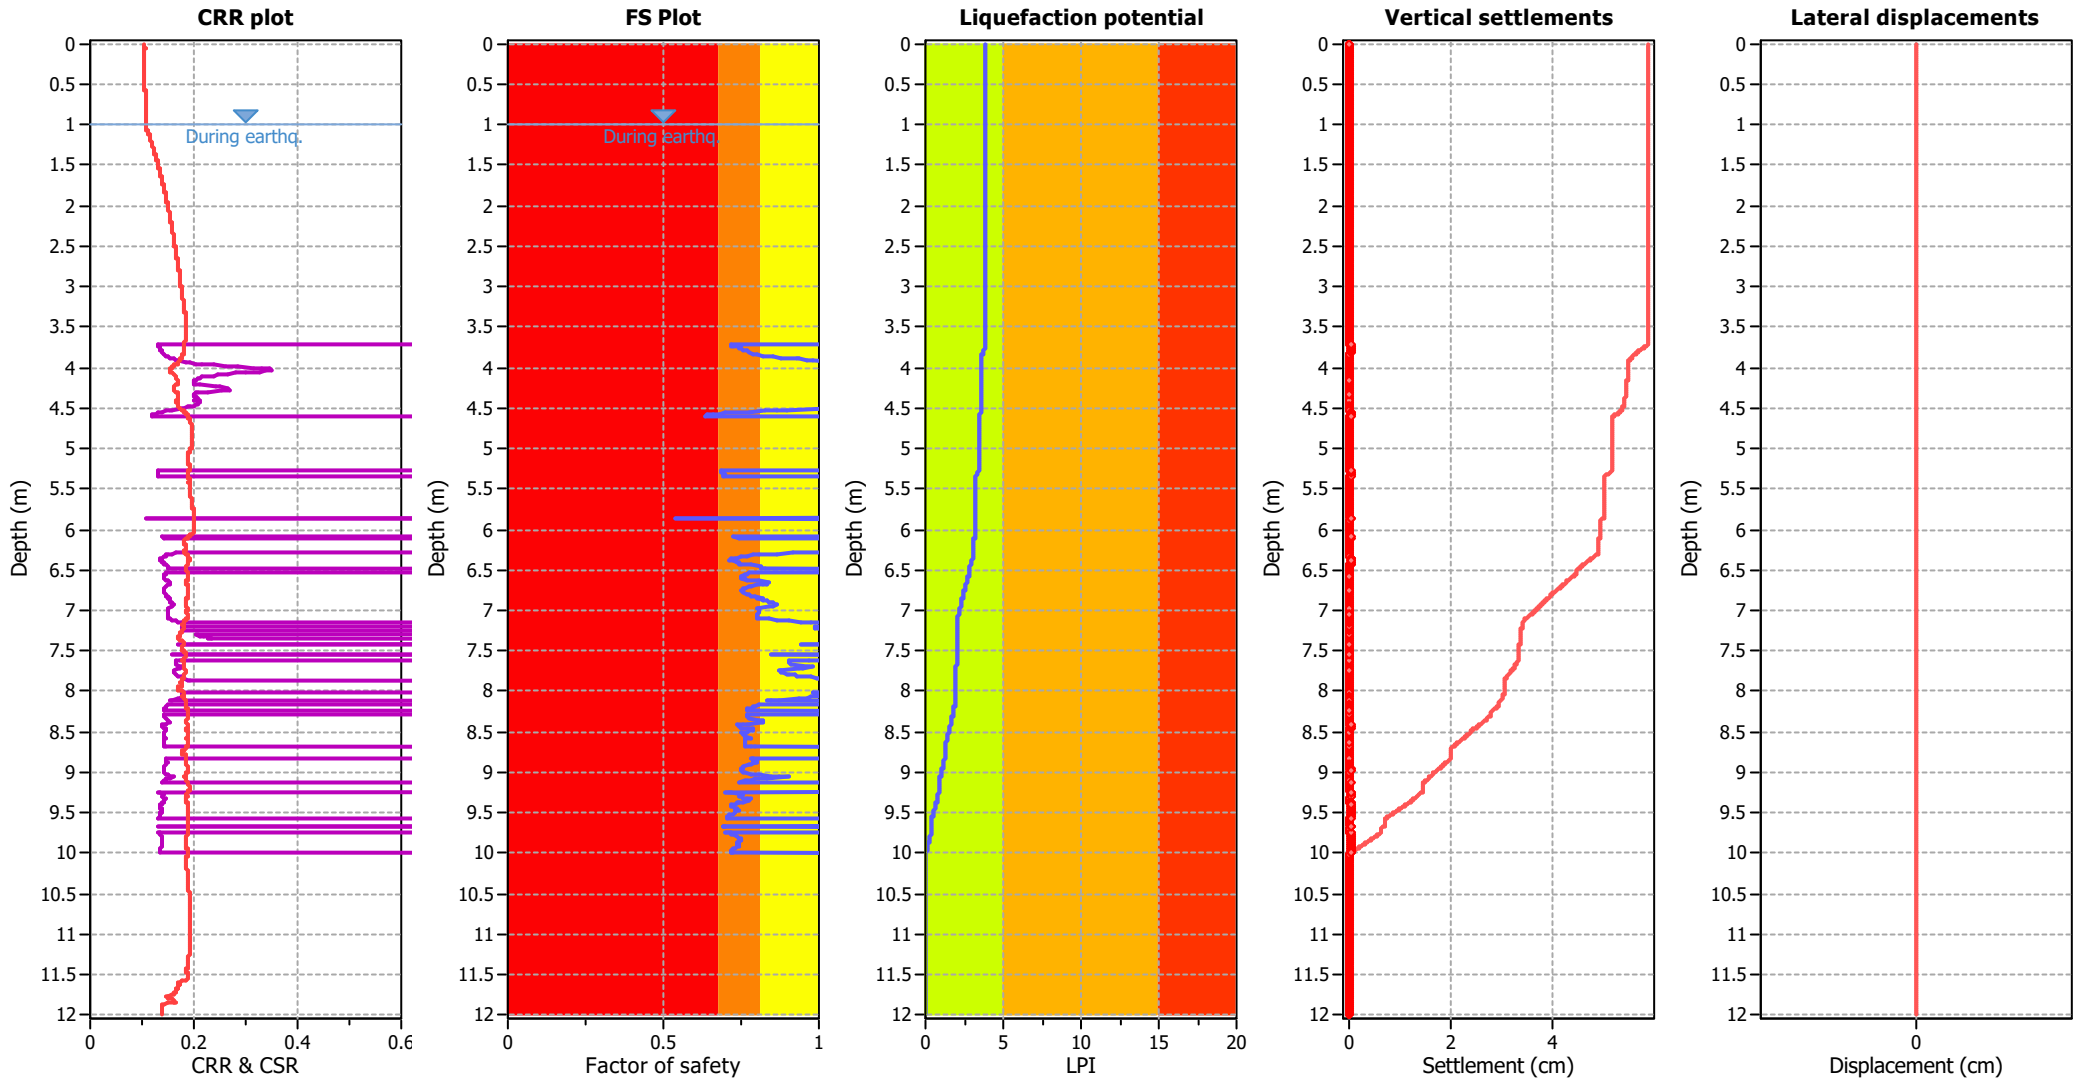

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

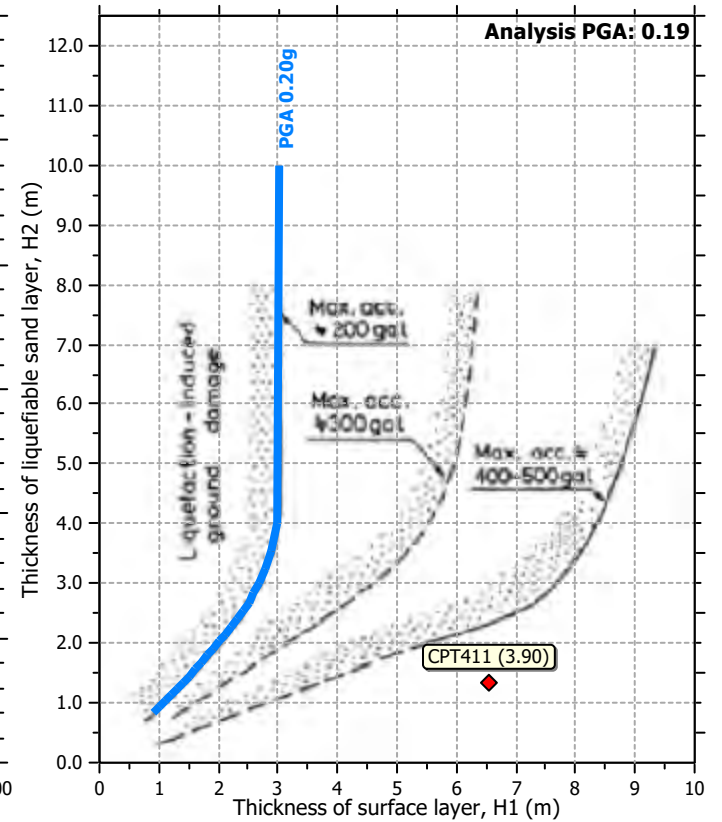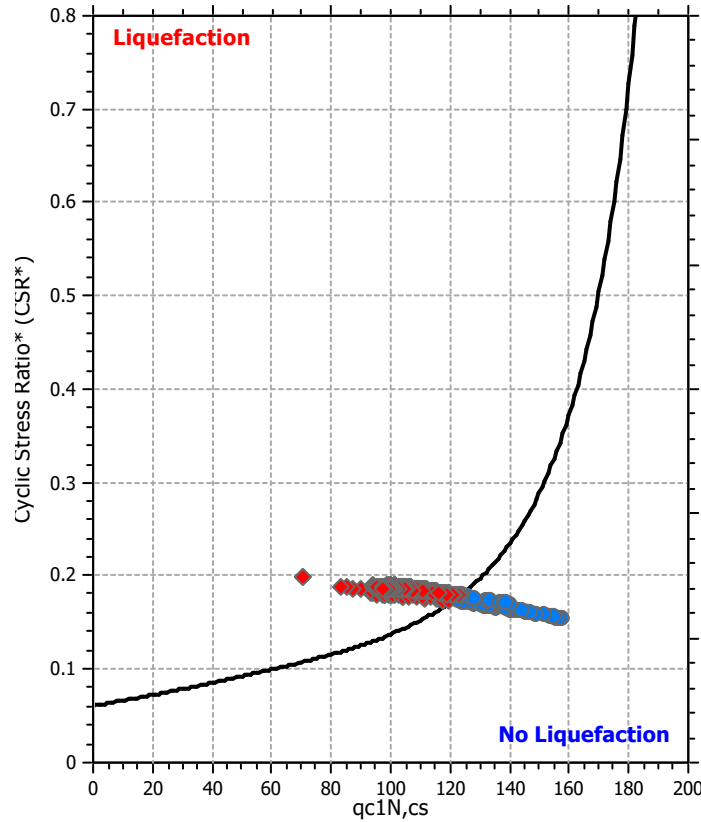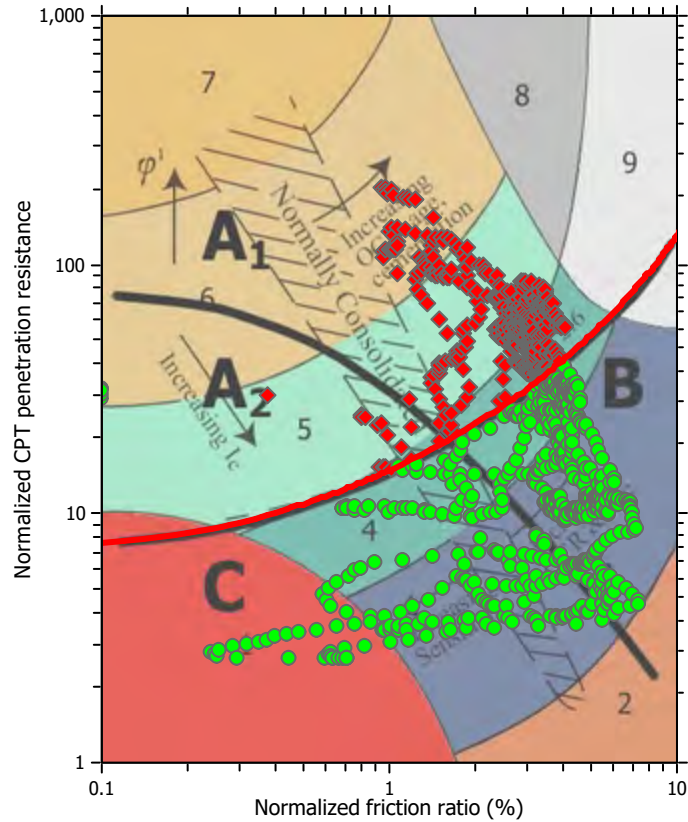

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

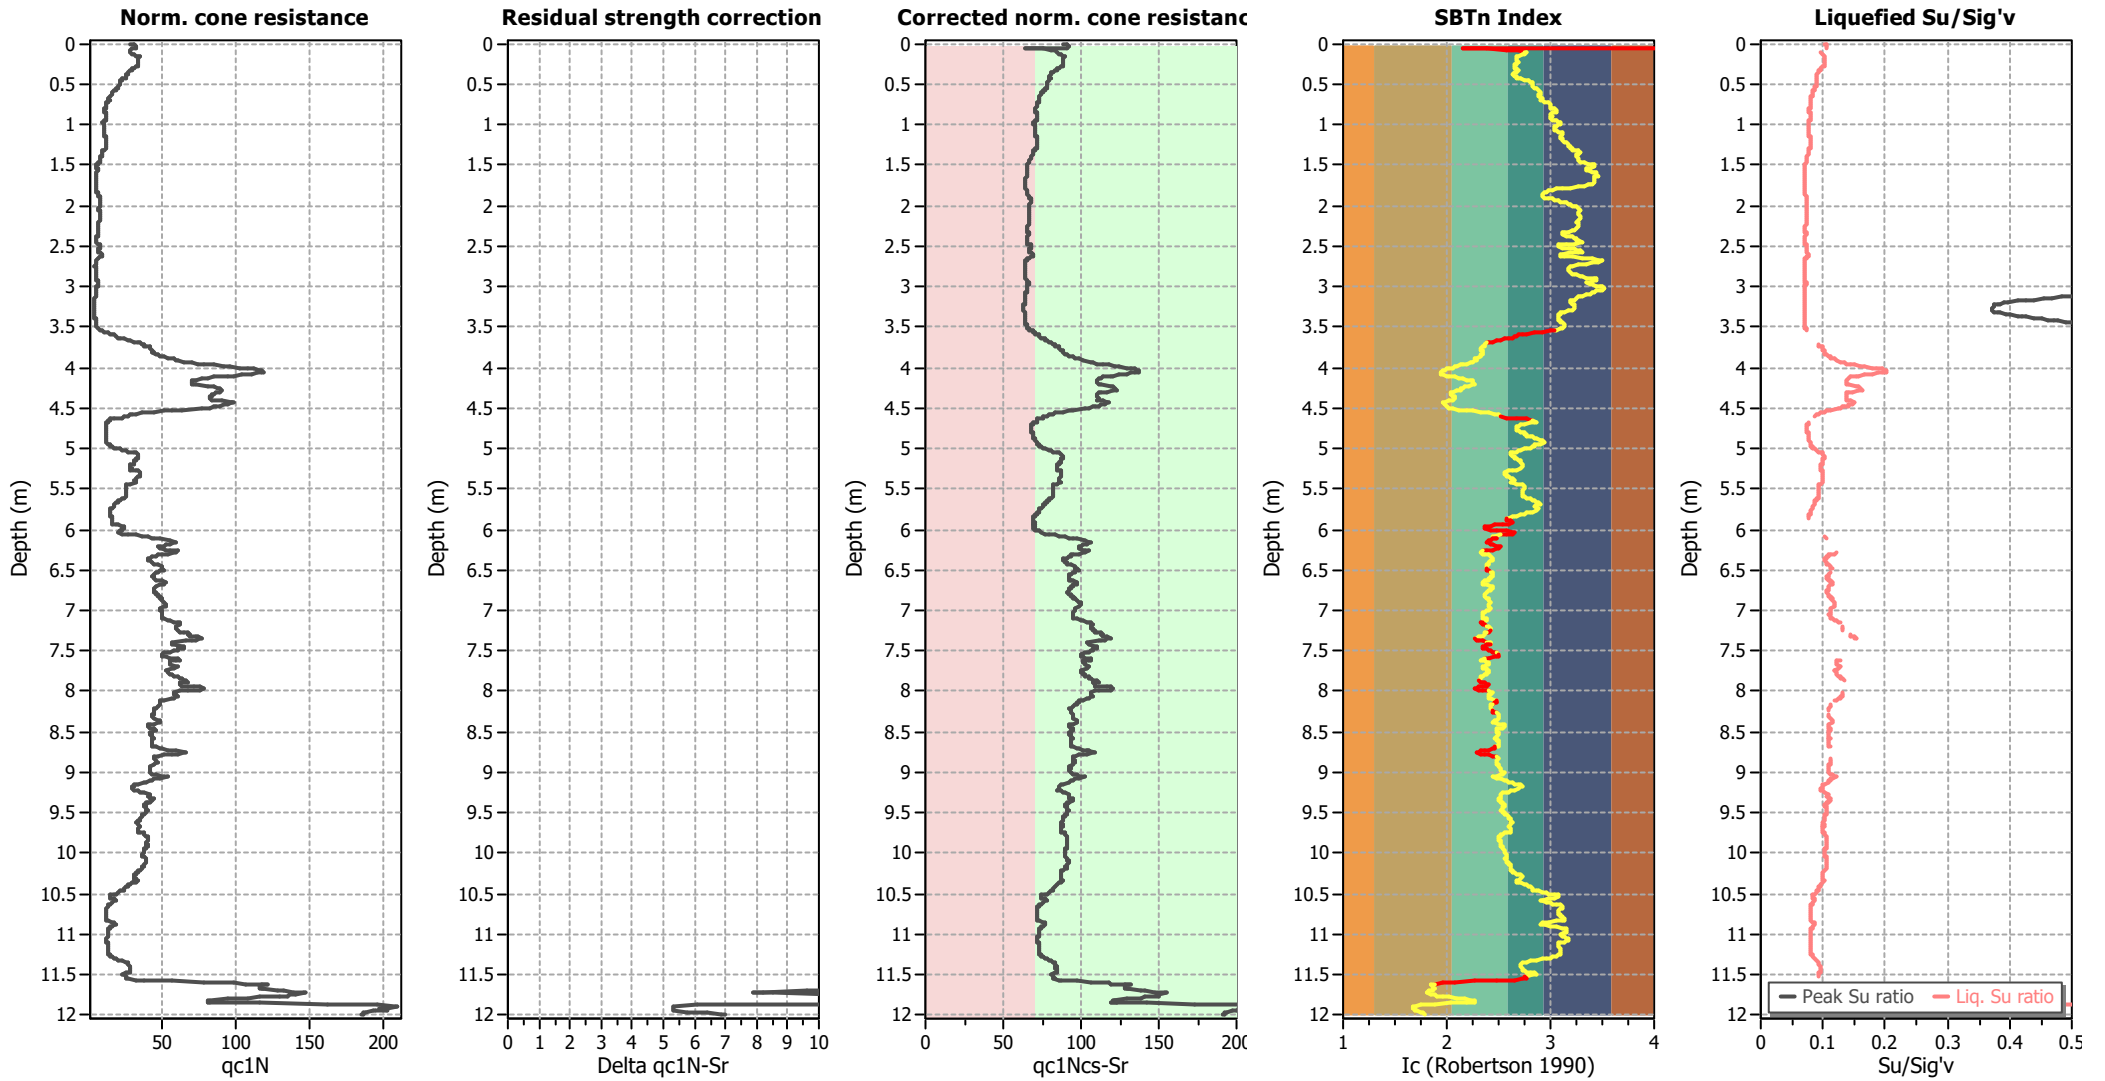

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

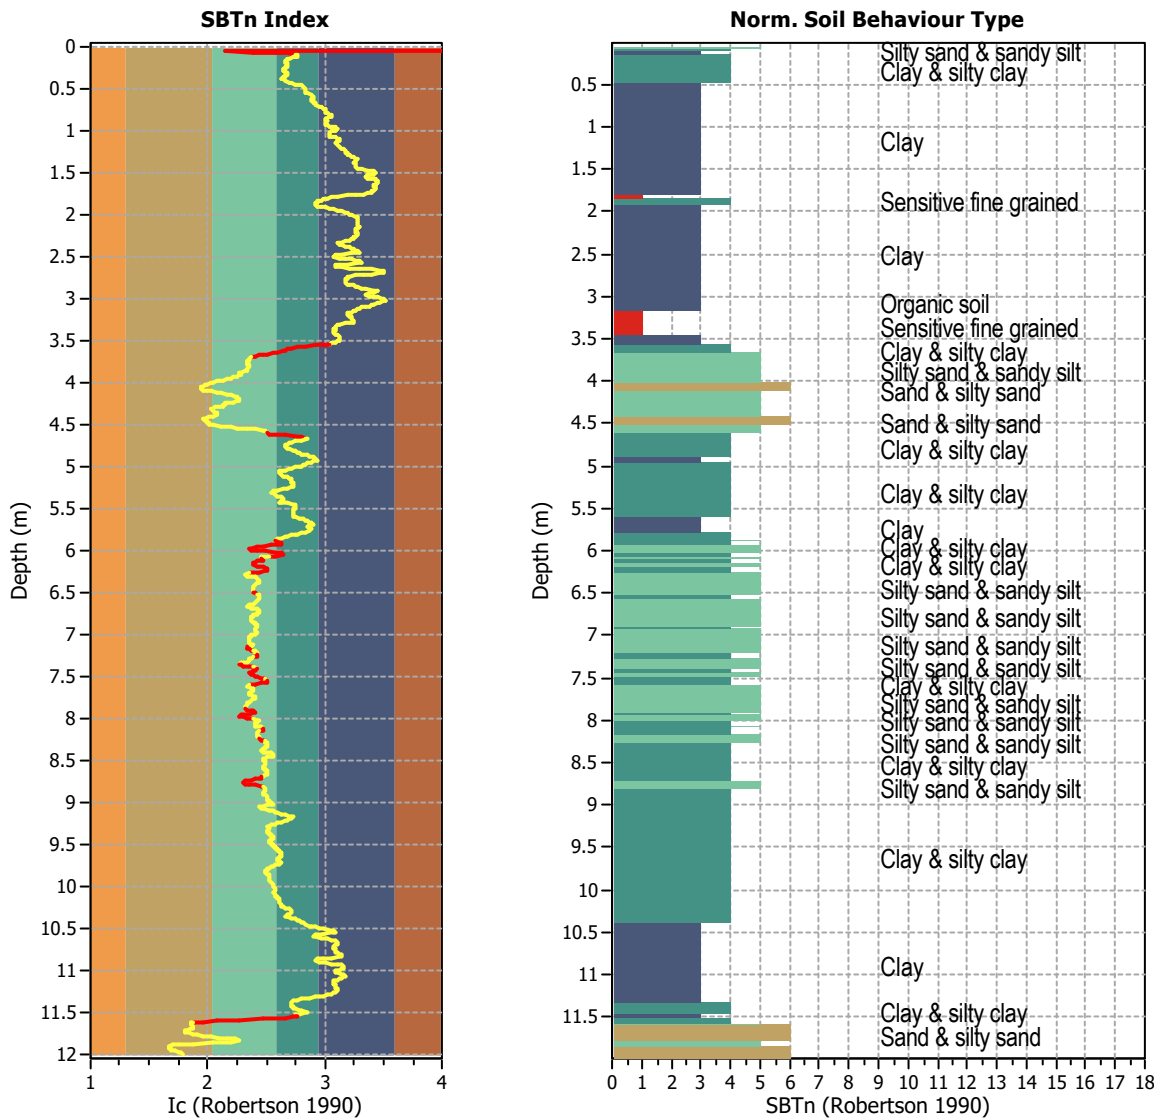


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1199
 Total points excluded: 152
 Exclusion percentage: 12.68%
 Number of layers detected: 25


Estimation of post-earthquake settlements

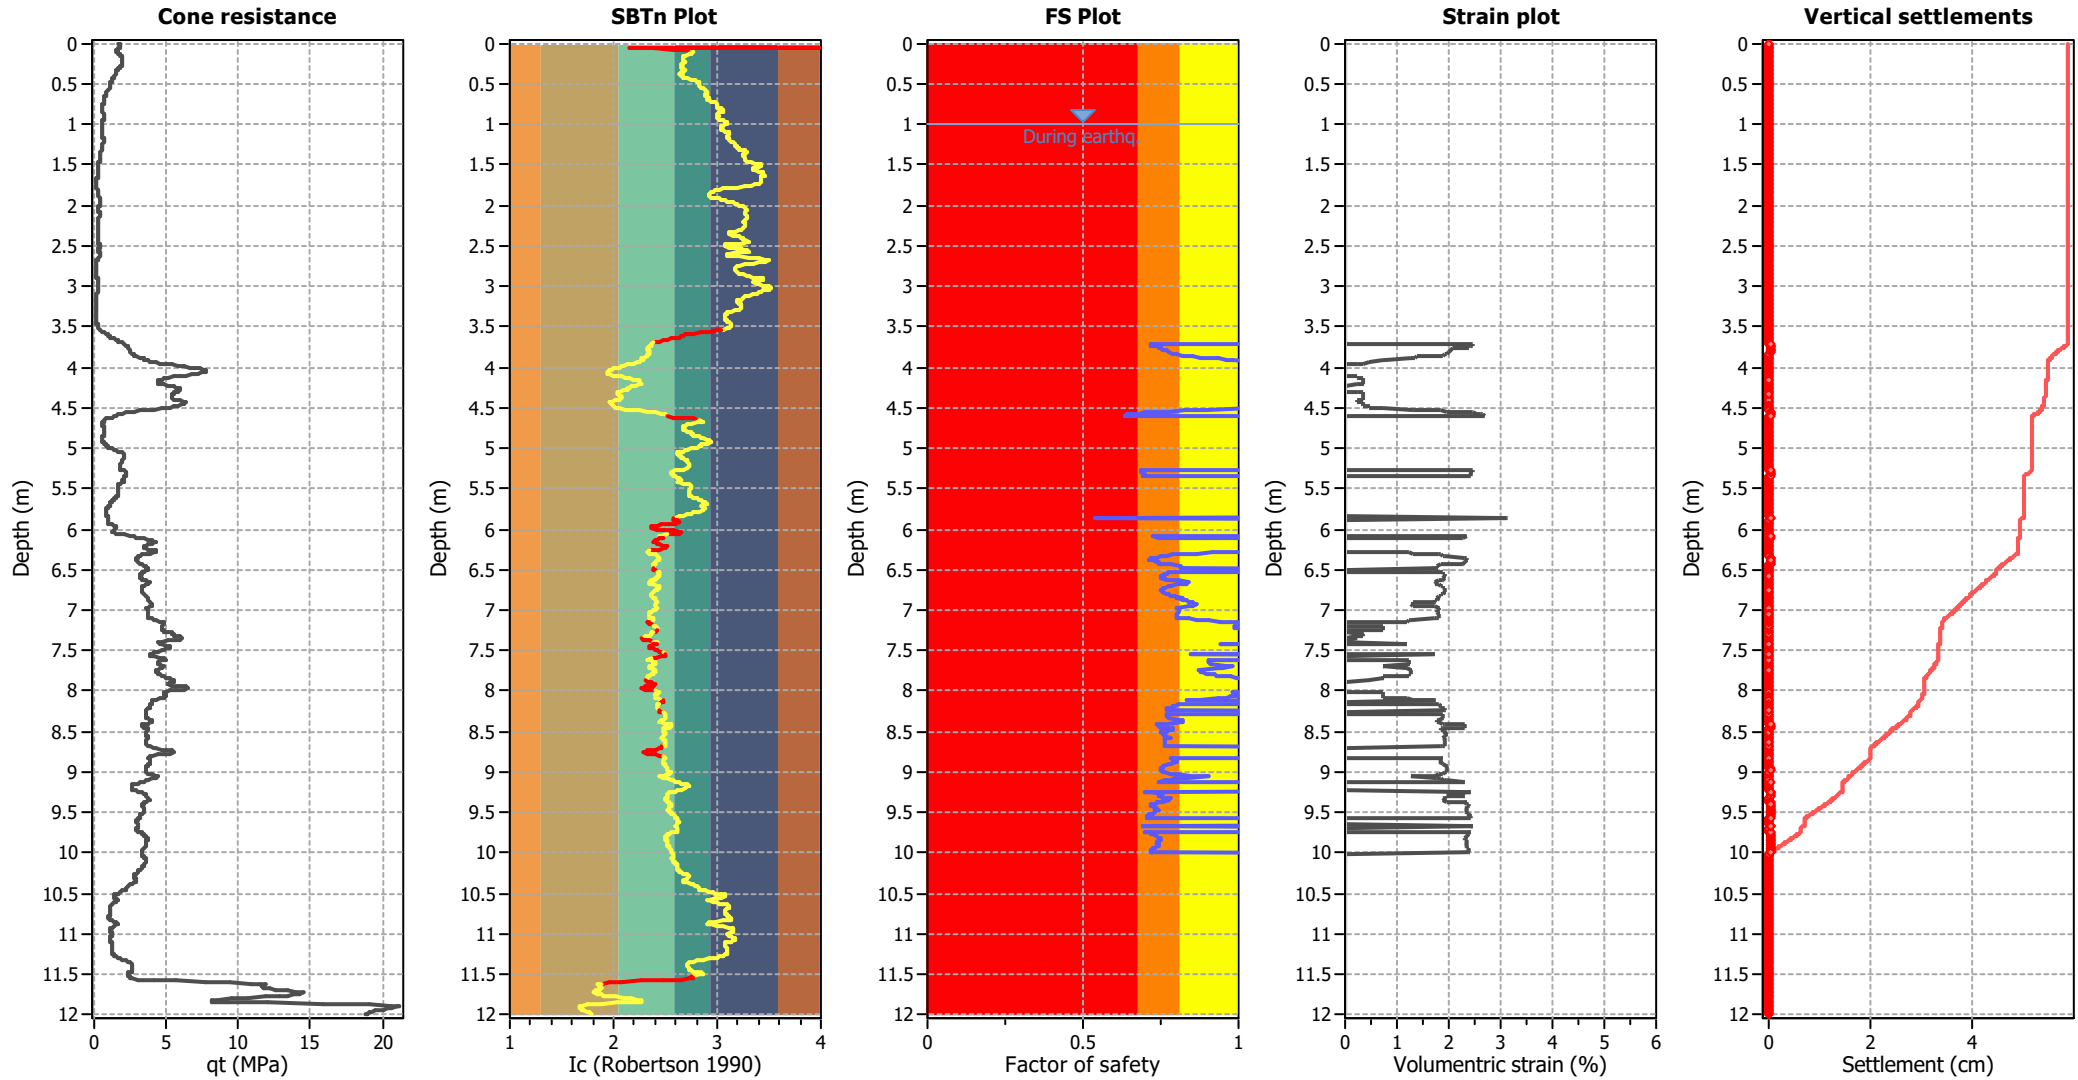

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

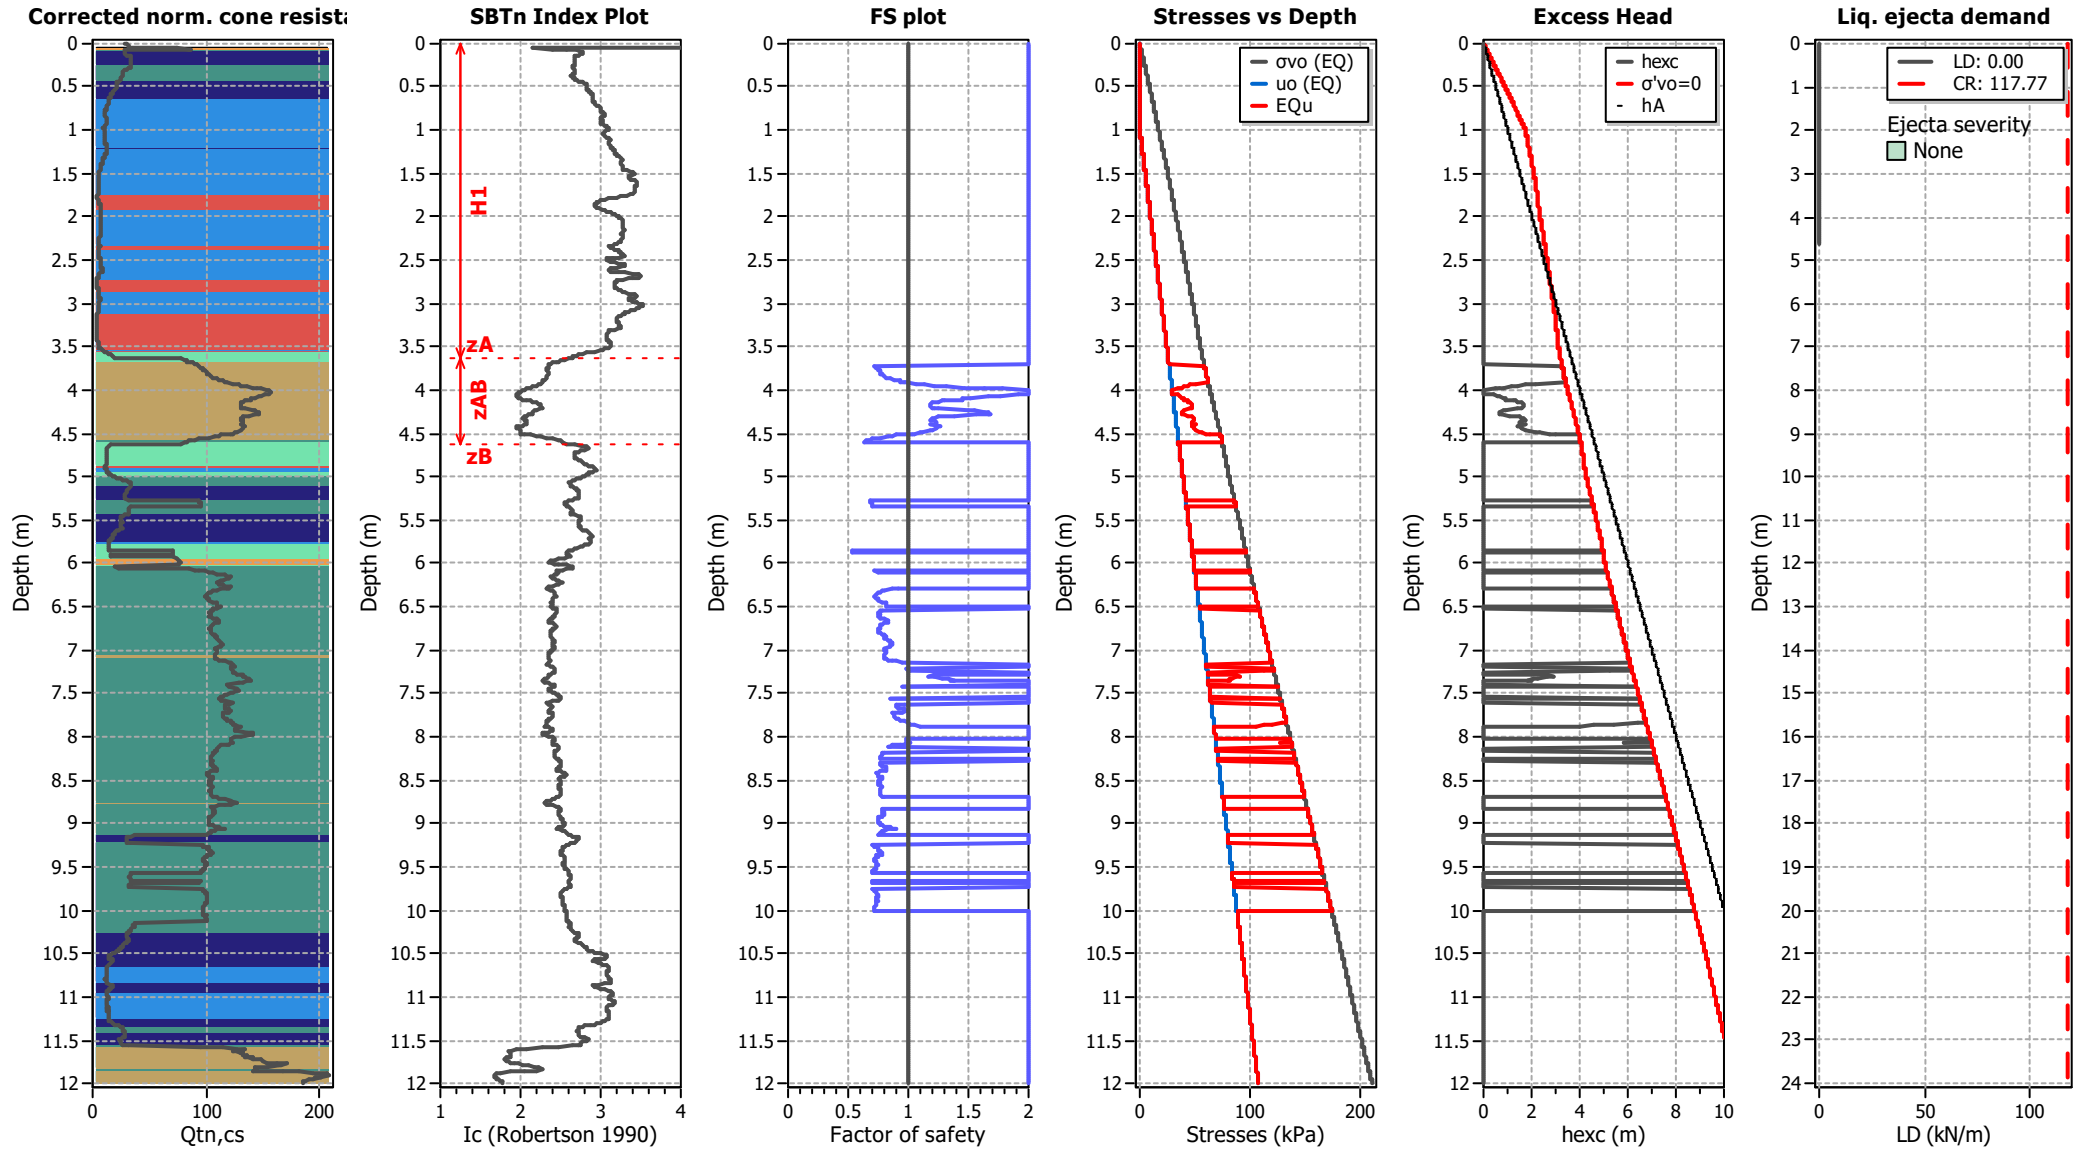

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT412

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sands only
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

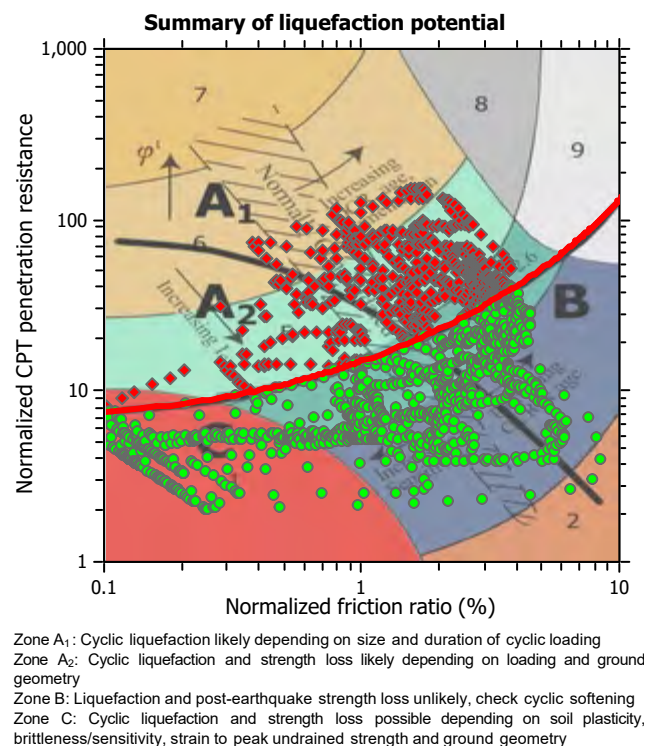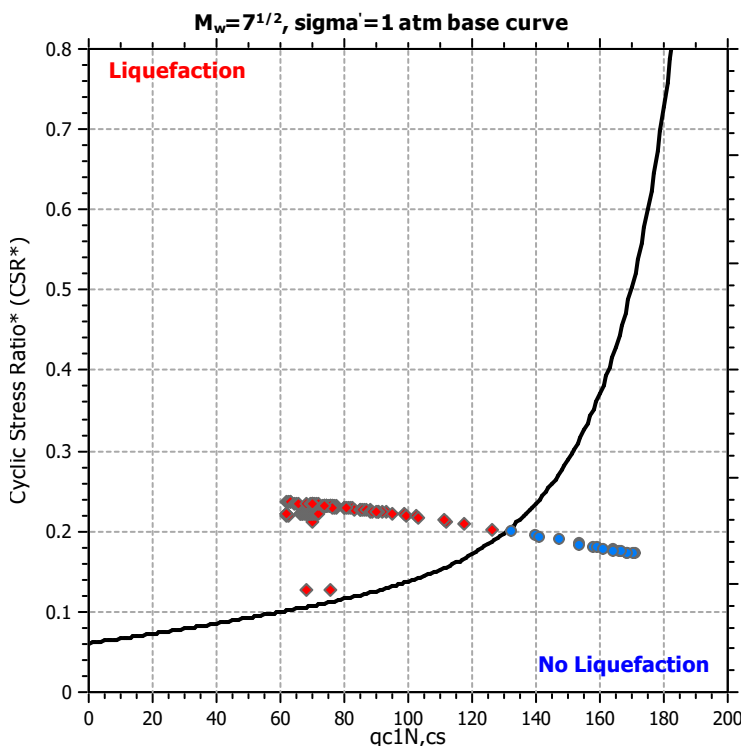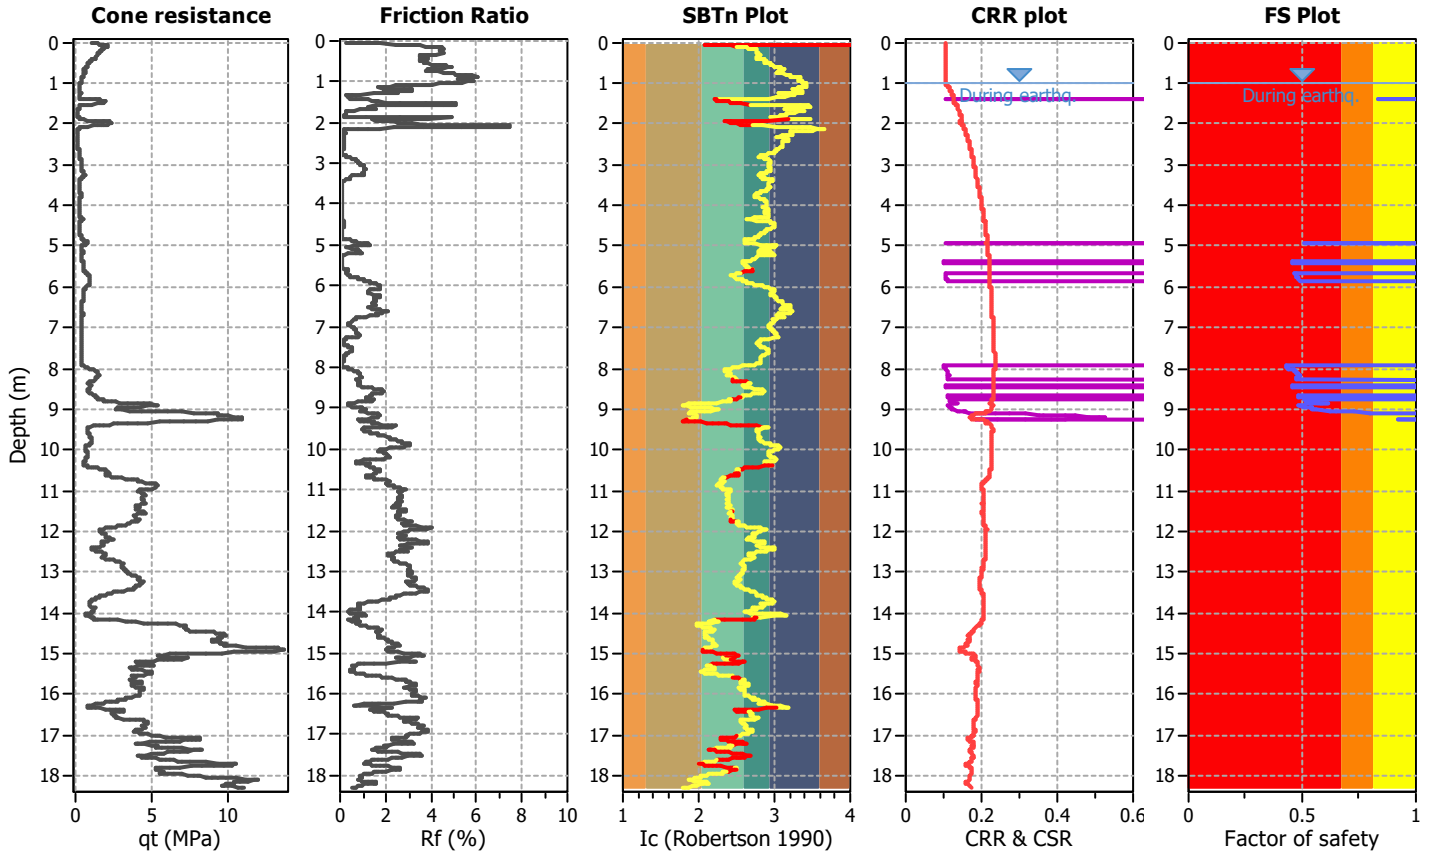

CPT basic interpretation plots

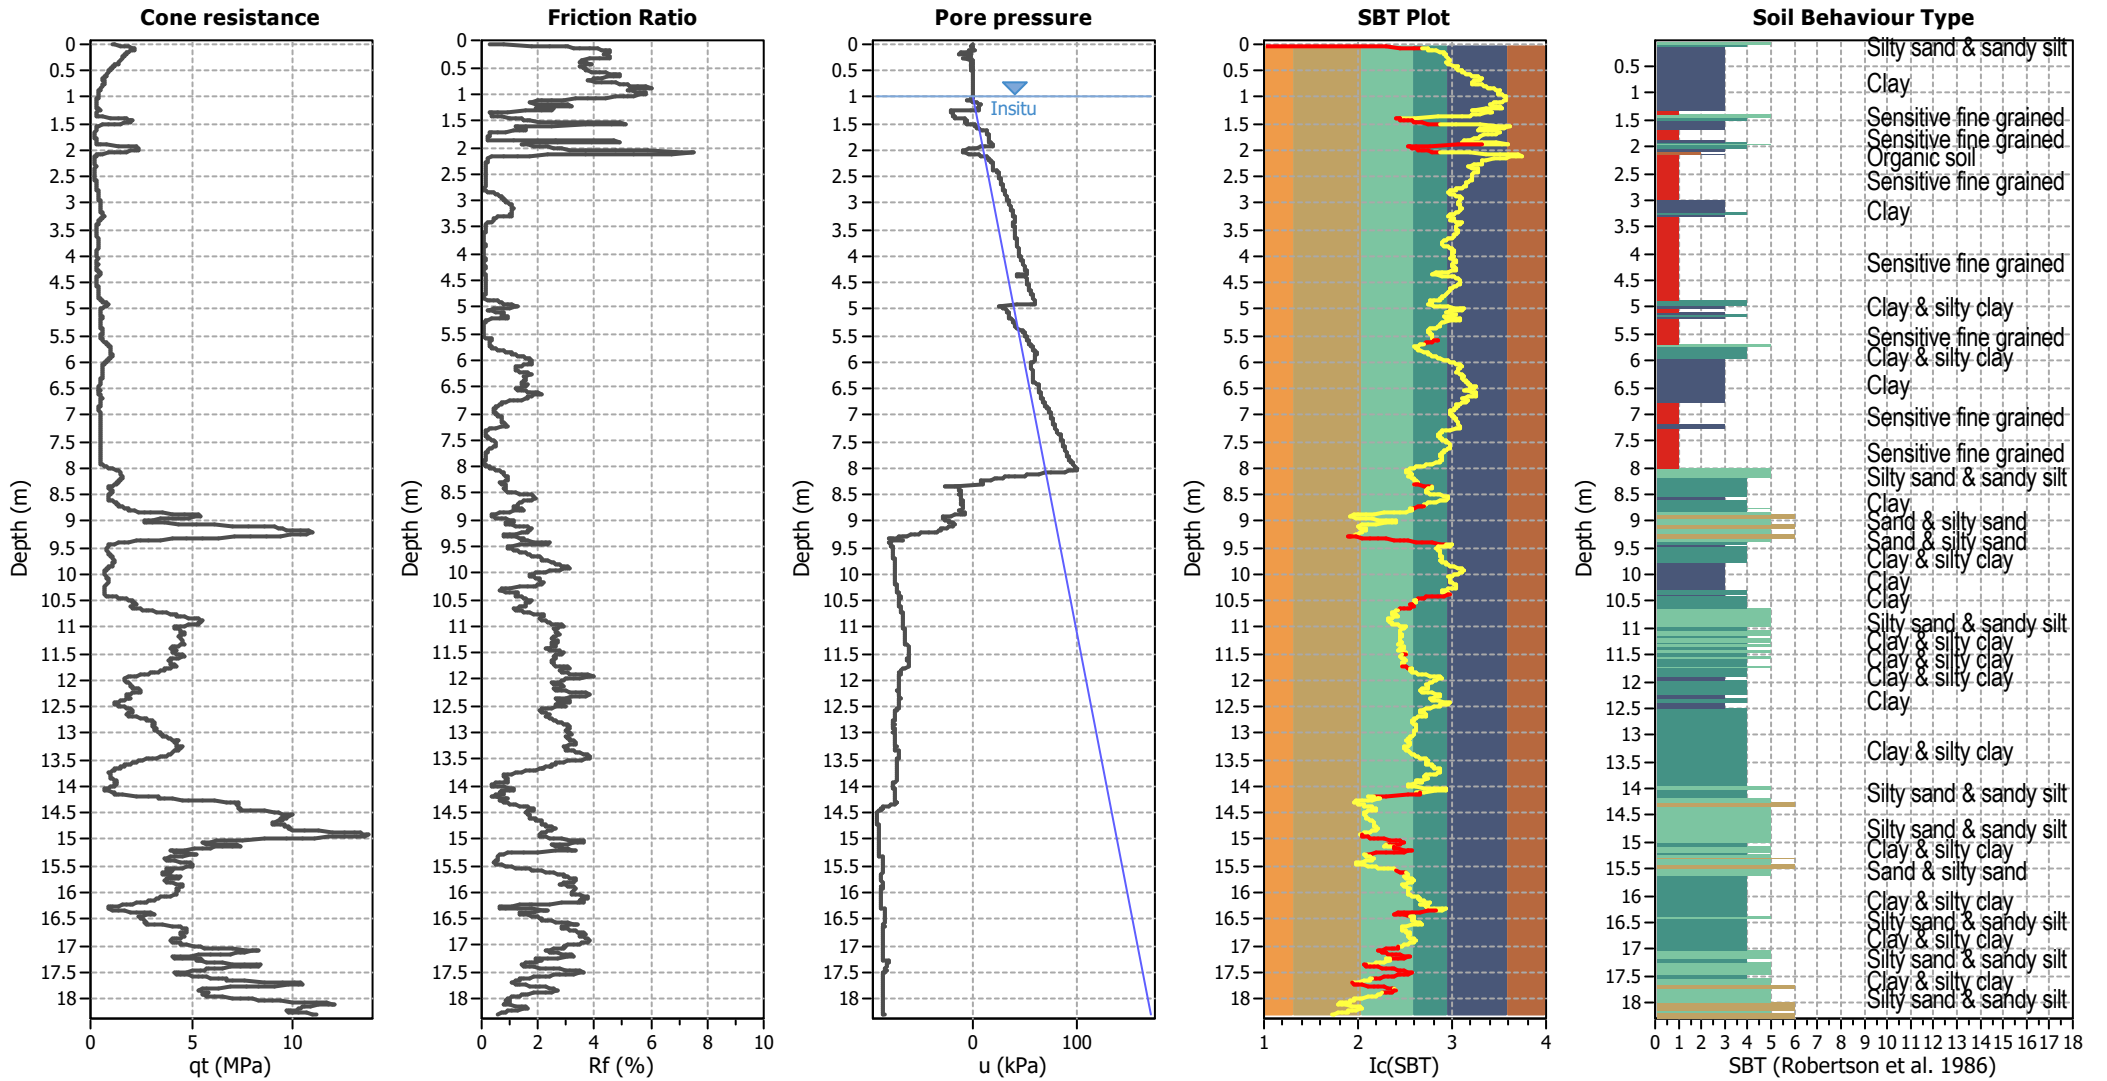


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

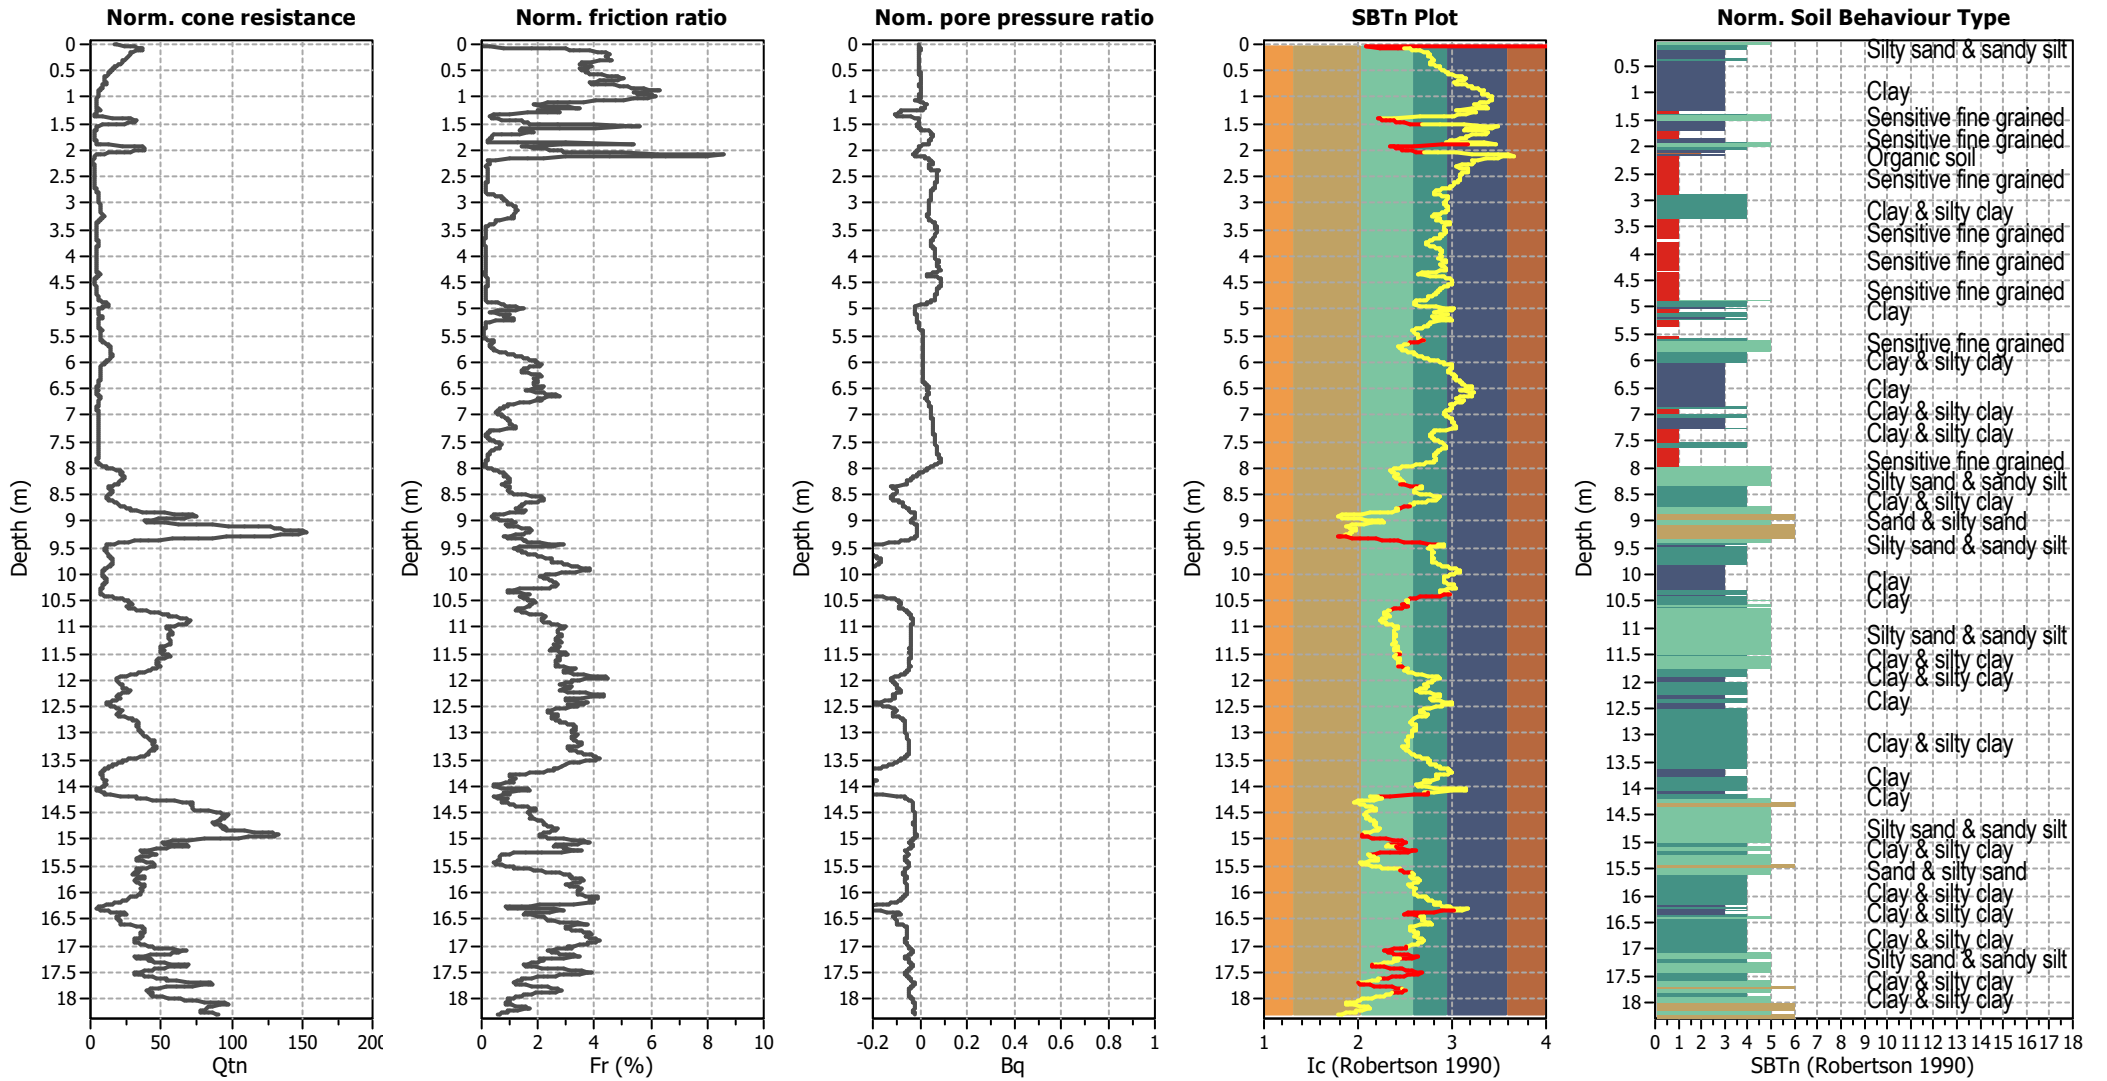


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

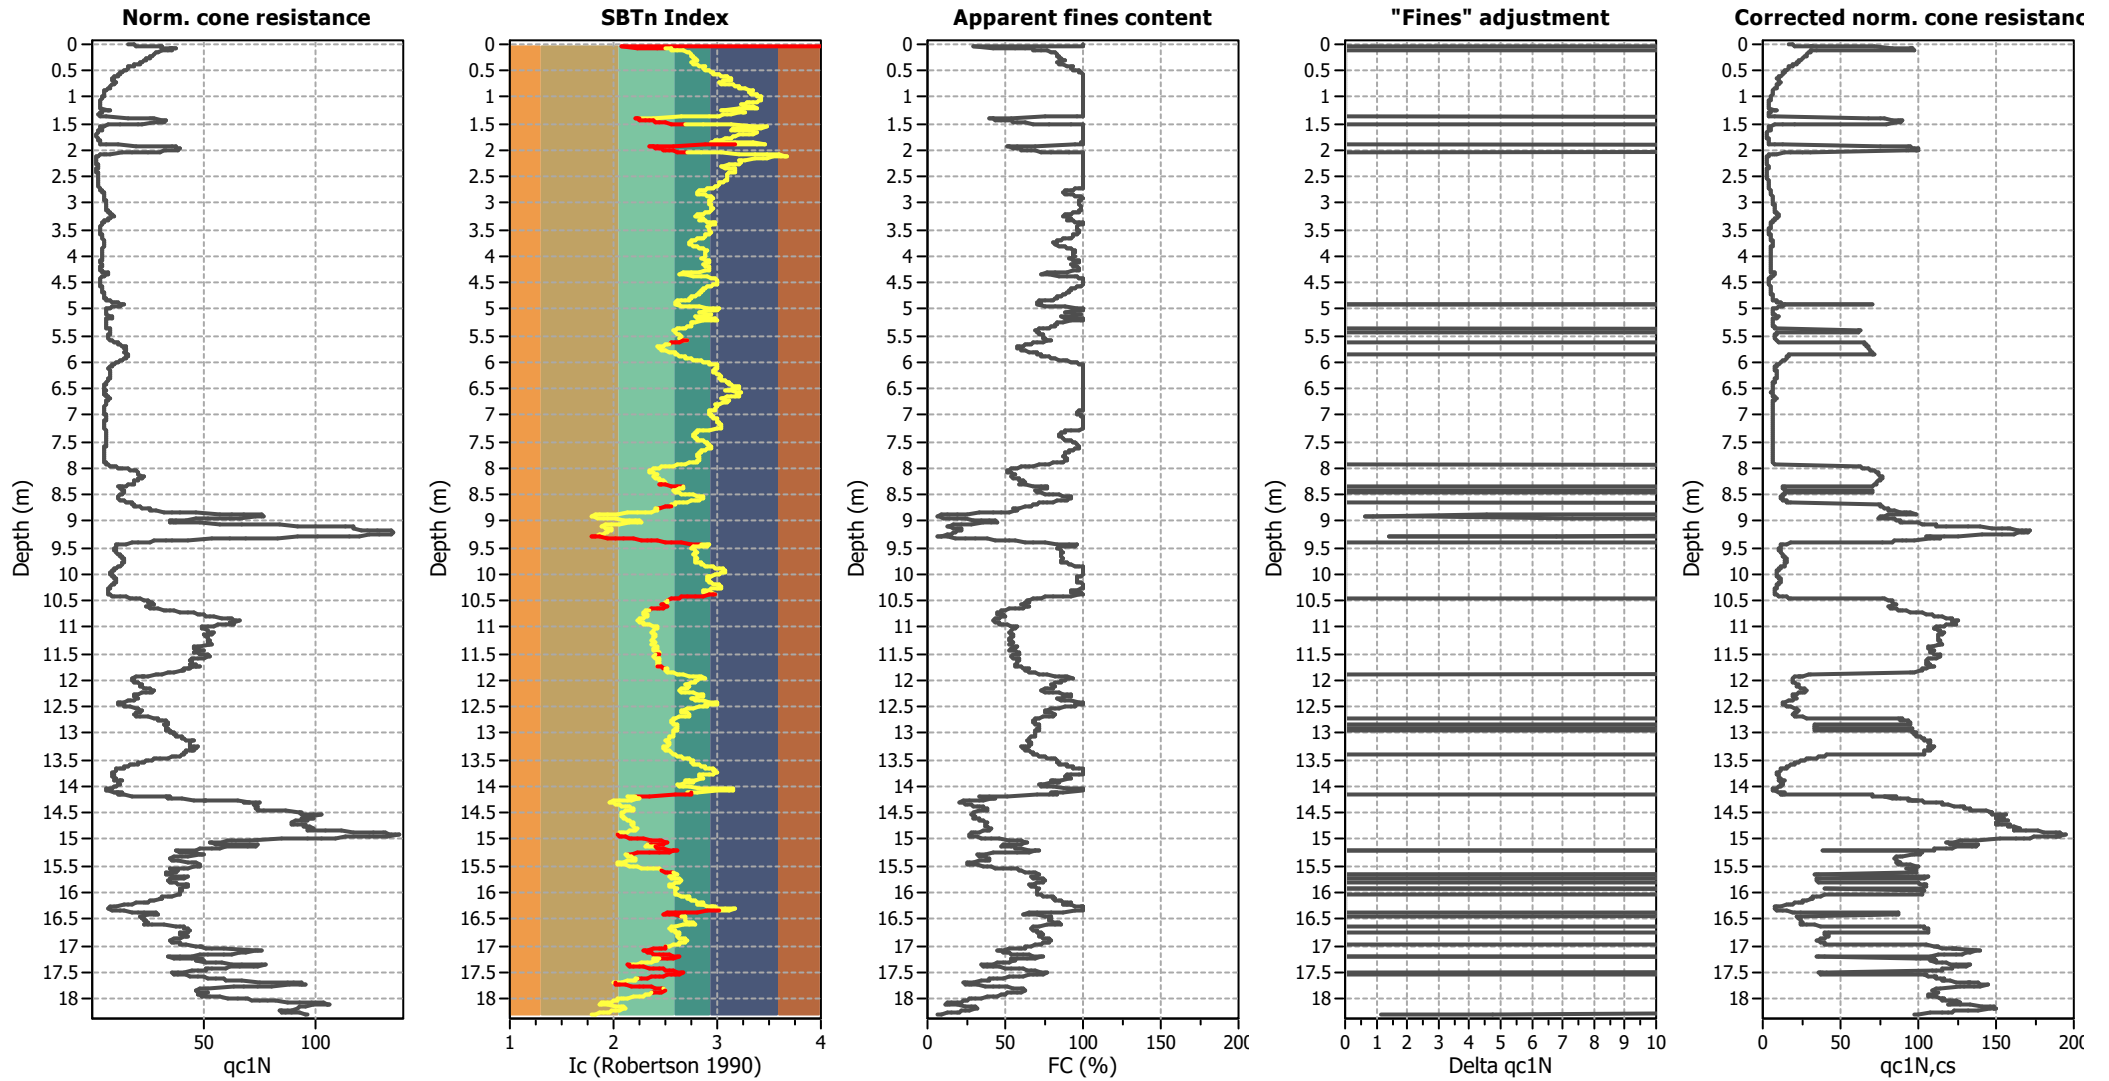

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

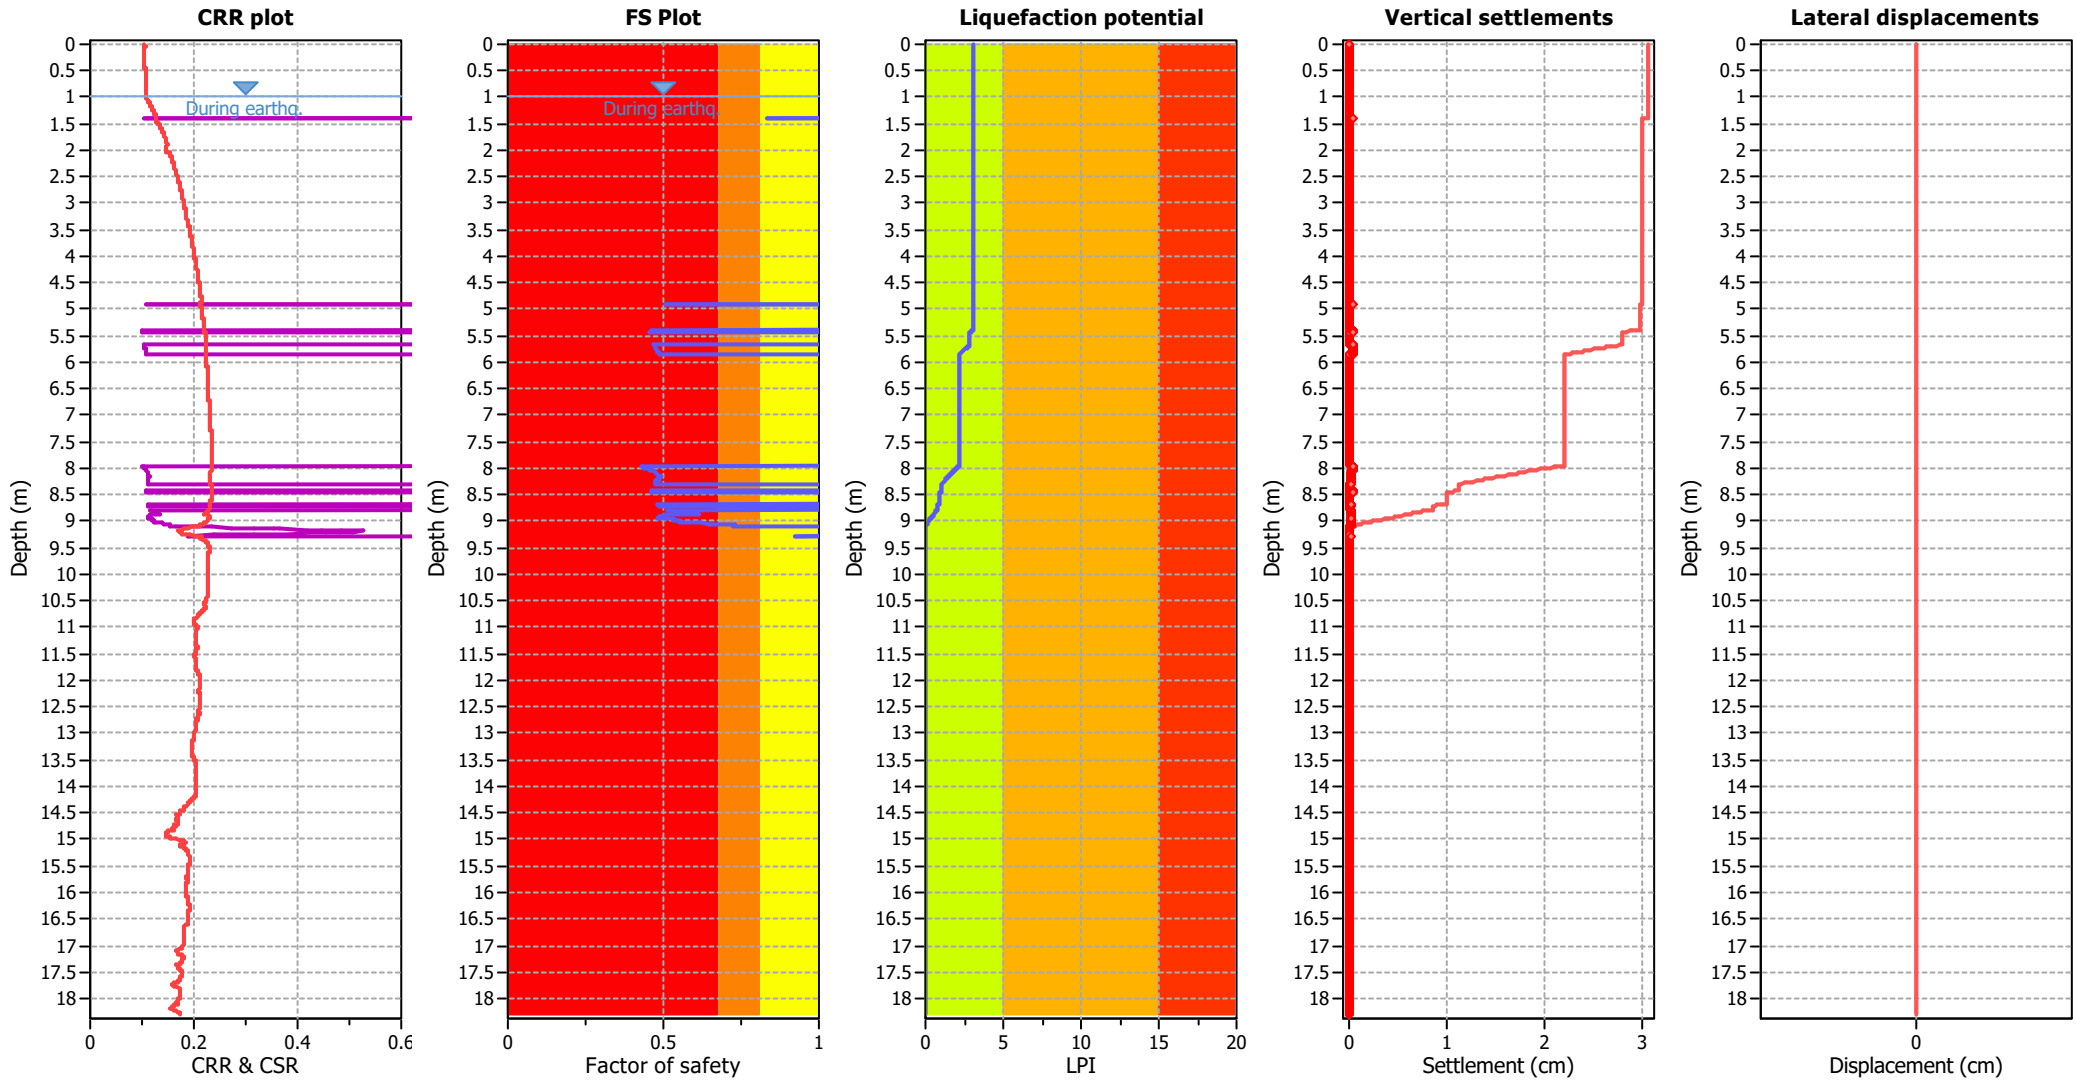

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

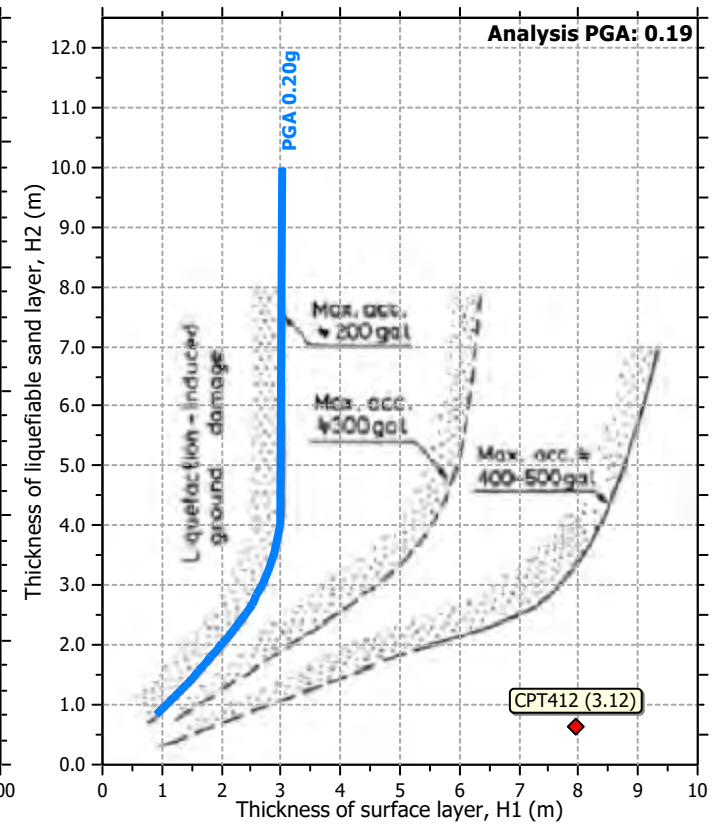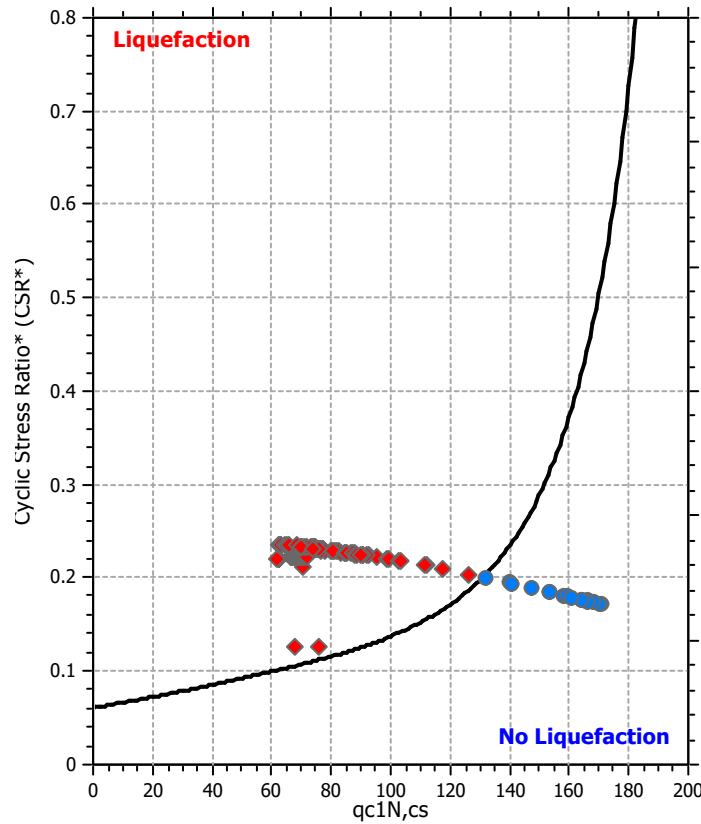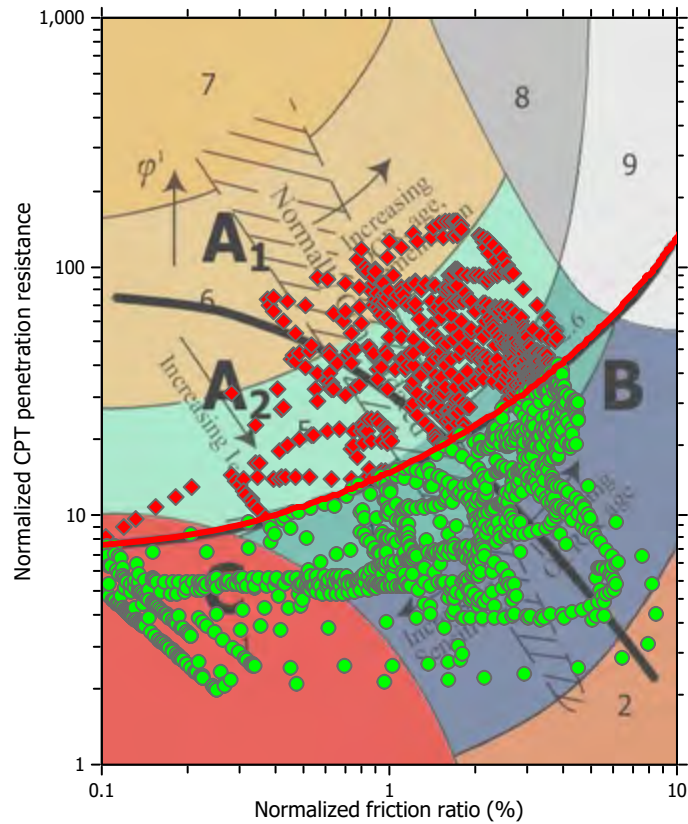

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

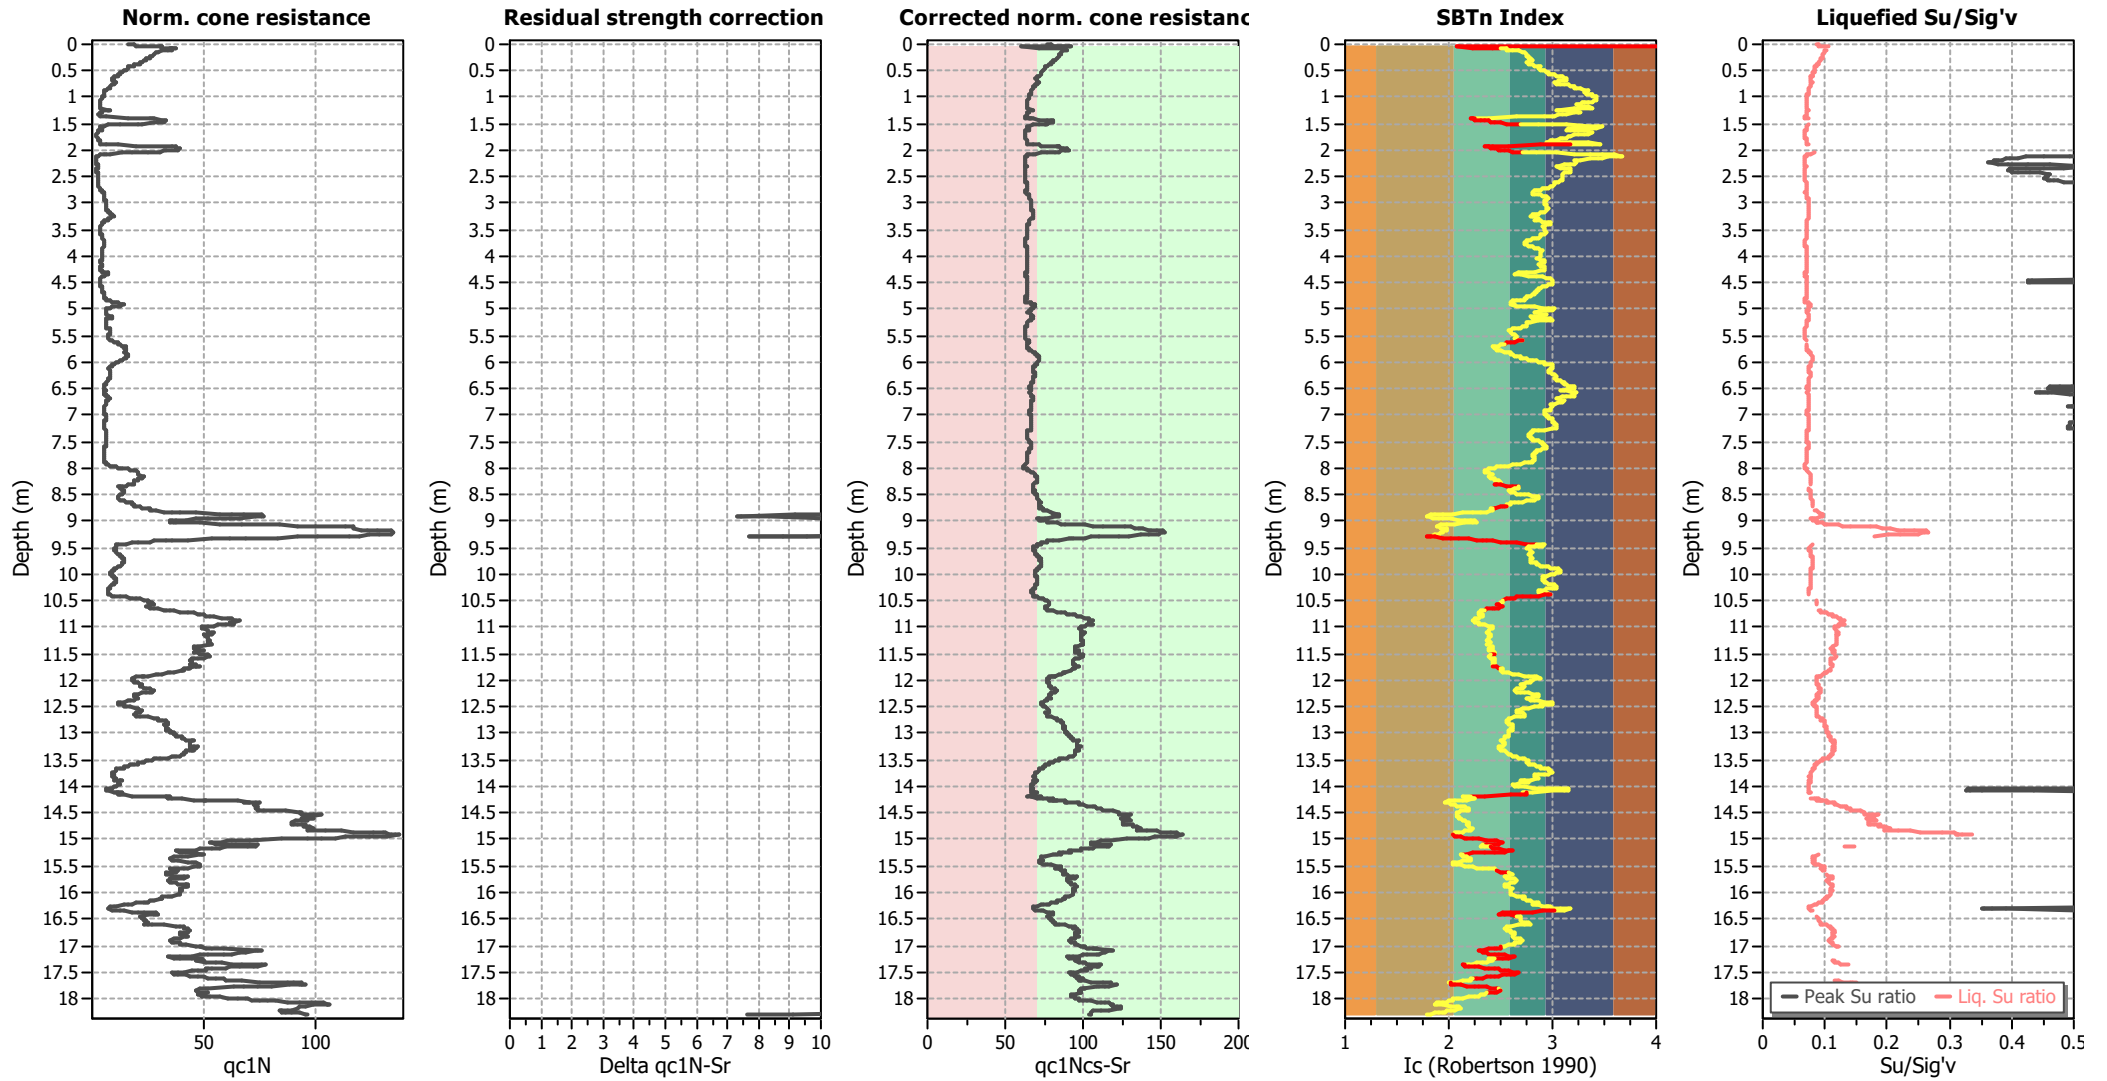

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sands only
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

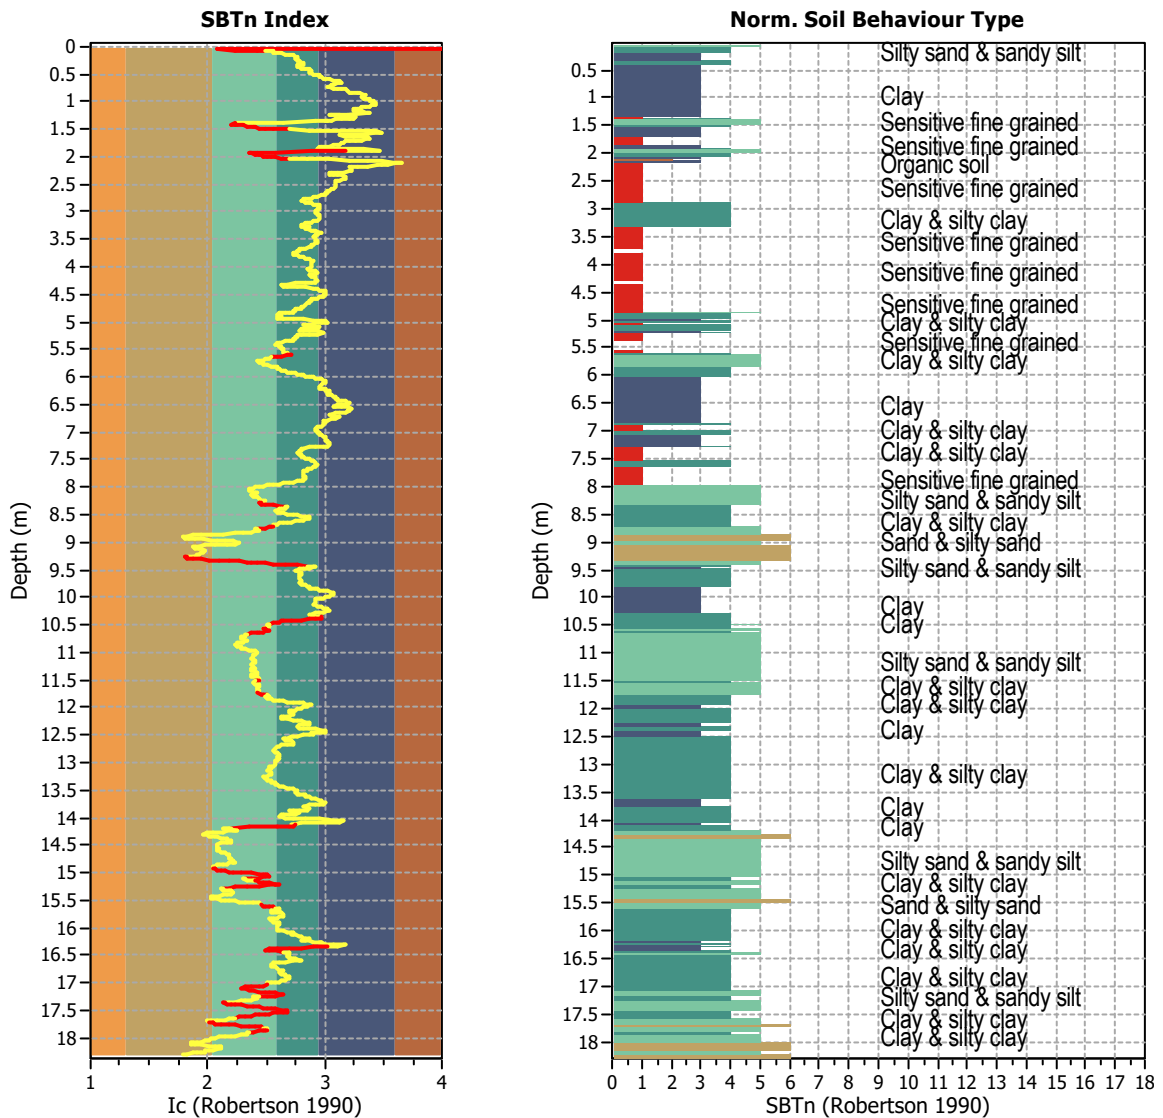


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1830
 Total points excluded: 234
 Exclusion percentage: 12.79%
 Number of layers detected: 28


Estimation of post-earthquake settlements

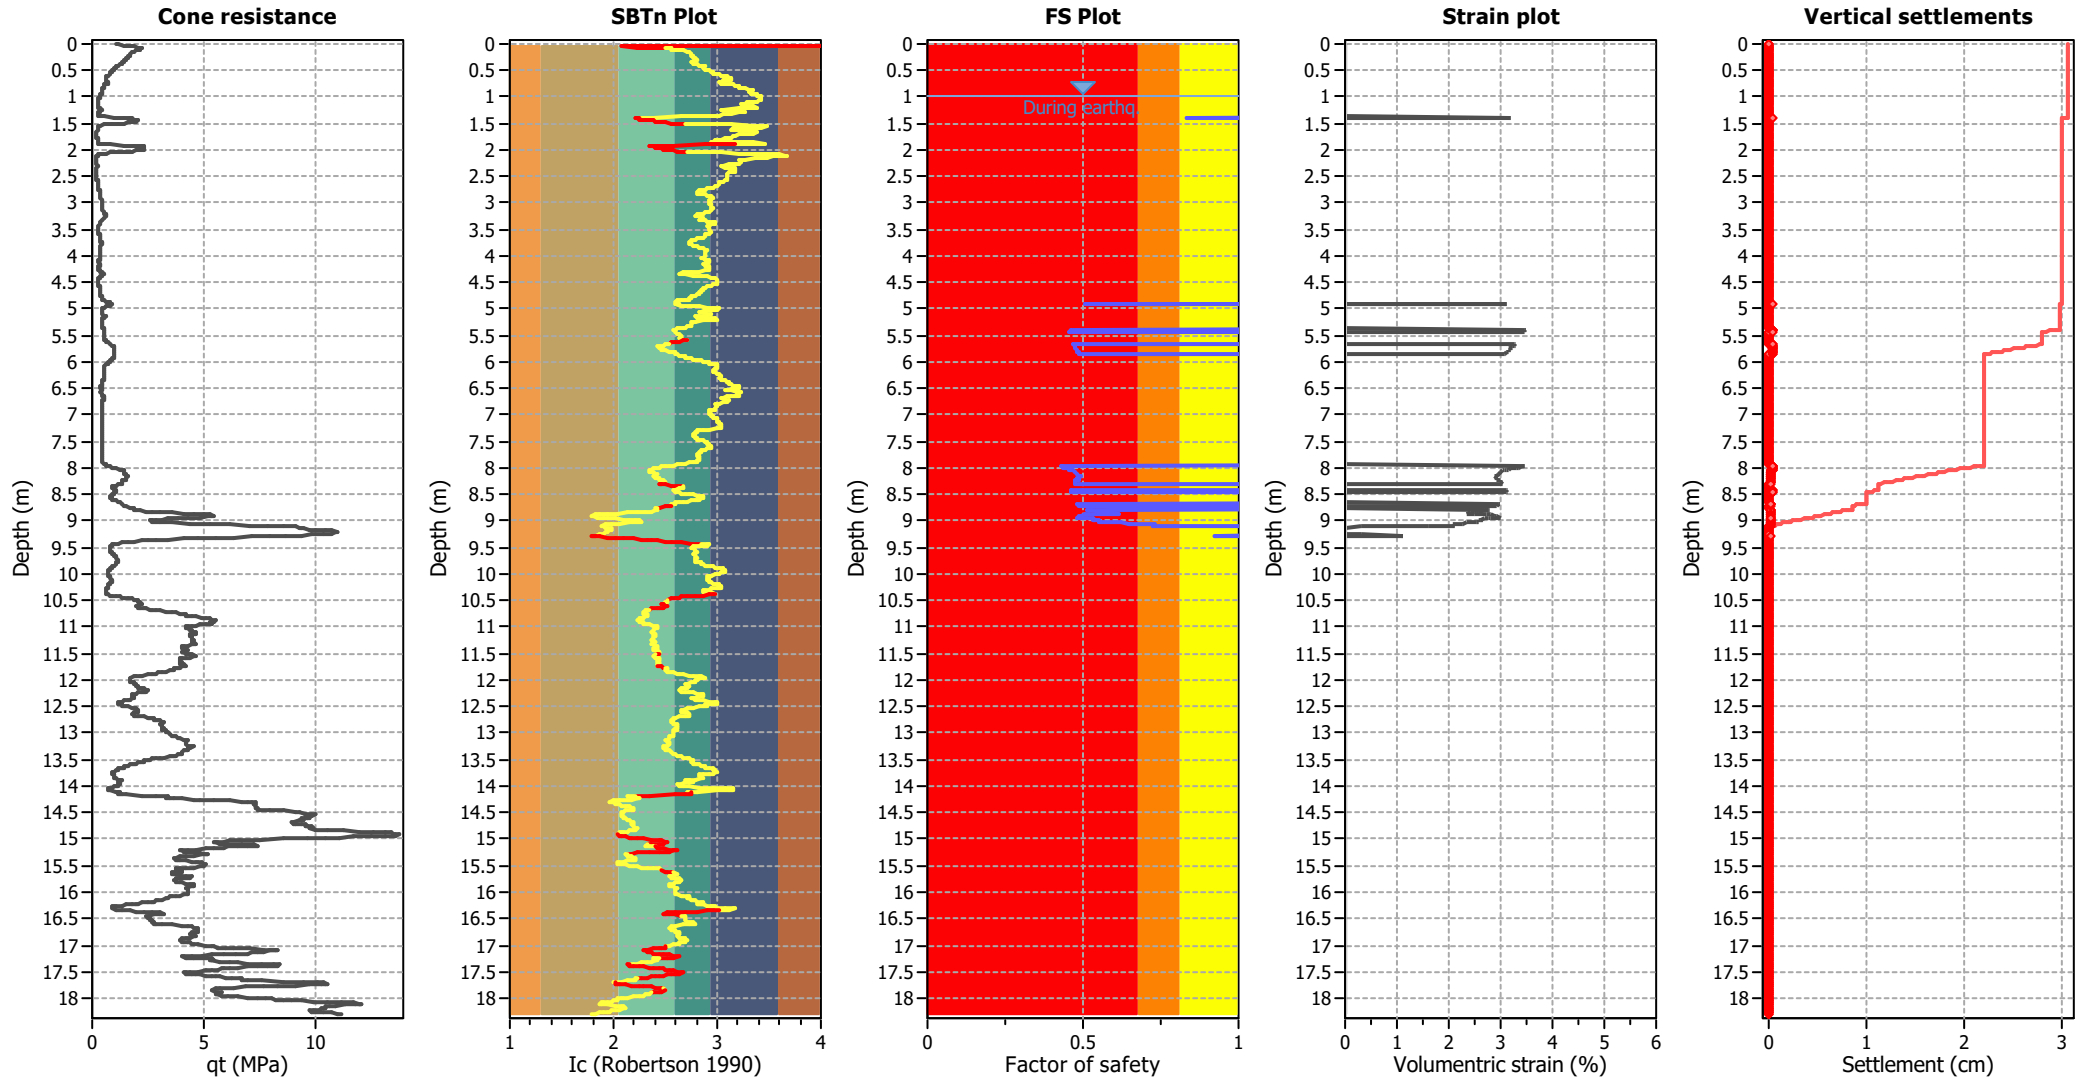

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

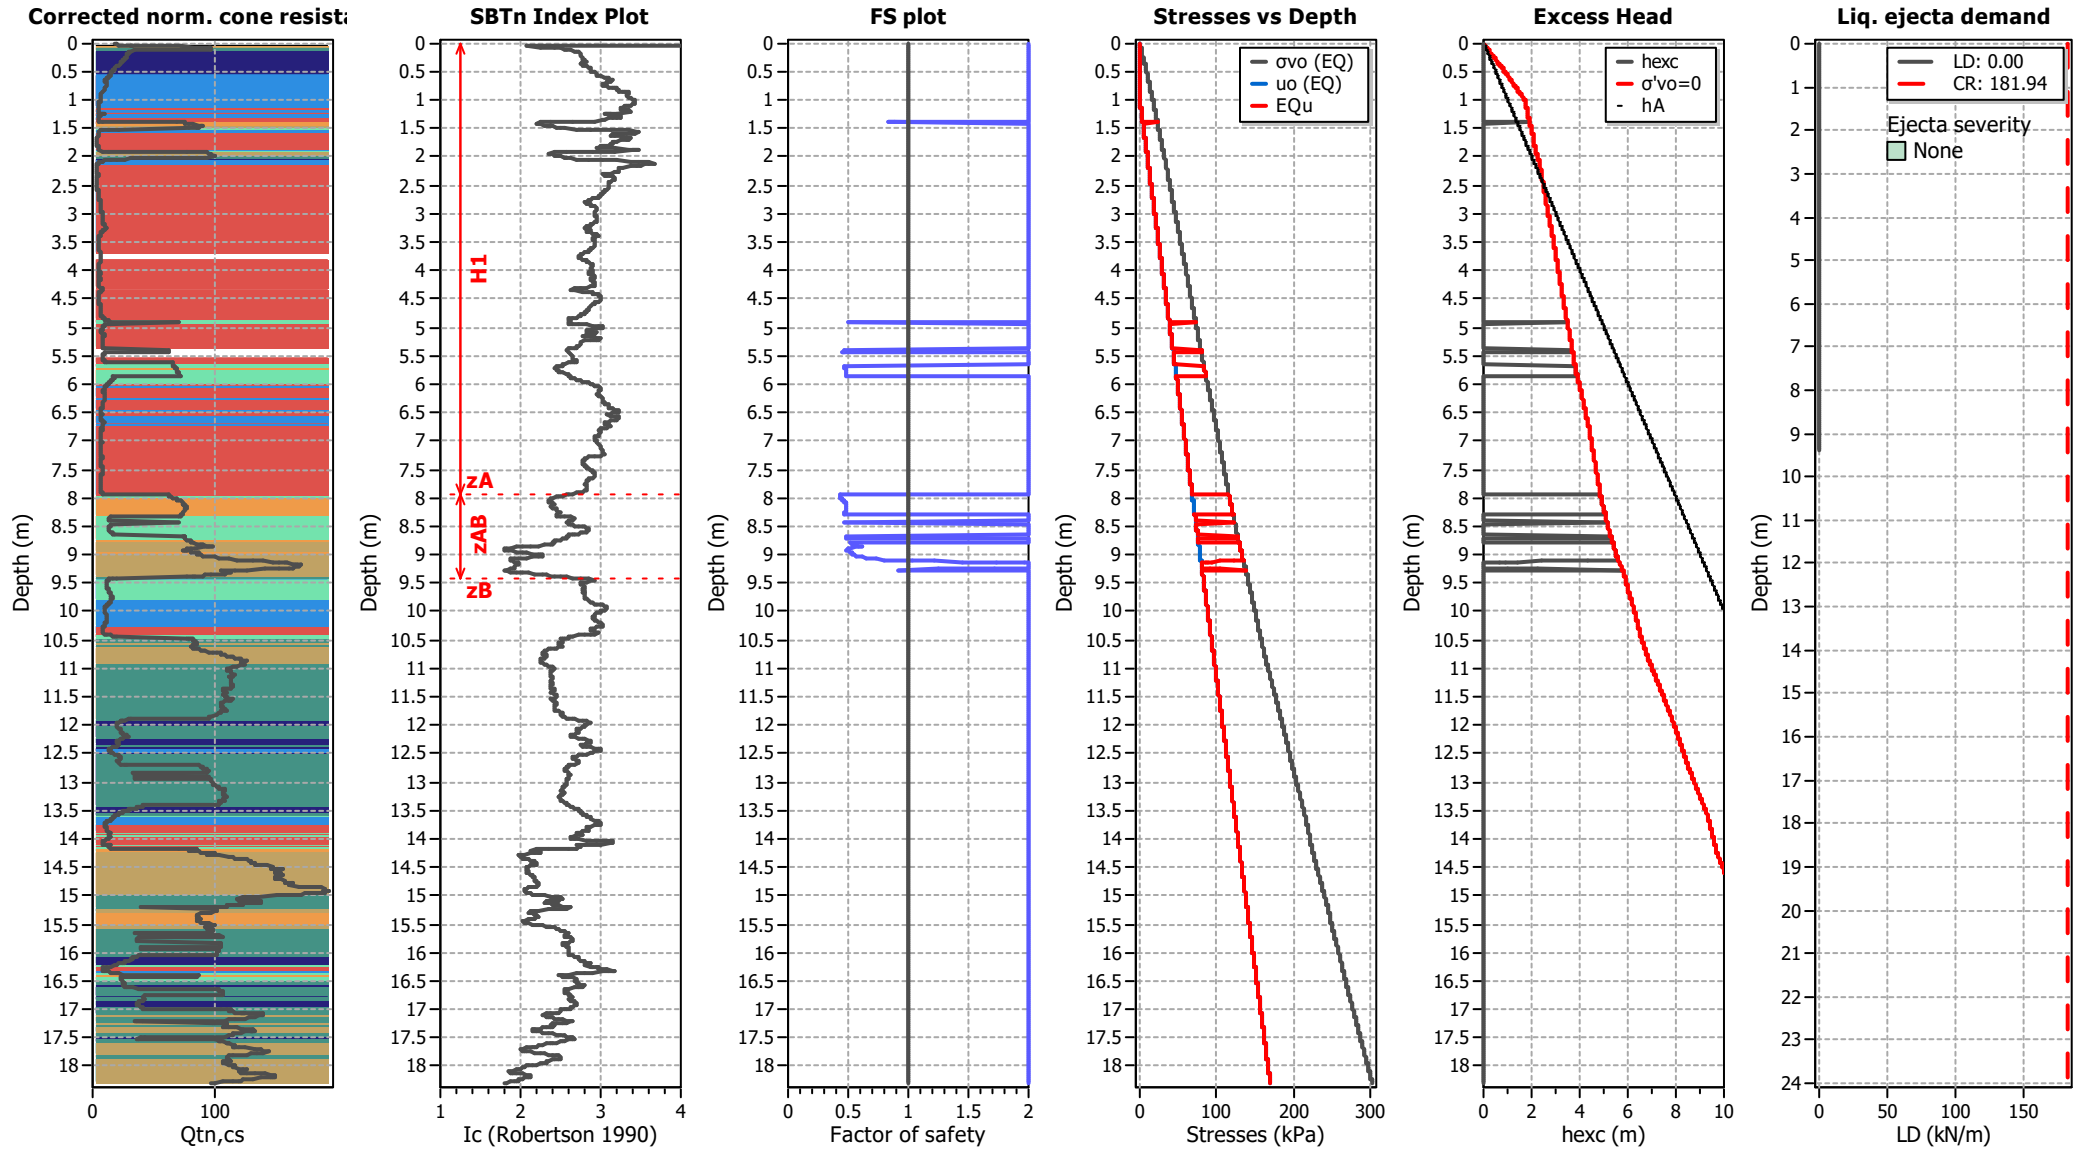

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT413

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_0 applied:	Yes	MSF method:	Method based

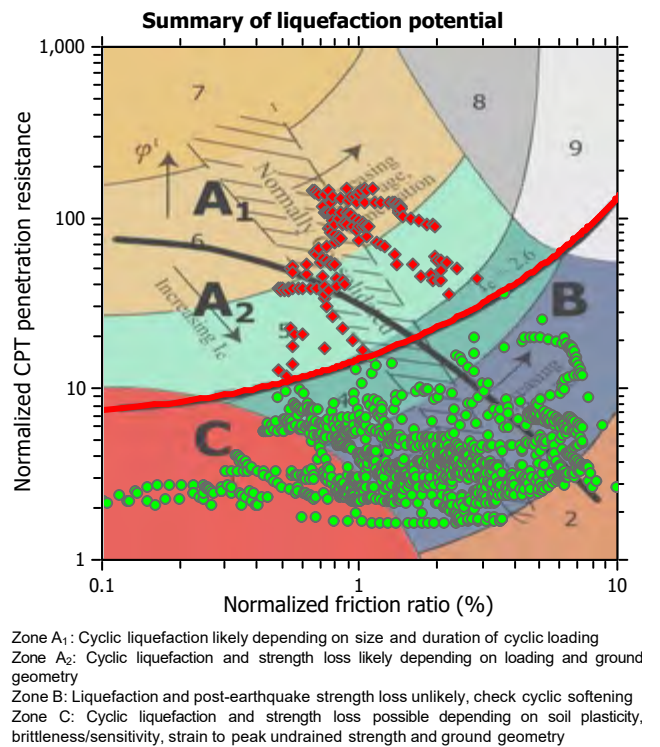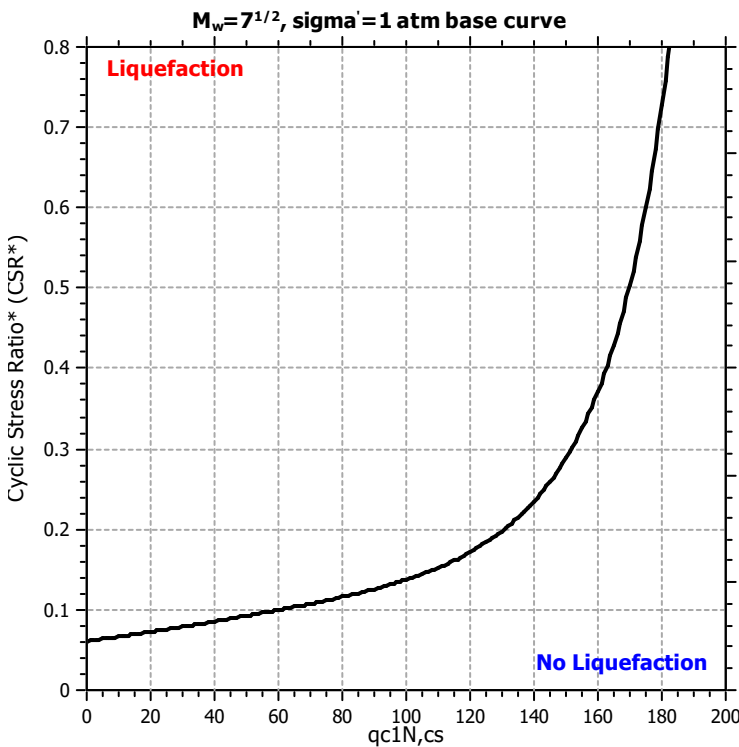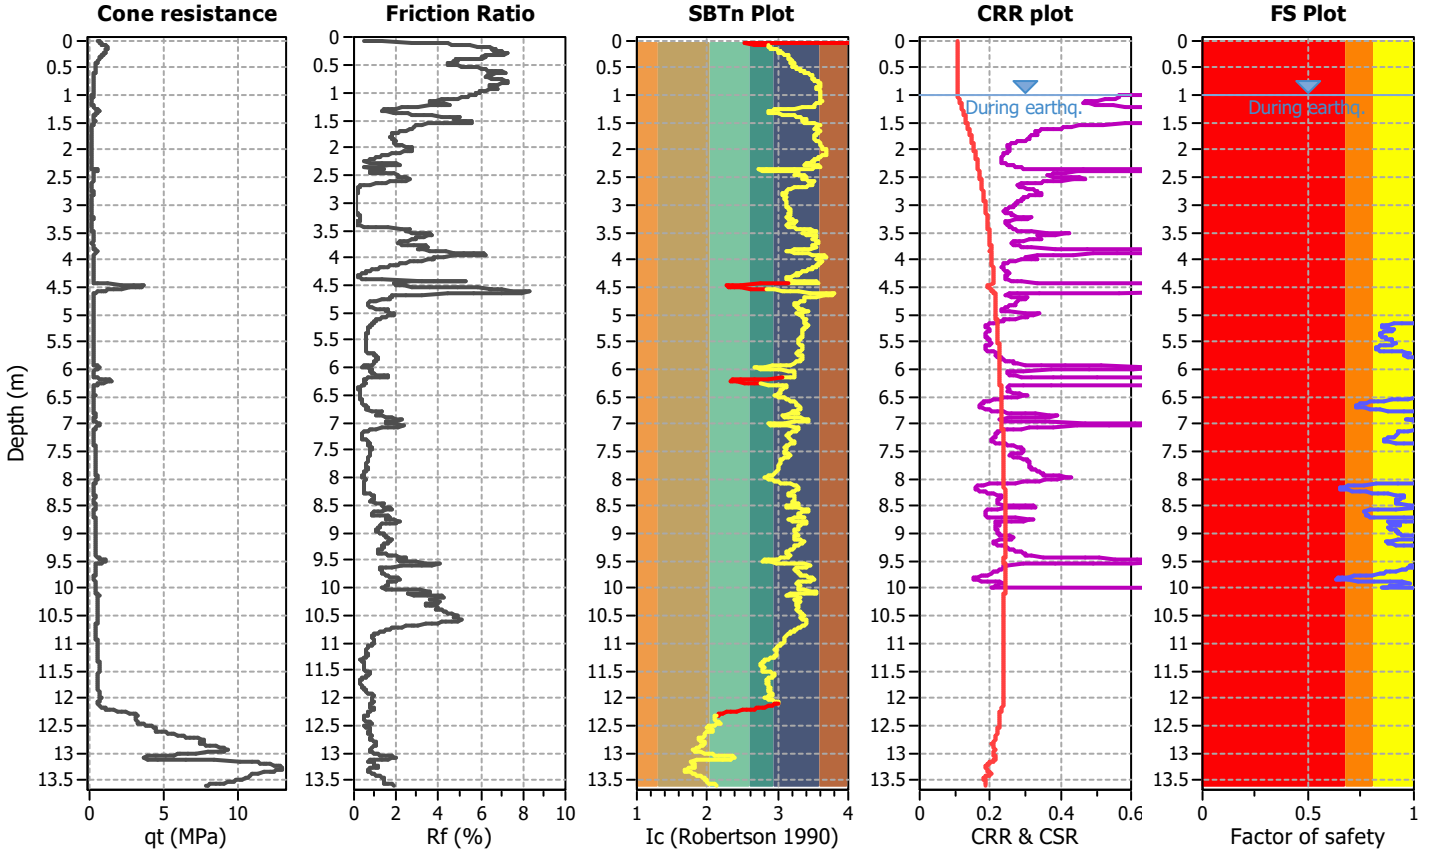

CPT basic interpretation plots

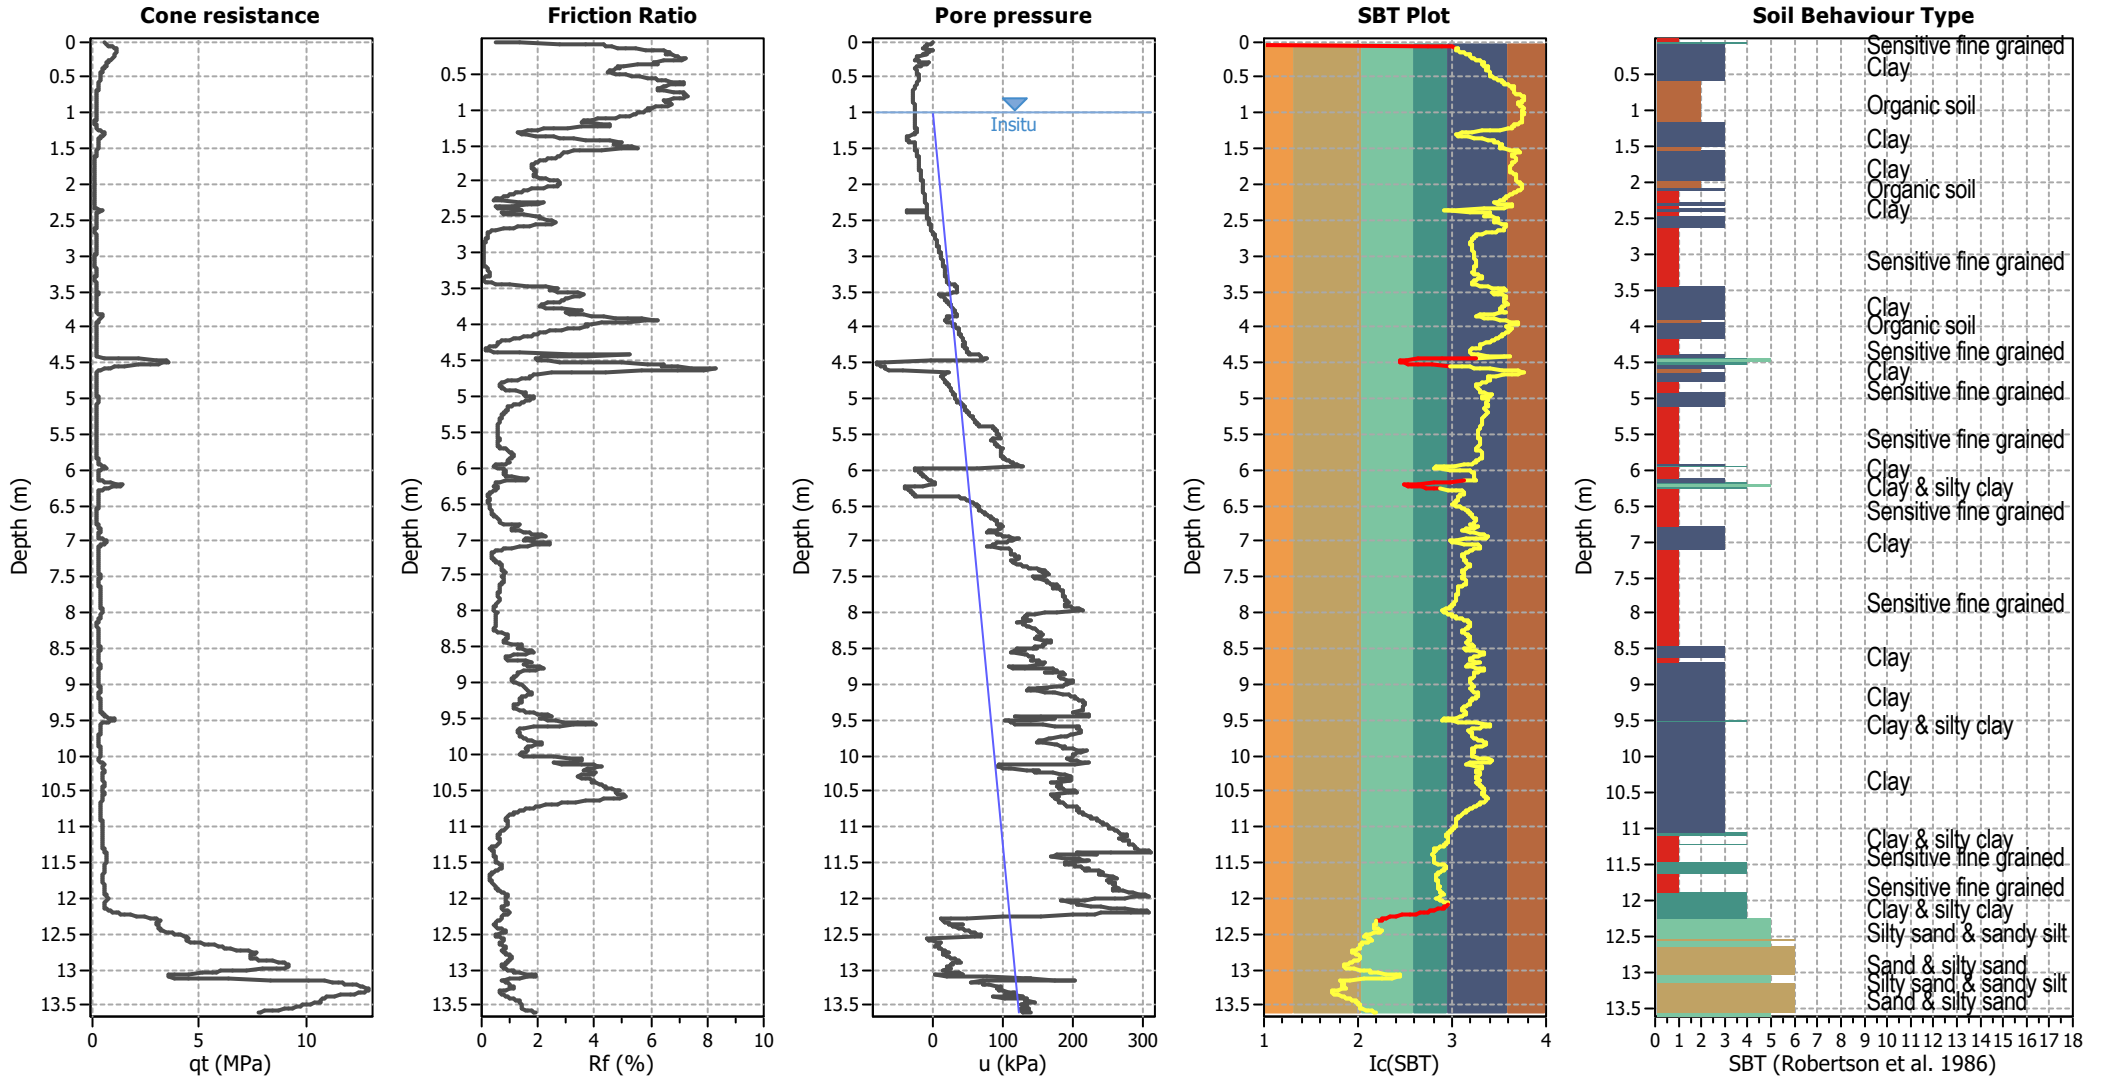


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

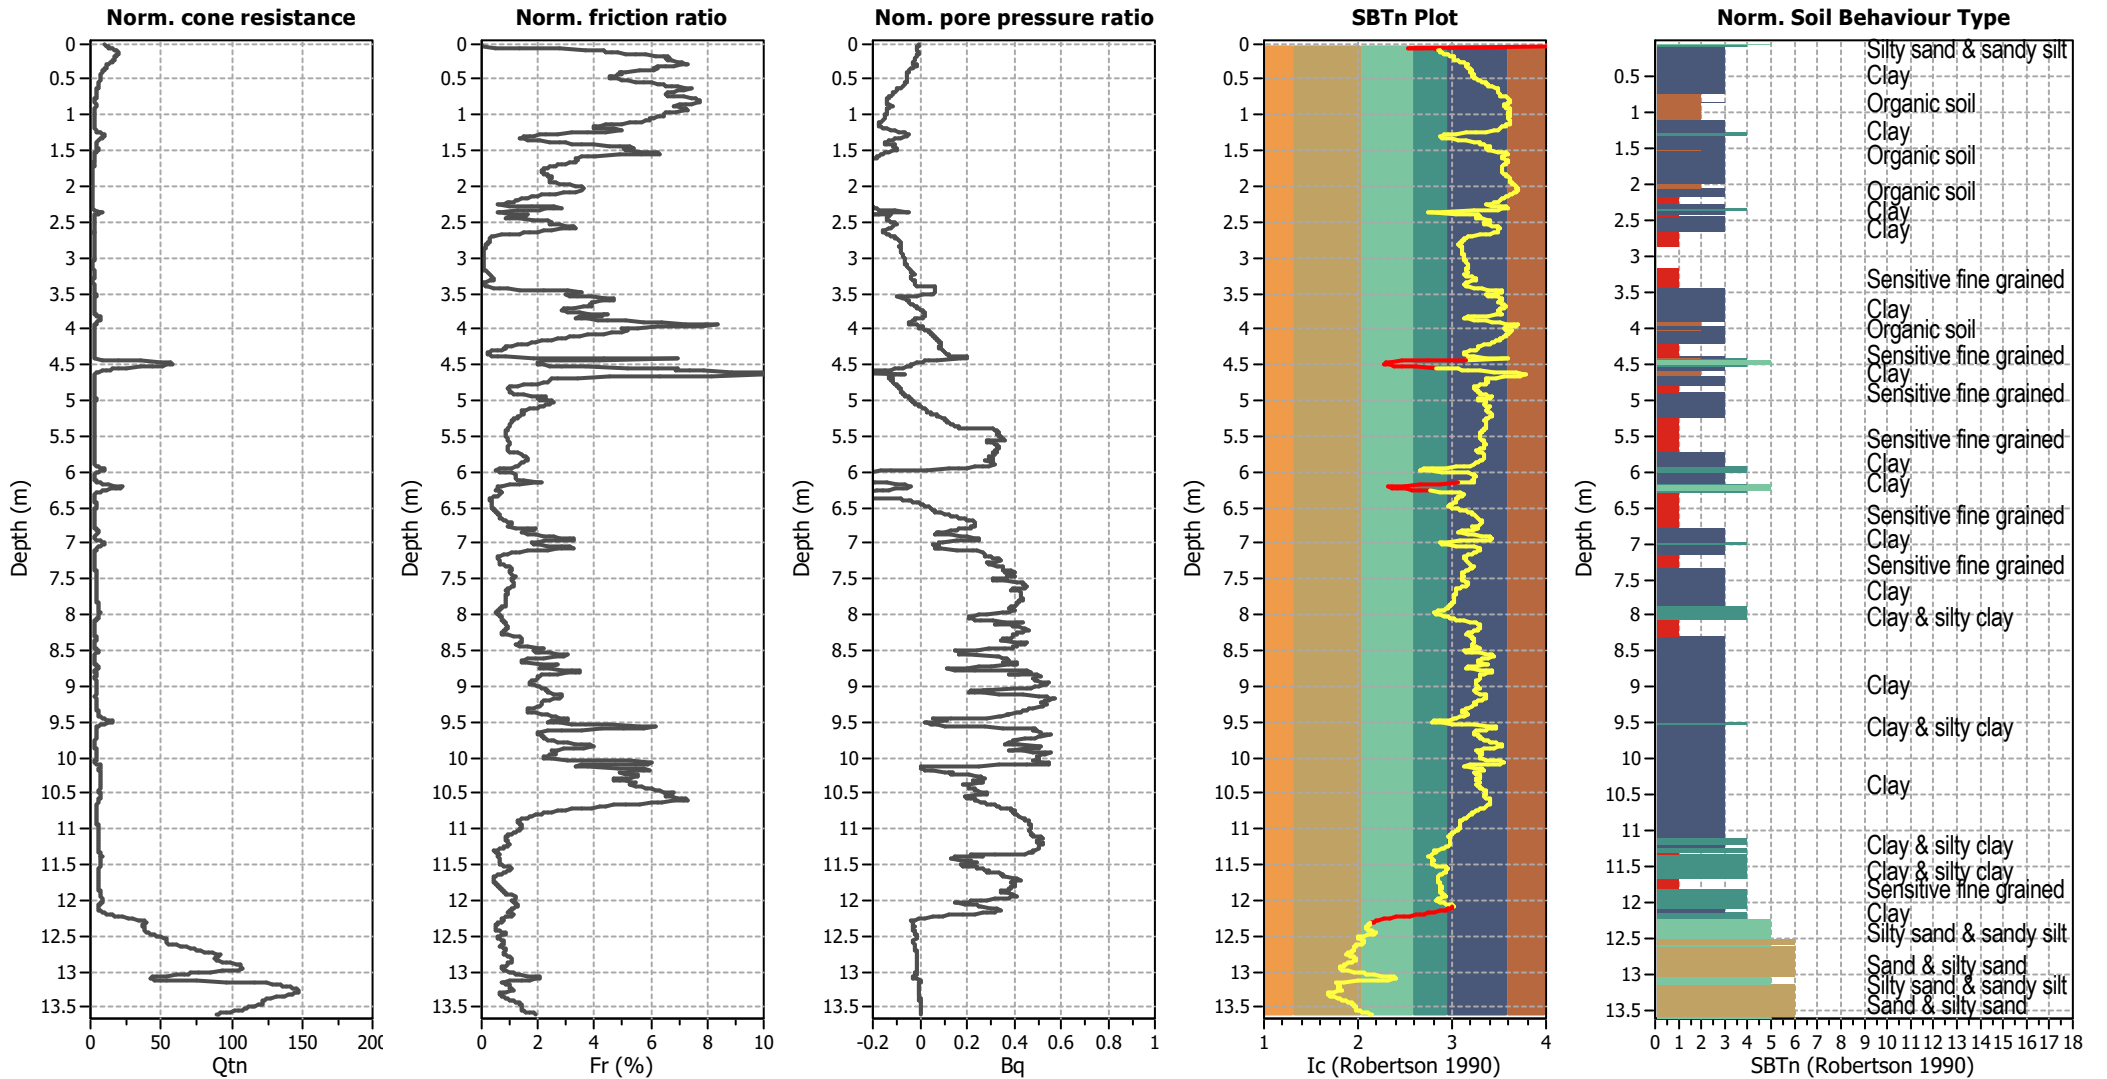


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

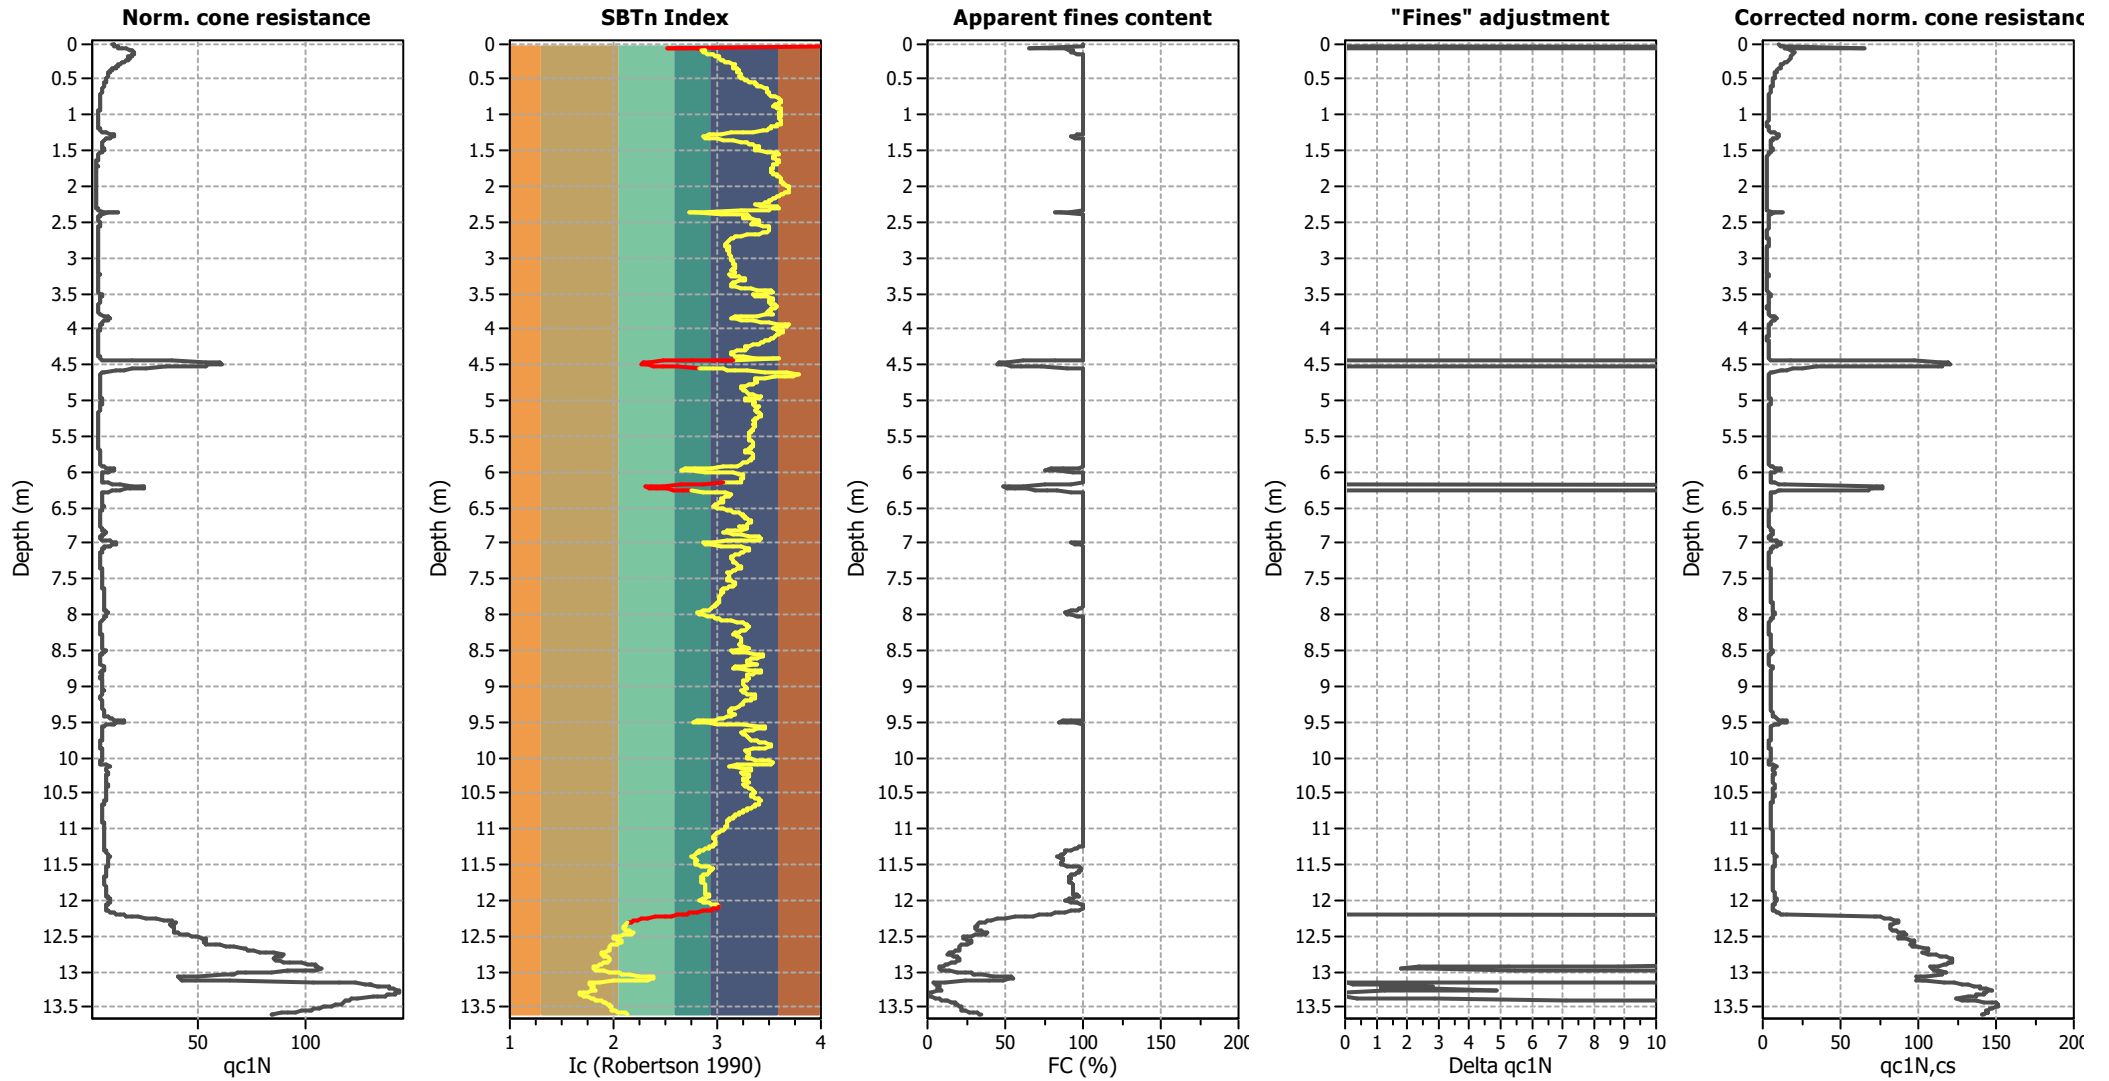

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

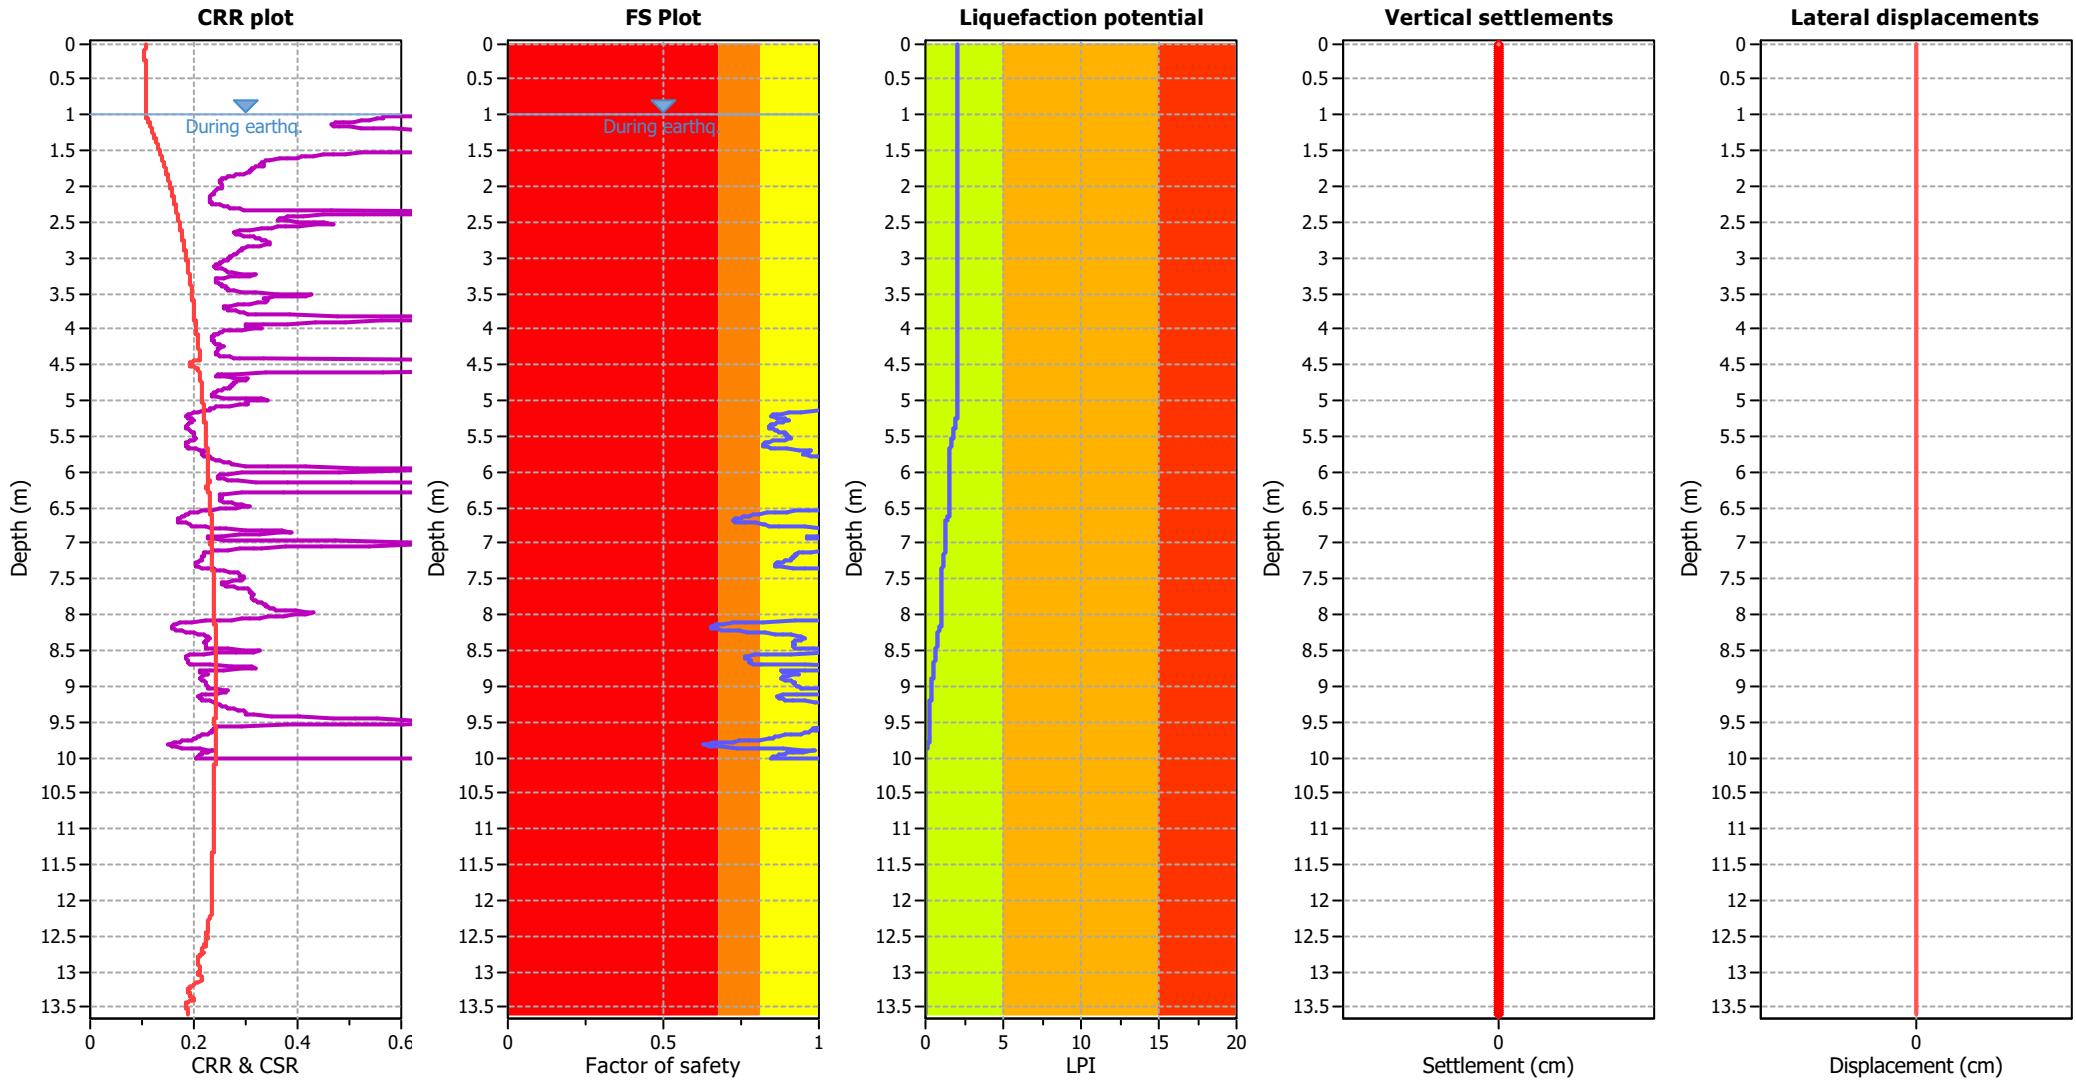

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (earthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

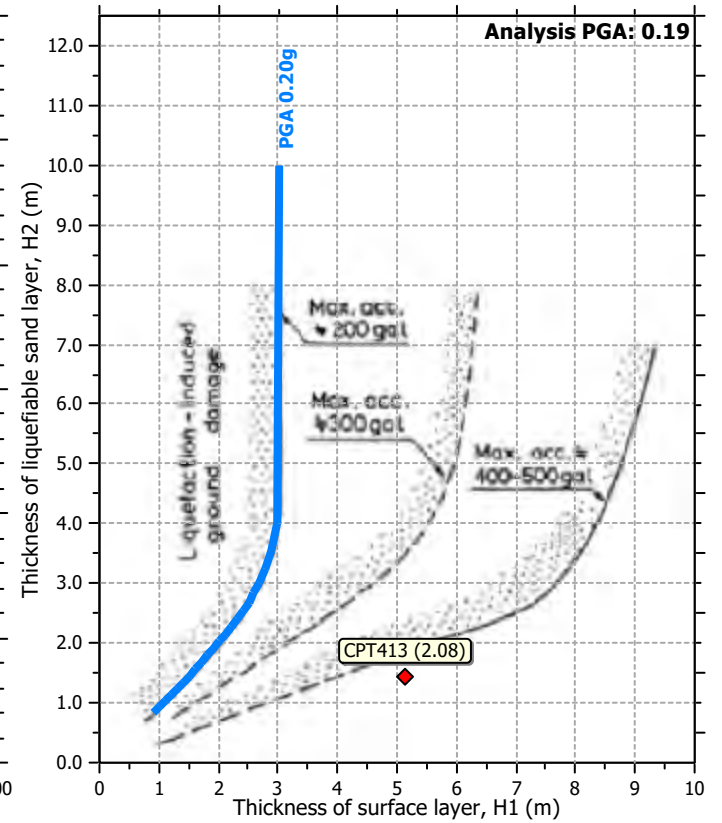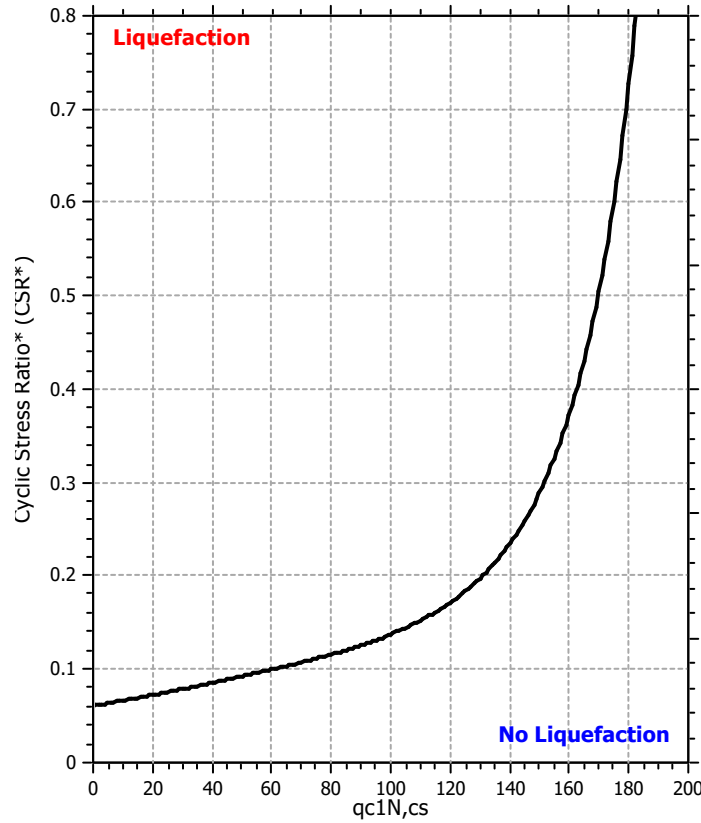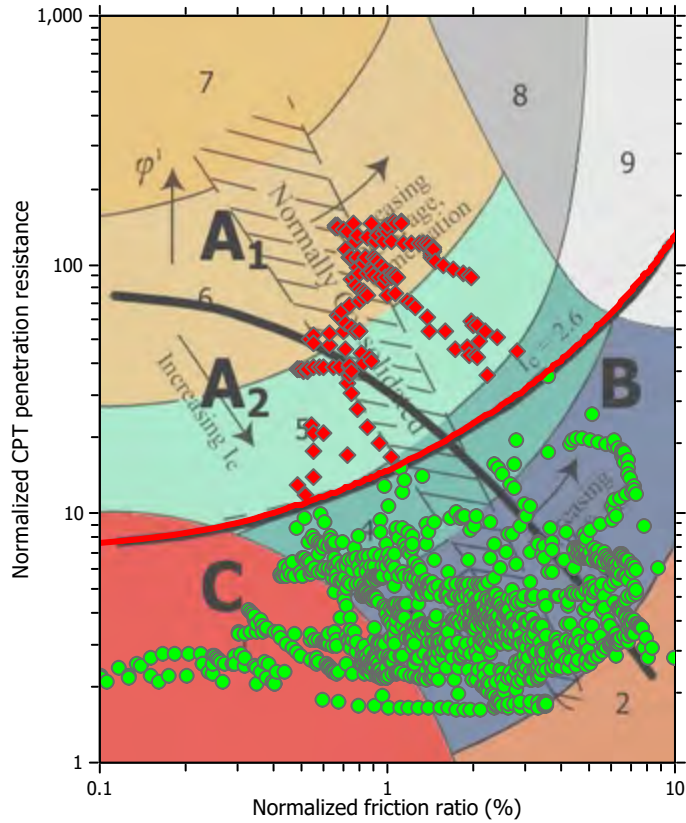

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_v applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

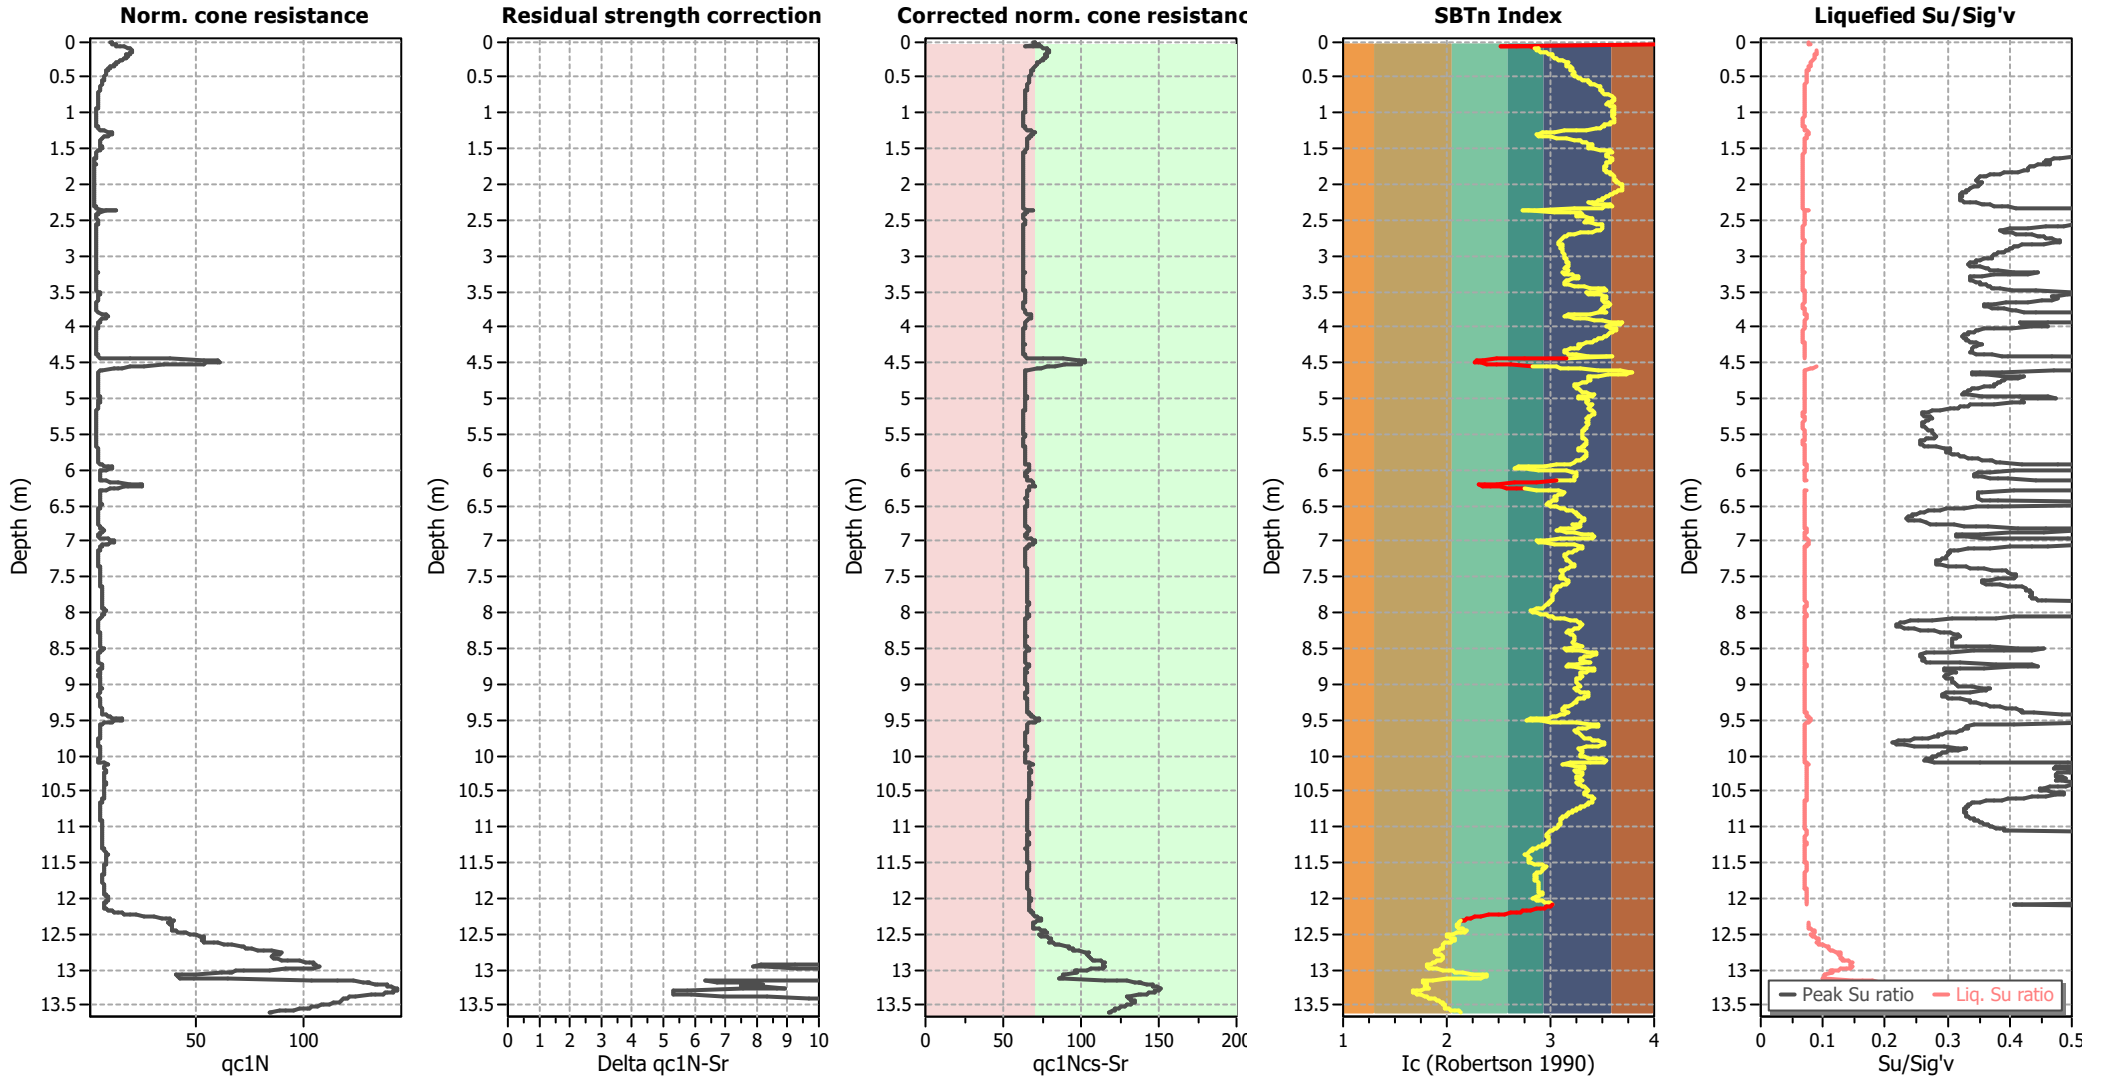

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

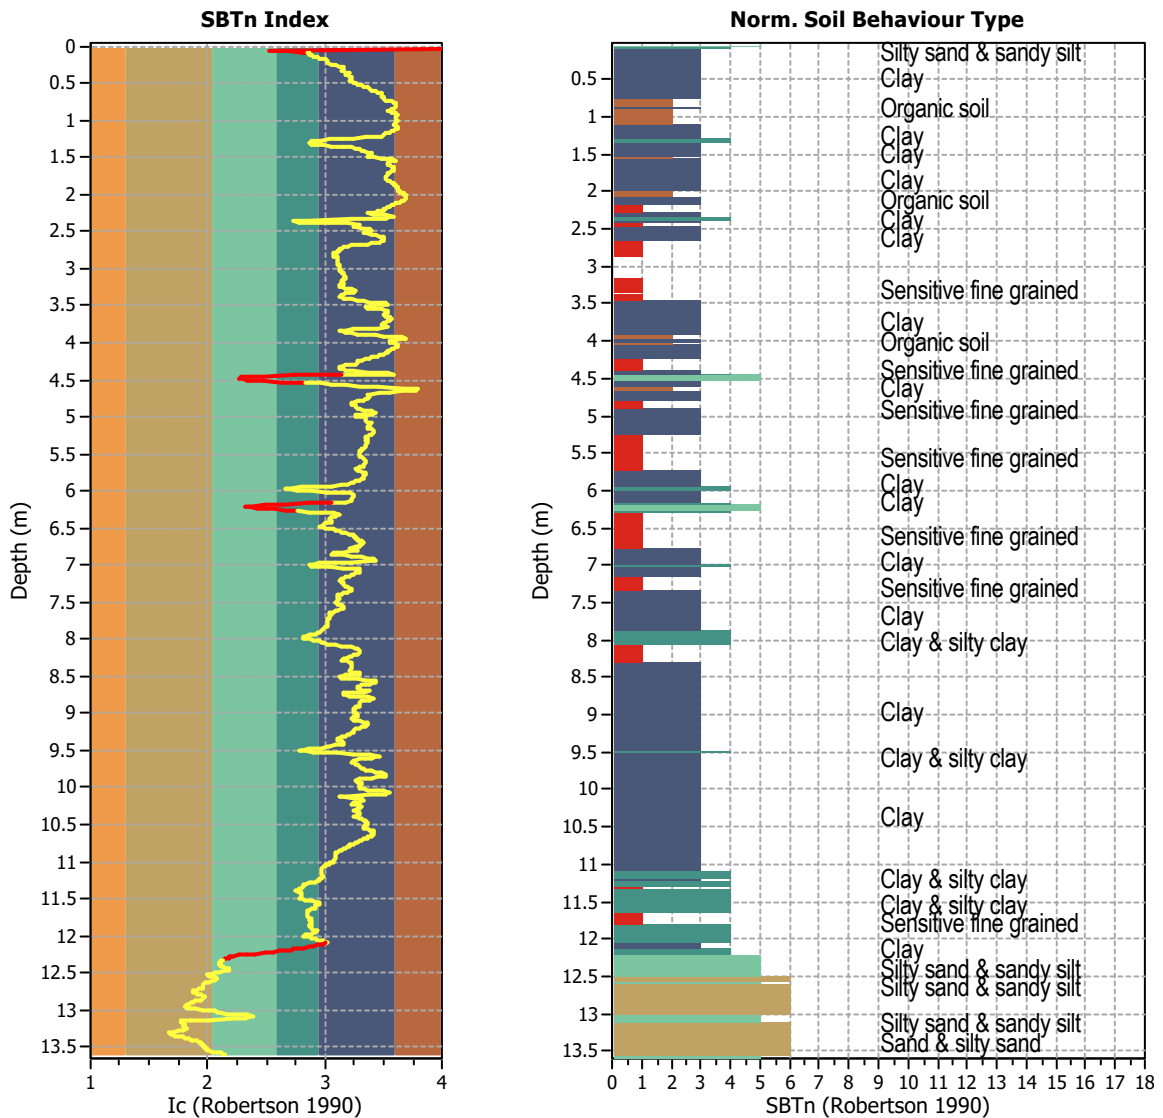


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1360
 Total points excluded: 54
 Exclusion percentage: 3.97%
 Number of layers detected: 6


Estimation of post-earthquake settlements

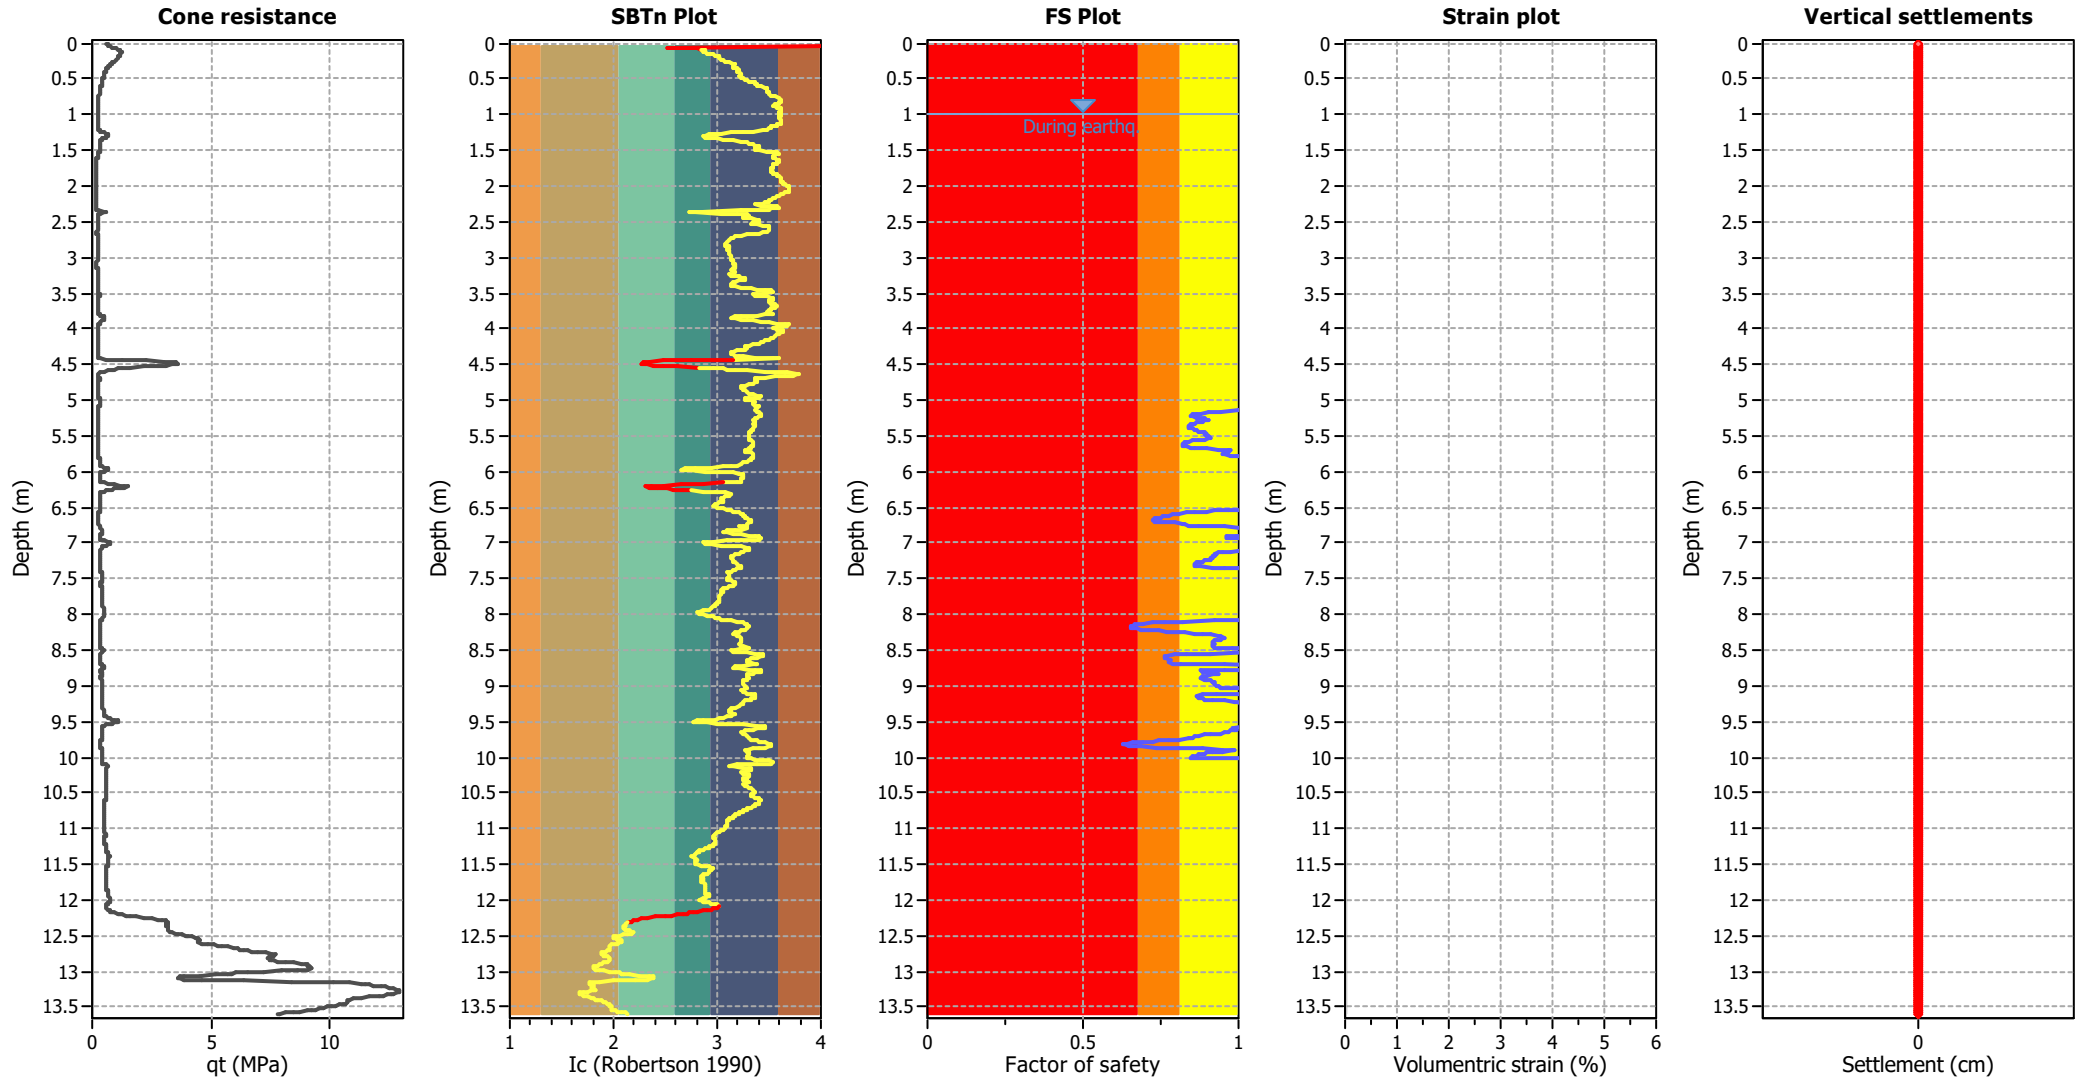

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

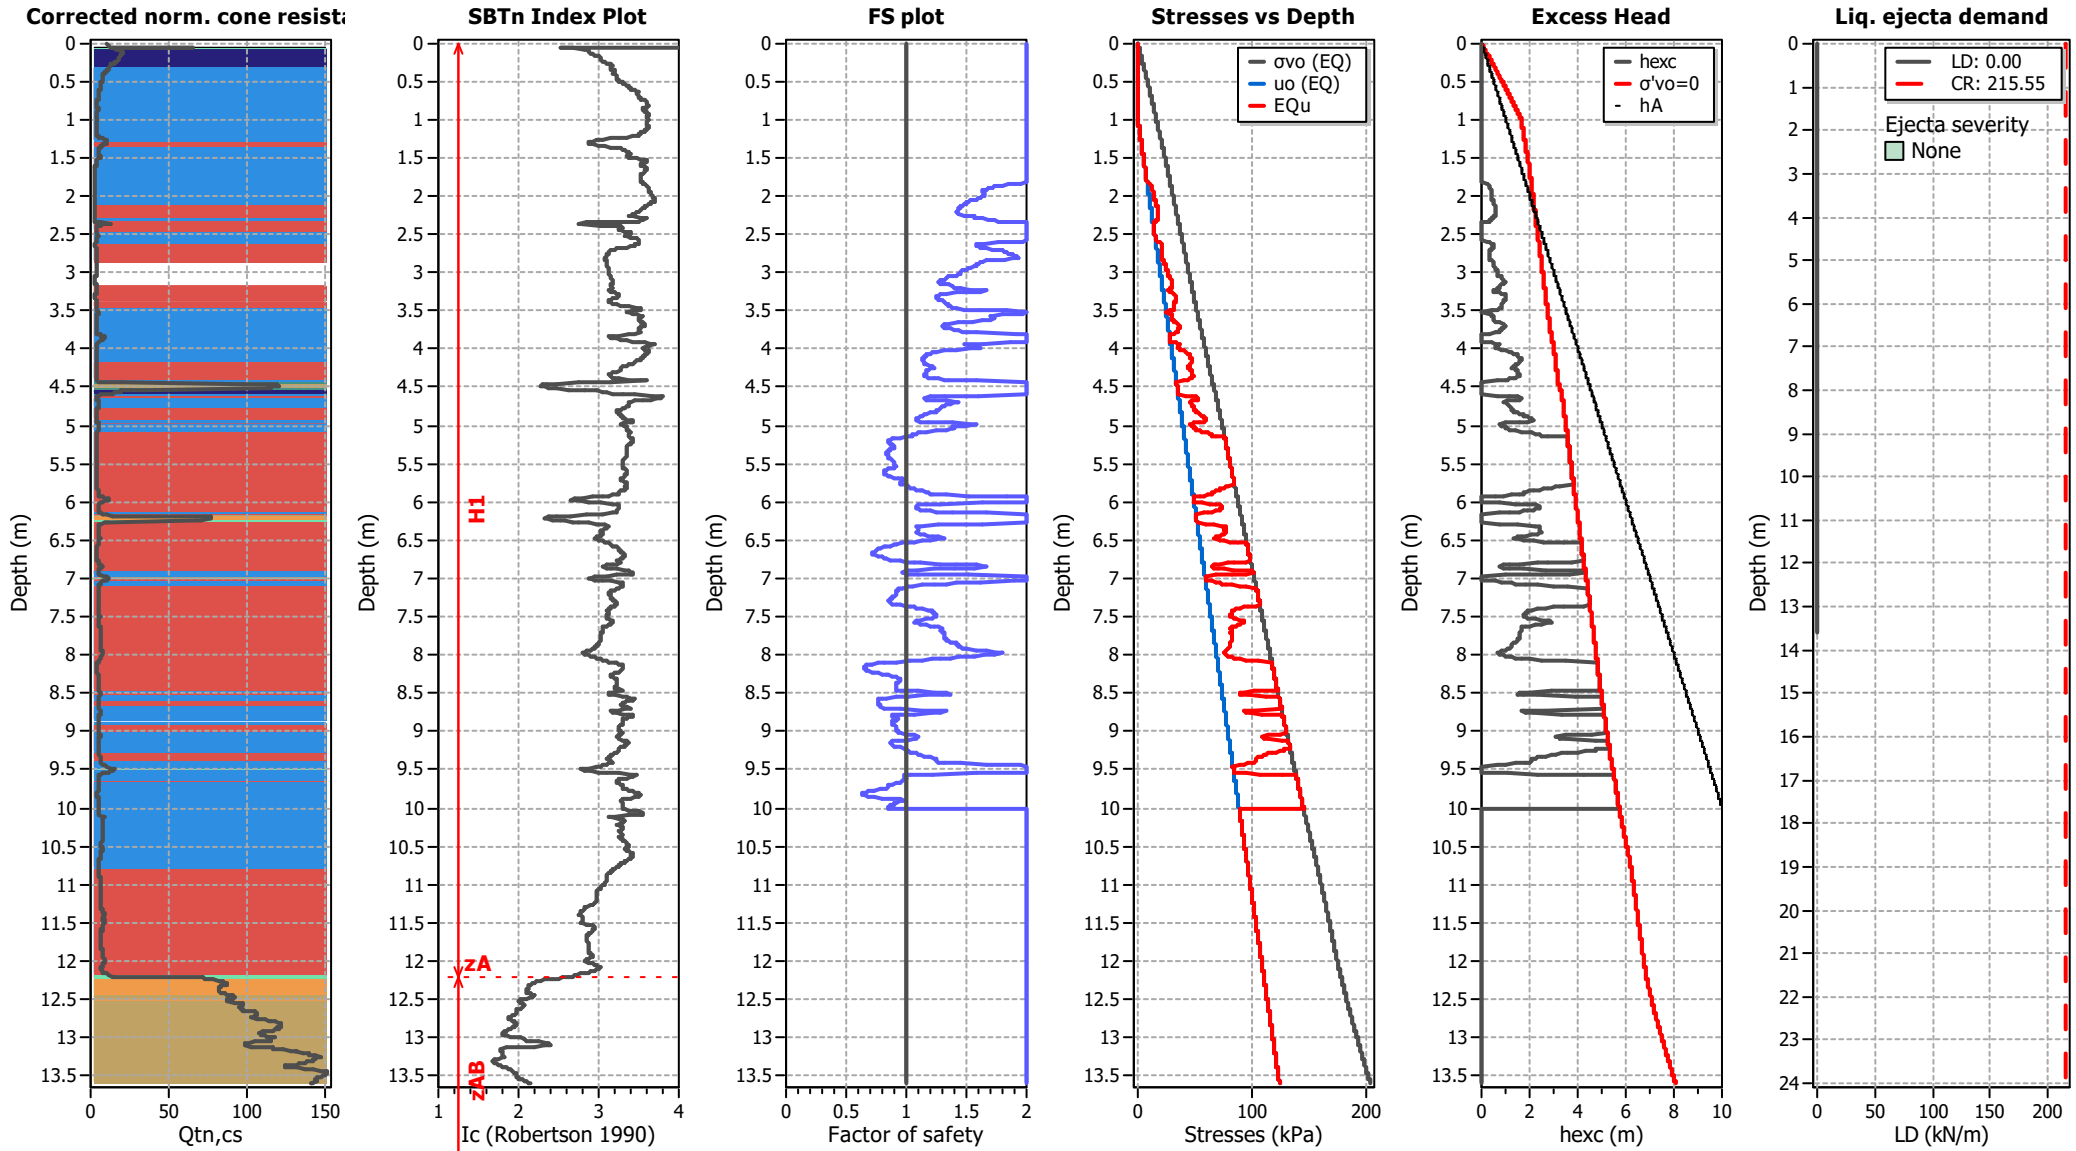

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT414

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior	
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	applied:	Sand & Clay
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth applied:	Yes
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	Limit depth:	10.00 m
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes	MSF method:	Method based

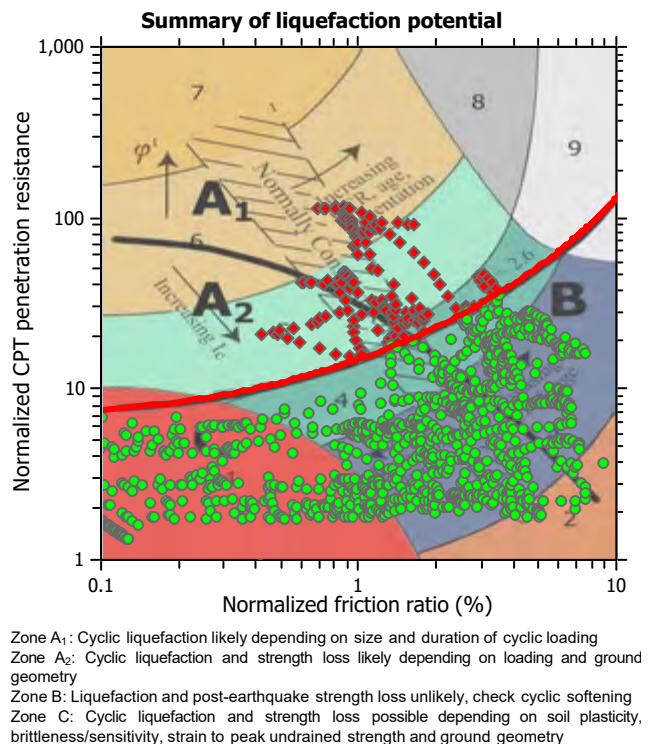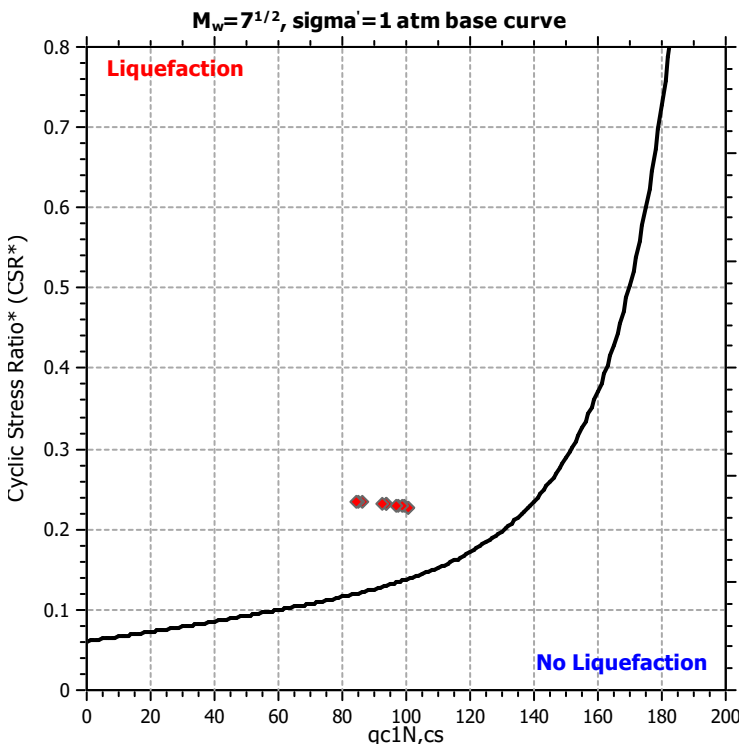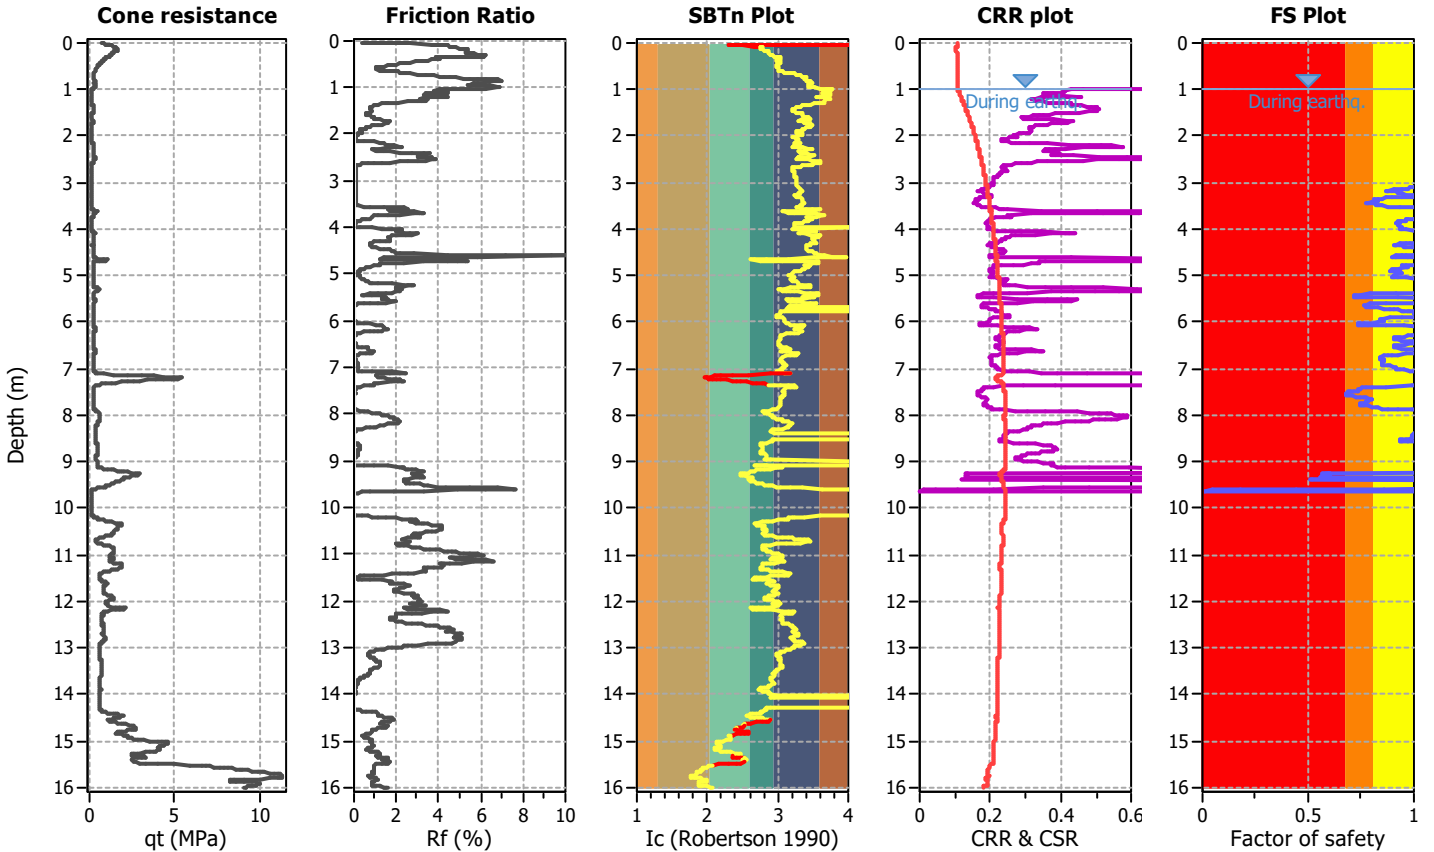

CPT basic interpretation plots

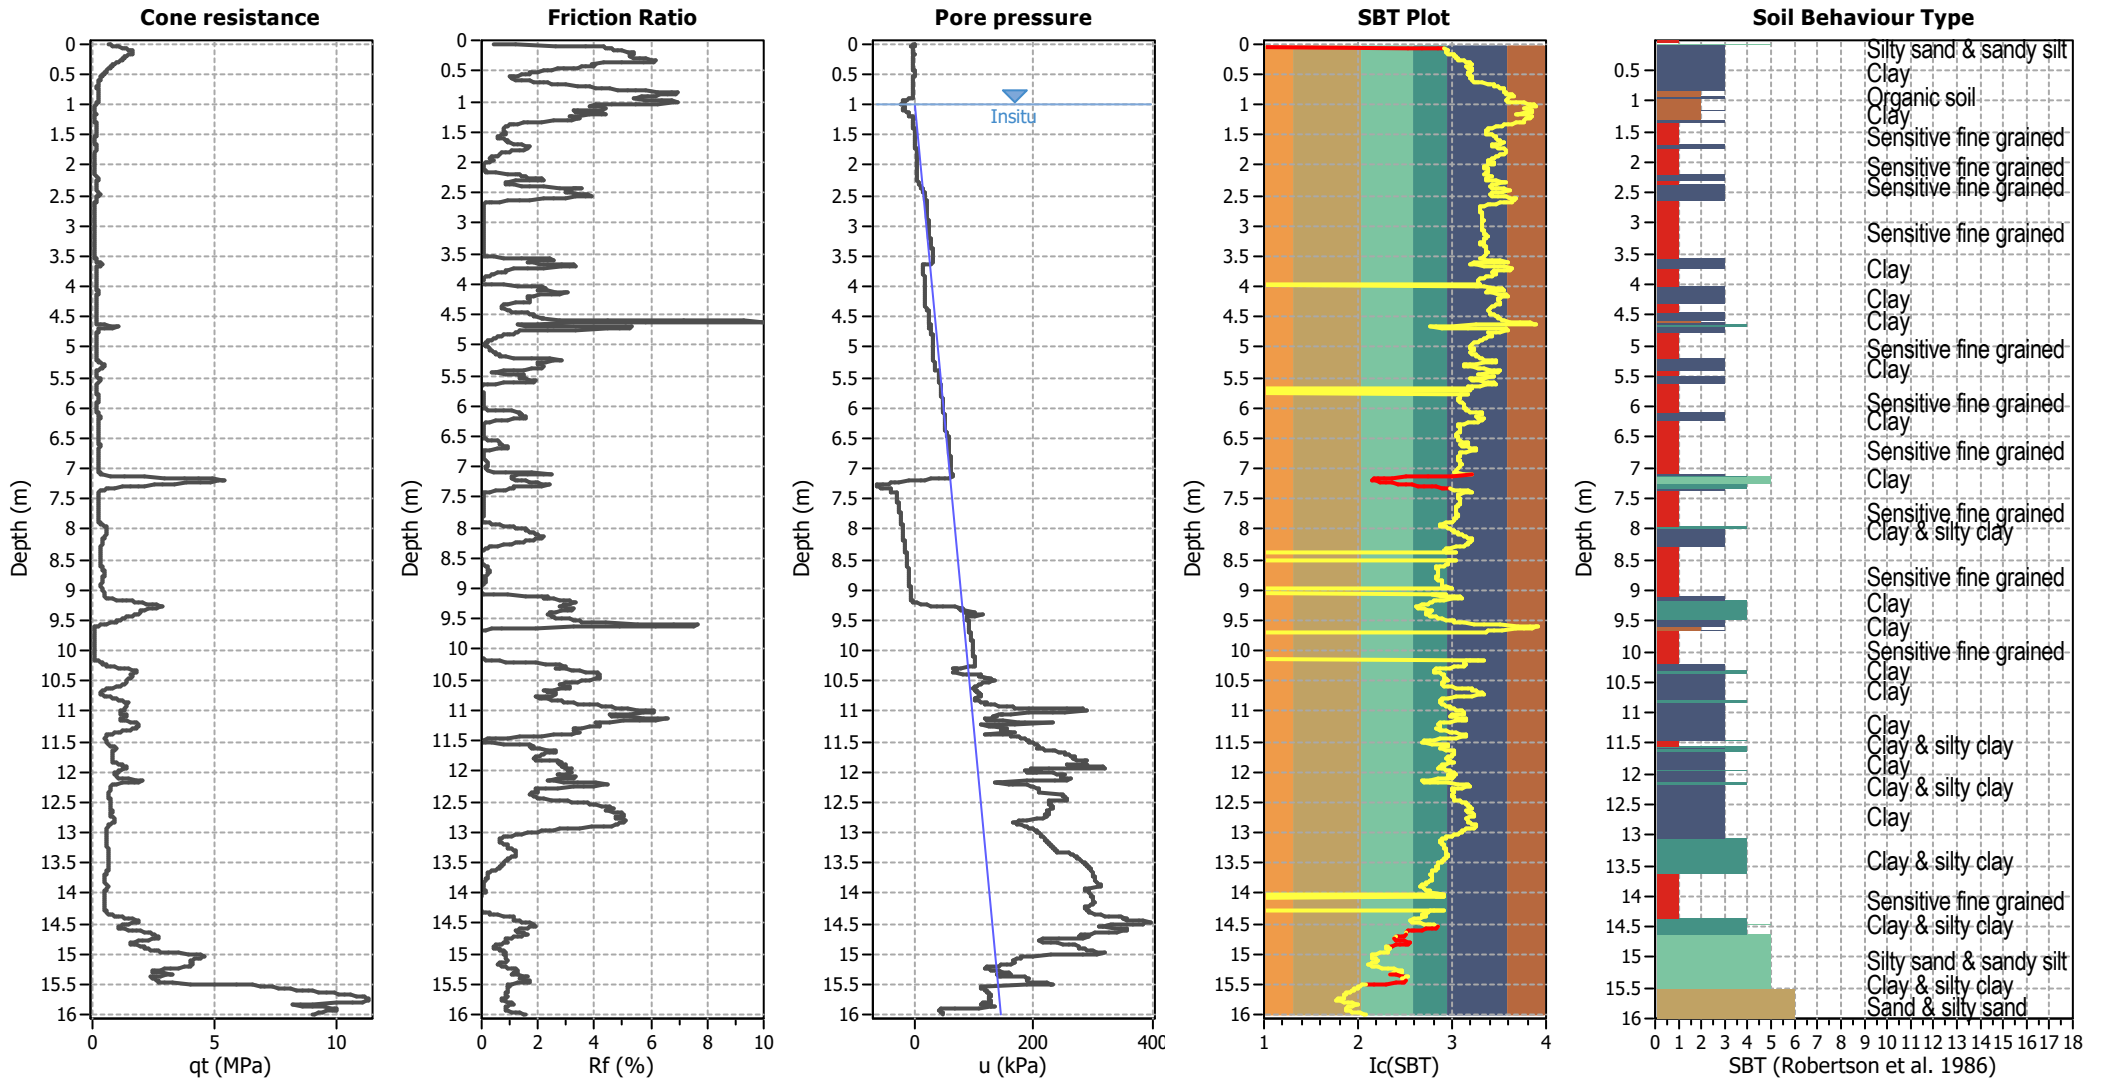


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

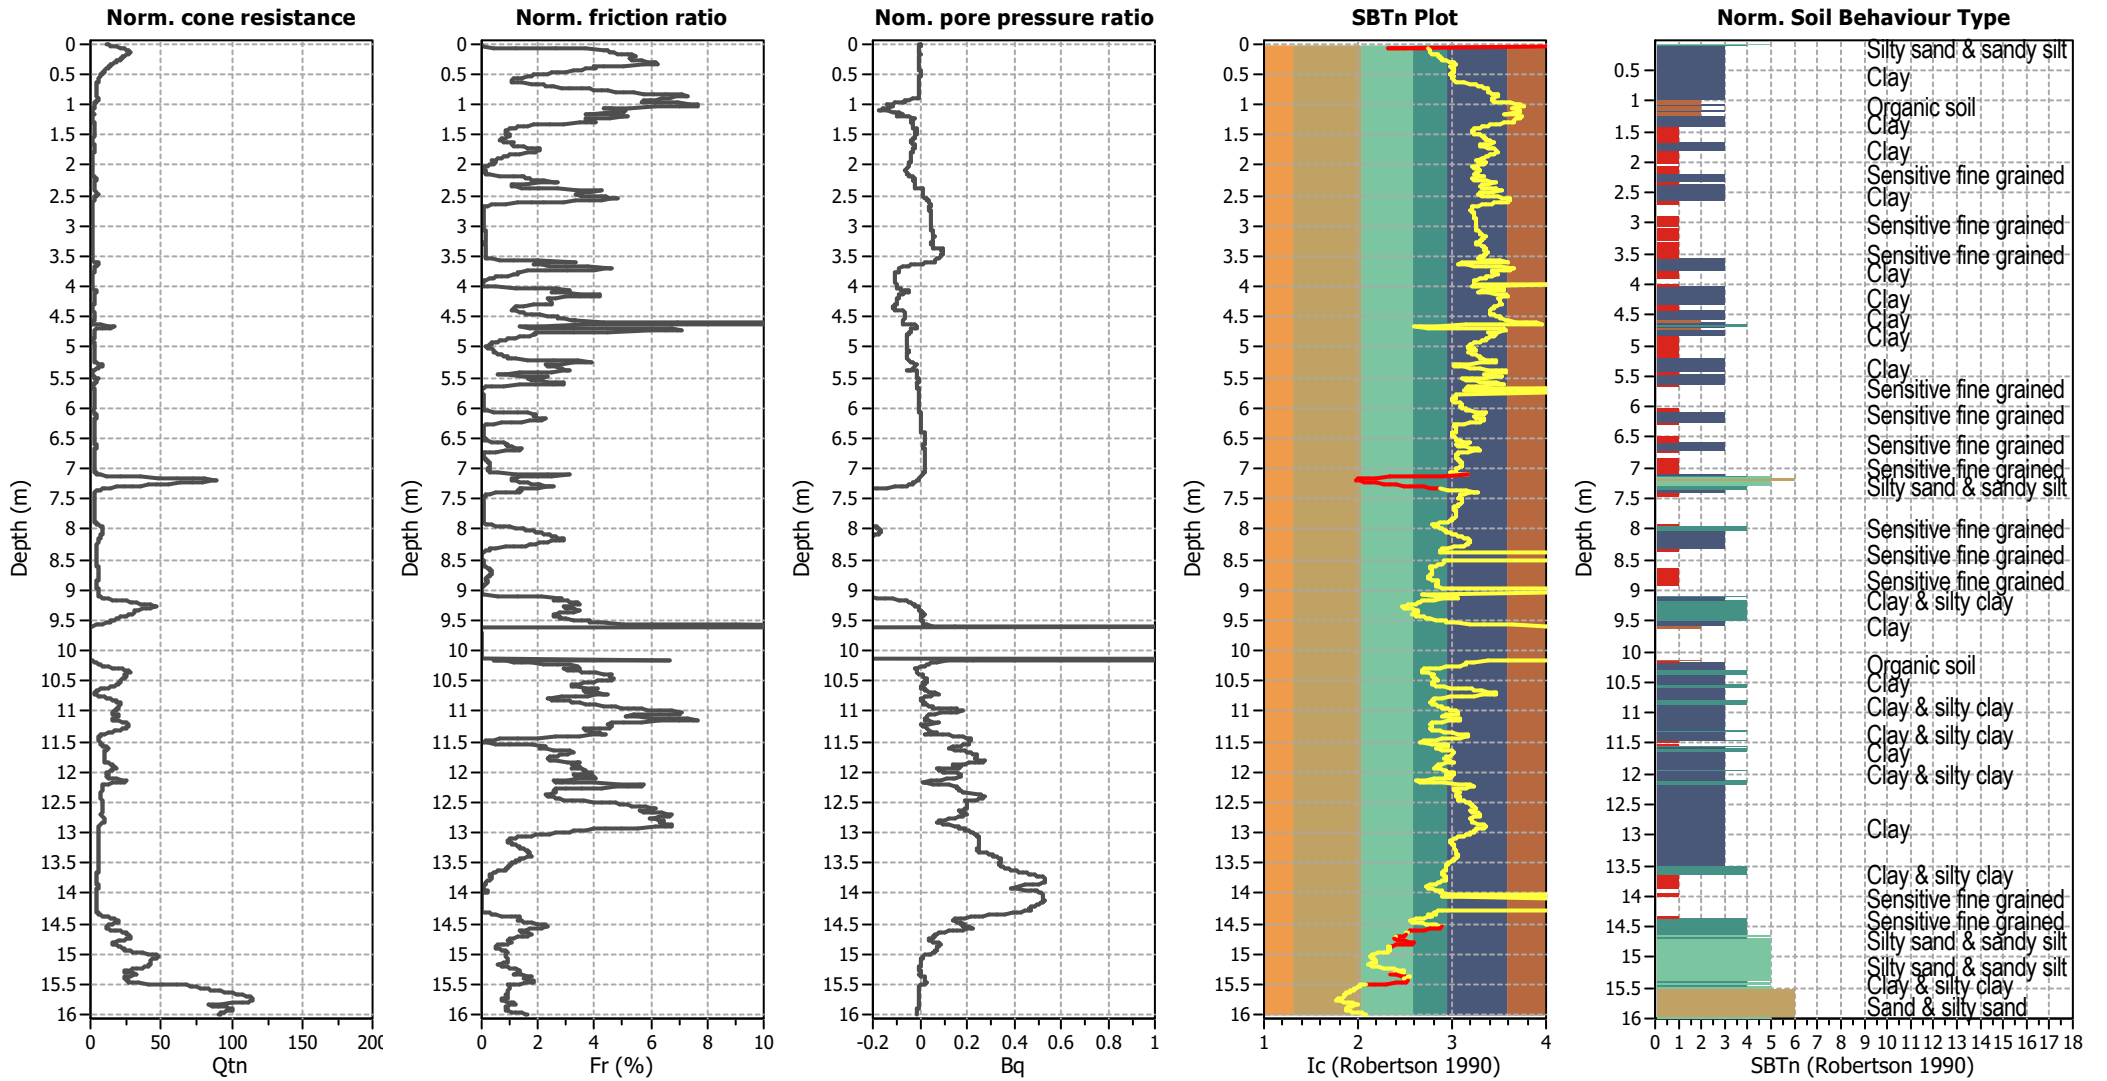


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

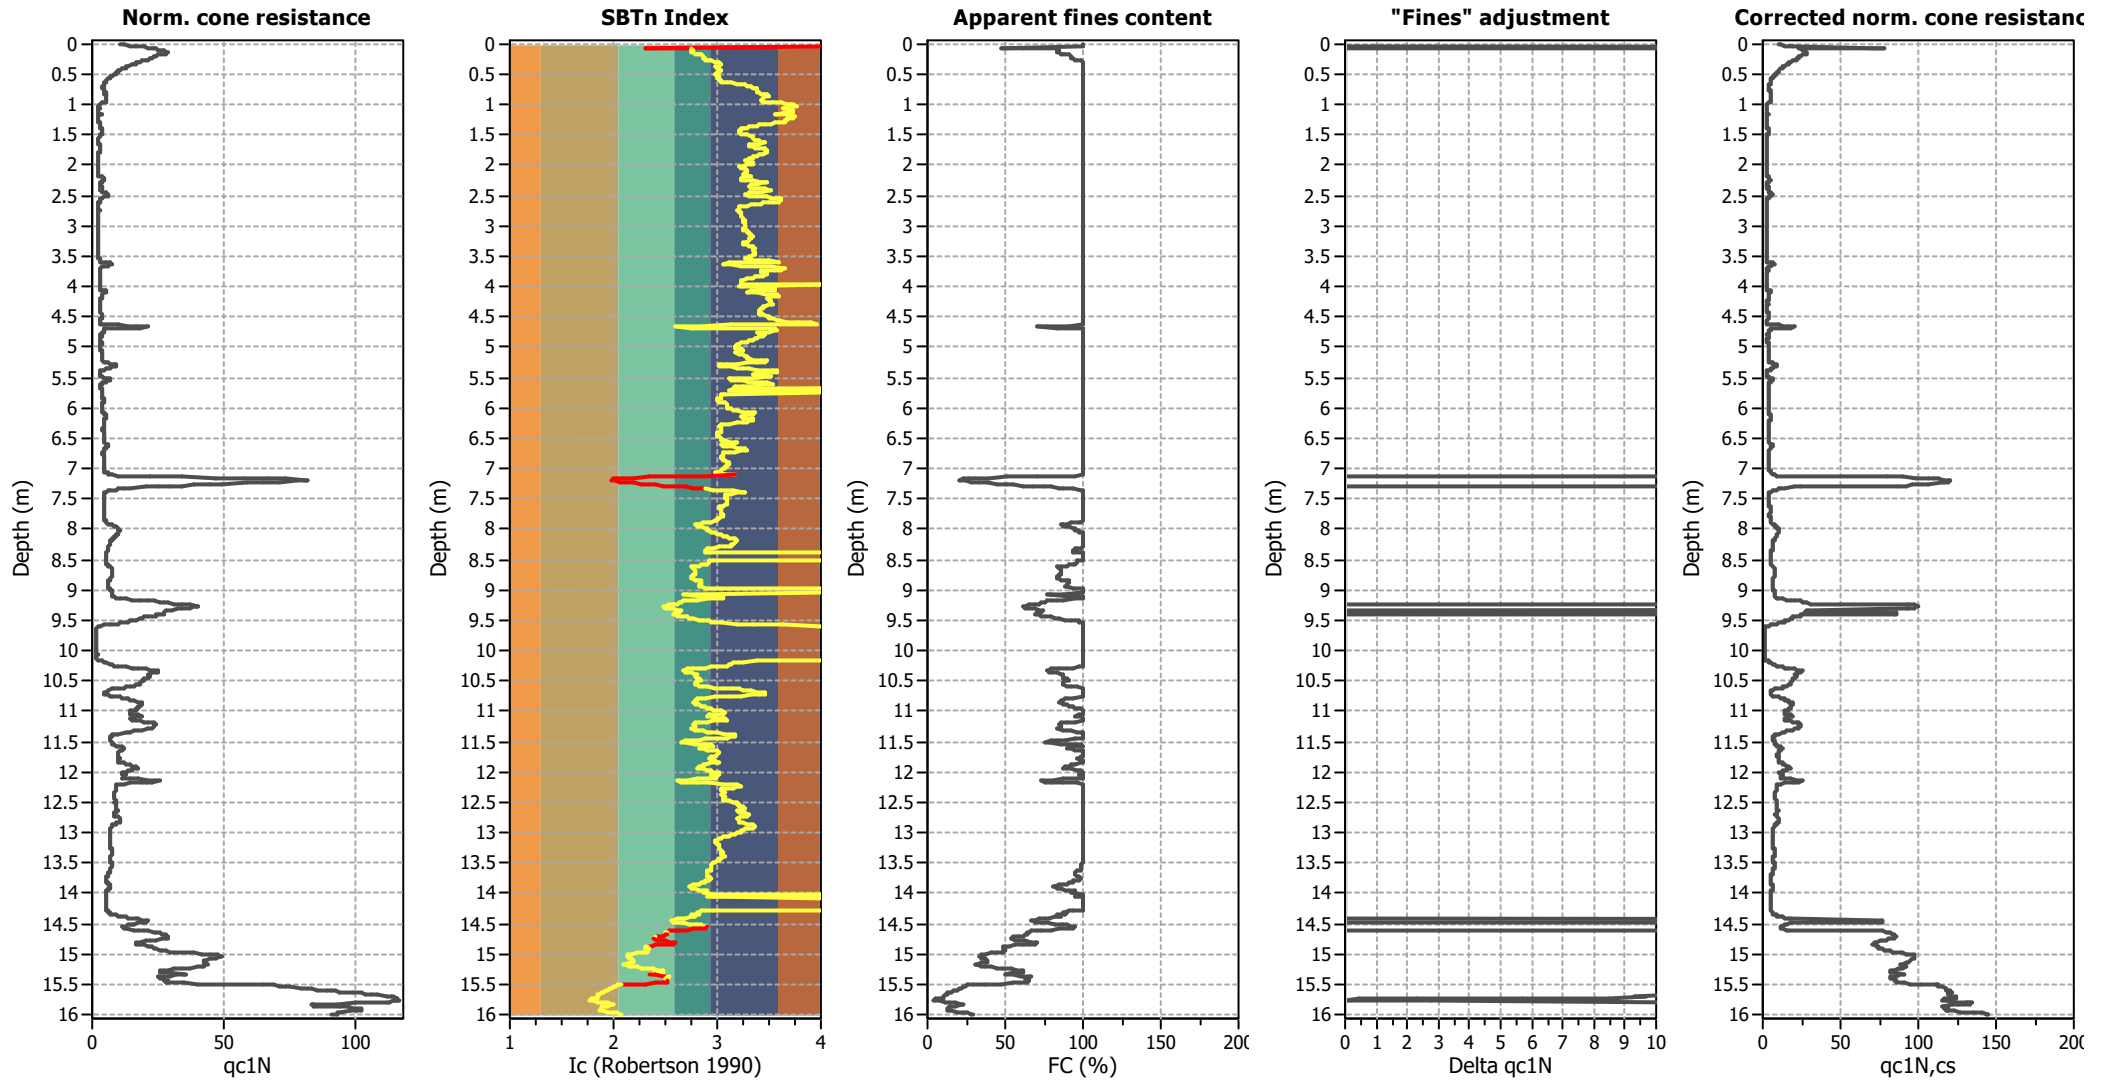

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

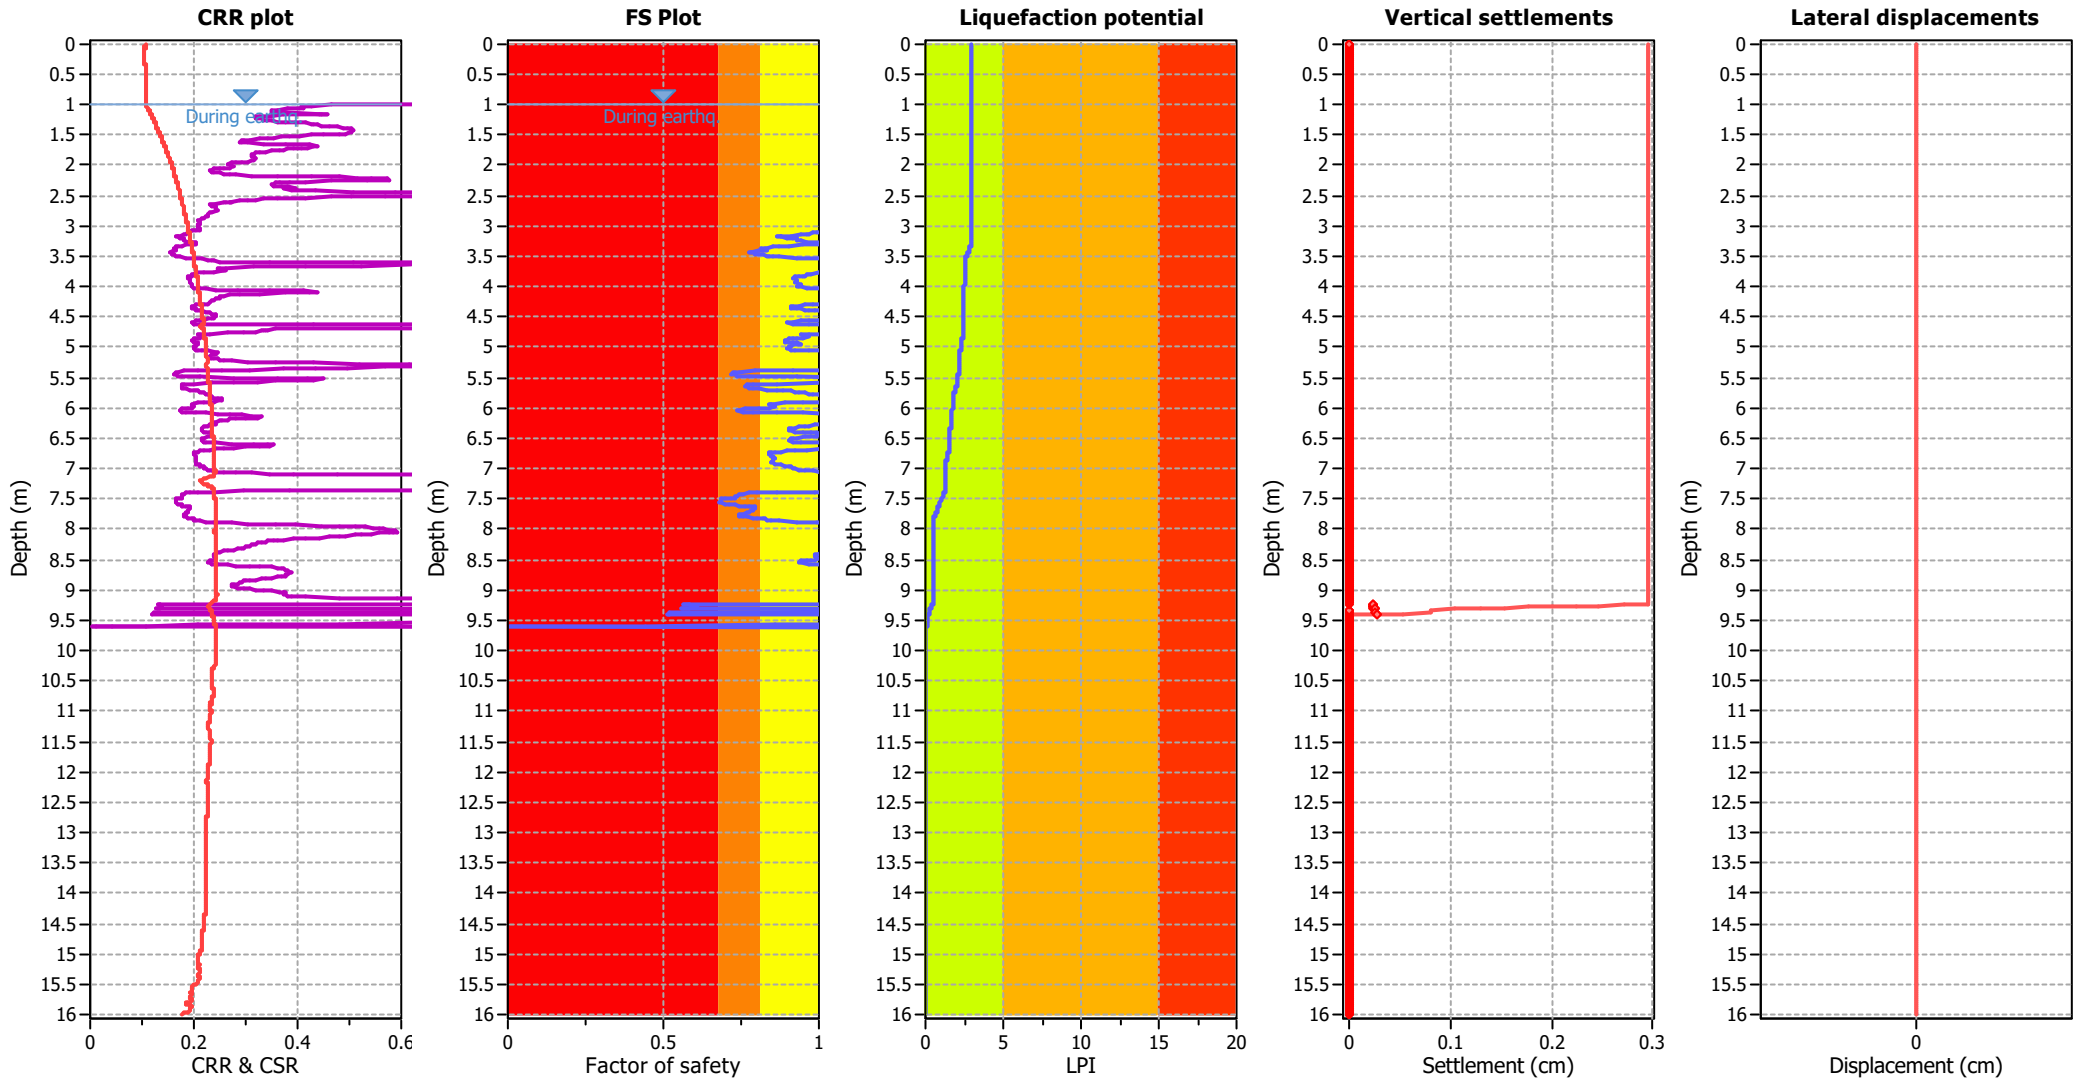

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GW (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

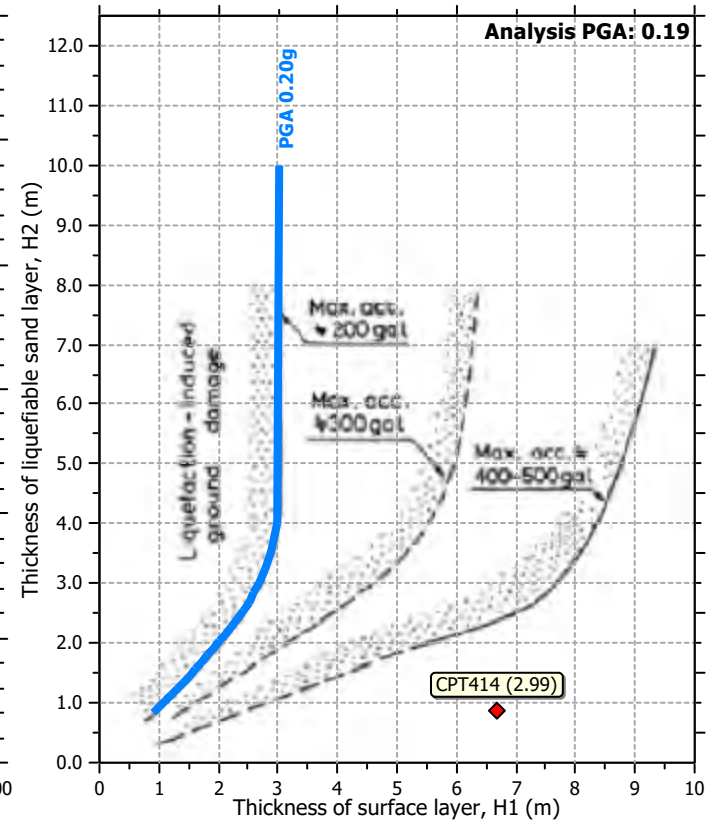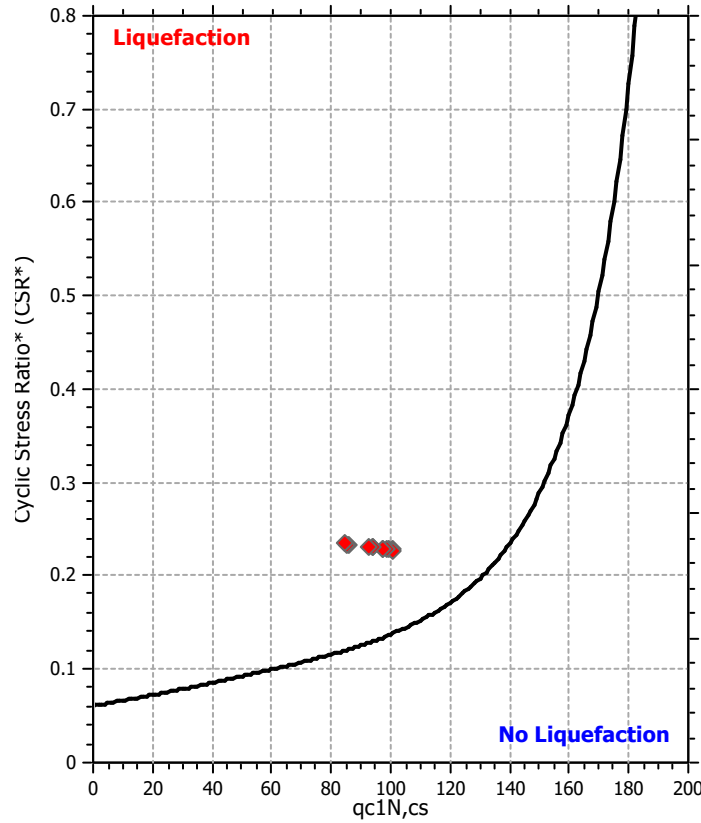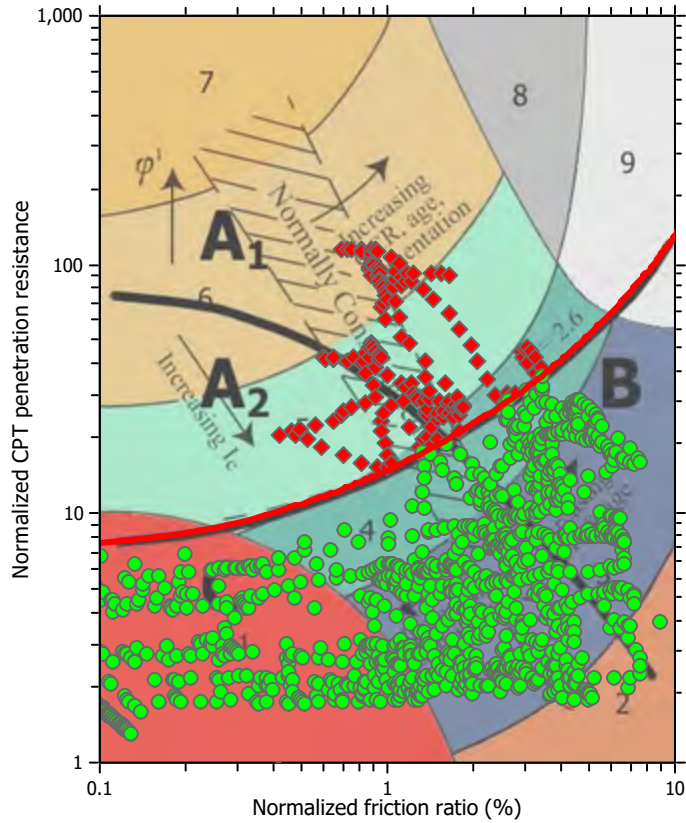

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on I_c value	I_c cut-off value:	2.60	K_o applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

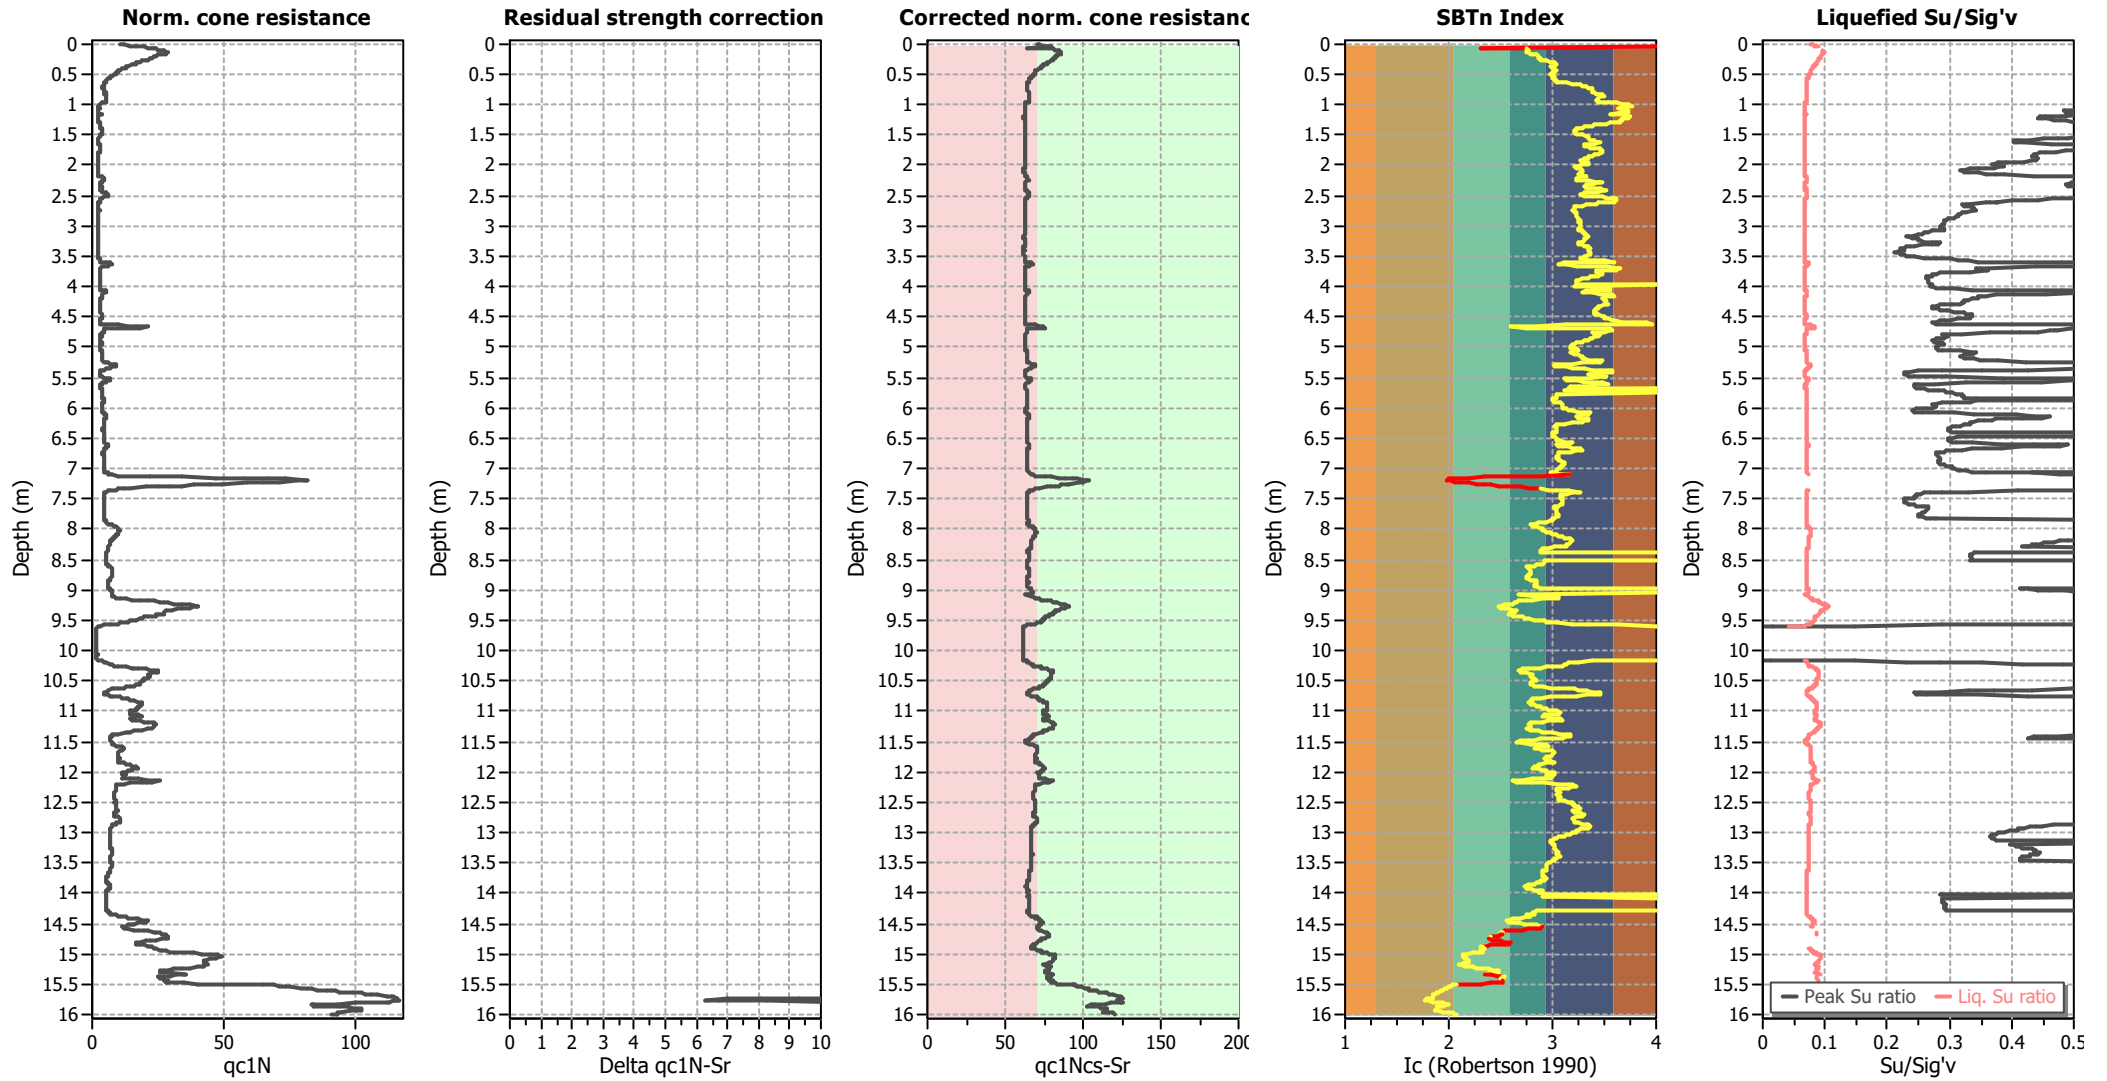

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _o applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

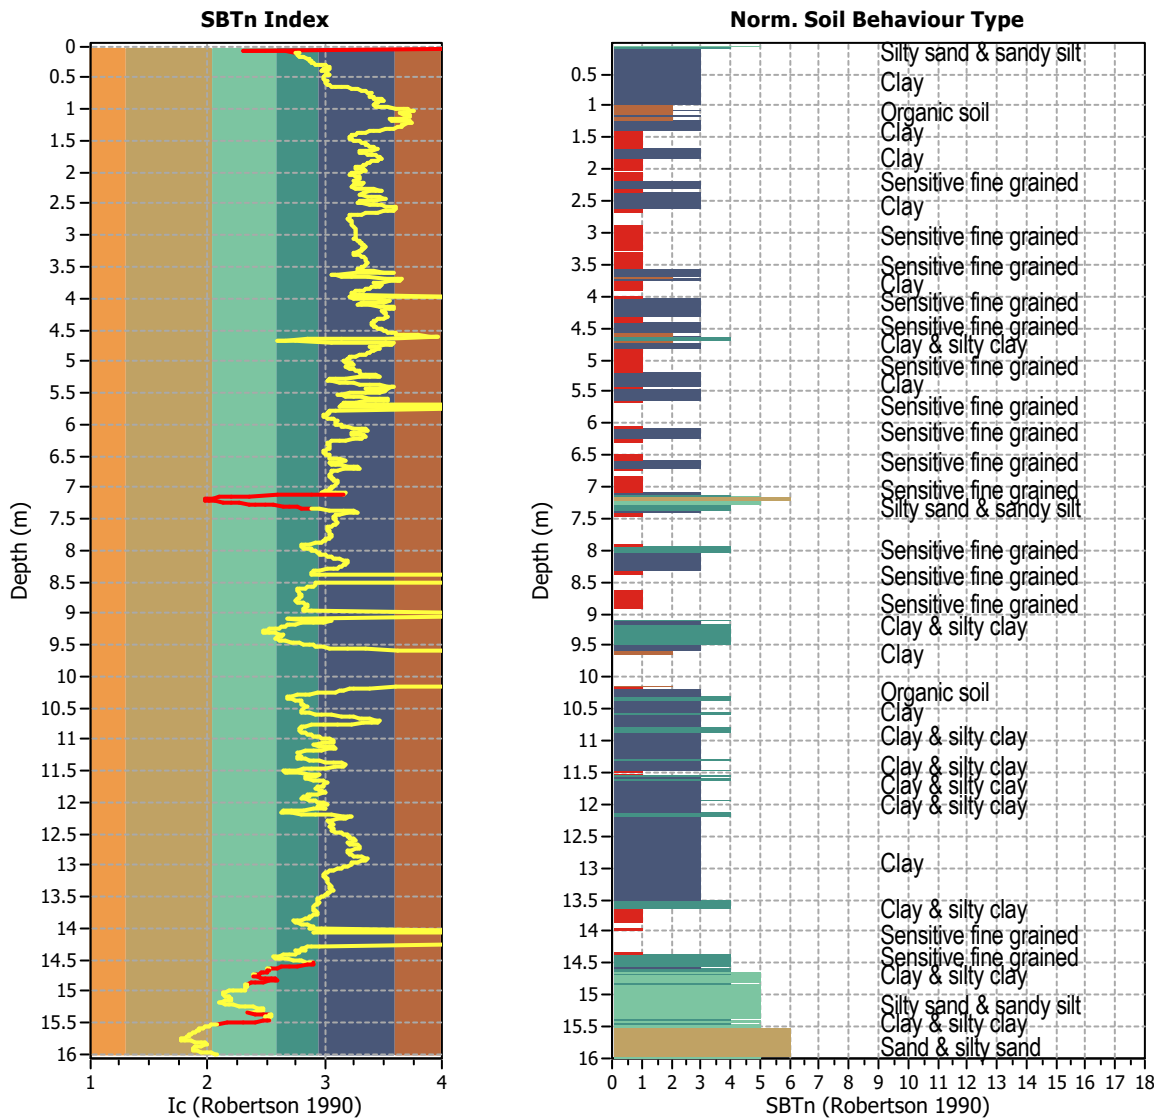


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1600
 Total points excluded: 72
 Exclusion percentage: 4.50%
 Number of layers detected: 9


Estimation of post-earthquake settlements

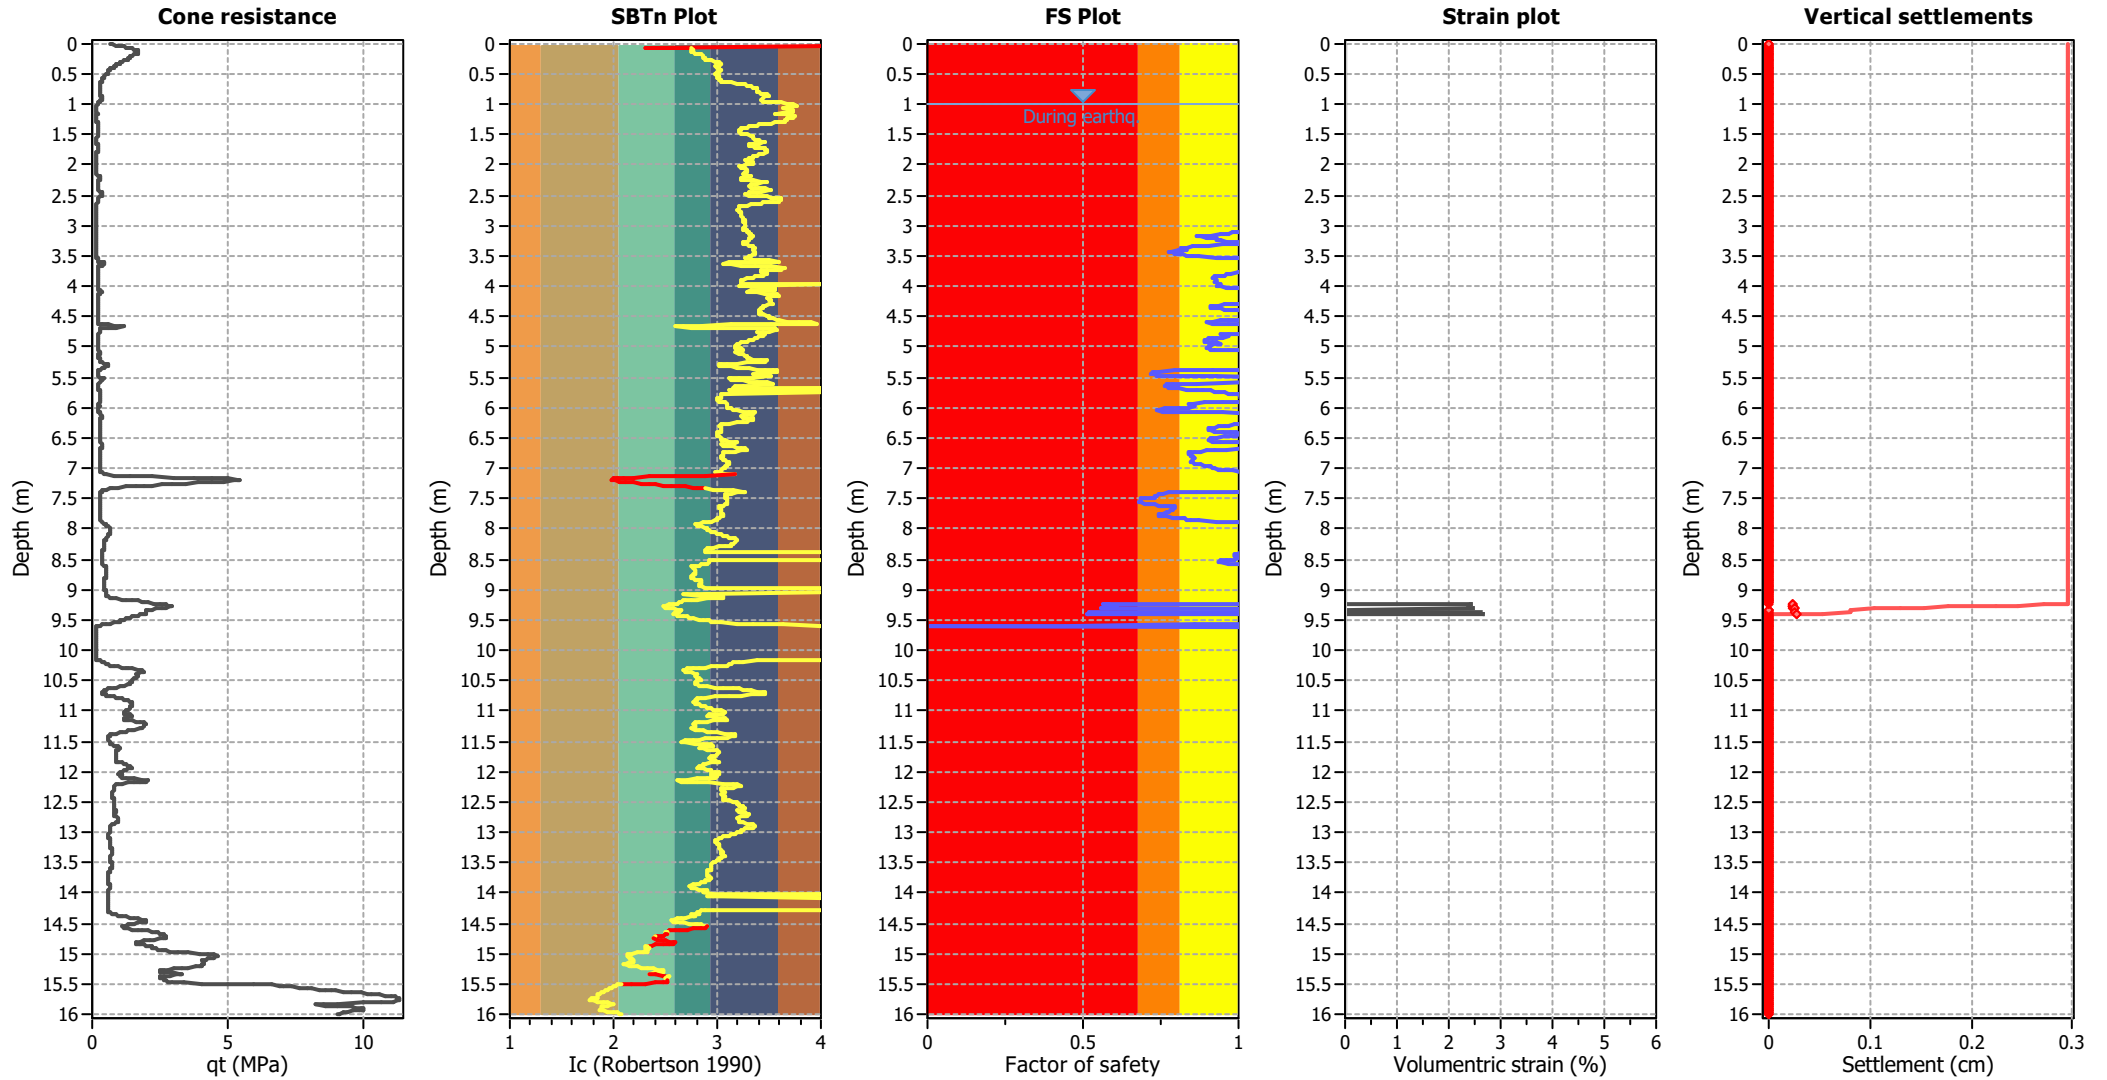

Abbreviations

- q_c: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

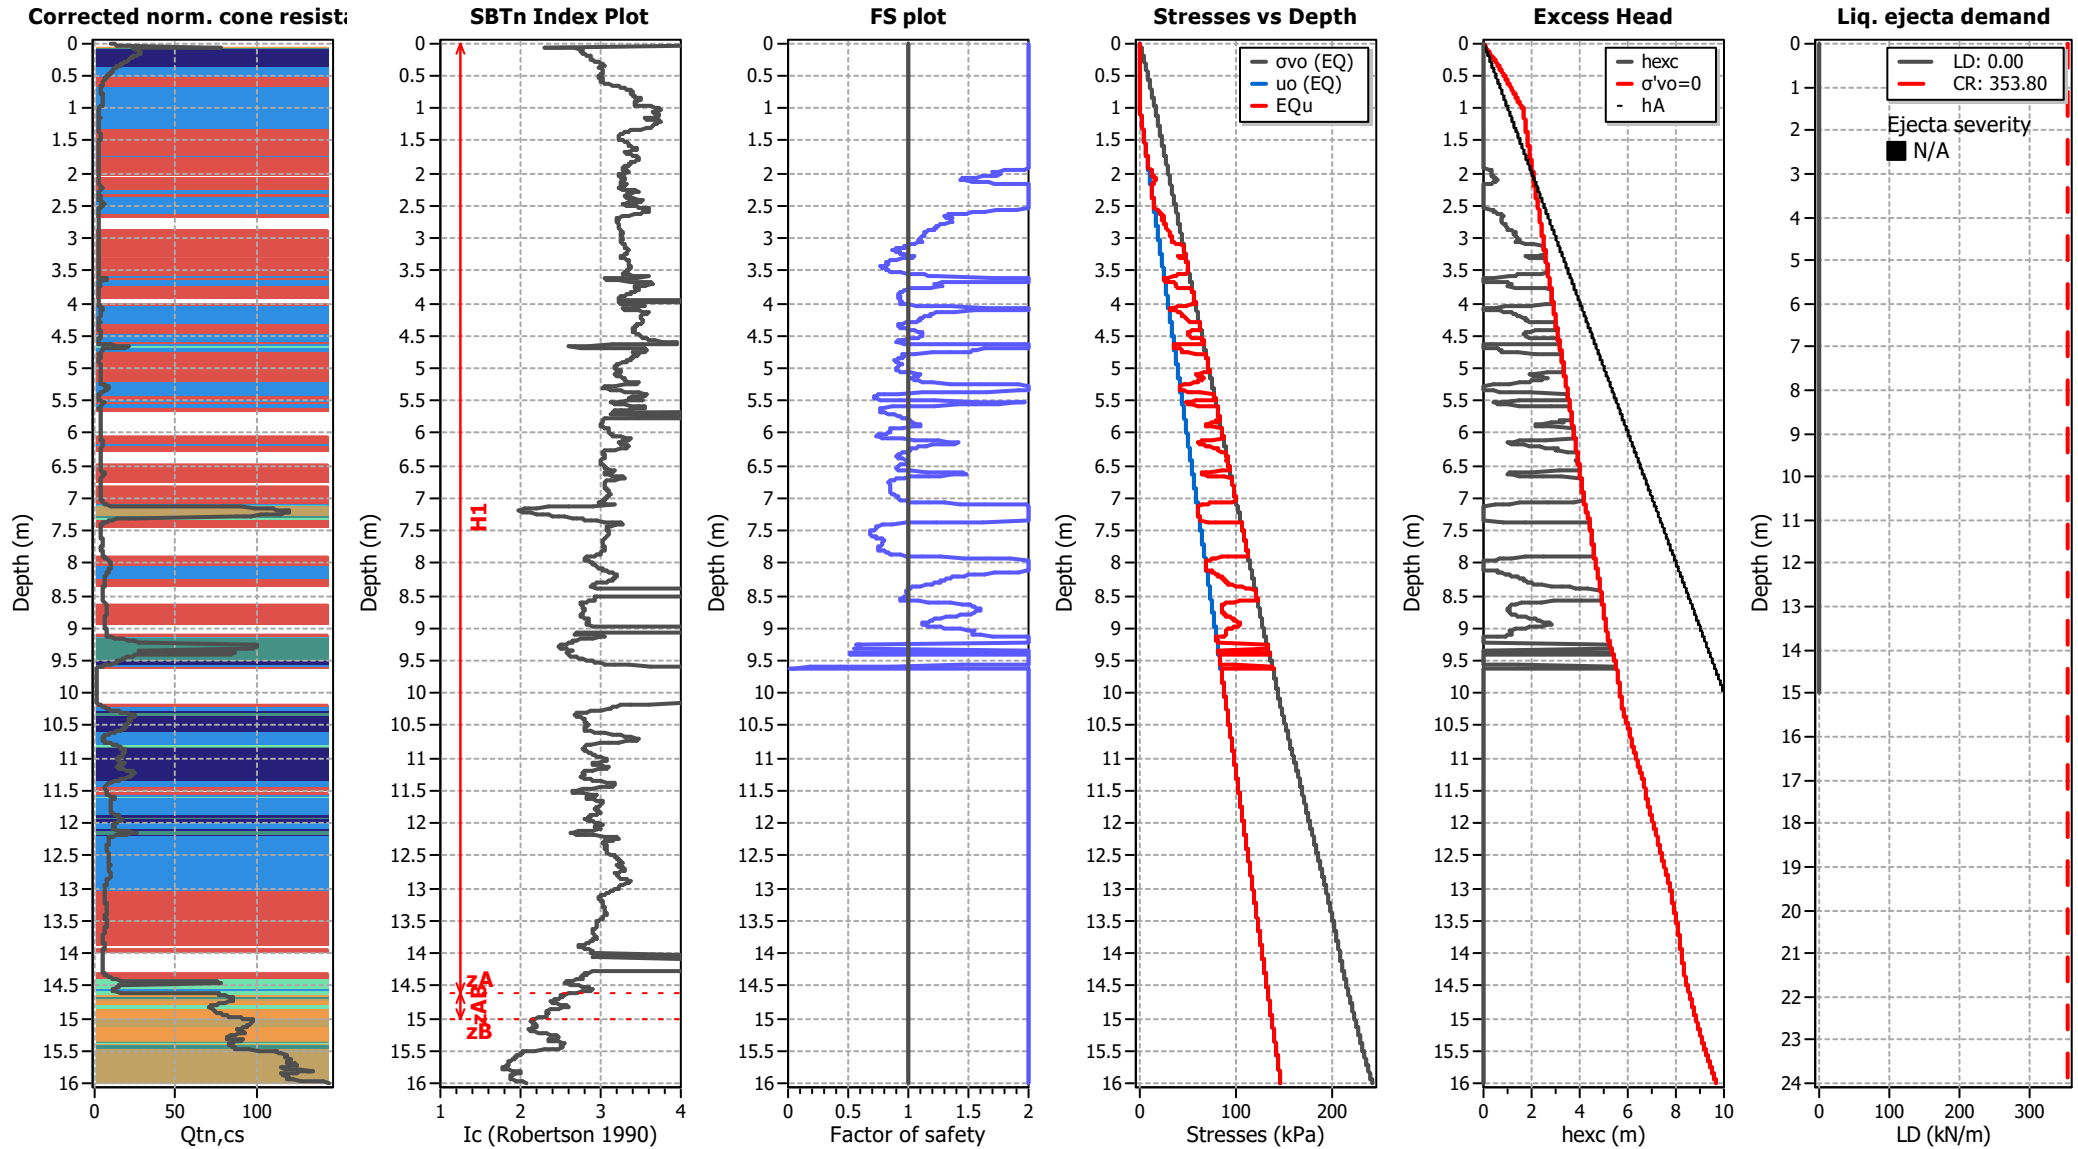

LIQUEFACTION ANALYSIS REPORT




Project title :

Location :


CPT file : CPT415A

Input parameters and analysis data

Analysis method:	B&I (2014)	G.W.T. (in-situ):	1.00 m	Use fill:	No	Clay like behavior applied:	Sand & Clay
Fines correction method:	B&I (2014)	G.W.T. (earthq.):	1.00 m	Fill height:	N/A	Limit depth applied:	Yes
Points to test:	Based on Ic value	Average results interval:	3	Fill weight:	N/A	Limit depth:	10.00 m
Earthquake magnitude M_w :	6.50	Ic cut-off value:	2.60	Trans. detect. applied:	Yes	MSF method:	Method based
Peak ground acceleration:	0.19	Unit weight calculation:	Based on SBT	K_σ applied:	Yes		

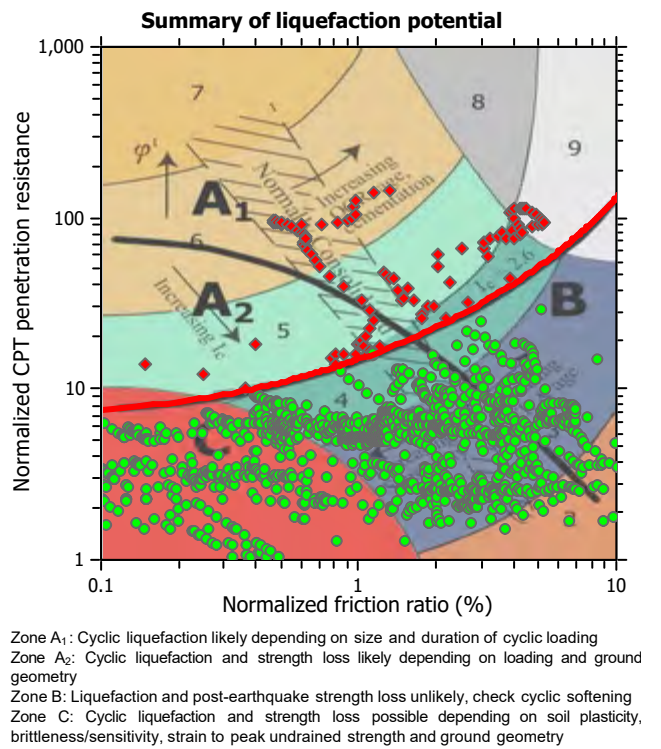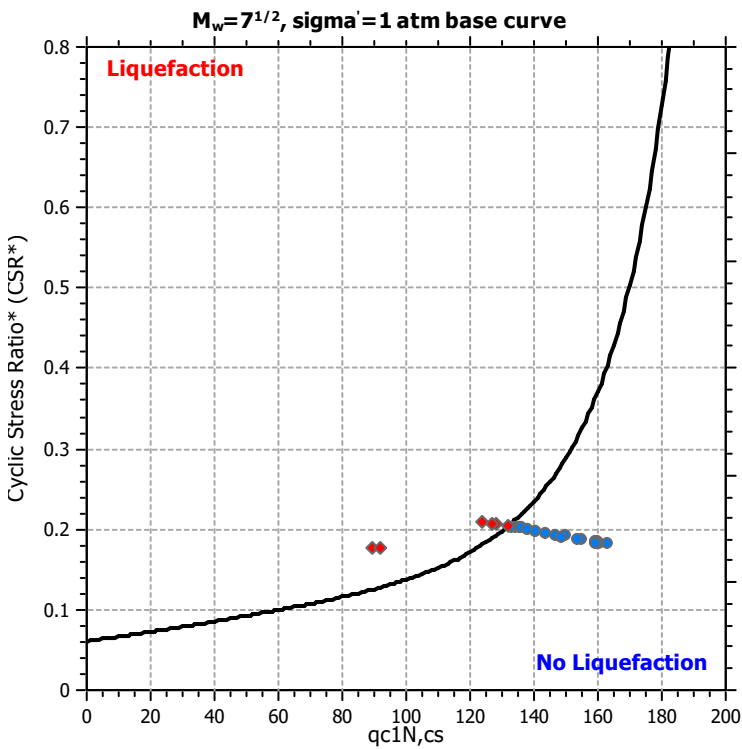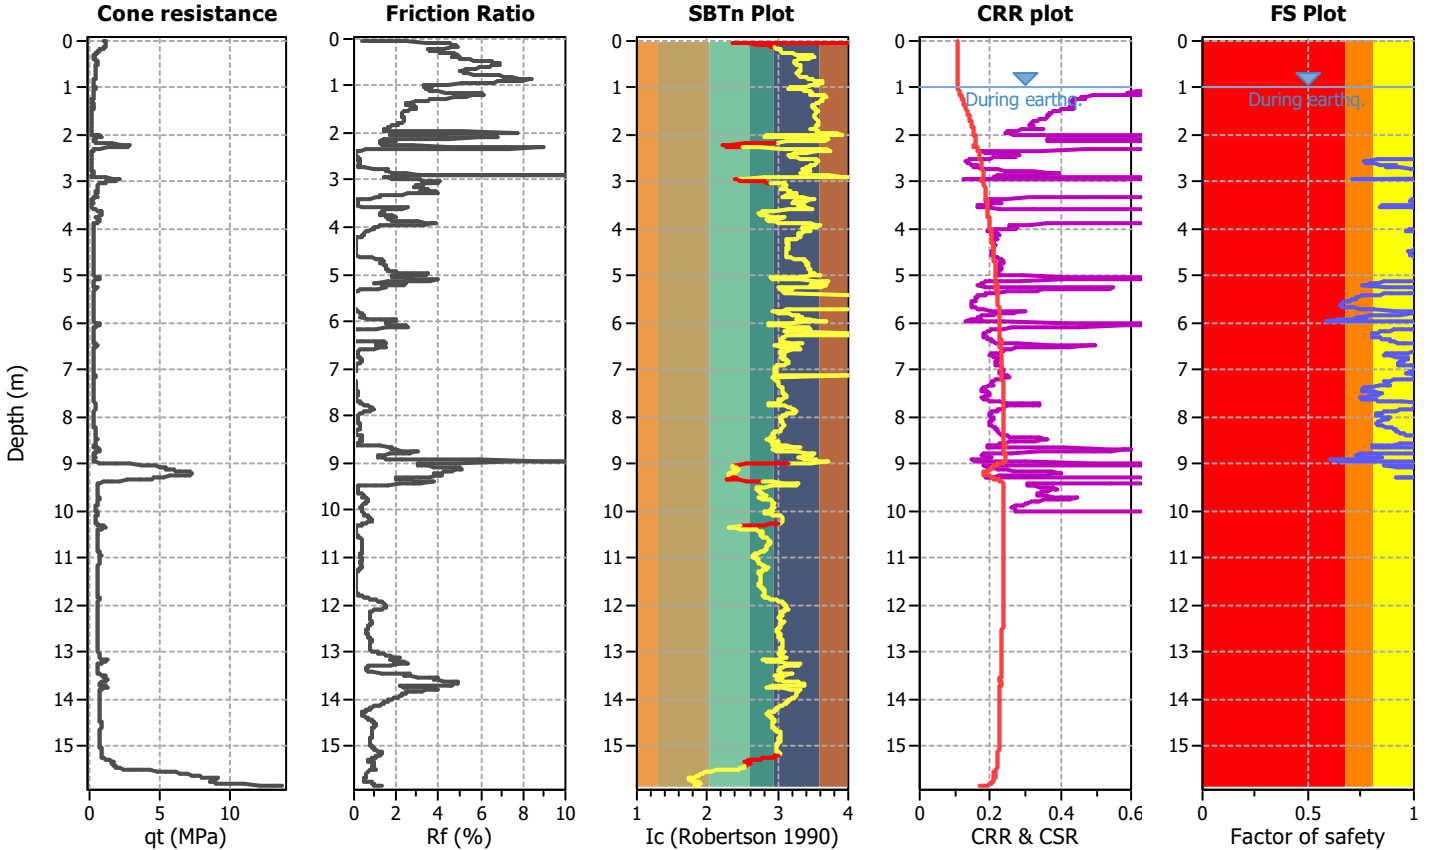

CPT basic interpretation plots

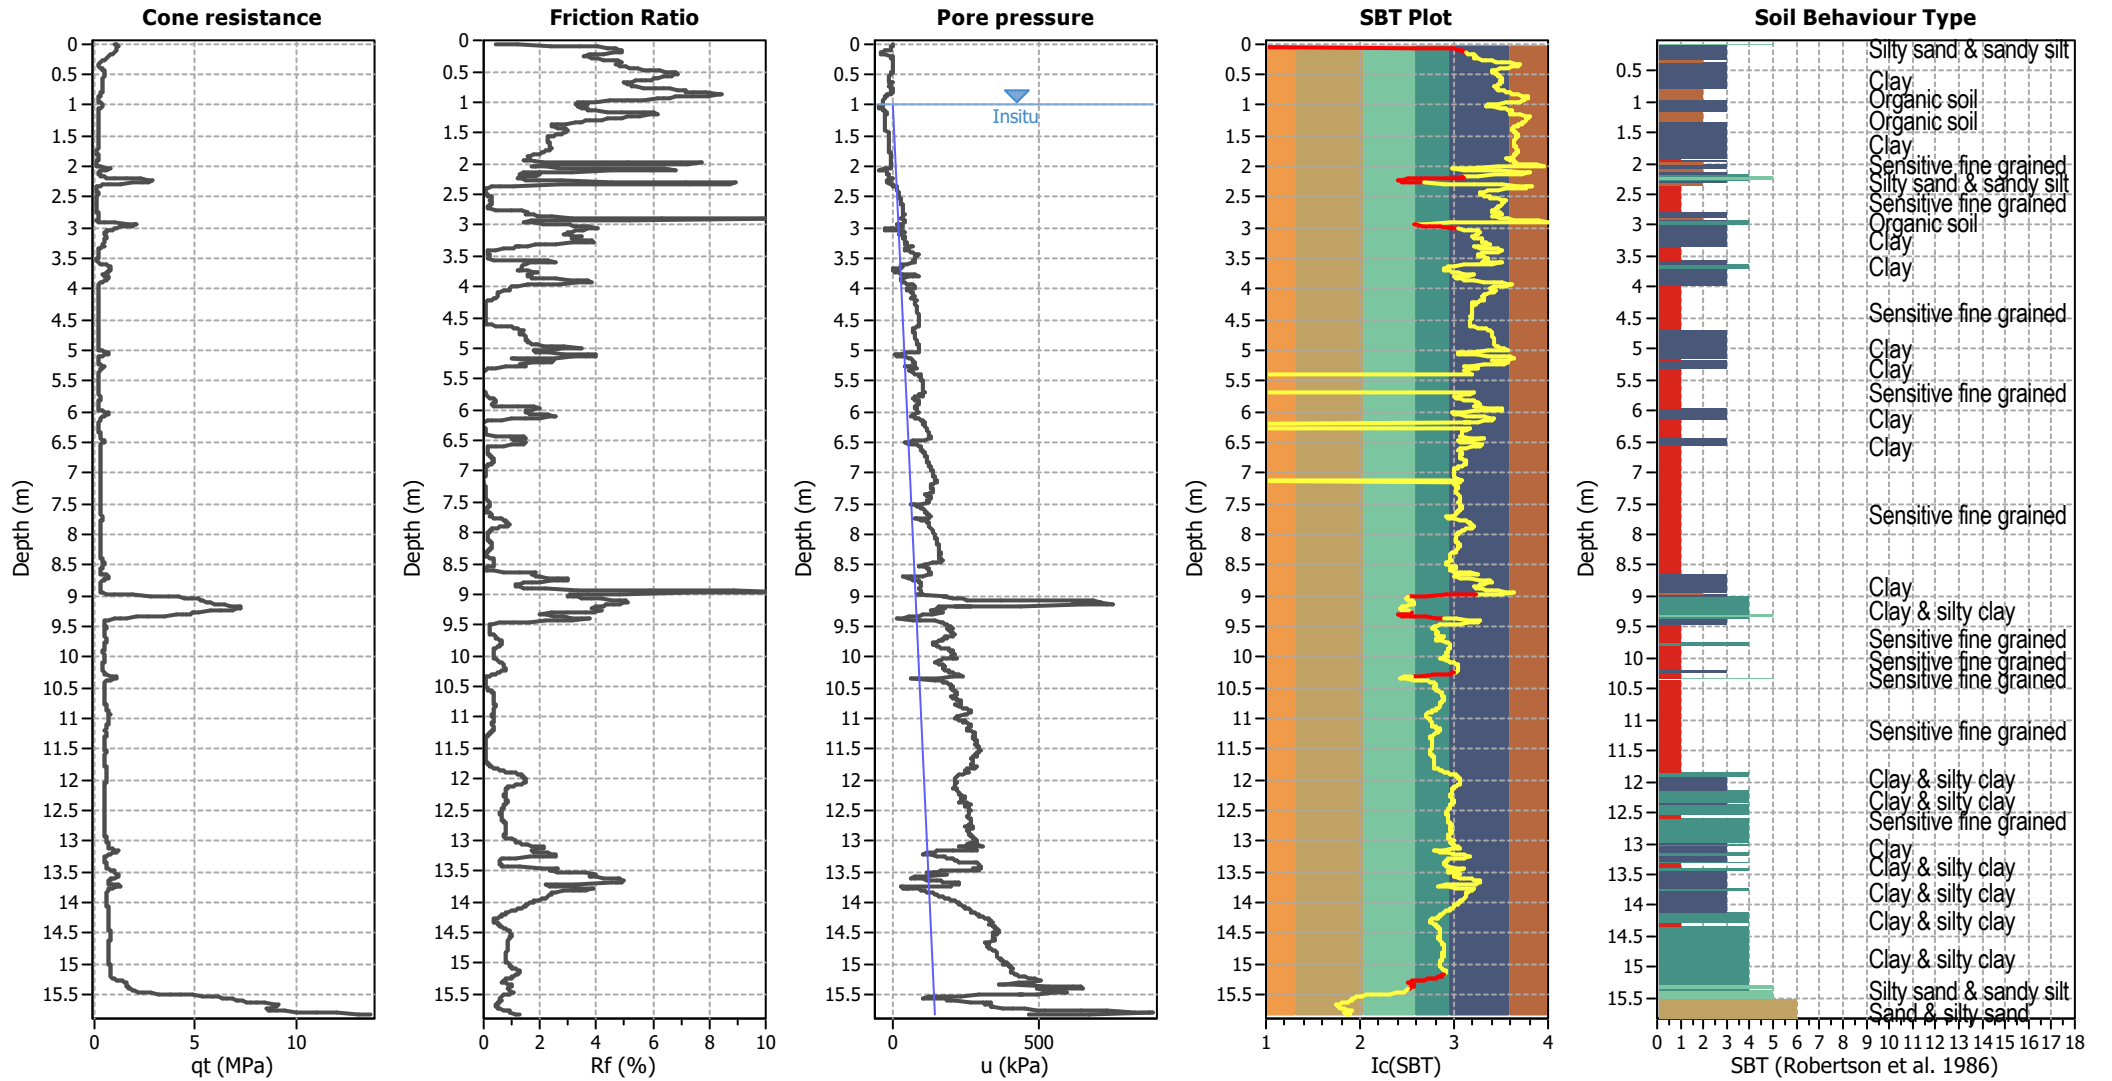


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBT legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained

CPT basic interpretation plots (normalized)

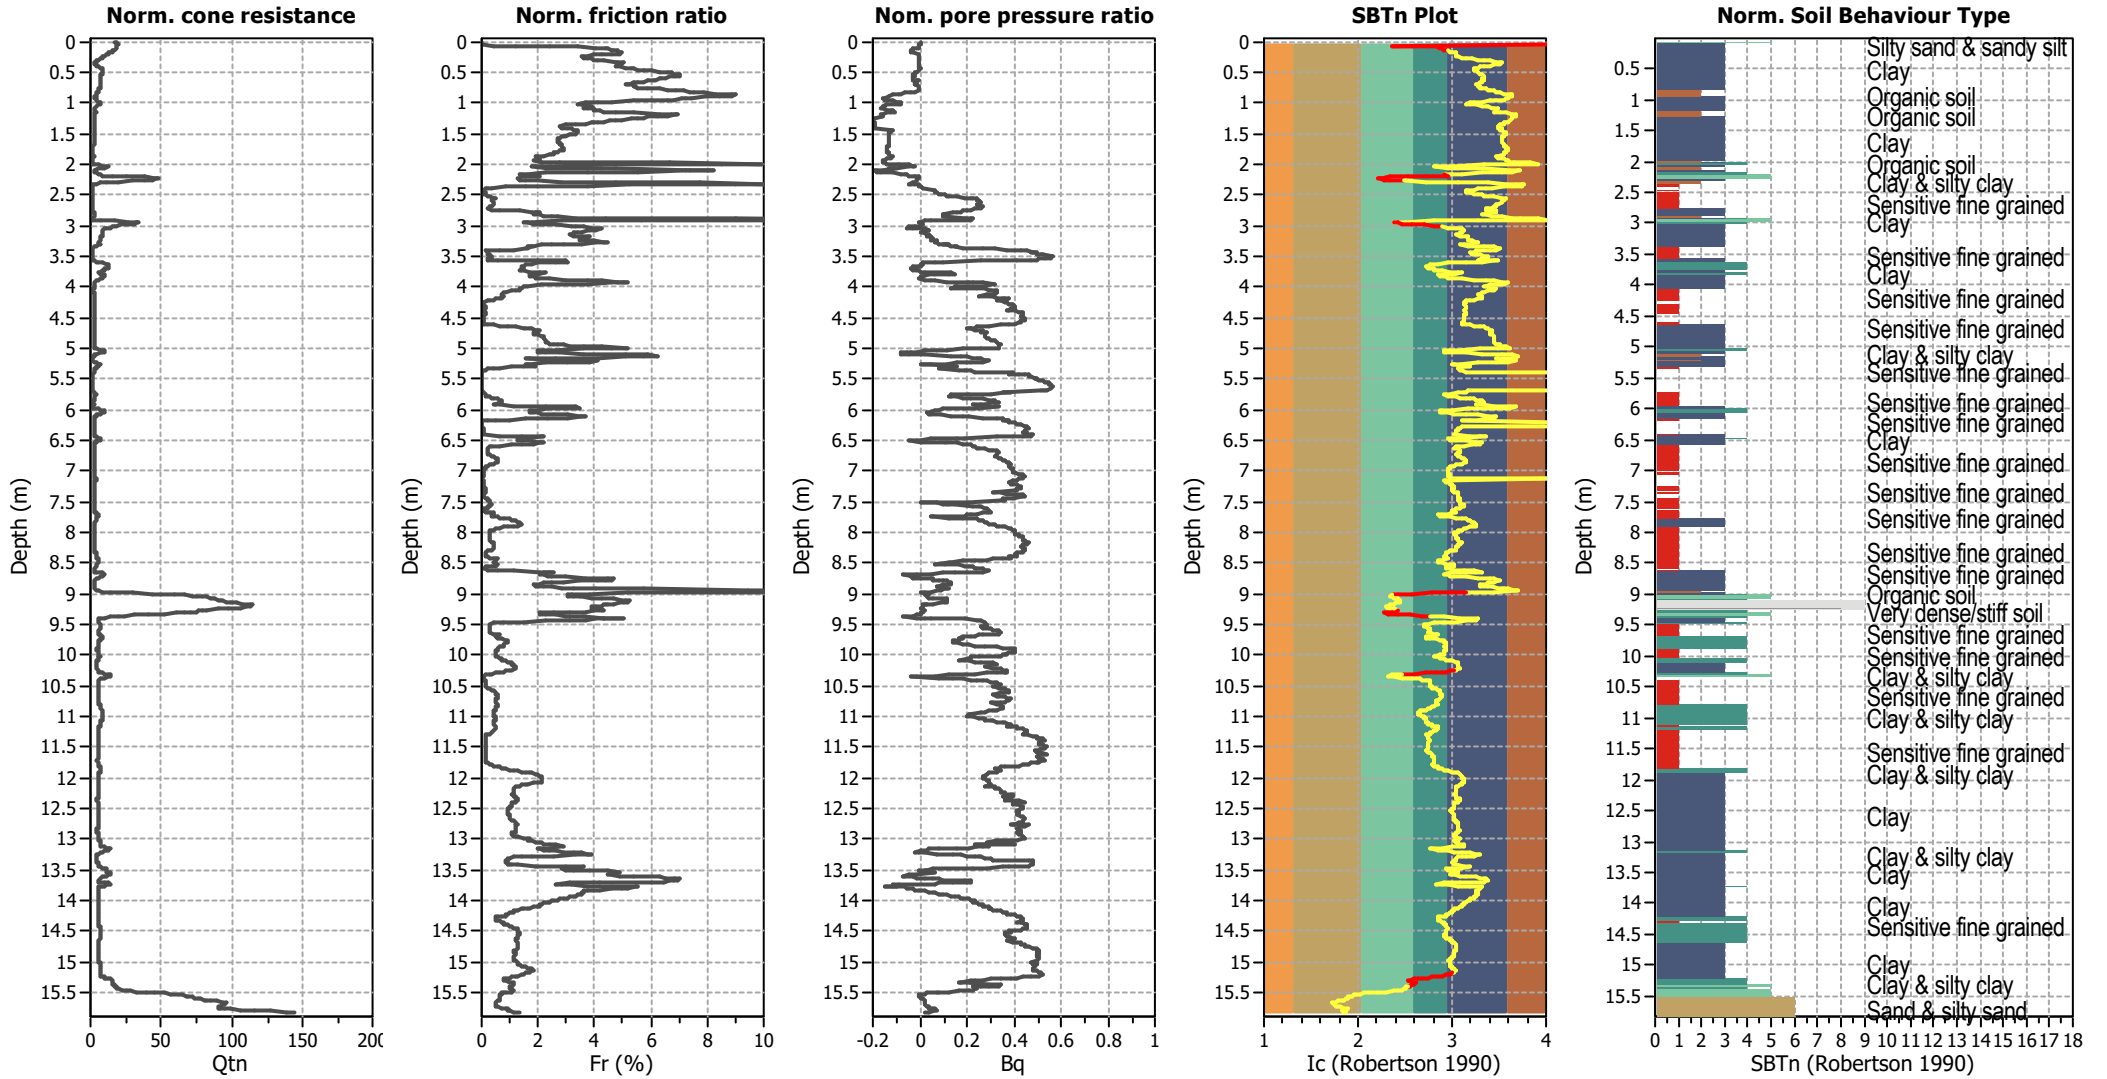


Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_0 applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

SBTn legend

1. Sensitive fine grained	4. Clayey silt to silty	7. Gravely sand to sand
2. Organic material	5. Silty sand to sandy silt	8. Very stiff sand to
3. Clay to silty clay	6. Clean sand to silty sand	9. Very stiff fine grained


Liquefaction analysis overall plots (intermediate results)

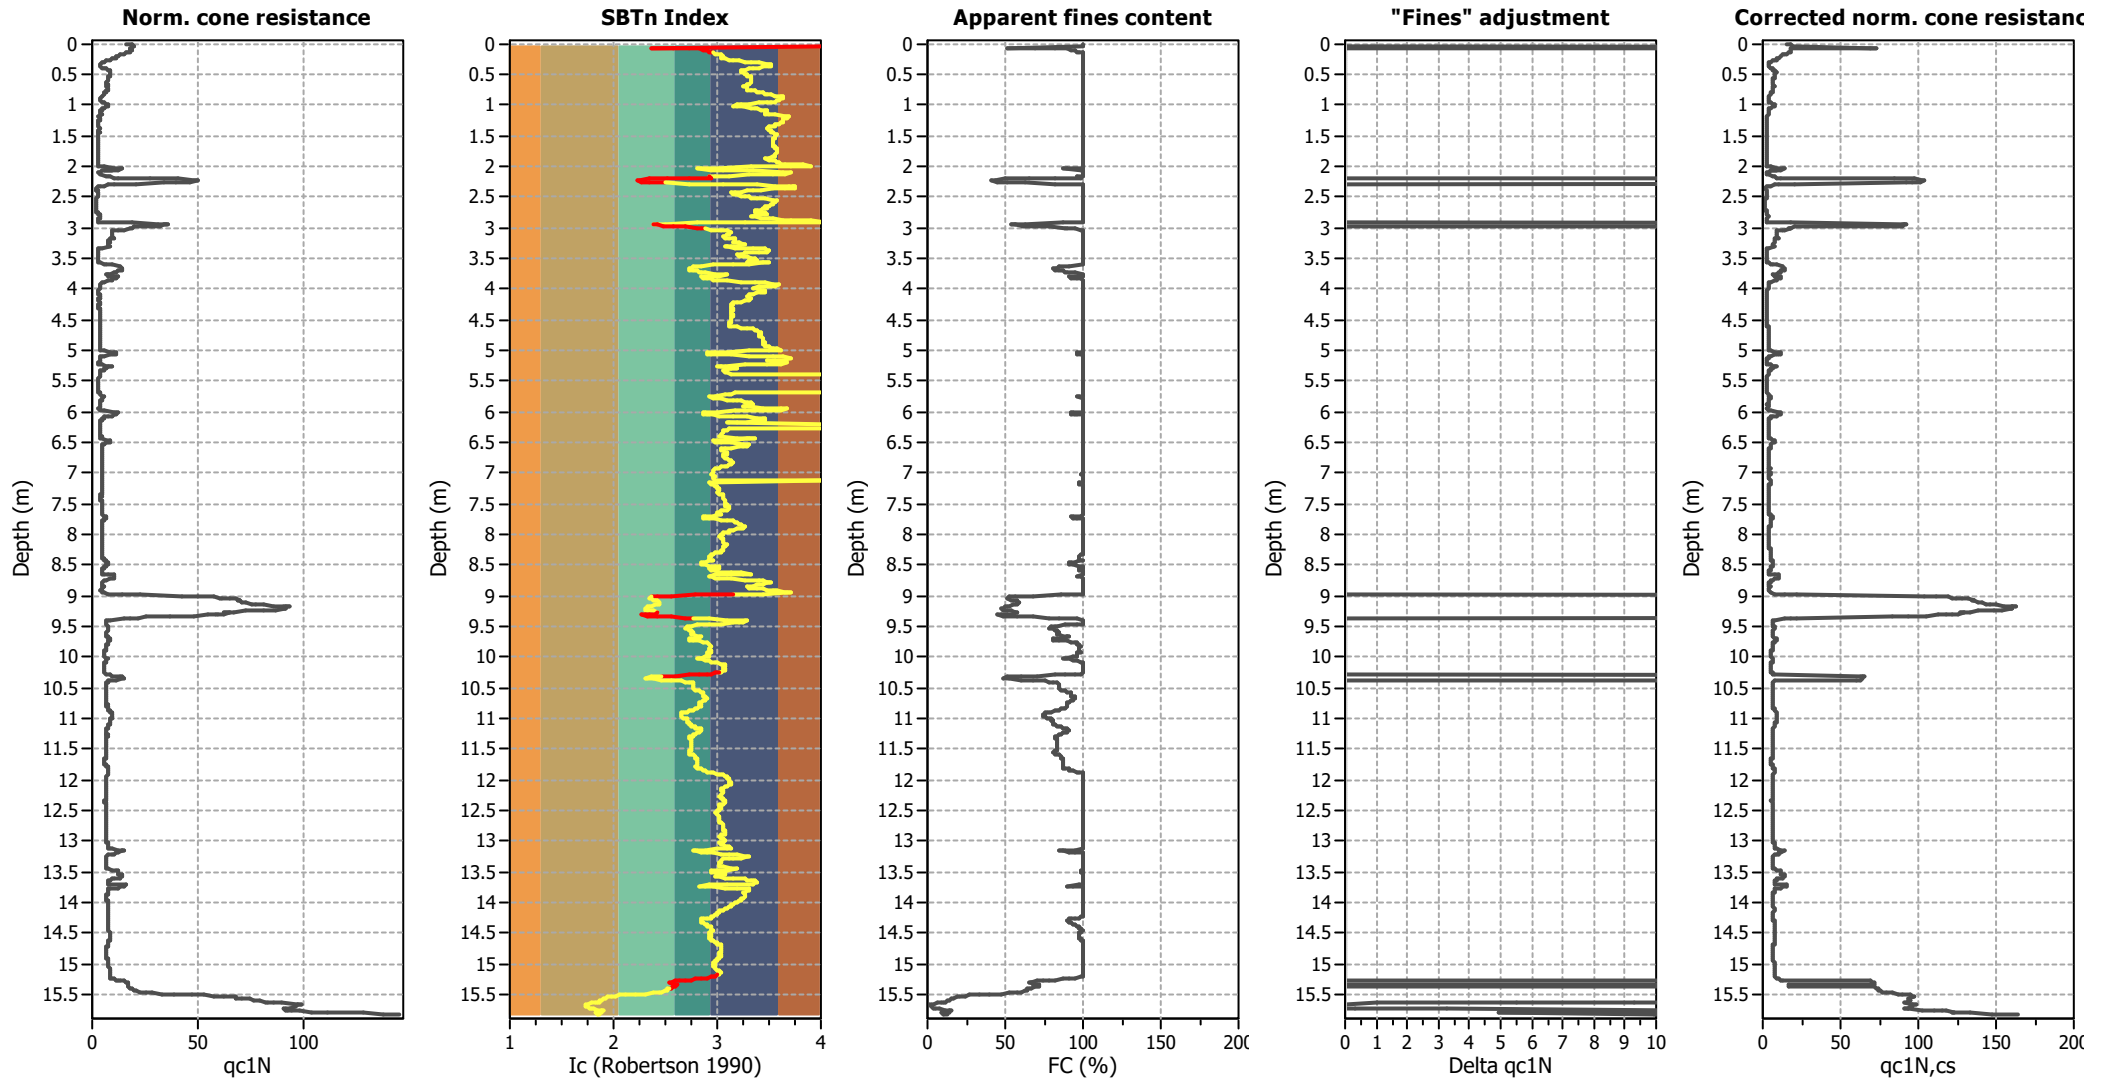

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Liquefaction analysis overall plots

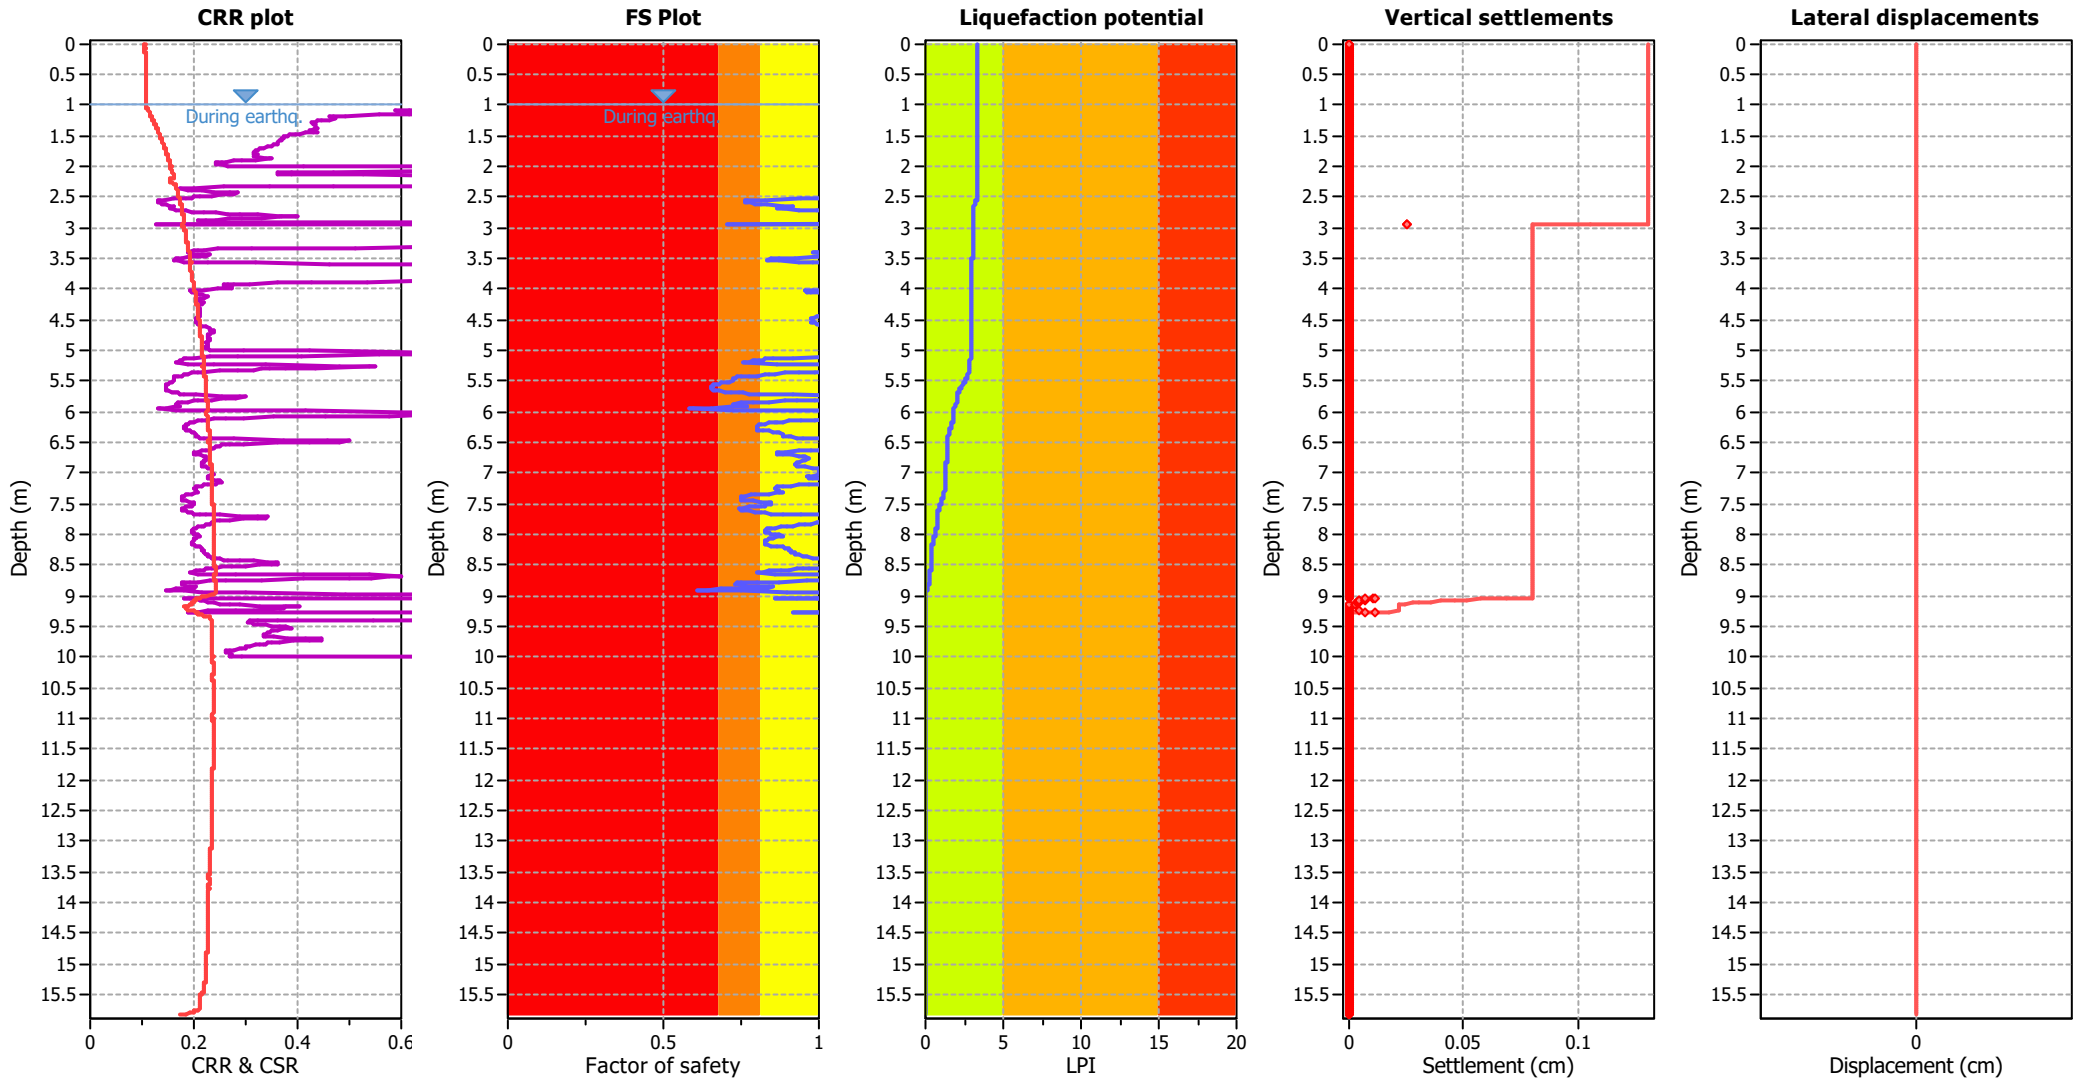

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K_{σ} applied:	Yes
Earthquake magnitude M_w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m




F.S. color scheme

- Almost certain it will liquefy
- Very likely to liquefy
- Liquefaction and no liq. are equally likely
- Unlike to liquefy
- Almost certain it will not liquefy

LPI color scheme

- Very high risk
- High risk
- Low risk


Liquefaction analysis summary plots

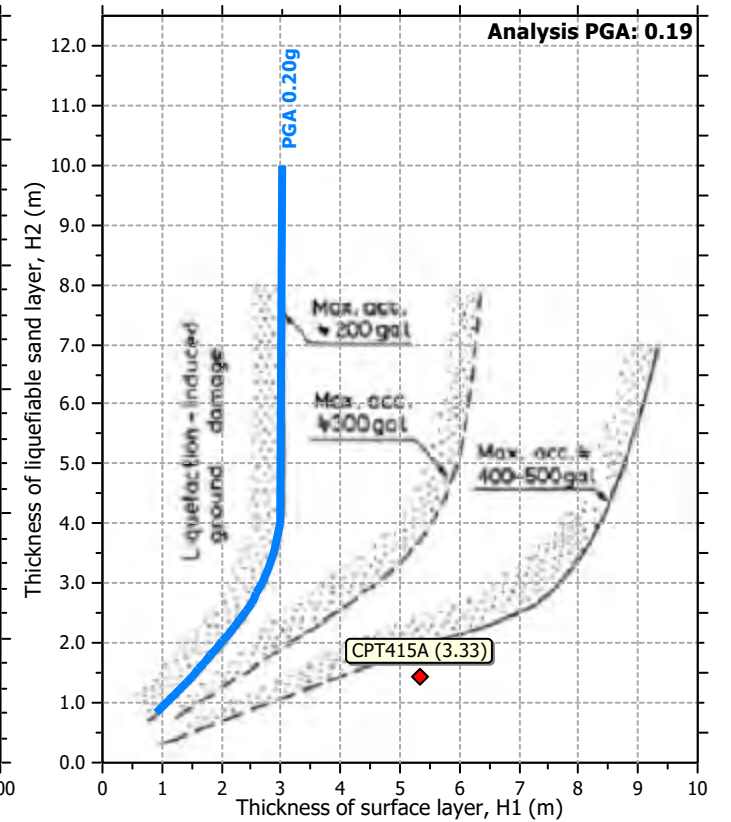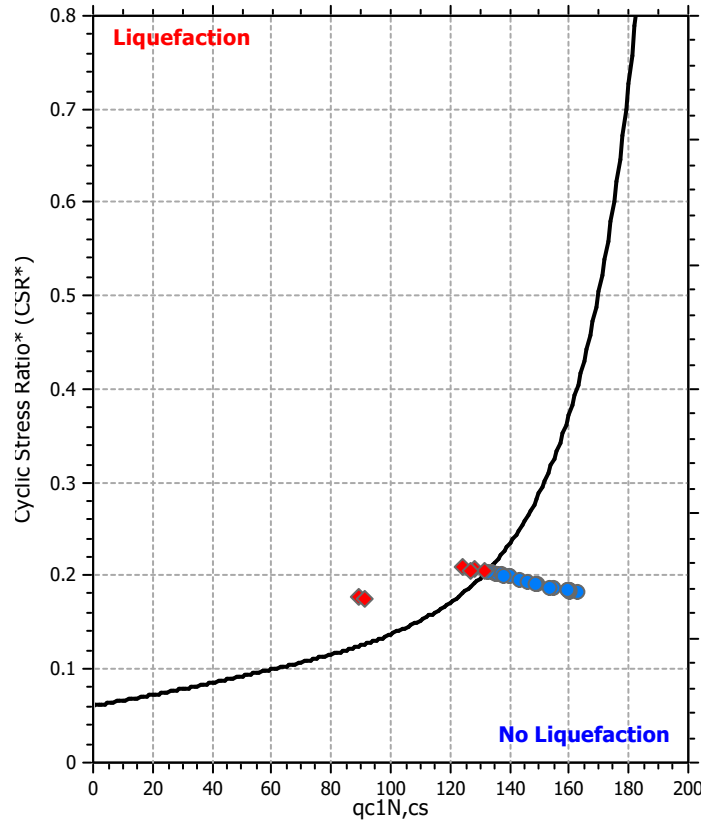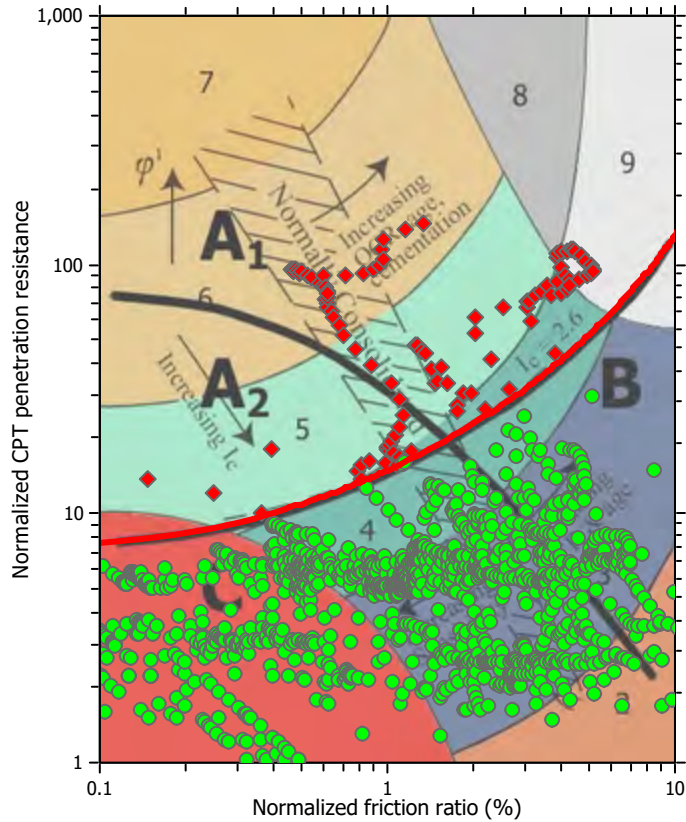

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m

Check for strength loss plots (Idriss & Boulanger (2008))

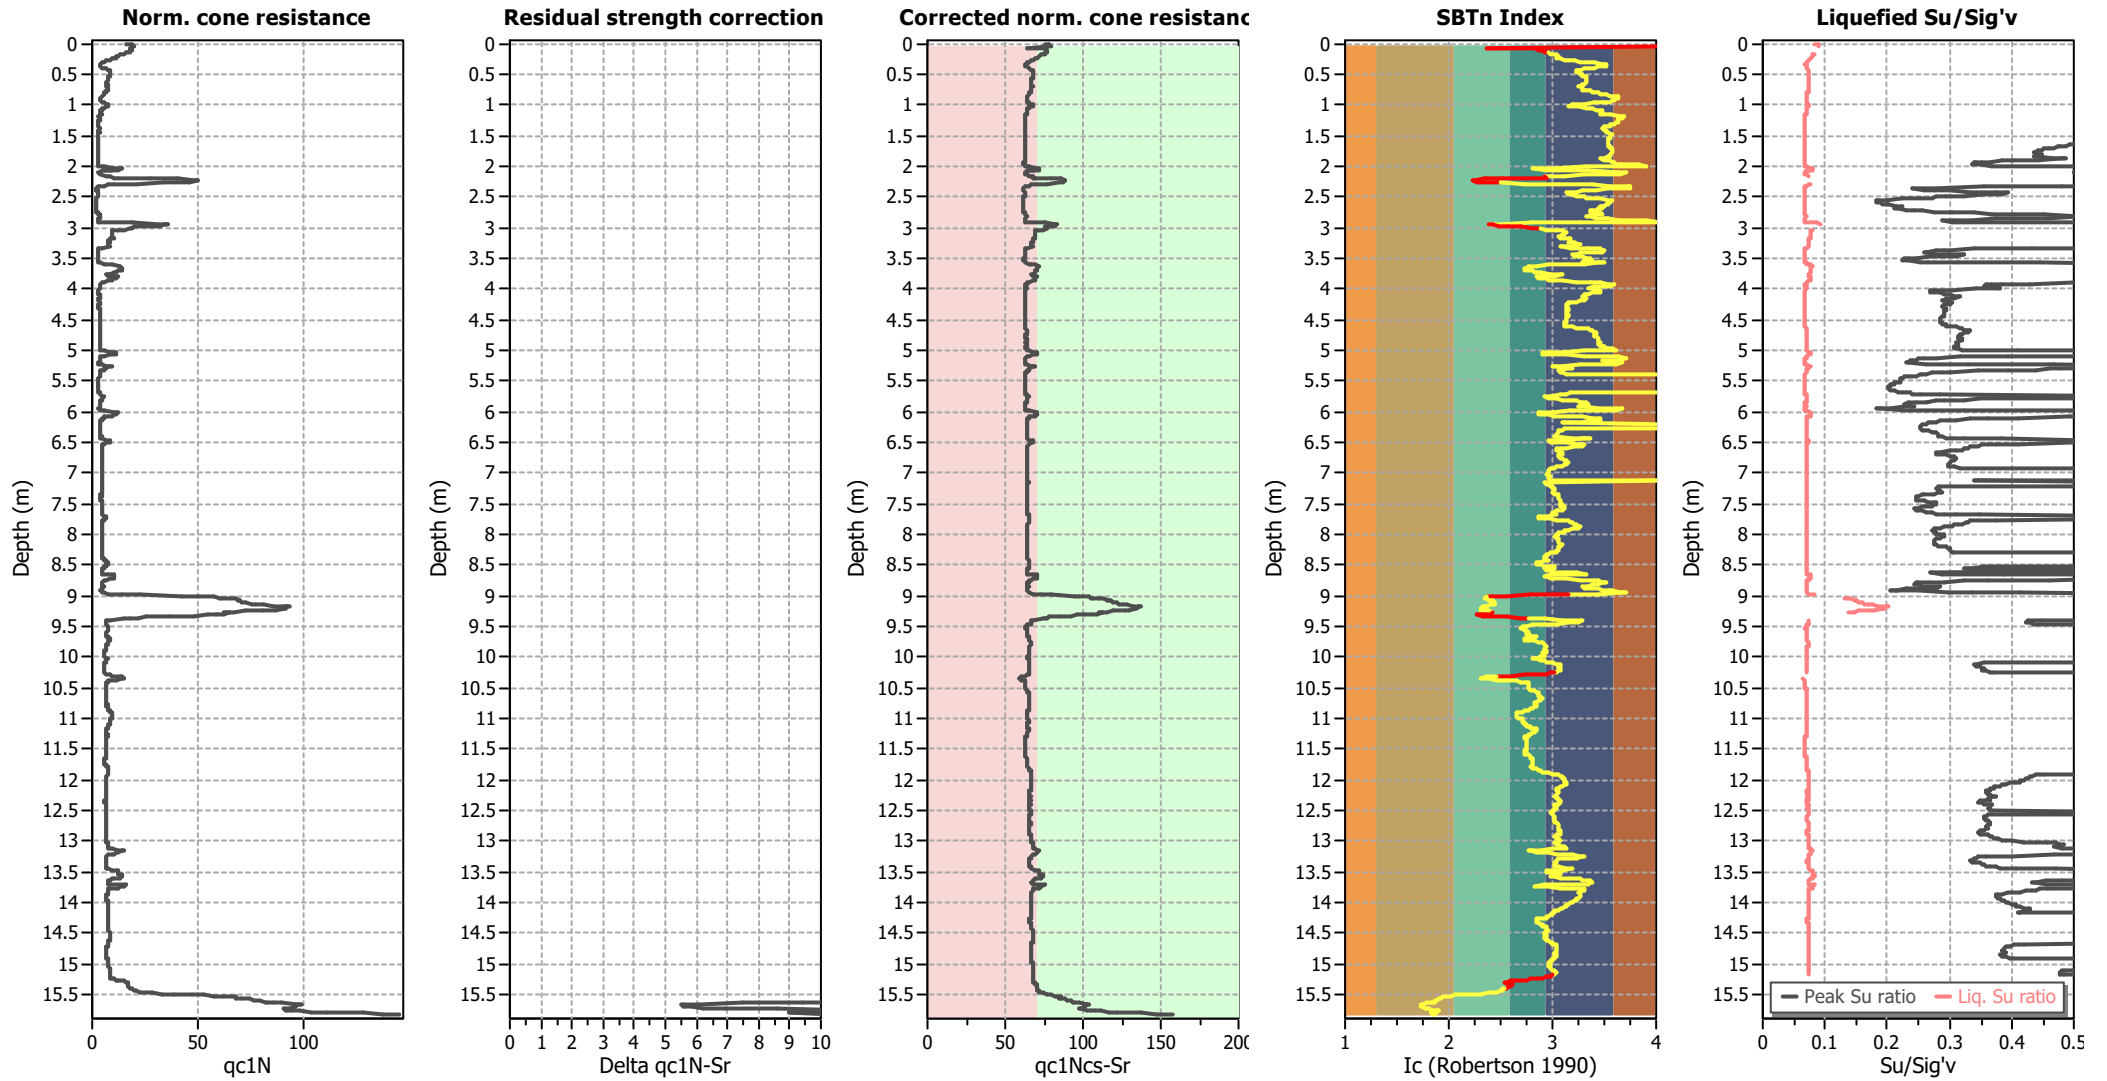

Input parameters and analysis data

Analysis method:	B&I (2014)	Depth to GWT (erthq.):	1.00 m	Fill weight:	N/A
Fines correction method:	B&I (2014)	Average results interval:	3	Transition detect. applied:	Yes
Points to test:	Based on Ic value	Ic cut-off value:	2.60	K _σ applied:	Yes
Earthquake magnitude M _w :	6.50	Unit weight calculation:	Based on SBT	Clay like behavior applied:	Sand & Clay
Peak ground acceleration:	0.19	Use fill:	No	Limit depth applied:	Yes
Depth to water table (insitu):	1.00 m	Fill height:	N/A	Limit depth:	10.00 m


TRANSITION LAYER DETECTION ALGORITHM REPORT

Summary Details & Plots

Short description

The software will delete data when the cone is in transition from either clay to sand or vice-versa. To do this the software requires a range of I_c values over which the transition will be defined (typically somewhere between $1.80 < I_c < 3.0$) and a rate of change of I_c . Transitions typically occur when the rate of change of I_c is fast (i.e. ΔI_c is small).

The SBT_n plot below, displays in red the detected transition layers based on the parameters listed below the graphs.

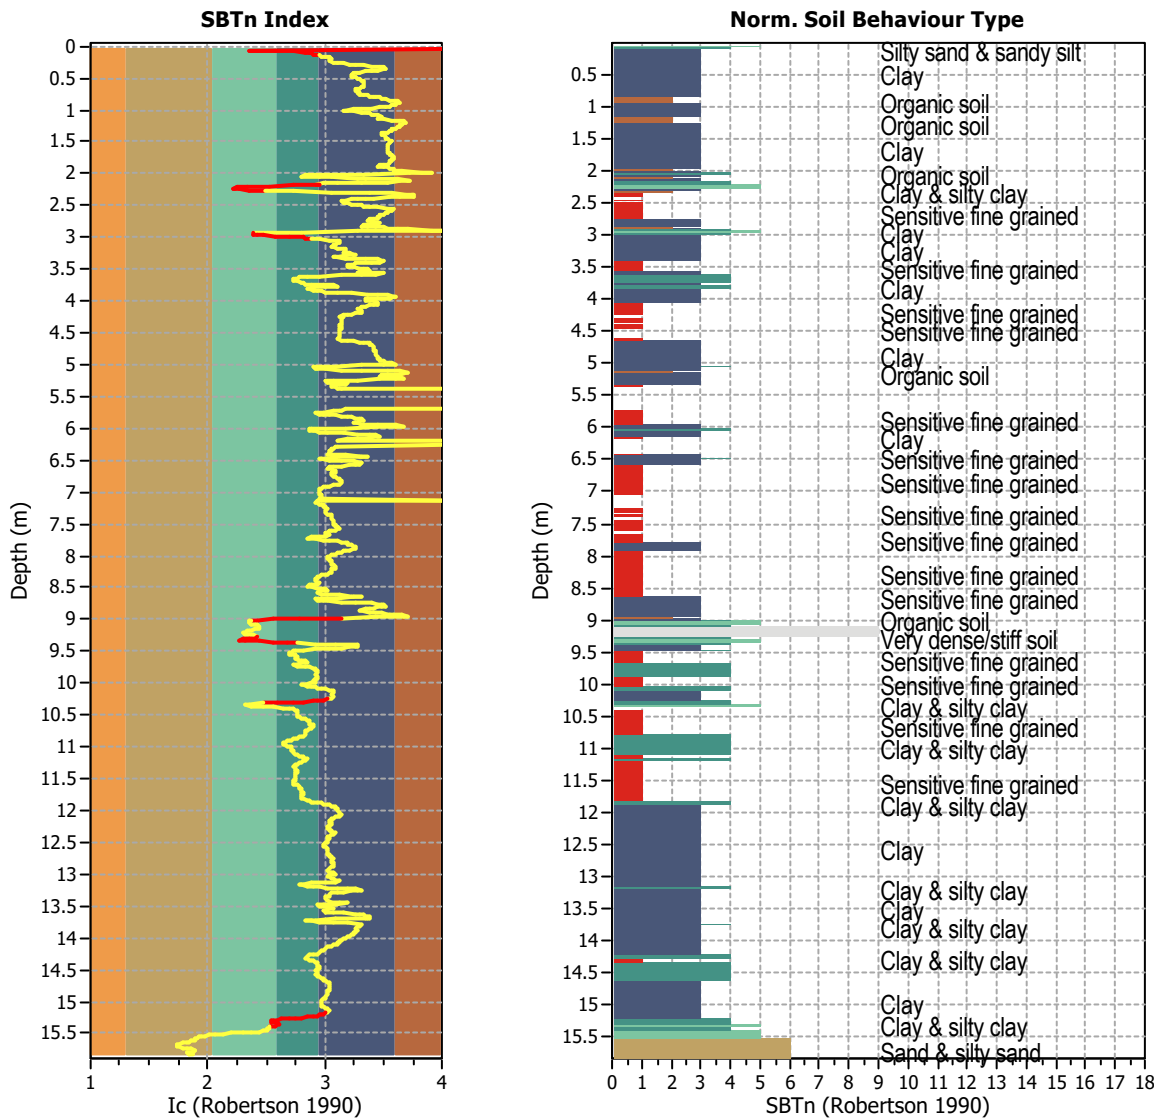


Transition layer algorithm properties

I_c minimum check value: 1.70
 I_c maximum check value: 3.00
 I_c change ratio value: 0.0100
 Minimum number of points in layer: 4

General statistics

Total points in CPT file: 1583
 Total points excluded: 80
 Exclusion percentage: 5.05%
 Number of layers detected: 11

Estimation of post-earthquake settlements

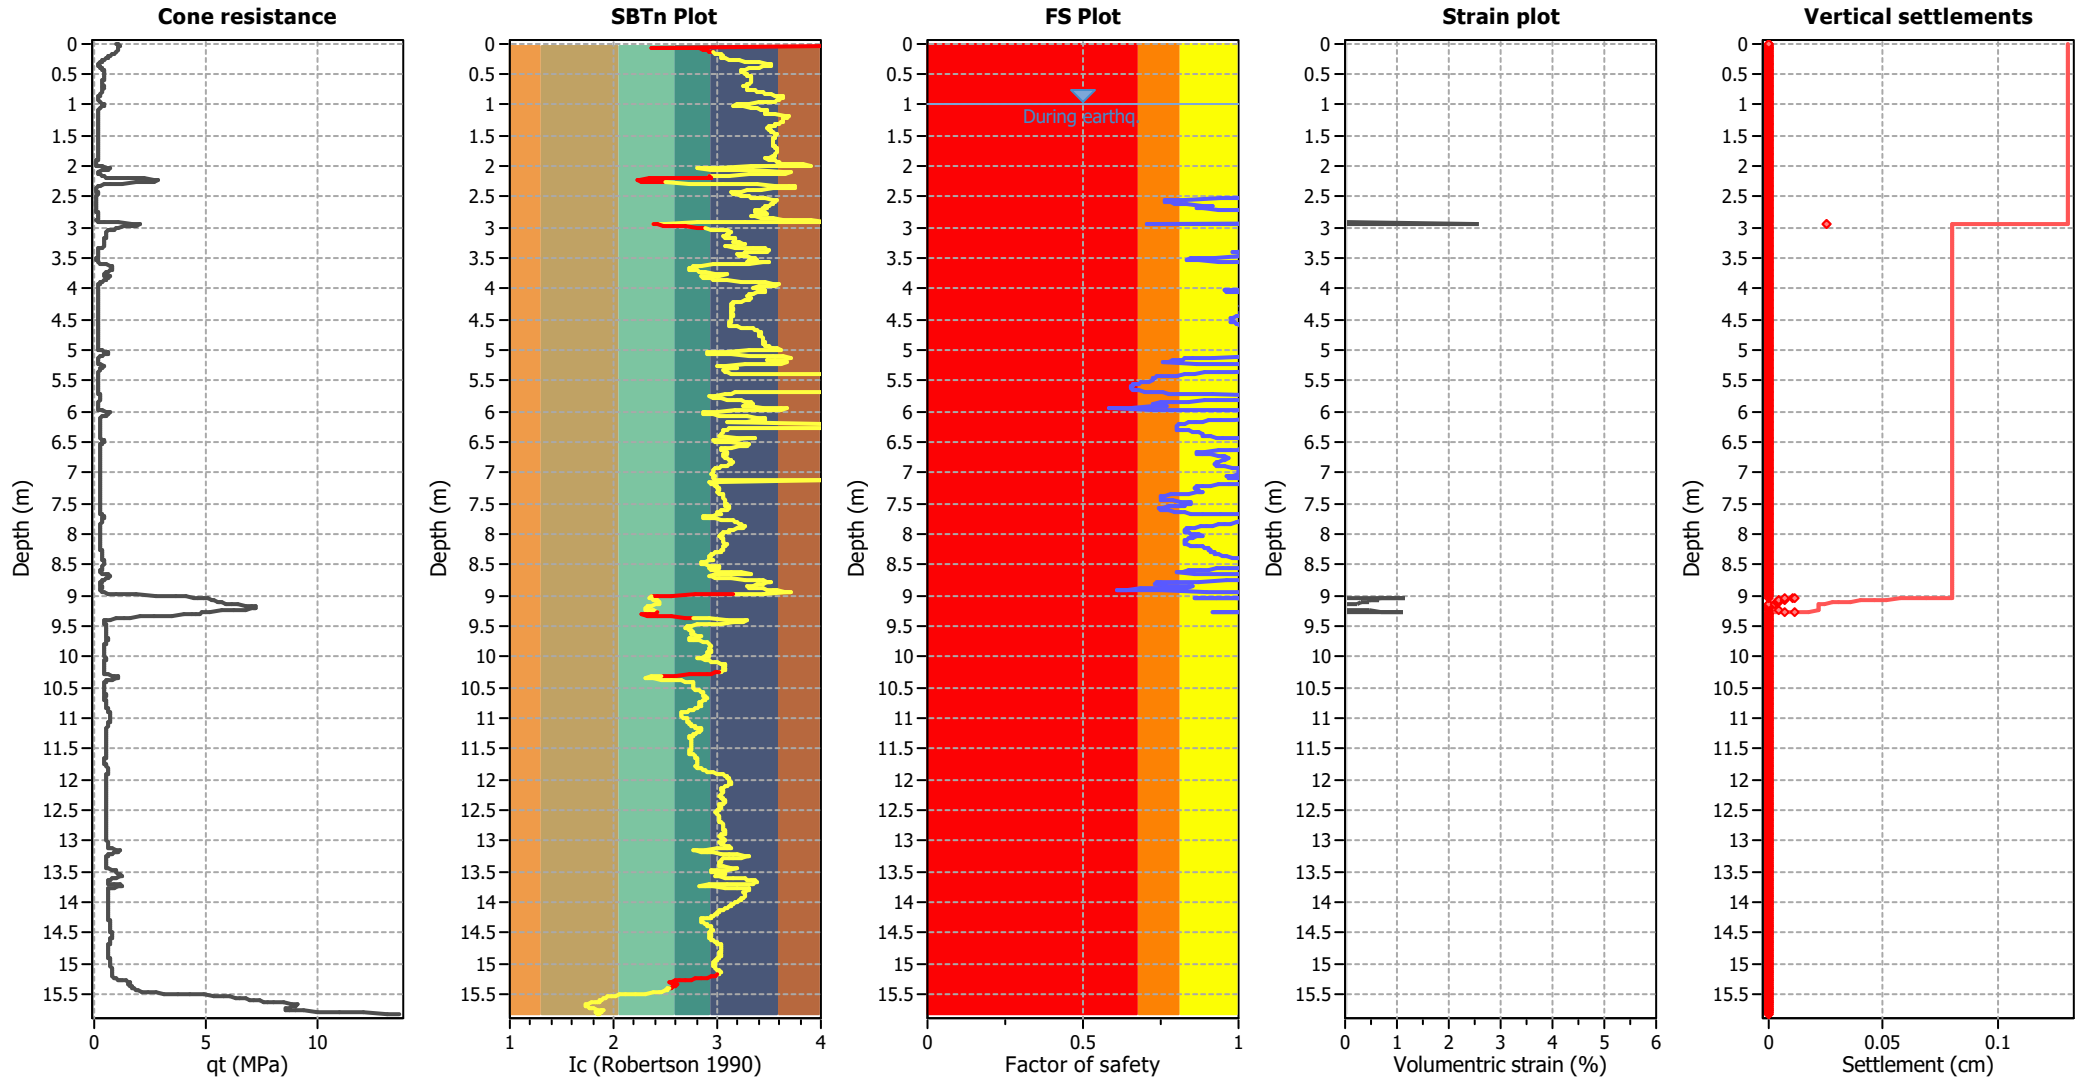

Abbreviations

- q_t: Total cone resistance (cone resistance q_c corrected for pore water effects)
- I_c: Soil Behaviour Type Index
- FS: Calculated Factor of Safety against liquefaction
- Volumetric strain: Post-liquefaction volumetric strain

Ejecta Severity Estimation

